

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2026/3/4

1_GSM 850_GPRS2Tx_CH251_Rear Face_0cm_Main_SIM2

DUT: Tablet;

Communication System: UID 0, GPRS 2TX (0); Frequency: 848.8 MHz; Duty Cycle: 1:4
Medium parameters used : $f = 848.8$ MHz; $\sigma = 0.941$ S/m; $\epsilon_r = 42.992$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.6 °C; Liquid Temperature : 22.3 °C

DASY Configuration:

- Probe: EX3DV4 - SN7506; ConvF(8.77, 9.44, 8.71) @ 848.8 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2025/11/21
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.783 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.763 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.781 W/kg

SAR(1 g) = 0.372 W/kg; SAR(10 g) = 0.279 W/kg

Smallest distance from peaks to all points 3 dB below = 11.9 mm

Ratio of SAR at M2 to SAR at M1 = 58.8%

Maximum value of SAR (measured) = 0.634 W/kg

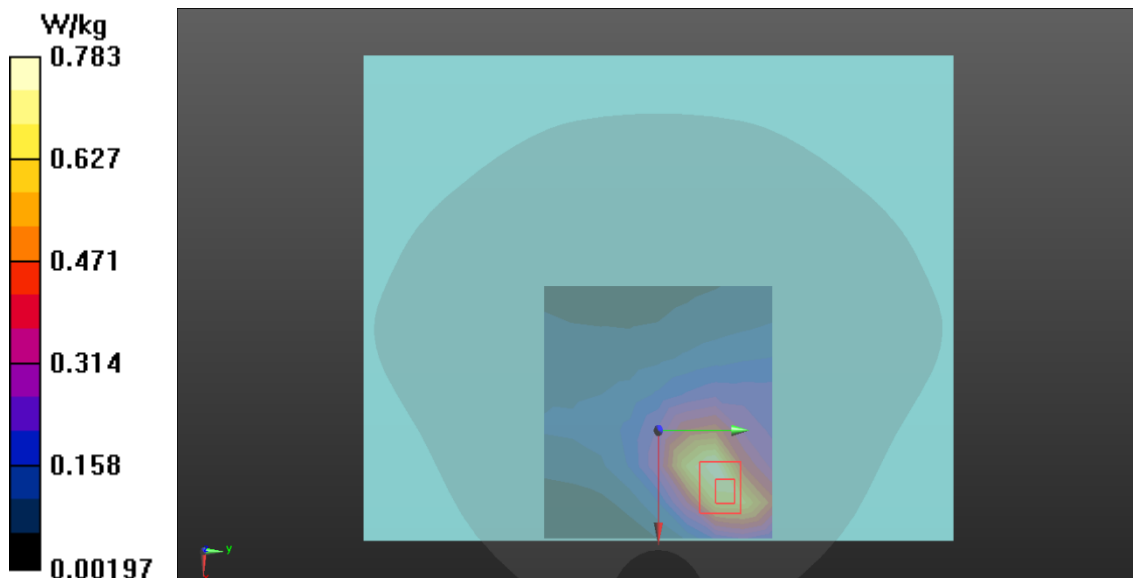

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2026/3/6

2_GSM 1900_GPRS2Tx_CH512_Rear Face_0cm_Main_SIM1

DUT: Tablet;


Communication System: UID 0, GPRS 2TX (0); Frequency: 1850.2 MHz; Duty Cycle: 1:4
Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.436$ S/m; $\epsilon_r = 41.244$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.8 °C; Liquid Temperature : 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.33, 7.89, 7.28) @ 1850.2 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2025/11/21
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.417 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.755 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.763 W/kg
SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.143 W/kg
Smallest distance from peaks to all points 3 dB below = 12.8 mm
Ratio of SAR at M2 to SAR at M1 = 53.1%
Maximum value of SAR (measured) = 0.603 W/kg

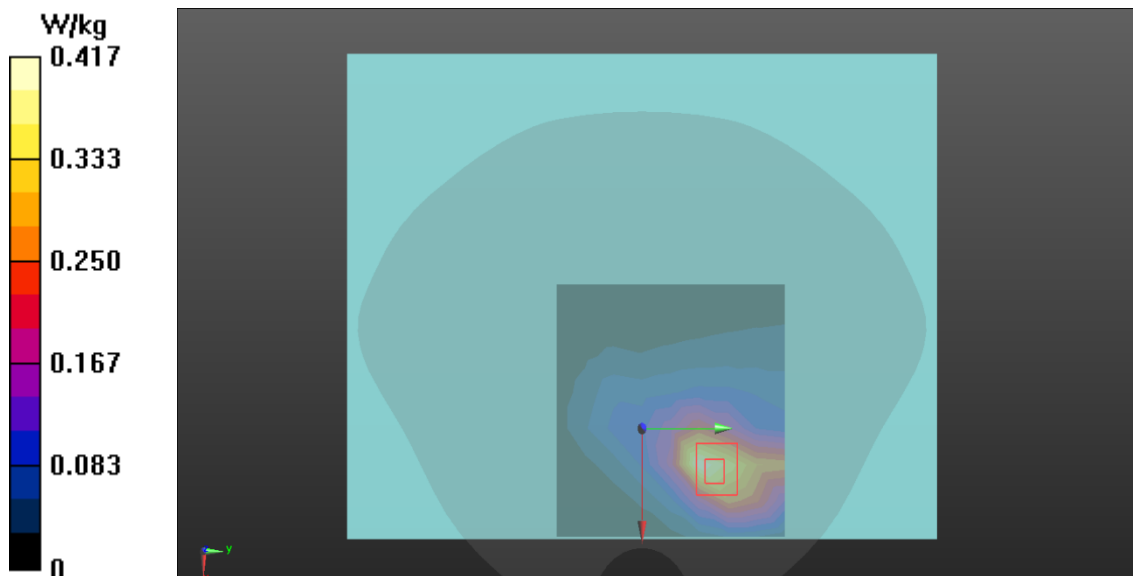

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2026/3/6

3_UMTS B2_RMC12.2K_CH9538_Rear Face_0cm_Main_SIM1

DUT: Tablet;

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.463$ S/m; $\epsilon_r = 41.110$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.8 °C; Liquid Temperature : 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.33, 7.89, 7.28) @ 1907.6 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2025/11/21
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.825 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.316 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.644 W/kg; SAR(10 g) = 0.302 W/kg

Smallest distance from peaks to all points 3 dB below = 13.9 mm

Ratio of SAR at M2 to SAR at M1 = 55.7%

Maximum value of SAR (measured) = 1.03 W/kg

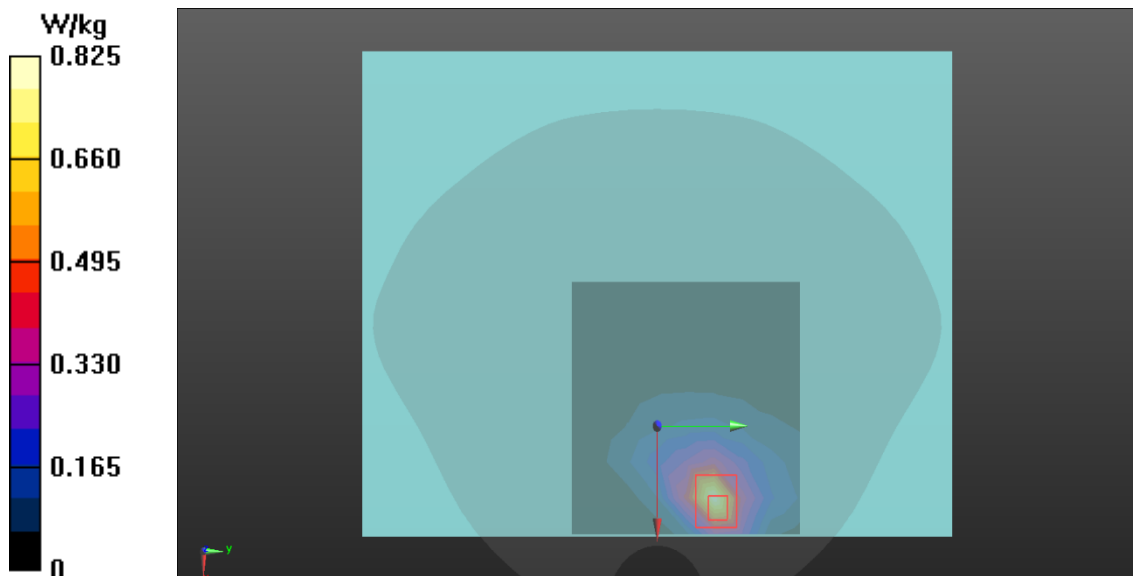

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2026/3/5

4_UMTS B4_RMC12.2K_CH1312_Rear Face_0cm_Main_SIM1

DUT: Tablet;


Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 41.527$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.7 °C; Liquid Temperature : 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.58, 8.16, 7.53) @ 1712.4 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2025/11/21
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.711 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.733 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.784 W/kg
SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.154 W/kg
Smallest distance from peaks to all points 3 dB below = 10.2 mm
Ratio of SAR at M2 to SAR at M1 = 47.2%
Maximum value of SAR (measured) = 0.631 W/kg

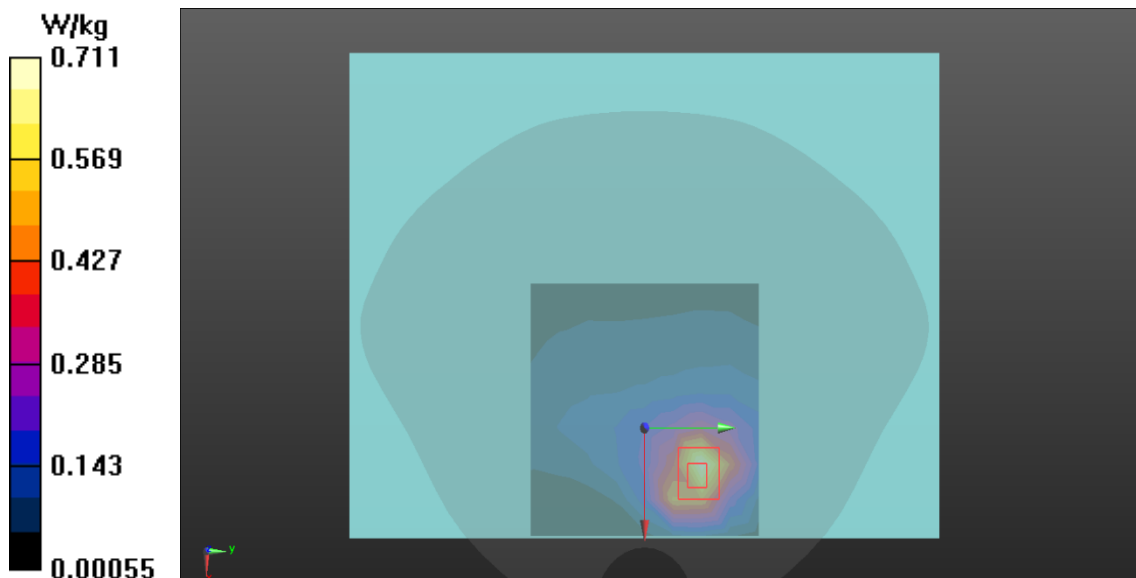

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2026/3/4

5_UMTS B5_RMC12.2K_CH4132_Rear Face_0cm_Main_SIM1

DUT: Tablet;


Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 43.092$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.6 °C; Liquid Temperature : 22.3 °C

DASY Configuration:

- Probe: EX3DV4 - SN7506; ConvF(8.77, 9.44, 8.71) @ 826.4 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2025/11/21
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.599 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.271 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.753 W/kg
SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.166 W/kg
Smallest distance from peaks to all points 3 dB below = 15.6 mm
Ratio of SAR at M2 to SAR at M1 = 61.9%
Maximum value of SAR (measured) = 0.655 W/kg

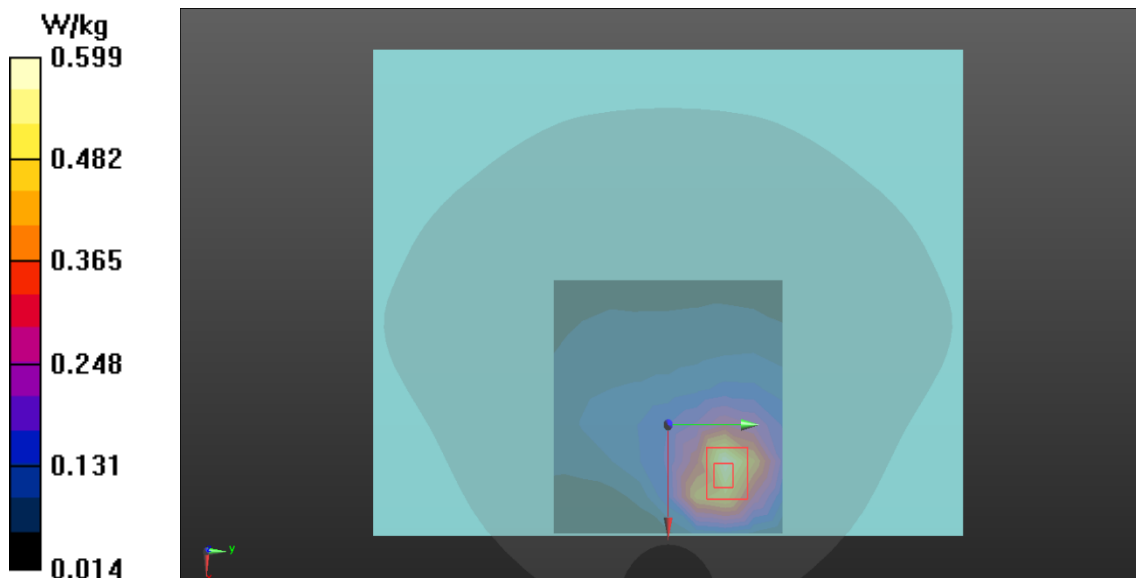

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date:2026/3/6

6_LTE B2_QPSK20M_CH18700_1RB offset 99_Rear Face_0cm_Main_SIM1

DUT: Tablet;

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1860 MHz;
Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 41.226$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.33, 7.89, 7.28) @ 1860 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2025/11/21
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52,Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.07 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.736 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.542 W/kg; SAR(10 g) = 0.251 W/kg

Smallest distance from peaks to all points 3 dB below = 15.1 mm

Ratio of SAR at M2 to SAR at M1 = 59.8%

Maximum value of SAR (measured) = 0.980 W/kg

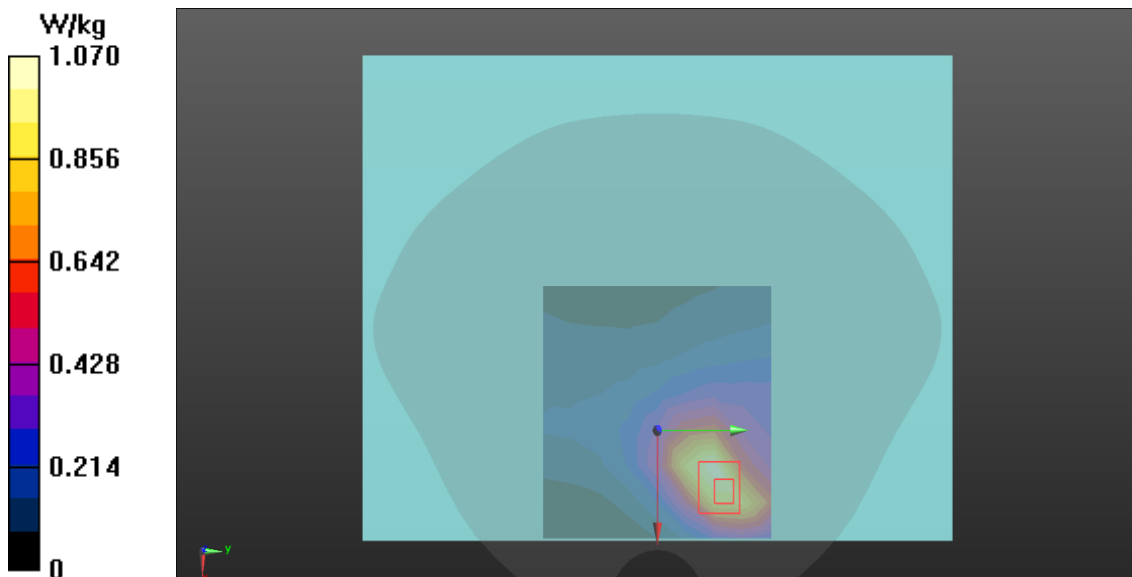

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2026/3/5

7_LTE B4_QPSK20M_CH20300_1RB offset 99_Rear Face_0cm_Main_SIM1

DUT: Tablet;

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1745 MHz;
Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 41.453$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.58, 8.16, 7.53) @ 1745 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2025/11/21
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.05 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.996 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.668 W/kg; SAR(10 g) = 0.298 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 57.7%

Maximum value of SAR (measured) = 1.12 W/kg

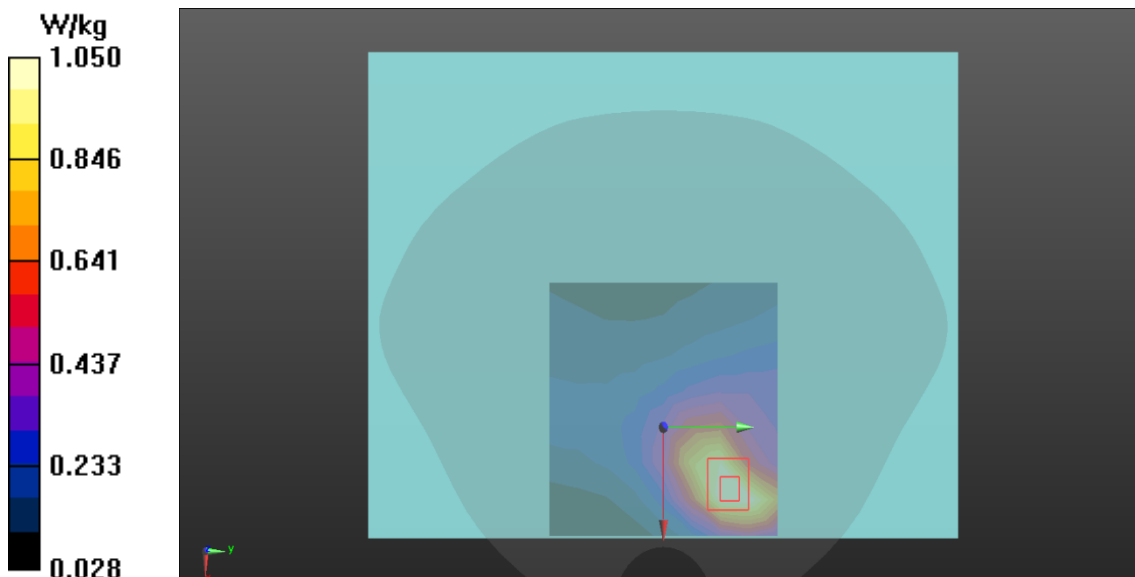

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date:2026/3/4

8_LTE B5_QPSK10M_CH20450_1RB offset 49_Rear Face_0cm_Main_SIM1

DUT: Tablet;

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 829 MHz;
Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 43.081$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 22.3 °C

DASY Configuration:

- Probe: EX3DV4 - SN7506; ConvF(8.77, 9.44, 8.71) @ 829 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2025/11/21
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52,Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.593 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.30 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.781 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.166 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

Maximum value of SAR (measured) = 0.680W/kg

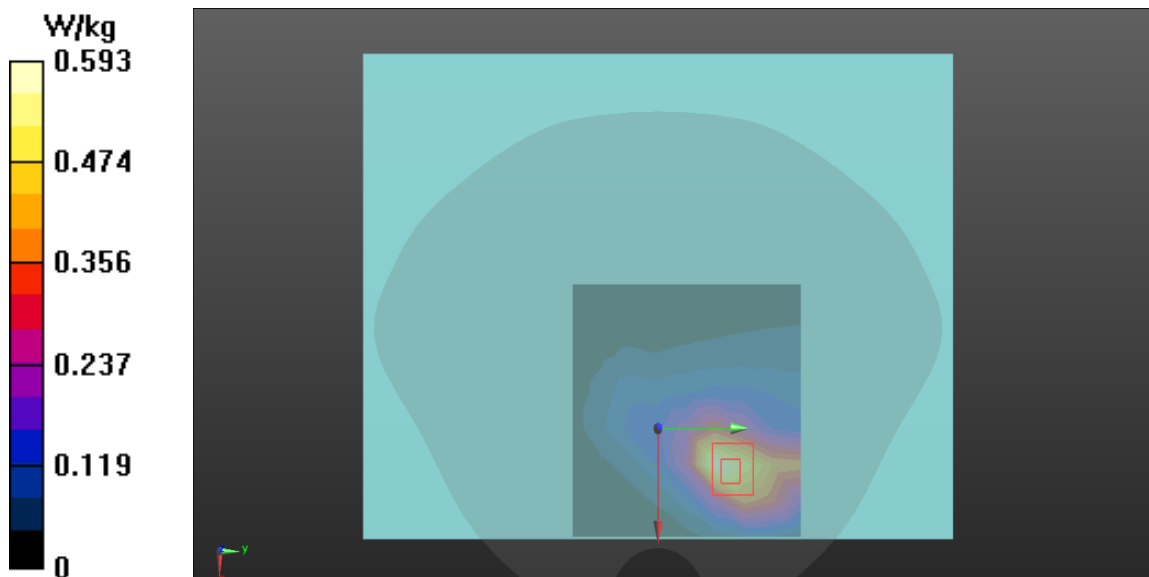

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2026/3/6

9_LTE B25_QPSK20M_CH26140_1RB offset 99_Rear Face_0cm_Main_SIM1

DUT: Tablet;

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1860 MHz;
Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 41.226$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.33, 7.89, 7.28) @ 1860 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2025/11/21
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.727 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.330 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.812 W/kg

SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.166 W/kg

Smallest distance from peaks to all points 3 dB below = 17.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.8%

Maximum value of SAR (measured) = 0.701 W/kg

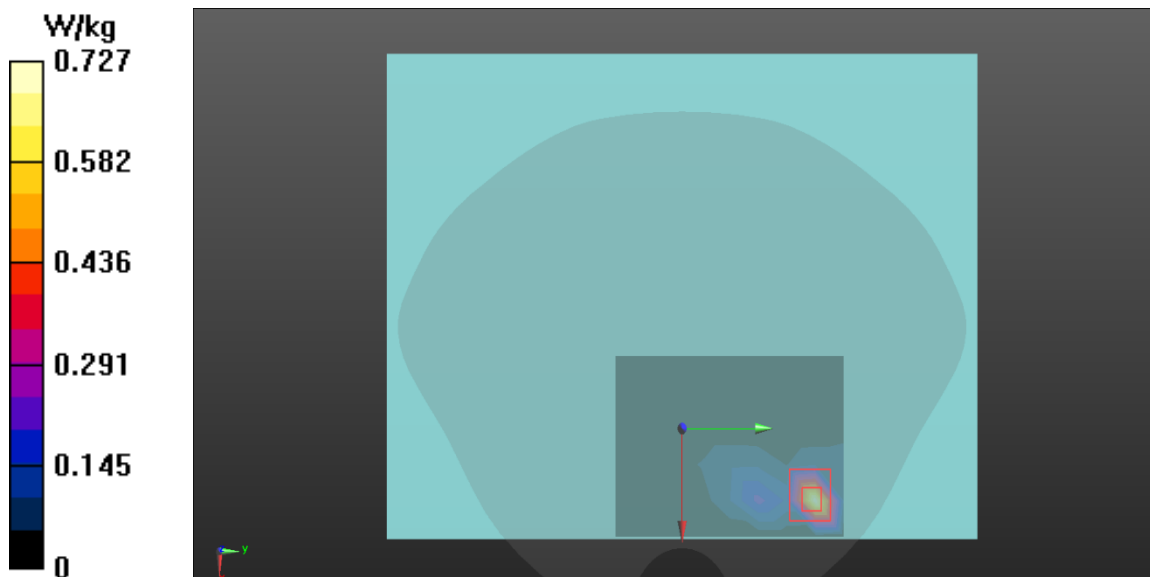

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date:2026/3/4

10_LTE B26_QPSK15M_CH26965_1RB offset 74_Rear Face_0cm_Main_SIM1

DUT: Tablet;

Communication System: UID 10181 - CAE, LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK); Frequency: 841.5 MHz;
Duty Cycle: 1:1

Medium parameters used: $f = 841.5$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 43.026$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 22.3 °C

DASY Configuration:

- Probe: EX3DV4 - SN7506; ConvF(8.77, 9.44, 8.71) @ 841.5 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2025/11/21
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52,Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.680 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.23 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.703 W/kg

SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.175 W/kg

Smallest distance from peaks to all points 3 dB below = 16.4mm

Ratio of SAR at M2 to SAR at M1 = 60.7%

Maximum value of SAR (measured) = 0.653 W/kg

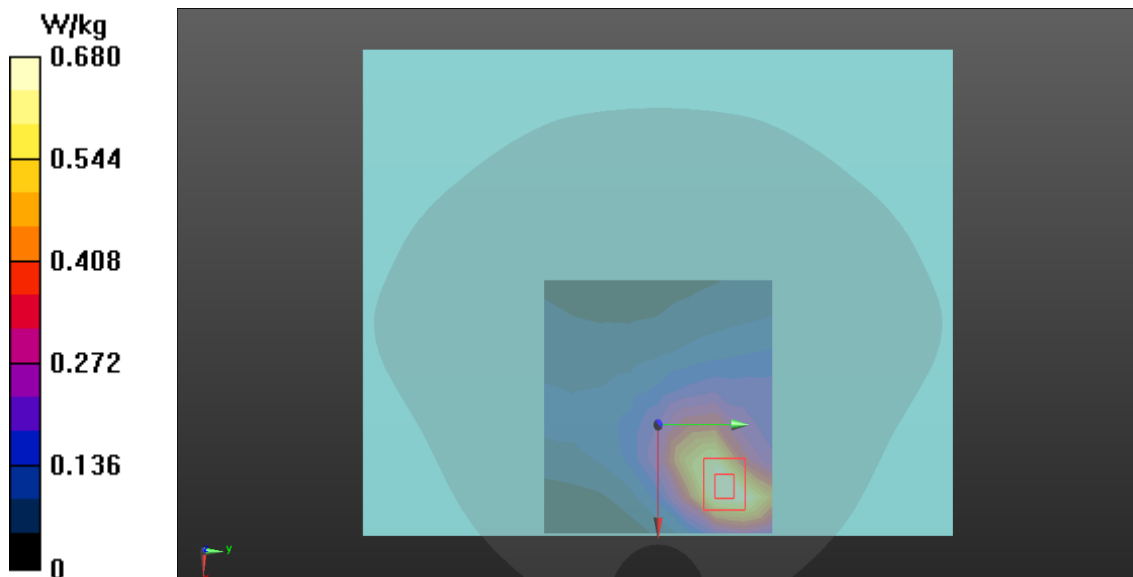

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2026/3/5

11_LTE B66_QPSK20M_CH132322_1RB offset 99_Rear Face_0cm_Main_SIM1

DUT: Tablet;

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1745 MHz;
Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 41.453$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.58, 8.16, 7.53) @ 1745 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2025/11/21
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.82 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.732 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.997 W/kg

SAR(1 g) = 0.451 W/kg; SAR(10 g) = 0.210 W/kg

Smallest distance from peaks to all points 3 dB below = 16.1 mm

Ratio of SAR at M2 to SAR at M1 = 53.1%

Maximum value of SAR (measured) = 0.877 W/kg

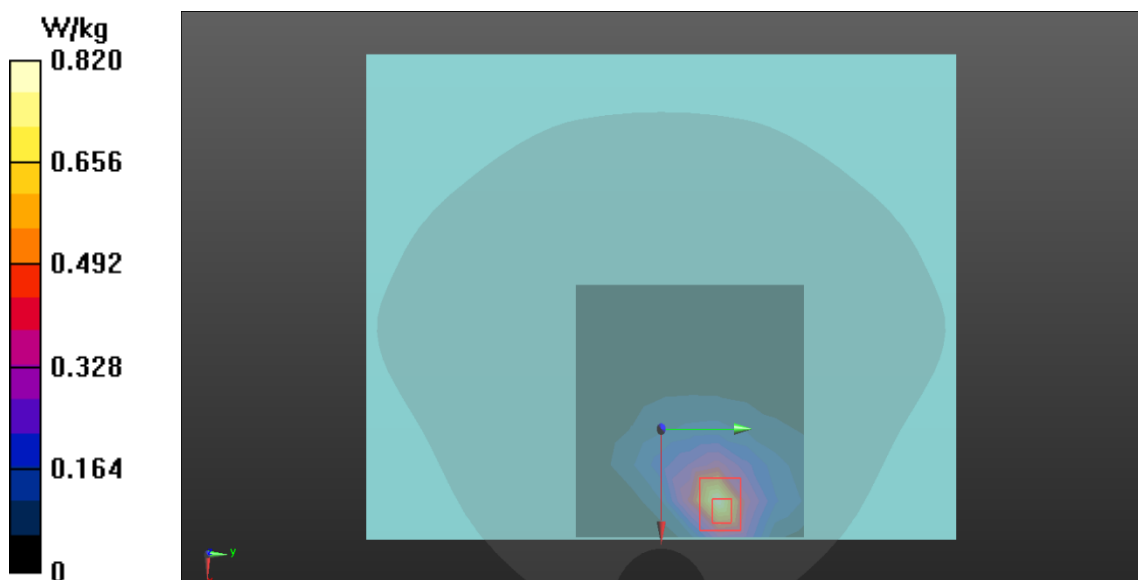

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2026/3/3

12_802.11n40_CH03_Rear Face_0cm_WIFI

DUT: Tablet;

Communication System: UID 10599 - AAB, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle); Frequency: 2422 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2422$ MHz; $\sigma = 1.822$ S/m; $\epsilon_r = 40.396$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.4 °C; Liquid Temperature : 21.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.77, 7.28, 6.72) @ 2422 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2025/11/21
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (6x10x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.417 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.17 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.693 W/kg

SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.042 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 49.2%

Maximum value of SAR (measured) = 0.491 W/kg

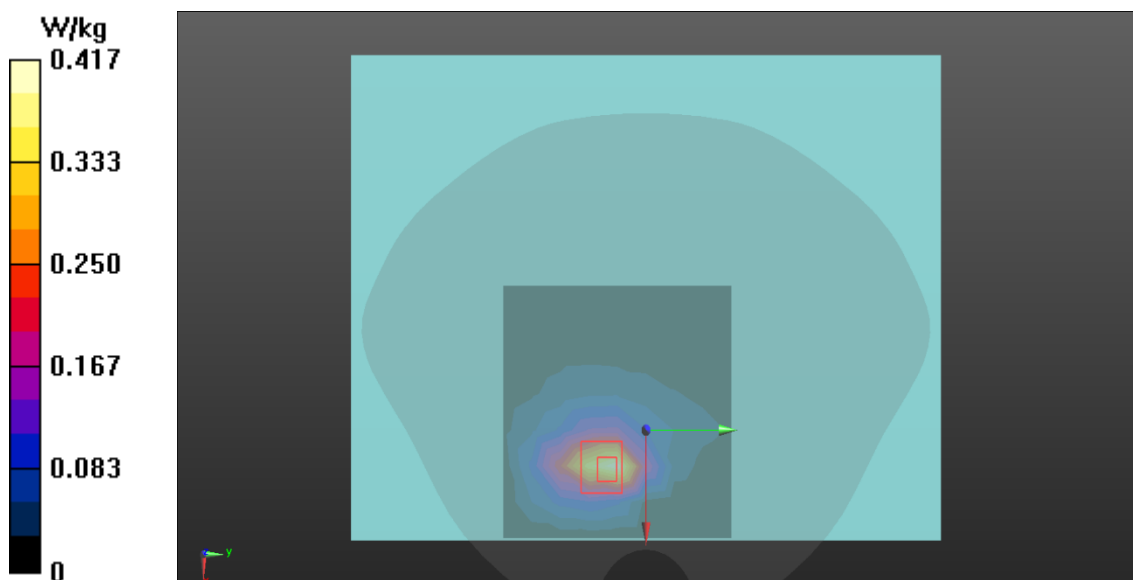

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2026/3/3

13_BT_CH0_Rear Face_0cm

DUT: Tablet;

Communication System: UID 10038 - CAA, IEEE 802.15.1 Bluetooth (8-DPSK, DH5); Frequency: 2402 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 2402$ MHz; $\sigma = 1.813$ S/m; $\epsilon_r = 40.487$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.4 °C; Liquid Temperature : 21.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.77, 7.28, 6.72) @ 2402 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2025/11/21
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (6x10x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.068 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.0910 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.007 W/kg

SSmallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 37.9%

Maximum value of SAR (measured) = 0.0513 W/kg

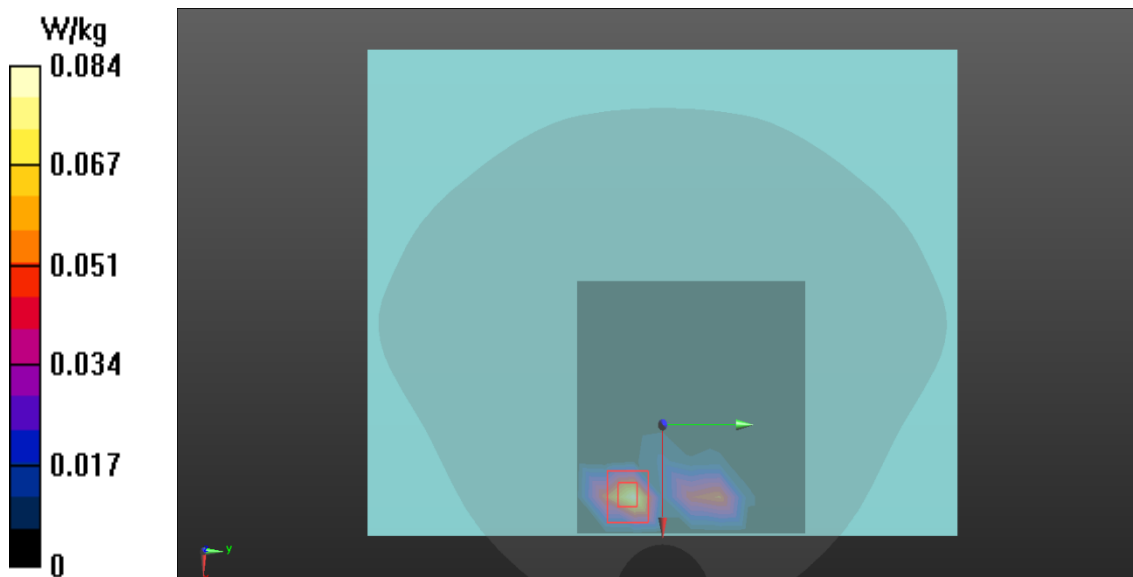

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2026/3/3

14_802.11ac20_CH40_Rear Face_0cm_WIFI

DUT: Tablet;

Communication System: UID 10607 - AAB, IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.463$ S/m; $\epsilon_r = 35.264$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.4 °C; Liquid Temperature : 21.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.18, 5.57, 5.14) @ 5200 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2025/11/21
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (9x15x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.680 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 2.213 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 2.68 W/kg

SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.151 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 50.3%

Maximum value of SAR (measured) = 0.625 W/kg

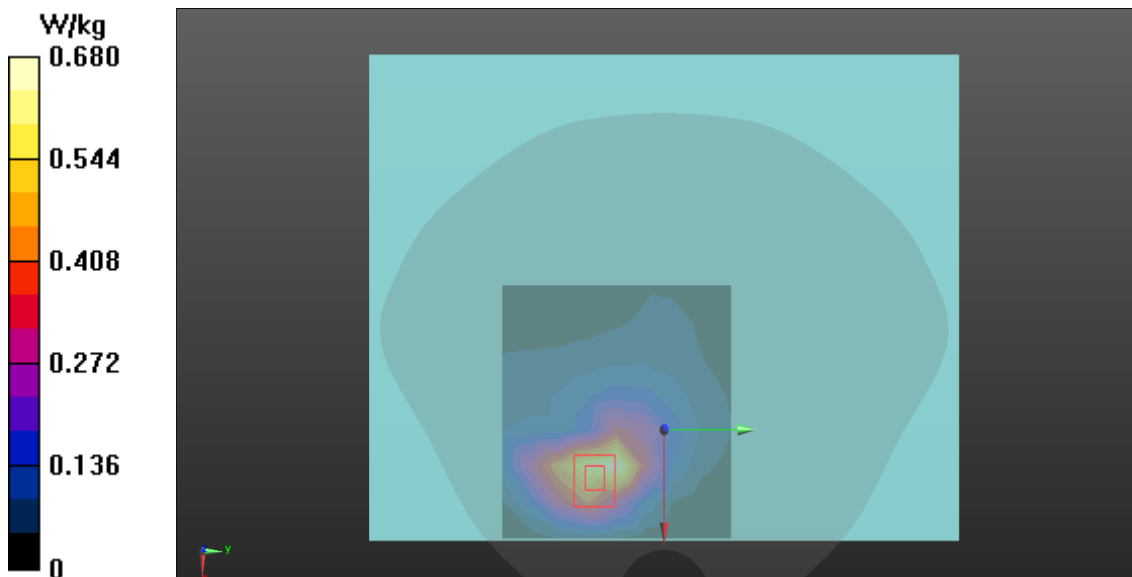

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2026/3/3

15_802.11ac80_CH155_Rear Face_0cm_WIFI

DUT: Tablet;

Communication System: UID 10626 - AAB, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.216$ S/m; $\epsilon_r = 34.385$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.4 °C; Liquid Temperature : 21.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN7506; ConvF(4.66, 5.02, 4.63) @ 5775 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2025/11/21
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (9x15x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.836 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.650 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 4.33 W/kg

SAR(1 g) = 0.553 W/kg; SAR(10 g) = 0.151 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 47.2%

Maximum value of SAR (measured) = 0.932 W/kg

