

AC6965E Datasheet

Zhuhai Jieli Technology Co.,LTD

Version: V1.0

Date: 2020.06.01

Copyright © Zhuhai Jieli Technology Co.,LTD. All rights reserved.

AC6965E Features

CPU

- 32-bit DSP supports hardware Float Point Unit (FPU)
- Up to 160MHz programmable processor
- 64 Vectored interrupts
- 4 Levels interrupt priority

DSP Audio Processing

- SBC, AAC Audio decodes supported for BT audio
- mSBC voice codecs supported for BT phone
- Supports MP2, MP3, WMA, APE, FLAC, AAC, MP4, M4A, WAV, AIF, AIFC audio decoding
- Packet Loss Concealment (PLC) for voice processing
- Acoustic echo cancellation/suppression (AEC, AES)
- Single/Dual MIC Environmental Noise Cancellation (ENC)
- Multi-band DRC limiter
- 10-band EQ configuration for voice Effects

Audio Codec

- One channels 16-bit DAC, SNR $\geq$ 95dB
- One channels 16-bit ADC, SNR $\geq$ 90dB
- Sampling rates of 8KHz/11.025KHz/16KHz/22.05KHz/24KHz/32KHz/44.1KHz/48KHz are supported
- One analog MIC amplifier, build-in MIC bias generator
- Supports two PDM digital MIC inputs
- Two channels Mono analog MUX
- Supports cap-less, single-ended, and differential mode at the DAC path
- Supports 16ohm and 32ohm Speaker loading

Bluetooth

- Compliant with Bluetooth V5.1+BR+EDR+BLE specification

- Meet class1 class2 and class3 transmitting power requirement
- Support GFSK and $\pi/4$ DQPSK all packet types
- Provides +6dbm transmitting power
- receiver with -90dBm sensitivity
- Fast AGC for enhanced dynamic range
- Supports a2dp\avctp\avdtp\avrcp\hfp\spp\smpt\att\gap\gatt\rfcomm\sdpl2cap profile

Peripherals

- One full speed USB 2.0 OTG controller
- Six multi-function 32-bit timers, support capture and PWM mode
- Three full-duplex basic UART, UART0 and UART1 supports DMA mode
- One hardware IIC interface supports host and device mode
- 10-bit ADC for analog sampling
- External wake up/interrupt on all GPIOs

PMU

- Low voltage LDO for internal digital and analog circuit supply
- 3uA current consumption in the soft-off mode
- Built-in LDO for the core, I/O, Bluetooth and flash
- VBAT is 2.2V to 5.5V
- VDDIO is 2.2V to 3.6V

Packages

- QSOP24

Temperature

- Operating temperature: -20°C to +70°C
- Storage temperature: -65°C to +150°C

Applications

- Bluetooth speaker

Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

1、 Pin Definition

1.1 Pin Assignment

PC5	1	24	BT OSC0
PC4	2	23	BT OSC1
USBDM/PC3	3	22	BT_RF
USBDP	4	21	FMIP
PA4	5	20	VSSIO
PA3	6	19	PB1
PA2	7	18	VDDIO
MIC/PA1	8	17	VBAT
PA0	9	16	LDO_IN/PB5
DACVSS	10	15	PB4
VCOM	11	14	PB6
DACL	12	13	PB7

Figure 1-1 AC6965E Package Diagram

1.2 Pin Description

Table 1-1 AC6965E Pin Description

PIN NO.	Name	I/O Type	Drive (mA)	Function	Other Function
1	PC5	I/O	24/8	GPIO	SD0CLKA: SD0 Clock(A); SPI1DOB: SPI1 Data Out(B); IIC_SDA_B: IIC SDA(B); ADC12: ADC Input Channel 12; TMR1: Timer1 Clock Input; UART2RXD: Uart2 Data In(D);
2	PC4	I/O	24/8	GPIO	SD0CMDA: SD0 Command(A); SPI0_DAT3AB(3): SPI0 Data3(AB); SPI1CLKB: SPI1 Clock(B); IIC_SCL_B: IIC SCL(B); ADC11: ADC Input Channel 11; PWM1: Timer1 PWM Output; UART2TXD: Uart2 Data Out (D);
3	USBDM	I/O	4	USB Negative Data (pull down)	SPI2DOB: SPI2 Data Out(B); IIC_SDA_A: IIC SDA(A); ADC14: ADC Input Channel 14; UART1RXD: Uart1 Data In(D);
	PC3	I/O	24/8	GPIO	SD0DAT0A: SD0 Data0(A); SPI0_DAT2B(2): SPI0 Data2(B); SPI1DIB: SPI1 Data In(B); CAP2: Timer2 Capture; UART0TXD: Uart0 Data Out (D); UART0RXD: Uart0 Data In(D);
4	USBDP	I/O	4	USB Positive Data (pull down)	SPI2CLKB: SPI2 Clock(B); IIC_SCL_A: IIC SCL(A); ADC13: ADC Input Channel 13; UART1TXD: Uart1 Data Output(D);
5	PA4	I/O	24/8		SD0CMDC: SD0 Command(C) AMUX0R: Analog Channel0 Right; PLNK_DAT1: PLNK Data1; UART1_RTS: Uart1 Request to send; ADC3: ADC Input Channel 3; TMR4: Timer4 Clock Input; UART2RXA: Uart2 Data In(A);
6	PA3	I/O	24/8		SD0DATC: SD0 Data(C);

Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

					AMUX0L: Analog Channel0 Left; PLNK_SCLK: PLNK Serial Clock; UART1_CTS: Uart1 Clear to send; ADC2: ADC Input Channel 3; PWM5: Timer5 PWM Output; UART2TXA: Uart1 Data Output(D);
7	PA2	I/O	24/8	GPIO	SD0CLKC: SD0 Clock(C); MIC_BIAS: Microphone Bias Output CAP3: Timer3 Capture;
8	PA1	I/O	24/8	GPIO	ADC1: ADC Input Channel 1; PWM4: Timer4 PWM Output; UART1RXC: Uart0 Data In(C);
	MIC	I	/		MIC: MIC Input Channel ;
9	PA0	I/O	/		SDPG: SD Power Supply ADC0: ADC Input Channel 0; CLKOUT0 UART1TXC: Uart1 Data Output(C);
10	DACVSS	P	/		DAC Ground
11	VCOM		/		
12	DACL	O	/		DAC Left Channel
13	PB7	I/O	24/8	GPIO	SD0CLKF: SD0Clock(F) AMUX1R: Analog Channel1Right; SPI2DOA: SPI2 Data Out(A); IIC_SDA_C: IIC DAT(C); ADC9: ADC Input Channel 9; PWM5: Timer5 PWM Output; UART1RXA: Uart1 Data In(A);
14	PB6	I/O	24/8	GPIO	SD0CMDf: SD0 Command(F); AMUX1L: Analog Channel1 Left; SPI2CLKA: SPI2 Data Out(A); IIC_SCL_C: IIC SCL(C); ADC8: ADC Input Channel 8; TMR3: Timer3 Clock Input; UART1TXA: Uart1 Data Out(A);
15	PB4	I/O	24/8	GPIO	SD0DAT0F: SD0 Data0(F); SPI0_DAT2A(2): SPI0 Data2 Out_A(2); ADC7: ADC Input Channel 7; CLKOUT1 UART2TXC: Uart2 Data Out(C); UART2RXC: Uart2 Data In(C);
16	LDO_IN	P	/		Battery Charger In
	PB5	I/O	8	GPIO	SPI2DIA: SPI2 Data Input(A);

Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

				(High Voltage Resistance)	PWM3: Timer3 PWM Output; CAP1: Timer1 Capture; UART0TXC: Uart0 Data Out(C); UART0RXC: Uart0 Data In(C);
17	VBAT	P	/		Battery Power Supply
18	VDDIO	P	/		IO Power 3.3v
19	PB1	I/O	24/8	GPIO (pull up)	Long Press Reset; ADC5: ADC Input Channel 5; TMR2: Timer2 Clock Input; UART0RXB: Uart0 Data In(B);
20	VSSIO	P	/		Ground
21	FMIP	I	/		FM Antenna
22	BT_RF	/	/		BT Antenna
23	BT_SOCI	I	/		BT OSC In
24	BT_SOCO	O	/		BT OSC Out

Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2、Electrical Characteristics

2.1 Absolute Maximum Ratings

Table 2-1

Symbol	Parameter	Min	Max	Unit
Tamb	Ambient Temperature	-20	+70	°C
Tstg	Storage temperature	-65	+150	°C
VBAT	Supply Voltage	2.2	5.5	V
V _{3.3IO}	3.3V IO Input Voltage	-0.3	VDDIO+0.3	V
LDO_IN	Charge Input Voltage	-0.3	5.5	V

2.2 PMU Characteristics

Table 2-2

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
LDO_IN	Loading current	—	—	300	mA	VBAT = 4.2V
VBAT	Voltage Input	2.2	3.7	5.5	V	
V _{DVDD}	Voltage output	0.9	1.2	1.25	V	VBAT = 4.2V, 30mA loading
V _{VDDIO}	Voltage output	—	3.3	—	V	VBAT = 4.2V, 100mA loading
V _{BT_AVDD}	Voltage output	—	1.3	—	V	VBAT=4.2V, 100mA loading

2.3 Battery Charge

Table 2-3

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
LDO_IN	Charge Input Voltage	4.5	5	5.5	V	—
V _{Charge}	Charge Voltage	4.15	4.2	4.25	V	—
I _{Charge}	Charge Current	20	—	300	mA	Charge current at fast charge mode
I _{Trinkl}	Trickle Charge Current	20	45	70	mA	V _{BAT} <V _{Trinkl}

Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2.4 IO Input/Output Electrical Logical Characteristics

Table 2-4

IO input characteristics						
Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
V_{IL}	Low-Level Input Voltage	-0.3	—	$0.3 * V_{DDIO}$	V	$V_{DDIO} = 3.3V$
V_{IH}	High-Level Input Voltage	$0.7 * V_{DDIO}$	—	$V_{DDIO} + 0.3$	V	$V_{DDIO} = 3.3V$
IO output characteristics						
V_{OL}	Low-Level Output Voltage	—	—	0.33	V	$V_{DDIO} = 3.3V$
V_{OH}	High-Level Output Voltage	2.7	—	—	V	$V_{DDIO} = 3.3V$

2.5 Internal Resistor Characteristics

Table 2-5

Port	General Output	High Drive	Internal Pull-Up Resistor	Internal Pull-Down Resistor	Comment
PA1~PA4 PC3~PC5 PB1,PB4 PB6,PB7	8mA	24mA	10K	10K	1、PB1 default pull up 2、USBDM & USBDP default pull down 3、internal pull-up/pull-down resistance accuracy $\pm 20\%$
PA0	Output 0	8mA	24mA	10K	
	Output 1	8mA	64mA	10K	
PB5	8mA	—	10K	10K	
USBDM	4mA	—	1.5K	15K	
USBDM	4mA	—	180K	15K	

2.6 DAC Characteristics

Table 2-6

Parameter	Min	Typ	Max	Unit	Test Conditions
Frequency Response	20	—	20K	Hz	1KHz/0dB 10Kohm loading With A-Weighted Filter
THD+N	—	-75	—	dB	
S/N	—	95	—	dB	
Crosstalk	—	-90	—	dB	
Output Swing	—	1	—	Vrms	
Dynamic Range	—	90	—	dB	1KHz/-60dB 10Kohm loading With A-Weighted Filter
DAC Output Power	11	—	—	mW	32ohm loading

2.7 ADC Characteristics

Table 2-7

Parameter	Min	Typ	Max	Unit	Test Conditions
Dynamic Range		80		dB	1KHz/-60dB
S/N	—	90	91	dB	1KHz/-60dB
THD+N	—	-70	—	dB	
Crosstalk	—	-90	—	dB	

2.8 BT Characteristics

2.8.1 Transmitter

Basic Data Rate

Table 2-8

Parameter	Min	Typ	Max	Unit	Test Conditions
RF Transmit Power		4	6	dBm	25℃, Power Supply VBAT=5V 2441MHz
RF Power Control Range		20		dB	
20dB Bandwidth		950		KHz	
Adjacent Channel	+2MHz	-40		dBm	
	-2MHz	-38		dBm	
Transmit Power	+3MHz	-44		dBm	
	-3MHz	-35		dBm	

Enhanced Data Rate

Table 2-9

Parameter	Min	Typ	Max	Unit	Test Conditions
Relative Power		-1		dB	25℃, Power Supply VBAT=5V 2441MHz
$\pi/4$ DQPSK Modulation Accuracy	DEVM RMS	6		%	
	DEVM 99%	10		%	
	DEVM Peak	15		%	
Adjacent Channel	+2MHz	-40		dBm	
	-2MHz	-38		dBm	
Transmit Power	+3MHz	-44		dBm	
	-3MHz	-35		dBm	

Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2.8.2 Receiver

Basic Data Rate

Table 2-10

Parameter		Min	Typ	Max	Unit	Test Conditions
Sensitivity			-90		dBm	25°C, Power Supply VBAT=5V 2441MHz
Co-channel Interference Rejection			-13		dB	
Adjacent Channel	+1MHz		+5		dB	
	-1MHz		+2		dB	
	+2MHz		+37		dB	
Interference Rejection	-2MHz		+36		dB	
	+3MHz		+40		dB	
	-3MHz		+35		dB	

Enhanced Data Rate

Table 2-11

Parameter		Min	Typ	Max	Unit	Test Conditions
Sensitivity			-90		dBm	25°C, Power Supply VBAT=5V 2441MHz
Co-channel Interference Rejection			-13		dB	
Adjacent Channel	+1MHz		+5		dB	
	-1MHz		+2		dB	
	+2MHz		+37		dB	
Interference Rejection	-2MHz		+36		dB	
	+3MHz		+40		dB	
	-3MHz		+35		dB	

2.9 FM Receiver Characteristics

Table 2-12

Parameter	Min	Typ	Max	Unit	Test Conditions
Input Frequency	76		108	MHz	
Usable Sensitivity	3	4	8	dBμV EMF	(S+N)/N=26dB
Adjacent Channel Selectivity		48		dB	± 200kHz
IIP3		88		dBμV EMF	Δf1=200 kHz, Δf2=400 kHz
Audio Output Voltage	0		3	V	Empty Load
Audio Frequency Response	20		20k	Hz	DacTest
Audio (S+N)/N		58		dB	
Stereo Separation		40		dB	
Audio Total Harmonic Distortion (THD)		0.4		%	

Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

3、 Package Information

3.1 QSOP24

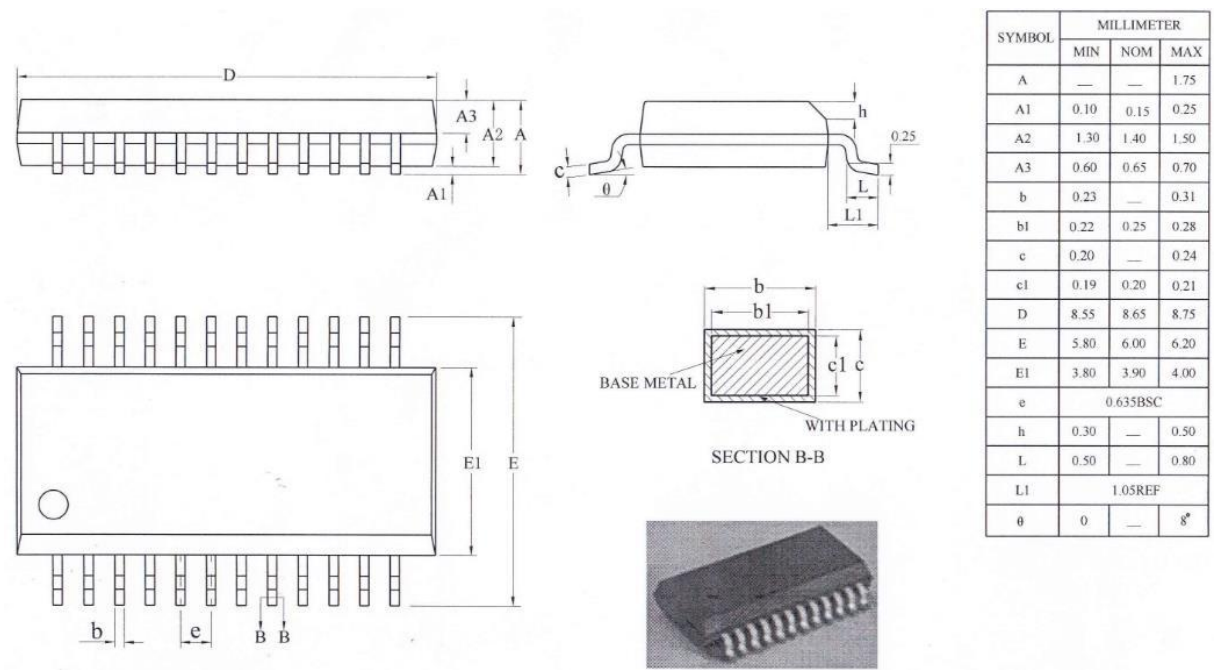


Figure 3-1. AC6965E_QSOP24 Package

3、Revision History

Date	Revision	Description
2020.06.01	V1.0	Initial Release

Confidential


The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

Inverted F Antenna Specification

Summary

ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency	Horizontal			Vertical		
	2400MHz	2400MHz	2500MHz	2400MHz	2400MHz	2500MHz
	-1.26	-0.76	-0.58	-5.25	-2.46	-1.86
MAX. Gain	-0.58dB					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Antenna Length	38.20mm					
Manufacture	ZHUHAI JIELI TECHNOLOGY CO.,LTD					


Antenna Photo & Length (mm)

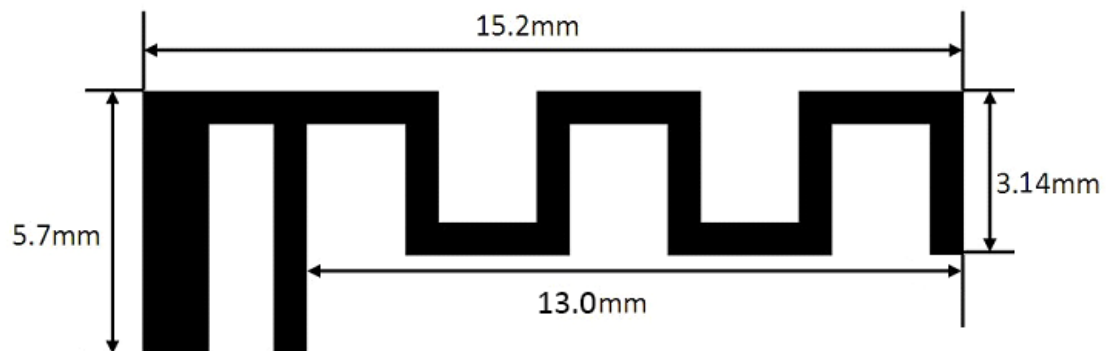

Horizontal: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -40 Scale: 5/div

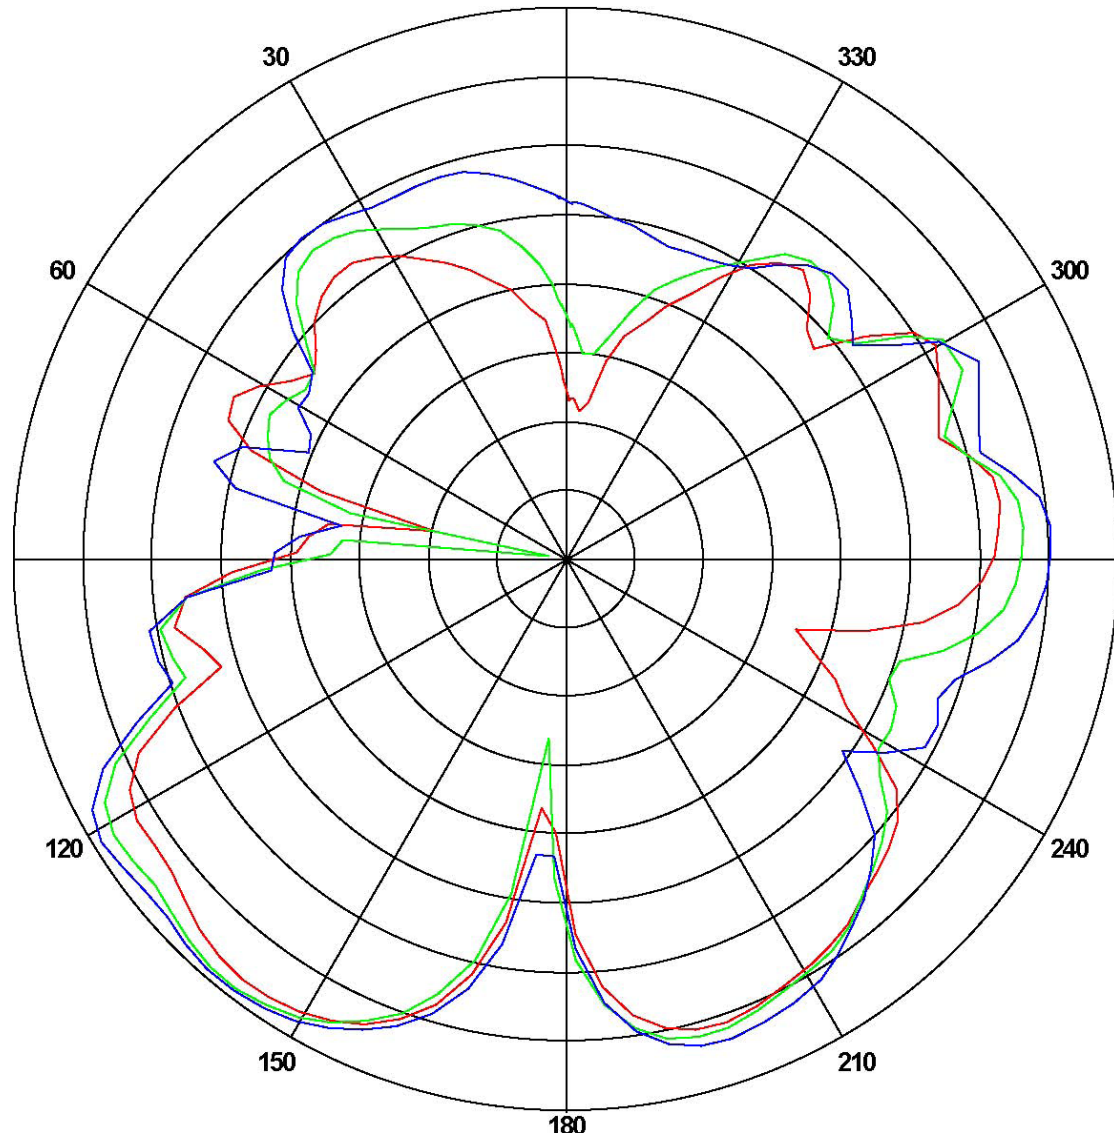


Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	-1.26174	-30.0801	-7.18716
2450	-0.765802	-36.5604	-7.48023
2500	-0.585582	-22.0315	-6.59127

Vertical: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -30 Scale: 5/div

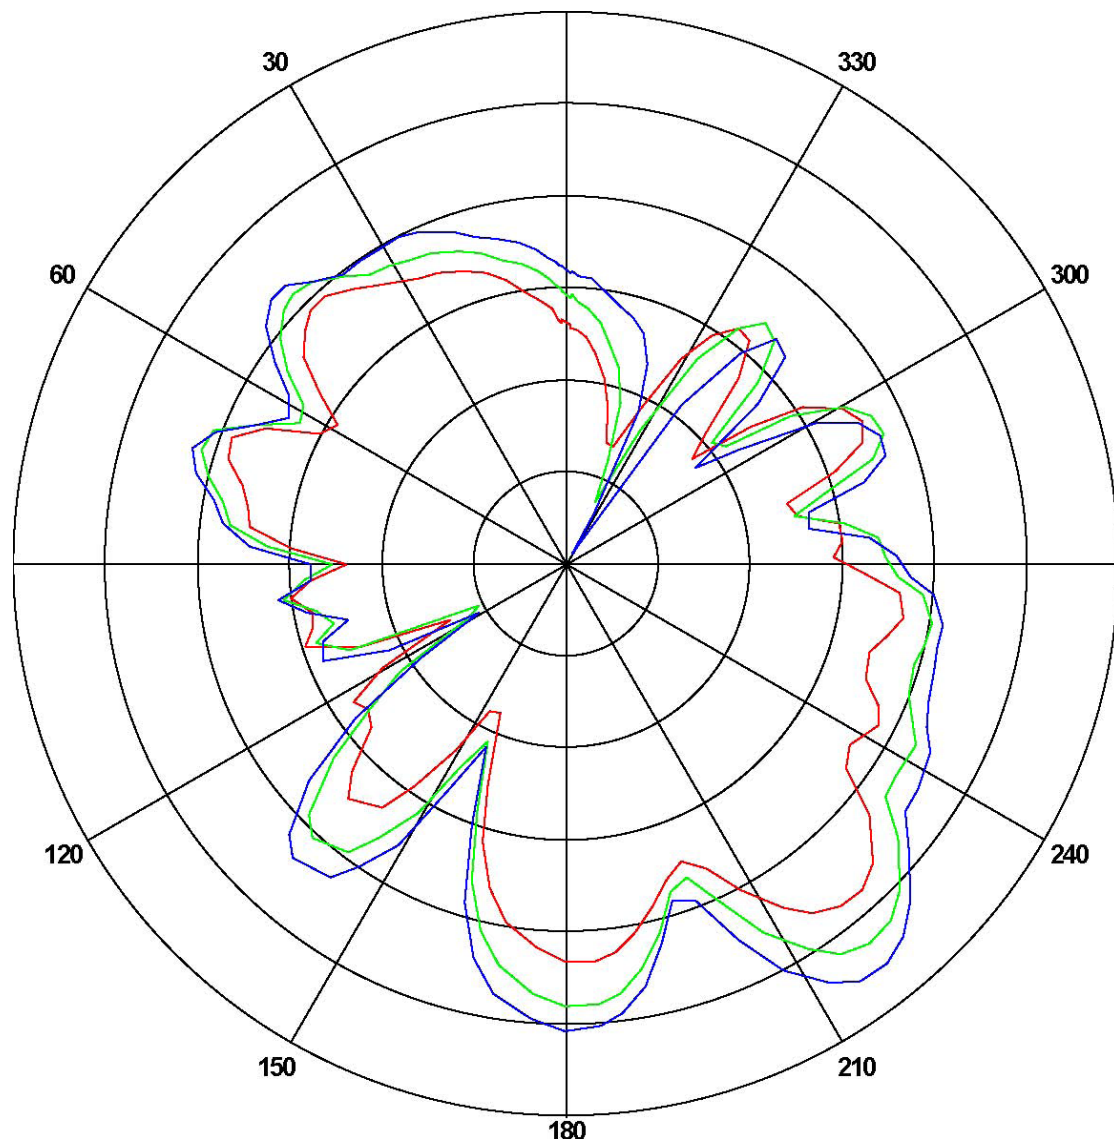

Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	-5.2537	-22.1424	-12.4294
2450	-2.4652	-24.5837	-10.4702
2500	-1.86120	-29.5214	-9.20432

ANT Test Labs: Attestation of Global Compliance Co., Ltd.