SPECIFICATION

SPEC NO. : **SP03AE24425-0070**

PART NO. : **03A40D5M00J021T**

PRODUCT NAME : **DCAH0S15**

DESCRIPTION : **Dielectric Chip Antenna**
(3.05x1.6x0.55 mm)
RoHS Compliant Product

REVISION STATUS

VERSION	DATE	PAGE	REVISION DESCRIPTION	PREPARED	CHECKED	APPROVED
01	2021.06.28	Whole	New Issued.	翁秀惠	呂秉群	張敦信、吳佳宗

Prepared By	Checked By	Approved By
翁秀惠	呂秉群	張敦信 吳佳宗

CIRO This document is held by Cirocomm, cannot be reproduced without permission .
Cirocomm Confidential
2021/06/29

CIROCOMM TECHNOLOGY.

PART NUMBER: 03A40D5M00J021T

1. SCOPE

This specification covers the dielectric chip antenna for BT.

2. Name of the product

This product is named “Dielectric Chip Antenna”.

3. Electrical characteristics

3-1 Electrical characteristics of antenna

The antenna has the electrical characteristics given in Table 1 under the *cirocomm* standard installation conditions shown in the figure of Evaluation Board.

Table 1

No	Parameter	Specification
1	Working Frequency	2442 MHz
2	Dimension	3.05×1.6×0.55 mm
3	Return Loss	＜ -10dB
4	VSWR	2.0max
5	Peak Gain	2.0 dBi (typ)
6	Polarization	Linear
7	Azimuth	Omni-directional
8	Impedance	50 Ω
9	Operating Temperature	-40~105℃


· Data is measured on Cirocomm STD PCB.

This document is held by Cirocomm, cannot be reproduced without permission .


Cirocomm Confidential
2021/06/29

4. Antenna & Demo Board Dimension

4-1 Antenna Dimension

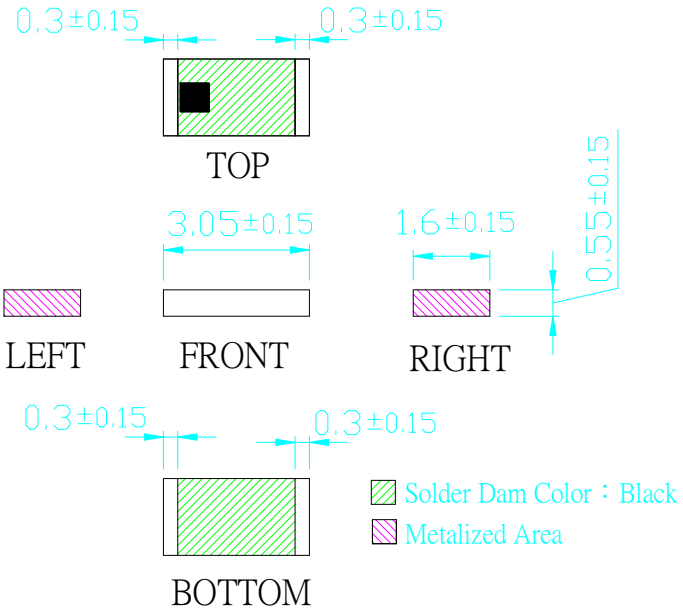


4-2 Demo Board Dimension

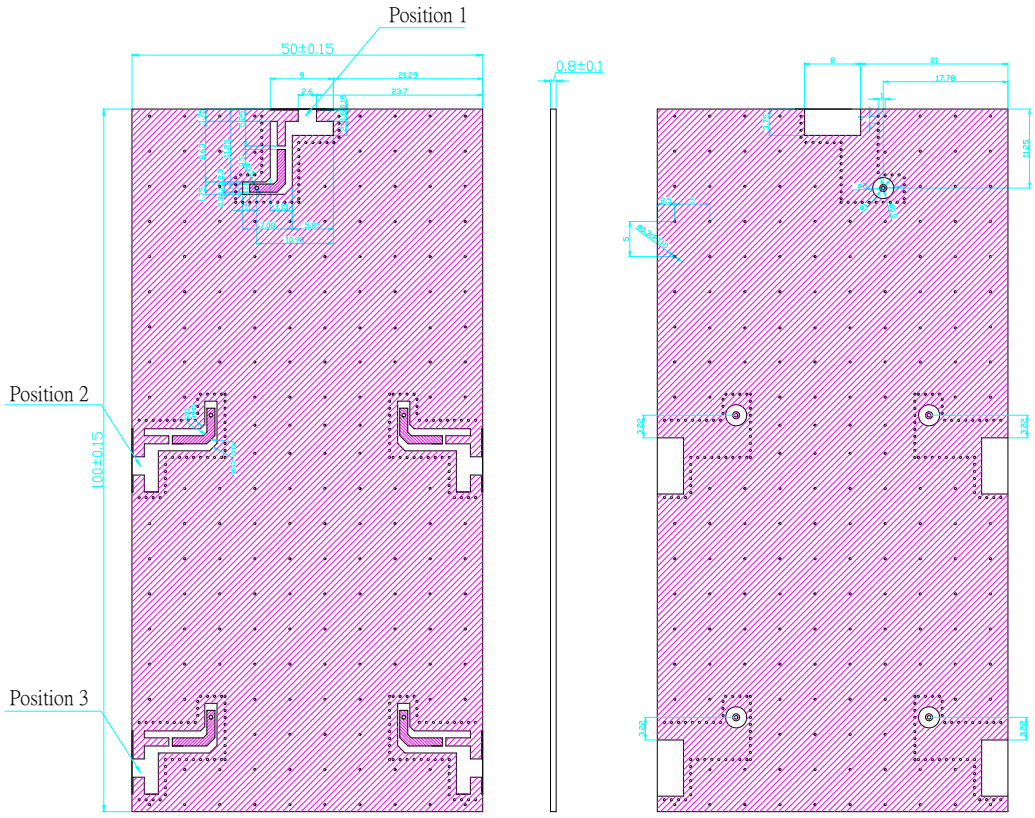


This document is held by Cirocomm, cannot be reproduced without permission .
Cirocomm Confidential
2021/06/29

5. Antenna Measurement on Demo Board

5-1 Position 1 Matching Circuit

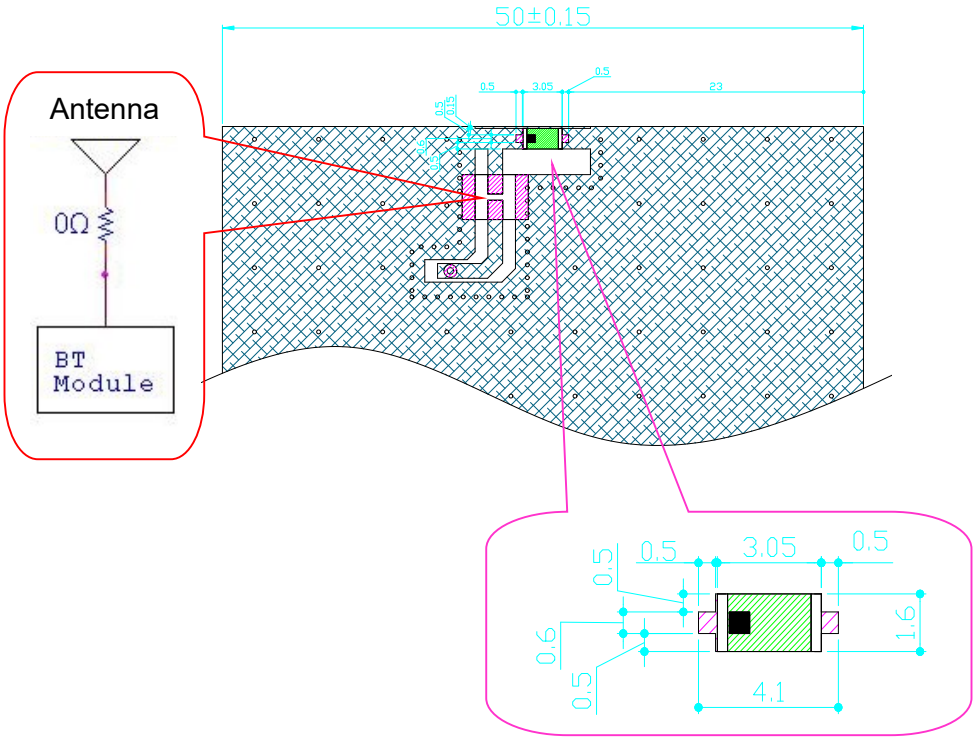


5-1-1 S11 Response curve (Work Frequency)

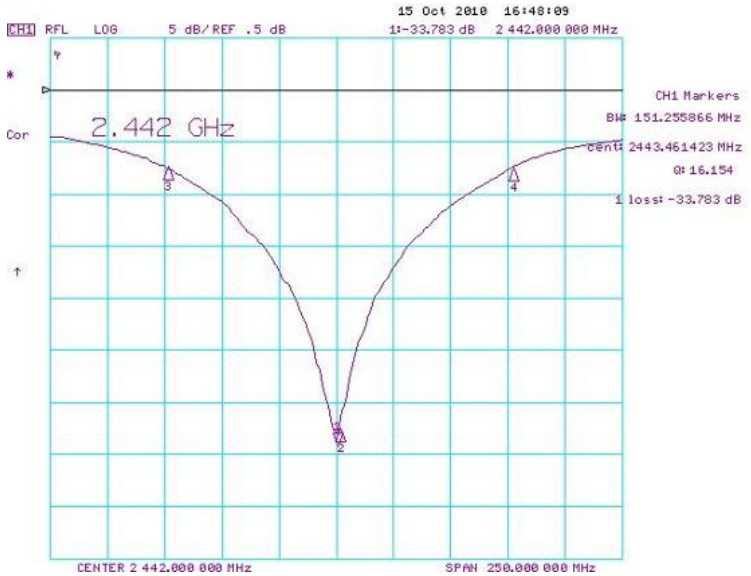


Item	Frequency	Return Loss	Bandwidth
Value	2442 MHz	-33.78dB	151.25 MHz

This document is held by Cirocomm, cannot be reproduced without permission .
Cirocomm Confidential
2021/06/29


5-1-2 Electrical performance

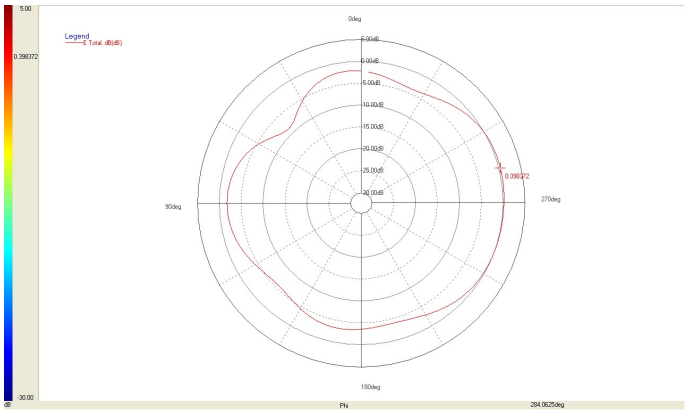

XY-Plane 2442MHz

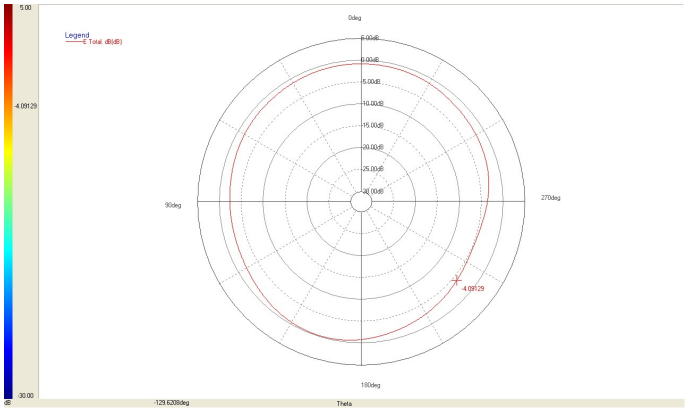

XZ-Plane 2442MHz

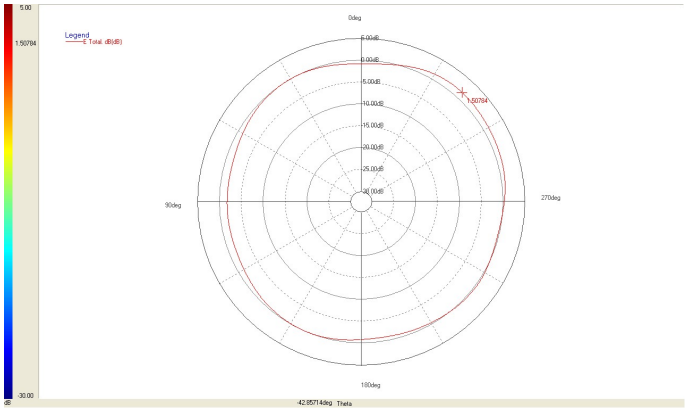


YZ-Plane 2442MHz

2442MHz	Peak Gain
XY-Plane	0.39
XZ-Plane	-4.09
YZ-Plane	1.50


(Unit：dBi)

This document is held by Cirocomm, cannot be reproduced without permission .


Cirocomm Confidential
2021/06/29

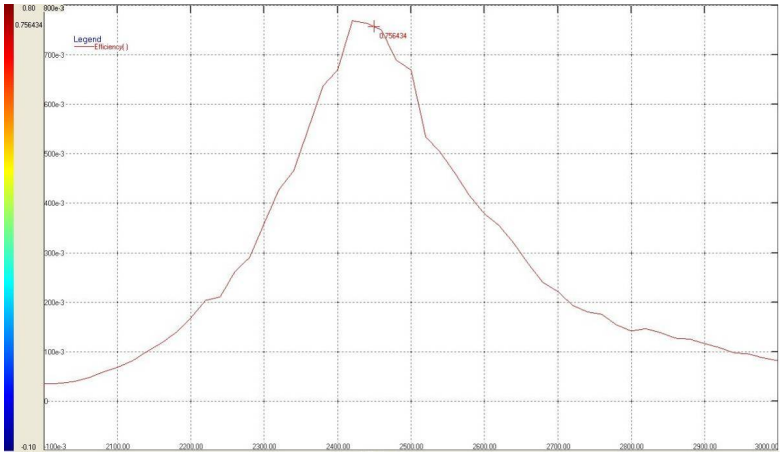

Efficiency

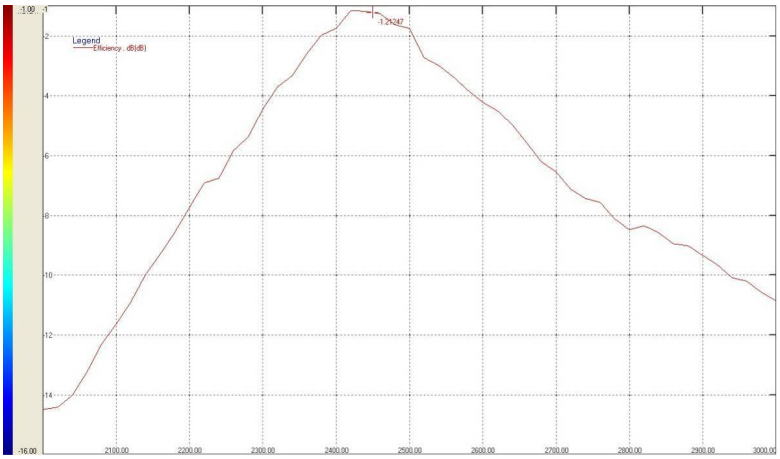

Average Gain

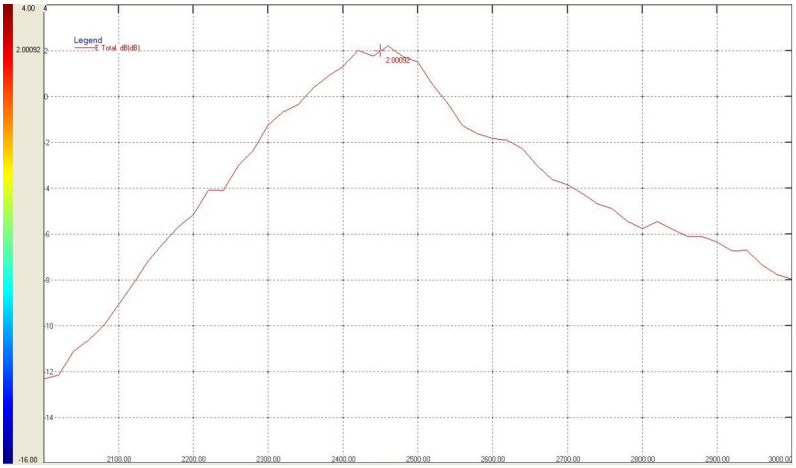


Peak Gain


Item	Efficiency	Average	Peak Gain
Value	75.64%	-1.21dBi	2.00dBi

CiRO This document is held by Cirocomm, cannot be reproduced without permission .
Cirocomm Confidential
2021/06/29

5-2 Position 2 Matching Circuit

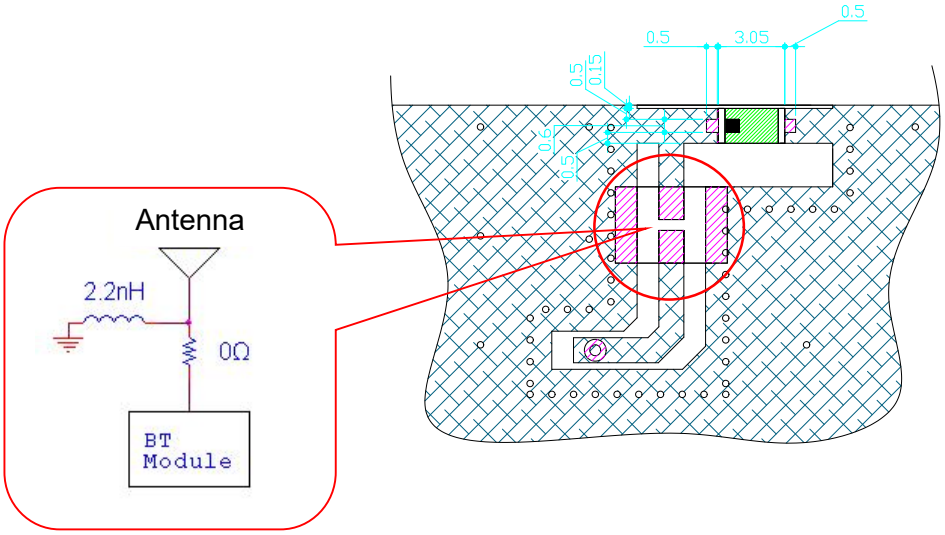


5-2-1 S11 Response curve (Work Frequency)

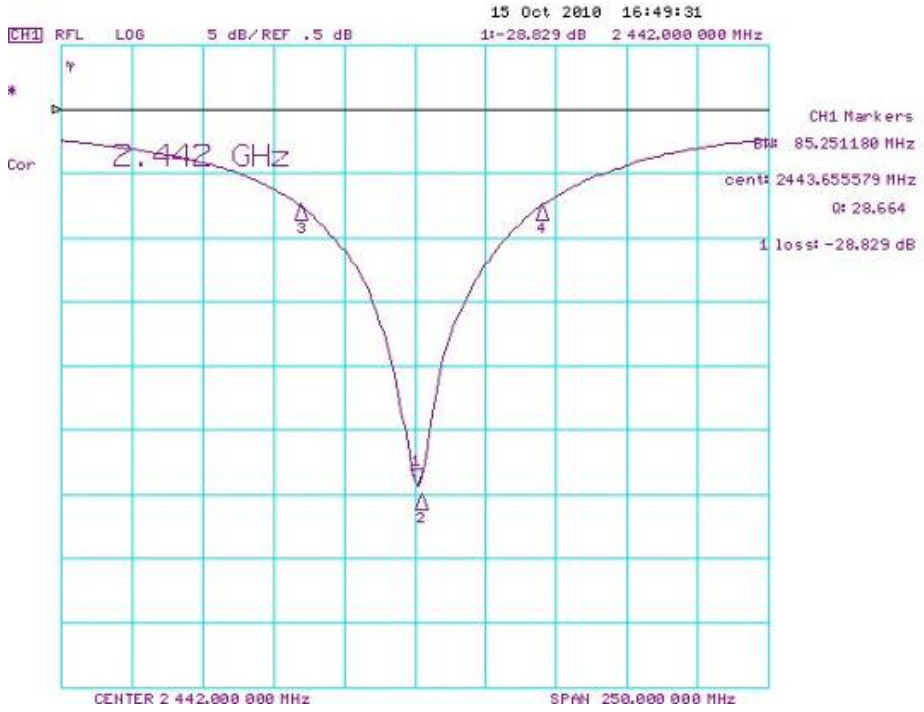


Item	Frequency	Return Loss	Bandwidth
Value	2442 MHz	-28.82 dB	85.25 MHz

This document is held by Cirocomm, cannot be reproduced without permission .
Cirocomm Confidential
2021/06/29


5-2-2 Electrical performance

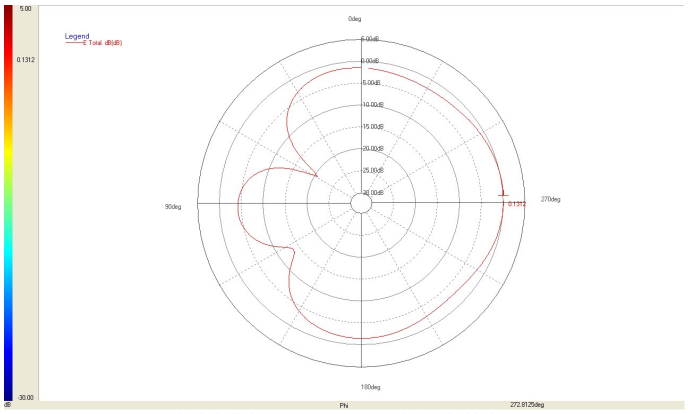

XY-Plane 2442MHz

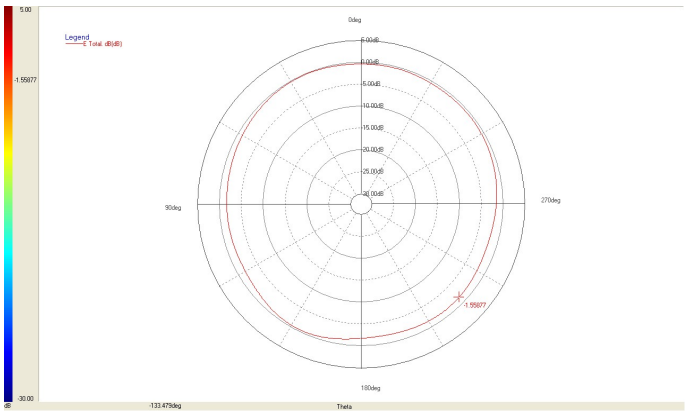

XZ-Plane 2442MHz

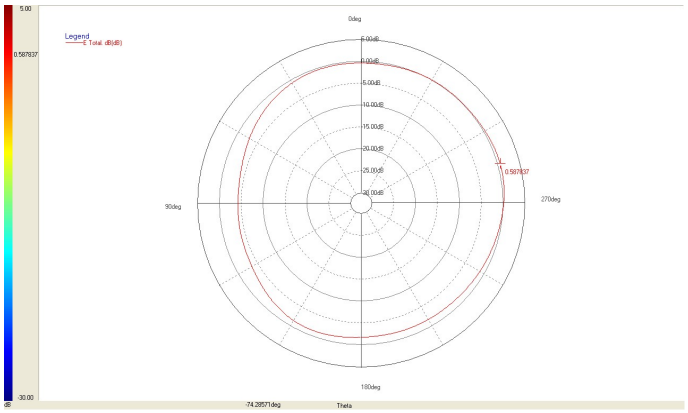


YZ-Plane 2442MHz

2442MHz	Peak Gain
XY-Plane	0.13
XZ-Plane	-1.55
YZ-Plane	0.58


(Unit：dBi)

CiRO This document is held by Cirocomm, cannot be reproduced without permission .


Cirocomm Confidential 2021/06/29

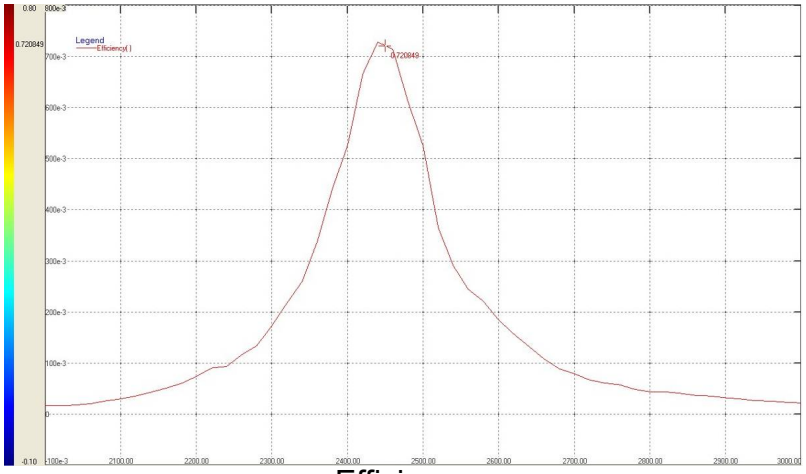

Efficiency

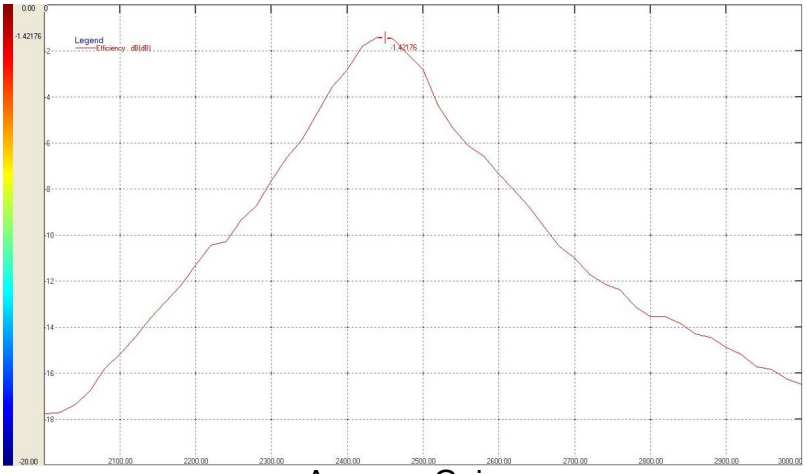

Average Gain

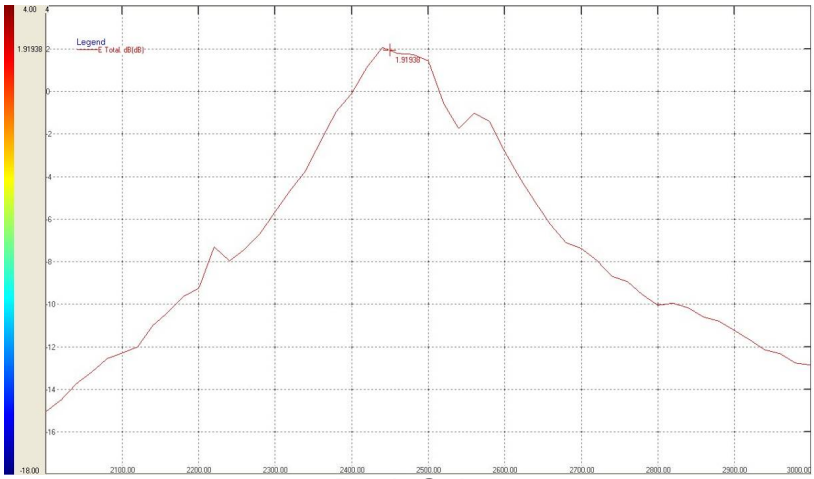


Peak Gain

Item	Efficiency	Average	Peak Gain
Value	72.08%	-1.42dBi	1.91dBi


This document is held by Cirocomm, cannot be reproduced without permission .

Cirocomm Confidential
2021/06/29

5-3 Position 3 Matching Circuit

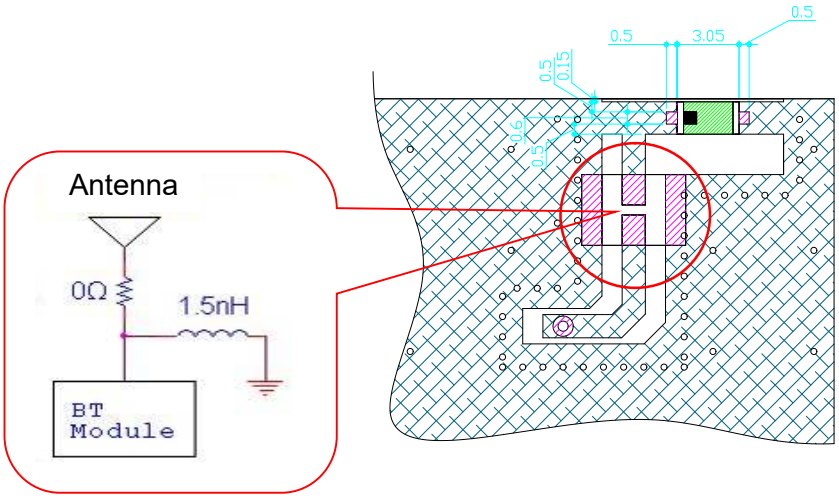


5-3-1 S11 Response curve (Work Frequency)

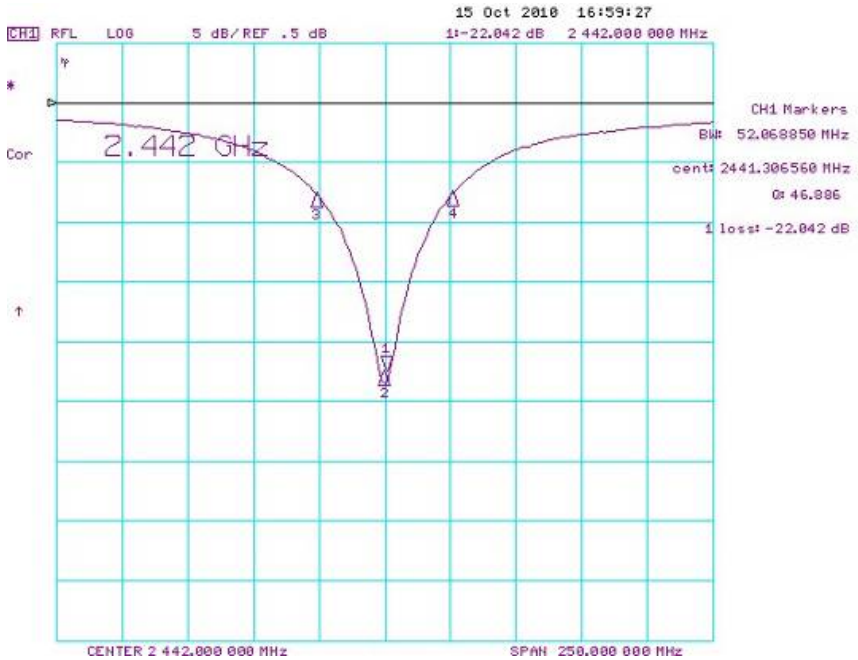


Item	Frequency	Return Loss	Bandwidth
Value	2442 MHz	-22.04 dB	52.06 MHz

CiRO This document is held by Cirocomm, cannot be reproduced without permission .
Cirocomm Confidential
2021/06/29


5-3-2 Electrical performance

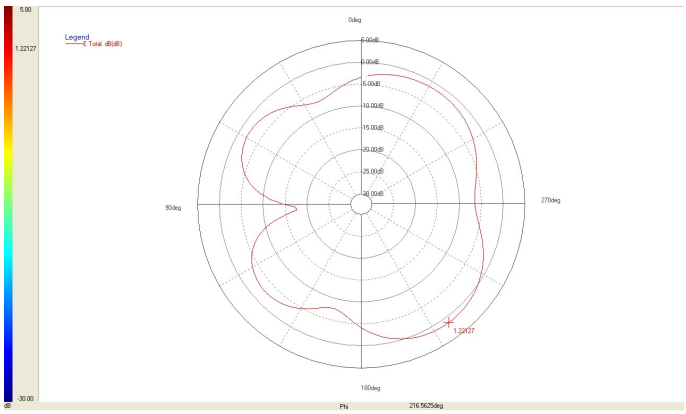

XY-Plane 2442MHz

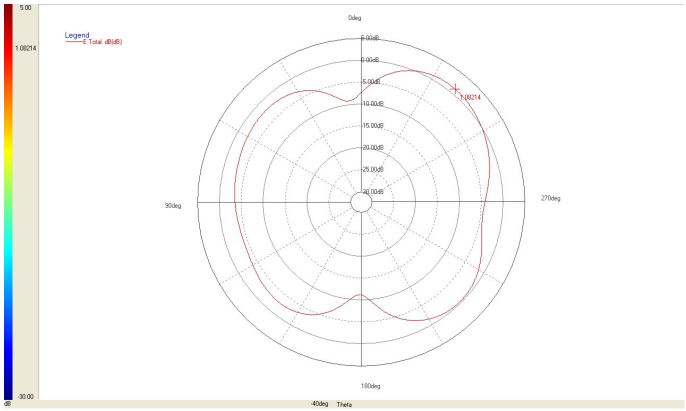

XZ-Plane 2442MHz

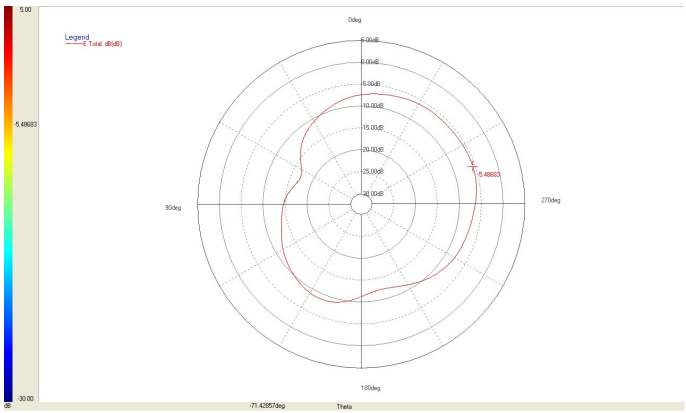


YZ-Plane 2442MHz

2442MHz	Peak Gain
XY-Plane	1.22
XZ-Plane	1.08
YZ-Plane	-5.48


(Unit：dBi)

This document is held by Cirocomm, cannot be reproduced without permission .


Cirocomm Confidential
2021/06/29

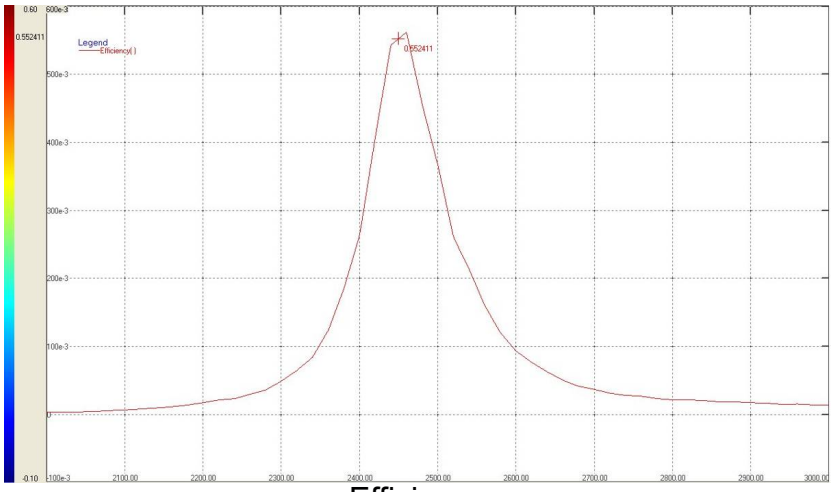

Efficiency

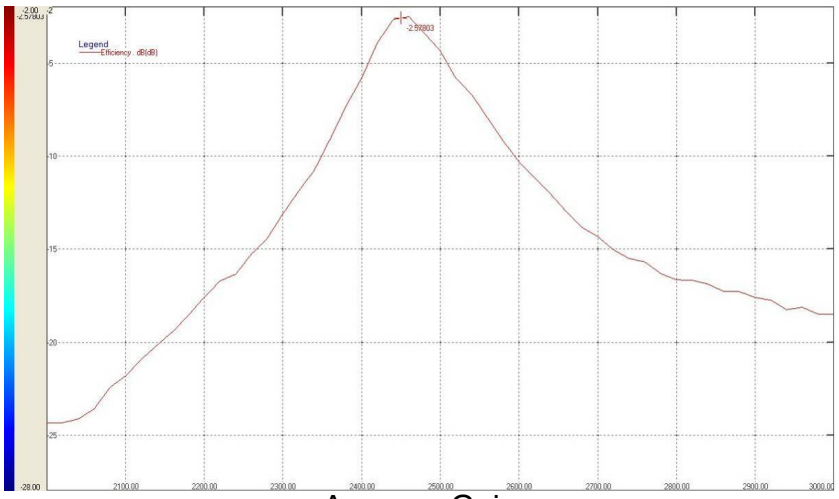

Average Gain

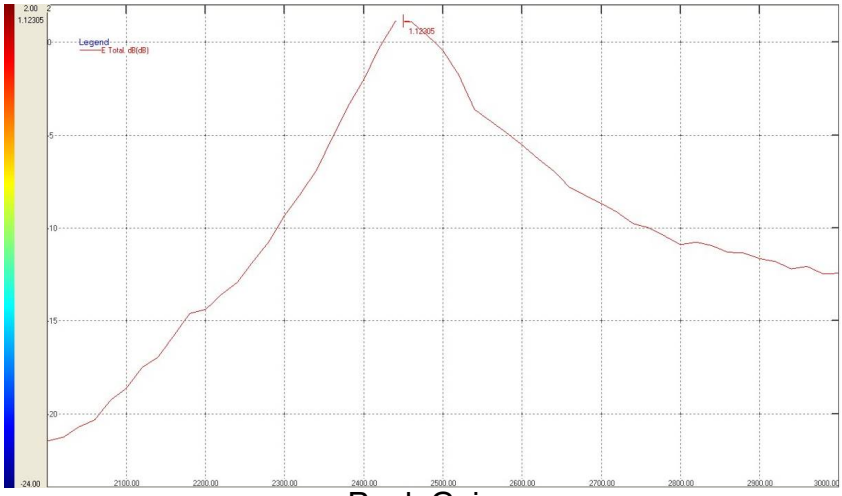


Peak Gain

Item	Efficiency	Average	Peak Gain
Value	55.24%	-2.57dBi	1.12dBi


CiRO This document is held by Cirocomm, cannot be reproduced without permission .
Cirocomm Confidential
2021/06/29

6. Customer's Requirement Layout Dimension


6-1 Layout 1 Dimension

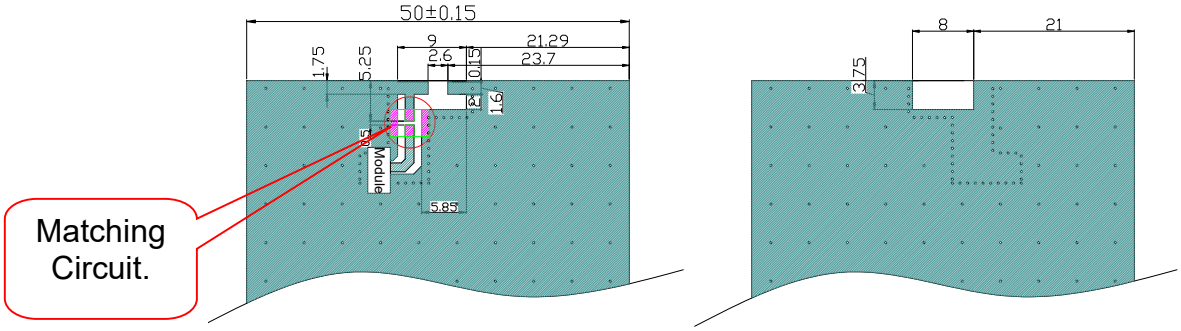

6-1-1 Single and Pad Layout Dimension

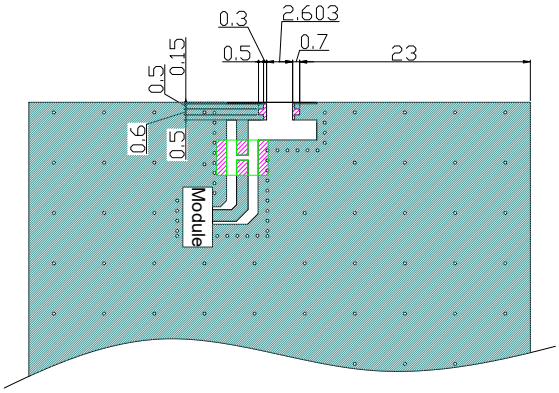


6-2 Layout 2 Dimension

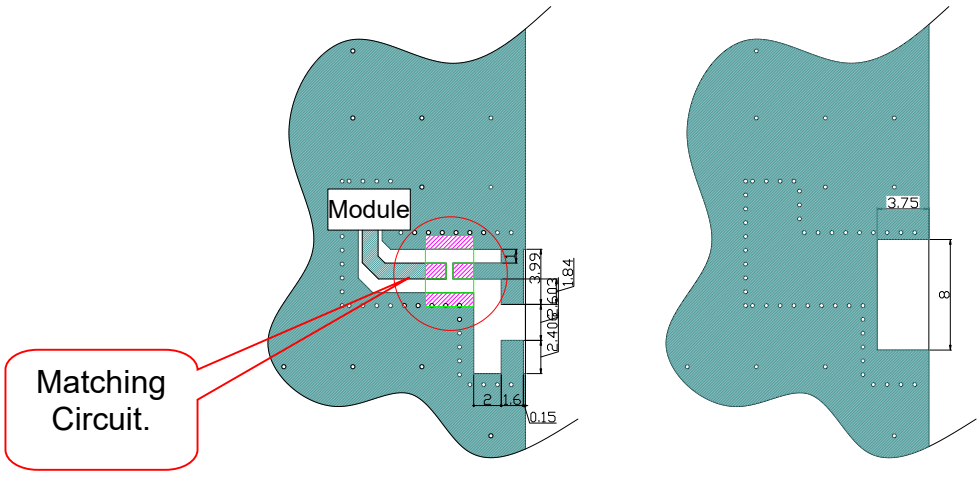


This document is held by Cirocomm, cannot be reproduced without permission .
Cirocomm Confidential
2021/06/29


6-2-1 Single and Pad Layout Dimension

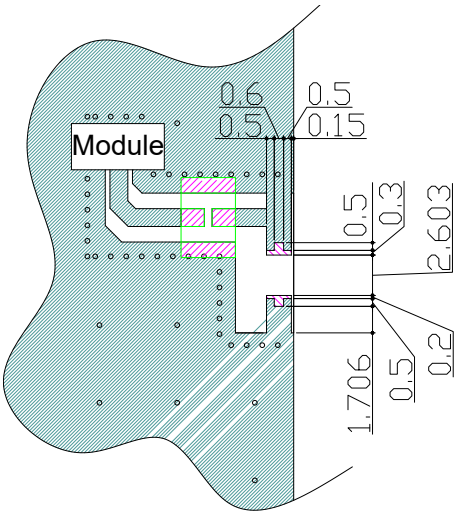

6-3 Layout 3 Dimension

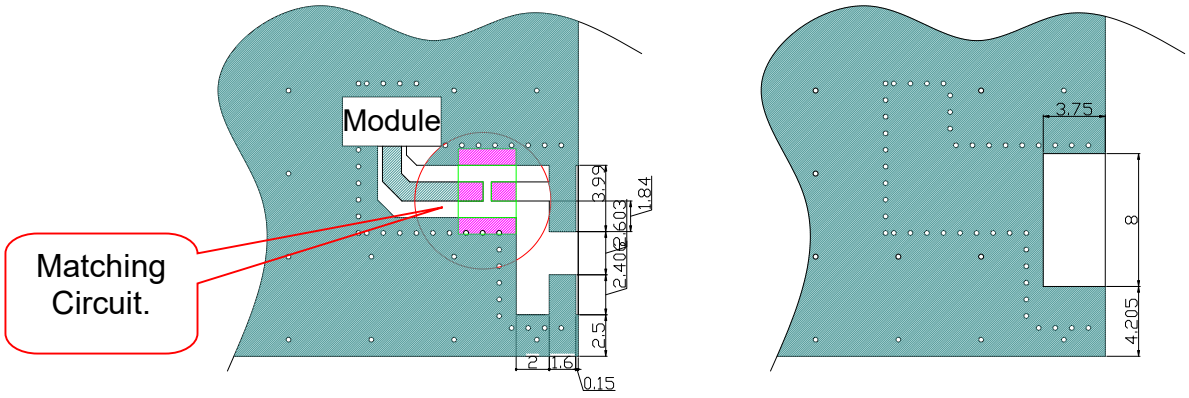

6-3-1 Single and Pad Layout Dimension

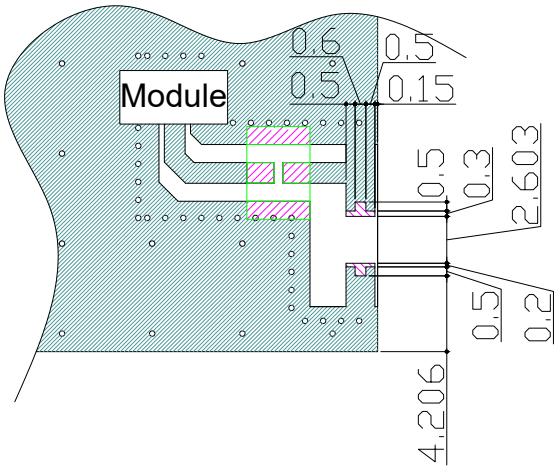

This document is held by Cirocomm, cannot be reproduced without permission .
Cirocomm Confidential
2021/06/29

7. Environmental conditions

7-1 Operating conditions

The antenna has the electrical characteristics given in Tables 1 in the temperature range of -40℃ to +85℃ and under the environmental conditions of +40°C and 0-95% relative humidity.

7-2 Storage temperature range

The storage temperature range of product is -40°C to +85°C.

8. Reliability tests

8-1 Low-temperature test

Expose the specimen to -40°C for 16 hours and then to normal temperature/ humidity for 24 hours or more. After this test, examine its appearance and functions.

8-2 High-temperature test

Expose the specimen to +85°C for 16 hours and then to normal temperature /humidity for 24 hours or more. After this test, examine its appearance and functions.

8-3 High-temperature/high-humidity test

Subject the object to the environmental conditions of +85°C and 90-95% relative humidity for 96 hours, then expose it to normal temperature/humidity for 24 hours or more. After this test, examine its appearance and functions.

8-4 Thermal shock test

Subject the object to cyclic temperature change (-40°C, 30 minutes⇔ +85°C, 30 minutes) for 5 cycles, then expose to normal temperature/ humidity for 24 hours or more.

8-5 Vibration test

8-5-1 Sinusoidal vibration test

Subject the object to vibrations of 5 to 200 to 5Hz swept in 10 minutes, 4.5G at maximum (2mm amplitude), in X and Y directions for two hours each and in Z direction for four hours. After this test, examine its appearance functions.

8-5-2 Vibration test in packaged condition

Subject the object, which is packaged as illustrated, to vibrations of 15 to 60 to 15Hz swept in 6 minutes, 4G at maximum (2mm amplitude at maximum), applied in X, Y and Z directions for two hours each, i.e. six hours in total. After this test, examine its appearance and functions.

8-6 Free fall test in packaged condition

Drop the object, which is packaged as illustrated, to a concrete surface from the height of 90 cm, on one comer, three edges and six faces once each, i.e. 10 times in total. After this test, examine its appearance and functions.

CiRO This document is held by Cirocomm, cannot be reproduced without permission .
Cirocomm Confidential
2021/06/29

8-7 Soldering heat resistance test

The lead pins of the unit are soaked in solder bath at 260 ± 5°C for 10 seconds. After this test, examine its appearance and functions.

8-8 Adhesion test

The device is subjected to be soldered on test PCB. Then apply 0.5Kg (5N) of force for 5±1 seconds in the direction of parallel to the substrate. (The soldering should be done by reflow and be conducted with care so that the soldering is uniform and free of defect by stress such as heat shock).

9. Warranty

If any defect occurs form the product during proper use within a year after delivery, it will be repaired or replaced free of charge.

10. Other

Any question arising from this specification manual shall be solved by arrangement made by both parties.

11. Precautions for use


- Antenna pattern use an Ag / Ni / Sn electrode.
- Please don’t use the corrosion gas (sulfur gas, chlorine gas) in the atmosphere.
- Please don’t direct solder onto the silver electrode of antenna pattern.

CiRO This document is held by Cirocomm, cannot be reproduced without permission .


Cirocomm Confidential
2021/06/29

Delivery mode

1 .Blister tape to IEC 286-3, polyester.
2 .Pieces/ tape: 5000 pcs.
3 .Moisture sensitivity level: Level 1

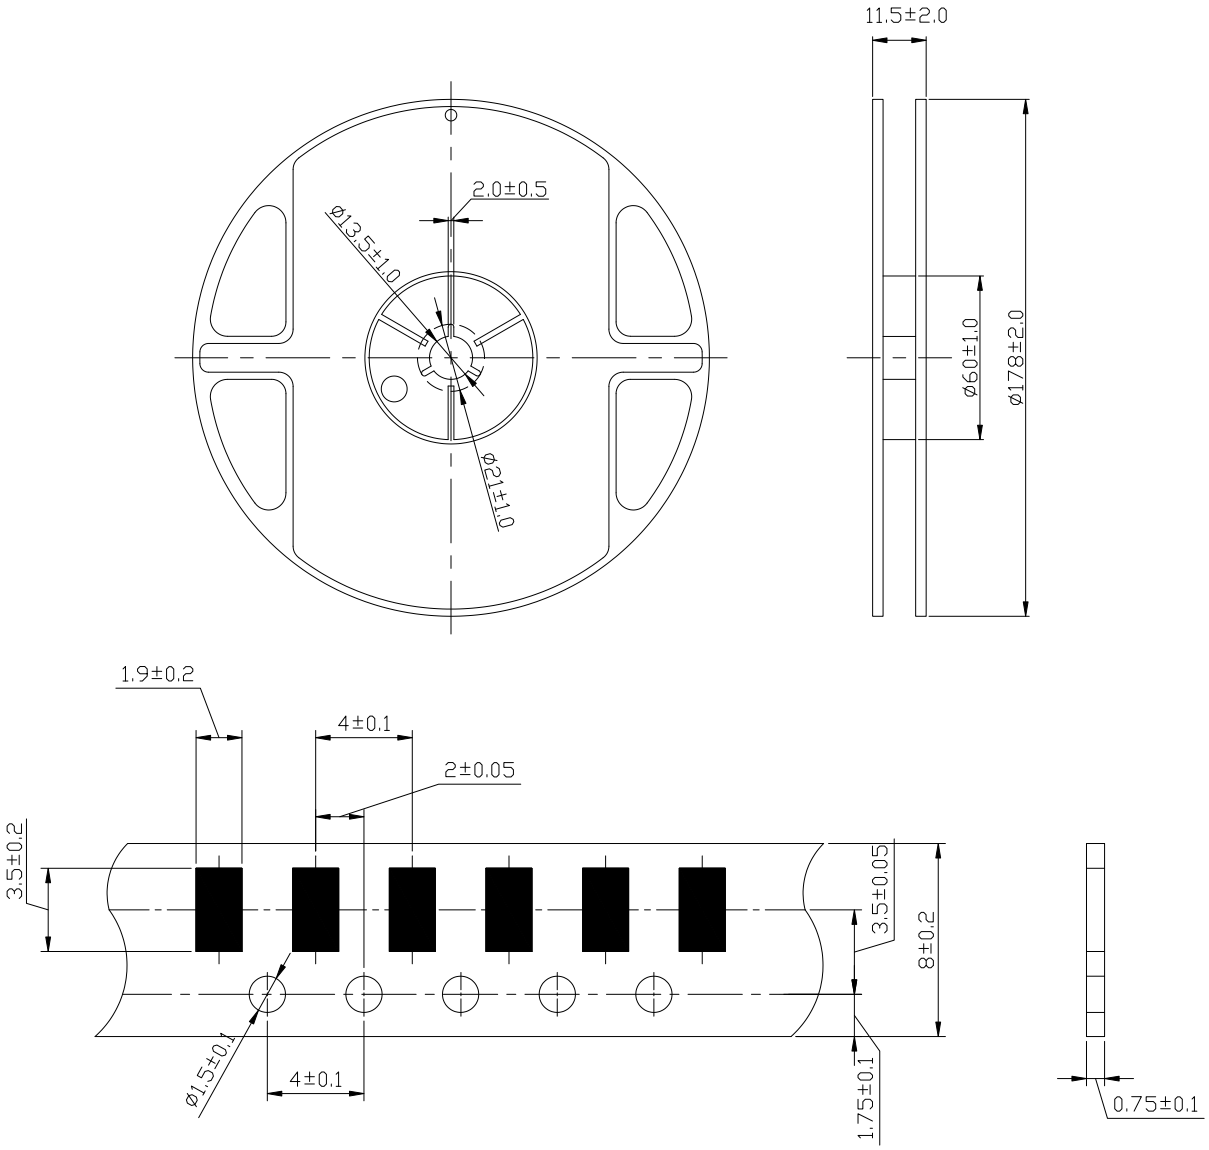

Marking direction

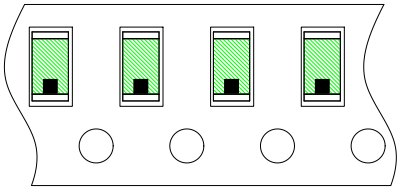

This document is held by Cirocomm, cannot be reproduced without permission .
Cirocomm Confidential
2021/06/29