



FCC Test Report

Application No.: DNT2606234040R08043-09492

Applicant: Shenzhen Kejinming Electronic Co.,Ltd.

Address of Applicant: 1F-6F, Building B7, Yintian Industrial Zone, Yantian Community, Xixiang Street, Bao'an District, Shenzhen, China

EUT Description: Roku TV Smart Projector

Model No.: K200

Additional Model(s): RK100, RK200, RK300, RK350, RK201, K200-W, K200-B, K200-D, K210, K210-W, K210-B, K210-D, K220, K220-W, K220-B, K220-D, K230, K230-W, K230-B, K230-D, Q350, Q350-W, Q350-B, Q350-D, Q360, Q360-W, Q360-B, Q360-D, Q370, Q370-W, Q370-B, Q370-D, Q380, Q380-W, Q380-B, Q380-D, K201, K202, K203, SW100, EPJ140AGR, NeoPix 120, J7P2504, K240, K250, RK202, NeoPix 260, NeoPix 270, J1P2602, J1P2603, K350, K400, SH180, SH250, MPJ230-WHITE, NeoPix 350, J1P2604, BRP-PT210, BRP-PT220, BRP-PT230

FCC ID: 2BU2U-K200

Power Supply Input: AC 100-240V 50/60Hz 42W
USB Output: 5V 1.0A

Trade Mark: /

Standards: 47 CFR FCC Part 2, Subpart J
47 CFR Part 15, Subpart E
ANSI C63.10: 2020

Date of Receipt: 2026/02/28

Date of Test: 2026/03/01 to 2026/03/19

Date of Issue: 2026/06/26

Test Result: **PASS**

Prepared By: Carl Lin (Testing Engineer)

Reviewed By: Wayne Lin (Project Engineer)

Approved By: Yusei Shan (Manager)



Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China

Web: www.dn-testing.com

Tel: +86-769-88087383

E-mail: service@dn-testing.com



Note: If there is any objection to the results in this report, please submit a written inquiry to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp, and is issued by the company in accordance with the requirements of the "Conditions of Issuance of Test Reports" printed in the attached page. Unless otherwise stated, the results presented in this report only apply to the samples tested this time. Partial reproduction of this report is not allowed unless approved by the company in writing.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	April 20, 2026	Original Report	DNT2602280176R00327-01116
V2.0	June 26, 2026	June 26, 2026	Report 1	DNT2606234040R08043-09492

Modification:

The original report ref. No. DNT2602280176R00327-01114, dated April 20, 2026 was modified and issued on June 26, 2026 to include the following changes:Based on the original report's model K200, BRP-PT210 external bracket has been modified, with added silk screen printing; and the report includes radiated spurious emissions for 30-1000MHz difference testing;The differences between models BRP-PT220 and BRP-PT230 and model BRP-PT210 lie in the name and color.

Note:

The other test data are derived from the original model report DNT2602280176R00327-01116.



1 Test Summary

No.	Description of Test Item	FCC Standard Section	Results
1	6dB Bandwidth & 26dB Bandwidth & 99% Occupied Bandwidth	15.407(a) 15.407(e)	PASS
2	Maximum Conducted Output Power	15.407(a)	PASS
3	Peak Power Spectral Density	15.407(a)	PASS
4	Unwanted Emissions and Band Edge	15.205 15.209 15.407(b)	PASS
5	Frequency Stability	15.407(g)	PASS
6	AC Power Line Conducted Emissions	15.207 15.407(b)(9)	PASS
7	Antenna Requirement	15.203	PASS

Note:

1. "N/A" denotes test is not applicable in this test report.



Contents

1 Test Summary	3
2 General Information	5
2.1 Test Location	5
2.2 General Description of EUT	6
2.3 Test Environment and Mode	7
2.4 Channel List	7
2.5 Power Setting of Test Software	8
2.6 Assistant equipment used for test	8
2.7 Description of Support Units	8
2.8 Test Facility	8
2.9 Equipment List	9
2.10 Measurement Uncertainty (95% confidence levels, k=2)	11
3 Test results and Measurement Data	12
3.1 Antenna Requirement	12
3.2 Duty Cycle	13
3.3 Emission Bandwidth	14
3.4 DTS (6 dB) Bandwidth	15
3.5 99% Occupied Bandwidth	16
3.6 Conducted Output Power	17
3.7 Power Spectral Density	18
3.8 Radiated Spurious Emissions	19
3.9 Restricted bands around fundamental frequency	33
3.10 AC Power Line Conducted Emissions	39
4 Appendix	42
Appendix A: Duty Cycle	42
Appendix B: 26dB Emission Bandwidth&6dB Emission Bandwidth	49
Appendix C:Occupied channel bandwidth	56
Appendix D: Maximum conducted output power	63
Appendix E: Maximum power spectral density	64
Appendix F: Frequency Stability	71



2 General Information

2.1 Test Location

Company:	Guangdong DN Testing Co., Ltd
Address:	No. 1, West Fourth Street, South Xinfu Road, Wusha Liwu, Chang' an Town, Dongguan City, Guangdong P.R.China
Test engineer:	Gali Lin



2.2 General Description of EUT

Manufacturer:	Shenzhen Kejinming Electronic Co.,Ltd.
Address of Manufacturer:	1F-6F, Building B7, Yintian Industrial Zone, Yantian Community, Xixiang Street, Bao'an District, Shenzhen, China
Factory:	Huizhou Kejinming Electronics Co.,Ltd
Address of factory:	Building 1, Kejinming Industrial Park, No. 4, Yingshan Second Road, Shanbei Village, Lilin Town,Zhongkai Hi tech Zone,Huizhou
EUT Description:	Roku TV Smart Projector
Model No.:	K200
Additional Model(s):	RK100, RK200, RK300, RK350, RK201, K200-W, K200-B, K200-D, K210, K210-W, K210-B, K210-D, K220, K220-W, K220-B, K220-D, K230, K230-W, K230-B, K230-D, Q350, Q350-W, Q350-B, Q350-D, Q360, Q360-W, Q360-B, Q360-D, Q370, Q370-W, Q370-B, Q370-D, Q380, Q380-W, Q380-B, Q380-D, K201, K202, K203, SW100, EPJ140AGR, NeoPix 120, J7P2504,K240, K250 , RK202, NeoPix 260, NeoPix 270, J1P2602, J1P2603, K350, K400, SH180, SH250, MPJ230-WHITE, NeoPix 350, J1P2604,BRP-PT210,BRP-PT220,BRP-PT230
Power Supply:	Input: AC 100-240V 50/60Hz 42W USB Output: 5V 1.0A
Trade Mark:	/
Hardware Version:	V1.0
Software Version:	V1.0
Chip Type:	RTL8733BU
Serial number:	PR2606234040R08043
IEEE 802.11 WLAN Mode Supported	☒ 802.11a (20 MHz channel bandwidth), ☒ 802.11n (20 MHz channel bandwidth), ☒ 802.11n (40 MHz channel bandwidth)
Operation Frequency:	U-NII-1: 5180 MHz~5240 MHz U-NII-3: 5745 MHz~5825 MHz
Type of Modulation:	OFDM
Sample Type:	☐ Portable Device, ☐ Module, ☒ Mobile Device
Antenna Type:	☐ External, ☒ Integrated
Antenna Ports	☒ Ant 1, ☐ Ant 2, ☐ Ant 3
Smart System	☒ SISO (for 802.11a/n), ☐ MIMO (for 802.11n/ac/ax), ☐ Diversity (for 802.11a).
Antenna Gain*:	☒ Provided by applicant 5.1G:2.70dBi 5.8G:2.17dBi
RF Cable*:	☒ Provided by applicant 0.5dB(0.6~1GHz); 0.8dB(1.4~2GHz); 1.0dB(2.1~2.7GHz); 1.5dB(3~4GHz); 1.8dB(4.4~6GHz);



Remark:

*The differences between the model BRP-PT210 and the original model K200 are external bracket has been modified, with added silk screen printing; The differences between models BRP-PT220 and BRP-PT230 and model BRP-PT210 lie in the name and color; The differences between other models and model K200 lie in the name, while the motherboard, PCB circuit board, chip, electronic components is all the same.

*Since the above data and/or information is provided by the applicant relevant results or conclusions of this report are only made for these data and/or information, DNT is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.

2.3 Test Environment and Mode

Operating Environment:	
Temperature:	20~25.0 °C
Humidity:	45~56 % RH
Atmospheric Pressure:	101.0~101.30 KPa
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.

2.4 Channel List

Band	Mode	Channel	Frequency (MHz)
U-NII-1	IEEE 802.11a & n HT20	36	5180
		40	5200
		44	5220
		48	5240
	IEEE 802.11n HT40	38	5190
		46	5230
UNII-3	IEEE 802.11a & n HT20	149	5745
		153	5765
		157	5785
		161	5805
		165	5825
		151	5755
	IEEE 802.11n HT40	159	5795

Remark:

In FCC 15.31, for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table, and the selected channel to perform the test as below:

Frequency Range of Operation Operating Frequency Range (in each Band)	Number of Measurement Frequencies Required	Location of Measurement Frequency in Band of Operation
1 MHz or less	1	centre
1 MHz to 10 MHz	2	1 near high end, 1 near low end
Greater than 10 MHz	3	1 near high end, 1 near centre



2.5 Power Setting of Test Software

Software Name	MPTool		
Frequency(MHz)	5180	5200	5240
11A	40	40	40
11N20	40	40	40
Frequency(MHz)	5745	5785	5825
11A	40	40	40
11N20	40	40	40
Frequency(MHz)	5190	5230	
11N40	40	40	
Frequency(MHz)	5755	5795	
11N40	40	40	

2.6 Assistant equipment used for test

Code	Equipment	Manufacturer	Model No.	Equipment No.
1	Computer	acer	N22C8	EMC notebook01

2.7 Description of Support Units

The EUT has been tested independent unit.

2.8 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Lab A:

• FCC, USA

Designation Number: CN1348

• A2LA (Certificate No. 7050.01)

GUANGDONG DN TESTING CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 7050.01.

• Innovation, Science and Economic Development Canada

GUANGDONG DN TESTING CO., LTD. EMC Laboratory has been recognized by ISED as an accredited testing laboratory. CAB identifier is CN0149.

IC#: 30755.



2.9 Equipment List

For Connect EUT Antenna Terminal Test					
Description	Manufacturer	Model	Serial Number	Cal date	Due date
Signal Generator	Keysight	N5181A-6G	MY48180415	2025-10-21	2026-10-20
Signal Generator	Keysight	N5182B	MY57300617	2025-10-21	2026-10-20
Power supply	Keysight	E3640A	ZB2022656	2025-10-21	2026-10-20
Radio Communication Tester	R&S	CMW500	105082	2025-10-21	2026-10-20
Spectrum Analyzer	Aglient	N9010A	MY52220200	2025-10-21	2026-10-20
BT/WIFI Test Software	Tonscend	JS1120 V3.1.83	NA	NA	NA
RF Control Unit	Tonscend	JS0806-2	22F8060581	NA	NA
Power Sensor	Anritsu	ML2495A	2129005	2025-10-21	2026-10-20
Pulse Power Sensor	Anritsu	MA2411B	1911397	2025-10-21	2026-10-20
temperature and humidity box	SCOTEK	SCD-C40-80PRO	6866682020008	2025-10-21	2026-10-20
RF Cable	ETS-LINDGREN	RFC-NMS-100-NMS-350-IN	NA	2025-10-21	2026-10-20

Test Equipment for Conducted Emission					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Receiver	R&S	ESCI3	101152	2025-10-21	2026-10-20
LISN	R&S	ENV216	102874	2025-10-21	2026-10-20
ISN	R&S	ENY81-CA6	1309.8590.03	2025-10-21	2026-10-20
RF Cable	ETS-LINDGREN	Cable-CE TS01	/	2025-10-21	2026-10-20

Test Equipment for Radiated Emission(30MHz-1000MHz)					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Receiver	R&S	ESR7	102497	2025-10-21	2026-10-20
Test Software	Tonscend	JS32-RE	NA	NA	NA
RF Cable	ETS-LINDGREN	RE Cable-TS01	NA	2025-10-21	2026-10-20
Log periodic antenna	ETS-LINDGREN	VULB 9168	01475	2025-10-21	2026-10-20



Pre-amplifier	Schwarzbeck	BBV9743B	00423	2025-10-21	2026-10-20
Attenuator 1	Shanghai Huaxiang	TS2-6-18-A	22061803	2025-5-6	2026-5-5
Attenuator 2	Shanghai Huaxiang	TS2-6-6-A	230927163	2025-5-6	2026-5-5

Test Equipment for Radiated Emission(Above 1000MHz)					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Frequency analyser	Keysight	N9010A	MY52221458	2025-10-21	2026-10-20
RF Cable	ETS-LINDGREN	RE Cable-TS02	NA	2025-10-21	2026-10-20
Horn Antenna	ETS-LINDGREN	3117	00252567	2025-10-21	2026-10-20
Double ridged waveguide antenna	ETS-LINDGREN	3116C	00251780	2025-10-21	2026-10-20
Test Software	Tonscend	JS32-RE	NA	NA	NA
Pre-amplifier	ETS-LINDGREN	3117-PA	252567	2025-10-21	2026-10-20
Pre-amplifier	ETS-LINDGREN	3116C-PA	251780	2025-10-21	2026-10-20



2.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	DTS Bandwidth	$\pm 0.0196\%$
2	Maximum Conducted Output Power	± 0.686 dB
3	Maximum Power Spectral Density Level	± 0.743 dB
4	Band-edge Compliance	± 1.328 dB
5	Unwanted Emissions In Non-restricted Freq Bands	9KHz-1GHz: ± 0.746 dB 1GHz-26GHz: ± 1.328 dB

No.	Item	Measurement Uncertainty
1	Conduction Emission	± 3.0 dB (150kHz to 30MHz)
2	Radiated Emission	± 4.8 dB (Below 1GHz)
		± 4.8 dB (1GHz to 6GHz)
		± 4.5 dB (6GHz to 18GHz)
		± 5.02 dB (Above 18GHz)



3 Test results and Measurement Data

3.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
The antenna is integrated to the motherboard, The best case gain of the antenna is 5.1G:2.70dBi,5.8G:2.17dBi.	



3.2 Duty Cycle


Refer to section : **Appendix A**

Note:

- 1.If duty cycle $< 98\%$, the conducted average output power and average power spectral density should be add duty factor.
- 2.If duty cycle $\geq 98\%$, the EUT is consider to be transmitting continuously, the conducted average output power and average power spectral density no need to add duty factor (consider to be zero).
- 3.The conducted peak output power and peak power spectral density no need to consider duty factor.
- 4.The on-time time is transmission duration (T).




3.3 Emission Bandwidth

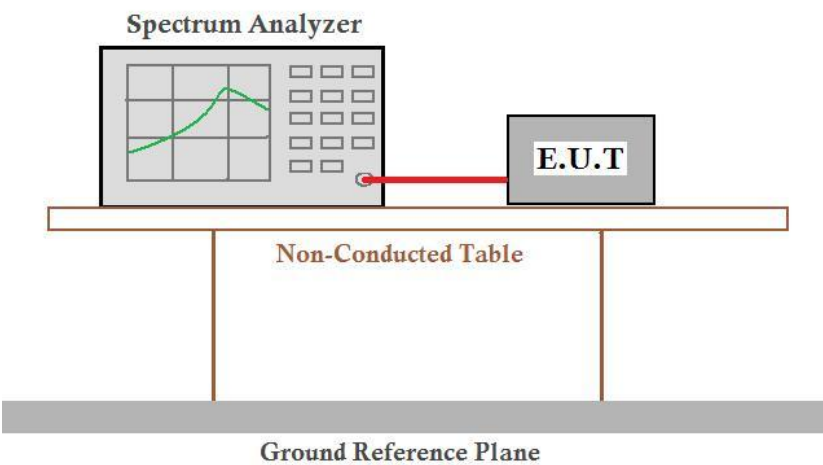Test Requirement:	47 CFR Part 15 Section 15.407(a)																							
Test Method:	ANSI C63.10: 2020																							
Test Setup:																								
Instruments Used:	Refer to section 2.9 for details																							
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates																							
Final Test Mode:	Through Pre-scan, find the worst case of all modulations. Only the worst case is recorded in the report.																							
Limit	<table><tr><th>Band</th><th>Frequency (MHz)</th><th>Test Item</th><th>Limit</th></tr><tr><td>U-NII-1</td><td>5150-5250</td><td>26dB Bandwidth&99% Occupied Bandwidth</td><td>N/A</td></tr><tr><td>U-NII-2A</td><td>5250-5350</td><td>26dB Bandwidth&99% Occupied Bandwidth</td><td>N/A</td></tr><tr><td>U-NII-2C</td><td>5470-5725</td><td>26dB Bandwidth&99% Occupied Bandwidth</td><td>N/A</td></tr><tr><td>U-NII-3</td><td>5725-5850</td><td>6dB Bandwidth&99% Occupied Bandwidth</td><td>6dB Bandwidth ≥ 500KHz</td></tr></table>				Band	Frequency (MHz)	Test Item	Limit	U-NII-1	5150-5250	26dB Bandwidth&99% Occupied Bandwidth	N/A	U-NII-2A	5250-5350	26dB Bandwidth&99% Occupied Bandwidth	N/A	U-NII-2C	5470-5725	26dB Bandwidth&99% Occupied Bandwidth	N/A	U-NII-3	5725-5850	6dB Bandwidth&99% Occupied Bandwidth	6dB Bandwidth ≥ 500KHz
Band	Frequency (MHz)	Test Item	Limit																					
U-NII-1	5150-5250	26dB Bandwidth&99% Occupied Bandwidth	N/A																					
U-NII-2A	5250-5350	26dB Bandwidth&99% Occupied Bandwidth	N/A																					
U-NII-2C	5470-5725	26dB Bandwidth&99% Occupied Bandwidth	N/A																					
U-NII-3	5725-5850	6dB Bandwidth&99% Occupied Bandwidth	6dB Bandwidth ≥ 500KHz																					

The detailed test data see: **Appendix B**




3.4 DTS (6 dB) Bandwidth

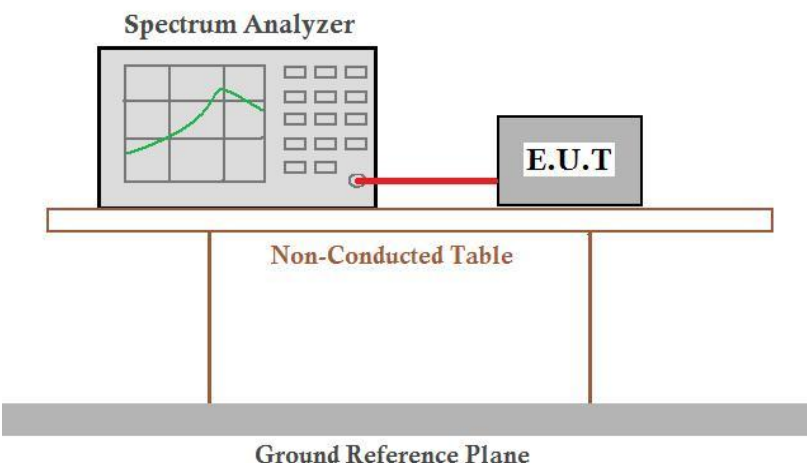Test Requirement:	47 CFR Part 15 Section 15.407(e)																							
Test Method:	ANSI C63.10: 2020																							
Test Setup:																								
Instruments Used:	Refer to section 2.9 for details																							
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates																							
Final Test Mode:	Through Pre-scan, find the worst case of all modulations. Only the worst case is recorded in the report.																							
Limit:	<table><tr><th>Band</th><th>Frequency (MHz)</th><th>Test Item</th><th>Limit</th></tr><tr><td>U-NII-1</td><td>5150-5250</td><td>26dB Bandwidth&99% Occupied Bandwidth</td><td>N/A</td></tr><tr><td>U-NII-2A</td><td>5250-5350</td><td>26dB Bandwidth&99% Occupied Bandwidth</td><td>N/A</td></tr><tr><td>U-NII-2C</td><td>5470-5725</td><td>26dB Bandwidth&99% Occupied Bandwidth</td><td>N/A</td></tr><tr><td>U-NII-3</td><td>5725-5850</td><td>6dB Bandwidth&99% Occupied Bandwidth</td><td>6dB Bandwidth ≥ 500KHz</td></tr></table>				Band	Frequency (MHz)	Test Item	Limit	U-NII-1	5150-5250	26dB Bandwidth&99% Occupied Bandwidth	N/A	U-NII-2A	5250-5350	26dB Bandwidth&99% Occupied Bandwidth	N/A	U-NII-2C	5470-5725	26dB Bandwidth&99% Occupied Bandwidth	N/A	U-NII-3	5725-5850	6dB Bandwidth&99% Occupied Bandwidth	6dB Bandwidth ≥ 500KHz
Band	Frequency (MHz)	Test Item	Limit																					
U-NII-1	5150-5250	26dB Bandwidth&99% Occupied Bandwidth	N/A																					
U-NII-2A	5250-5350	26dB Bandwidth&99% Occupied Bandwidth	N/A																					
U-NII-2C	5470-5725	26dB Bandwidth&99% Occupied Bandwidth	N/A																					
U-NII-3	5725-5850	6dB Bandwidth&99% Occupied Bandwidth	6dB Bandwidth ≥ 500KHz																					
Test Results:	PASS																							

The detailed test data see: **Appendix B**




3.5 99% Occupied Bandwidth

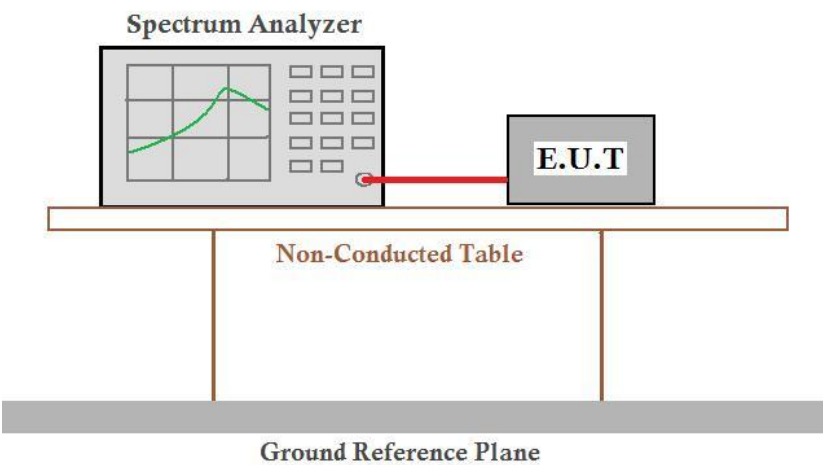Test Requirement:	47 CFR Part 15 Section 15.407(a)																							
Test Method:	ANSI C63.10: 2020																							
Test Setup:																								
Instruments Used:	Refer to section 2.9 for details																							
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates																							
Final Test Mode:	Through Pre-scan, find the worst case of all modulations. Only the worst case is recorded in the report.																							
Limit:	<table><tr><th>Band</th><th>Frequency (MHz)</th><th>Test Item</th><th>Limit</th></tr><tr><td>U-NII-1</td><td>5150-5250</td><td>26dB Bandwidth&99% Occupied Bandwidth</td><td>N/A</td></tr><tr><td>U-NII-2A</td><td>5250-5350</td><td>26dB Bandwidth&99% Occupied Bandwidth</td><td>N/A</td></tr><tr><td>U-NII-2C</td><td>5470-5725</td><td>26dB Bandwidth&99% Occupied Bandwidth</td><td>N/A</td></tr><tr><td>U-NII-3</td><td>5725-5850</td><td>6dB Bandwidth&99% Occupied Bandwidth</td><td>6dB Bandwidth ≥ 500KHz</td></tr></table>				Band	Frequency (MHz)	Test Item	Limit	U-NII-1	5150-5250	26dB Bandwidth&99% Occupied Bandwidth	N/A	U-NII-2A	5250-5350	26dB Bandwidth&99% Occupied Bandwidth	N/A	U-NII-2C	5470-5725	26dB Bandwidth&99% Occupied Bandwidth	N/A	U-NII-3	5725-5850	6dB Bandwidth&99% Occupied Bandwidth	6dB Bandwidth ≥ 500KHz
Band	Frequency (MHz)	Test Item	Limit																					
U-NII-1	5150-5250	26dB Bandwidth&99% Occupied Bandwidth	N/A																					
U-NII-2A	5250-5350	26dB Bandwidth&99% Occupied Bandwidth	N/A																					
U-NII-2C	5470-5725	26dB Bandwidth&99% Occupied Bandwidth	N/A																					
U-NII-3	5725-5850	6dB Bandwidth&99% Occupied Bandwidth	6dB Bandwidth ≥ 500KHz																					
Test Results:	Pass																							

The detailed test data see: **Appendix C**




3.6 Conducted Output Power

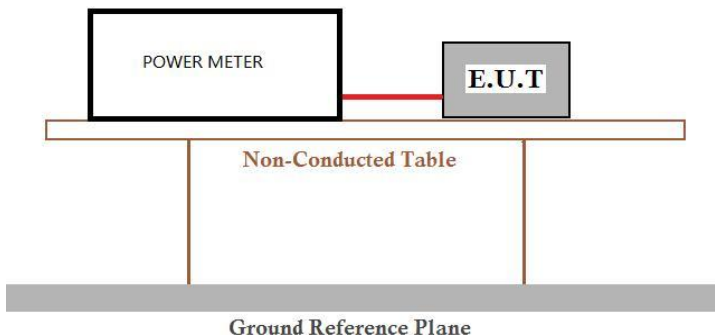Test Requirement:	47 CFR Part 15 Section 15.407(a)	
Test Method:	ANSI C63.10: 2020	
Test Setup:		
Test Instruments:	Refer to section 2.9 for details	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates	
Final Test Mode:	Through Pre-scan, find the worst case of all modulations. Only the worst case is recorded in the report.	
Limit:	Frequency Band	Limit
	5150-5250MHz	Not exceed 250mW(24dBm)
	5250-5350MHz	The lesser of 250mW(24dBm) or $11 + 10\log B$
	5470-5725MHz	The lesser of 250mW(24dBm) or $11 + 10\log B$
	5725-5850MHz	Not exceed 1W(30dBm)
Test Results:	Pass	

The detailed test data see: **Appendix D**



3.7 Power Spectral Density

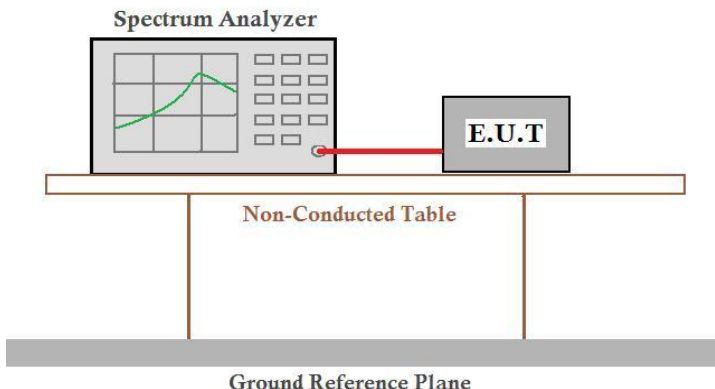Test Requirement:	47 CFR Part 15 Section 15.407(a)	
Test Method:	ANSI C63.10: 2020 KDB 789033 D02 v02r01, Section F.	
Test Setup:		
Test Instruments:	Refer to section 2.9 for details	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates	
Final Test Mode:	Through Pre-scan, find the worst case of all modulations. Only the worst case is recorded in the report.	
Limit:	Frequency Band	Limit
	5150-5250MHz	The power spectral density less than 11dBm/1MHz
	5250-5350MHz	The power spectral density less than 11dBm/1MHz
	5470-5725MHz	The power spectral density less than 11dBm/1MHz
	5725-5850MHz	The power spectral density less than <30dBm/500KHz
Test Results:	Pass	

The detailed test data see: **Appendix E**



3.8 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15 Section 15.407(b)				
Test Method:	ANSI C63.10: 2020				
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz (DC $\geq$ 0.98) $\geq$ 1/T (DC<0.98)	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Remark: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

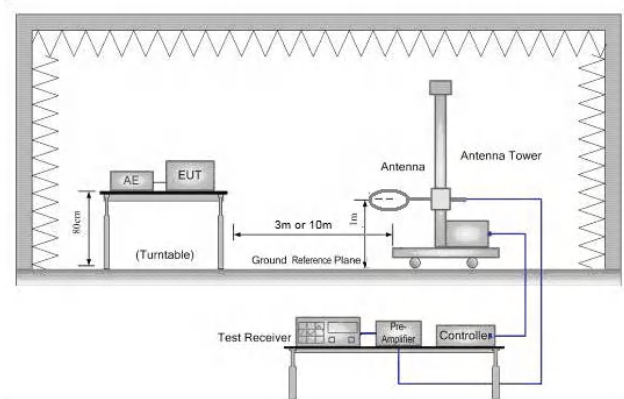
**Test Setup:**

Figure 1. Below 30MHz

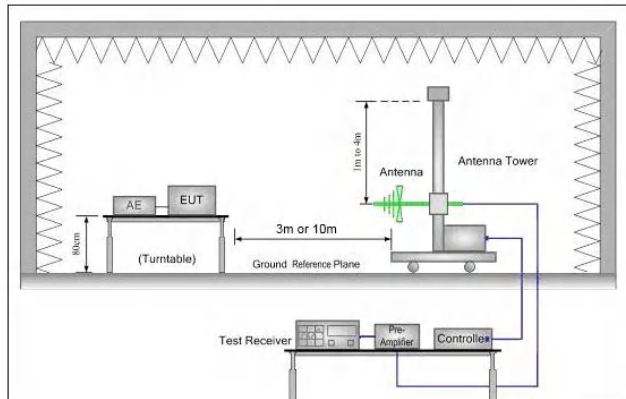


Figure 2. 30MHz to 1GHz

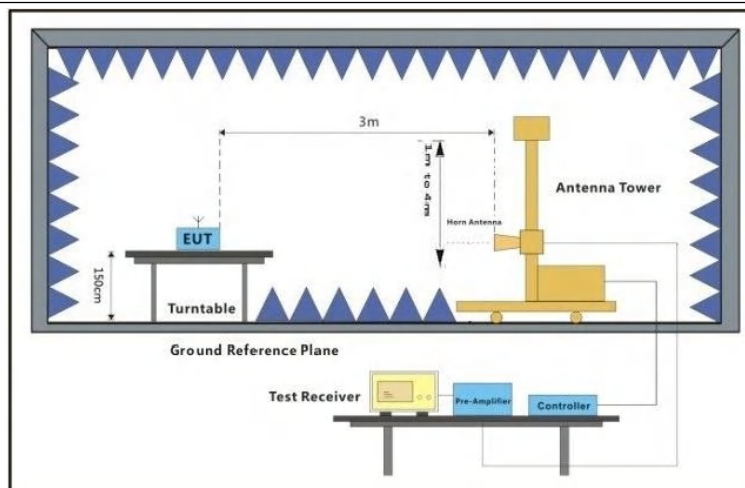


Figure 3. Above 1 GHz

Test Procedure:


- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.



	j. Repeat above procedures until all frequencies measured was complete.
Test Configuration:	Measurements Below 1000MHz • RBW = 120 kHz • VBW = 300 kHz • Detector = Peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW $\geq$ 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10 Hz, when duty cycle is no less than 98 percent. • VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Charge + Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode. Through Pre-scan, find the worst case of all modulations. Only the worst case is recorded in the report. For below 1GHz, through Pre-scan, find the the worst case. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 2.9 for details
Test Results:	Pass


**Test data****For 30-1000MHz****K200****5.1G**

Horizontal:

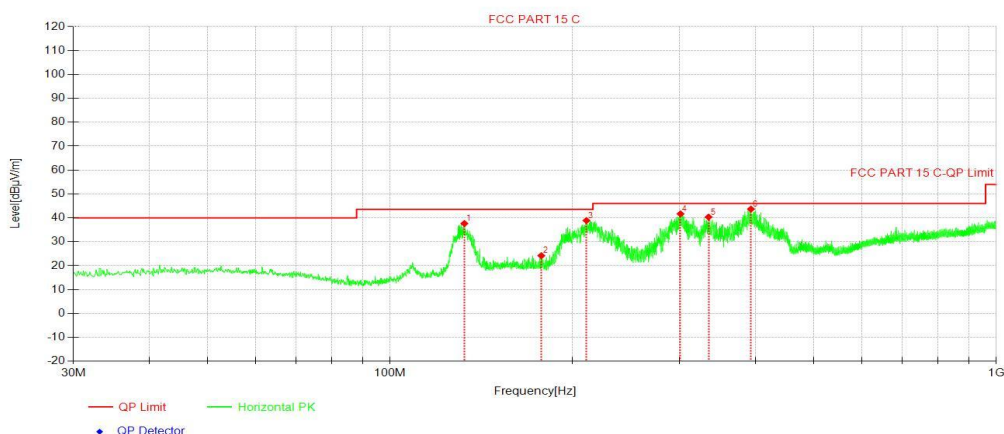

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detect or
1	132.54	46.82	-9.19	37.63	43.50	5.87	100	1	PK
2	177.55	33.20	-9.03	24.17	43.50	19.33	100	121	PK
3	210.73	49.87	-10.99	38.88	43.50	4.62	100	115	PK
4	301.24	48.62	-6.95	41.67	46.00	4.33	100	283	PK
5	335.10	46.26	-5.92	40.34	46.00	5.66	100	241	PK
6	393.69	48.09	-4.43	43.66	46.00	2.34	100	283	PK


Vertical :

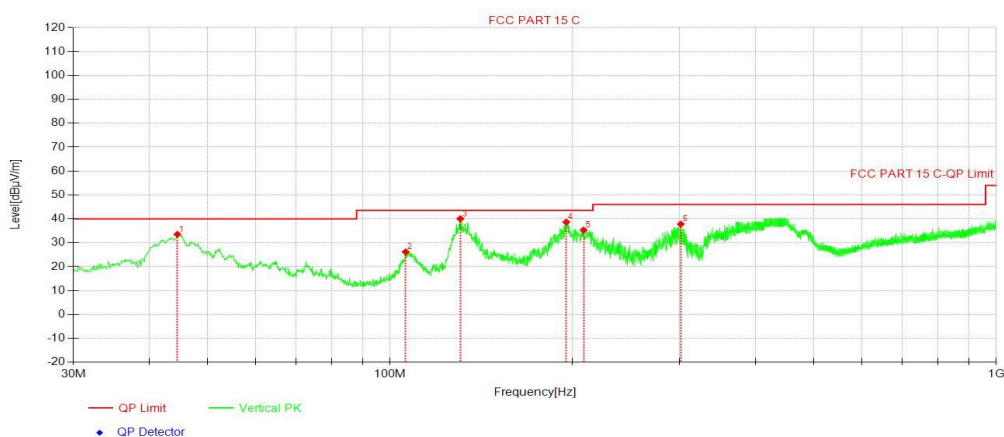

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detect or
1	44.55	41.81	-8.29	33.52	40.00	6.48	100	39	PK
2	106.06	37.86	-11.69	26.17	43.50	17.33	100	251	PK
3	130.50	49.43	-9.38	40.05	43.50	3.45	100	39	PK
4	195.21	49.59	-10.95	38.64	43.50	4.86	100	241	PK
5	208.50	46.31	-10.99	35.32	43.50	8.18	100	182	PK
6	301.53	44.73	-6.94	37.79	46.00	8.21	100	261	PK


**5.8G**

Horizontal:

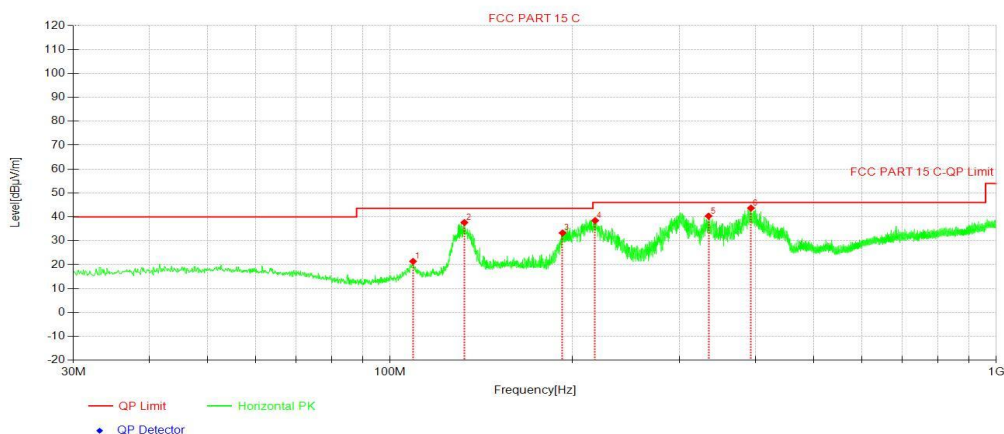

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detect or
1	109.06	32.70	-11.32	21.38	43.50	22.12	100	100	PK
2	132.54	46.82	-9.19	37.63	43.50	5.87	100	1	PK
3	192.49	44.01	-10.74	33.27	43.50	10.23	100	257	PK
4	217.81	49.52	-11.07	38.45	46.00	7.55	100	121	PK
5	335.10	46.26	-5.92	40.34	46.00	5.66	100	241	PK
6	393.69	48.09	-4.43	43.66	46.00	2.34	100	283	PK

Vertical :

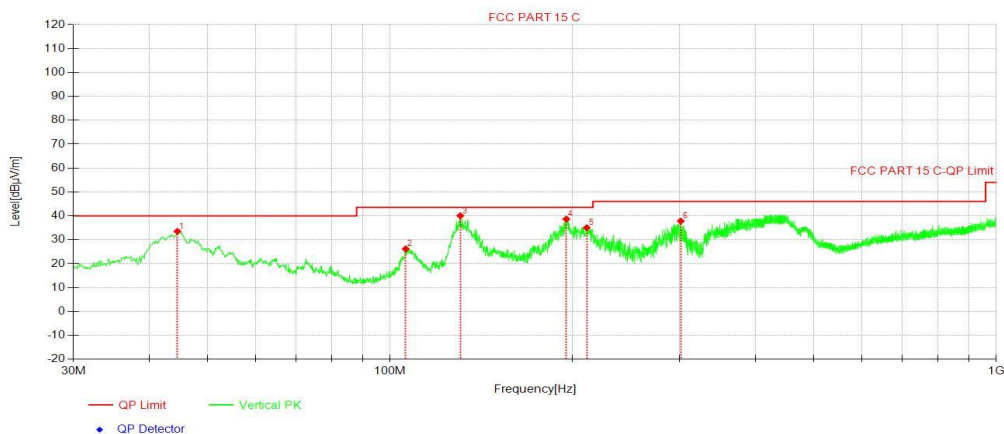


NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detect or
1	44.55	41.81	-8.29	33.52	40.00	6.48	100	39	PK
2	106.06	37.86	-11.69	26.17	43.50	17.33	100	251	PK
3	130.50	49.43	-9.38	40.05	43.50	3.45	100	39	PK
4	195.21	49.59	-10.95	38.64	43.50	4.86	100	241	PK
5	210.92	46.04	-10.99	35.05	43.50	8.45	100	225	PK
6	301.53	44.73	-6.94	37.79	46.00	8.21	100	261	PK



BRP-PT210


5.1G

Horizontal:

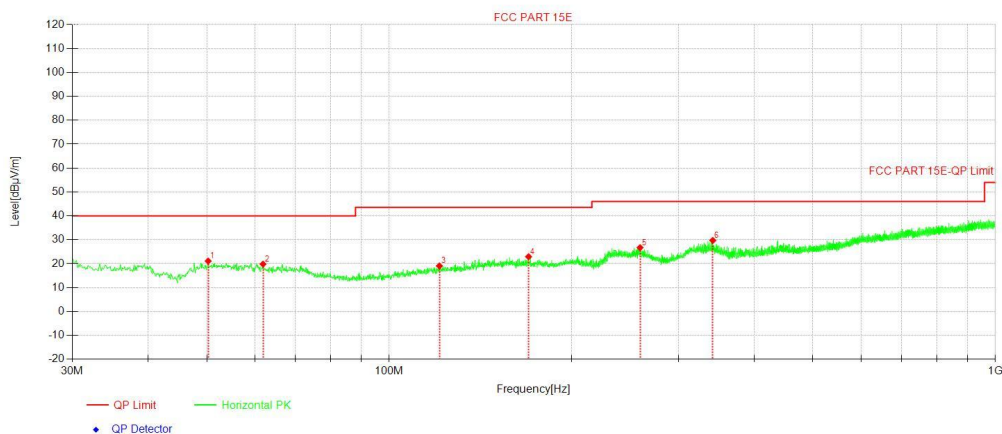

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detect or
1	50.28	27.91	-6.83	21.08	40.00	18.92	100	250	PK
2	61.92	27.32	-7.50	19.82	40.00	20.18	100	126	PK
3	121.00	28.20	-9.15	19.05	43.50	24.45	100	296	PK
4	169.79	29.77	-6.87	22.90	43.50	20.60	100	304	PK
5	259.33	34.30	-7.60	26.70	46.00	19.30	100	278	PK
6	341.79	34.47	-4.75	29.72	46.00	16.28	100	296	PK


Vertical :

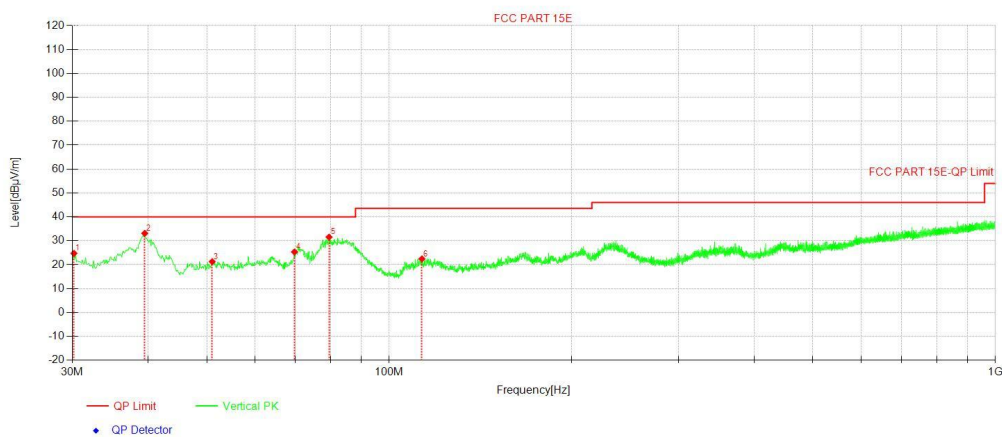

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detect or
1	30.19	30.39	-5.66	24.73	40.00	15.27	100	49	PK
2	39.51	40.21	-7.11	33.10	40.00	6.90	100	85	PK
3	51.05	27.65	-6.41	21.24	40.00	18.76	100	309	PK
4	69.77	34.07	-8.76	25.31	40.00	14.69	100	49	PK
5	79.57	42.78	-11.24	31.54	40.00	8.46	100	21	PK
6	113.23	31.96	-9.54	22.42	43.50	21.08	100	102	PK


**5.8G**

Horizontal:

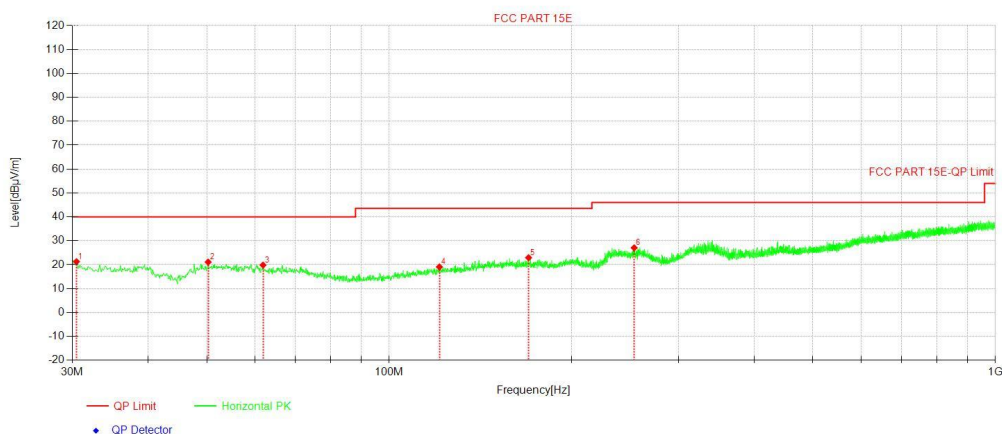

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detect or
1	30.49	27.62	-6.34	21.28	40.00	18.72	100	26	PK
2	50.28	27.91	-6.83	21.08	40.00	18.92	100	250	PK
3	61.92	27.32	-7.50	19.82	40.00	20.18	100	126	PK
4	121.00	28.20	-9.15	19.05	43.50	24.45	100	296	PK
5	169.79	29.77	-6.87	22.90	43.50	20.60	100	304	PK
6	253.61	34.66	-7.61	27.05	46.00	18.95	100	296	PK

Vertical :

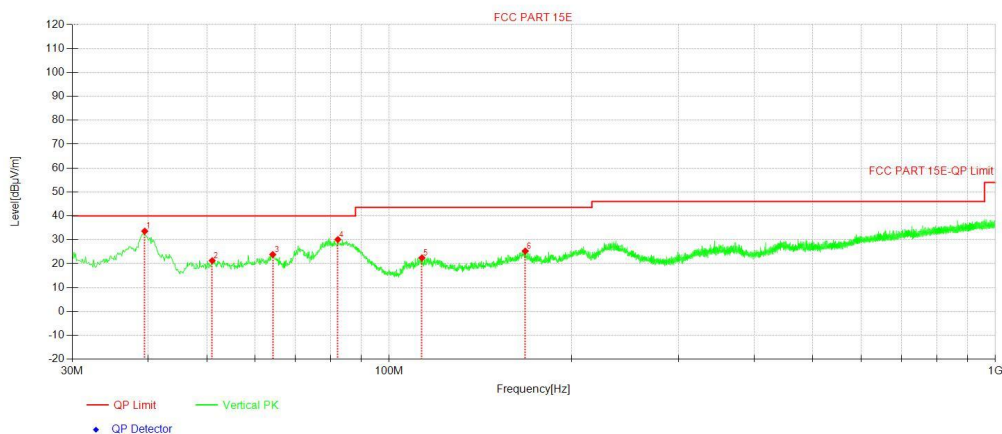


NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detect or
1	39.51	40.71	-7.11	33.60	40.00	6.40	100	85	PK
2	51.05	27.65	-6.41	21.24	40.00	18.76	100	309	PK
3	64.24	32.14	-8.31	23.83	40.00	16.17	100	49	PK
4	82.29	42.19	-12.08	30.11	40.00	9.89	100	67	PK
5	113.23	31.96	-9.54	22.42	43.50	21.08	100	102	PK
6	167.66	32.11	-6.84	25.27	43.50	18.23	100	264	PK



For above 1GHz


11A 5180MHz

Horizontal:

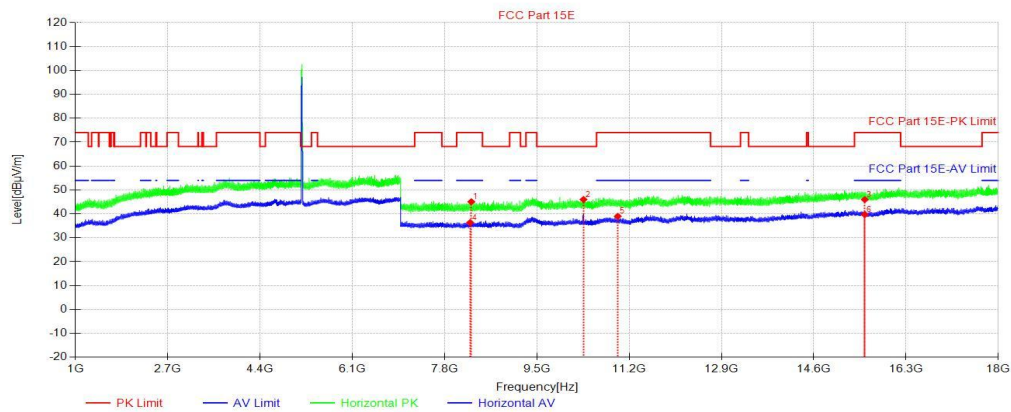

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	8293.65	47.13	-2.08	45.05	74.00	28.95	150	153	PK
2	10360.41	45.59	0.40	45.99	68.20	22.21	150	136	PK
3	15540.30	40.42	5.56	45.98	74.00	28.02	150	192	PK
4	8272.53	38.45	-2.09	36.36	54.00	17.64	150	359	AV
5	10990.52	37.58	1.39	38.97	54.00	15.03	150	287	AV
6	15540.30	34.14	5.56	39.70	54.00	14.30	150	57	AV


Vertical:

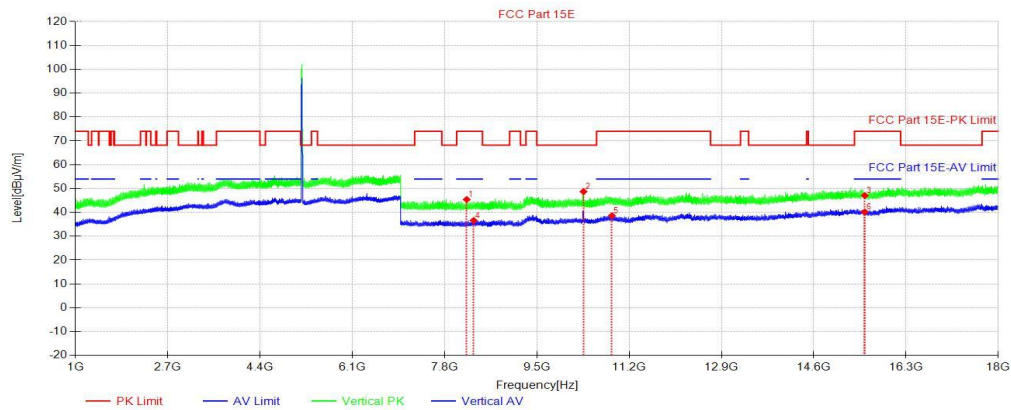

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	8208.73	47.53	-2.12	45.41	74.00	28.59	150	329	PK
2	10360.41	48.33	0.40	48.73	68.20	19.47	150	155	PK
3	15540.30	41.50	5.56	47.06	74.00	26.94	150	253	PK
4	8337.21	38.69	-2.08	36.61	54.00	17.39	150	59	AV
5	10883.16	37.08	1.52	38.60	54.00	15.40	150	196	AV
6	15540.30	34.61	5.56	40.17	54.00	13.83	150	116	AV


**11A 5200MHz**

Horizontal:

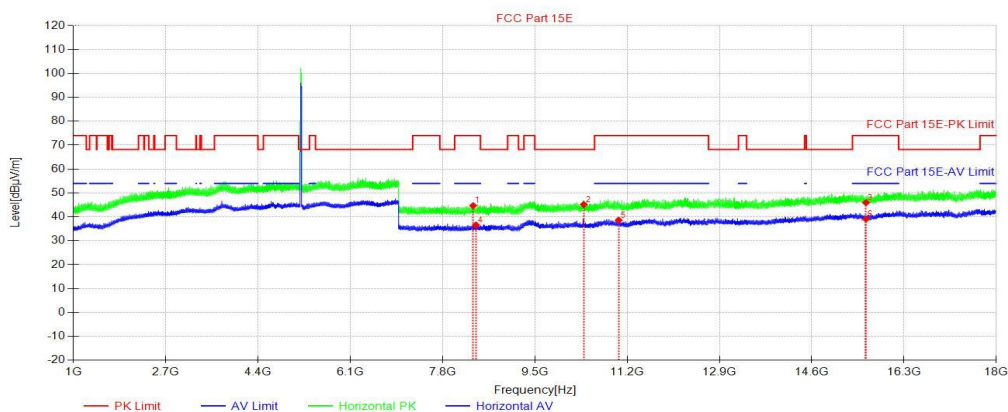

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	8364.05	46.75	-2.06	44.69	74.00	29.31	150	194	PK
2	10400.02	44.81	0.36	45.17	68.20	23.03	150	215	PK
3	15600.14	40.55	5.43	45.98	74.00	28.02	150	4	PK
4	8415.54	38.60	-2.02	36.58	54.00	17.42	150	79	AV
5	11044.20	37.29	1.33	38.62	54.00	15.38	150	275	AV
6	15600.14	33.69	5.43	39.12	54.00	14.88	150	275	AV


Vertical:

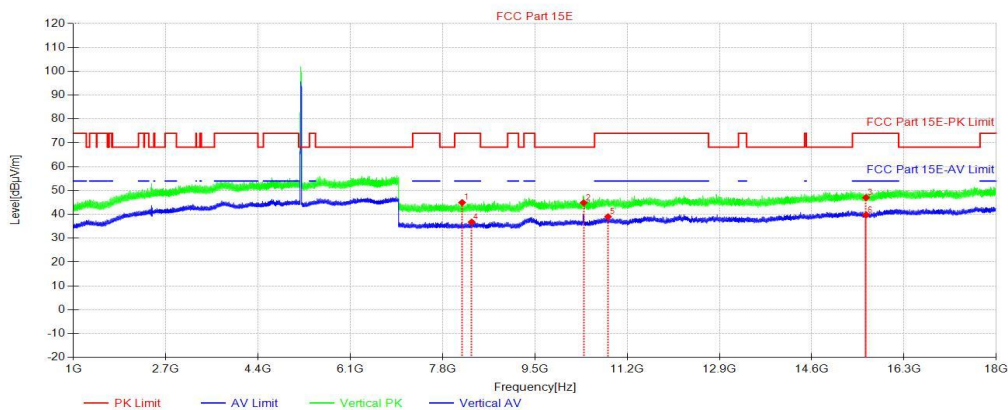

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	8160.77	46.93	-1.99	44.94	74.00	29.06	150	218	PK
2	10400.02	44.51	0.36	44.87	68.20	23.33	150	138	PK
3	15600.14	41.60	5.43	47.03	74.00	26.97	150	236	PK
4	8337.21	38.85	-2.08	36.77	54.00	17.23	150	325	AV
5	10847.95	37.45	1.56	39.01	54.00	14.99	150	236	AV
6	15600.14	34.32	5.43	39.75	54.00	14.25	150	43	AV


**11A 5240MHz**

Horizontal:

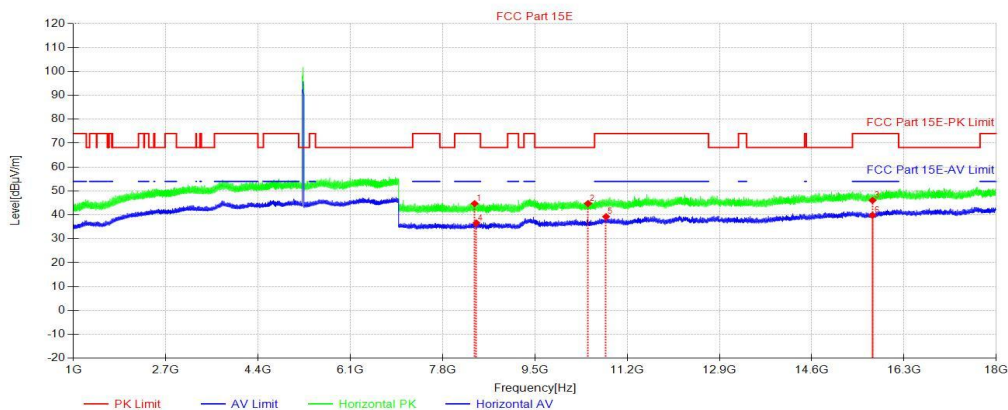

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	8391.78	46.74	-2.03	44.71	74.00	29.29	150	130	PK
2	10480.10	44.27	0.47	44.74	68.20	23.46	150	220	PK
3	15720.27	40.72	5.35	46.07	74.00	27.93	150	4	PK
4	8424.34	38.64	-2.02	36.62	54.00	17.38	150	58	AV
5	10812.31	37.67	1.58	39.25	54.00	14.75	150	113	AV
6	15720.27	34.45	5.35	39.80	54.00	14.20	150	146	AV


Vertical:

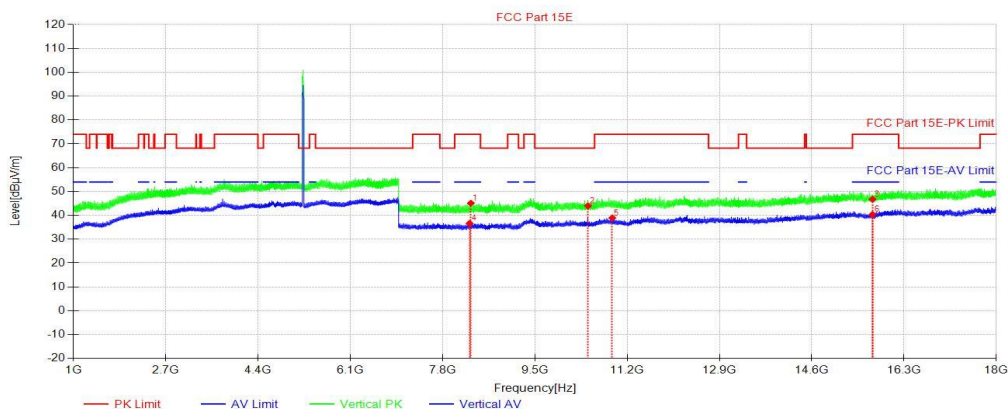

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	8321.81	47.19	-2.09	45.10	74.00	28.90	150	360	PK
2	10480.10	43.50	0.47	43.97	68.20	24.23	150	168	PK
3	15720.27	41.43	5.35	46.78	74.00	27.22	150	150	PK
4	8298.49	38.73	-2.08	36.65	54.00	17.35	150	24	AV
5	10926.72	37.45	1.47	38.92	54.00	15.08	150	39	AV
6	15720.27	35.01	5.35	40.36	54.00	13.64	150	150	AV


**5.8G 11A 5745MHz**

Horizontal:

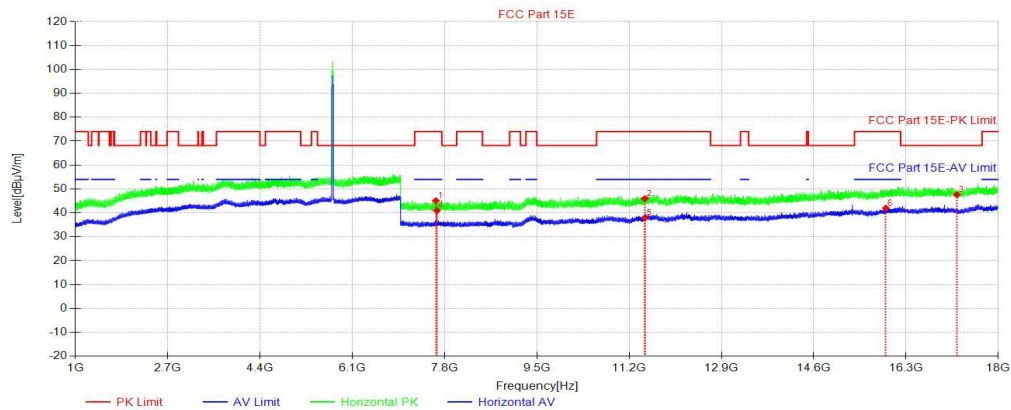

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	7640.23	46.27	-1.17	45.10	74.00	28.90	150	97	PK
2	11490.38	43.91	2.03	45.94	74.00	28.06	150	169	PK
3	17235.25	38.76	8.86	47.62	68.20	20.58	150	360	PK
4	7660.47	42.10	-1.14	40.96	54.00	13.04	150	150	AV
5	11490.38	35.92	2.03	37.95	54.00	16.05	150	282	AV
6	15928.40	35.99	5.96	41.95	54.00	12.05	150	360	AV


Vertical:

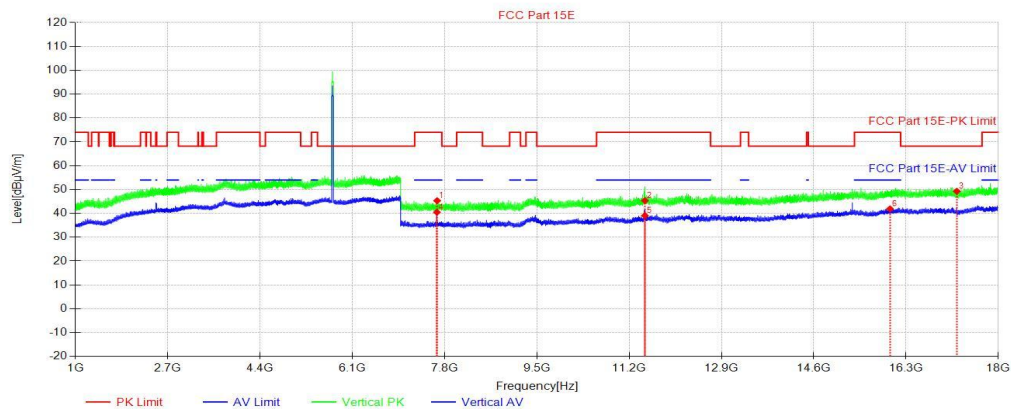

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	7663.55	46.46	-1.14	45.32	74.00	28.68	150	190	PK
2	11490.38	43.30	2.03	45.33	74.00	28.67	150	171	PK
3	17235.25	40.41	8.86	49.27	68.20	18.93	150	134	PK
4	7660.47	41.60	-1.14	40.46	54.00	13.54	150	190	AV
5	11490.38	37.01	2.03	39.04	54.00	14.96	150	360	AV
6	16004.96	35.54	6.35	41.89	54.00	12.11	150	134	AV


**5.8G 11A 5785MHz**

Horizontal:

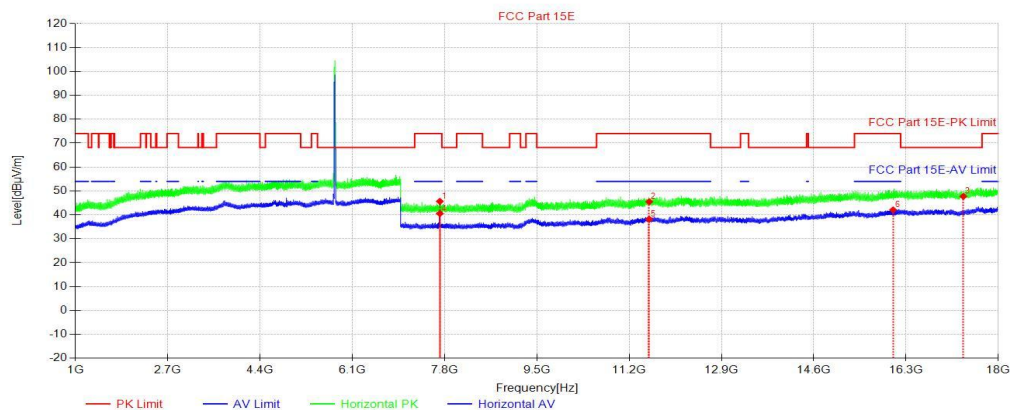

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	7713.27	46.72	-1.08	45.64	74.00	28.36	150	154	PK
2	11570.02	43.14	2.33	45.47	74.00	28.53	150	154	PK
3	17355.37	38.77	8.97	47.74	68.20	20.46	150	96	PK
4	7713.71	41.64	-1.08	40.56	54.00	13.44	150	154	AV
5	11570.02	35.87	2.33	38.20	54.00	15.80	150	266	AV
6	16061.28	35.70	6.39	42.09	54.00	11.91	150	58	AV


Vertical:

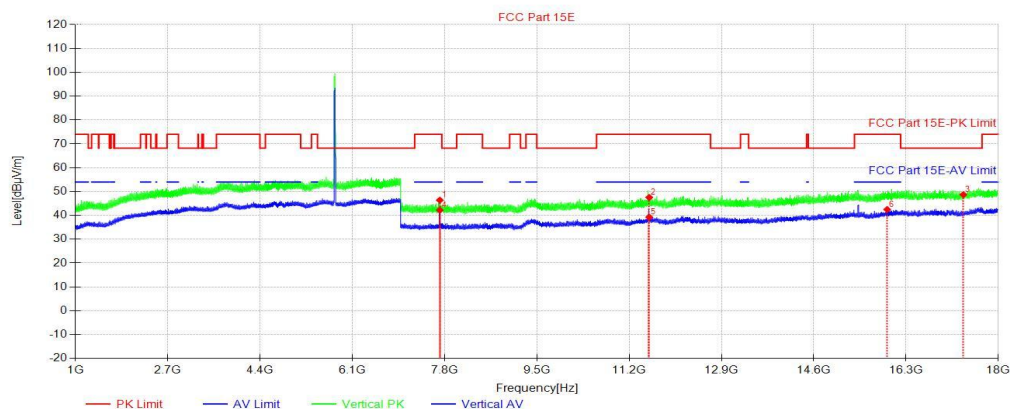

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	7713.71	47.45	-1.08	46.37	74.00	27.63	150	209	PK
2	11570.02	45.19	2.33	47.52	74.00	26.48	150	153	PK
3	17355.37	39.71	8.97	48.68	68.20	19.52	150	134	PK
4	7713.71	43.26	-1.08	42.18	54.00	11.82	150	189	AV
5	11570.02	36.92	2.33	39.25	54.00	14.75	150	360	AV
6	15952.16	36.37	6.11	42.48	54.00	11.52	150	360	AV


**5.8G 11A 5825MHz**

Horizontal:

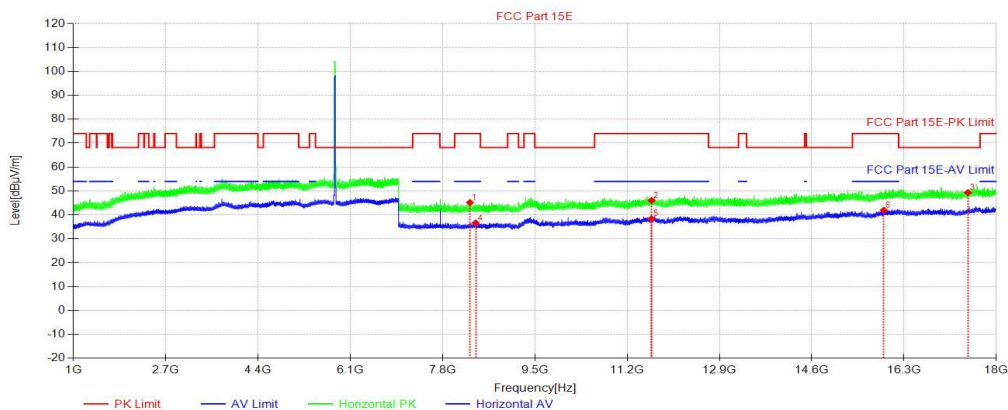

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	8306.41	47.25	-2.08	45.17	74.00	28.83	150	160	PK
2	11650.11	43.69	2.32	46.01	74.00	27.99	150	293	PK
3	17475.06	39.75	9.55	49.30	68.20	18.90	150	360	PK
4	8411.14	38.65	-2.02	36.63	54.00	17.37	150	139	AV
5	11650.11	36.06	2.32	38.38	54.00	15.62	150	81	AV
6	15927.52	36.00	5.96	41.96	54.00	12.04	150	22	AV

Vertical:

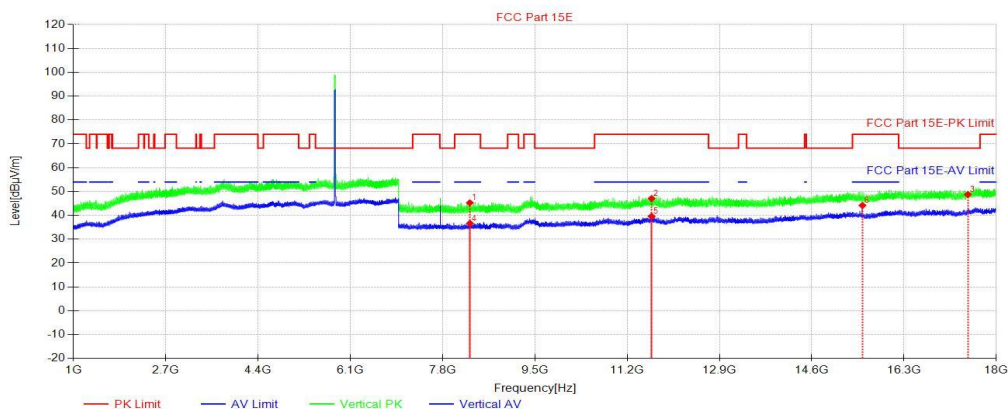

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	8303.77	47.33	-2.08	45.25	74.00	28.75	150	223	PK
2	11650.11	44.73	2.32	47.05	74.00	26.95	150	335	PK
3	17475.06	39.22	9.55	48.77	68.20	19.43	150	4	PK
4	8304.21	38.73	-2.09	36.64	54.00	17.36	150	223	AV
5	11650.11	37.28	2.32	39.60	54.00	14.40	150	360	AV
6	15533.70	38.59	5.57	44.16	54.00	9.84	150	202	AV

**Note:**

1. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including Ant.Factor and the Cable Factor etc.), The basic equation is as follows:

$$\text{Result Level} = \text{Reading Level} + \text{Correct Factor}(\text{including Ant.Factor, Cable Factor etc.})$$

2. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

3. The amplitude of 18GHz to 40GHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be report.

4. All channels had been pre-test, 802.11A is the worst case, only the worst case was reported.



3.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15 Section 15.407(b)		
Test Method:	ANSI C63.10: 2020		
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m)	Remark
	30MHz-88MHz	40.0	Quasi-peak
	88MHz-216MHz	43.5	Quasi-peak
	216MHz-960MHz	46.0	Quasi-peak
	960MHz-1GHz	54.0	Quasi-peak
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
	MHz	MHz	MHz
	GHz		
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(2)

Test Setup:

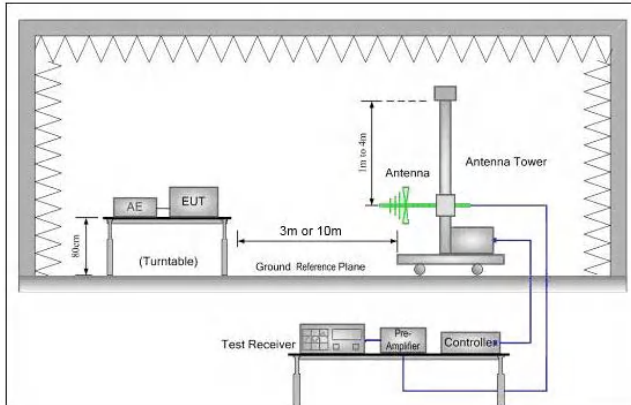


Figure 1. 30MHz to 1GHz

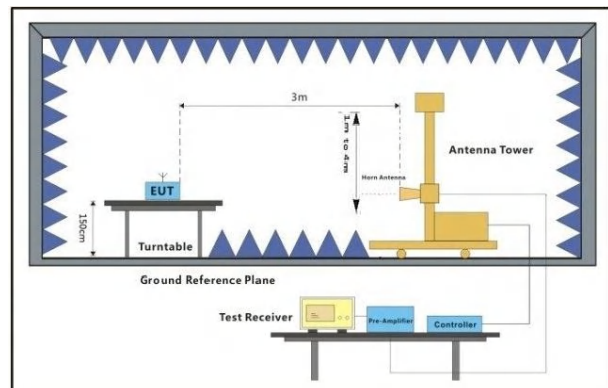



Figure 2. Above 1 GHz



Test Procedure:	- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel - Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.
Test Configuration:	Measurements Below 1000MHz • RBW = 120 kHz • VBW = 300 kHz • Detector = Peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW $\geq$ 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10 Hz, when duty cycle is no less than 98 percent. • VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT at Charge + Transmitting mode. Through Pre-scan, find the worst case of all modulations. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 2.9 for details
Test Results:	Pass


**Test Date**
11A 5180MHz

Horizontal:

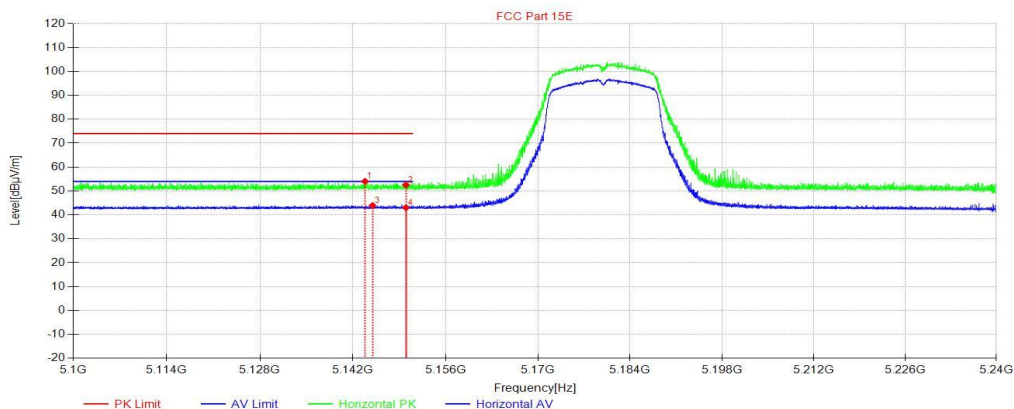

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	5143.84	49.01	4.99	54.00	74.00	20.00	150	142	PK
2	5150.01	47.48	5.01	52.49	74.00	21.51	150	269	PK
3	5144.97	38.90	5.00	43.90	54.00	10.10	150	177	AV
4	5150.01	37.98	5.01	42.99	54.00	11.01	150	36	AV


Vertical:

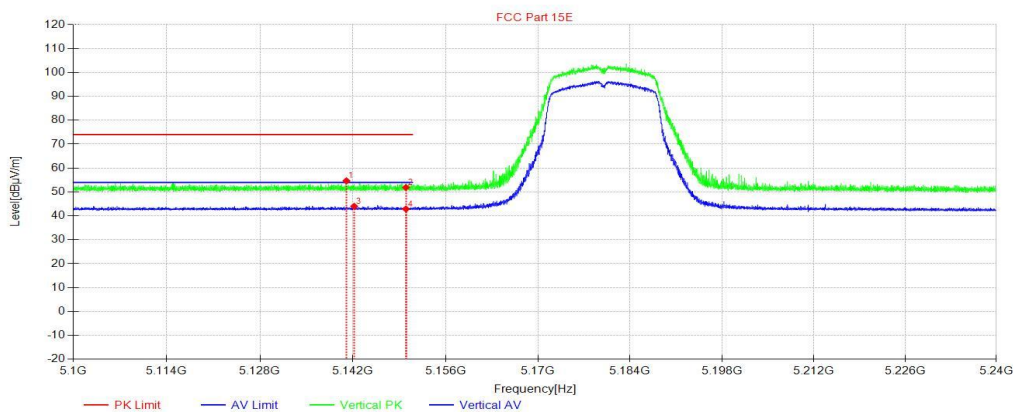

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	5141.04	49.68	4.98	54.66	74.00	19.34	150	85	PK
2	5150.01	46.86	5.01	51.87	74.00	22.13	150	61	PK
3	5142.20	39.02	4.98	44.00	54.00	10.00	150	218	AV
4	5150.01	37.85	5.01	42.86	54.00	11.14	150	218	AV


**11A 5240MHz**

Horizontal:

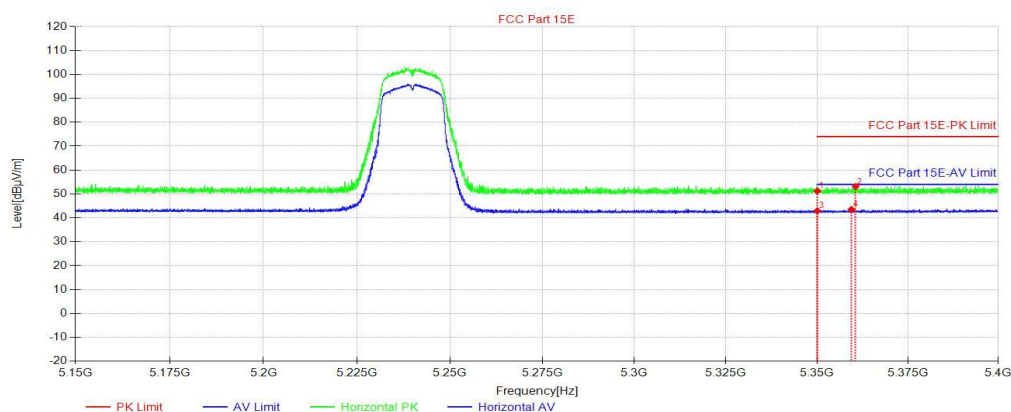

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	5350.02	46.08	5.15	51.23	74.00	22.77	150	356	PK
2	5360.57	47.99	5.13	53.12	74.00	20.88	150	0	PK
3	5350.02	37.78	5.15	42.93	54.00	11.07	150	234	AV
4	5359.42	38.41	5.13	43.54	54.00	10.46	150	131	AV

Vertical:

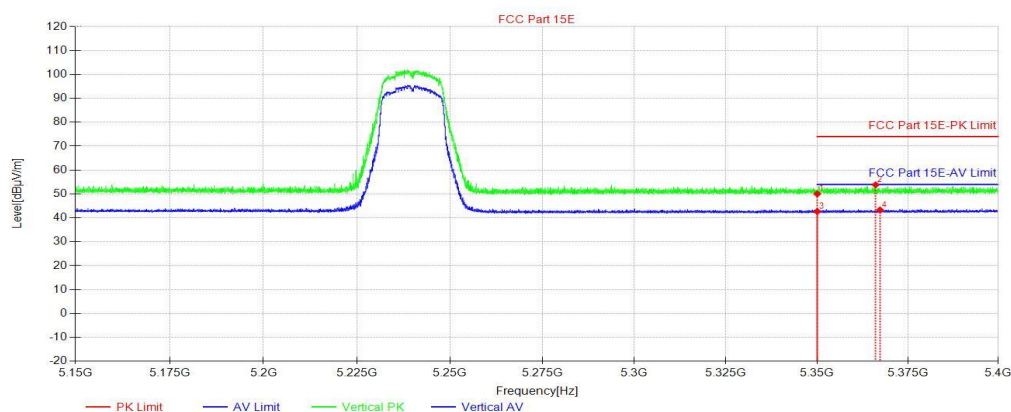


NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	5350.02	44.89	5.15	50.04	74.00	23.96	150	47	PK
2	5366.07	48.69	5.11	53.80	74.00	20.20	150	251	PK
3	5350.02	37.54	5.15	42.69	54.00	11.31	150	206	AV
4	5367.30	38.19	5.11	43.30	54.00	10.70	150	251	AV




5.8G 11A 5745MHz

Horizontal:

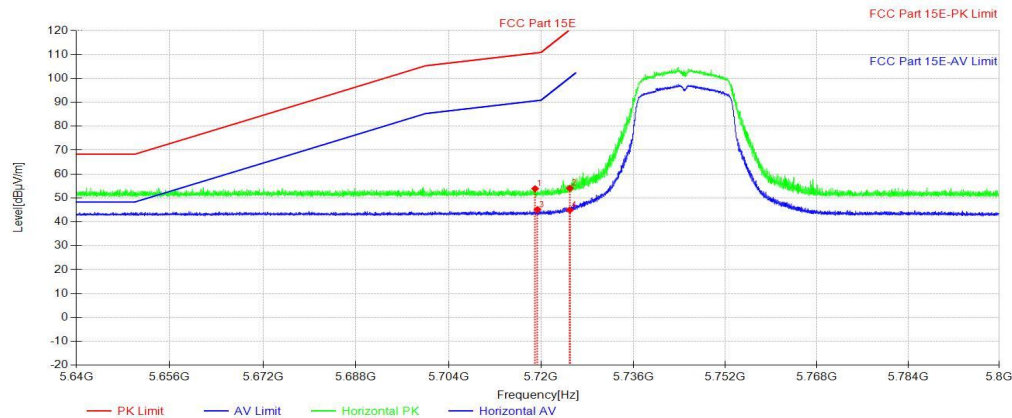

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	5718.97	48.68	5.20	53.88	110.61	56.73	150	187	PK
2	5725.00	48.85	5.21	54.06	120.40	66.34	150	175	PK
3	5719.38	39.96	5.20	45.16	90.73	45.57	150	187	AV
4	5725.00	39.73	5.21	44.94	100.40	55.46	150	187	AV


Vertical:

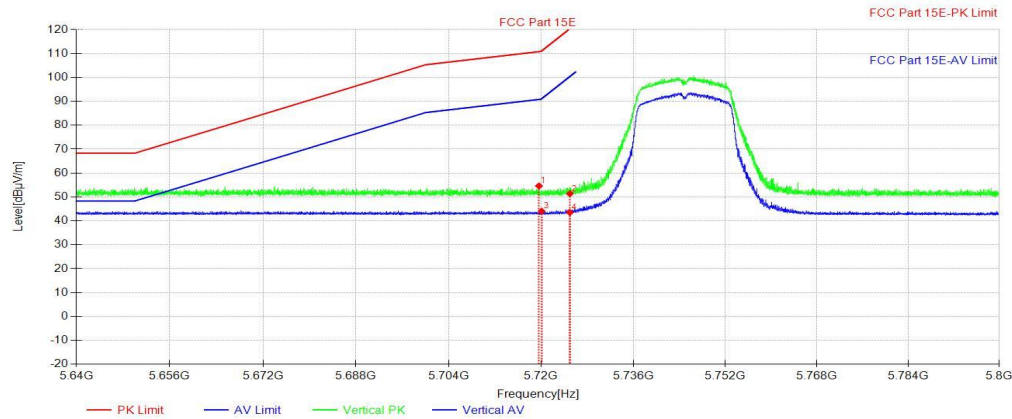

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	5719.64	49.40	5.20	54.60	110.80	56.20	150	360	PK
2	5725.00	46.17	5.21	51.38	120.40	69.02	150	219	PK
3	5720.10	38.86	5.20	44.06	91.10	47.04	150	229	AV
4	5725.00	38.31	5.21	43.52	100.40	56.88	150	64	AV


**5.8G 11A 5825MHz**

Horizontal:

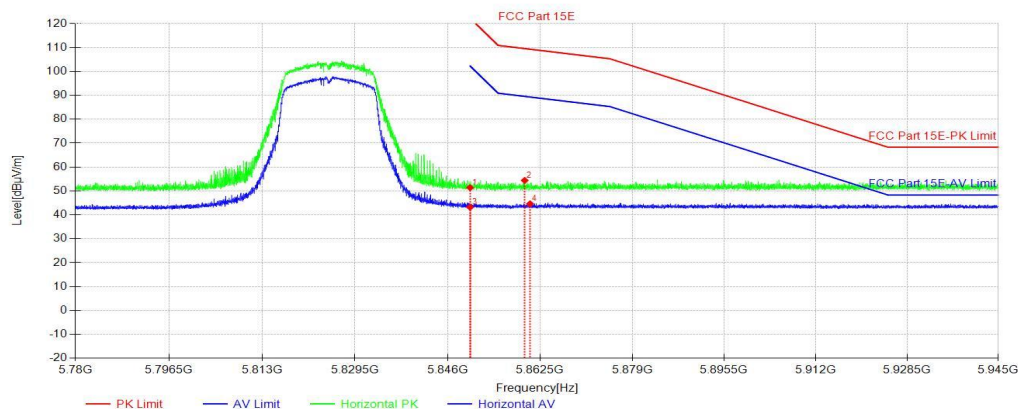

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	5850.00	45.89	5.50	51.39	122.30	70.91	150	129	PK
2	5859.75	48.89	5.52	54.41	109.57	55.16	150	176	PK
3	5850.00	37.70	5.50	43.20	102.30	59.10	150	202	AV
4	5860.71	39.08	5.53	44.61	89.30	44.69	150	176	AV

Vertical:

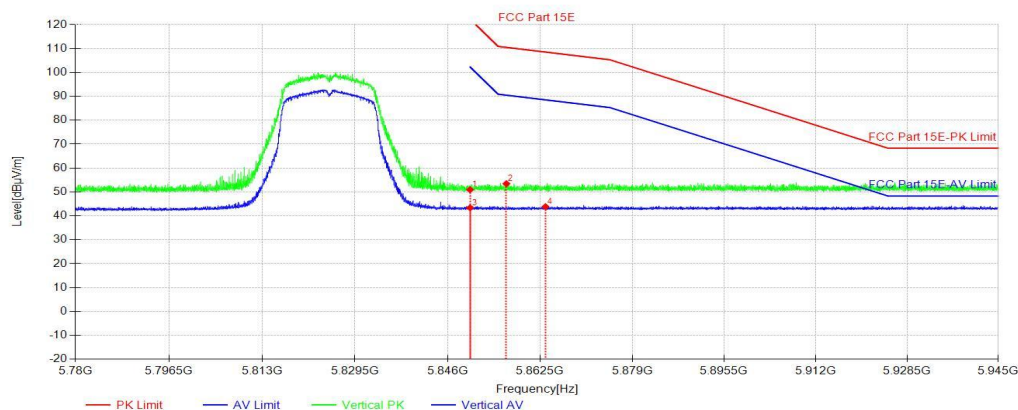

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	5850.00	45.43	5.50	50.93	122.30	71.37	150	295	PK
2	5856.49	47.93	5.52	53.45	110.48	57.03	150	226	PK
3	5850.00	37.87	5.50	43.37	102.30	58.93	150	178	AV
4	5863.47	38.31	5.52	43.83	88.53	44.70	150	200	AV


1. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including Ant.Factor and the Cable Factor etc.), The basic equation is as follows:

$$\text{Result Level} = \text{Reading Level} + \text{Correct Factor}(\text{including Ant.Factor, Cable Factor etc.})$$

2. All channels had been pre-test, 802.11A is the worst case, only the worst case was reported.



3.10 AC Power Line Conducted Emissions

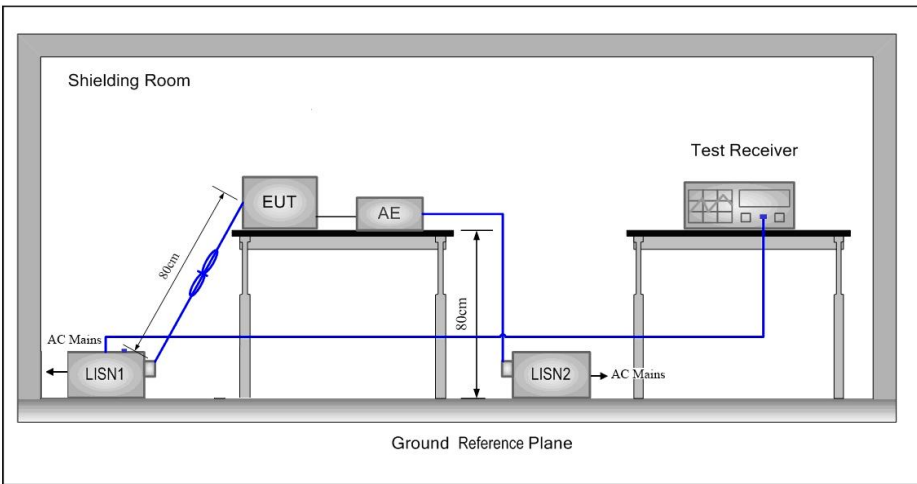Test Requirement:	47 CFR Part 15 Section 15.407(b)		
Test Method:	ANSI C63.10: 2020		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	* Decreases with the logarithm of the frequency.		
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 2013 on conducted measurement.		
Test Setup:			
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.		




	Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the 6.5Mbps of rate of 802.11n(HT20) at lowest channel is the worst case. Charge + Transmitting mode. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 2.9 for details
Test Results:	Pass

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live Line:

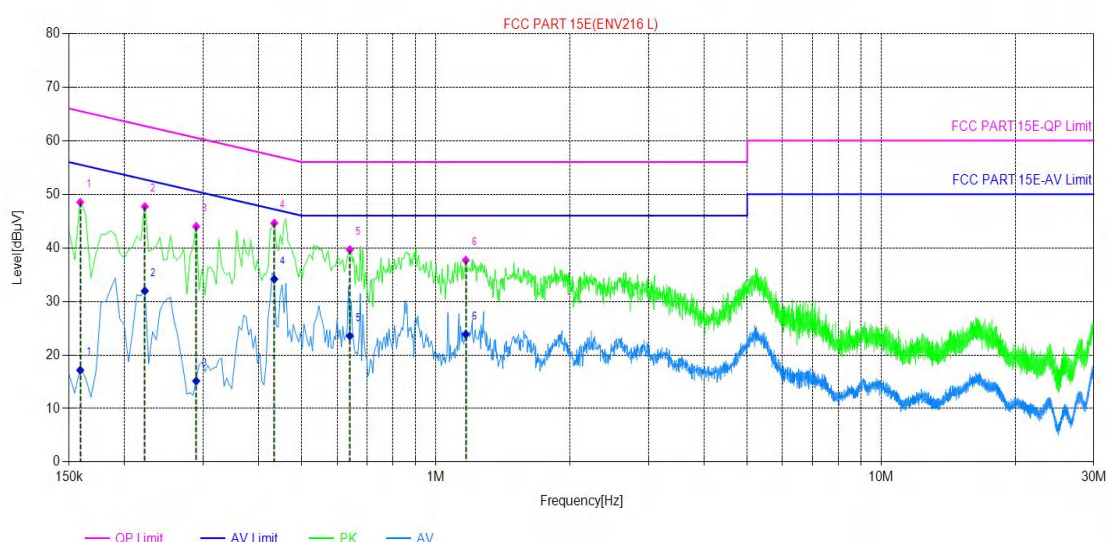


Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.159	9.90	48.51	65.52	17.01	17.16	55.52	38.36	PASS
2	0.222	9.92	47.69	62.74	15.05	31.95	52.74	20.79	PASS
3	0.2895	9.90	43.98	60.54	16.56	15.13	50.54	35.41	PASS
4	0.4335	9.80	44.60	57.19	12.59	34.16	47.19	13.03	PASS
5	0.6405	9.79	39.66	56.00	16.34	23.56	46.00	22.44	PASS
6	1.167	9.72	37.67	56.00	18.33	23.86	46.00	22.14	PASS



Neutral Line:

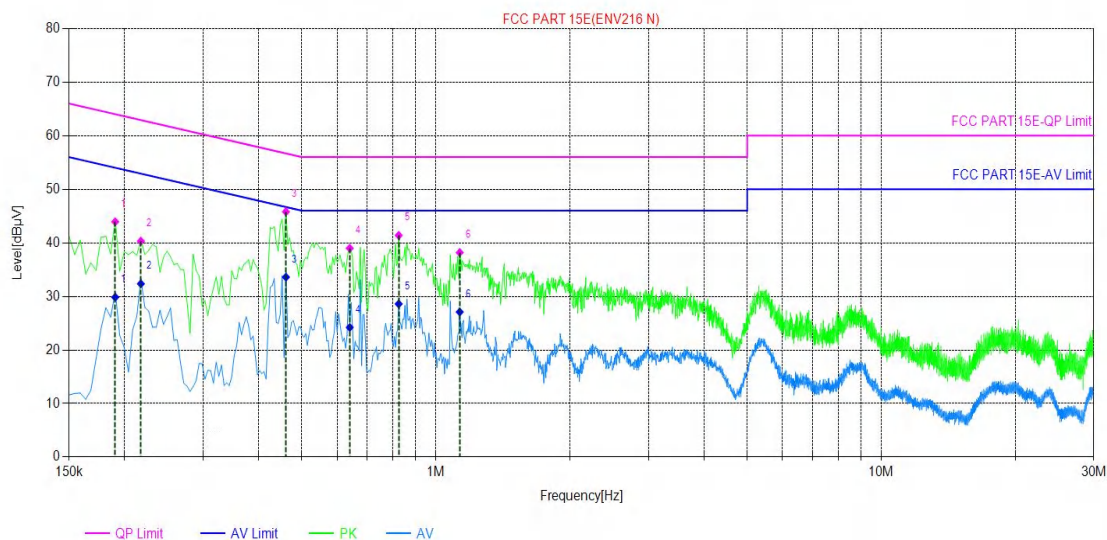

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1905	9.85	43.93	64.01	20.08	29.84	54.01	24.17	PASS
2	0.2175	9.87	40.31	62.91	22.60	32.35	52.91	20.56	PASS
3	0.4605	9.77	45.80	56.68	10.88	33.60	46.68	13.08	PASS
4	0.6405	9.81	38.98	56.00	17.02	24.21	46.00	21.79	PASS
5	0.825	9.79	41.39	56.00	14.61	28.59	46.00	17.41	PASS
6	1.131	9.70	38.18	56.00	17.82	27.09	46.00	18.91	PASS

Remark:

1. The 802.11A is the worse case.
2. The following Quasi-Peak and Average measurements were performed on the EUT:
3. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including LISN Factor and the Cable Factor etc.), The basic equation is as follows:

Result Level= Reading Level + Correct Factor(including LISN Factor, Cable Factor etc.)



4 Appendix

Appendix A: Duty Cycle


Test Result

TestMode	Antenna	Freq(MHz)	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
11A	Ant1	5180	1.40	1.59	88.05	---	---
		5200	1.40	1.59	88.05	---	---
		5240	1.41	1.59	88.68	---	---
		5745	1.41	1.61	87.58	---	---
		5785	1.41	1.63	86.50	---	---
		5825	1.40	1.63	85.89	---	---
11N20SISO	Ant1	5180	1.32	2.02	65.35	---	---
		5200	1.32	1.50	88.00	---	---
		5240	1.32	1.42	92.96	---	---
		5745	1.31	1.54	85.06	---	---
		5785	1.31	1.43	91.61	---	---
		5825	1.32	1.55	85.16	---	---
11N40SISO	Ant1	5190	0.65	0.82	79.27	---	---
		5230	0.65	0.85	76.47	---	---
		5755	0.66	0.86	76.74	---	---
		5795	0.65	0.75	86.67	---	---




Test Graphs


11A Ant1 5180

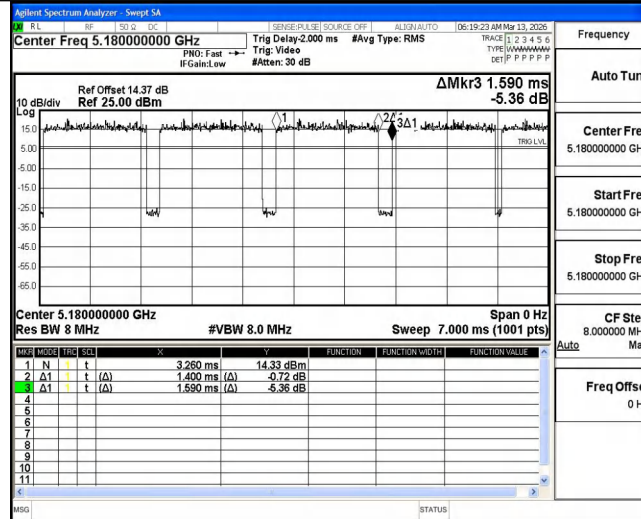

11A Ant1 5200

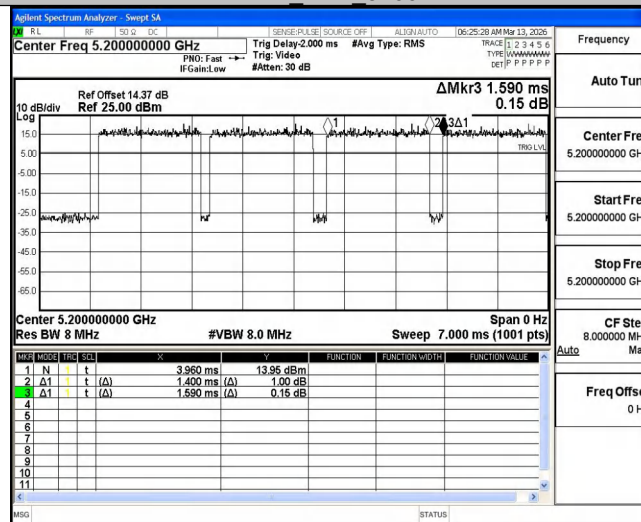


11A Ant1 5240

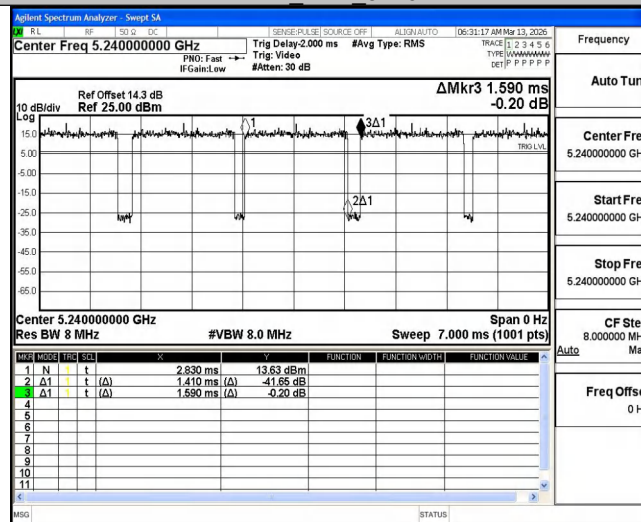





11A Ant1 5745

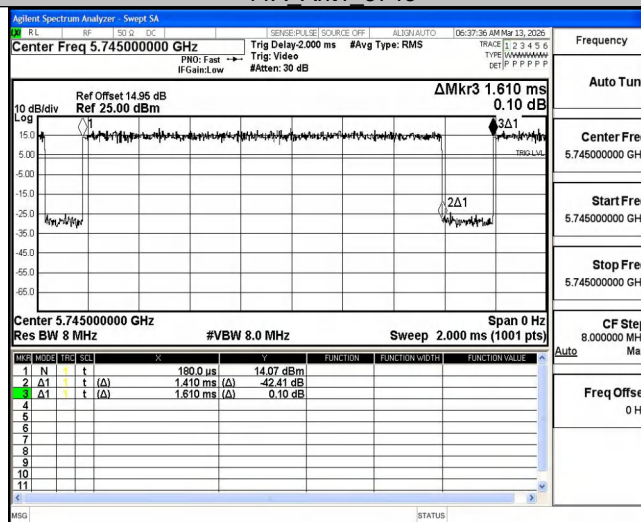

11A Ant1 5785

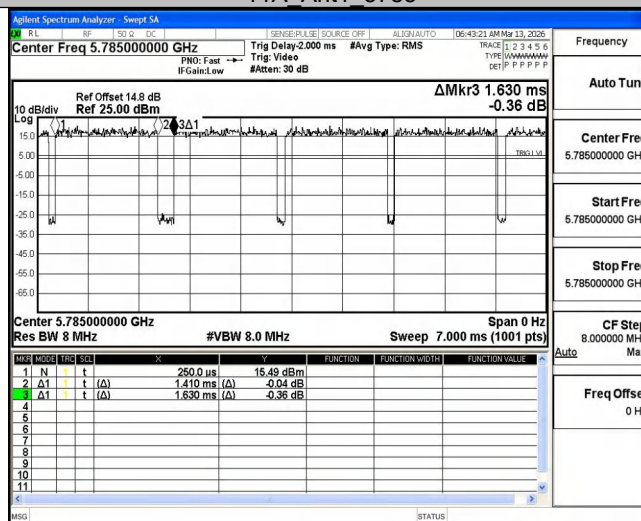


11A Ant1 5825

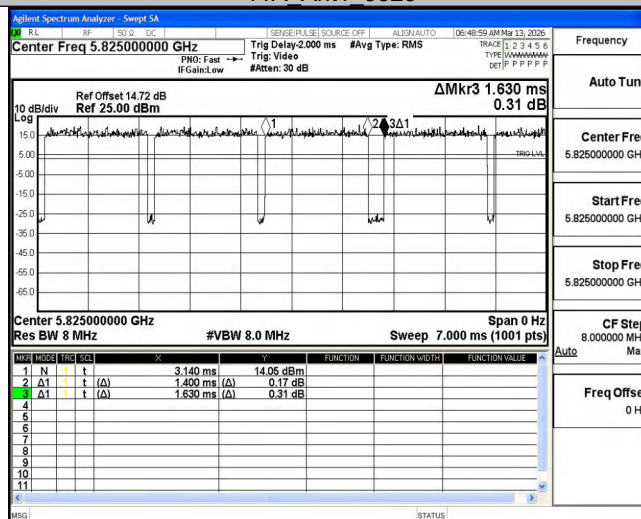





11N20SISO Ant1 5180

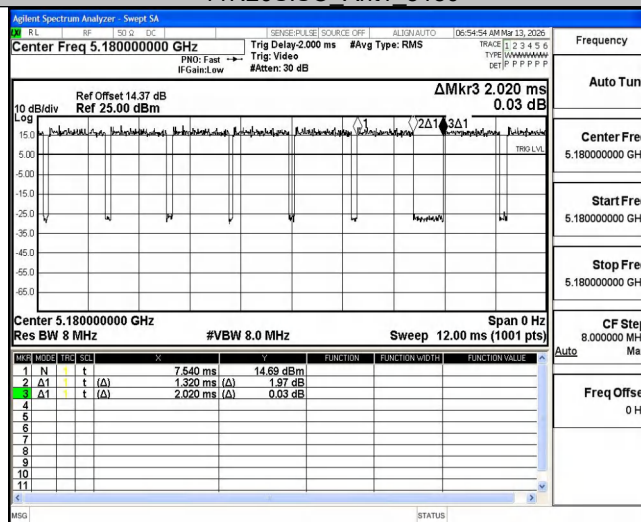

11N20SISO Ant1 5200

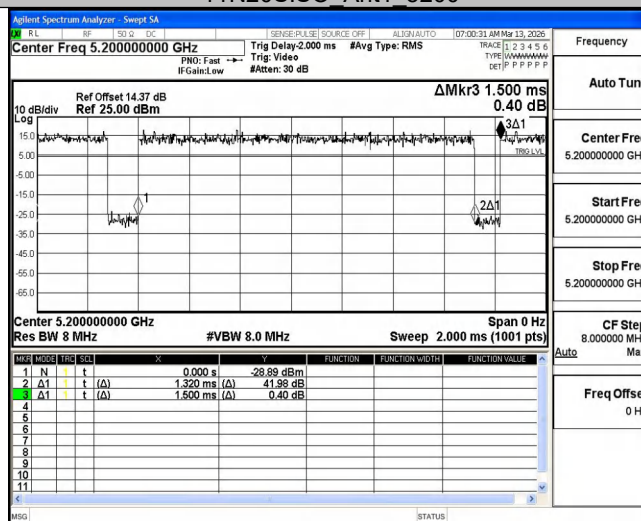


11N20SISO Ant1 5240

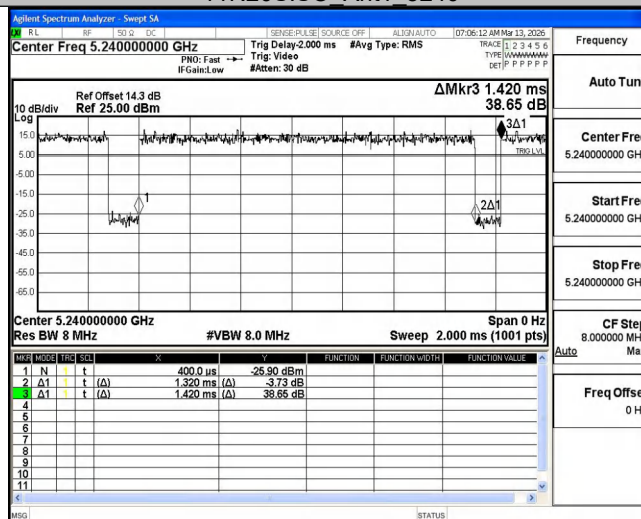





11N20SISO Ant1 5745

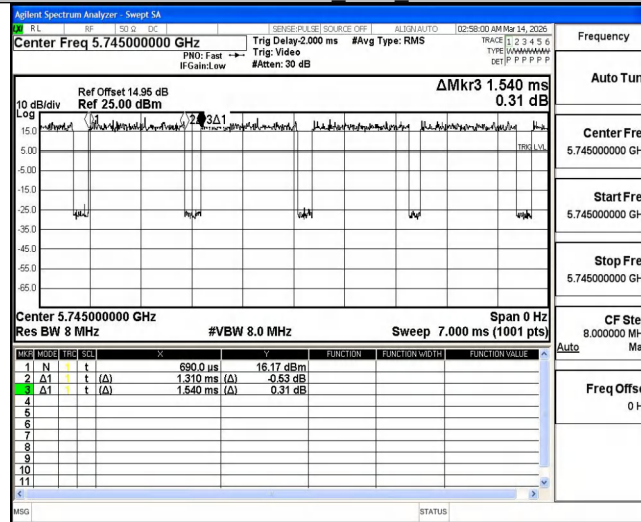

11N20SISO Ant1 5785

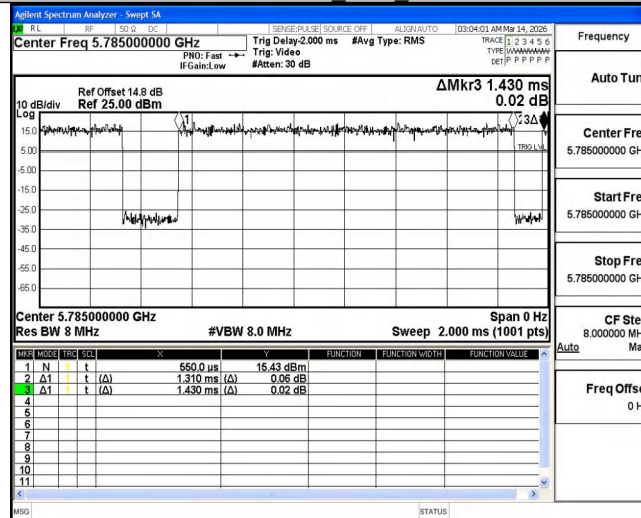


11N20SISO Ant1 5825

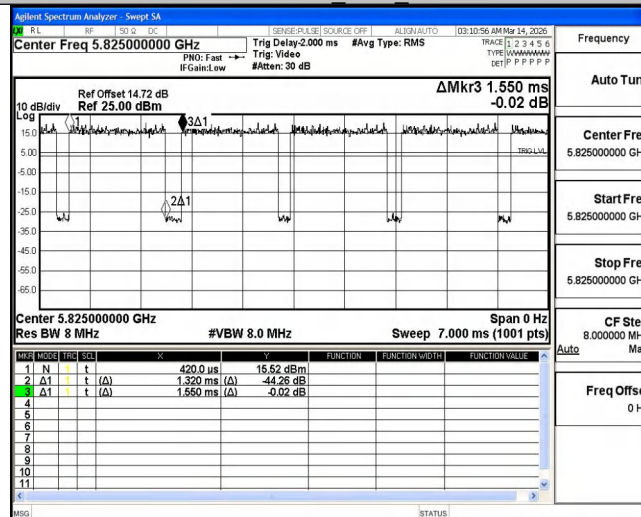





11N40SISO Ant1 5190

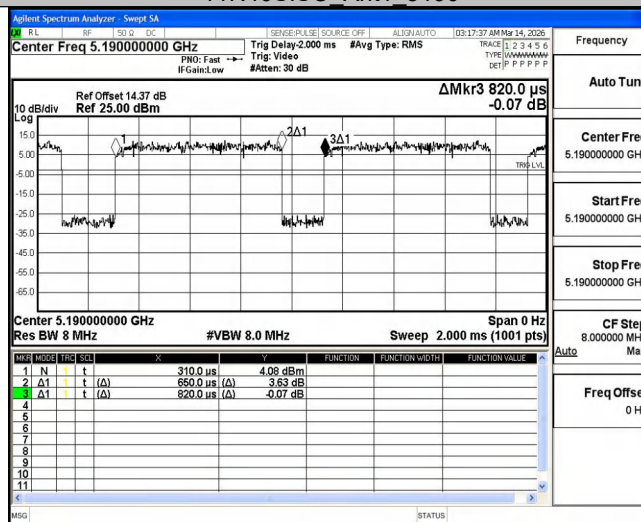

11N40SISO Ant1 5230

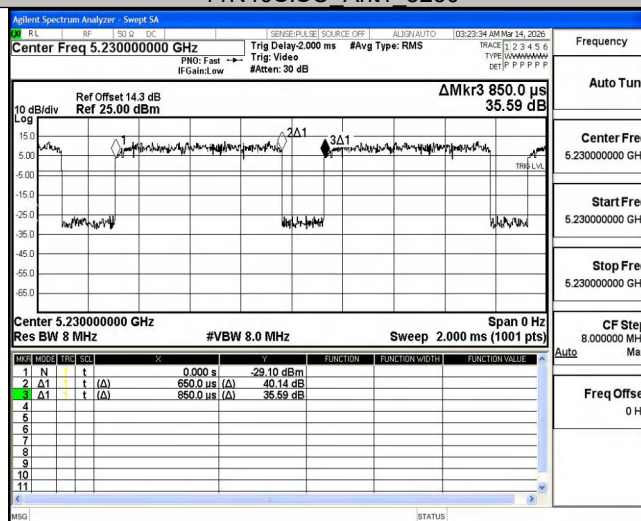


11N40SISO Ant1 5755

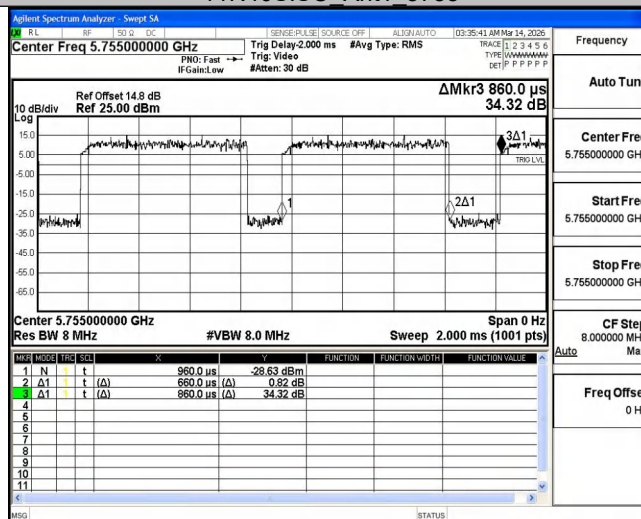



11N40SISO Ant1 5795

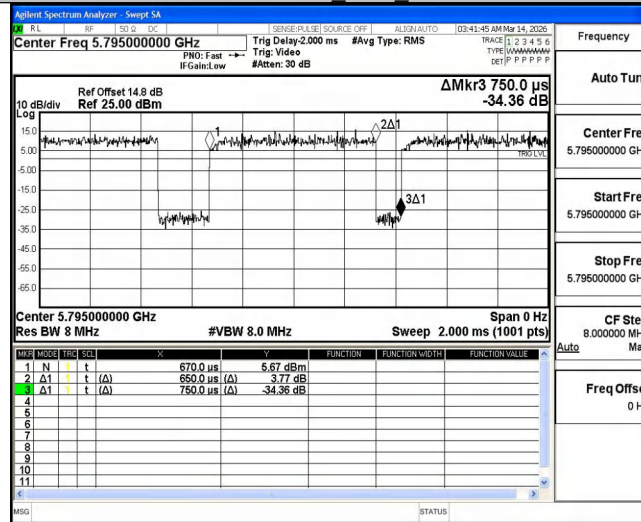

**Appendix B: 26dB Emission Bandwidth&6dB Emission Bandwidth****Test Result 26dB**

TestMode	Antenna	Freq(MHz)	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	19.360	5170.480	5189.840	---	---
		5200	19.480	5190.240	5209.720	---	---
		5240	19.040	5230.560	5249.600	---	---
11N20SISO	Ant1	5180	20.400	5169.680	5190.080	---	---
		5200	20.000	5190.120	5210.120	---	---
		5240	20.240	5230.040	5250.280	---	---
11N40SISO	Ant1	5190	37.920	5171.120	5209.040	---	---
		5230	38.160	5211.040	5249.200	---	---

Test Result 6dB

TestMode	Antenna	Freq(MHz)	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	13.480	5737.520	5751.000	0.5	PASS
		5785	12.560	5778.680	5791.240	0.5	PASS
		5825	12.640	5818.680	5831.320	0.5	PASS
11N20SISO	Ant1	5745	14.960	5737.480	5752.440	0.5	PASS
		5785	12.800	5779.760	5792.560	0.5	PASS
		5825	15.120	5817.440	5832.560	0.5	PASS
11N40SISO	Ant1	5755	31.280	5739.960	5771.240	0.5	PASS
		5795	33.680	5777.560	5811.240	0.5	PASS