



11b_TX_CH_01_Horizontal

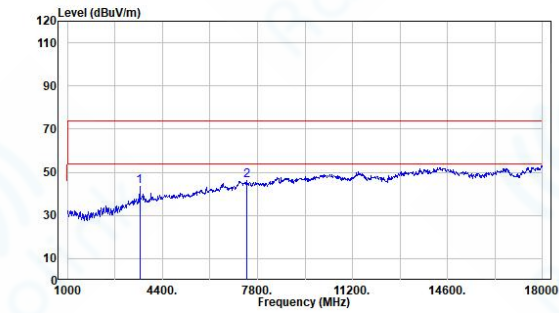

Site : chamber
Condition: 3m HORIZONTAL
EUT : K350R
Mode : WIFI 2.4G_11b_TX_CH1
Power : 22
Rate : 1M

	Read	Limit	Over	
Freq	Level	Level	Line	Limit Remark
MHz	dBuV	dBuV/m	dBuV/m	dB
1 3584.000	67.31	43.34	74.00	-30.66 Peak
2 7426.000	56.85	46.01	74.00	-27.99 Peak


11b_TX_CH_01_Vertical

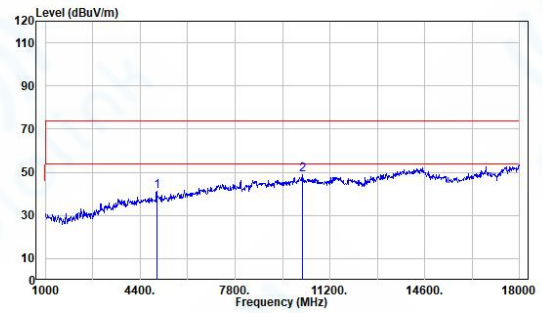

Site : chamber
Condition: 3m VERTICAL
EUT : K350R
Mode : WIFI 2.4G_11b_TX_CH1
Power : 22
Rate : 1M

	Read	Limit	Over	
Freq	Level	Level	Line	Limit Remark
MHz	dBuV	dBuV/m	dBuV/m	dB
1 4995.000	60.16	41.25	74.00	-32.75 Peak
2 10214.000	55.27	48.96	74.00	-25.04 Peak


11b_TX_CH_06_Horizontal

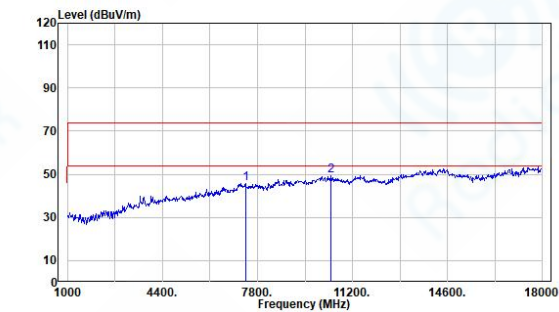

Site : chamber
Condition: 3m HORIZONTAL
EUT : K350R
Mode : WIFI 2.4G_11b_TX_CH6
Power : 22
Rate : 1M

	Read	Limit	Over	
Freq	Level	Level	Line	Limit Remark
MHz	dBuV	dBuV/m	dBuV/m	dB
1 7375.000	56.55	45.86	74.00	-28.14 Peak
2 10418.000	55.07	49.25	74.00	-24.75 Peak


11b_TX_CH_06_Vertical

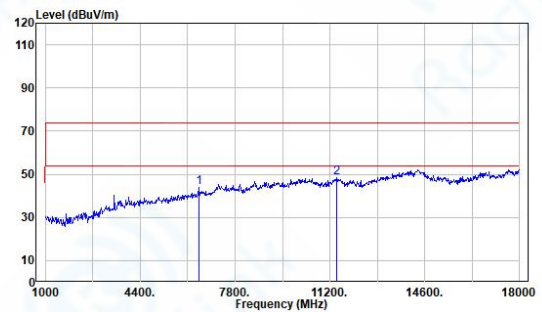

Site : chamber
Condition: 3m VERTICAL
EUT : K350R
Mode : WIFI 2.4G_11b_TX_CH6
Power : 22
Rate : 1M

	Read	Limit	Over	
Freq	Level	Level	Line	Limit Remark
MHz	dBuV	dBuV/m	dBuV/m	dB
1 6491.000	56.80	43.77	74.00	-30.23 Peak
2 11455.000	53.57	48.55	74.00	-25.45 Peak


11b_TX_CH_11_Horizontal

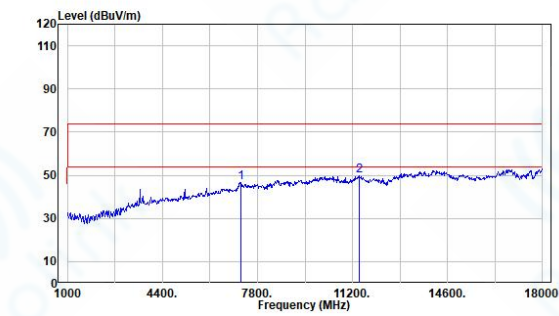

Site : chamber
Condition: 3m HORIZONTAL
EUT : K350R
Mode : WIFI 2.4G_11b_TX_CH11
Power : 22
Rate : 1M

	Read	Limit	Over	
Freq	Level	Level	Line	Limit Remark
MHz	dBuV	dBuV/m	dBuV/m	dB
1 7205.000	57.25	46.67	74.00	-27.33 Peak
2 11438.000	54.84	49.84	74.00	-24.16 Peak


11b_TX_CH_11_Vertical

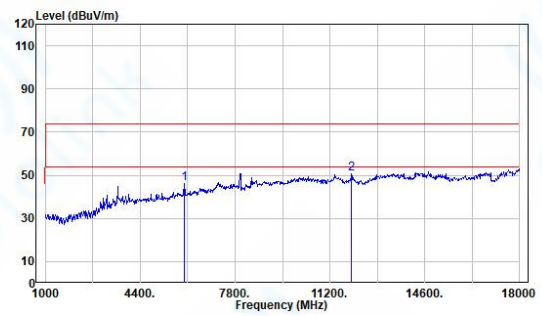

Site : chamber
Condition: 3m VERTICAL
EUT : K350R
Mode : WIFI 2.4G_11b_TX_CH11
Power : 22
Rate : 1M

	Read	Limit	Over	
Freq	Level	Level	Line	Limit Remark
MHz	dBuV	dBuV/m	dBuV/m	dB
1 5998.000	61.82	46.40	74.00	-27.60 Peak
2 11982.000	56.95	50.89	74.00	-23.11 Peak


11g_TX_CH_01_Horizontal

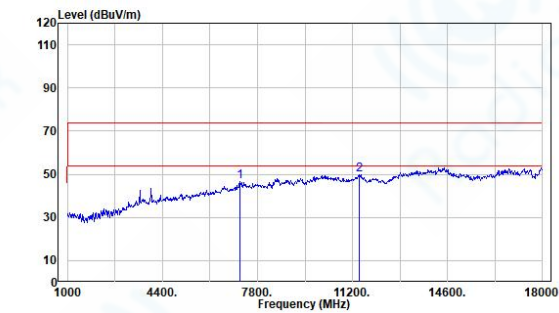

Site : chamber
Condition: 3m HORIZONTAL
EUT : K350R
Mode : WIFI 2.4G_11g_TX_CH1
Power : 18
Rate : 6M

	Read	Limit	Over	
Freq	Level	Level	Line	Limit Remark
MHz	dBuV	dBuV/m	dBuV/m	dB
1 7171.000	57.19	46.51	74.00	-27.49 Peak
2 11438.000	54.97	49.97	74.00	-24.03 Peak


11g_TX_CH_01_Vertical

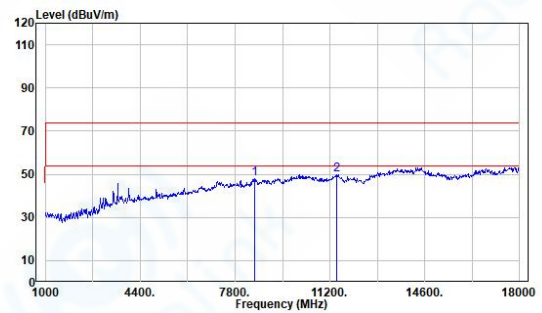

Site : chamber
Condition: 3m VERTICAL
EUT : K350R
Mode : WIFI 2.4G_11g_TX_CH1
Power : 18
Rate : 6M

	Read	Limit	Over	
Freq	Level	Level	Line	Limit Remark
MHz	dBuV	dBuV/m	dBuV/m	dB
1 8497.000	57.85	48.19	74.00	-25.81 Peak
2 11438.000	54.97	49.97	74.00	-24.03 Peak


11g_TX_CH_06_Horizontal

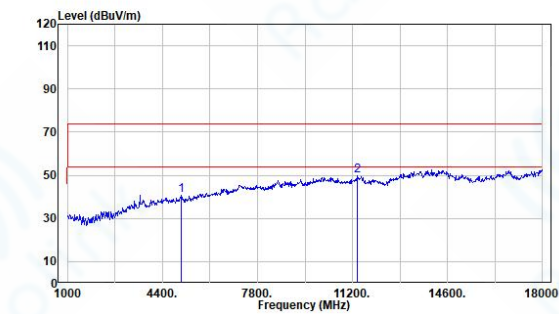

Site : chamber
Condition: 3m HORIZONTAL
EUT : K350R
Mode : WIFI 2.4G_11g_TX_CH6
Power : 22
Rate : 6M

	Read	Limit	Over	
Freq	Level	Level	Line	Limit Remark
MHz	dBuV	dBuV/m	dBuV/m	dB
1 5080.000	58.54	48.87	74.00	-33.13 Peak
2 11387.000	55.82	49.90	74.00	-24.10 Peak


11g_TX_CH_06_Vertical

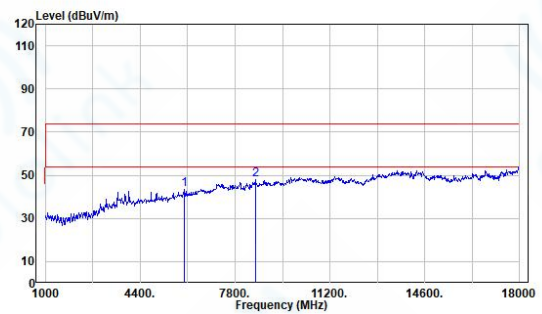

Site : chamber
Condition: 3m VERTICAL
EUT : K350R
Mode : WIFI 2.4G_11g_TX_CH6
Power : 22
Rate : 6M

	Read	Limit	Over	
Freq	Level	Level	Line	Limit Remark
MHz	dBuV	dBuV/m	dBuV/m	dB
1 5998.000	59.84	43.62	74.00	-30.38 Peak
2 8531.000	57.41	47.85	74.00	-26.15 Peak


11g_TX_CH_11_Horizontal

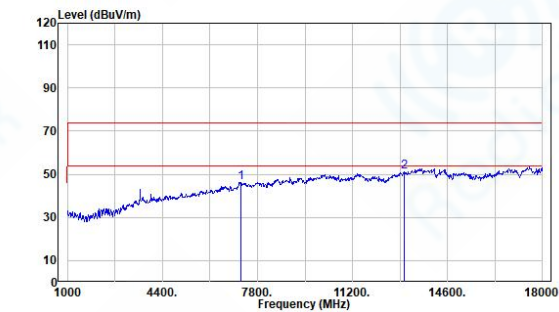

Site : chamber
Condition: 3m HORIZONTAL
EUT : K350R
Mode : WIFI 2.4G_11g_TX_CH11
Power : 22
Rate : 6M

	Read	Limit	Over	
Freq	Level	Level	Line	Limit Remark
MHz	dBuV	dBuV/m	dBuV/m	dB
1 7205.000	56.94	46.36	74.00	-27.64 Peak
2 13053.000	54.82	51.08	74.00	-22.92 Peak

11g_TX_CH_11_Vertical

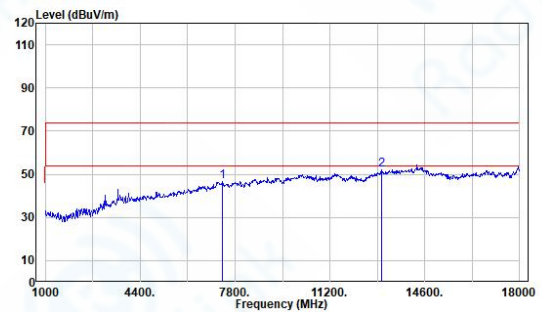


Site : chamber
Condition: 3m VERTICAL
EUT : K350R
Mode : WIFI 2.4G_11g_TX_CH11
Power : 22
Rate : 6M

	Read	Limit	Over	
Freq	Level	Level	Line	Limit Remark
MHz	dBuV	dBuV/m	dBuV/m	dB
1 7358.000	56.95	46.66	74.00	-27.34 Peak
2 13070.000	55.84	52.13	74.00	-21.87 Peak




11n20_TX_CH_01_Horizontal

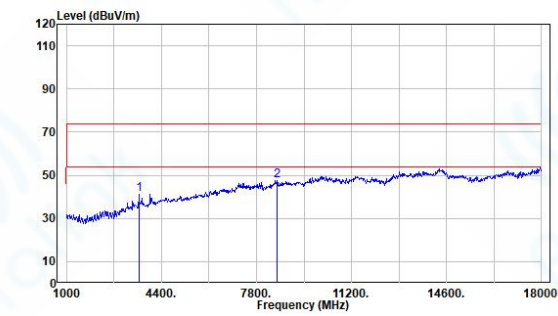

Site : chamber
Condition: 3m HORIZONTAL
EUT : K350R
Mode : WIFI 2.4G_11n20_TX_CH1
Power : 15
Rate : MCS0

	Freq	Read Level	Level	Limit	Over	Remark
	MHz	dBuV	dBuV/m	dBuV/m	dB	
1	3601.000	64.70	41.22	74.00	-32.78	Peak
2	8548.000	57.22	47.72	74.00	-26.28	Peak


11n20_TX_CH_01_Vertical

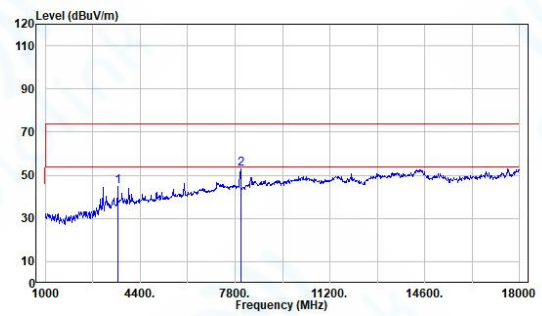

Site : chamber
Condition: 3m VERTICAL
EUT : K350R
Mode : WIFI 2.4G_11n20_TX_CH1
Power : 15
Rate : MCS0

	Freq	Read Level	Level	Limit	Over	Remark
	MHz	dBuV	dBuV/m	dBuV/m	dB	
1	3601.000	68.20	44.72	74.00	-29.28	Peak
2	8004.000	64.08	53.15	74.00	-20.85	Peak


11n20_TX_CH_06_Horizontal

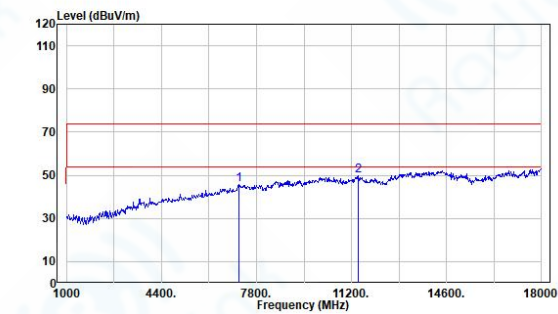

Site : chamber
Condition: 3m HORIZONTAL
EUT : K350R
Mode : WIFI 2.4G_11n20_TX_CH6
Power : 22
Rate : MCS0

	Freq	Read Level	Level	Limit	Over	Remark
	MHz	dBuV	dBuV/m	dBuV/m	dB	
1	7188.000	56.44	45.85	74.00	-28.15	Peak
2	11438.000	54.74	49.74	74.00	-24.26	Peak

11n20_TX_CH_06_Vertical

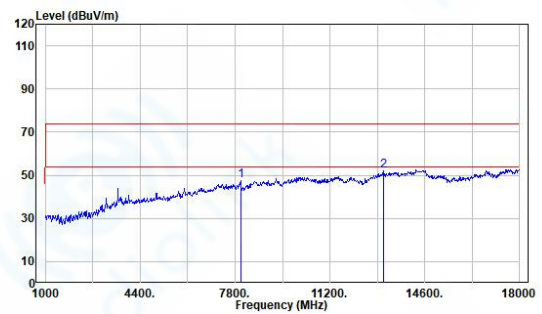

Site : chamber
Condition: 3m VERTICAL
EUT : K350R
Mode : WIFI 2.4G_11n20_TX_CH6
Power : 22
Rate : MCS0


	Freq	Read Level	Level	Limit	Over	Remark
	MHz	dBuV	dBuV/m	dBuV/m	dB	
1	8004.000	58.42	47.49	74.00	-26.51	Peak
2	13138.000	55.91	52.22	74.00	-21.78	Peak

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694


11n20_TX_CH_11_Horizontal

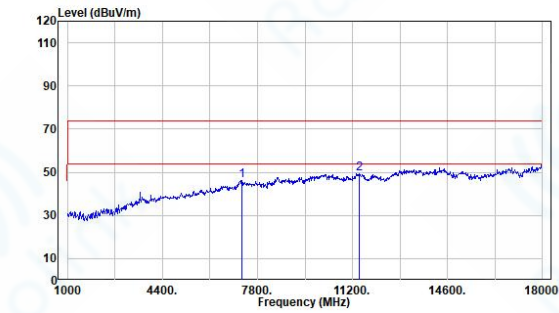

Site : chamber
Condition: 3m HORIZONTAL
EUT : K350R
Mode : WIFI 2.4G_11n20_TX_CH11
Power : 22
Rate : MCS0

	Read	Limit	Over	
Freq	Level	Level	Line	Limit Remark
MHz	dBuV	dBuV/m	dBuV/m	dB
1 7256.000	57.44	46.39	74.00	-27.61 Peak
2 11438.000	54.52	49.52	74.00	-24.48 Peak


11n20_TX_CH_11_Vertical

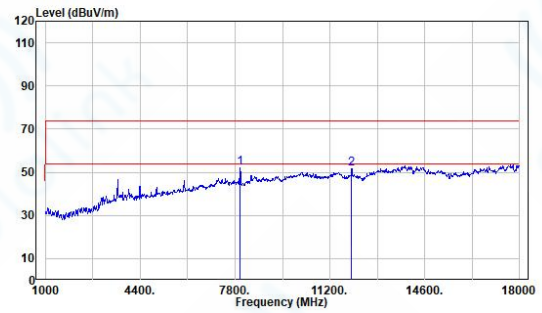

Site : chamber
Condition: 3m VERTICAL
EUT : K350R
Mode : WIFI 2.4G_11n20_TX_CH11
Power : 22
Rate : MCS0

	Read	Limit	Over	
Freq	Level	Level	Line	Limit Remark
MHz	dBuV	dBuV/m	dBuV/m	dB
1 7987.000	62.89	51.99	74.00	-22.01 Peak
2 11982.000	57.67	51.61	74.00	-22.39 Peak


11n40_TX_CH_03_Horizontal

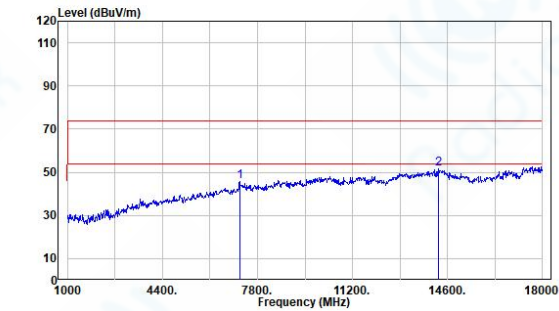

Site : chamber
Condition: 3m HORIZONTAL
EUT : K350R
Mode : WIFI 2.4G_11n40_TX_CH3
Power : 13
Rate : MCS0

	Read	Limit	Over	
Freq	Level	Level	Line	Limit Remark
MHz	dBuV	dBuV/m	dBuV/m	dB
1 7171.000	56.29	45.61	74.00	-28.39 Peak
2 14277.000	51.94	51.56	74.00	-22.44 Peak


11n40_TX_CH_03_Vertical

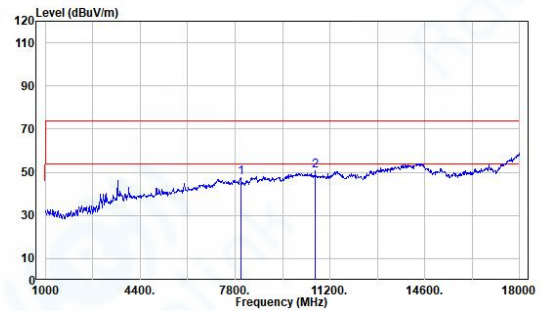

Site : chamber
Condition: 3m VERTICAL
EUT : K350R
Mode : WIFI 2.4G_11n40_TX_CH3
Power : 13
Rate : MCS0

	Read	Limit	Over	
Freq	Level	Level	Line	Limit Remark
MHz	dBuV	dBuV/m	dBuV/m	dB
1 8004.000	58.27	47.34	74.00	-26.66 Peak
2 10673.000	56.75	50.71	74.00	-23.29 Peak


11n40_TX_CH_06_Horizontal

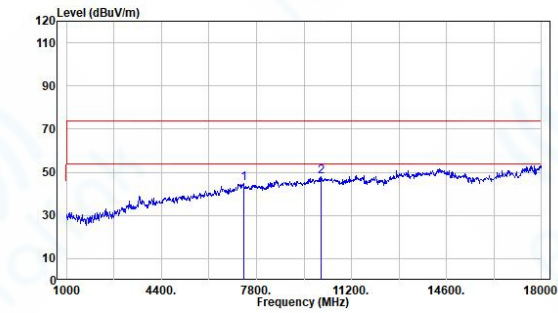

Site : chamber
Condition: 3m HORIZONTAL
EUT : K350R
Mode : WIFI 2.4G_11n40_TX_CH6
Power : 22
Rate : MCS0

	Freq	Read Level	Level	Limit	Over	Remark
	MHz	dBuV	dBuV/m	dBuV/m	dB	
1	7341.000	55.07	44.73	74.00	-29.27	Peak
2	10112.000	54.53	48.21	74.00	-25.79	Peak


11n40_TX_CH_06_Vertical

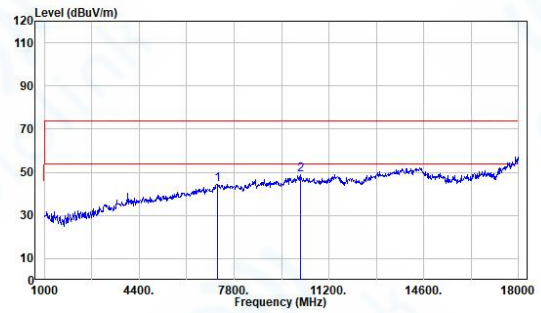

Site : chamber
Condition: 3m VERTICAL
EUT : K350R
Mode : WIFI 2.4G_11n40_TX_CH6
Power : 22
Rate : MCS0

	Freq	Read Level	Level	Limit	Over	Remark
	MHz	dBuV	dBuV/m	dBuV/m	dB	
1	7222.000	55.31	44.57	74.00	-29.43	Peak
2	10180.000	55.15	48.85	74.00	-25.15	Peak


11n40_TX_CH_09_Horizontal

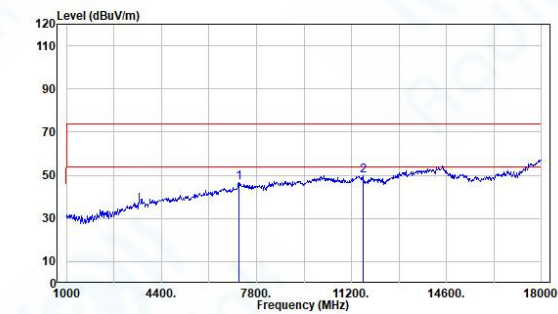

Site : chamber
Condition: 3m HORIZONTAL
EUT : K350R
Mode : WIFI 2.4G_11n40_TX_CH9
Power : 15
Rate : MCS0

	Freq	Read Level	Level	Limit	Over	Remark
	MHz	dBuV	dBuV/m	dBuV/m	dB	
1	7171.000	57.33	46.65	74.00	-27.35	Peak
2	11608.000	55.19	50.02	74.00	-23.98	Peak


11n40_TX_CH_09_Vertical

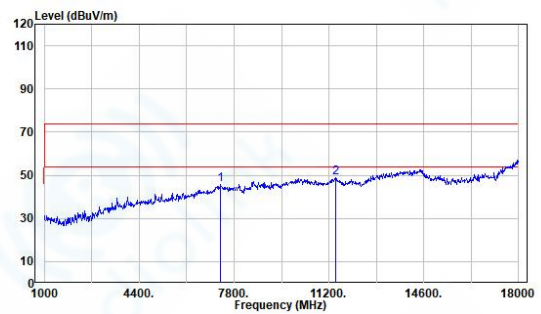

Site : chamber
Condition: 3m VERTICAL
EUT : K350R
Mode : WIFI 2.4G_11n40_TX_CH9
Power : 15
Rate : MCS0

	Freq	Read Level	Level	Limit	Over	Remark
	MHz	dBuV	dBuV/m	dBuV/m	dB	
1	7324.000	56.72	45.91	74.00	-28.09	Peak
2	11438.000	53.83	48.83	74.00	-25.17	Peak

18~25G

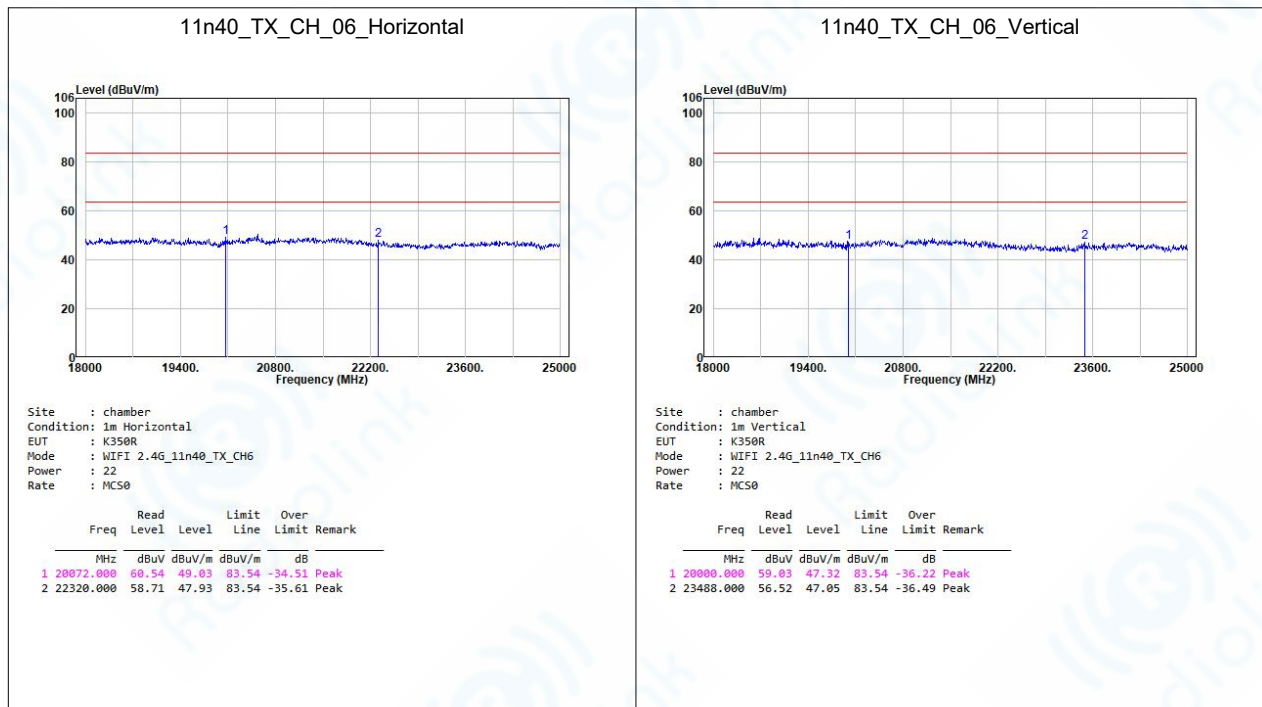

Note:

1. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor (maybe including Ant.Factor and the Cable Factor etc.). The basic equation is as follows:

Result Level= Reading Level + Correct Factor (including Ant.Factor, Cable Factor etc.)

2. Radiated spurious emissions at 18-25 GHz were measured at 1 m distance inside the chamber due to test configuration. The regulatory limit (74/54 dBuV/m @ 3 m) was extrapolated to 1 m using $20\log_{10}(3/1) = +9.54$ dB, resulting in 83.54 dBuV/m (Peak) and 63.54 dBuV/m (Avg) at 1 m. Background noise was sufficiently low at this 1 m setup.

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

7.5 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method: ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024
Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.5.1 E.U.T. Operation


Operating Environment:

Temperature: 22.2 °C Humidity: 40.0 % RH Atmospheric Pressure: 1020 mbar

7.5.2 Test Mode Description

Mode Code	Description
1	TX mode_Keep the EUT in continuously transmitting mode.

7.5.3 Test Setup Diagram

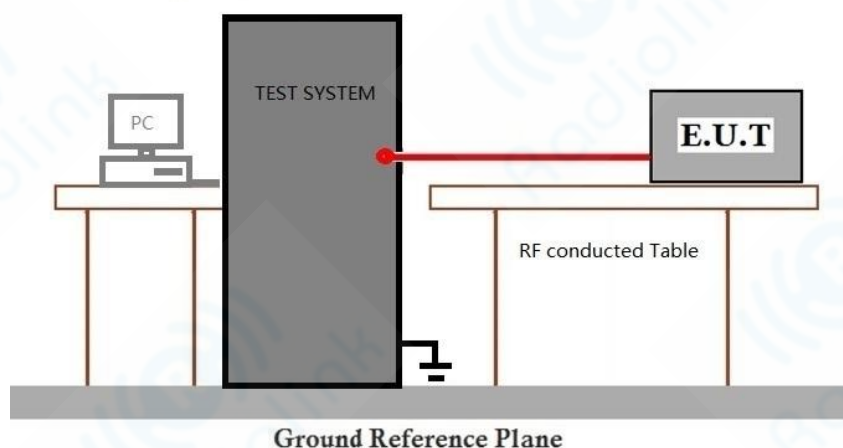

7.5.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details



7.6 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
Test Method: ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 Section 11.8.1

Limit:
 $\geq 500 \text{ kHz}$


7.6.1 E.U.T. Operation

Operating Environment:
Temperature: 22.2 °C Humidity: 40.0 % RH Atmospheric Pressure: 1020 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode_Keep the EUT in continuously transmitting mode.

7.6.3 Test Setup Diagram

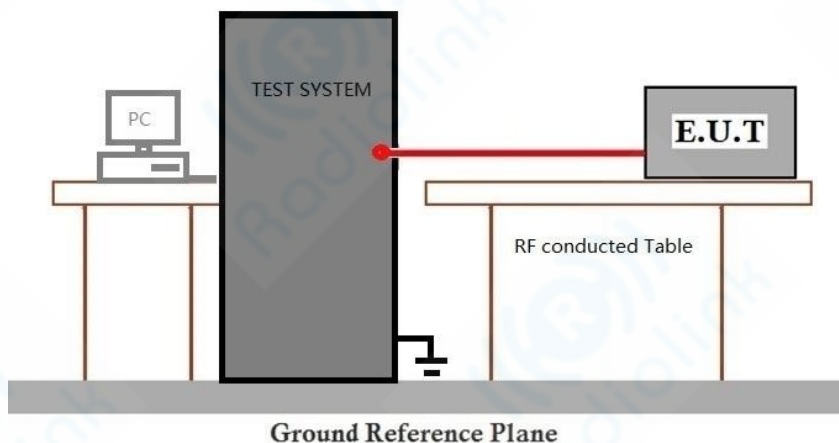

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 99% Bandwidth

Test Requirement N/A

Test Method: ANSI C63.10 (2013) Section 6.9.3

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 23.3 °C


Humidity: 46.5 % RH

Atmospheric Pressure: 1020 mbar

7.7.2 Test Mode Description

Mode Code	Description
1	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode.

7.7.3 Test Setup Diagram

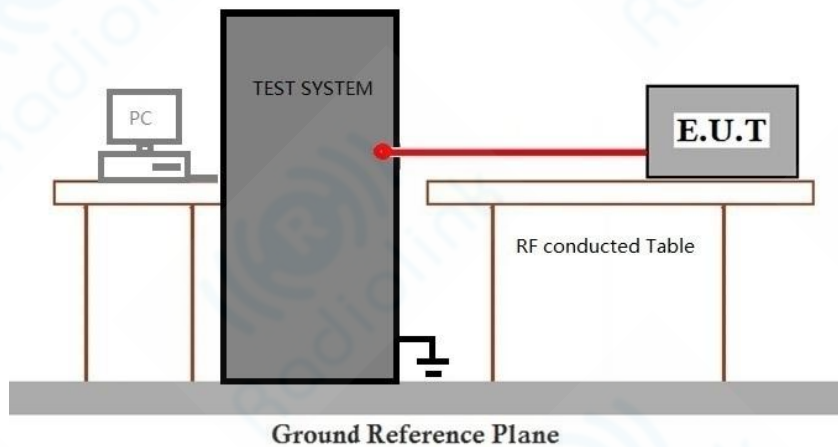

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

7.8 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)
Test Method: ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024
Section 11.10.2

Limit:

$\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission

7.8.1 E.U.T. Operation


Operating Environment:

Temperature: 22.2 °C Humidity: 40.0 % RH Atmospheric Pressure: 1020 mbar

7.8.2 Test Mode Description

Mode Code	Description
1	TX mode_Keep the EUT in continuously transmitting mode.

7.8.3 Test Setup Diagram

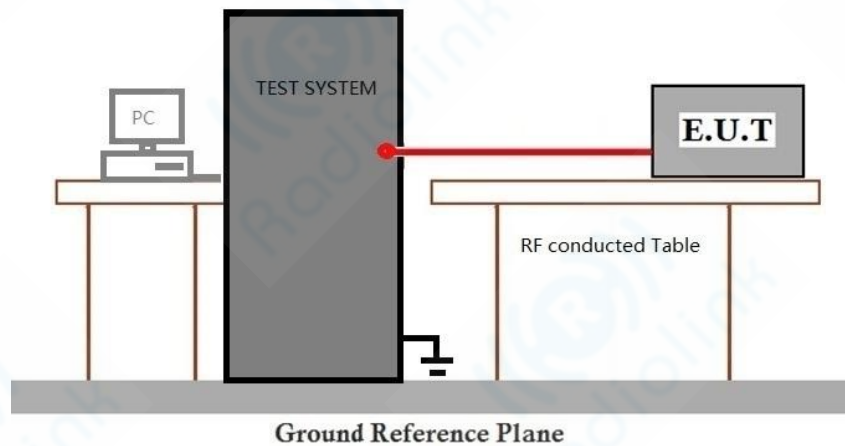

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.9 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024
Section 6.10.4

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 22.2 °C


Humidity: 40.0 % RH

Atmospheric Pressure: 1020 mbar

7.9.2 Test Mode Description

Mode Code	Description
1	TX mode_Keep the EUT in continuously transmitting mode.

7.9.3 Test Setup Diagram

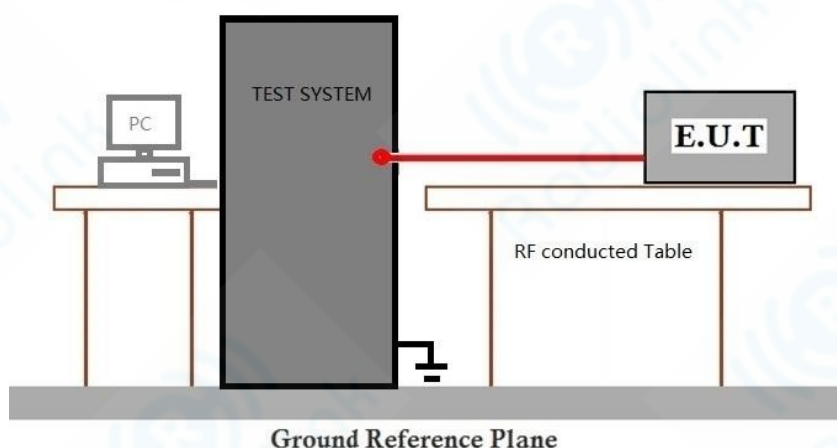

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

7.10 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 22.2 °C


Humidity: 40.0 % RH

Atmospheric Pressure: 1020 mbar

7.10.2 Test Mode Description

Mode Code	Description
1	TX mode_Keep the EUT in continuously transmitting mode.

7.10.3 Test Setup Diagram

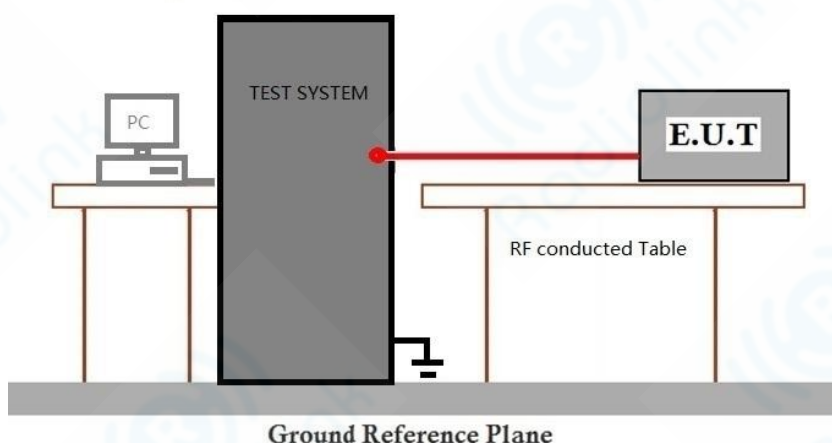

7.10.4 Measurement Procedure and Data

Please Refer to Appendix for Details

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

8 Test Setup Photo

Refer to Appendix A_Setup Photo (1.4)



9 Appendix

1. Duty Cycle

1.1 Test Result

1.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11b	SISO	2412	8.193	8.210	99.79	0.01	0.04
		2437	8.193	8.210	99.79	0.01	0.04
		2462	8.193	8.210	99.79	0.01	0.04
802.11g	SISO	2412	1.360	1.862	73.04	1.36	0.03
		2437	1.361	1.863	73.05	1.36	0.02
		2462	1.361	1.862	73.09	1.36	0.03
802.11n (HT20)	SISO	2412	1.273	1.774	71.76	1.44	0.03
		2437	1.272	1.774	71.70	1.44	0.03
		2462	1.273	1.775	71.72	1.44	0.03
802.11n (HT40)	SISO	2422	0.633	1.134	55.82	2.53	0.03
		2437	0.632	1.134	55.73	2.54	0.01
		2452	0.633	1.134	55.82	2.53	0.03




Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

1.2 Test Graph


1.2.1 Ant1

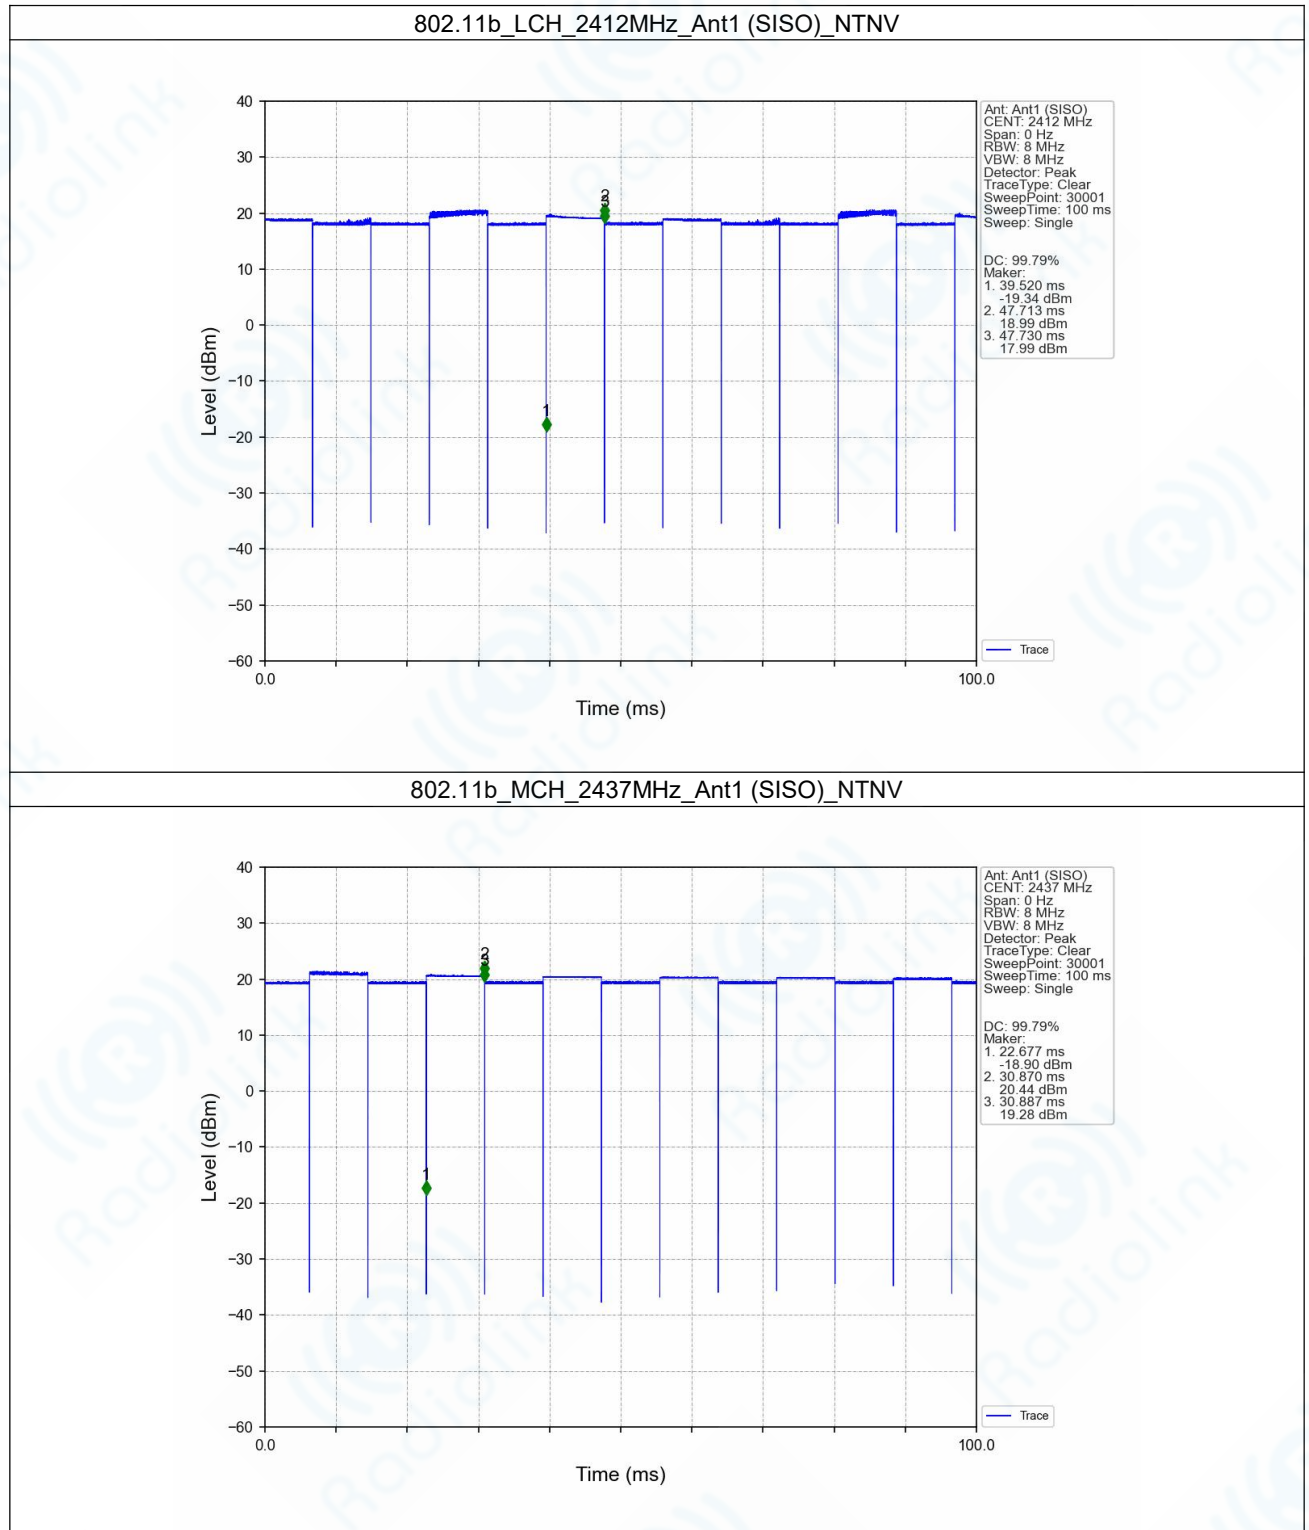



Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China


Tel: +86 0755 23080694

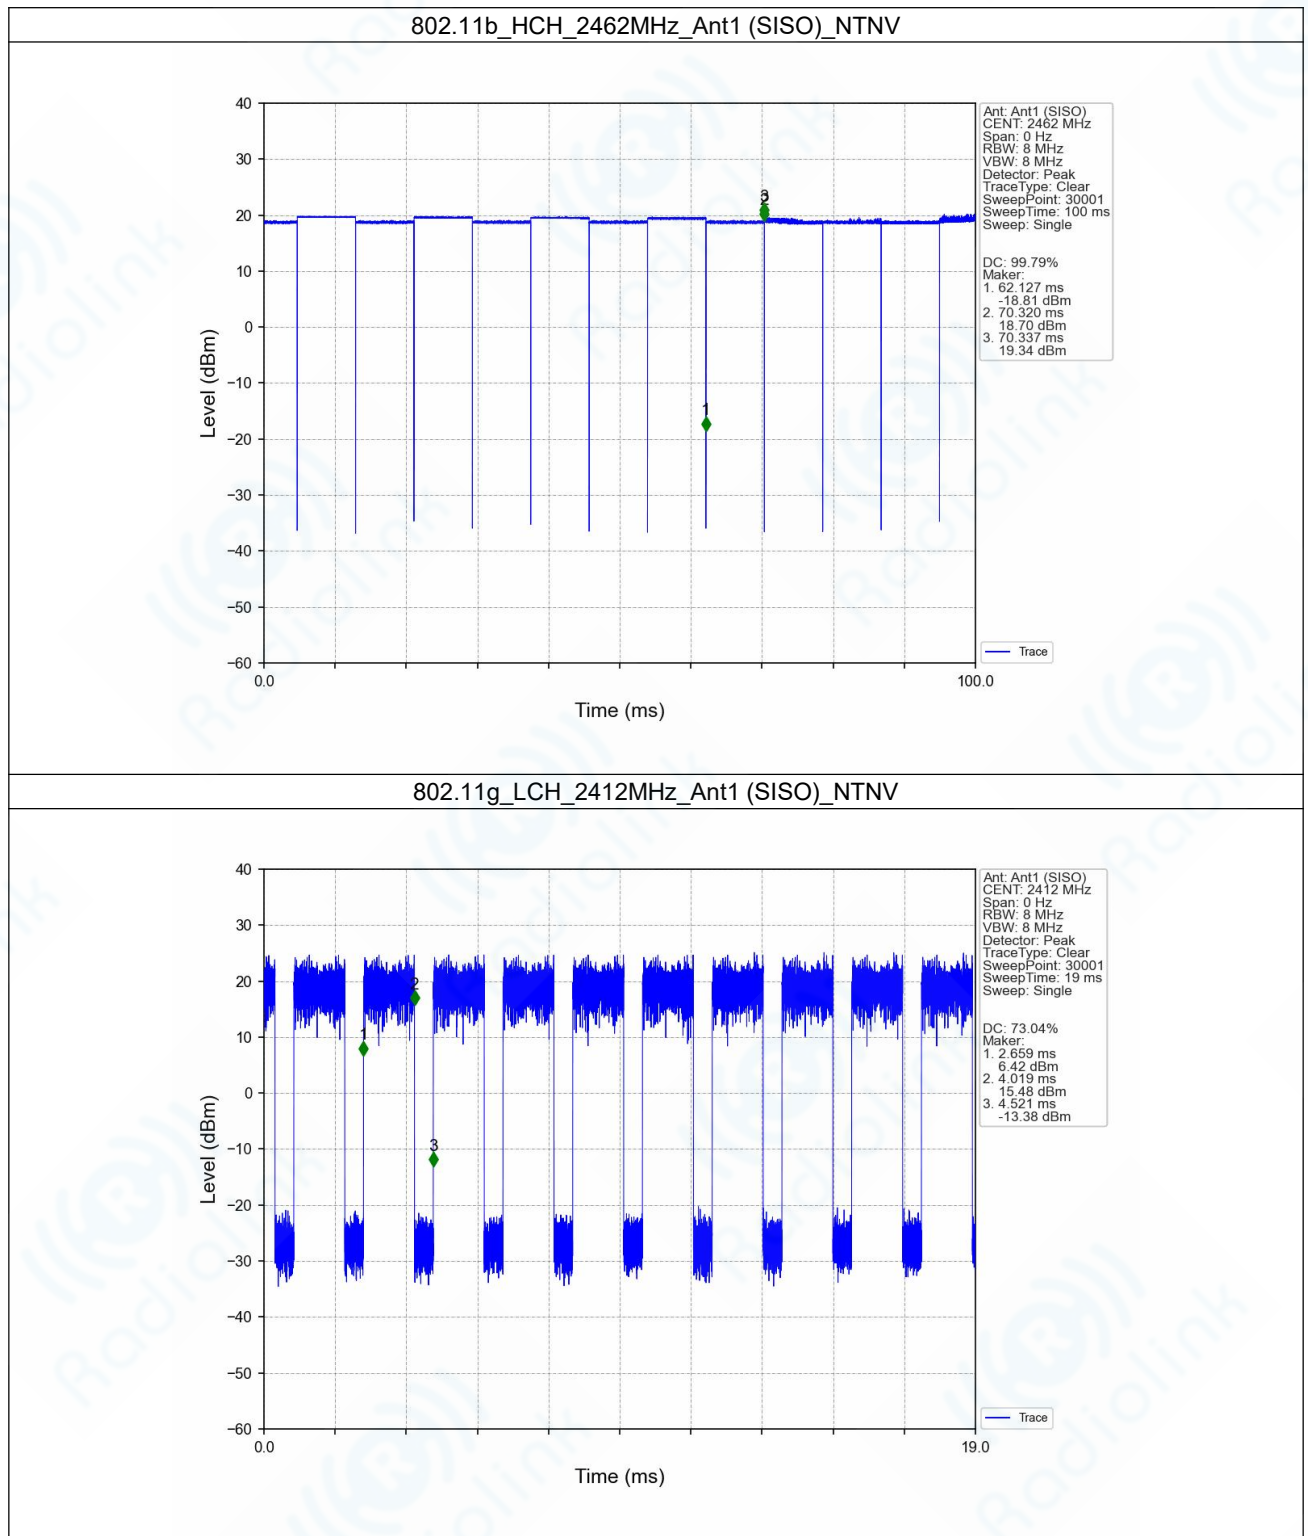

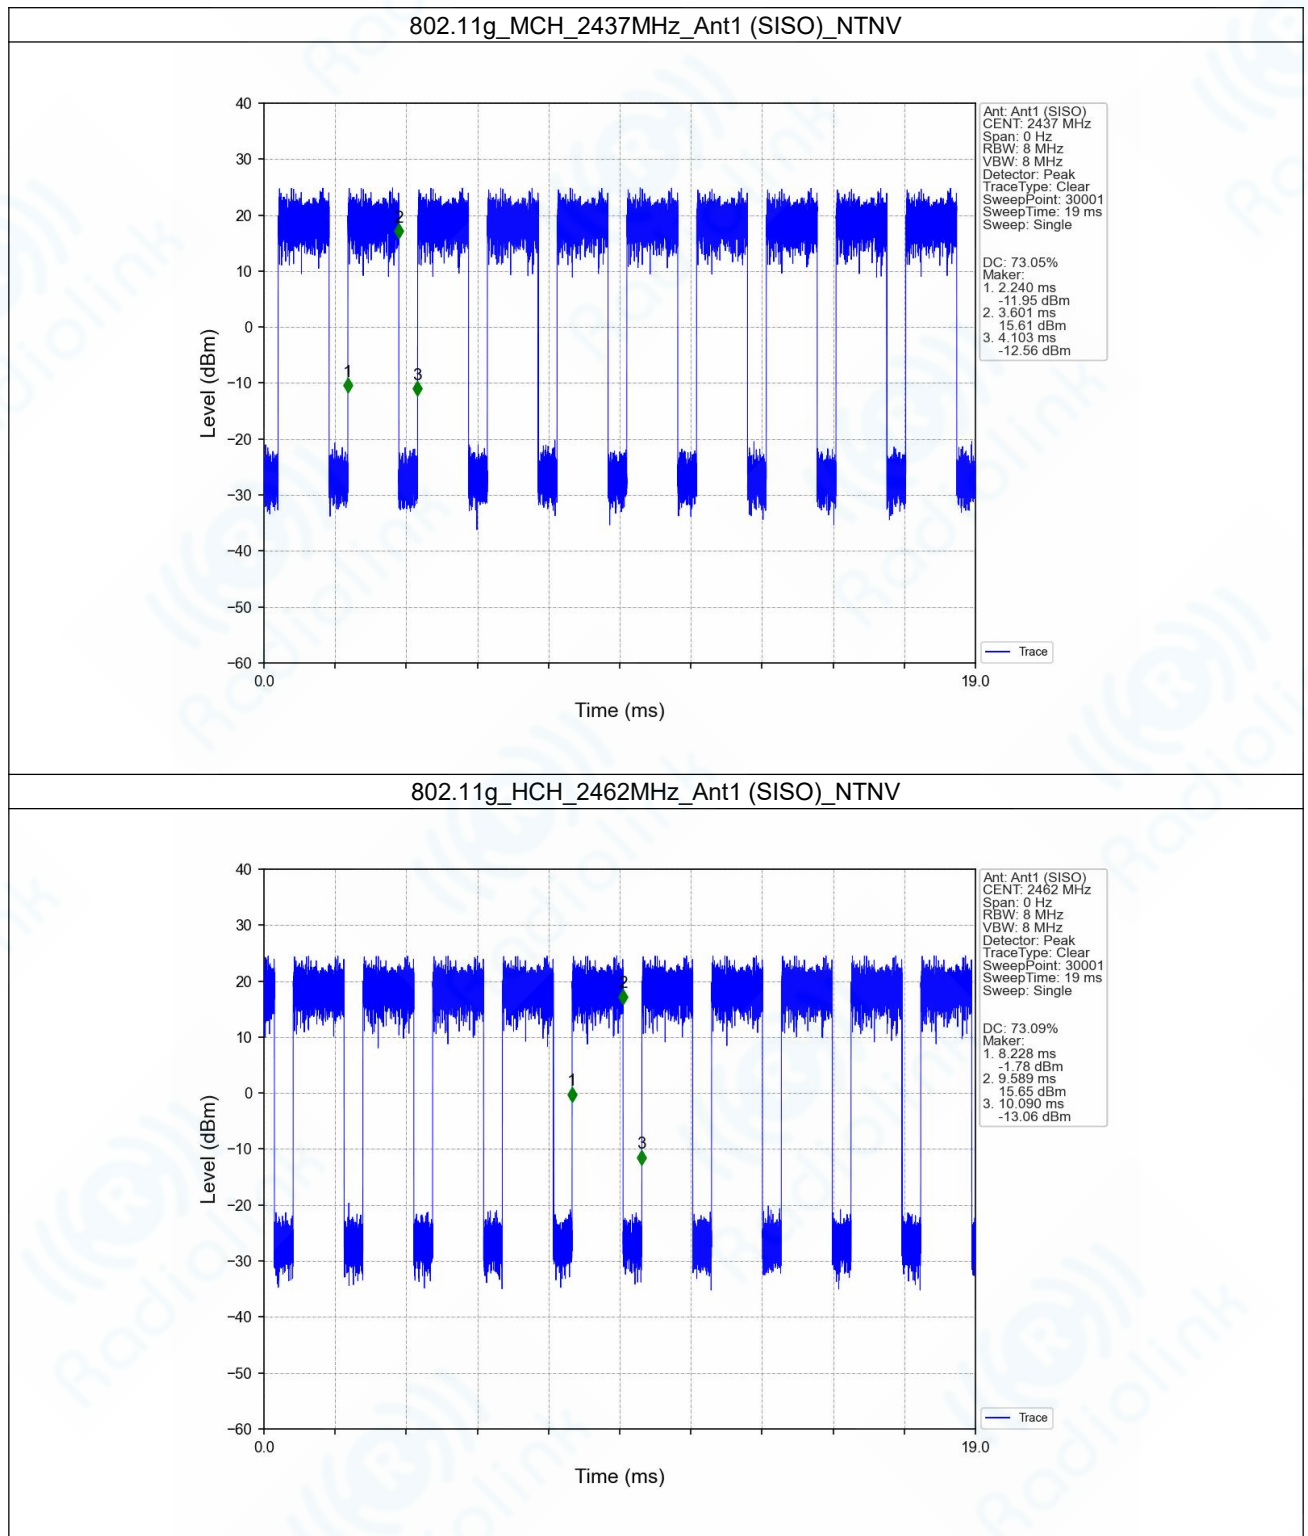


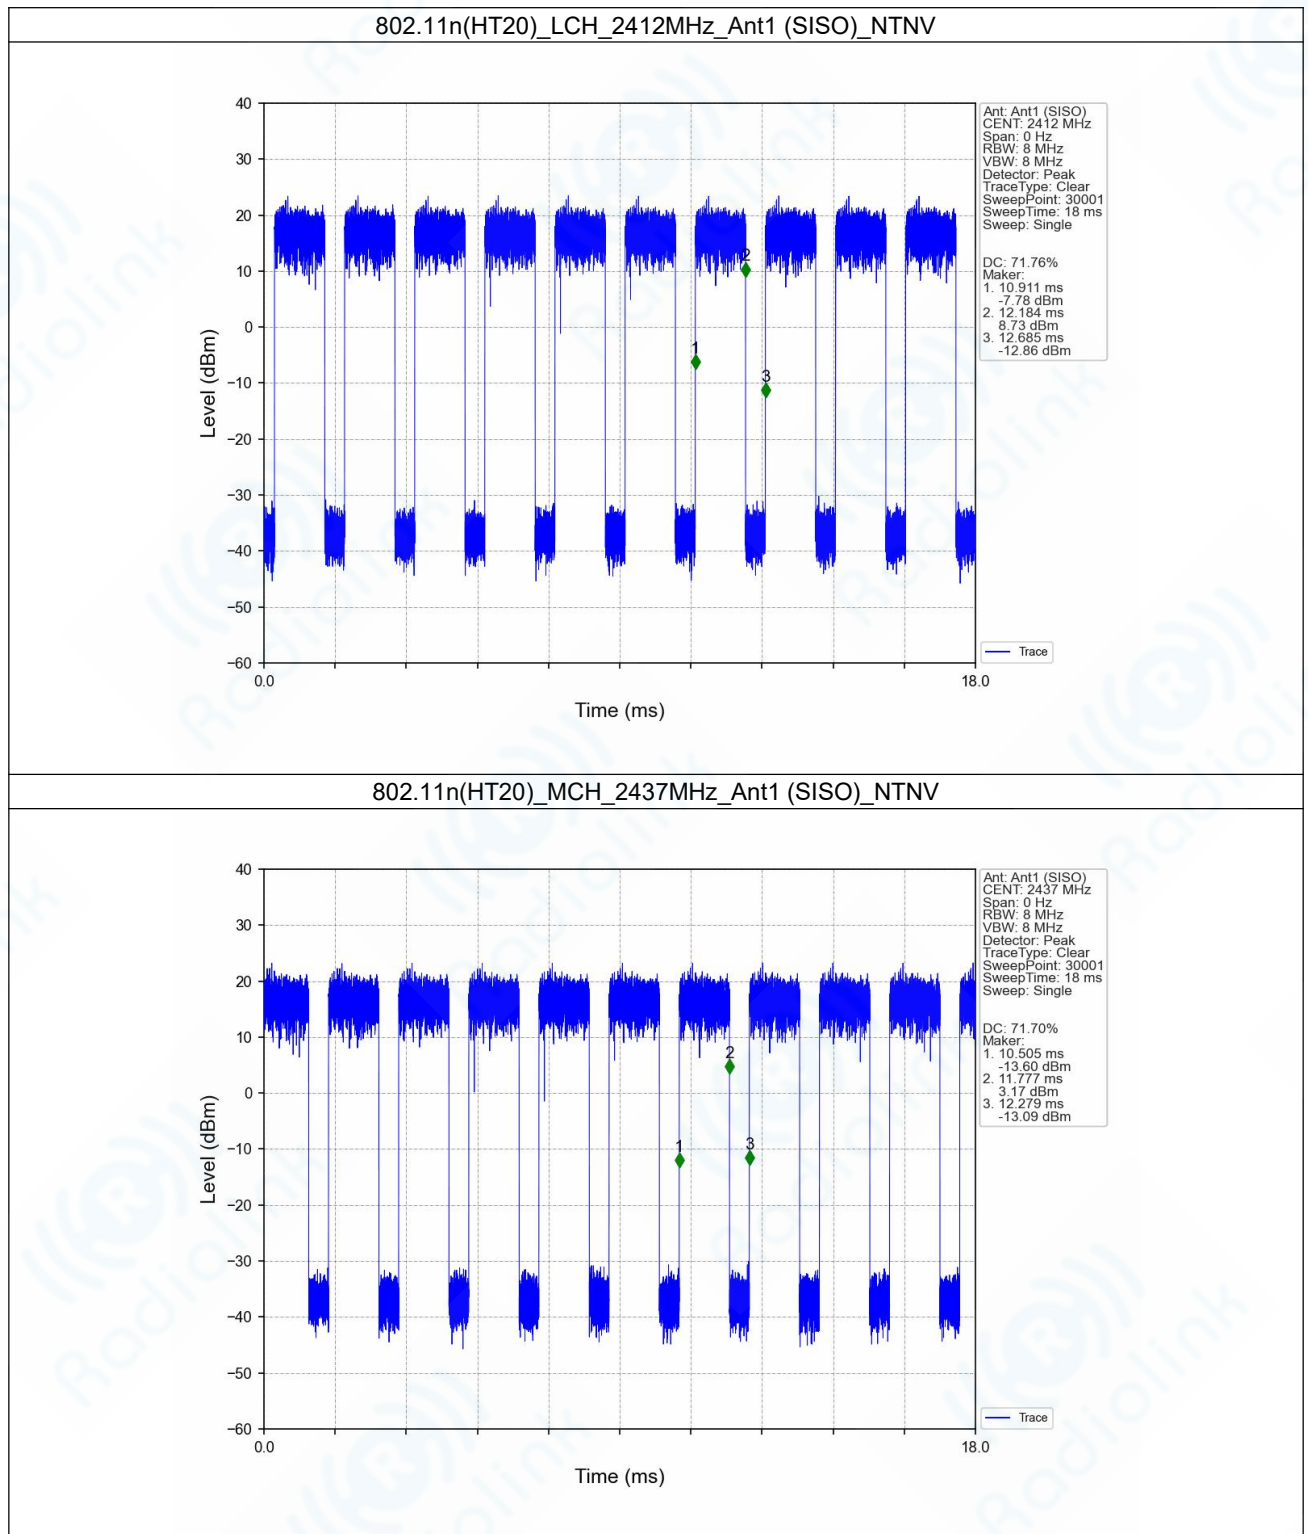

802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

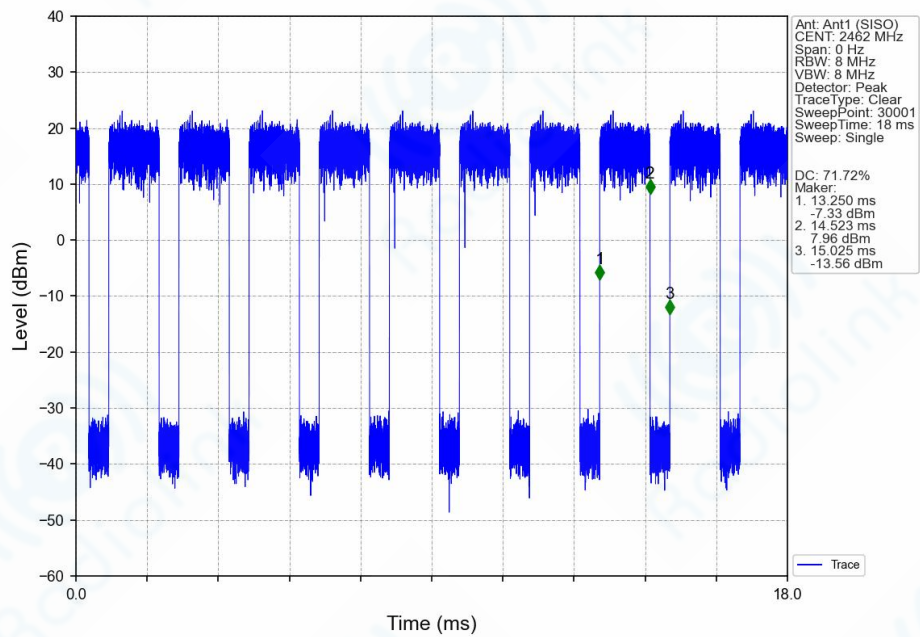


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

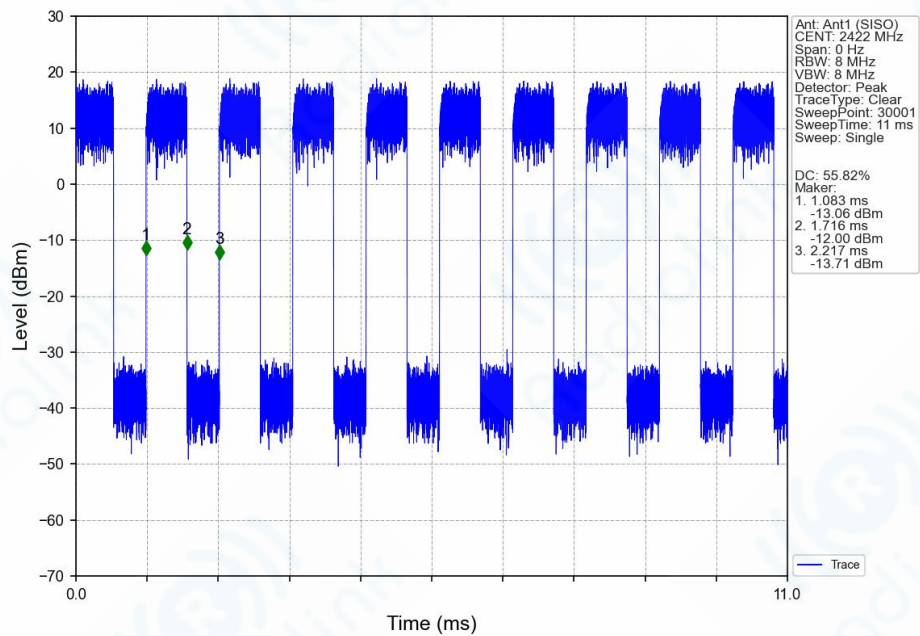

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

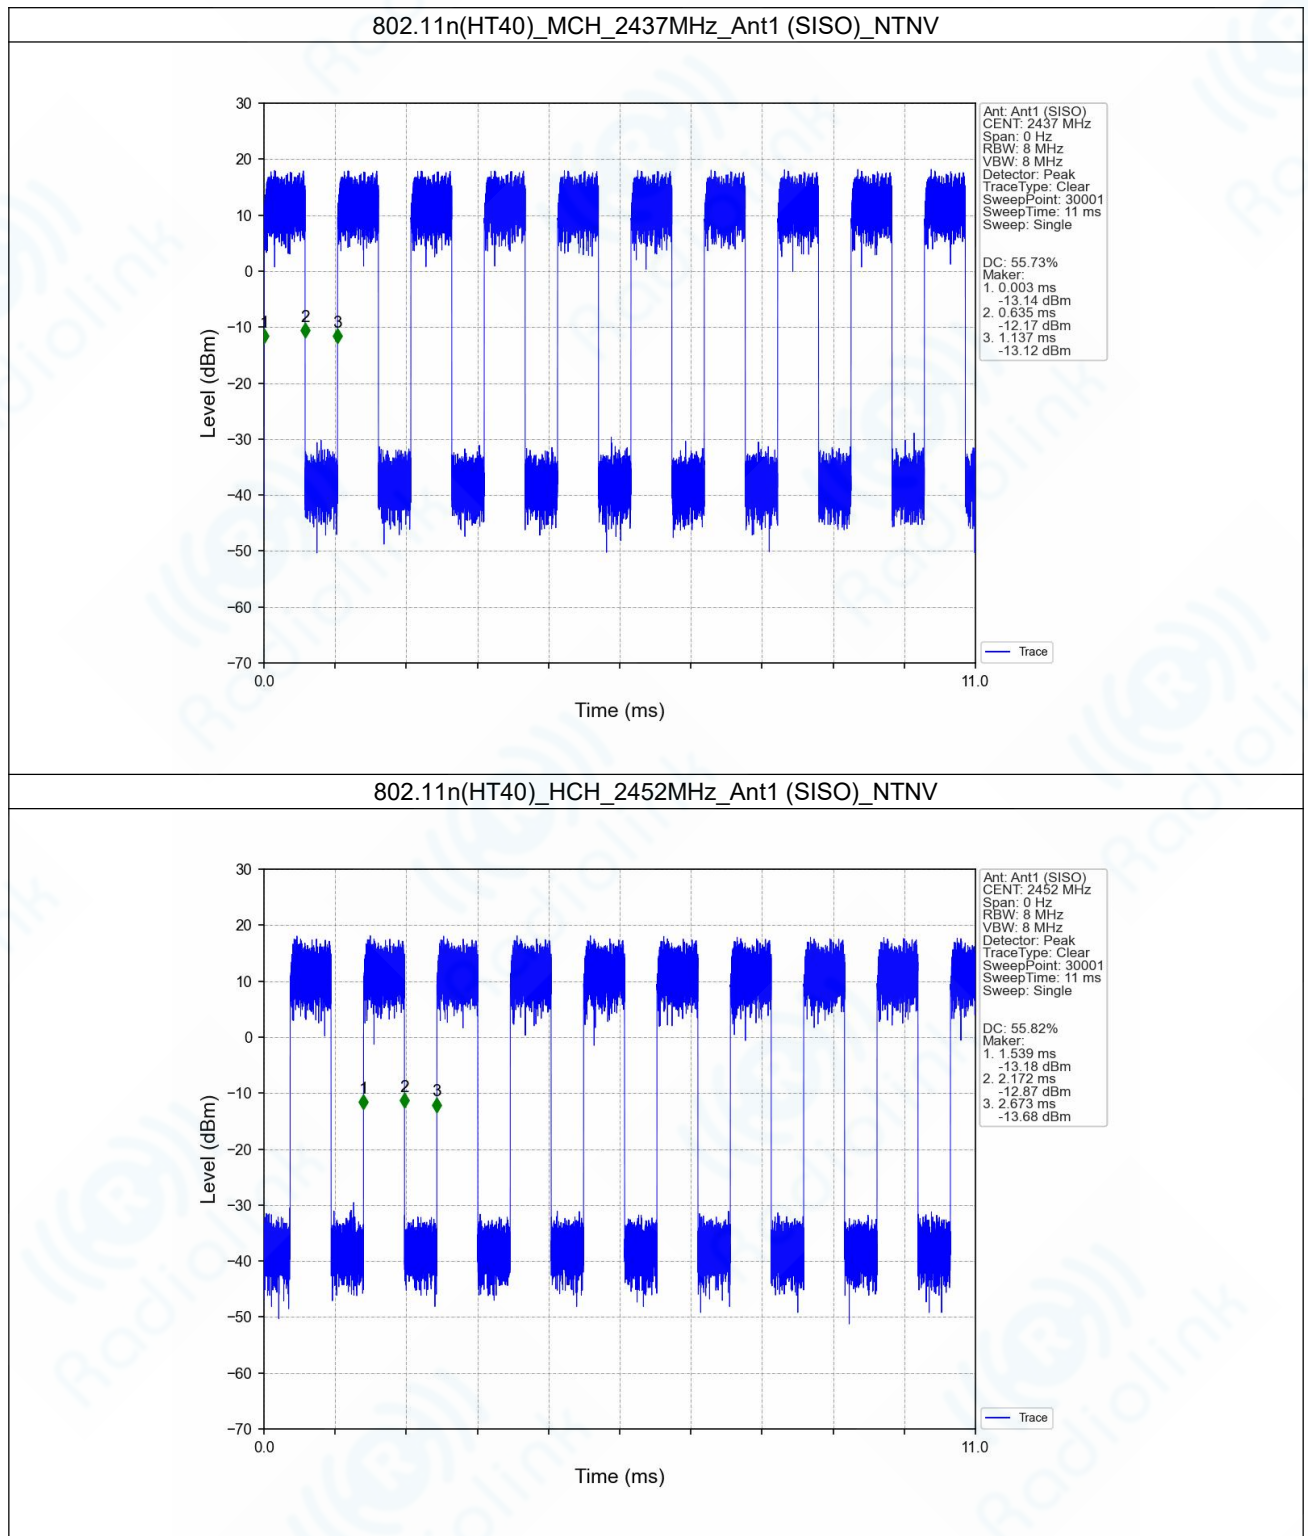

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
802.11b	SISO	2412	1	13.258	/	Pass
		2437	1	13.195	/	Pass
		2462	1	13.169	/	Pass
802.11g	SISO	2412	1	16.722	/	Pass
		2437	1	16.670	/	Pass
		2462	1	16.643	/	Pass
802.11n (HT20)	SISO	2412	1	17.872	/	Pass
		2437	1	17.752	/	Pass
		2462	1	17.691	/	Pass
802.11n (HT40)	SISO	2422	1	36.954	/	Pass
		2437	1	36.679	/	Pass
		2452	1	36.681	/	Pass

2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
802.11b	SISO	2412	1	9.186	≥ 0.5	Pass
		2437	1	9.179	≥ 0.5	Pass
		2462	1	9.181	≥ 0.5	Pass
802.11g	SISO	2412	1	16.395	≥ 0.5	Pass
		2437	1	16.297	≥ 0.5	Pass
		2462	1	16.270	≥ 0.5	Pass
802.11n (HT20)	SISO	2412	1	17.488	≥ 0.5	Pass
		2437	1	17.310	≥ 0.5	Pass
		2462	1	17.088	≥ 0.5	Pass
802.11n (HT40)	SISO	2422	1	35.847	≥ 0.5	Pass
		2437	1	35.440	≥ 0.5	Pass
		2452	1	36.344	≥ 0.5	Pass




Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

2.2 Test Graph


2.2.1 OBW

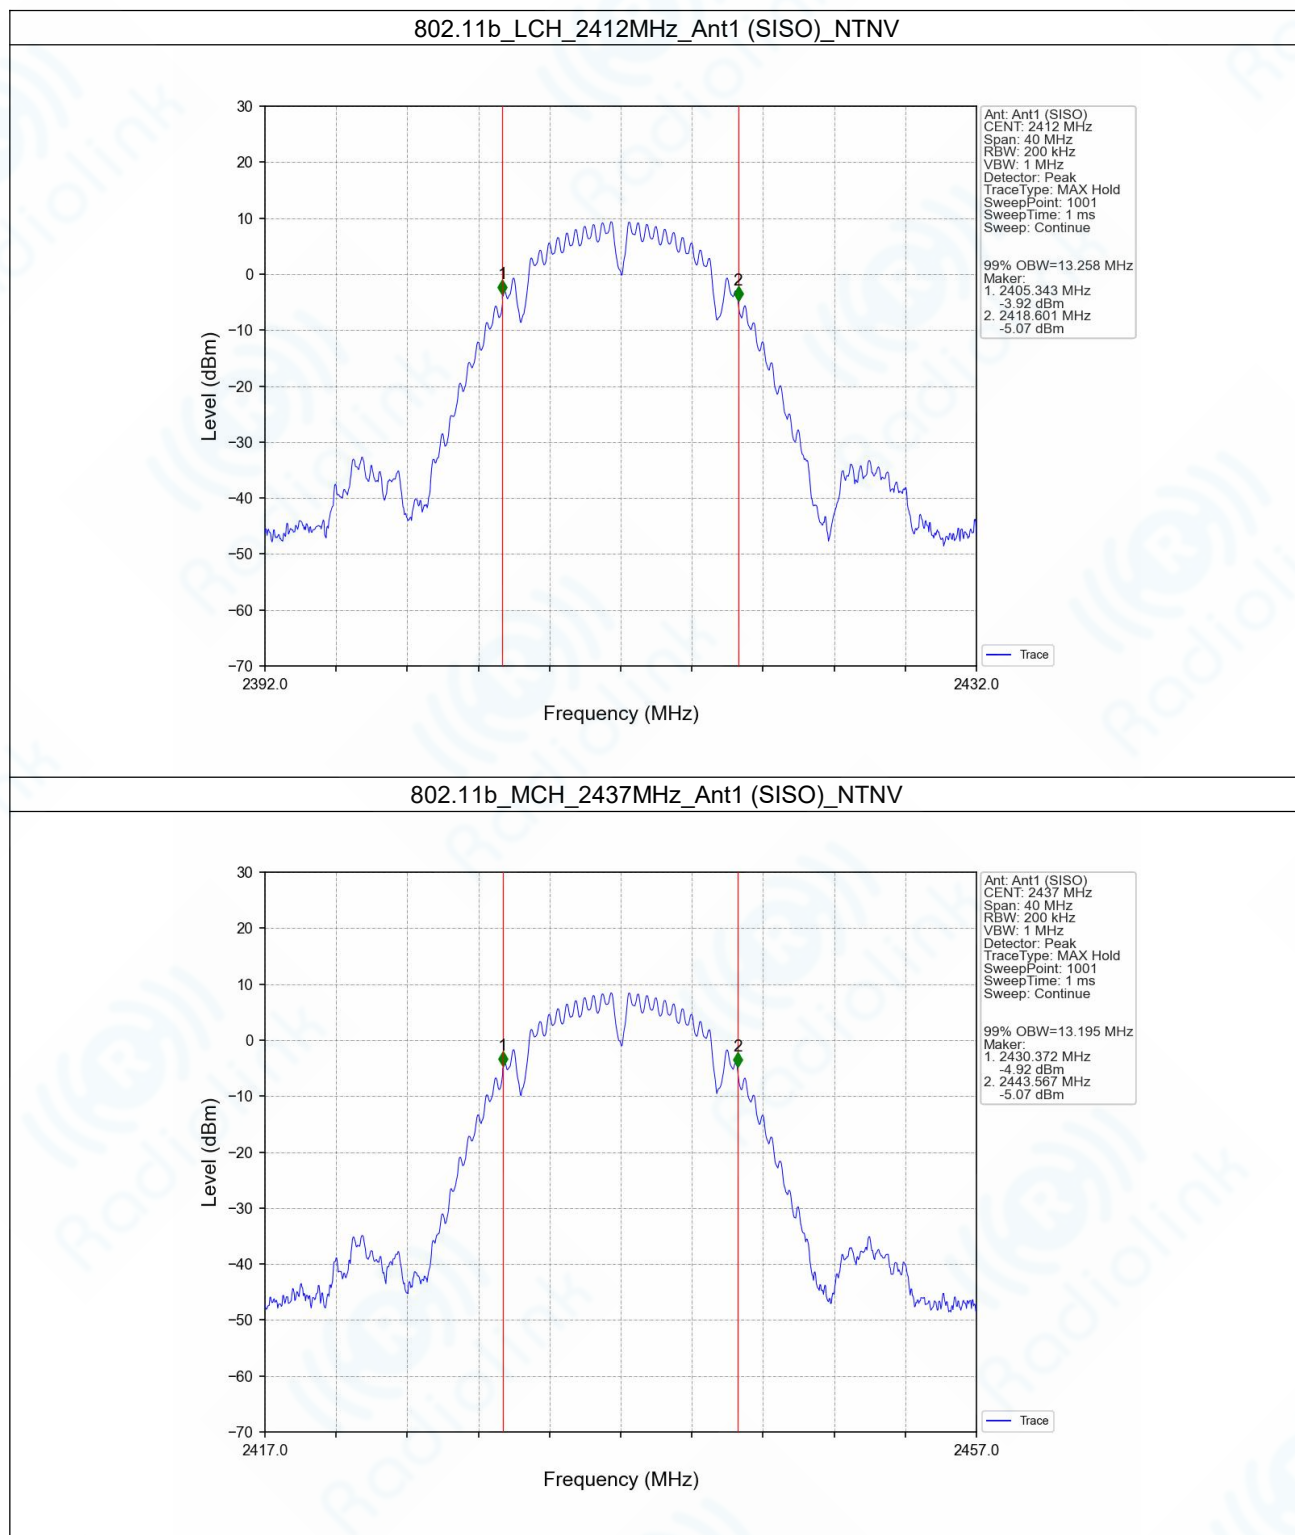


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

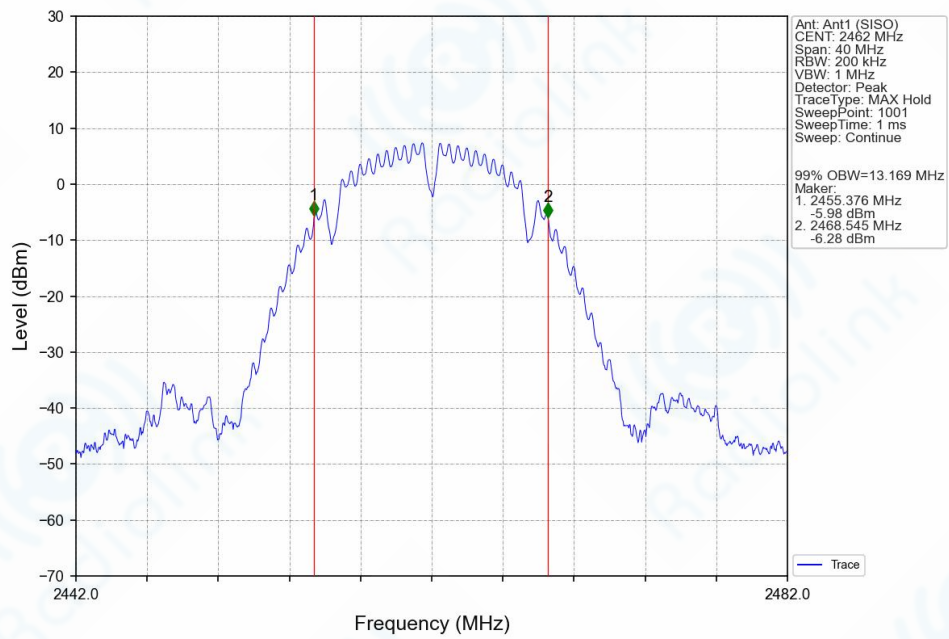


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

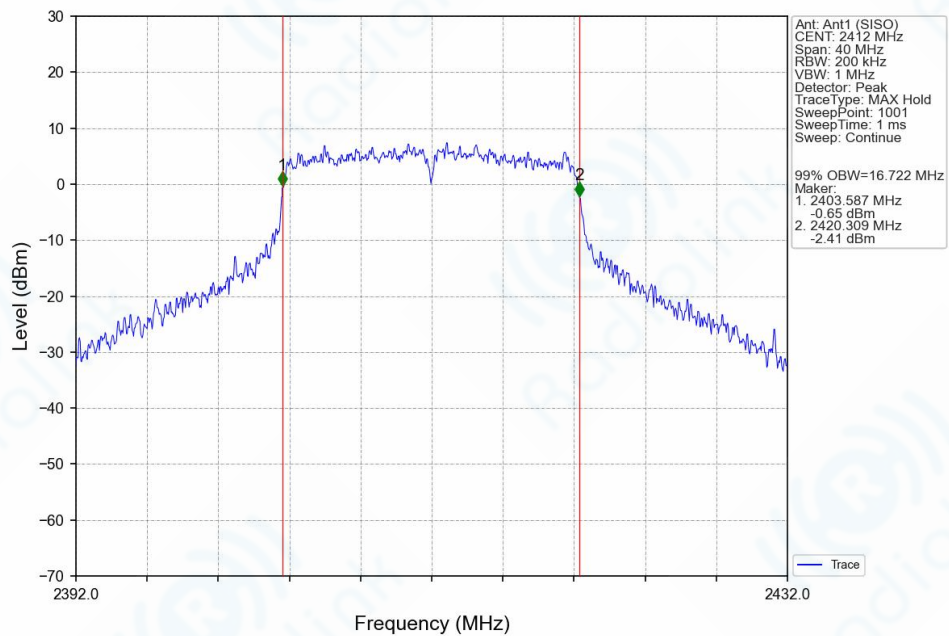


Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

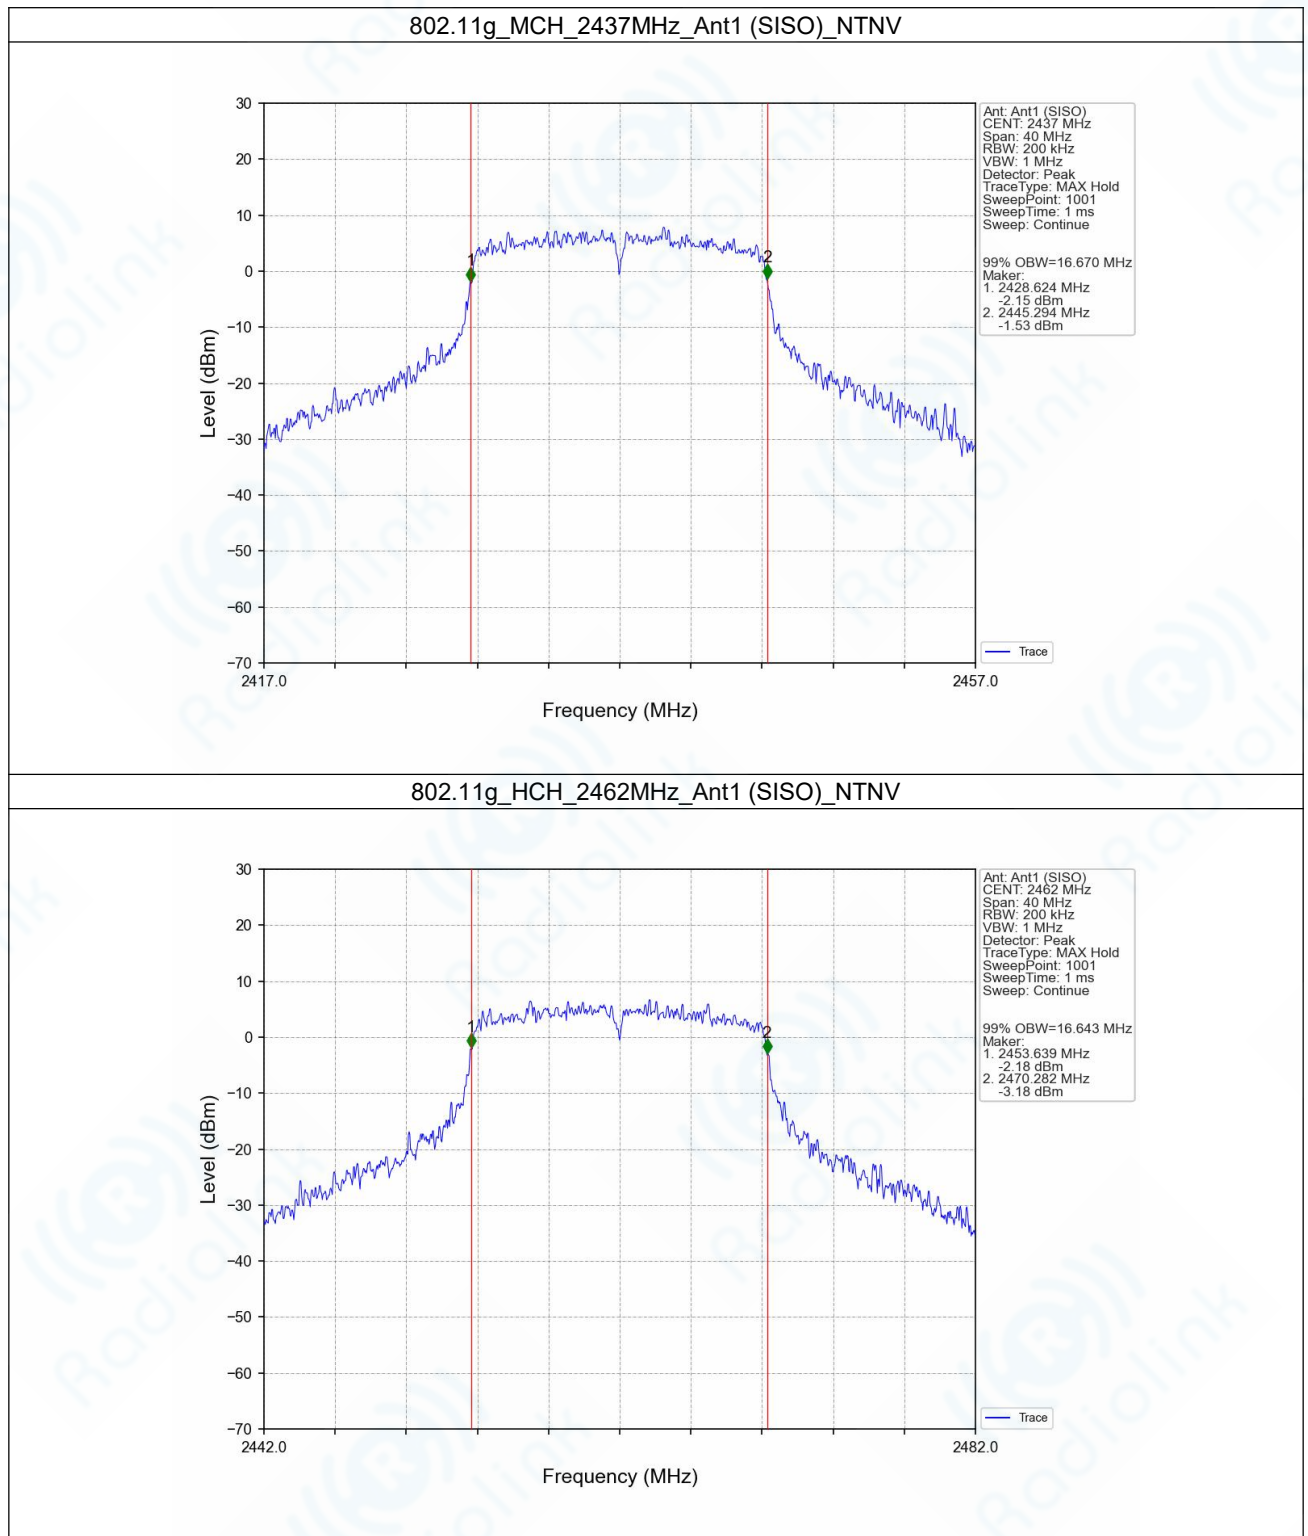


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

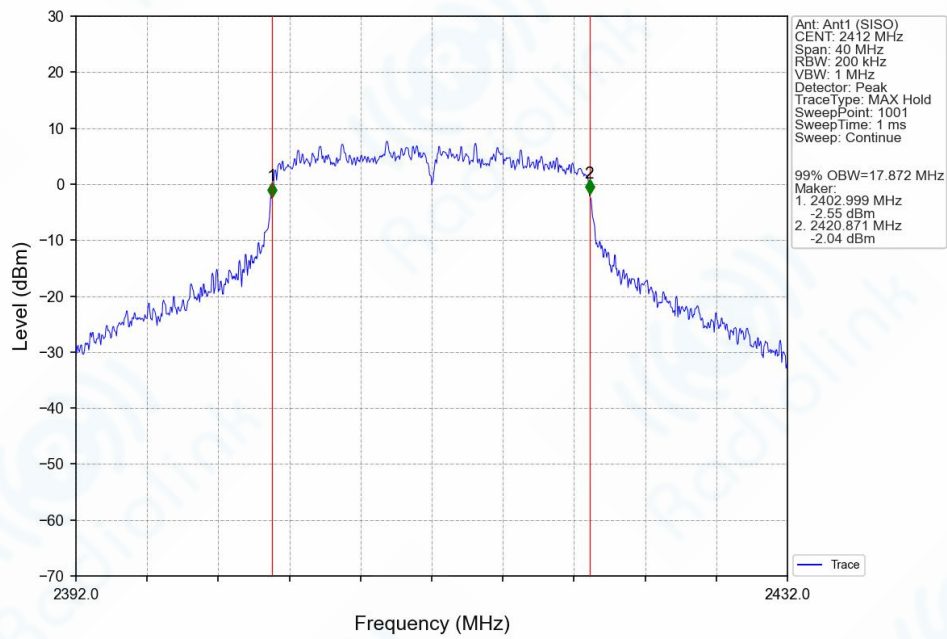


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

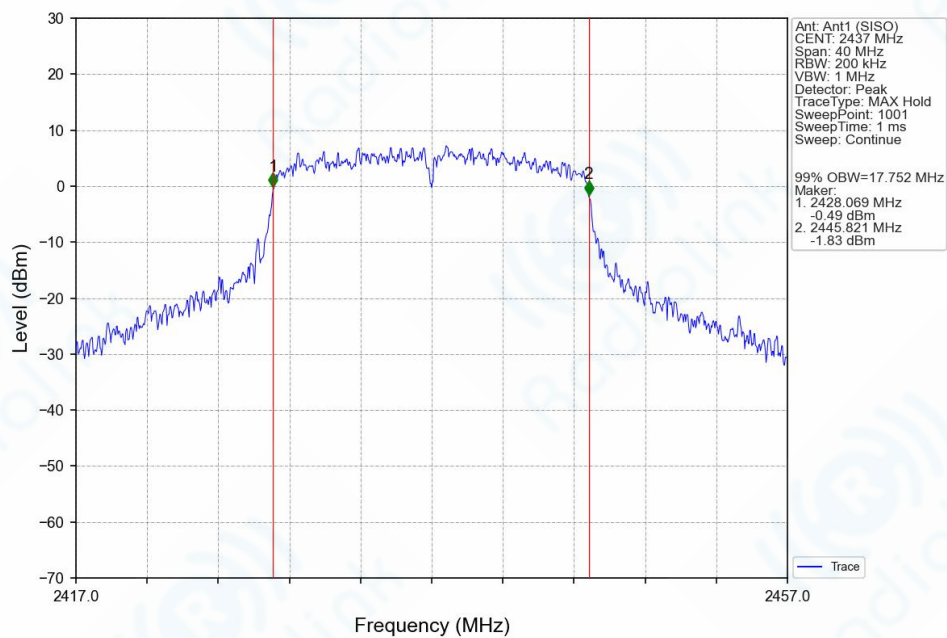

802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

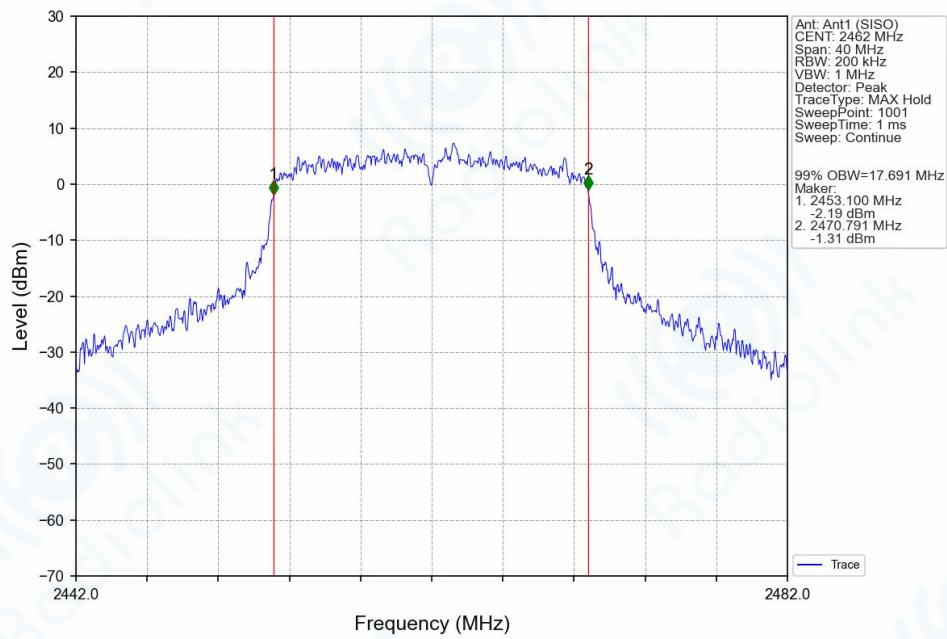


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

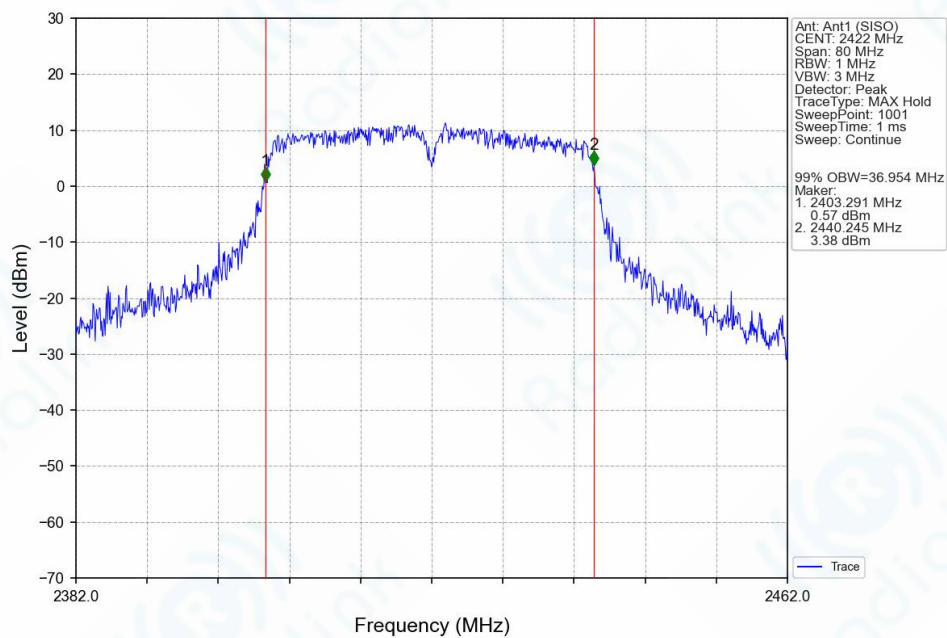


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

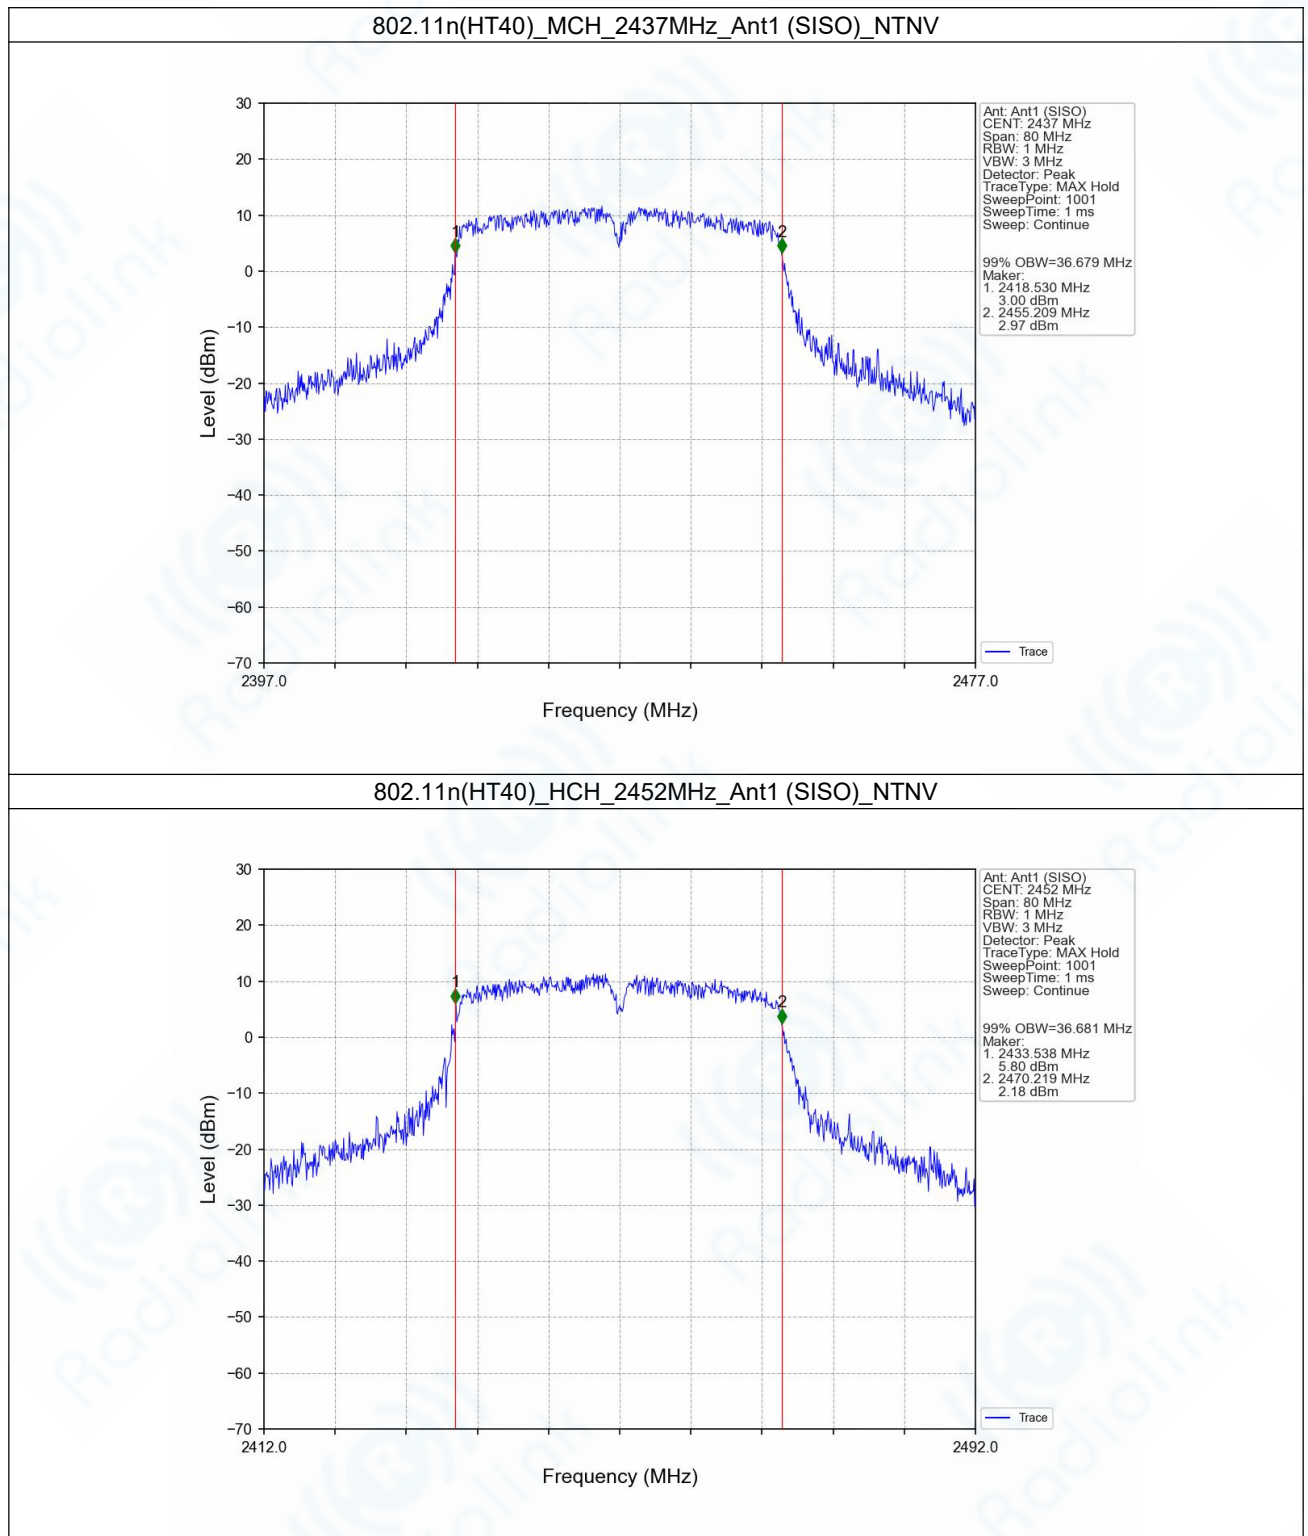


2.2.2 6dB BW

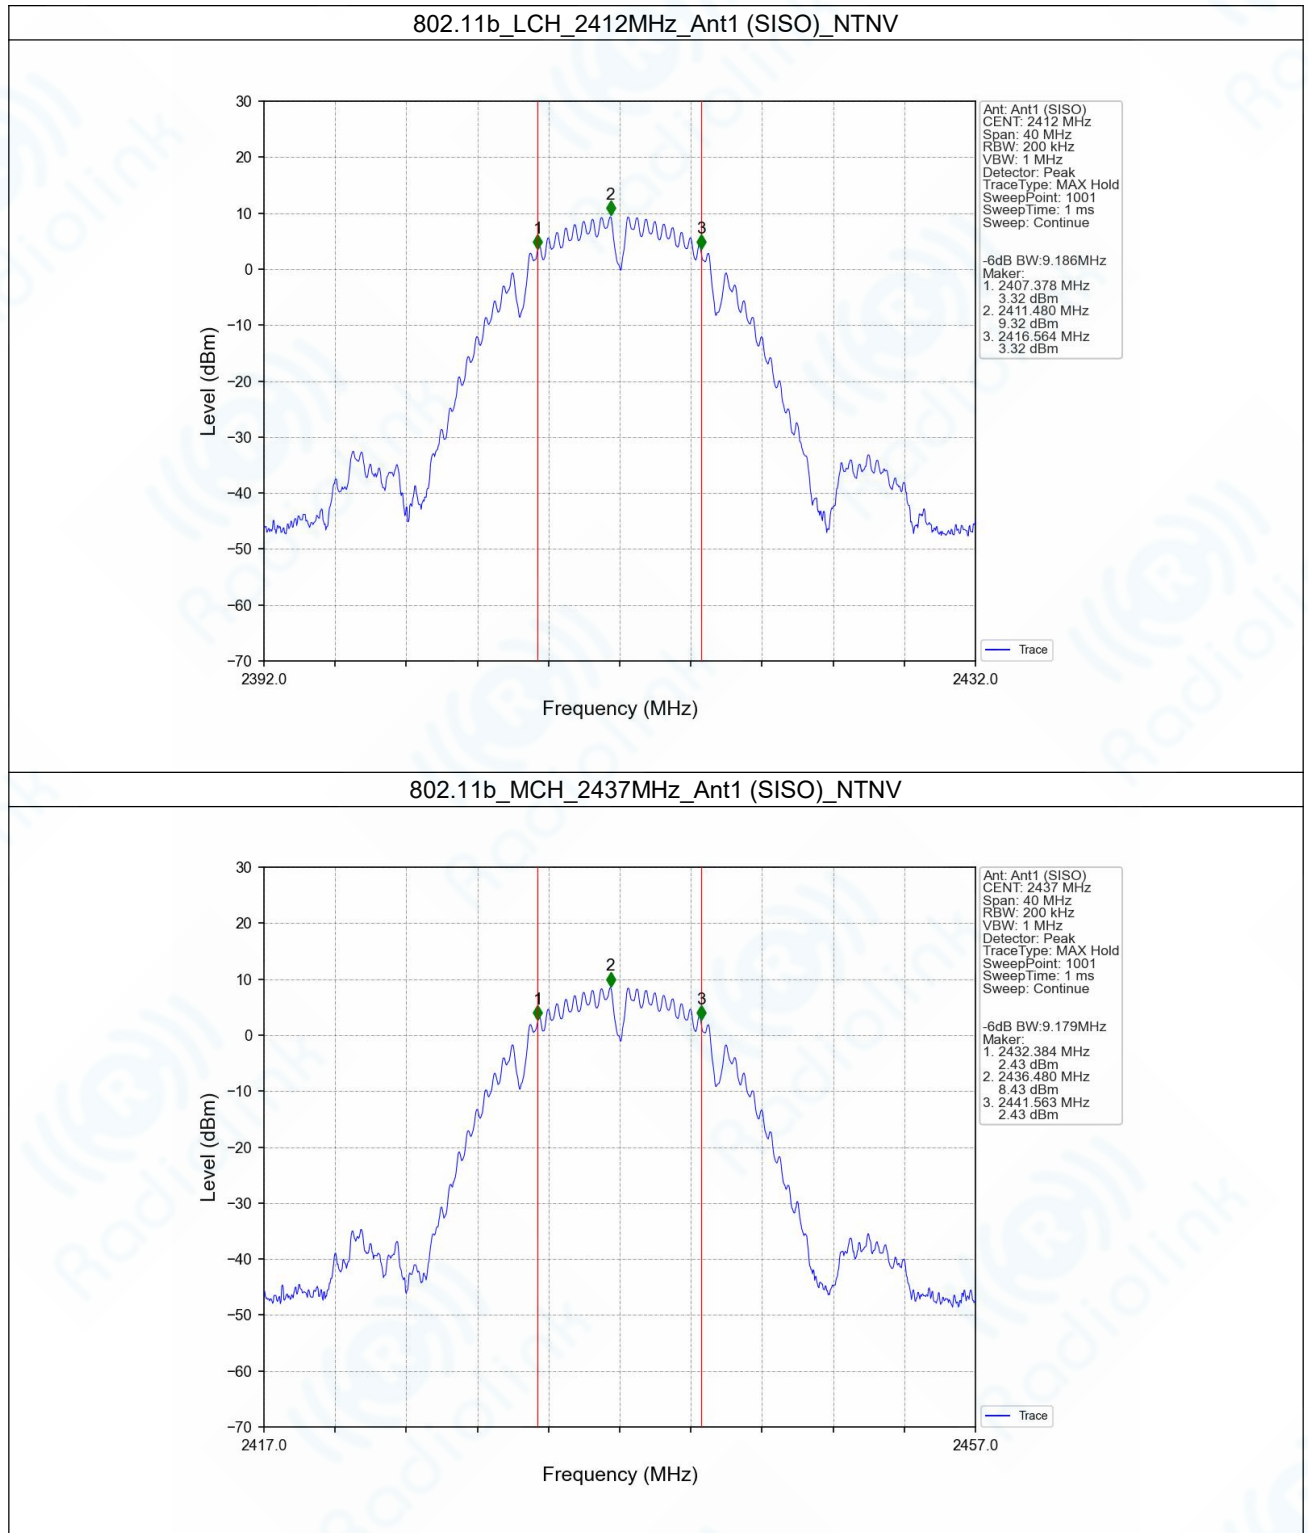


Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

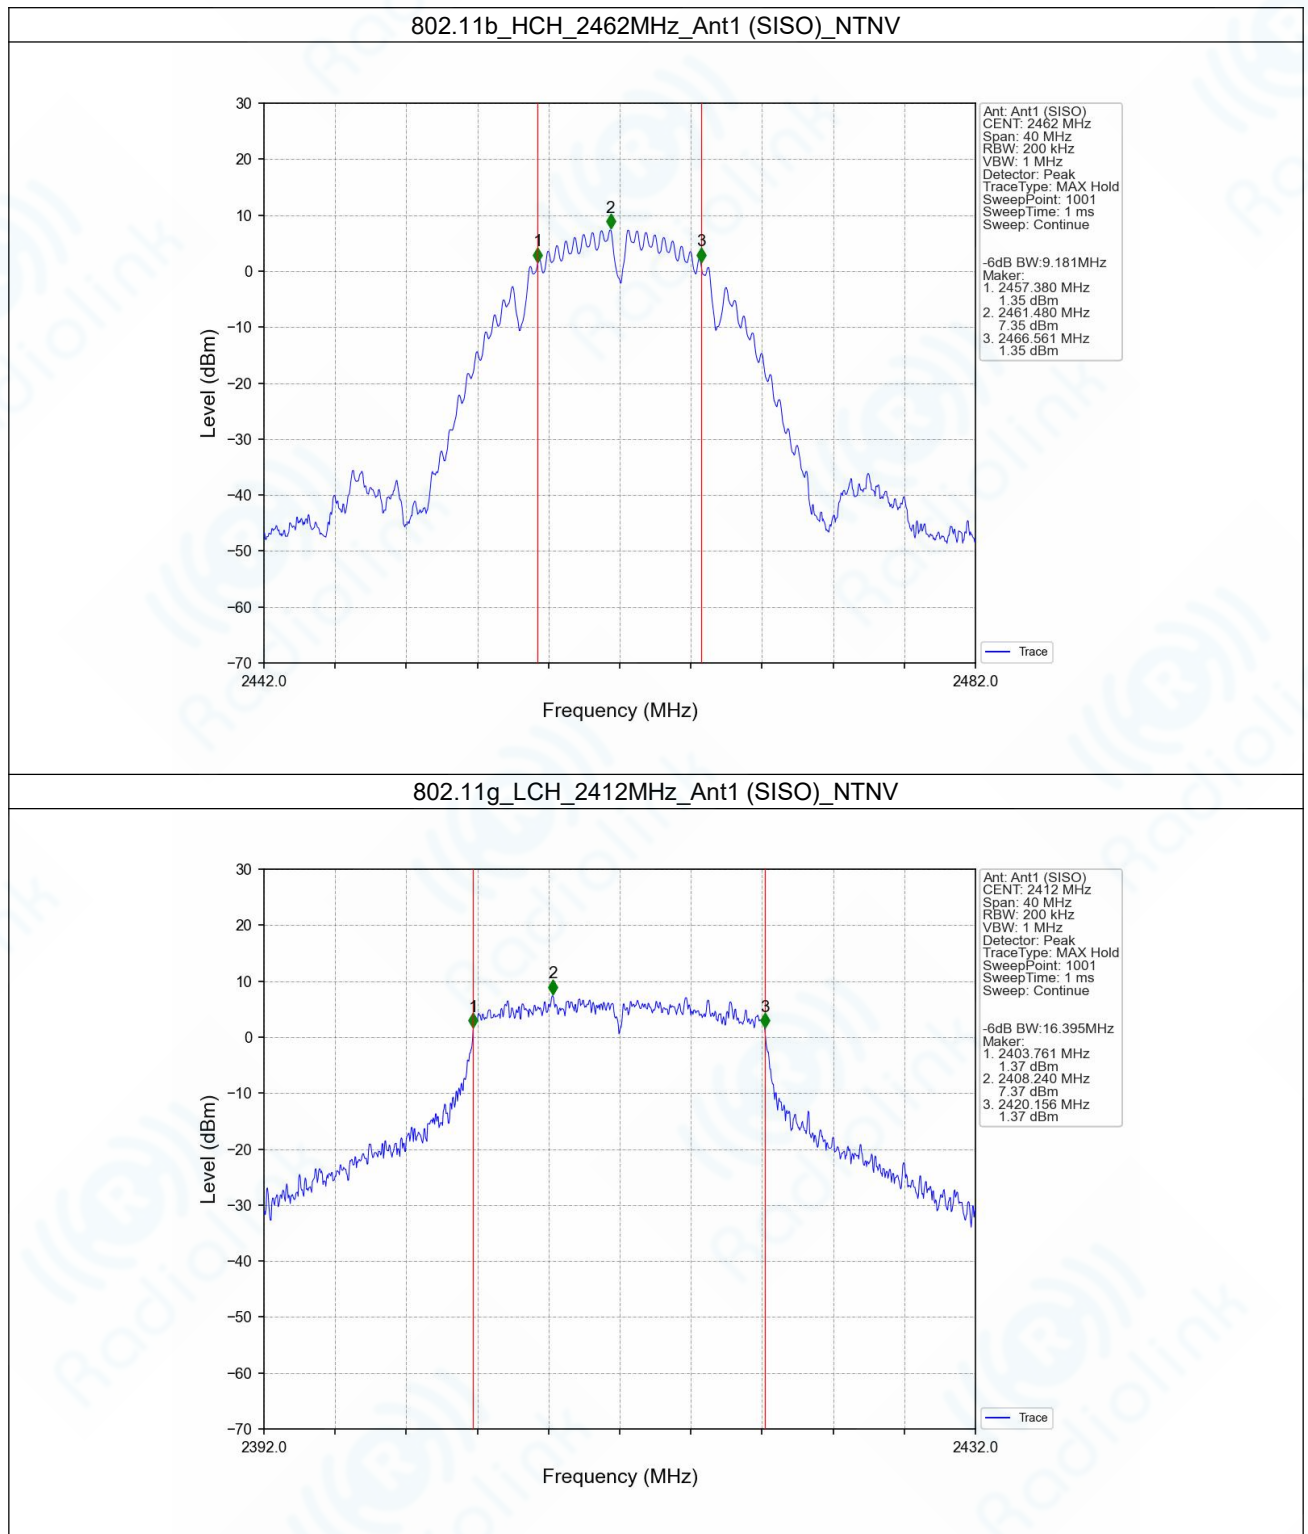

802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

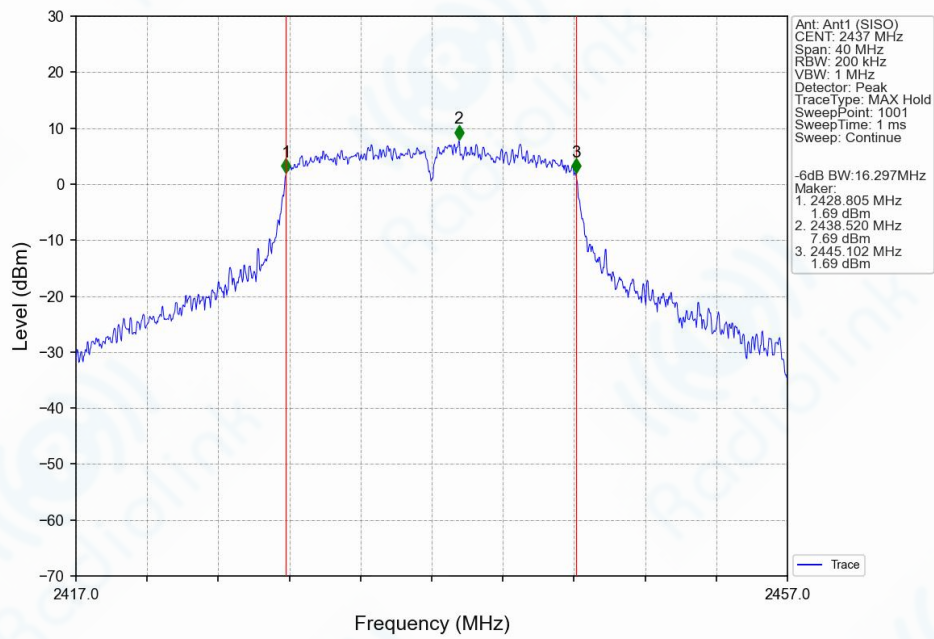

802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

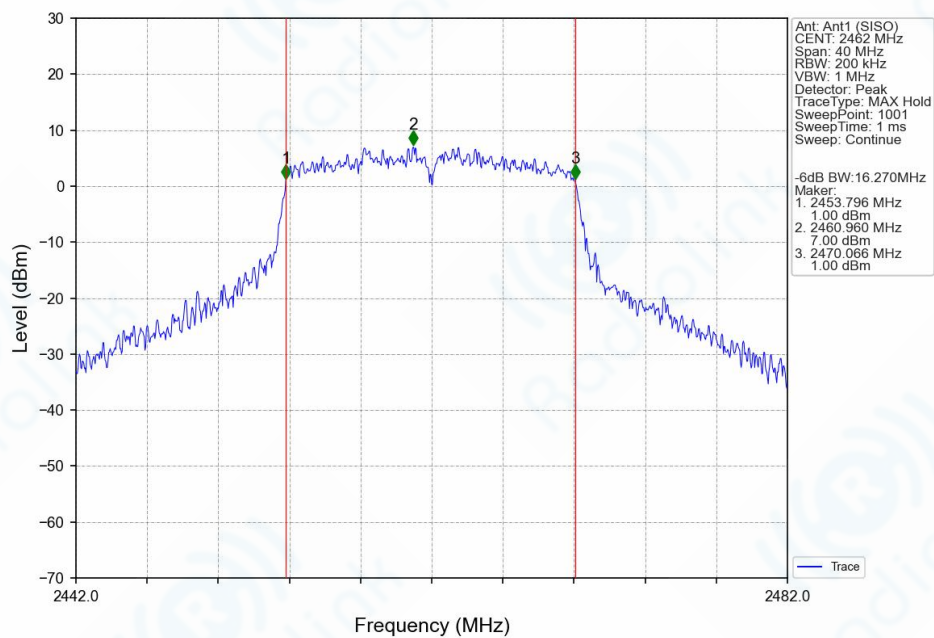


Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

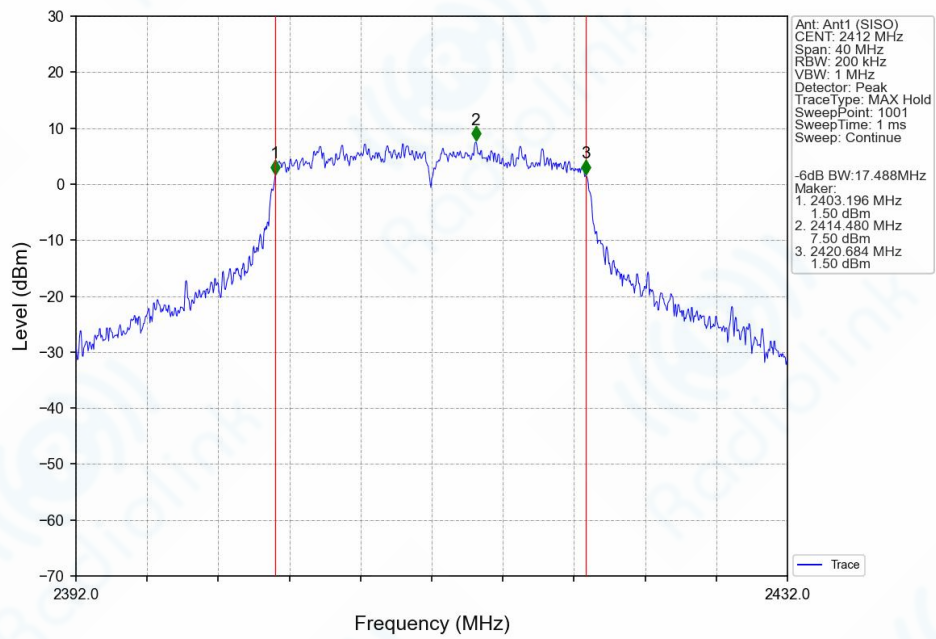

802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

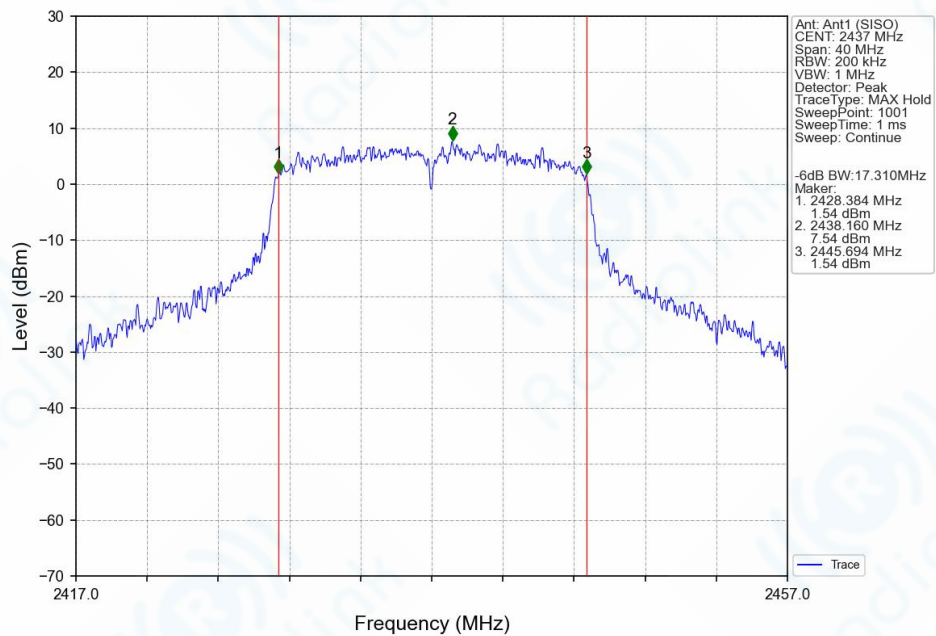


Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

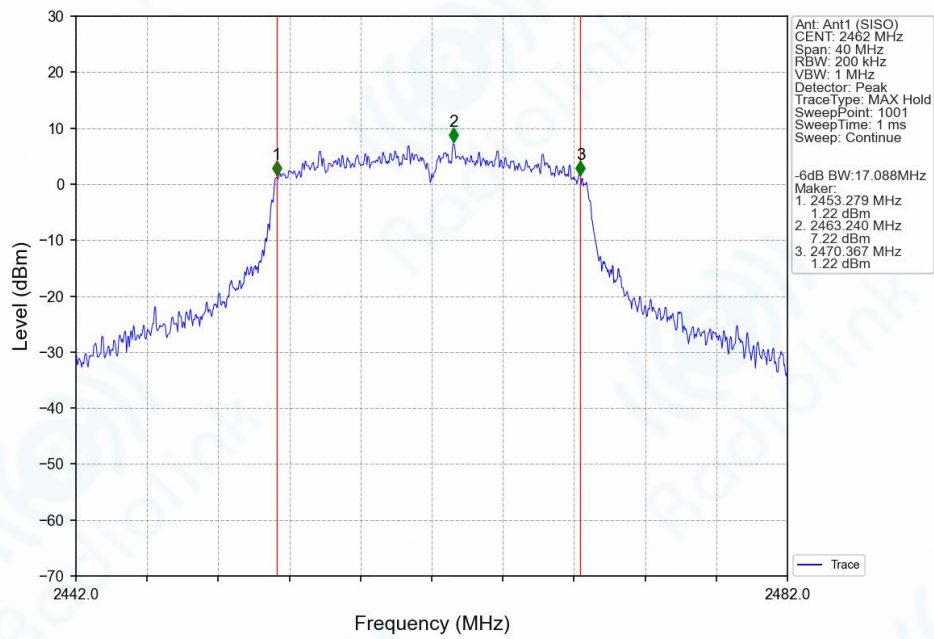

802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

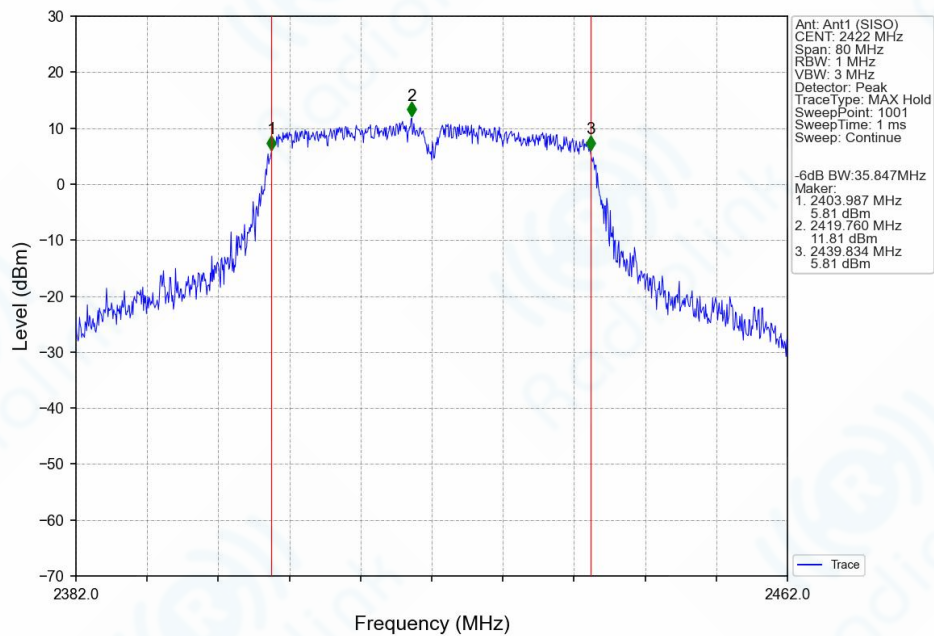

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694