

Plot: 1# (Date 2026/02/02)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 3500 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.985$ S/m; $\epsilon_r = 37.795$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.45, 6.45, 6.45) @ 3500 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Left Cheek/Ant5 LTE Band 42 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.943 W/kg

Head Left Cheek/Ant5 LTE Band 42 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 13.59 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.567 W/kg; SAR(10 g) = 0.245 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 66.3%

Maximum value of SAR (measured) = 1.09 W/kg

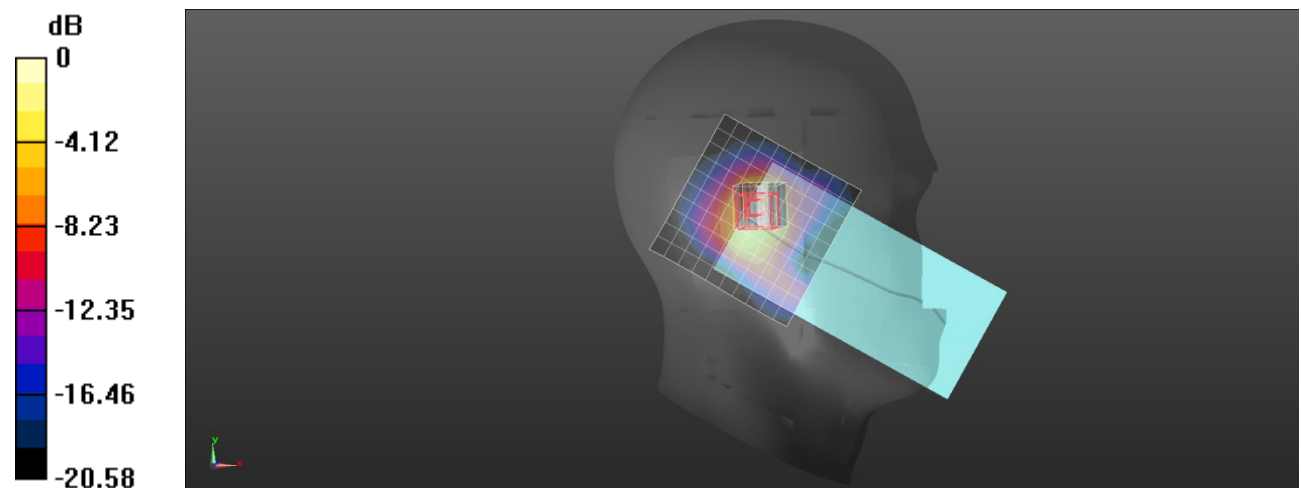

0 dB = 1.09 W/kg = 0.37 dBW/kg

Plot: 2# (Date 2026/02/02)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.985$ S/m; $\epsilon_r = 37.795$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.45, 6.45, 6.45) @ 3500 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Ant5 LTE Band 42 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.427 W/kg

Body Back/Ant5 LTE Band 42 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.400 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.125 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 68.8%

Maximum value of SAR (measured) = 0.444 W/kg

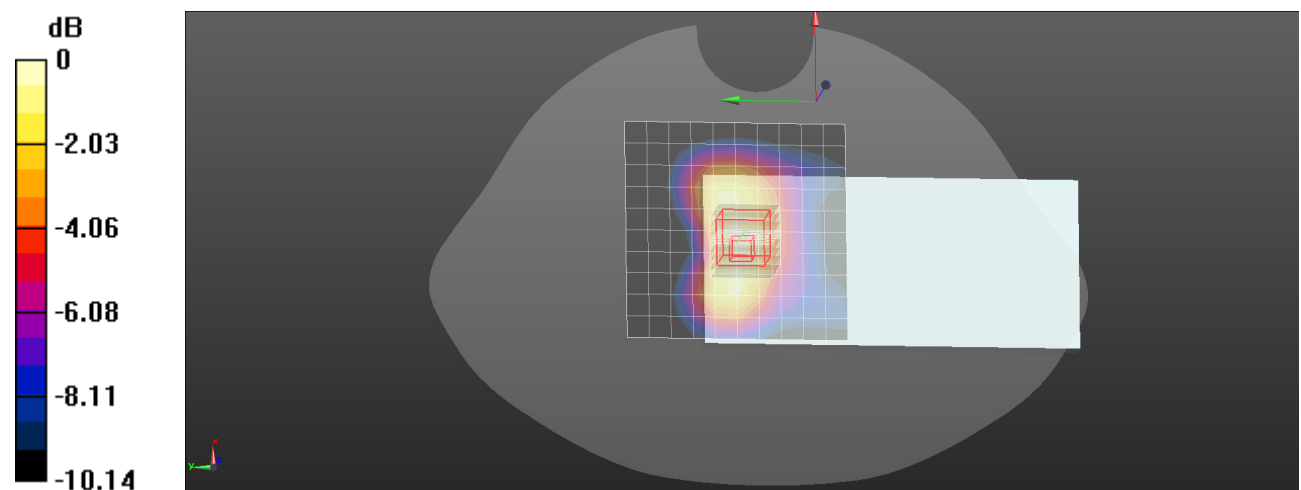

0 dB = 0.444 W/kg = -3.53 dBW/kg

Plot: 3# (Date 2026/01/29)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, FDD-5G NR (0); Frequency: 1890 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1890$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 40.991$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.55, 7.55, 7.55) @ 1890 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Right Cheek/Ant4 FR1 n 2 1RB High/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.351 W/kg

Head Right Cheek/Ant4 FR1 n 2 1RB High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.853 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.712 W/kg

SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.117 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 49.3%

Maximum value of SAR (measured) = 0.436 W/kg

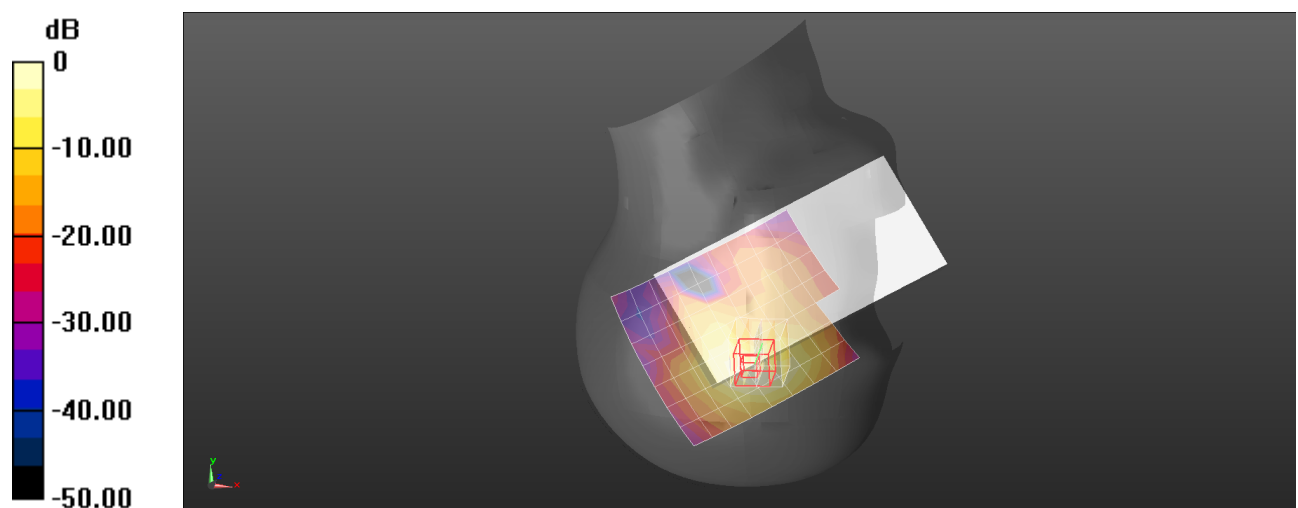

0 dB = 0.436 W/kg = -3.61 dBW/kg

Plot: 4# (Date 2026/01/29)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, FDD-5G NR (0); Frequency: 1870 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1870 \text{ MHz}$; $\sigma = 1.35 \text{ S/m}$; $\epsilon_r = 41.072$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.55, 7.55, 7.55) @ 1870 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Ant4 FR1 n 2 1RB Low/Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.483 W/kg

Body Back/Ant4 FR1 n 2 1RB Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.536 V/m; Power Drift = 0.20 dB


Peak SAR (extrapolated) = 0.616 W/kg

SAR(1 g) = 0.346 W/kg; SAR(10 g) = 0.179 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 0.515 W/kg

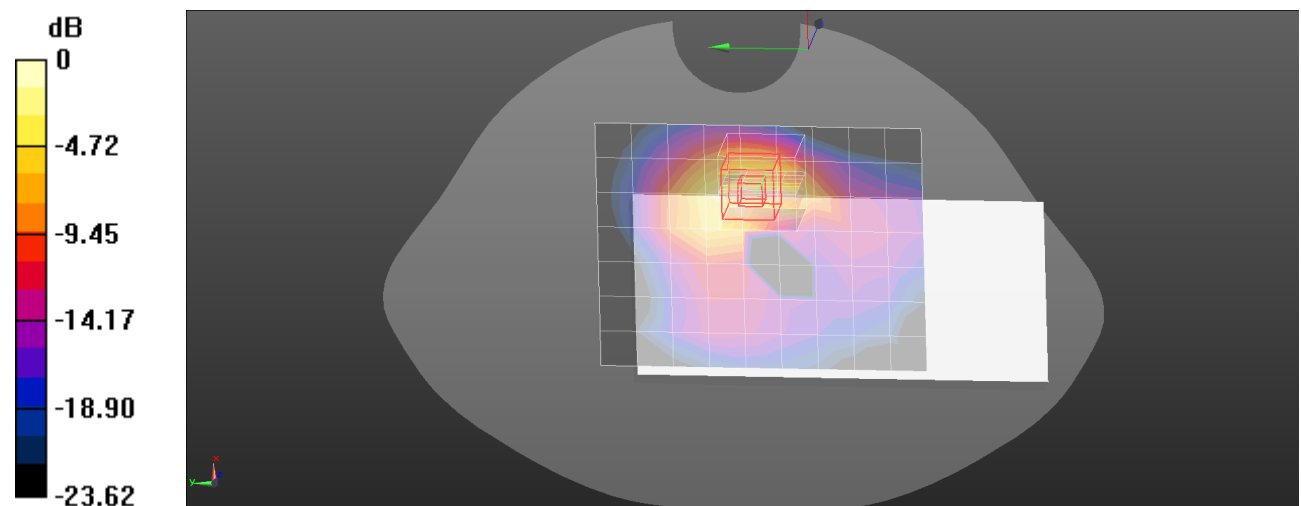

0 dB = 0.515 W/kg = -2.88 dBW/kg

Plot: 5# (Date 2026/01/26)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, Generic FDD-FR1 n 5 (0); Frequency: 834 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 834$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 834 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Right Cheek/Ant1 FR1 n 5 1RB Low/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.233 W/kg

Head Right Cheek/Ant1 FR1 n 5 1RB Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.505 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.267 W/kg

SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.144 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 73.8%

Maximum value of SAR (measured) = 0.239 W/kg

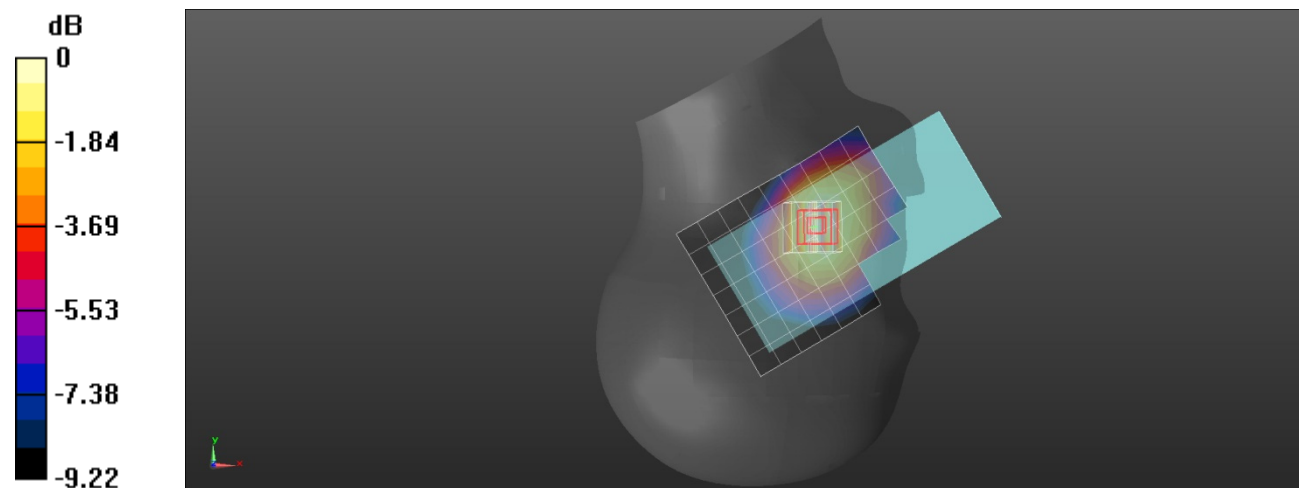

0 dB = 0.239 W/kg = -6.22 dBW/kg

Plot: 6# (Date 2026/01/26)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, Generic FDD-FR1 n 5 (0); Frequency: 839 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 839$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 40.082$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 839 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Ant1 FR1 n 5 1RB High/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.745 W/kg

Body Back/Ant1 FR1 n 5 1RB High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.11 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.925 W/kg

SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.279 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 53.8%

Maximum value of SAR (measured) = 0.744 W/kg

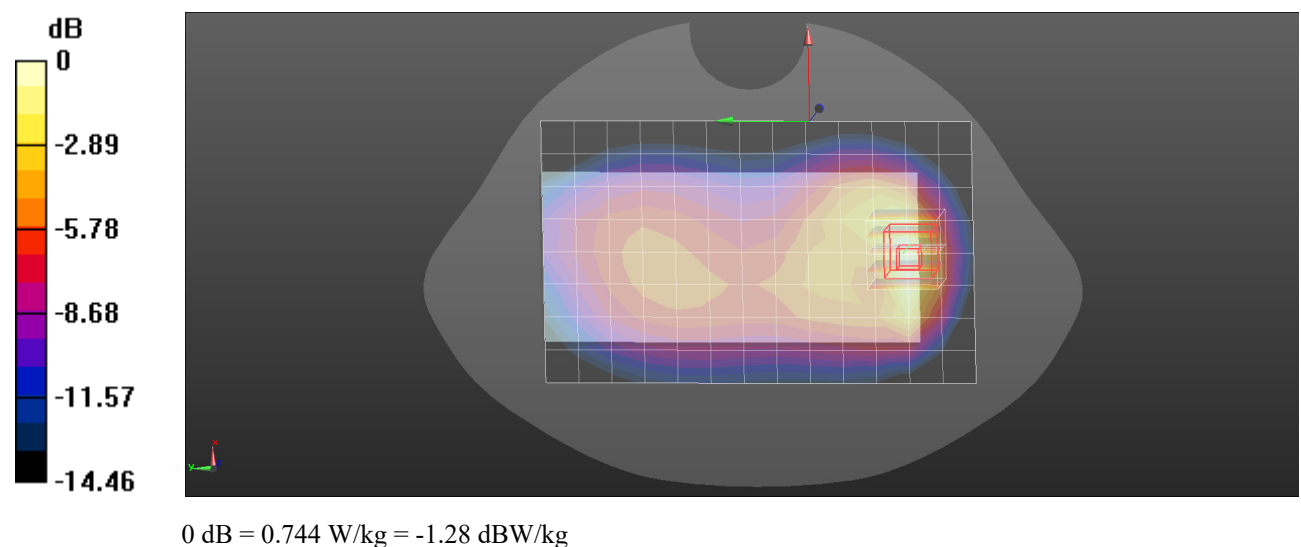

Plot: 7# (Date 2026/01/30)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**


Communication System: UID 0, Generic FDD-FR1 n 7 (0); Frequency: 2545 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2545 \text{ MHz}$; $\sigma = 1.865 \text{ S/m}$; $\epsilon_r = 38.819$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2545 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

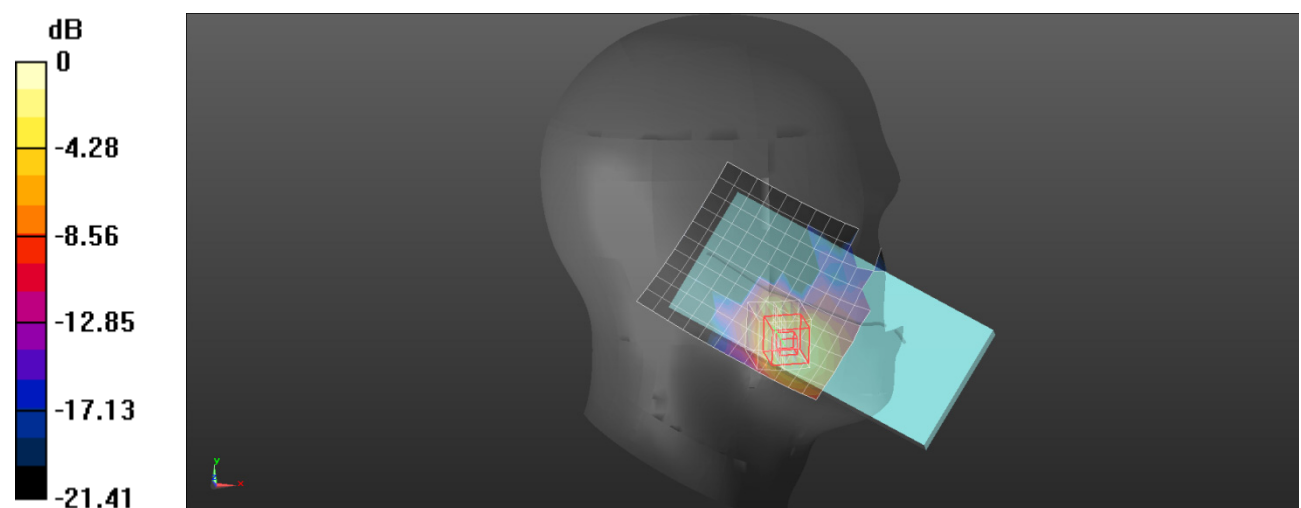Head Left Cheek/Ant2 FR1 n 7 1RB High/Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.0794 W/kg **Head Left Cheek/Ant2 FR1 n 7 1RB High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 0.321 V/m ; Power Drift = 0.00 dB Peak SAR (extrapolated) = 0.105 W/kg **SAR(1 g) = 0.053 W/kg ; SAR(10 g) = 0.026 W/kg** Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 15 \text{ mm}$)Ratio of SAR at M2 to SAR at M1 = 51.4% Maximum value of SAR (measured) = 0.0835 W/kg  $0 \text{ dB} = 0.0835 \text{ W/kg} = -10.78 \text{ dBW/kg}$

Plot: 8# (Date 2026/01/30)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, Generic FDD-FR1 n 7 (0); Frequency: 2525 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2525$ MHz; $\sigma = 1.848$ S/m; $\epsilon_r = 38.837$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2525 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Ant2 FR1 n 7 1RB Low/Area Scan (13x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.334 W/kg

Body Back/Ant2 FR1 n 7 1RB Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.124 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.421 W/kg

SAR(1 g) = 0.202 W/kg; SAR(10 g) = 0.093 W/kg

Smallest distance from peaks to all points 3 dB below = 10.6 mm

Ratio of SAR at M2 to SAR at M1 = 48%

Maximum value of SAR (measured) = 0.337 W/kg

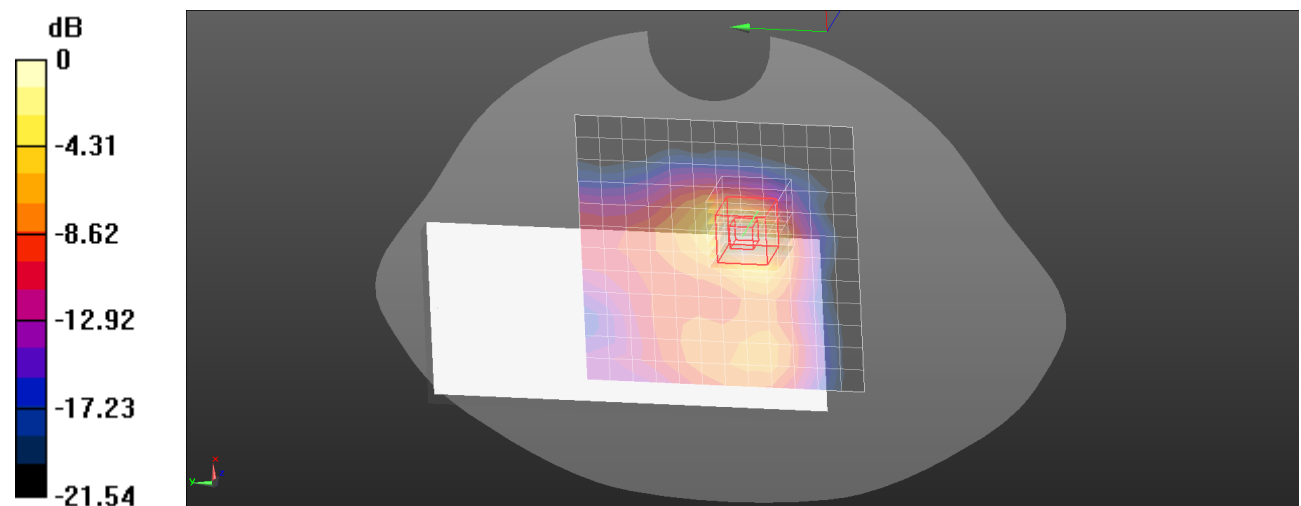

0 dB = 0.337 W/kg = -4.72 dBW/kg

Plot: 9# (Date 2026/01/27)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, Generic FDD-FR1 n 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 42.947$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 707.5 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Right Cheek/Ant1 FR1 n 12 50%RB Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.167 W/kg

Head Right Cheek/Ant1 FR1 n 12 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.493 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.104 W/kg

Smallest distance from peaks to all points 3 dB below = 19.4 mm

Ratio of SAR at M2 to SAR at M1 = 74%

Maximum value of SAR (measured) = 0.168 W/kg

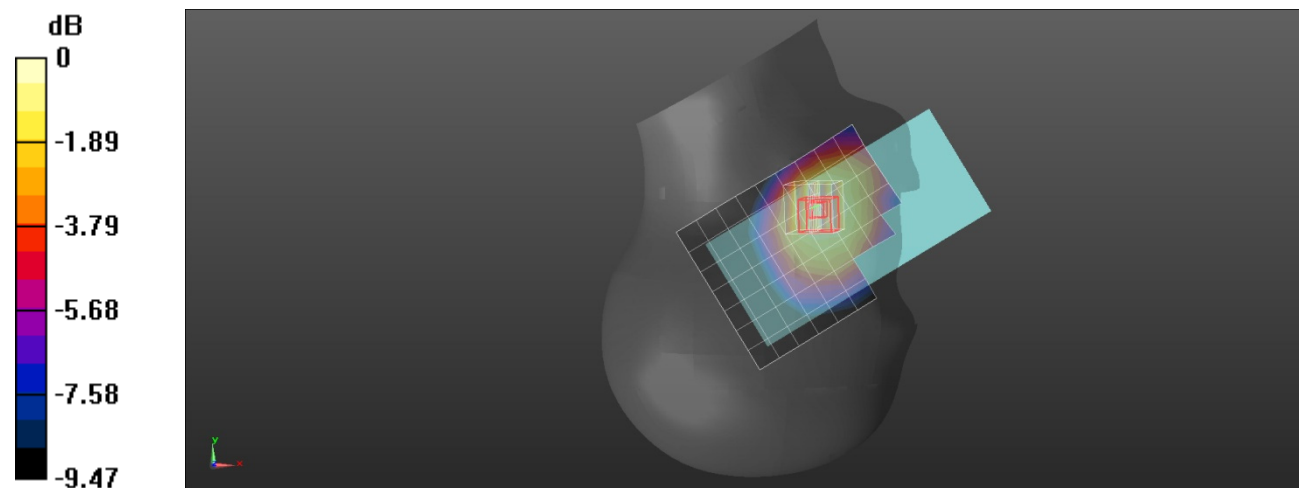

0 dB = 0.168 W/kg = -7.75 dBW/kg

Plot: 10# (Date 2026/01/27)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, Generic FDD-FR1 n 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 42.947$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 707.5 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Ant1 FR1 n 12 50%RB Mid/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.265 W/kg

Body Back/Ant1 FR1 n 12 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.35 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 0.297 W/kg

SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.166 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 73.3%

Maximum value of SAR (measured) = 0.267 W/kg

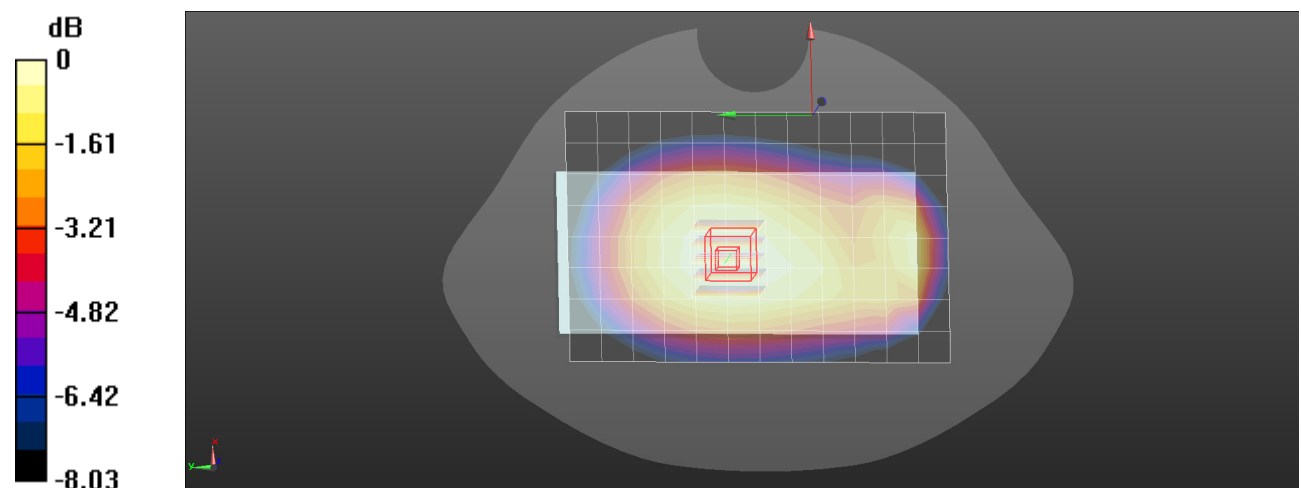

0 dB = 0.267 W/kg = -5.73 dBW/kg

Plot: 11# (Date 2026/01/30)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, Generic TDD-FR1 n 38 (0); Frequency: 2590 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2590$ MHz; $\sigma = 1.903$ S/m; $\epsilon_r = 38.779$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2590 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Left Cheek/Ant2 FR1 n 38 1RB Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0956 W/kg

Head Left Cheek/Ant2 FR1 n 38 1RB Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.844 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.032 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 54.4%

Maximum value of SAR (measured) = 0.100 W/kg

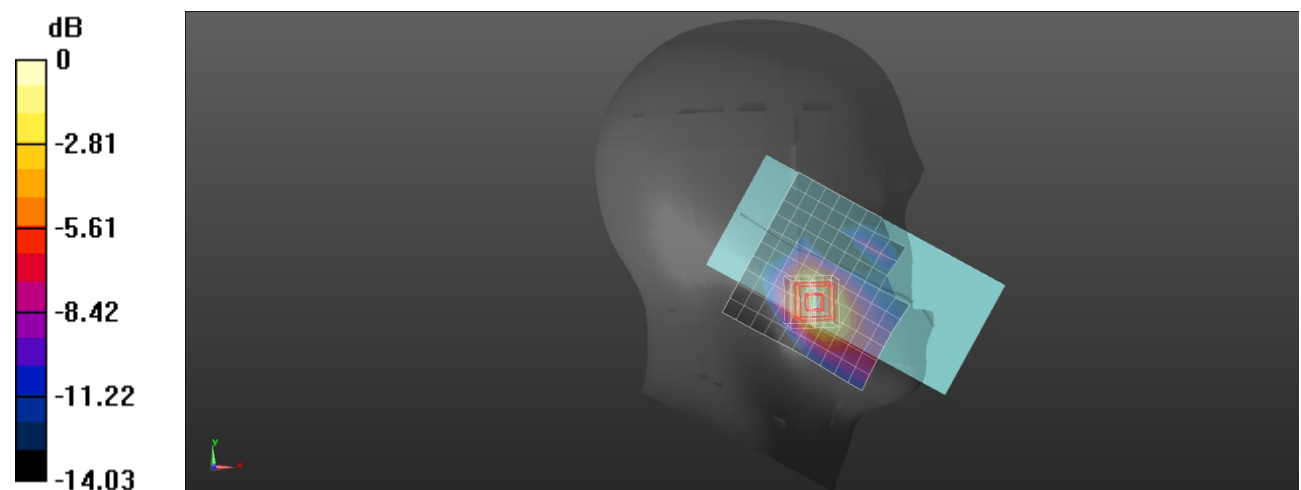

0 dB = 0.100 W/kg = -10.00 dBW/kg

Plot: 12# (Date 2026/01/30)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, Generic TDD-FR1 n 38 (0); Frequency: 2590 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2590$ MHz; $\sigma = 1.903$ S/m; $\epsilon_r = 38.779$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2590 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Ant2 FR1 n 38 1RB Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.411 W/kg

Body Back/Ant2 FR1 n 38 1RB Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.703 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.567 W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.126 W/kg

Smallest distance from peaks to all points 3 dB below = 10.6 mm

Ratio of SAR at M2 to SAR at M1 = 47.3%

Maximum value of SAR (measured) = 0.451 W/kg

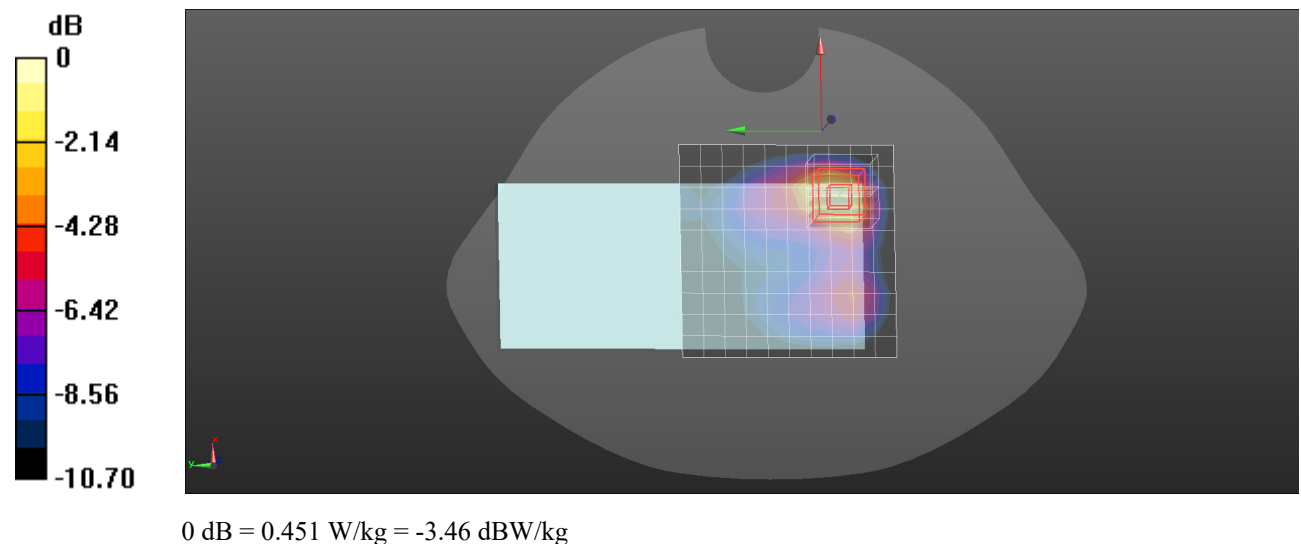

Plot: 13# (Date 2026/01/31)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.958$ S/m; $\epsilon_r = 38.375$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2593 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Left Cheek/Ant2 FR1 n 41 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.104 W/kg

Head Left Cheek/Ant2 FR1 n 41 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.995 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.034 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 55%

Maximum value of SAR (measured) = 0.105 W/kg

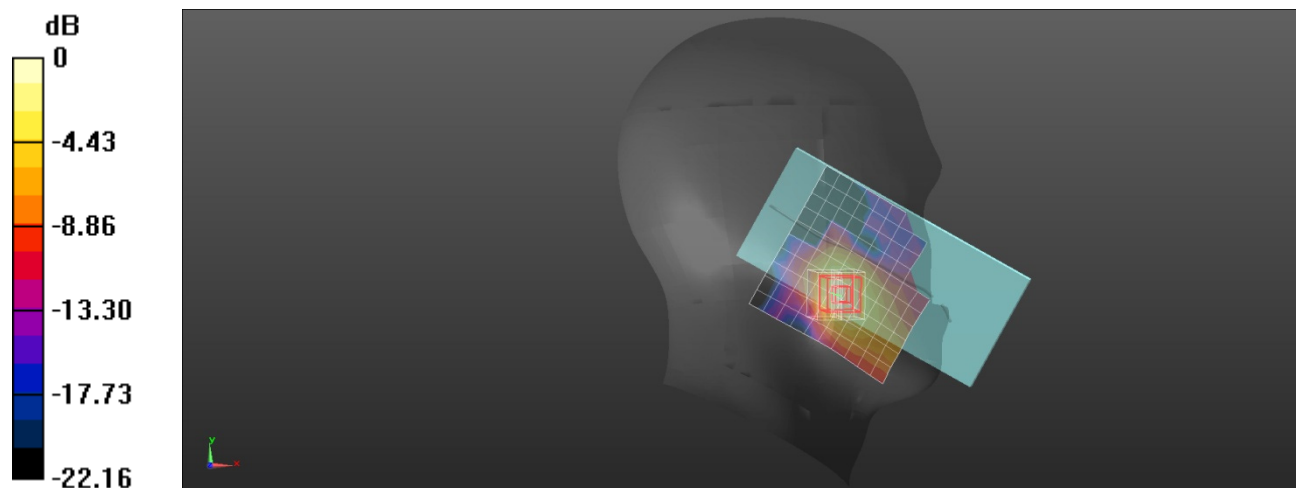

Plot: 14# (Date 2026/01/31)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2640 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2640$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 38.347$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2640 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Ant2 FR1 n 41 1RB High/Area Scan (14x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.471 W/kg

Body Back/Ant2 FR1 n 41 1RB High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.732 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.664 W/kg

SAR(1 g) = 0.313 W/kg; SAR(10 g) = 0.146 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 47%

Maximum value of SAR (measured) = 0.526 W/kg

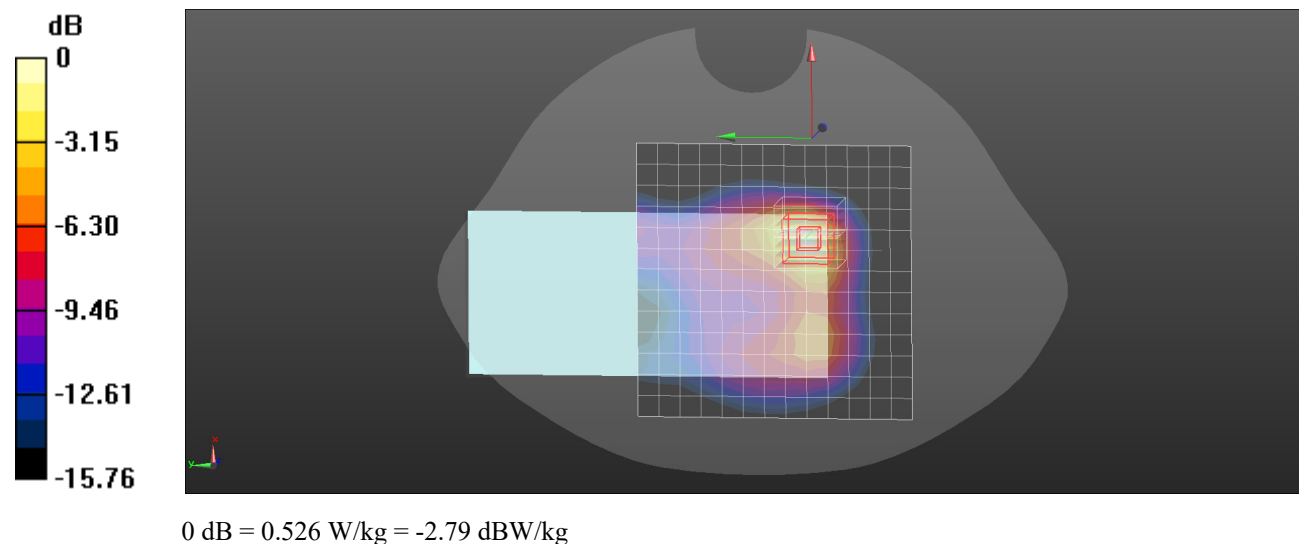

Plot: 15# (Date 2026/01/29)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, FDD-5G NR (0); Frequency: 1760 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1760$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 39.175$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.89, 7.89, 7.89) @ 1760 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Right Cheek/Ant4 FR1 n 66 1RB High/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.598 W/kg

Head Right Cheek/Ant4 FR1 n 66 1RB High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.206 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.833 W/kg

SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.203 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 48.5%

Maximum value of SAR (measured) = 0.621 W/kg

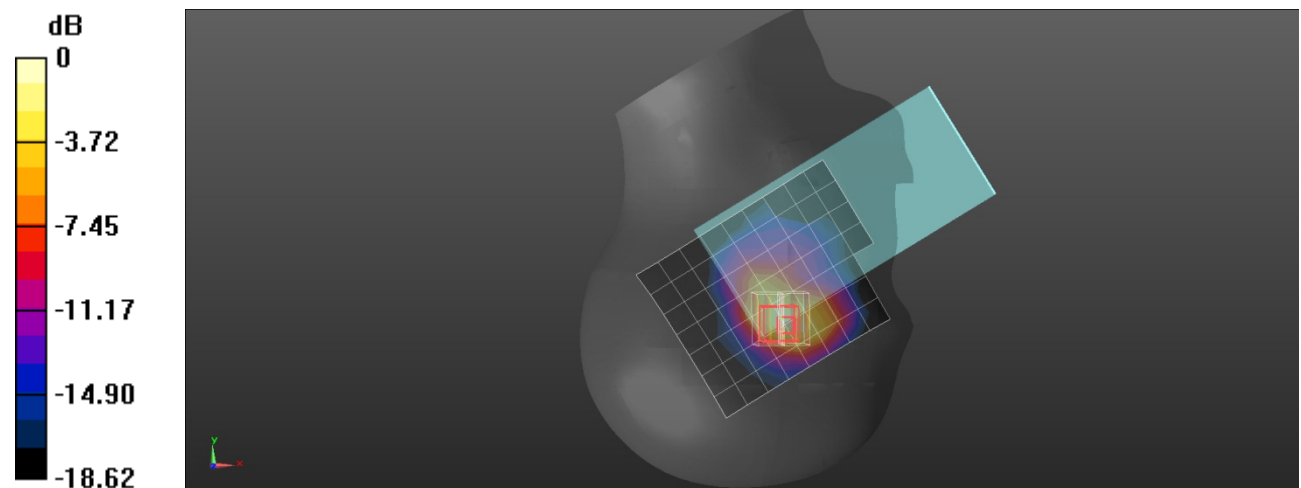

0 dB = 0.621 W/kg = -2.07 dBW/kg

Plot: 16# (Date 2026/01/29)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, FDD-5G NR (0); Frequency: 1760 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1760$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 39.175$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.89, 7.89, 7.89) @ 1760 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/Ant4 FR1 n 66 1RB High/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.484 W/kg

Body Left/Ant4 FR1 n 66 1RB High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.77 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.566 W/kg

SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.167 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.5%

Maximum value of SAR (measured) = 0.477 W/kg

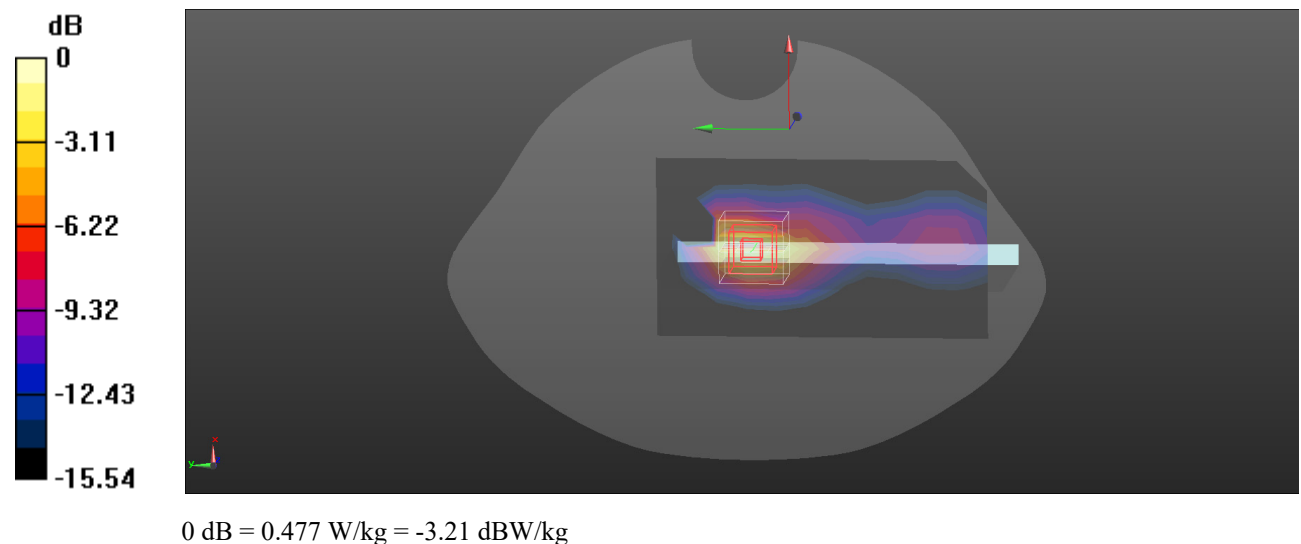

Plot: 17# (Date 2026/01/28)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, Generic FDD-FR1 n 71 (0); Frequency: 688 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 688$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 43.445$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 688 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Right Cheek/Ant1 FR1 n 71 1RB High/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.208 W/kg

Head Right Cheek/Ant1 FR1 n 71 1RB High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.742 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.229 W/kg

SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 76.6%

Maximum value of SAR (measured) = 0.205 W/kg

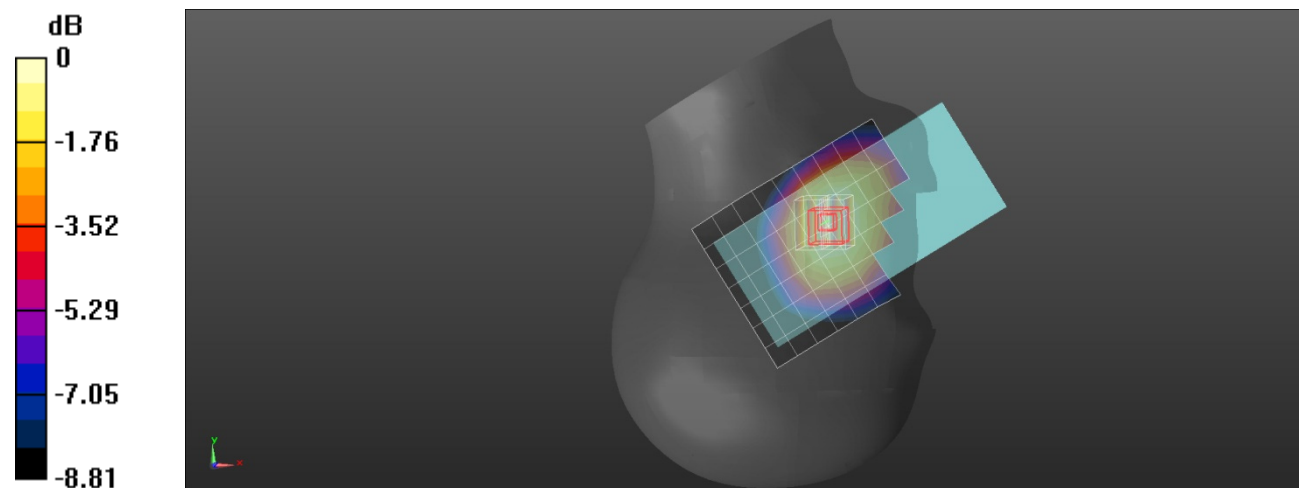

0 dB = 0.205 W/kg = -6.88 dBW/kg

Plot: 18# (Date 2026/01/28)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, Generic FDD-FR1 n 71 (0); Frequency: 688 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 688$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 43.445$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 688 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Ant1 FR1 n 71 1RB High/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.334 W/kg

Body Back/Ant1 FR1 n 71 1RB High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.50 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.552 W/kg

SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.169 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 52.6%

Maximum value of SAR (measured) = 0.446 W/kg

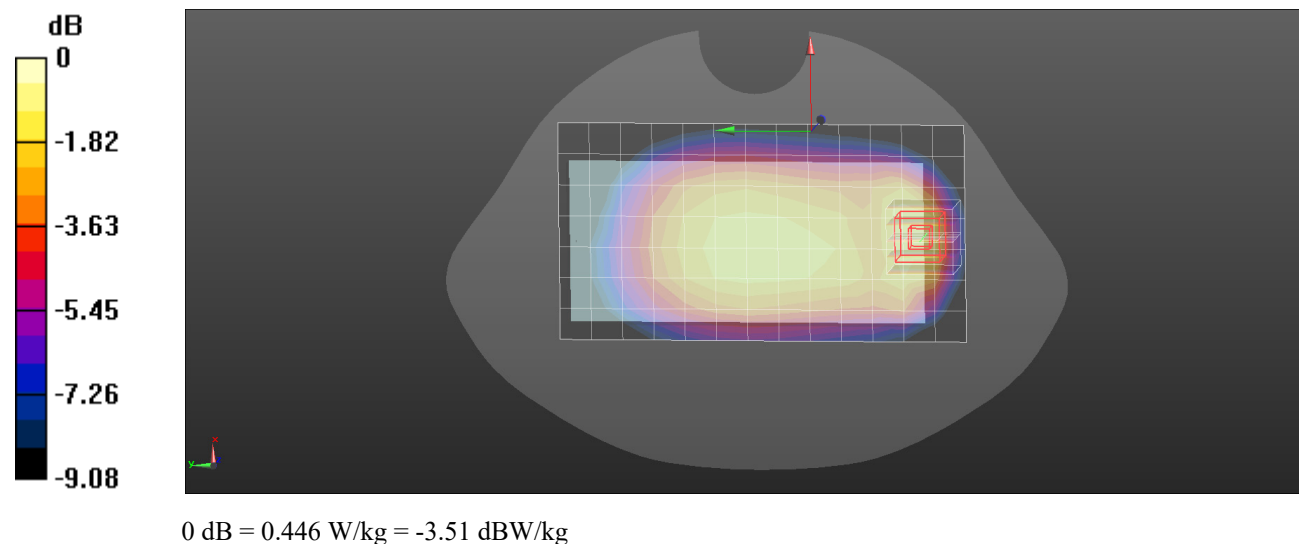

Plot: 19# (Date 2026/02/02)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.985$ S/m; $\epsilon_r = 37.795$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.45, 6.45, 6.45) @ 3500 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Left Cheek/Ant5 FR1 n77 Lower 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.327 W/kg

Head Left Cheek/Ant5 FR1 n77 Lower 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.335 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.621 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.092 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 64.5%

Maximum value of SAR (measured) = 0.446 W/kg

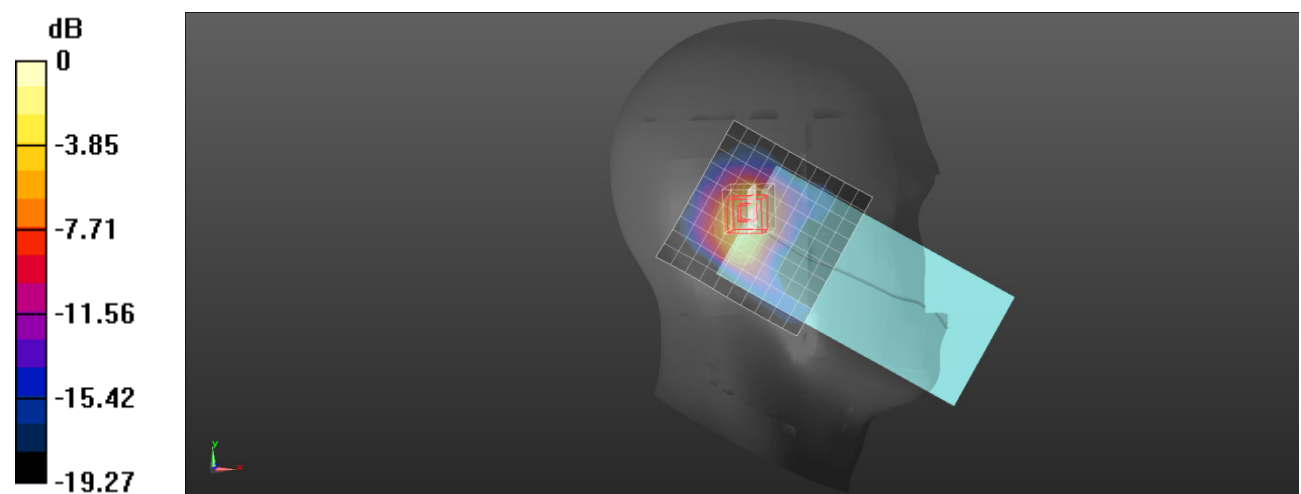

0 dB = 0.446 W/kg = -3.51 dBW/kg

Plot: 20# (Date 2026/02/02)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.985$ S/m; $\epsilon_r = 37.795$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.45, 6.45, 6.45) @ 3500 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Ant5 FR1 n77 Lower 50%RB Mid/Area Scan (11x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.345 W/kg

Body Back/Ant5 FR1 n77 Lower 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.352 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.494 W/kg

SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.098 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 68.6%

Maximum value of SAR (measured) = 0.369 W/kg

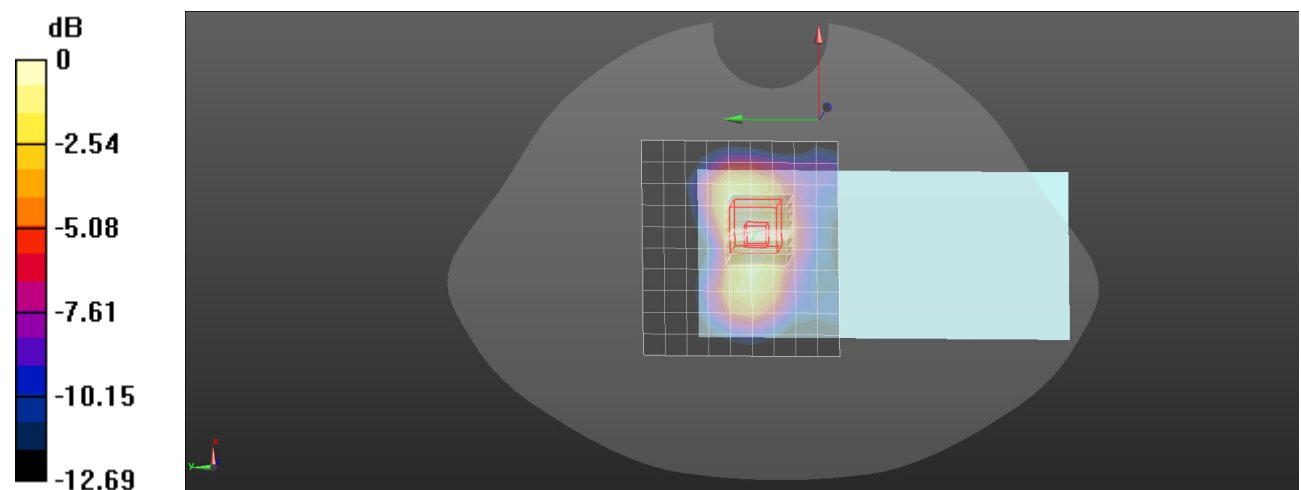

0 dB = 0.369 W/kg = -4.33 dBW/kg

Plot: 21# (Date 2026/02/03)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3650 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3650$ MHz; $\sigma = 3.152$ S/m; $\epsilon_r = 37.328$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.25, 6.25, 6.25) @ 3650 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Left Cheek/Ant5 FR1 n77 Mid 1RB High/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.556 W/kg

Head Left Cheek/Ant5 FR1 n77 Mid 1RB High/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.033 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.925 W/kg

SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.126 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 64.3%

Maximum value of SAR (measured) = 0.659 W/kg

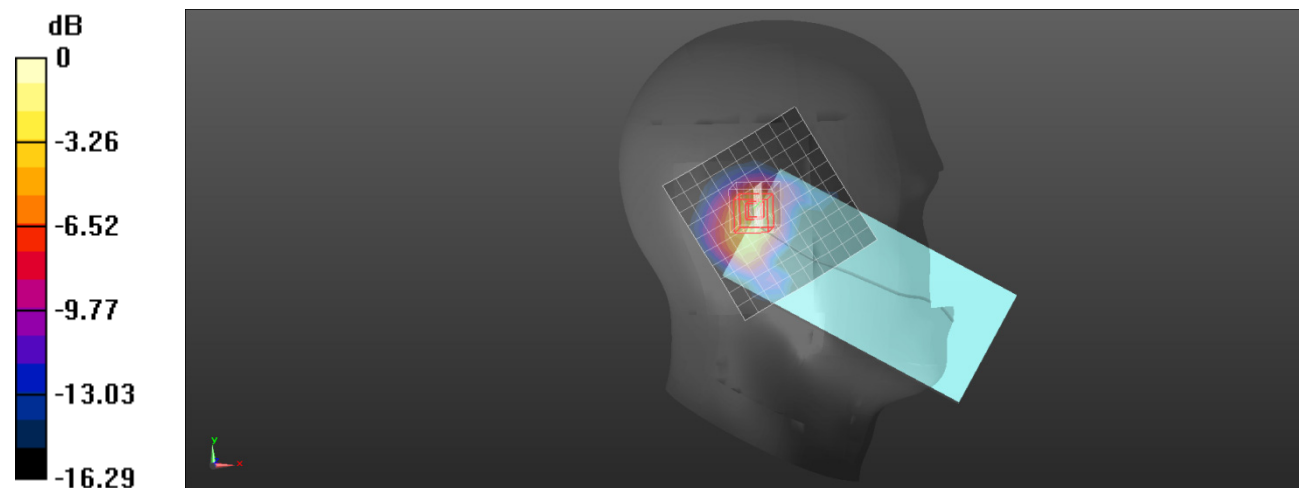

0 dB = 0.659 W/kg = -1.81 dBW/kg

Plot: 22# (Date 2026/02/03)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3625 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3625$ MHz; $\sigma = 3.122$ S/m; $\epsilon_r = 37.375$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.25, 6.25, 6.25) @ 3625 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Ant5 FR1 n77 Mid 1RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.246 W/kg

Body Back/Ant5 FR1 n77 Mid 1RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.096 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.068 W/kg

Smallest distance from peaks to all points 3 dB below = 12.6 mm

Ratio of SAR at M2 to SAR at M1 = 69.1%

Maximum value of SAR (measured) = 0.249 W/kg

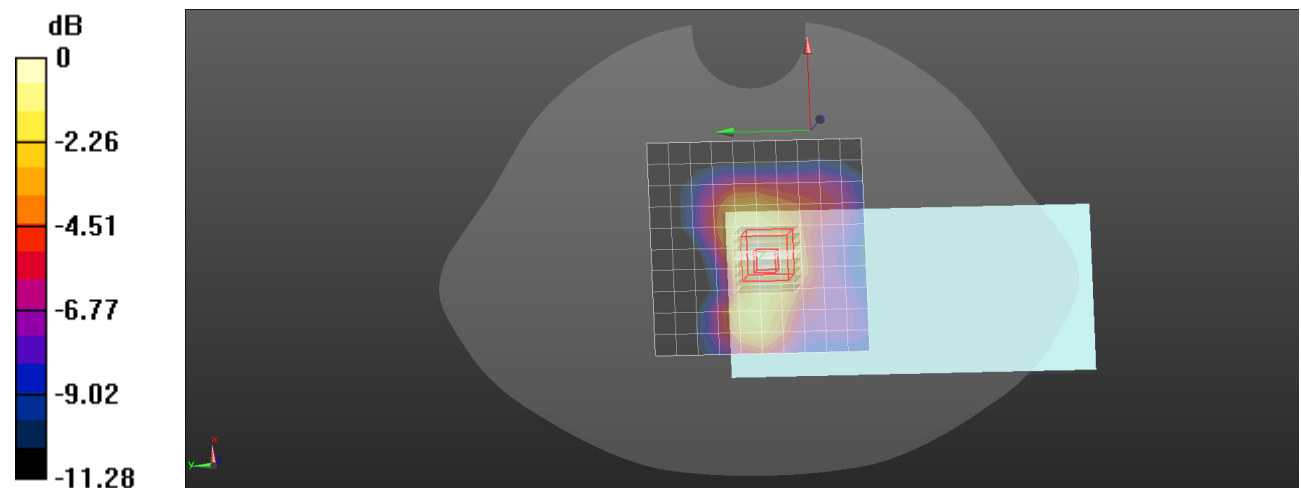

0 dB = 0.249 W/kg = -6.04 dBW/kg

Plot: 23# (Date 2026/02/04)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3750 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3750$ MHz; $\sigma = 3.27$ S/m; $\epsilon_r = 37.141$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.25, 6.25, 6.25) @ 3750 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Left Cheek/Ant5 FR1 n77 Upper 1RB Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.605 W/kg

Head Left Cheek/Ant5 FR1 n77 Upper 1RB Low/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.508 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.401 W/kg; SAR(10 g) = 0.147 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.2%

Maximum value of SAR (measured) = 0.850 W/kg

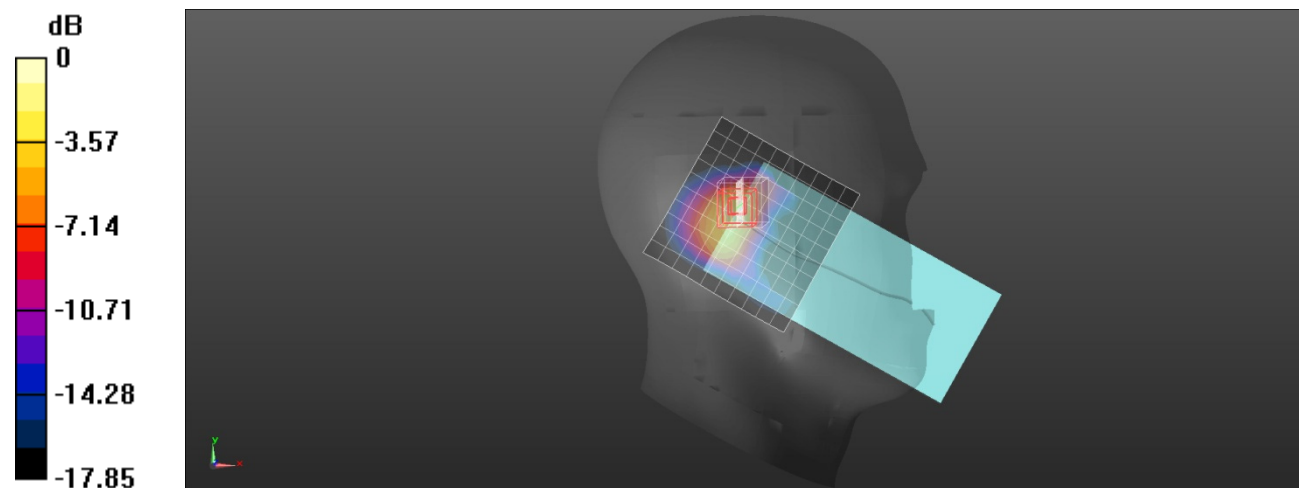

0 dB = 0.850 W/kg = -0.71 dBW/kg

Plot: 24# (Date 2026/02/04)**DUT: 5G digital mobile smartphone; Type: myAvro A1; Serial: 3JEW-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3750 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3750$ MHz; $\sigma = 3.27$ S/m; $\epsilon_r = 37.141$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.25, 6.25, 6.25) @ 3750 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Ant5 FR1 n77 Upper 1RB Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.460 W/kg

Body Back/Ant5 FR1 n77 Upper 1RB Low/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.401 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.640 W/kg

SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.123 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 67.1%

Maximum value of SAR (measured) = 0.469 W/kg

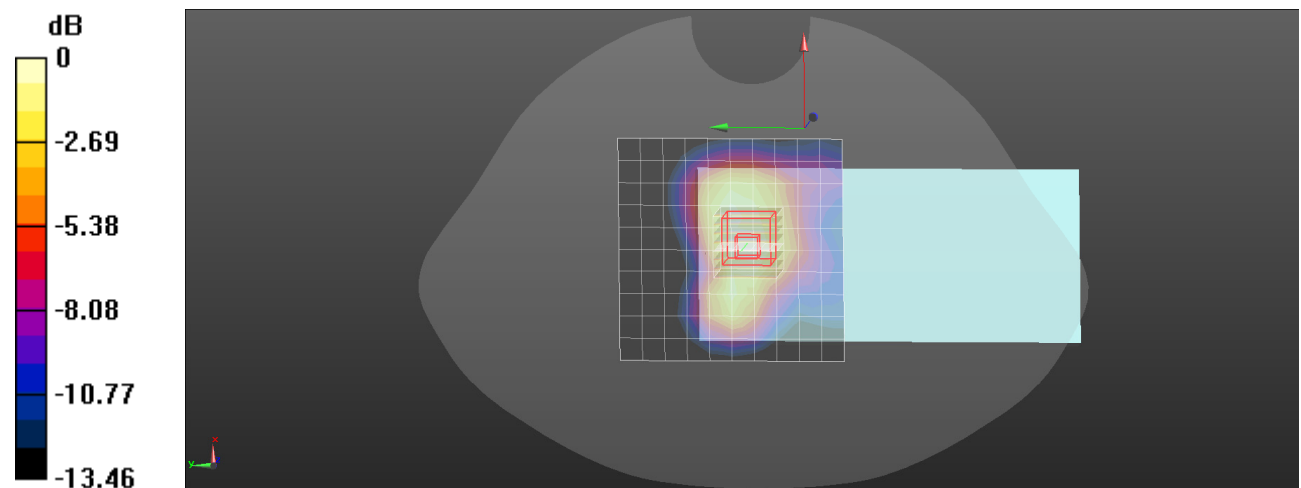

0 dB = 0.469 W/kg = -3.29 dBW/kg