

TEST REPORT

Applicant Name: MYAVRO LIMITED
Address: 50a London Street Reading Berkshire RG1 4SQ United Kingdom
Report Number: 2601P41233E-SAA
FCC ID: 2BU6A-A1

Test Standard (s)

FCC 47 CFR part 2.1093

Sample Description

Product Name: 5G digital mobile smartphone
Model No.: myAvro A1
Multiple Model(s) No.: N/A
Trade Mark: myAvro
Serial Number: 3JEW-1
Date Received: 2026/01/23
Date of Test: 2026/01/26~2026/02/04
Issue Date: 2026/03/13

Test Result:

Pass▲

▲In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Bob Lu

Bob Lu
SAR Engineer

Approved By:

Luke Jiang

Luke Jiang
SAR Engineer

Note: The information marked*is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018Fax: +86-755-33320008www.baclcorp.com.cn

Attestation of Test Results		
Frequency Band	Max. SAR Level(s) Reported(W/kg)	Limit(W/Kg)
LTE Band 42	0.81 W/kg 1g Head SAR 0.41 W/kg 1g Body SAR	1.6
5G NR n2	0.38 W/kg 1g Head SAR 0.43 W/kg 1g Body SAR	
5G NR n5	0.22 W/kg 1g Head SAR 0.50 W/kg 1g Body SAR	
5G NR n7	0.07 W/kg 1g Head SAR 0.25 W/kg 1g Body SAR	
5G NR n12	0.15 W/kg 1g Head SAR 0.24 W/kg 1g Body SAR	
5G NR n38	0.08 W/kg 1g Head SAR 0.32 W/kg 1g Body SAR	
5G NR n41	0.09 W/kg 1g Head SAR 0.36 W/kg 1g Body SAR	
5G NR n66	0.50 W/kg 1g Head SAR 0.39 W/kg 1g Body SAR	
5G NR n71	0.23 W/kg 1g Head SAR 0.39 W/kg 1g Body SAR	
5G NR n77&78	0.49 W/kg 1g Head SAR 0.33 W/kg 1g Body SAR	
Simultaneous(tx)	1.33 W/kg 1g Head SAR 1.28 W/kg 1g Body SAR 1.28 W/kg 1g Hotspot SAR	

Note:

In this case the EUT (Equipment Under Test) is set 10mm away from the phantom, the test distance is 10mm for body.

Applicable Standards	FCC 47 CFR part 2.1093 Radiation exposure evaluation: portable devices
	RF Exposure Procedures: TCB Workshop April 2019
	IEEE 1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
	KDB procedures KDB 447498 D01 General RF Exposure Guidance v06 KDB 648474 D04 Handset SAR v01r03 KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02 KDB 941225 D05 SAR for LTE Devices v02r05 KDB 941225 D06 Hotspot Mode v02r01
Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in FCC 47 CFR part 2.1093 and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures. The results and statements contained in this report pertain only to the device(s) evaluated.	

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY.....	5
EUT DESCRIPTION	6
TECHNICAL SPECIFICATION.....	6
REFERENCE, STANDARDS, AND GUIDELINES	8
SAR LIMITS	8
FACILITIES	9
DESCRIPTION OF TEST SYSTEM.....	10
EQUIPMENT LIST AND CALIBRATION.....	17
EQUIPMENT’S LIST & CALIBRATION INFORMATION	17
SAR MEASUREMENT SYSTEM VERIFICATION	18
LIQUID VERIFICATION.....	18
SYSTEM ACCURACY VERIFICATION	21
SAR SYSTEM VALIDATION DATA	22
EUT TEST STRATEGY AND METHODOLOGY.....	32
TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON’S EAR.....	32
CHEEK/TOUCH POSITION	33
EAR/TILT POSITION.....	33
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS	34
TEST DISTANCE FOR SAR EVALUATION	34
SAR EVALUATION PROCEDURE	35
CONDUCTED OUTPUT POWER MEASUREMENT	36
TEST PROCEDURE.....	36
DESCRIPTION OF TEST CONFIGURATION	37
MAXIMUM TARGET OUTPUT POWER.....	40
TEST RESULTS.....	41
STANDALONE SAR TEST EXCLUSION CONSIDERATIONS.....	67
ANTENNAS LOCATION:	67
ANTENNA DISTANCE TO EDGE (TRX)	68
SAR TEST EXCLUSION FOR THE EUT EDGE CONSIDERATIONS RESULT.....	68
SAR MEASUREMENT RESULTS	69
TEST RESULTS:.....	69
SAR MEASUREMENT VARIABILITY.....	84
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION.....	85
SAR PLOTS	86
APPENDIX A MEASUREMENT UNCERTAINTY	87
APPENDIX B EUT TEST POSITION PHOTOS.....	88
APPENDIX C CALIBRATION CERTIFICATES.....	89
APPENDIX D RETURN LOSS&IMPEDANCE MEASUREMENT	90

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2601P41233E-SAA	Original Report	2026/03/13

EUT DESCRIPTION

This report has been prepared on behalf of **MYAVRO LIMITED** and their product **5G digital mobile smartphone**, Model: **myAvro A1**, FCC ID: **2BU6A-A1** or the EUT (Equipment under Test) as referred to in the rest of this report.

**All measurement and test data in this report was gathered from production sample serial number:3JEW-1(Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2026/01/23.*

Technical Specification

Product Type:	Portable
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Internal Antenna
Proximity Sensor:	None
Operation modes:	GSM Voice, GPRS/EDGE Data, WCDMA (R99, HSUPA/ HSDPA/ HSPA+/ DC-HSDPA) FDD-LTE, TDD-LTE, 5G NR, WLAN, Bluetooth, NFC
EN-DC possible combinations:	DC_2A_n5A, DC_2A_n78A, DC_4A_n5A, DC_4A_n78A, DC_5A_n2A, DC_5A_n7A, DC_5A_n66A, DC_5A_n77A, DC_5A_n78A, DC_7A_n5A, DC_7A_n77A, DC_7A_n78A, DC_17A_n2A, DC_26A_n77A, DC_26A_n78A, DC_38A_n78A, DC_41A_n77A, DC_41A_n78A, DC_66A_n5A, DC_66A_n77A, DC_66A_n78A
Frequency Band:	GSM 850: 824-849 MHz(TX); 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 4: 1710-1755MHz(TX) ; 2110-2155 MHz(RX) WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) LTE Band 4: 1710-1755MHz(TX) ; 2110-2155 MHz(RX) LTE Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 7: 2500-2570 MHz(TX); 2620-2690 MHz(RX) LTE Band 12: 699-716 MHz(TX); 729-746 MHz(RX) LTE Band 13: 777-787 MHz(TX); 746-756 MHz(RX) LTE Band 17: 704-716 MHz(TX); 734-746 MHz(RX) LTE Band 25: 1850-1915 MHz(TX); 1930-1995 MHz(RX) LTE Band 26: 814-849 MHz(TX); 859-894 MHz(RX) LTE Band 38: 2570-2620 MHz(TX/RX) LTE Band 41: 2496-2690 MHz(TX/RX) LTE Band 42: 3450-3550 MHz(TX/RX) LTE Band 66: 1710-1780 MHz(TX) ; 2110-2180 MHz(RX) LTE Band 71: 663-698 MHz(TX) ; 617-652 MHz(RX) 5G NR n2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) 5G NR n5: 824-849 MHz(TX); 869-894 MHz(RX) 5G NR n7: 2500-2570 MHz(TX); 2620-2690 MHz(RX) 5G NR n12: 699-716 MHz(TX); 729-746 MHz(RX) 5G NR n38: 2570-2620 MHz(TX/RX) 5G NR n41: 2496-2690 MHz(TX/RX) 5G NR n66: 1710-1780 MHz(TX); 2110-2180 MHz(RX) 5G NR n71: 663-698 MHz(TX); 617-652 MHz(RX) 5G NR n77 Lower: 3450-3550 MHz(TX/RX) 5G NR n77 Middle: 3550-3700 MHz(TX/RX) 5G NR n77 Upper: 3700-3980 MHz(TX/RX) 5G NR n78 Lower: 3450-3550 MHz(TX/RX) 5G NR n78 Middle: 3550-3700 MHz(TX/RX) 5G NR n78 Upper: 3700-3800 MHz(TX/RX) WLAN 2.4G: 2412-2462 MHz (TX/RX) WLAN 5.2G: 5150 -5250 MHz(TX/RX)

	WLAN 5.3G: 5250 MHz-5350 MHz(TX/RX) WLAN 5.6G: 5470 MHz-5725 MHz(TX/RX) WLAN 5.8G: 5725-5850 MHz(TX/RX) U-NII 5 (5925-6425 MHz Band): 5955-6415 MHz (802.11ax he20) 5965-6405 MHz (802.11ax he40) 5985-6385 MHz (802.11ax he80) U-NII 6 (6425-6525 MHz Band): 6435-6515 MHz (802.11ax he20) 6445-6525 MHz (802.11ax he40) 6465-6545 MHz (802.11ax he80) U-NII 7 (6525-6875 MHz Band): 6535-6855 MHz (802.11ax he20) 6565-6845 MHz (802.11ax he40) 6625-6865 MHz (802.11ax he80) U-NII 8 (6875-7125 MHz Band): 6875-7095 MHz (802.11ax he20) 6885-7085 MHz (802.11ax he40) 6945-7025 MHz (802.11ax he80) Bluetooth: 2402-2480MHz(TX/RX) BLE_1M:2402-2480 MHz(TX/RX) BLE_2M:2404-2478 MHz(TX/RX) NFC: 13.56MHz
Dimensions (L×W×H):	170 × 78 × 10mm
Rated Input Voltage:	DC 3.88V from Rechargeable Battery
Normal Operation:	Head and Body
EUT Received Status:	Good

Remark:

1. The data of GSM/WCDMA/LTE/EN-DC Band (except for LTE band 42), NFC, WLAN/Bluetooth and SAR simultaneous transmission description, please refer to FCC ID: 2BU6A-A1, SAR report of 2602P41234E-20A#, issued by Bay Area Compliance Laboratories Corp.(Dongguan).
2. The data of WLAN 6G, please refer to FCC ID: 2BU6A-A1, SAR report of Ti-CC26020196-701# and Ti-CC26020196-703#, issued by Shenzhen BALUN Technology Co., Ltd.

Notes:

1. This device supports 5GNR FR1 bands, including NSA mode and SA mode.
2. SAR test for NR bands and LTE anchor Bands were performed separately due to limitations in SAR probe calibration factors. And, due to test setup limitations, SAR testing for NR was performed using test mode software to establish the connection.
3. NSA and SA mode should perform SAR separately. Based on chip algorithms, for the maximum power of SA mode is the same as NSA total power level, so SA standalone total power level SAR can represent NSA mode SAR.
4. 5G NR SA mode, the power level is the more than as 5G NR NSA mode, so only 5G NR SA mode power table show in this report.
5. For 5G NR, the simultaneous transmission analysis is used standalone SAR at total power level to show compliance.
6. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so chose DFT-s-OFDM to perform SAR testing.

REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

SAR Limits

FCC Limit (1g Tissue)

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.6	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that maybe incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg for 1g SAR applied to the EUT.


FACILITIES

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect data is located at 5F(B-West) ,6F,7F,the 3rd Phase of Wan Li Industrial Building D,Shihua Rd, FuTian Free Trade Zone, Shenzhen, China


The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 715558, the FCC Designation No.: CN5045.

Each test item follows test standards and with no deviation.

These measurements were performed with the automated near-field scanning system DASY6 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:

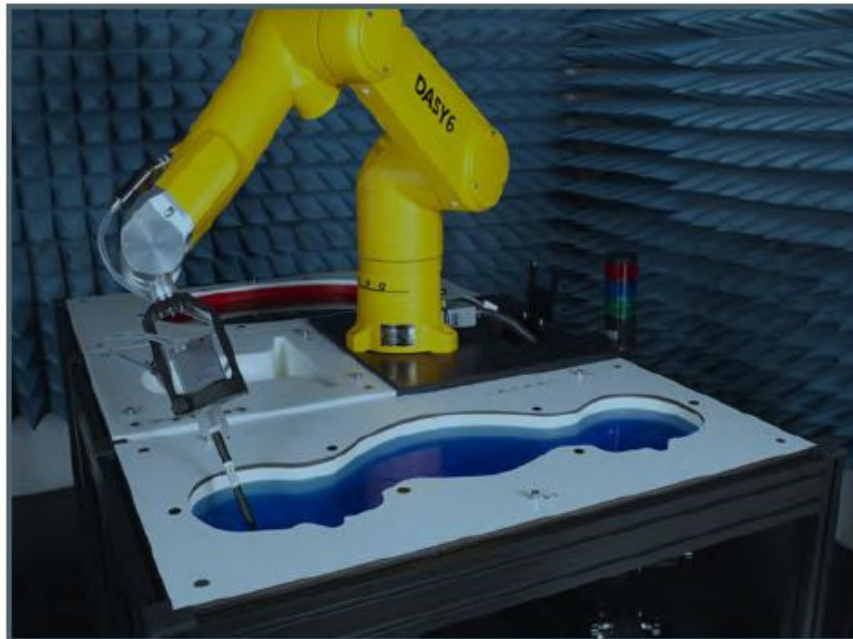

The DASY6 system for performing compliance tests consists of the following items:

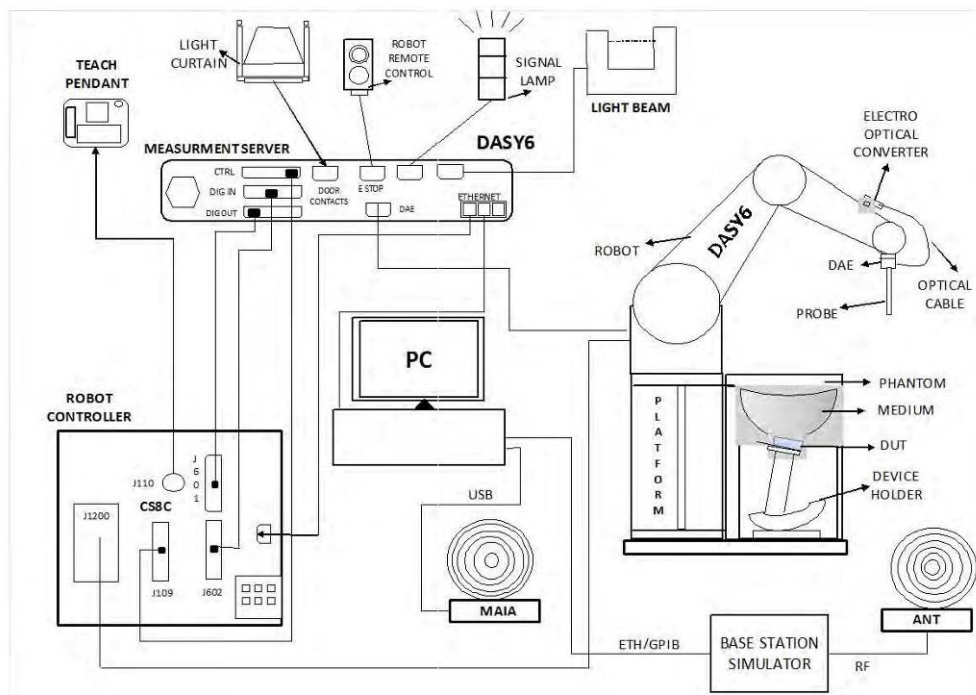

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

DASY6 Measurement Server

The DASY6 measurement server is based on a PC/104 CPU board with a 400 MHz Intel ULV Celeron, 128 MB chip-disk and 128 MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16-bit AD converter system for optical detection and digital I/O interface are contained on the DASY6 I/O board, which is directly connected to the PC/104 bus of the CPU board.



The measurement server performs all real-time data evaluations of field measurements and surface detection, controls robot movements, and handles safety operations. The PC operating system cannot interfere with these time-critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program- controlled robot movements. Furthermore, the measurement server is equipped with an expansion port, which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Connection of devices from any other supplier could seriously damage the measurement server.

Data Acquisition Electronics

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

EX3DV4 E-Field Probes

Frequency	4 MHz to >10 GHz Linearity: ± 0.2 dB (30 MHz to 10 GHz)
Directivity	± 0.1 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY6, EASY4/MRI

SAM Twin Phantom

The SAM Twin Phantom (shown in front of DASY6) is a fiberglass shell phantom with shell thickness 2 mm, except in the ear region where the thickness is increased to 6 mm. The phantom has three measurement areas: 1) Left Head, 2) Right Head, and 3) Flat Section. For larger devices, the use of the ELI-Phantom (shown behind DASY6) is required. For devices such as glasses with a wireless link, the Face Down Phantom is the most suitable (between the SAM Twin and ELI phantoms).

When the phantom is mounted inside allocated slot of the DASY6 platform, phantom reference points can be taught directly in the DASY5 V5.2 software. When the DASY6 platform is used to mount the


Phantom, some of the phantom teaching points cannot be reached by the robot in DASY5 V5.2. A special tool called P1a-P2aX-Former is provided to transform two of the three points, P1 and P2, to reachable locations. To use these new teaching points, a revised phantom configuration file is required.

In addition to our standard broadband liquids, the phantom can be used with the following tissue simulating liquids:

Sugar-water-based liquids can be left permanently in the phantom. Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation.

DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).

Do not use other organic solvents without previously testing the solvent resistivity of the phantom. Approximately 25 liters of liquid is required to fill the SAM Twin phantom.

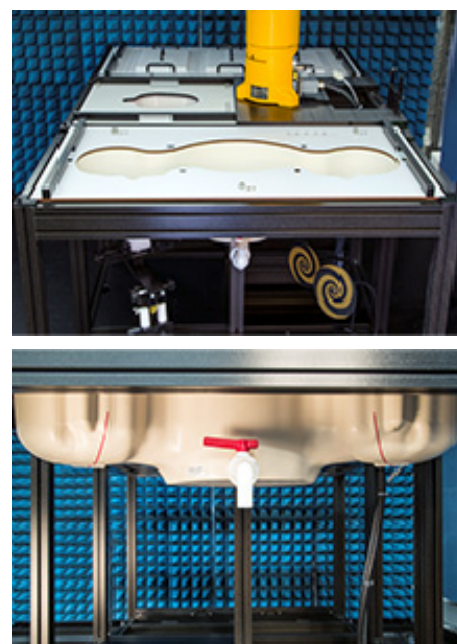

ELI Phantom

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6 GHz. ELI is fully compatible with the latest draft of the standard IEEE 1528 and the use of all known tissue simulating liquids. ELI has been optimized for performance and can be integrated into a SPEAG standard phantom table. A cover is provided to prevent evaporation of water and changes in liquid parameters. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points.

The phantom can be used with the following tissue simulating liquids:

- Sugar-water-based liquids can be left permanently in the phantom. Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation.
- DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).
- Do not use other organic solvents without previously testing the solvent resistivity of the phantom.


Approximately 25 liters of liquid is required to fill the ELI phantom.

Robots

The DASY6 system uses the high-precision industrial robots TX60L, TX90XL, and RX160L from Staubli SA (France). The TX robot family - the successor of the well-known RX robot family - continues to offer the features important for DASY6 applications:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is provided

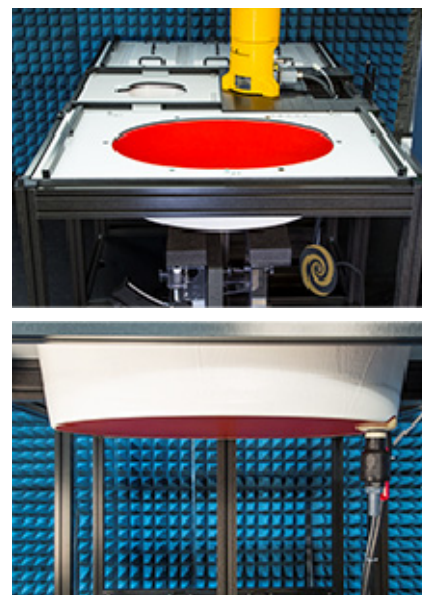

Calibration Frequency Points for EX3DV4 E-Field Probes SN: 7896 Calibrated: 2025/12/11

Calibration Frequency Point (MHz)	Frequency Range (MHz)		Conversion Factor		
	From	To	X	Y	Z
750 Head	650	850	9.40	9.40	9.40
900 Head	850	1000	9.00	9.00	9.00
1750 Head	1650	1850	7.89	7.89	7.89
1900 Head	1850	2000	7.55	7.55	7.55
2300 Head	2200	2400	7.40	7.40	7.40
2450 Head	2400	2500	7.15	7.15	7.15
2600 Head	2500	2700	7.00	7.00	7.00
3300 Head	3200	3400	6.60	6.60	6.60
3500 Head	3400	3600	6.45	6.45	6.45
3700 Head	3600	3800	6.25	6.25	6.25
3900 Head	3800	4000	6.18	6.18	6.18
5250 Head	5140	5360	5.11	5.11	5.11
5600 Head	5490	5700	4.51	4.51	4.51
5800 Head	5700	5900	4.61	4.61	4.61
6500 Head	5900	7200	5.20	5.20	5.20

SAR Scan Procedures**Step 1: Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm² step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 5mm, with the side length of the 10g cube is 21.5mm.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power Drift Measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x 7 x 7 (5mm x 5mm x 5mm) providing a volume of 30 mm in the X & Y & Z axis.

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE 1528:2013

Recommended Tissue Dielectric Parameters for Head liquid

Table A.3 – Dielectric properties of the head tissue-equivalent liquid

Frequency MHz	Relative permittivity ϵ_r	Conductivity (σ) S/m
300	45,3	0,87
450	43,5	0,87
<i>750</i>	<i>41,9</i>	<i>0,89</i>
835	41,5	0,90
900	41,5	0,97
1 450	40,5	1,20
<i>1 500</i>	<i>40,4</i>	<i>1,23</i>
<i>1 640</i>	<i>40,2</i>	<i>1,31</i>
<i>1 750</i>	<i>40,1</i>	<i>1,37</i>
1 800	40,0	1,40
1 900	40,0	1,40
2 000	40,0	1,40
<i>2 100</i>	<i>39,8</i>	<i>1,49</i>
<i>2 300</i>	<i>39,5</i>	<i>1,67</i>
2 450	39,2	1,80
<i>2 600</i>	<i>39,0</i>	<i>1,96</i>
3 000	38,5	2,40
<i>3 500</i>	<i>37,9</i>	<i>2,91</i>
<i>4 000</i>	<i>37,4</i>	<i>3,43</i>
<i>4 500</i>	<i>36,8</i>	<i>3,94</i>
<i>5 000</i>	<i>36,2</i>	<i>4,45</i>
<i>5 200</i>	<i>36,0</i>	<i>4,66</i>
<i>5 400</i>	<i>35,8</i>	<i>4,86</i>
<i>5 600</i>	<i>35,5</i>	<i>5,07</i>
<i>5 800</i>	<i>35,3</i>	<i>5,27</i>
6 000	35,1	5,48

NOTE For convenience, permittivity and conductivity values at those frequencies which are not part of the original data provided by Drossos et al. [33] or the extension to 5 800 MHz are provided (i.e. the values shown *in italics*). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6 000 MHz that were linearly extrapolated from the values at 3 000 MHz and 5 800 MHz.

EQUIPMENT LIST AND CALIBRATION

Equipment's List & Calibration Information

Equipment	Model	S/N	Calibration Date	Calibration Due Date
DASY5 Test Software	DASY52 52.10.4	N/A	NCR	NCR
DASY6 Measurement Server	DASY6 6.0.31	N/A	NCR	NCR
Data Acquisition Electronics	DAE4	1325	2025/09/28	2026/09/27
Dosimetric E-field Probes	EX3DV4	7896	2025/12/11	2026/12/10
Mounting Device	MD4HHTV5	SD 000 H01 KA	NCR	NCR
SAM Twin Phantom	SAM-Twin V8.0	1962	NCR	NCR
Dipole, 750MHz	D750V3	1229	2023/03/24	2026/03/23
Dipole, 1750MHz	D1750V2	1199	2023/03/27	2026/03/26
Dipole, 1900MHz	D1900V2	5d231	2023/02/17	2026/02/16
Dipole, 2600MHz	D2600V2	1207	2023/03/27	2026/03/26
Dipole, 3500MHz	D3500V2	1113	2023/10/18	2026/10/17
Dipole, 3700MHz	D3700V2	1084	2023/10/20	2026/10/19
Dipole, 3900MHz	D3900V2	1058	2023/09/26	2026/09/25
Simulated Tissue Liquid Head	HBBL600-10000V6	250428-2	Each Time	/
Network Analyzer	E5071C	SER MY46519680	2025/04/29	2026/04/28
Dielectric Assessment Kit	DAK-3.5	1248	NCR	NCR
MXG Analog Signal Generator	N5181A	MY48180408	2025/09/22	2026/09/21
USB wideband power sensor	U2021XA	MY52350001	2025/04/29	2026/04/28
Directional Cpupler	855673	3307	2025/06/26	2026/06/25
20dB Attenuator	2	BH9879	NCR	NCR
RF Power Amplifier	5205FE	1014	NCR	NCR
Amplifier	ZVE-8G+	558401902	NCR	NCR
Thermometer	DTM3000	N/A	2025/09/23	2026/09/22
Temperature & Humidity Meter	10316377	N/A	2025/09/23	2026/09/22
Wideband Radio Communication Tester	CMW500	141718	2025/07/18	2026/07/17
UXM 5G Wireless Test Platform	E7515B	MY58120284	2025/05/16	2026/05/15
Spectrum Analyzer	FSV40	101942	2025/09/01	2026/08/31
Straight Steel Ruler	600mm	N/A	2024/12/11	2027/12/10

Note:

NCR: No Calibration Required.


The Dipole calibration methods and procedures used were as detailed in:

FCC KDB Publication Number: "KDB865664 D01 SAR Measurement 100 MHz to 6 GHz"

1. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
2. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.
3. The verify result is on APPENDIX D.

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

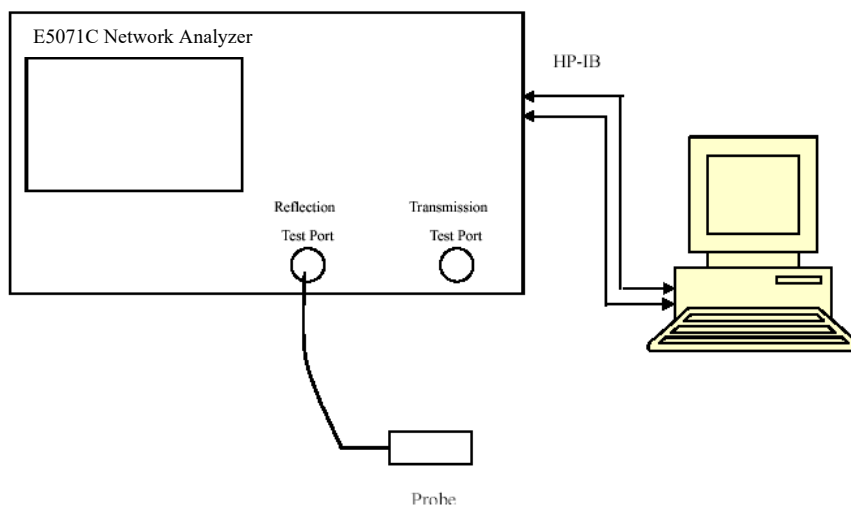

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
750	Simulated Tissue Liquid Head	40.412	0.919	41.90	0.89	-3.55	3.26	± 5
834	Simulated Tissue Liquid Head	40.100	0.921	41.50	0.90	-3.37	2.33	± 5
836.5	Simulated Tissue Liquid Head	40.091	0.921	41.50	0.90	-3.40	2.33	± 5
839	Simulated Tissue Liquid Head	40.082	0.922	41.50	0.90	-3.42	2.44	± 5

*Liquid Verification above was performed on 2026/01/26.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
706.5	Simulated Tissue Liquid Head	42.953	0.887	42.13	0.89	1.95	-0.34	± 5
707.5	Simulated Tissue Liquid Head	42.947	0.887	42.13	0.89	1.94	-0.34	± 5
708.5	Simulated Tissue Liquid Head	42.940	0.887	42.12	0.89	1.95	-0.34	± 5
750	Simulated Tissue Liquid Head	42.681	0.897	41.90	0.89	1.86	0.79	± 5

*Liquid Verification above was performed on 2026/01/27.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
673	Simulated Tissue Liquid Head	43.493	0.877	42.31	0.88	2.80	-0.34	± 5
680.5	Simulated Tissue Liquid Head	43.469	0.878	42.27	0.89	2.84	-1.35	± 5
688	Simulated Tissue Liquid Head	43.445	0.880	42.23	0.89	2.88	-1.12	± 5
750	Simulated Tissue Liquid Head	43.245	0.891	41.90	0.89	3.21	0.11	± 5

*Liquid Verification above was performed on 2026/01/28.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1730	Simulated Tissue Liquid Head	39.183	1.367	40.10	1.36	-2.29	0.51	± 5
1745	Simulated Tissue Liquid Head	39.179	1.373	40.08	1.37	-2.25	0.22	± 5
1750	Simulated Tissue Liquid Head	39.178	1.375	40.07	1.37	-2.23	0.36	± 5
1760	Simulated Tissue Liquid Head	39.175	1.379	40.06	1.38	-2.21	-0.07	± 5

*Liquid Verification above was performed on 2026/01/29.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1870	Simulated Tissue Liquid Head	41.072	1.350	40.00	1.40	2.68	-3.57	± 5
1880	Simulated Tissue Liquid Head	41.032	1.352	40.00	1.40	2.58	-3.43	± 5
1890	Simulated Tissue Liquid Head	40.991	1.354	40.00	1.40	2.48	-3.29	± 5
1900	Simulated Tissue Liquid Head	40.951	1.355	40.00	1.40	2.38	-3.21	± 5

*Liquid Verification above was performed on 2026/01/28.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
2525	Simulated Tissue Liquid Head	38.837	1.848	39.10	1.88	-0.67	-1.70	± 5
2535	Simulated Tissue Liquid Head	38.828	1.857	39.09	1.89	-0.67	-1.75	± 5
2545	Simulated Tissue Liquid Head	38.819	1.865	39.07	1.90	-0.64	-1.84	± 5
2590	Simulated Tissue Liquid Head	38.779	1.903	39.01	1.95	-0.59	-2.41	± 5
2595	Simulated Tissue Liquid Head	38.774	1.907	39.01	1.95	-0.60	-2.21	± 5
2600	Simulated Tissue Liquid Head	38.770	1.911	39.00	1.96	-0.59	-2.50	± 5

*Liquid Verification above was performed on 2026/01/30.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
2546.01	Simulated Tissue Liquid Head	38.404	1.906	39.07	1.90	-1.70	0.32	± 5
2593	Simulated Tissue Liquid Head	38.375	1.958	39.01	1.95	-1.63	0.41	± 5
2600	Simulated Tissue Liquid Head	38.371	1.966	39.00	1.96	-1.61	0.31	± 5
2640	Simulated Tissue Liquid Head	38.347	2.010	38.95	2.00	-1.55	0.50	± 5

*Liquid Verification above was performed on 2026/01/31.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
3460	Simulated Tissue Liquid Head	37.822	2.928	37.95	2.87	-0.34	2.02	± 5
3500	Simulated Tissue Liquid Head	37.795	2.985	37.90	2.91	-0.28	2.58	± 5
3540	Simulated Tissue Liquid Head	37.767	3.042	37.86	2.95	-0.25	3.12	± 5

*Liquid Verification above was performed on 2026/02/02.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
3600	Simulated Tissue Liquid Head	37.421	3.093	37.80	3.01	-1.00	2.76	± 5
3625	Simulated Tissue Liquid Head	37.375	3.122	37.78	3.04	-1.07	2.70	± 5
3650	Simulated Tissue Liquid Head	37.328	3.152	37.75	3.07	-1.12	2.67	± 5
3700	Simulated Tissue Liquid Head	37.234	3.211	37.70	3.12	-1.24	2.92	± 5
3750	Simulated Tissue Liquid Head	37.141	3.270	37.65	3.17	-1.35	3.15	± 5

*Liquid Verification above was performed on 2026/02/03.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
3840	Simulated Tissue Liquid Head	38.379	3.220	37.56	3.26	2.18	-1.23	± 5
3900	Simulated Tissue Liquid Head	38.290	3.296	37.50	3.33	2.11	-1.02	± 5
3930	Simulated Tissue Liquid Head	38.245	3.334	37.47	3.36	2.07	-0.77	± 5

*Liquid Verification above was performed on 2026/02/04.


System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- $s = 15 \text{ mm} \pm 0,2 \text{ mm}$ for $300 \text{ MHz} \leq f \leq 1\,000 \text{ MHz}$;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $1\,000 \text{ MHz} < f \leq 3\,000 \text{ MHz}$;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $3\,000 \text{ MHz} < f \leq 6\,000 \text{ MHz}$.

System Verification Setup Block Diagram

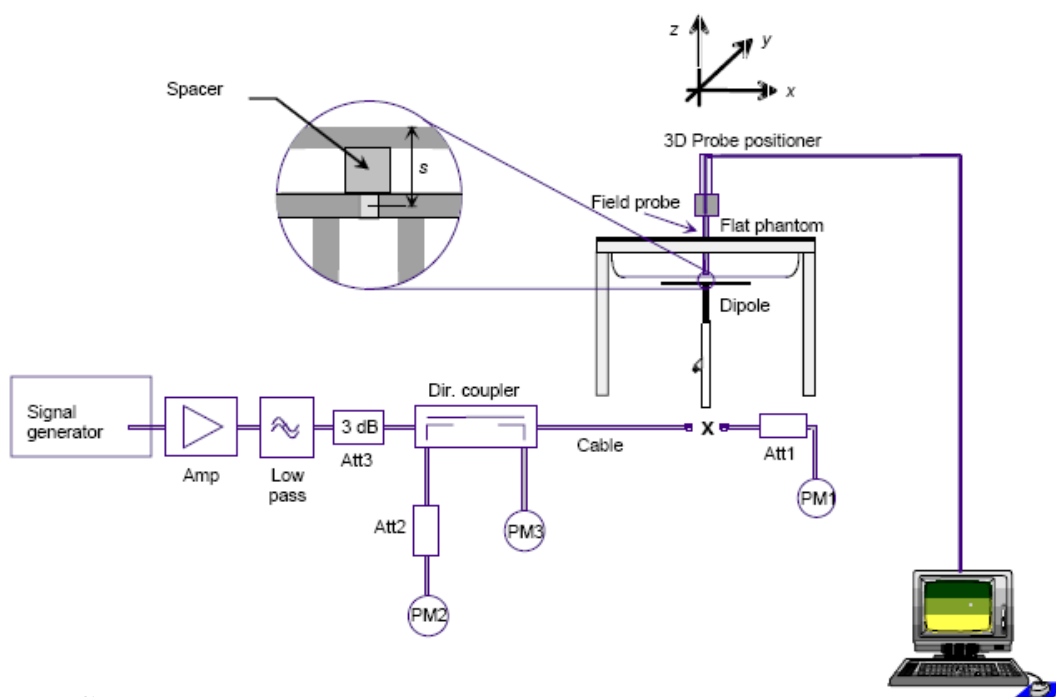

System Accuracy Check Results

Date	Frequency Band (MHz)	Liquid Type	Input Power (mW)	Measured SAR (W/kg)	Normalized to 1W (W/kg)	Target Value (W/Kg)	Delta (%)	Tolerance (%)
2026/01/26	750	Head	100	1g 0.893	8.93	8.41	6.183	± 10
2026/01/27	750	Head	100	1g 0.808	8.08	8.41	-3.924	± 10
2026/01/28	750	Head	100	1g 0.872	8.72	8.41	3.686	± 10
2026/01/29	1750	Head	100	1g 3.67	36.7	36.0	1.944	± 10
2026/01/28	1900	Head	100	1g 4.02	40.2	39.9	0.752	± 10
2026/01/30	2600	Head	100	1g 5.30	53.0	55.2	-3.986	± 10
2026/01/31	2600	Head	100	1g 5.47	54.7	55.2	-0.906	± 10
2026/02/02	3500	Head	100	1g 6.52	65.2	66.4	-1.807	± 10
2026/02/03	3700	Head	100	1g 6.42	64.2	66.7	-3.748	± 10
2026/02/04	3900	Head	100	1g 6.48	64.8	68.6	-5.539	± 10

Note:

All the SAR values are normalized to 1Watt forward power.

SAR SYSTEM VALIDATION DATA

System Performance 750 MHz Head (Date 2026/01/26)

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1229

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.412$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 750 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Head 750MHz Pin=100mW/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.13 W/kg

Configuration/Head 750MHz Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.63 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.893 W/kg; SAR(10 g) = 0.612 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 67.5%

Maximum value of SAR (measured) = 1.18 W/kg

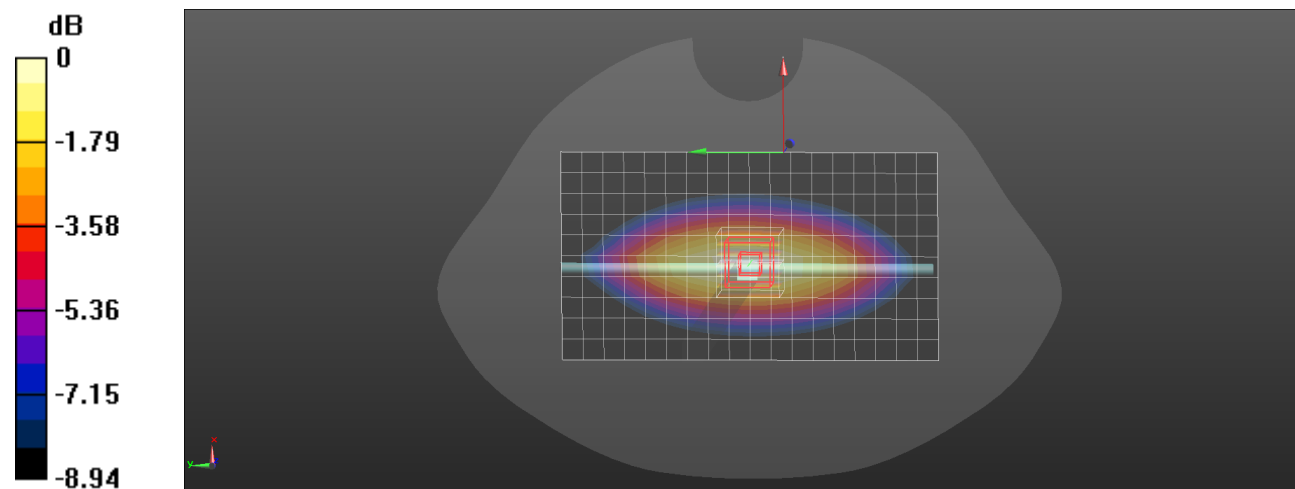

System Performance 750 MHz Head (Date 2026/01/27)**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1229**

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.681$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 750 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Head 750MHz Pin=100mW/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.10 W/kg

Configuration/Head 750MHz Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.64 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.808 W/kg; SAR(10 g) = 0.546 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 66.4%

Maximum value of SAR (measured) = 1.08 W/kg

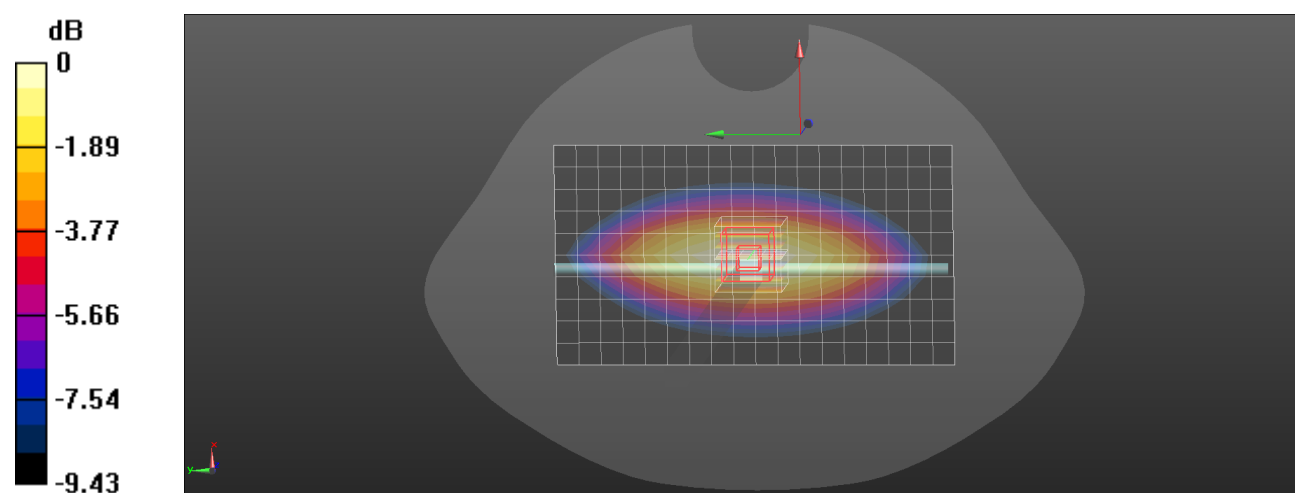

0 dB = 1.08 W/kg = 0.33 dBW/kg

System Performance 750 MHz Head (Date 2026/01/28)**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1229**

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 43.245$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 750 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Head 750MHz Pin=100mW/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.16 W/kg

Configuration/Head 750MHz Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.08 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.872 W/kg; SAR(10 g) = 0.587 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 66.3%

Maximum value of SAR (measured) = 1.15 W/kg

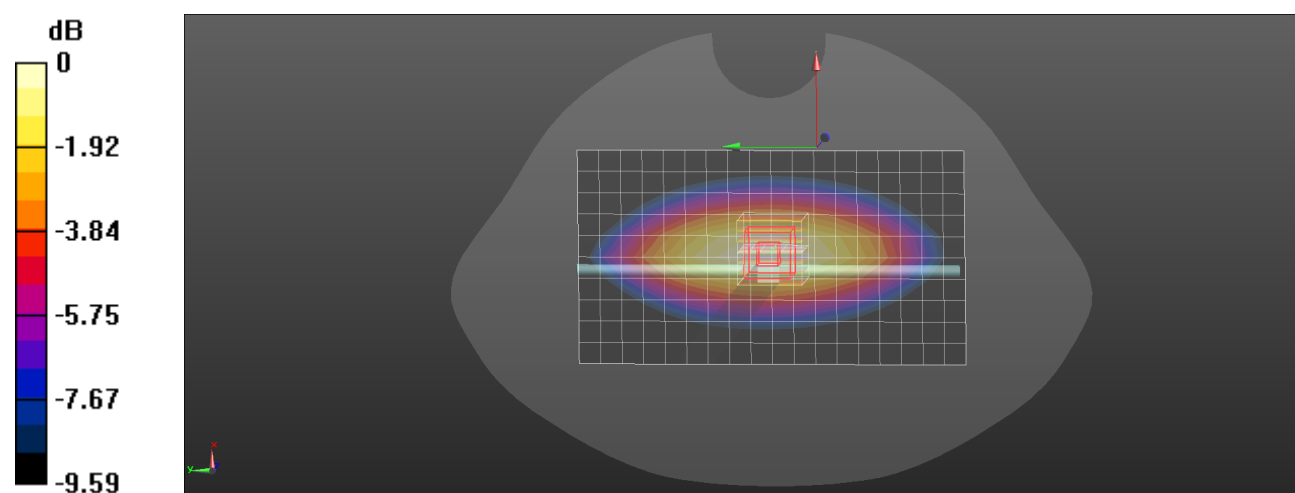

0 dB = 1.15 W/kg = 0.61 dBW/kg

System Performance 1750 MHz Head (Date 2026/01/29)**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1199**

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 39.178$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.89, 7.89, 7.89) @ 1750 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Head 1750MHz Pin=100mW/Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.09 W/kg

Configuration/Head 1750MHz Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.11 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 6.40 W/kg

SAR(1 g) = 3.67 W/kg; SAR(10 g) = 2.05 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.3%

Maximum value of SAR (measured) = 5.45 W/kg

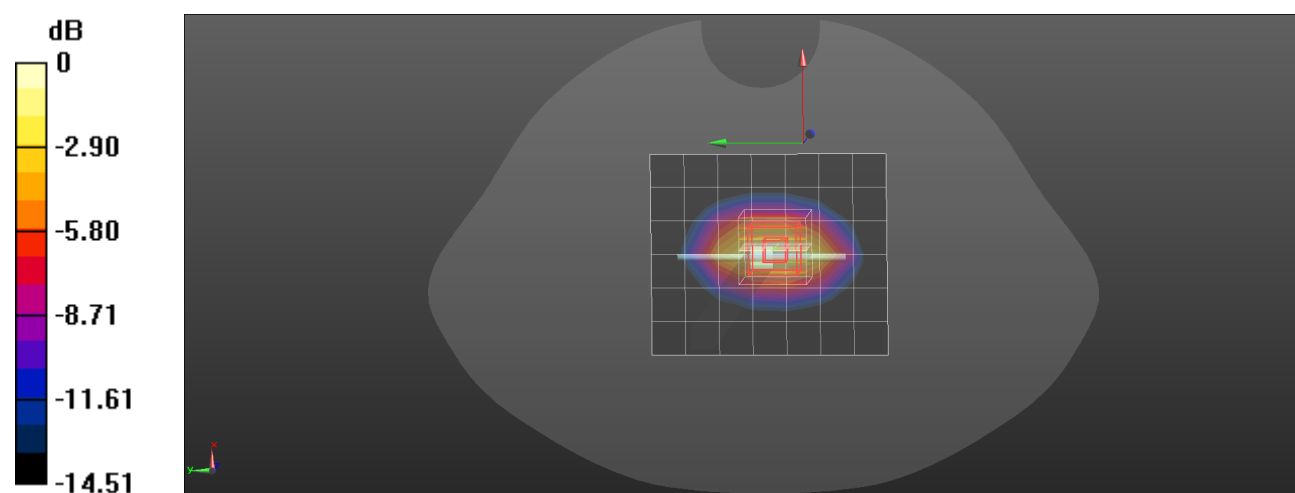

0 dB = 5.45 W/kg = 7.36 dBW/kg

System Performance 1900 MHz Head (Date 2026/01/28)**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d231**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.355$ S/m; $\epsilon_r = 40.951$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.55, 7.55, 7.55) @ 1900 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Head 1900MHz Pin=100mW/Area Scan (9x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 6.11 W/kg

Configuration/Head 1900MHz Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.19 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 6.88 W/kg

SAR(1 g) = 4.02 W/kg; SAR(10 g) = 2.19 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 58%

Maximum value of SAR (measured) = 5.87 W/kg

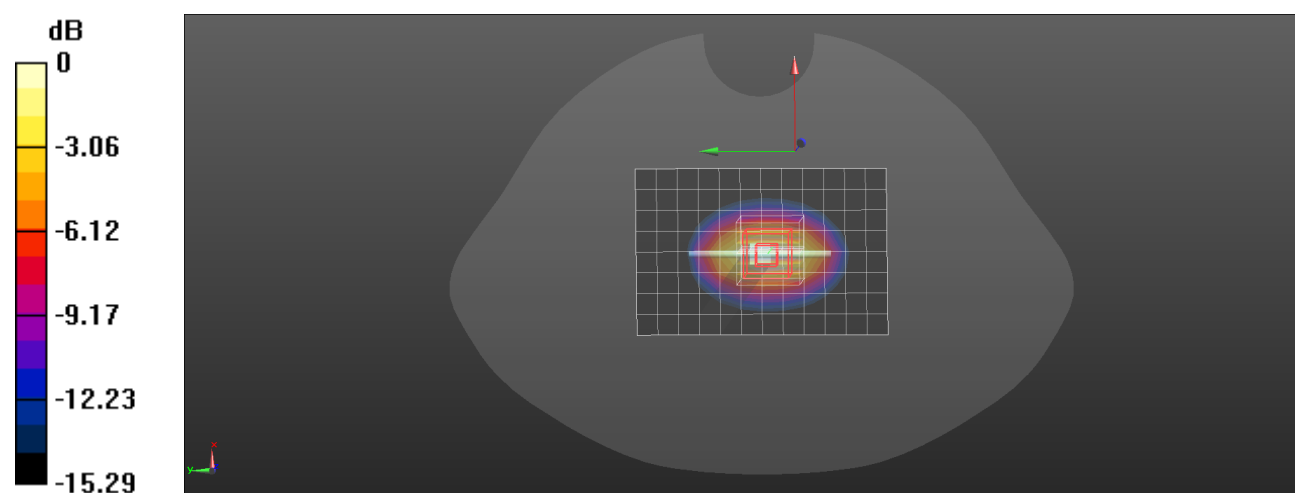

0 dB = 5.87 W/kg = 7.69 dBW/kg

System Performance 2600 MHz Head (Date 2026/01/30)**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1207**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.911$ S/m; $\epsilon_r = 38.77$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2600 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Head 2600MHz Pin=100mW/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 8.34 W/kg

Configuration/Head 2600MHz Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.36 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 10.1 W/kg

SAR(1 g) = 5.3 W/kg; SAR(10 g) = 2.55 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

Maximum value of SAR (measured) = 8.47 W/kg

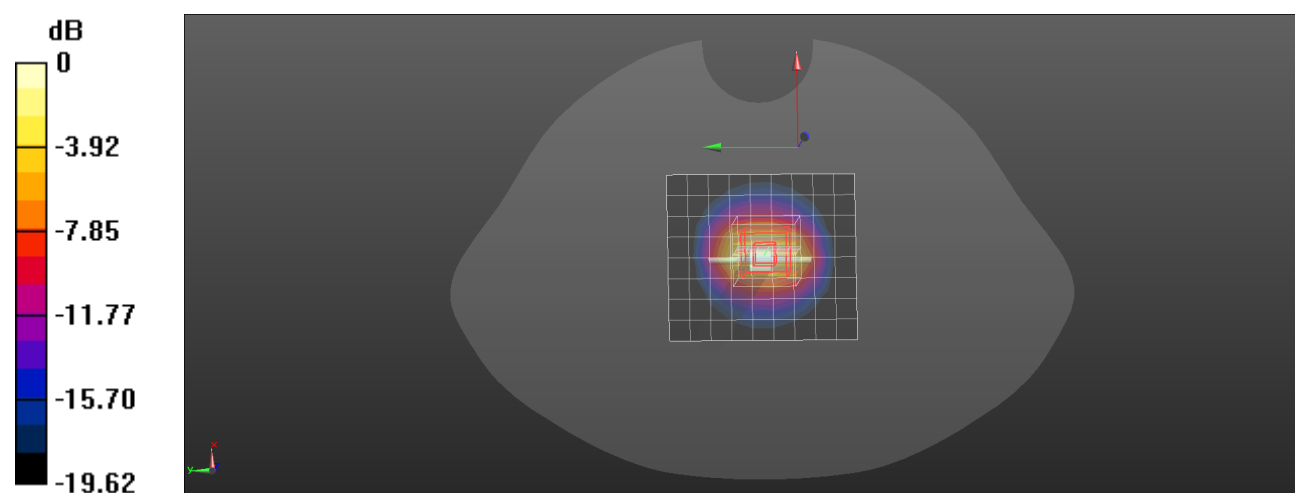

0 dB = 8.47 W/kg = 9.28 dBW/kg

System Performance 2600 MHz Head (Date 2026/01/31)**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1207**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.966$ S/m; $\epsilon_r = 38.371$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2600 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Head 2600MHz Pin=100mW/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 8.29 W/kg

Configuration/Head 2600MHz Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.45 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 10.7 W/kg

SAR(1 g) = 5.47 W/kg; SAR(10 g) = 2.65 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 52.3%

Maximum value of SAR (measured) = 8.87 W/kg

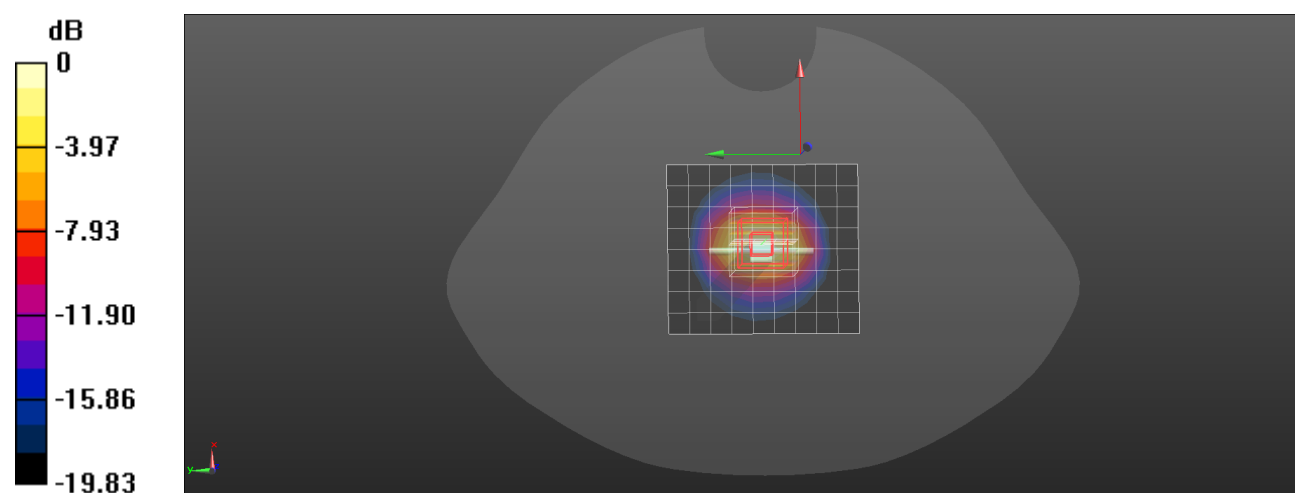

0 dB = 8.87 W/kg = 9.48 dBW/kg

System Performance 3500 MHz Head (Date 2026/02/02)**DUT: Dipole 3500 MHz; Type: D3500V2; Serial: 1113**

Communication System: UID 0, CW (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.985$ S/m; $\epsilon_r = 37.795$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.45, 6.45, 6.45) @ 3500 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Head 3500MHz Pin=100mW/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 9.53 W/kg

Configuration/Head 3500MHz Pin=100mW/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 47.18 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 14.0 W/kg

SAR(1 g) = 6.52 W/kg; SAR(10 g) = 2.7 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 74.6%

Maximum value of SAR (measured) = 11.0 W/kg

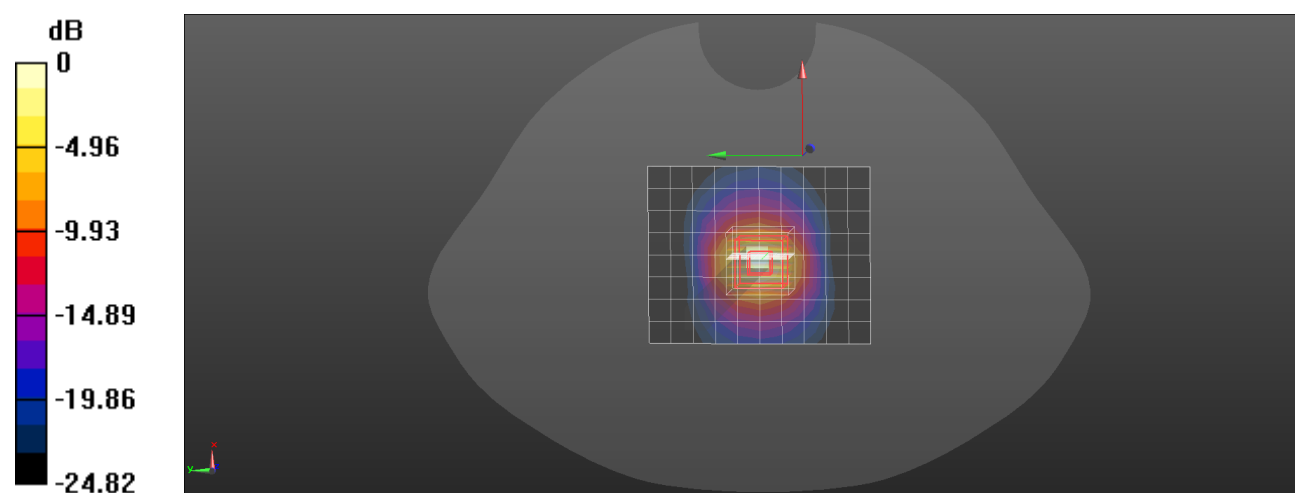

System Performance 3700 MHz Head (Date 2026/02/03)**DUT: Dipole 3700 MHz; Type: D3700V2; Serial: 1084**

Communication System: UID 0, CW (0); Frequency: 3700 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3700$ MHz; $\sigma = 3.211$ S/m; $\epsilon_r = 37.234$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.25, 6.25, 6.25) @ 3700 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Head 3700MHz Pin=100mW/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 13.0 W/kg

Configuration/Head 3700MHz Pin=100mW/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 52.62 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 13.8 W/kg

SAR(1 g) = 6.42 W/kg; SAR(10 g) = 2.68 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 74.1%

Maximum value of SAR (measured) = 10.9 W/kg

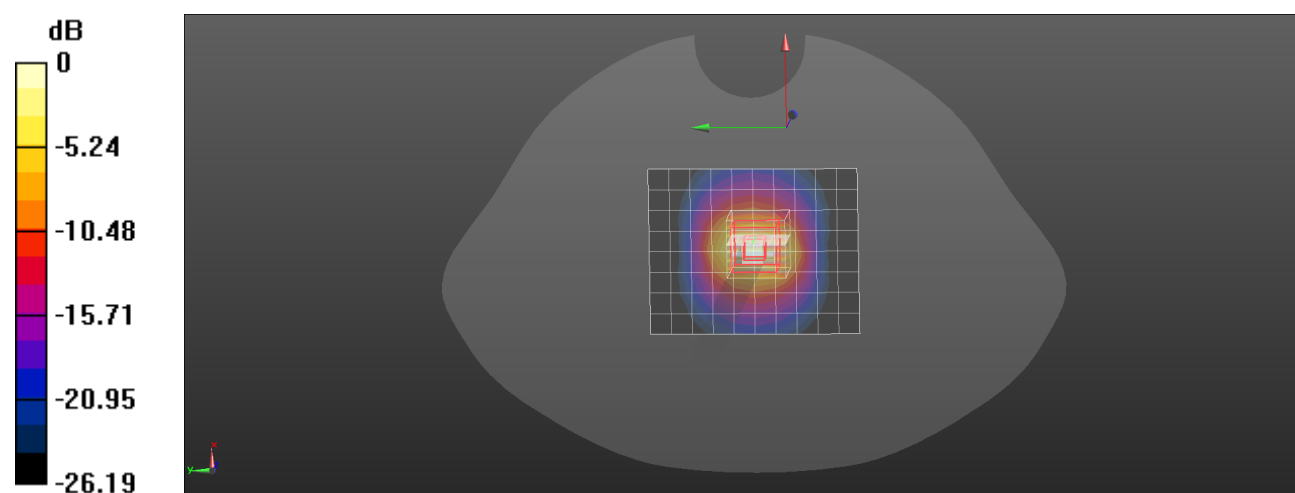

0 dB = 10.9 W/kg = 10.37 dBW/kg

System Performance 3900 MHz Head (Date 2026/02/04)**DUT: Dipole 3900 MHz; Type: D3900V2; Serial: 1058**

Communication System: UID 0, CW (0); Frequency: 3900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3900$ MHz; $\sigma = 3.296$ S/m; $\epsilon_r = 38.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.18, 6.18, 6.18) @ 3900 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Head 3900MHz Pin=100mW/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 11.4 W/kg

Configuration/Head 3900MHz Pin=100mW/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 48.73 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 15.1 W/kg

SAR(1 g) = 6.48 W/kg; SAR(10 g) = 2.49 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 71.9%

Maximum value of SAR (measured) = 11.5 W/kg

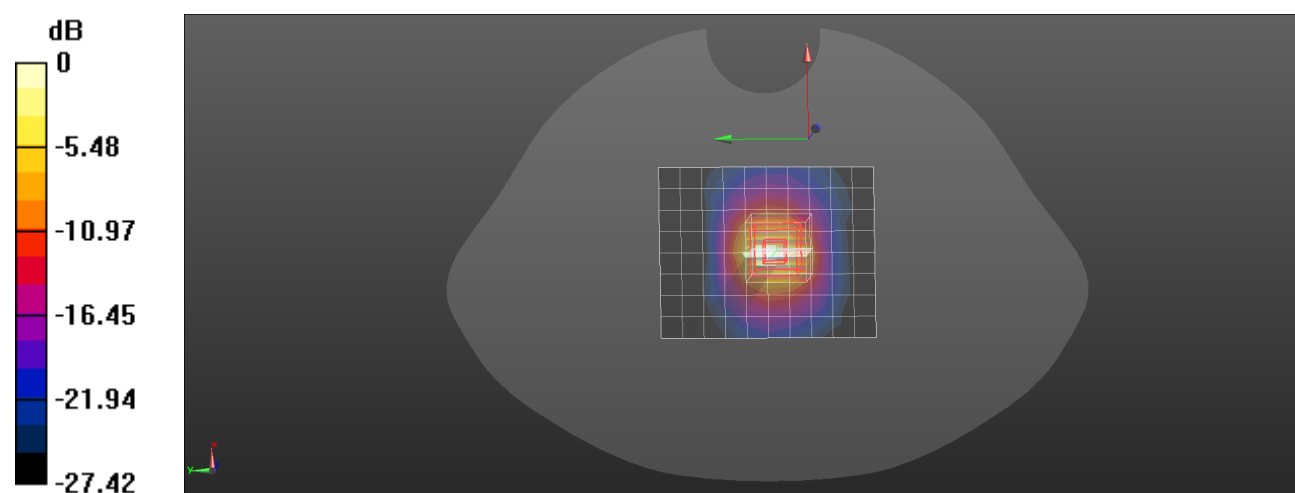



0 dB = 11.5 W/kg = 10.61 dBW/kg

EUT TEST STRATEGY AND METHODOLOGY

Test Positions for Device Operating Next to a Person's Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point”. The “test device reference point” should be located at the same level as the center of the earpiece region. The “vertical centerline” should bisect the front surface of the handset at its top and bottom edges. A “ear reference point” is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the “phantom reference plane” defined by the three lines joining the center of each “ear reference point” (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the “N-F” line defined along the base of the ear spacer that contains the “ear reference point”. For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The “test device reference point” is aligned to the “ear reference point” on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”. This is called the “initial ear position”. While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

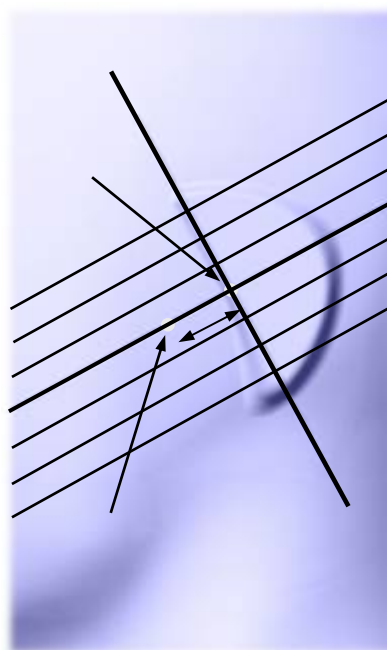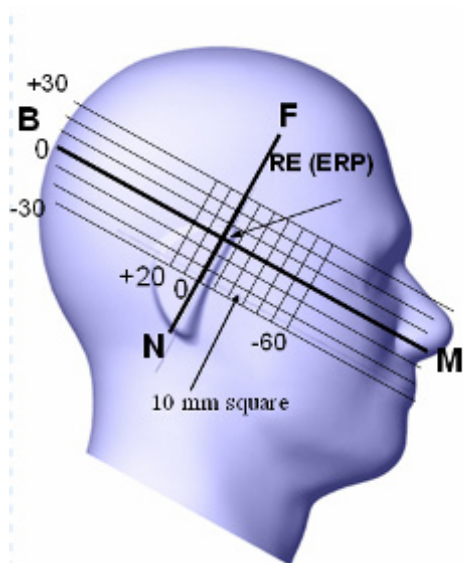

Cheek/Touch Position

The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line for the SCC-34/SC-2 head phantom.


This test position is established:

When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.

(or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek /Touch Position

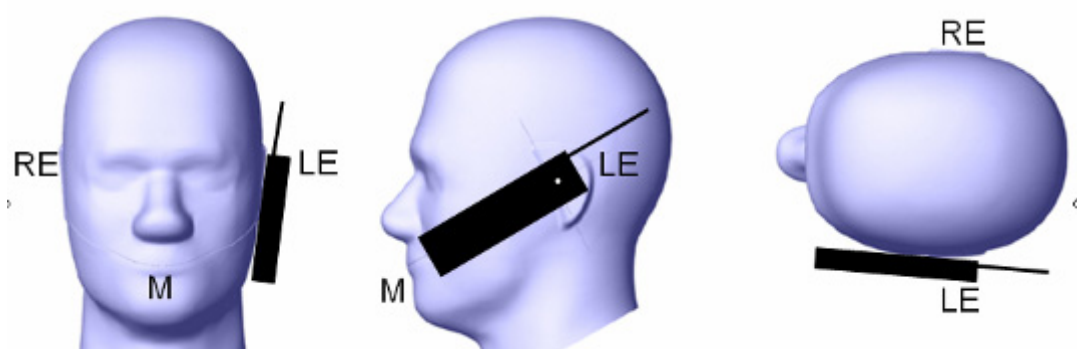


Ear/Tilt Position

With the handset aligned in the “Cheek/Touch Position”:

1) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.

2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tilt/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

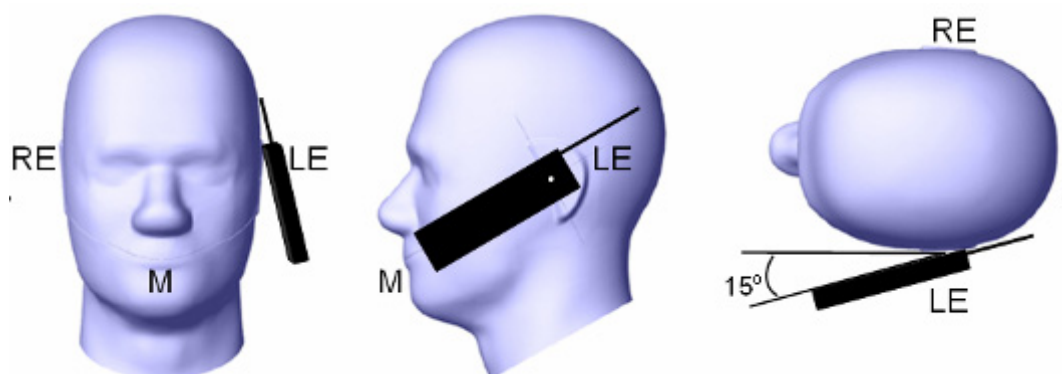Ear /Tilt 15° Position**Test positions for body-worn and other configurations**

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

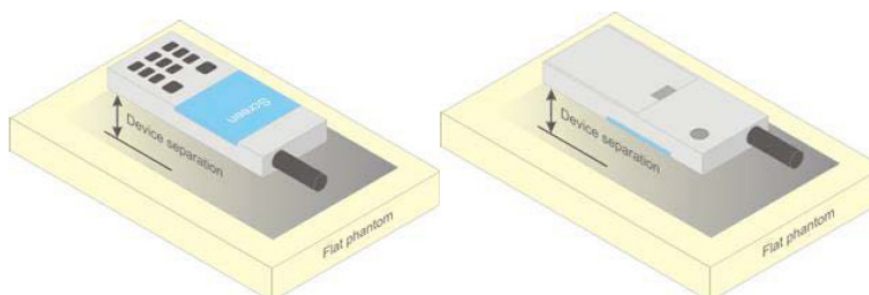


Figure 5 – Test positions for body-worn devices

Test Distance for SAR Evaluation

In this case the EUT (Equipment Under Test) is set 10mm away from the phantom, and the test distance is 10 mm for body.

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

2) The maximum Measured value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were Measured to calculate the averages.


All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

CONDUCTED OUTPUT POWER MEASUREMENT

Test Procedure

The RF output of the transmitter was connected to the input of the Wireless Communication Test Set through Attenuator.

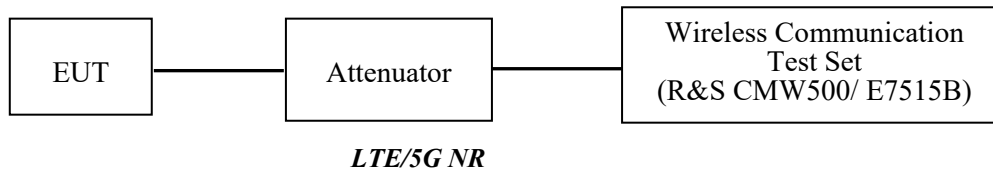

Description of Test Configuration

EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in each operation mode.
Equipment Modifications:	No
EUT Exercise Software:	No

TDD-LTE

According to KDB 941225 D05 SAR for LTE Devices, for time Division Duplex (TDD) systems, SAR must be performed according to the highest transmission duty cycle, using a fixed cycle duty cycle for the test device, supported by the 3GPP TS 36.211 configuration definition.

TDD-LTE Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

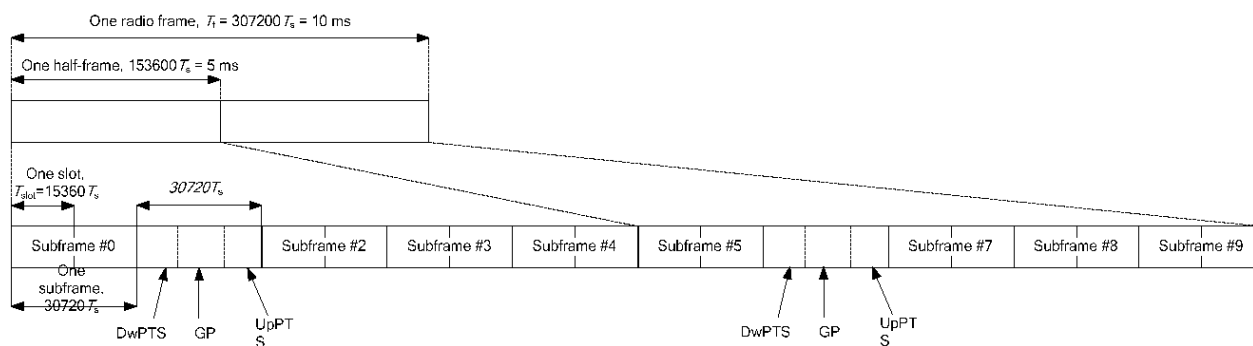


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity)

Table 4.2-1: configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special Subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Normal cyclic prefix in uplink		Normal cyclic prefix in uplink	Normal cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-
10	$13168 \cdot T_s$	$13152 \cdot T_s$	$12800 \cdot T_s$	-	-	-

Table 4.2-2: Uplink-downlink configurations & Calculated Duty Cycle

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

We used configuration 0 for LTE Band 42 SAR test, that is 63.33%(1:1.58)for duty cycle.

Duty factor is calculated by:

Duty factor = uplink frame*6+UpPTS*2/one frame length

$$=(30720 \cdot T_s * 6 + 5120 \cdot T_s * 2) / 307200 \cdot T_s$$

$$= 63.33\%$$

5G NR

The general information supported by the NR band is as following table:

Band		TDD	FDD
NR mode		SA	Yes
		NSA	Yes
Modulation	DFT-s-OFDM	PI/2 BPSK	Yes
		QPSK	Yes
		16QAM	Yes
		64QAM	Yes
		256QAM	Yes
	CP-OFDM	QPSK	Yes
		16QAM	Yes
		64QAM	Yes
		256QAM	Yes
	Duty Cycle		63.33%

For 5G NR test procedure was following step similar FCC KDB 941225 D05:

- 1) For DFT-OFDM and CP-OFDM output power measurement reduction, according to 3GPP 38.101 maximum power reduction for power class 3, the CP-OFDM mode will not higher than DFT-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not ½ dB higher than the same configuration in DFT-QPSK and the reported SAR for the DFT-QPSK configuration is ≤ 1.45 W/kg; CP-OFDM testing is not required.
- 2) For DFT-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class 3, for PI/2 BPSK/16QAM/64QMA/256QAM and smaller bandwidth output power will spot check largest channel bandwidth worst RB configuration to ensure the PI/2 BPSK/16QAM/64QMA/256QAM and smaller bandwidth output power will not ½ dB higher than the same configuration in the largest supported bandwidth.
- 3) SAR testing start with the largest SCS and largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
- 4) 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure e. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test

channels must also be tested.

- 4) QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- 5) PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not $\frac{1}{2}$ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK/16QAM/64QAM/256QAM SAR testing are not required.
- 6) Smaller SCS/bandwidth output power for each RB allocation configuration for this device will not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
- 7) For 5G FR1 n77/n78 the maximum bandwidth does not support three non-overlapping channels, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Maximum Target Output Power

Max Target Power(dBm)			
Mode/Band	Channel		
	Low	Middle	High
LTE Band 42	22.5	22.5	22.5
5G NR n2	25.5	25.5	25.5
5G NR n5	24.3	24.3	24.3
5G NR n7	23.0	23.0	23.0
5G NR n12	24.0	24.0	24.0
5G NR n38	24.0	24.0	24.0
5G NR n41	23.0	23.0	23.0
5G NR n66	26.0	26.0	26.0
5G NR n71	25.0	25.0	25.0
5G NR n77 Lower	23.5	23.5	23.5
5G NR n77 Middle	23.0	23.0	23.0
5G NR n77 Upper	24.1	24.1	24.1
5G NR n78 Lower	23.5	23.5	23.5
5G NR n78 Middle	23.0	23.0	23.0
5G NR n78 Upper	24.1	24.1	24.1

Note: The Maximum Target Power for LTE and 5G NR bands corresponds to their maximum power in QPSK modes with maximum bandwidth. Specifically for 5G NR, this refers to the DFT-s-OFDM QPSK mode.

Test Results**LTE Band 42:**

Mode	Conducted Average Power(dBm)
20MHz_Low_QPSK_1@0	21.77
20MHz_Low_QPSK_1@49	21.72
20MHz_Low_QPSK_1@99	22.24
20MHz_Low_QPSK_50@0	21.01
20MHz_Low_QPSK_50@24	20.82
20MHz_Low_QPSK_50@50	20.86
20MHz_Low_QPSK_100@0	21.12
20MHz_Low_16QAM_1@0	20.56
20MHz_Low_16QAM_1@49	20.89
20MHz_Low_16QAM_1@99	21.06
20MHz_Low_16QAM_50@0	20.06
20MHz_Low_16QAM_50@24	19.64
20MHz_Low_16QAM_50@50	20.03
20MHz_Low_16QAM_100@0	19.88
20MHz_Middle_QPSK_1@0	21.87
20MHz_Middle_QPSK_1@49	21.86
20MHz_Middle_QPSK_1@99	21.97
20MHz_Middle_QPSK_50@0	20.74
20MHz_Middle_QPSK_50@24	20.99
20MHz_Middle_QPSK_50@50	20.50
20MHz_Middle_QPSK_100@0	20.49
20MHz_Middle_16QAM_1@0	20.62
20MHz_Middle_16QAM_1@49	20.95
20MHz_Middle_16QAM_1@99	21.04
20MHz_Middle_16QAM_50@0	19.79
20MHz_Middle_16QAM_50@24	19.71
20MHz_Middle_16QAM_50@50	19.83
20MHz_Middle_16QAM_100@0	19.65
20MHz_High_QPSK_1@0	22.22
20MHz_High_QPSK_1@49	22.12
20MHz_High_QPSK_1@99	21.79
20MHz_High_QPSK_50@0	21.41
20MHz_High_QPSK_50@24	21.18
20MHz_High_QPSK_50@50	21.12
20MHz_High_QPSK_100@0	21.30
20MHz_High_16QAM_1@0	21.30
20MHz_High_16QAM_1@49	21.01
20MHz_High_16QAM_1@99	21.20
20MHz_High_16QAM_50@0	20.42
20MHz_High_16QAM_50@24	20.11
20MHz_High_16QAM_50@50	20.14
20MHz_High_16QAM_100@0	19.97

5G NR n2:

Mode	Conducted Average Power(dBm)
n2_40MHz_15kHz_1870MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	24.74
n2_40MHz_15kHz_1870MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@214	25.06
n2_40MHz_15kHz_1870MHz_DFT-s-OFDM $\pi/2$ BPSK_RB108@54	24.71
n2_40MHz_15kHz_1870MHz_DFT-s-OFDM $\pi/2$ BPSK_RB216@0	24.59
n2_40MHz_15kHz_1870MHz_DFT-s-OFDM QPSK_RB1@1	24.43
n2_40MHz_15kHz_1870MHz_DFT-s-OFDM QPSK_RB1@214	24.55
n2_40MHz_15kHz_1870MHz_DFT-s-OFDM QPSK_RB108@54	24.64
n2_40MHz_15kHz_1870MHz_DFT-s-OFDM QPSK_RB216@0	24.10
n2_40MHz_15kHz_1870MHz_DFT-s-OFDM 16 QAM_RB216@0	23.06
n2_40MHz_15kHz_1870MHz_DFT-s-OFDM 64 QAM_RB216@0	22.20
n2_40MHz_15kHz_1870MHz_DFT-s-OFDM 256 QAM_RB216@0	20.23
n2_40MHz_15kHz_1870MHz_CP-OFDM QPSK_RB1@1	23.32
n2_40MHz_15kHz_1870MHz_CP-OFDM QPSK_RB1@214	23.35
n2_40MHz_15kHz_1870MHz_CP-OFDM QPSK_RB108@54	23.78
n2_40MHz_15kHz_1870MHz_CP-OFDM QPSK_RB216@0	21.97
n2_40MHz_15kHz_1870MHz_CP-OFDM 16 QAM_RB216@0	22.09
n2_40MHz_15kHz_1870MHz_CP-OFDM 64 QAM_RB216@0	21.45
n2_40MHz_15kHz_1870MHz_CP-OFDM 256 QAM_RB216@0	18.57
n2_40MHz_15kHz_1880MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	24.79
n2_40MHz_15kHz_1880MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@214	25.01
n2_40MHz_15kHz_1880MHz_DFT-s-OFDM $\pi/2$ BPSK_RB108@54	25.03
n2_40MHz_15kHz_1880MHz_DFT-s-OFDM $\pi/2$ BPSK_RB216@0	24.30
n2_40MHz_15kHz_1880MHz_DFT-s-OFDM QPSK_RB1@1	24.96
n2_40MHz_15kHz_1880MHz_DFT-s-OFDM QPSK_RB1@214	25.04
n2_40MHz_15kHz_1880MHz_DFT-s-OFDM QPSK_RB108@54	24.70
n2_40MHz_15kHz_1880MHz_DFT-s-OFDM QPSK_RB216@0	24.19
n2_40MHz_15kHz_1880MHz_DFT-s-OFDM 16 QAM_RB216@0	23.04
n2_40MHz_15kHz_1880MHz_DFT-s-OFDM 64 QAM_RB216@0	22.74
n2_40MHz_15kHz_1880MHz_DFT-s-OFDM 256 QAM_RB216@0	20.73
n2_40MHz_15kHz_1880MHz_CP-OFDM QPSK_RB1@1	23.43
n2_40MHz_15kHz_1880MHz_CP-OFDM QPSK_RB1@214	23.31
n2_40MHz_15kHz_1880MHz_CP-OFDM QPSK_RB108@54	23.73
n2_40MHz_15kHz_1880MHz_CP-OFDM QPSK_RB216@0	21.98
n2_40MHz_15kHz_1880MHz_CP-OFDM 16 QAM_RB216@0	22.07
n2_40MHz_15kHz_1880MHz_CP-OFDM 64 QAM_RB216@0	21.28
n2_40MHz_15kHz_1880MHz_CP-OFDM 256 QAM_RB216@0	18.68
n2_40MHz_15kHz_1890MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	24.95
n2_40MHz_15kHz_1890MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@214	24.82
n2_40MHz_15kHz_1890MHz_DFT-s-OFDM $\pi/2$ BPSK_RB108@54	24.59
n2_40MHz_15kHz_1890MHz_DFT-s-OFDM $\pi/2$ BPSK_RB216@0	24.25
n2_40MHz_15kHz_1890MHz_DFT-s-OFDM QPSK_RB1@1	24.40
n2_40MHz_15kHz_1890MHz_DFT-s-OFDM QPSK_RB1@214	24.52

n2_40MHz_15kHz_1890MHz_DFT-s-OFDM QPSK_RB108@54	24.81
n2_40MHz_15kHz_1890MHz_DFT-s-OFDM QPSK_RB216@0	24.15
n2_40MHz_15kHz_1890MHz_DFT-s-OFDM 16 QAM_RB216@0	22.77
n2_40MHz_15kHz_1890MHz_DFT-s-OFDM 64 QAM_RB216@0	22.22
n2_40MHz_15kHz_1890MHz_DFT-s-OFDM 256 QAM_RB216@0	20.75
n2_40MHz_15kHz_1890MHz_CP-OFDM QPSK_RB1@1	23.68
n2_40MHz_15kHz_1890MHz_CP-OFDM QPSK_RB1@214	23.58
n2_40MHz_15kHz_1890MHz_CP-OFDM QPSK_RB108@54	23.34
n2_40MHz_15kHz_1890MHz_CP-OFDM QPSK_RB216@0	21.87
n2_40MHz_15kHz_1890MHz_CP-OFDM 16 QAM_RB216@0	22.17
n2_40MHz_15kHz_1890MHz_CP-OFDM 64 QAM_RB216@0	21.46
n2_40MHz_15kHz_1890MHz_CP-OFDM 256 QAM_RB216@0	18.46

5G NR n5:

Mode	Conducted Average Power(dBm)
n5_20MHz_15kHz_834MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	23.36
n5_20MHz_15kHz_834MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@104	23.91
n5_20MHz_15kHz_834MHz_DFT-s-OFDM $\pi/2$ BPSK_RB50@25	23.89
n5_20MHz_15kHz_834MHz_DFT-s-OFDM $\pi/2$ BPSK_RB100@0	22.81
n5_20MHz_15kHz_834MHz_DFT-s-OFDM QPSK_RB1@1	23.86
n5_20MHz_15kHz_834MHz_DFT-s-OFDM QPSK_RB1@104	23.90
n5_20MHz_15kHz_834MHz_DFT-s-OFDM QPSK_RB50@25	23.94
n5_20MHz_15kHz_834MHz_DFT-s-OFDM QPSK_RB100@0	22.95
n5_20MHz_15kHz_834MHz_DFT-s-OFDM 16 QAM_RB100@0	21.96
n5_20MHz_15kHz_834MHz_DFT-s-OFDM 64 QAM_RB100@0	20.98
n5_20MHz_15kHz_834MHz_DFT-s-OFDM 256 QAM_RB100@0	19.19
n5_20MHz_15kHz_834MHz_CP-OFDM QPSK_RB1@1	22.28
n5_20MHz_15kHz_834MHz_CP-OFDM QPSK_RB1@104	22.12
n5_20MHz_15kHz_834MHz_CP-OFDM QPSK_RB53@26	22.49
n5_20MHz_15kHz_834MHz_CP-OFDM QPSK_RB106@0	20.39
n5_20MHz_15kHz_834MHz_CP-OFDM 16 QAM_RB106@0	20.45
n5_20MHz_15kHz_834MHz_CP-OFDM 64 QAM_RB106@0	20.33
n5_20MHz_15kHz_834MHz_CP-OFDM 256 QAM_RB106@0	17.30
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	23.78
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@104	23.73
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB50@25	23.60
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB100@0	23.01
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB1@1	23.97
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB1@104	24.28
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB50@25	24.21
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB100@0	23.28
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM 16 QAM_RB100@0	21.99
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM 64 QAM_RB100@0	21.32
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM 256 QAM_RB100@0	18.97
n5_20MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB1@1	21.81
n5_20MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB1@104	21.88
n5_20MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB53@26	22.20
n5_20MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB106@0	20.59
n5_20MHz_15kHz_836.5MHz_CP-OFDM 16 QAM_RB106@0	20.57
n5_20MHz_15kHz_836.5MHz_CP-OFDM 64 QAM_RB106@0	20.46
n5_20MHz_15kHz_836.5MHz_CP-OFDM 256 QAM_RB106@0	17.45
n5_20MHz_15kHz_839MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	23.36
n5_20MHz_15kHz_839MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@104	22.87
n5_20MHz_15kHz_839MHz_DFT-s-OFDM $\pi/2$ BPSK_RB50@25	23.90
n5_20MHz_15kHz_839MHz_DFT-s-OFDM $\pi/2$ BPSK_RB100@0	23.02
n5_20MHz_15kHz_839MHz_DFT-s-OFDM QPSK_RB1@1	24.25
n5_20MHz_15kHz_839MHz_DFT-s-OFDM QPSK_RB1@104	23.94

n5_20MHz_15kHz_839MHz_DFT-s-OFDM QPSK_RB50@25	24.29
n5_20MHz_15kHz_839MHz_DFT-s-OFDM QPSK_RB100@0	22.90
n5_20MHz_15kHz_839MHz_DFT-s-OFDM 16 QAM_RB100@0	22.12
n5_20MHz_15kHz_839MHz_DFT-s-OFDM 64 QAM_RB100@0	21.58
n5_20MHz_15kHz_839MHz_DFT-s-OFDM 256 QAM_RB100@0	19.08
n5_20MHz_15kHz_839MHz_CP-OFDM QPSK_RB1@1	22.32
n5_20MHz_15kHz_839MHz_CP-OFDM QPSK_RB1@104	22.00
n5_20MHz_15kHz_839MHz_CP-OFDM QPSK_RB53@26	22.59
n5_20MHz_15kHz_839MHz_CP-OFDM QPSK_RB106@0	20.72
n5_20MHz_15kHz_839MHz_CP-OFDM 16 QAM_RB106@0	20.87
n5_20MHz_15kHz_839MHz_CP-OFDM 64 QAM_RB106@0	20.55
n5_20MHz_15kHz_839MHz_CP-OFDM 256 QAM_RB106@0	17.45

5G NR n7:

Mode	Conducted Average Power(dBm)
n7_50MHz_15kHz_2525MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	21.63
n7_50MHz_15kHz_2525MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@268	21.57
n7_50MHz_15kHz_2525MHz_DFT-s-OFDM $\pi/2$ BPSK_RB135@67	21.63
n7_50MHz_15kHz_2525MHz_DFT-s-OFDM $\pi/2$ BPSK_RB270@0	20.83
n7_50MHz_15kHz_2525MHz_DFT-s-OFDM QPSK_RB1@1	22.23
n7_50MHz_15kHz_2525MHz_DFT-s-OFDM QPSK_RB1@268	21.94
n7_50MHz_15kHz_2525MHz_DFT-s-OFDM QPSK_RB135@67	21.82
n7_50MHz_15kHz_2525MHz_DFT-s-OFDM QPSK_RB270@0	21.08
n7_50MHz_15kHz_2525MHz_DFT-s-OFDM 16 QAM_RB270@0	19.41
n7_50MHz_15kHz_2525MHz_DFT-s-OFDM 64 QAM_RB270@0	19.00
n7_50MHz_15kHz_2525MHz_DFT-s-OFDM 256 QAM_RB270@0	16.91
n7_50MHz_15kHz_2525MHz_CP-OFDM QPSK_RB1@1	19.66
n7_50MHz_15kHz_2525MHz_CP-OFDM QPSK_RB1@268	19.84
n7_50MHz_15kHz_2525MHz_CP-OFDM QPSK_RB135@67	20.05
n7_50MHz_15kHz_2525MHz_CP-OFDM QPSK_RB270@0	18.52
n7_50MHz_15kHz_2525MHz_CP-OFDM 16 QAM_RB270@0	18.51
n7_50MHz_15kHz_2525MHz_CP-OFDM 64 QAM_RB270@0	18.08
n7_50MHz_15kHz_2525MHz_CP-OFDM 256 QAM_RB270@0	14.77
n7_50MHz_15kHz_2535MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	21.84
n7_50MHz_15kHz_2535MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@268	21.60
n7_50MHz_15kHz_2535MHz_DFT-s-OFDM $\pi/2$ BPSK_RB135@67	21.66
n7_50MHz_15kHz_2535MHz_DFT-s-OFDM $\pi/2$ BPSK_RB270@0	20.61
n7_50MHz_15kHz_2535MHz_DFT-s-OFDM QPSK_RB1@1	22.40
n7_50MHz_15kHz_2535MHz_DFT-s-OFDM QPSK_RB1@268	21.84
n7_50MHz_15kHz_2535MHz_DFT-s-OFDM QPSK_RB135@67	22.27
n7_50MHz_15kHz_2535MHz_DFT-s-OFDM QPSK_RB270@0	21.34
n7_50MHz_15kHz_2535MHz_DFT-s-OFDM 16 QAM_RB270@0	19.45
n7_50MHz_15kHz_2535MHz_DFT-s-OFDM 64 QAM_RB270@0	18.76
n7_50MHz_15kHz_2535MHz_DFT-s-OFDM 256 QAM_RB270@0	16.78
n7_50MHz_15kHz_2535MHz_CP-OFDM QPSK_RB1@1	20.04
n7_50MHz_15kHz_2535MHz_CP-OFDM QPSK_RB1@268	19.86
n7_50MHz_15kHz_2535MHz_CP-OFDM QPSK_RB135@67	19.83
n7_50MHz_15kHz_2535MHz_CP-OFDM QPSK_RB270@0	18.24
n7_50MHz_15kHz_2535MHz_CP-OFDM 16 QAM_RB270@0	18.71
n7_50MHz_15kHz_2535MHz_CP-OFDM 64 QAM_RB270@0	17.89
n7_50MHz_15kHz_2535MHz_CP-OFDM 256 QAM_RB270@0	14.77
n7_50MHz_15kHz_2545MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	21.86
n7_50MHz_15kHz_2545MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@268	21.53
n7_50MHz_15kHz_2545MHz_DFT-s-OFDM $\pi/2$ BPSK_RB135@67	21.21
n7_50MHz_15kHz_2545MHz_DFT-s-OFDM $\pi/2$ BPSK_RB270@0	21.15
n7_50MHz_15kHz_2545MHz_DFT-s-OFDM QPSK_RB1@1	22.38
n7_50MHz_15kHz_2545MHz_DFT-s-OFDM QPSK_RB1@268	22.28

n7_50MHz_15kHz_2545MHz_DFT-s-OFDM QPSK_RB135@67	21.60
n7_50MHz_15kHz_2545MHz_DFT-s-OFDM QPSK_RB270@0	21.28
n7_50MHz_15kHz_2545MHz_DFT-s-OFDM 16 QAM_RB270@0	19.54
n7_50MHz_15kHz_2545MHz_DFT-s-OFDM 64 QAM_RB270@0	19.32
n7_50MHz_15kHz_2545MHz_DFT-s-OFDM 256 QAM_RB270@0	17.25
n7_50MHz_15kHz_2545MHz_CP-OFDM QPSK_RB1@1	19.92
n7_50MHz_15kHz_2545MHz_CP-OFDM QPSK_RB1@268	20.48
n7_50MHz_15kHz_2545MHz_CP-OFDM QPSK_RB135@67	20.34
n7_50MHz_15kHz_2545MHz_CP-OFDM QPSK_RB270@0	18.87
n7_50MHz_15kHz_2545MHz_CP-OFDM 16 QAM_RB270@0	18.75
n7_50MHz_15kHz_2545MHz_CP-OFDM 64 QAM_RB270@0	18.30
n7_50MHz_15kHz_2545MHz_CP-OFDM 256 QAM_RB270@0	15.45

5G NR n12:

Mode	Conducted Average Power(dBm)
n12_15MHz_15kHz_706.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	23.74
n12_15MHz_15kHz_706.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@77	23.63
n12_15MHz_15kHz_706.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB36@18	22.99
n12_15MHz_15kHz_706.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB75@0	23.18
n12_15MHz_15kHz_706.5MHz_DFT-s-OFDM QPSK_RB1@1	23.90
n12_15MHz_15kHz_706.5MHz_DFT-s-OFDM QPSK_RB1@77	23.43
n12_15MHz_15kHz_706.5MHz_DFT-s-OFDM QPSK_RB36@18	22.77
n12_15MHz_15kHz_706.5MHz_DFT-s-OFDM QPSK_RB75@0	22.92
n12_15MHz_15kHz_706.5MHz_DFT-s-OFDM 16 QAM_RB75@0	21.55
n12_15MHz_15kHz_706.5MHz_DFT-s-OFDM 64 QAM_RB75@0	21.30
n12_15MHz_15kHz_706.5MHz_DFT-s-OFDM 256 QAM_RB75@0	19.00
n12_15MHz_15kHz_706.5MHz_CP-OFDM QPSK_RB1@1	22.23
n12_15MHz_15kHz_706.5MHz_CP-OFDM QPSK_RB1@77	21.43
n12_15MHz_15kHz_706.5MHz_CP-OFDM QPSK_RB39@19	22.28
n12_15MHz_15kHz_706.5MHz_CP-OFDM QPSK_RB79@0	21.08
n12_15MHz_15kHz_706.5MHz_CP-OFDM 16 QAM_RB79@0	20.80
n12_15MHz_15kHz_706.5MHz_CP-OFDM 64 QAM_RB79@0	20.06
n12_15MHz_15kHz_706.5MHz_CP-OFDM 256 QAM_RB79@0	17.44
n12_15MHz_15kHz_707.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	23.53
n12_15MHz_15kHz_707.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@77	23.54
n12_15MHz_15kHz_707.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB36@18	23.87
n12_15MHz_15kHz_707.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB75@0	23.32
n12_15MHz_15kHz_707.5MHz_DFT-s-OFDM QPSK_RB1@1	23.79
n12_15MHz_15kHz_707.5MHz_DFT-s-OFDM QPSK_RB1@77	23.56
n12_15MHz_15kHz_707.5MHz_DFT-s-OFDM QPSK_RB36@18	23.66
n12_15MHz_15kHz_707.5MHz_DFT-s-OFDM QPSK_RB75@0	22.75
n12_15MHz_15kHz_707.5MHz_DFT-s-OFDM 16 QAM_RB75@0	21.56
n12_15MHz_15kHz_707.5MHz_DFT-s-OFDM 64 QAM_RB75@0	21.39
n12_15MHz_15kHz_707.5MHz_DFT-s-OFDM 256 QAM_RB75@0	19.27
n12_15MHz_15kHz_707.5MHz_CP-OFDM QPSK_RB1@1	21.98
n12_15MHz_15kHz_707.5MHz_CP-OFDM QPSK_RB1@77	21.88
n12_15MHz_15kHz_707.5MHz_CP-OFDM QPSK_RB39@19	21.99
n12_15MHz_15kHz_707.5MHz_CP-OFDM QPSK_RB79@0	20.99
n12_15MHz_15kHz_707.5MHz_CP-OFDM 16 QAM_RB79@0	20.89
n12_15MHz_15kHz_707.5MHz_CP-OFDM 64 QAM_RB79@0	20.57
n12_15MHz_15kHz_707.5MHz_CP-OFDM 256 QAM_RB79@0	17.50
n12_15MHz_15kHz_708.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	23.72
n12_15MHz_15kHz_708.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@77	23.35
n12_15MHz_15kHz_708.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB36@18	23.54
n12_15MHz_15kHz_708.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB75@0	23.58
n12_15MHz_15kHz_708.5MHz_DFT-s-OFDM QPSK_RB1@1	23.68
n12_15MHz_15kHz_708.5MHz_DFT-s-OFDM QPSK_RB1@77	23.14

n12_15MHz_15kHz_708.5MHz_DFT-s-OFDM QPSK_RB36@18	23.53
n12_15MHz_15kHz_708.5MHz_DFT-s-OFDM QPSK_RB75@0	22.72
n12_15MHz_15kHz_708.5MHz_DFT-s-OFDM 16 QAM_RB75@0	21.58
n12_15MHz_15kHz_708.5MHz_DFT-s-OFDM 64 QAM_RB75@0	21.02
n12_15MHz_15kHz_708.5MHz_DFT-s-OFDM 256 QAM_RB75@0	18.98
n12_15MHz_15kHz_708.5MHz_CP-OFDM QPSK_RB1@1	22.08
n12_15MHz_15kHz_708.5MHz_CP-OFDM QPSK_RB1@77	21.74
n12_15MHz_15kHz_708.5MHz_CP-OFDM QPSK_RB39@19	22.10
n12_15MHz_15kHz_708.5MHz_CP-OFDM QPSK_RB79@0	20.55
n12_15MHz_15kHz_708.5MHz_CP-OFDM 16 QAM_RB79@0	21.01
n12_15MHz_15kHz_708.5MHz_CP-OFDM 64 QAM_RB79@0	20.25
n12_15MHz_15kHz_708.5MHz_CP-OFDM 256 QAM_RB79@0	17.04

5G NR n38:

Mode	Conducted Average Power(dBm)
n38_40MHz_30kHz_2590MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	22.94
n38_40MHz_30kHz_2590MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@104	23.46
n38_40MHz_30kHz_2590MHz_DFT-s-OFDM $\pi/2$ BPSK_RB50@25	22.94
n38_40MHz_30kHz_2590MHz_DFT-s-OFDM $\pi/2$ BPSK_RB100@0	22.73
n38_40MHz_30kHz_2590MHz_DFT-s-OFDM QPSK_RB1@1	22.42
n38_40MHz_30kHz_2590MHz_DFT-s-OFDM QPSK_RB1@104	23.34
n38_40MHz_30kHz_2590MHz_DFT-s-OFDM QPSK_RB50@25	22.97
n38_40MHz_30kHz_2590MHz_DFT-s-OFDM QPSK_RB100@0	22.35
n38_40MHz_30kHz_2590MHz_DFT-s-OFDM 16 QAM_RB100@0	20.87
n38_40MHz_30kHz_2590MHz_DFT-s-OFDM 64 QAM_RB100@0	20.26
n38_40MHz_30kHz_2590MHz_DFT-s-OFDM 256 QAM_RB100@0	18.87
n38_40MHz_30kHz_2590MHz_CP-OFDM QPSK_RB1@1	21.30
n38_40MHz_30kHz_2590MHz_CP-OFDM QPSK_RB1@104	21.82
n38_40MHz_30kHz_2590MHz_CP-OFDM QPSK_RB53@26	21.37
n38_40MHz_30kHz_2590MHz_CP-OFDM QPSK_RB106@0	20.13
n38_40MHz_30kHz_2590MHz_CP-OFDM 16 QAM_RB106@0	20.16
n38_40MHz_30kHz_2590MHz_CP-OFDM 64 QAM_RB106@0	19.53
n38_40MHz_30kHz_2590MHz_CP-OFDM 256 QAM_RB106@0	16.87
n38_40MHz_30kHz_2595MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	22.93
n38_40MHz_30kHz_2595MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@104	23.00
n38_40MHz_30kHz_2595MHz_DFT-s-OFDM $\pi/2$ BPSK_RB50@25	22.81
n38_40MHz_30kHz_2595MHz_DFT-s-OFDM $\pi/2$ BPSK_RB100@0	22.30
n38_40MHz_30kHz_2595MHz_DFT-s-OFDM QPSK_RB1@1	22.78
n38_40MHz_30kHz_2595MHz_DFT-s-OFDM QPSK_RB1@104	23.22
n38_40MHz_30kHz_2595MHz_DFT-s-OFDM QPSK_RB50@25	23.00
n38_40MHz_30kHz_2595MHz_DFT-s-OFDM QPSK_RB100@0	22.26
n38_40MHz_30kHz_2595MHz_DFT-s-OFDM 16 QAM_RB100@0	21.22
n38_40MHz_30kHz_2595MHz_DFT-s-OFDM 64 QAM_RB100@0	20.34
n38_40MHz_30kHz_2595MHz_DFT-s-OFDM 256 QAM_RB100@0	18.80
n38_40MHz_30kHz_2595MHz_CP-OFDM QPSK_RB1@1	21.00
n38_40MHz_30kHz_2595MHz_CP-OFDM QPSK_RB1@104	21.68
n38_40MHz_30kHz_2595MHz_CP-OFDM QPSK_RB53@26	21.42
n38_40MHz_30kHz_2595MHz_CP-OFDM QPSK_RB106@0	20.33
n38_40MHz_30kHz_2595MHz_CP-OFDM 16 QAM_RB106@0	20.07
n38_40MHz_30kHz_2595MHz_CP-OFDM 64 QAM_RB106@0	19.52
n38_40MHz_30kHz_2595MHz_CP-OFDM 256 QAM_RB106@0	16.67
n38_40MHz_30kHz_2600MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	22.97
n38_40MHz_30kHz_2600MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@104	22.99
n38_40MHz_30kHz_2600MHz_DFT-s-OFDM $\pi/2$ BPSK_RB50@25	23.04
n38_40MHz_30kHz_2600MHz_DFT-s-OFDM $\pi/2$ BPSK_RB100@0	22.66
n38_40MHz_30kHz_2600MHz_DFT-s-OFDM QPSK_RB1@1	22.84
n38_40MHz_30kHz_2600MHz_DFT-s-OFDM QPSK_RB1@104	23.39

n38_40MHz_30kHz_2600MHz_DFT-s-OFDM QPSK_RB50@25	23.12
n38_40MHz_30kHz_2600MHz_DFT-s-OFDM QPSK_RB100@0	22.35
n38_40MHz_30kHz_2600MHz_DFT-s-OFDM 16 QAM_RB100@0	21.37
n38_40MHz_30kHz_2600MHz_DFT-s-OFDM 64 QAM_RB100@0	20.83
n38_40MHz_30kHz_2600MHz_DFT-s-OFDM 256 QAM_RB100@0	18.93
n38_40MHz_30kHz_2600MHz_CP-OFDM QPSK_RB1@1	21.22
n38_40MHz_30kHz_2600MHz_CP-OFDM QPSK_RB1@104	21.24
n38_40MHz_30kHz_2600MHz_CP-OFDM QPSK_RB53@26	21.39
n38_40MHz_30kHz_2600MHz_CP-OFDM QPSK_RB106@0	20.38
n38_40MHz_30kHz_2600MHz_CP-OFDM 16 QAM_RB106@0	20.24
n38_40MHz_30kHz_2600MHz_CP-OFDM 64 QAM_RB106@0	19.80
n38_40MHz_30kHz_2600MHz_CP-OFDM 256 QAM_RB106@0	16.78

5G NR n41:

Mode	Conducted Average Power(dBm)
n41_100MHz_30kHz_2546.01MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	21.06
n41_100MHz_30kHz_2546.01MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@271	21.90
n41_100MHz_30kHz_2546.01MHz_DFT-s-OFDM $\pi/2$ BPSK_RB135@67	21.22
n41_100MHz_30kHz_2546.01MHz_DFT-s-OFDM $\pi/2$ BPSK_RB270@0	20.43
n41_100MHz_30kHz_2546.01MHz_DFT-s-OFDM QPSK_RB1@1	21.04
n41_100MHz_30kHz_2546.01MHz_DFT-s-OFDM QPSK_RB1@271	21.97
n41_100MHz_30kHz_2546.01MHz_DFT-s-OFDM QPSK_RB135@67	21.61
n41_100MHz_30kHz_2546.01MHz_DFT-s-OFDM QPSK_RB270@0	21.03
n41_100MHz_30kHz_2546.01MHz_DFT-s-OFDM 16 QAM_RB270@0	18.99
n41_100MHz_30kHz_2546.01MHz_DFT-s-OFDM 64 QAM_RB270@0	18.74
n41_100MHz_30kHz_2546.01MHz_DFT-s-OFDM 256 QAM_RB270@0	16.73
n41_100MHz_30kHz_2546.01MHz_CP-OFDM QPSK_RB1@1	19.56
n41_100MHz_30kHz_2546.01MHz_CP-OFDM QPSK_RB1@271	20.13
n41_100MHz_30kHz_2546.01MHz_CP-OFDM QPSK_RB137@68	19.80
n41_100MHz_30kHz_2546.01MHz_CP-OFDM QPSK_RB273@0	18.27
n41_100MHz_30kHz_2546.01MHz_CP-OFDM 16 QAM_RB273@0	18.60
n41_100MHz_30kHz_2546.01MHz_CP-OFDM 64 QAM_RB273@0	17.65
n41_100MHz_30kHz_2546.01MHz_CP-OFDM 256 QAM_RB273@0	15.04
n41_100MHz_30kHz_2569.5MHz_DFT-s-OFDM QPSK_RB1@1	21.05
n41_100MHz_30kHz_2569.5MHz_DFT-s-OFDM QPSK_RB1@271	21.90
n41_100MHz_30kHz_2569.5MHz_DFT-s-OFDM QPSK_RB135@67	21.54
n41_100MHz_30kHz_2569.5MHz_DFT-s-OFDM QPSK_RB270@0	21.01
n41_100MHz_30kHz_2592.99MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	20.94
n41_100MHz_30kHz_2592.99MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@271	21.98
n41_100MHz_30kHz_2592.99MHz_DFT-s-OFDM $\pi/2$ BPSK_RB135@67	21.95
n41_100MHz_30kHz_2592.99MHz_DFT-s-OFDM $\pi/2$ BPSK_RB270@0	21.47
n41_100MHz_30kHz_2592.99MHz_DFT-s-OFDM QPSK_RB1@1	21.45
n41_100MHz_30kHz_2592.99MHz_DFT-s-OFDM QPSK_RB1@271	22.49
n41_100MHz_30kHz_2592.99MHz_DFT-s-OFDM QPSK_RB135@67	21.98
n41_100MHz_30kHz_2592.99MHz_DFT-s-OFDM QPSK_RB270@0	21.34
n41_100MHz_30kHz_2592.99MHz_DFT-s-OFDM 16 QAM_RB270@0	20.01
n41_100MHz_30kHz_2592.99MHz_DFT-s-OFDM 64 QAM_RB270@0	19.74
n41_100MHz_30kHz_2592.99MHz_DFT-s-OFDM 256 QAM_RB270@0	17.58
n41_100MHz_30kHz_2592.99MHz_CP-OFDM QPSK_RB1@1	19.36
n41_100MHz_30kHz_2592.99MHz_CP-OFDM QPSK_RB1@271	20.38
n41_100MHz_30kHz_2592.99MHz_CP-OFDM QPSK_RB137@68	20.18
n41_100MHz_30kHz_2592.99MHz_CP-OFDM QPSK_RB273@0	19.33
n41_100MHz_30kHz_2592.99MHz_CP-OFDM 16 QAM_RB273@0	19.10
n41_100MHz_30kHz_2592.99MHz_CP-OFDM 64 QAM_RB273@0	18.69
n41_100MHz_30kHz_2592.99MHz_CP-OFDM 256 QAM_RB273@0	15.50
n41_100MHz_30kHz_2616.5MHz_DFT-s-OFDM QPSK_RB1@1	21.35
n41_100MHz_30kHz_2616.5MHz_DFT-s-OFDM QPSK_RB1@271	22.09

n41_100MHz_30kHz_2616.5MHz_DFT-s-OFDM QPSK_RB135@67	21.78
n41_100MHz_30kHz_2616.5MHz_DFT-s-OFDM QPSK_RB270@0	21.23
n41_100MHz_30kHz_2640MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	21.58
n41_100MHz_30kHz_2640MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@271	22.01
n41_100MHz_30kHz_2640MHz_DFT-s-OFDM $\pi/2$ BPSK_RB135@67	22.00
n41_100MHz_30kHz_2640MHz_DFT-s-OFDM $\pi/2$ BPSK_RB270@0	21.75
n41_100MHz_30kHz_2640MHz_DFT-s-OFDM QPSK_RB1@1	21.41
n41_100MHz_30kHz_2640MHz_DFT-s-OFDM QPSK_RB1@271	22.45
n41_100MHz_30kHz_2640MHz_DFT-s-OFDM QPSK_RB135@67	22.06
n41_100MHz_30kHz_2640MHz_DFT-s-OFDM QPSK_RB270@0	21.42
n41_100MHz_30kHz_2640MHz_DFT-s-OFDM 16 QAM_RB270@0	20.26
n41_100MHz_30kHz_2640MHz_DFT-s-OFDM 64 QAM_RB270@0	20.06
n41_100MHz_30kHz_2640MHz_DFT-s-OFDM 256 QAM_RB270@0	17.55
n41_100MHz_30kHz_2640MHz_CP-OFDM QPSK_RB1@1	20.31
n41_100MHz_30kHz_2640MHz_CP-OFDM QPSK_RB1@271	20.76
n41_100MHz_30kHz_2640MHz_CP-OFDM QPSK_RB137@68	20.45
n41_100MHz_30kHz_2640MHz_CP-OFDM QPSK_RB273@0	19.30
n41_100MHz_30kHz_2640MHz_CP-OFDM 16 QAM_RB273@0	19.02
n41_100MHz_30kHz_2640MHz_CP-OFDM 64 QAM_RB273@0	19.05
n41_100MHz_30kHz_2640MHz_CP-OFDM 256 QAM_RB273@0	15.88

5G NR n66:

Mode	Conducted Average Power(dBm)
n66_40MHz_15kHz_1730MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	25.13
n66_40MHz_15kHz_1730MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@214	25.07
n66_40MHz_15kHz_1730MHz_DFT-s-OFDM $\pi/2$ BPSK_RB108@54	25.18
n66_40MHz_15kHz_1730MHz_DFT-s-OFDM $\pi/2$ BPSK_RB216@0	24.82
n66_40MHz_15kHz_1730MHz_DFT-s-OFDM QPSK_RB1@1	25.15
n66_40MHz_15kHz_1730MHz_DFT-s-OFDM QPSK_RB1@214	24.82
n66_40MHz_15kHz_1730MHz_DFT-s-OFDM QPSK_RB108@54	25.17
n66_40MHz_15kHz_1730MHz_DFT-s-OFDM QPSK_RB216@0	24.24
n66_40MHz_15kHz_1730MHz_DFT-s-OFDM 16 QAM_RB216@0	23.45
n66_40MHz_15kHz_1730MHz_DFT-s-OFDM 64 QAM_RB216@0	22.43
n66_40MHz_15kHz_1730MHz_DFT-s-OFDM 256 QAM_RB216@0	20.56
n66_40MHz_15kHz_1730MHz_CP-OFDM QPSK_RB1@1	23.81
n66_40MHz_15kHz_1730MHz_CP-OFDM QPSK_RB1@214	23.79
n66_40MHz_15kHz_1730MHz_CP-OFDM QPSK_RB108@54	23.67
n66_40MHz_15kHz_1730MHz_CP-OFDM QPSK_RB216@0	22.38
n66_40MHz_15kHz_1730MHz_CP-OFDM 16 QAM_RB216@0	22.00
n66_40MHz_15kHz_1730MHz_CP-OFDM 64 QAM_RB216@0	21.56
n66_40MHz_15kHz_1730MHz_CP-OFDM 256 QAM_RB216@0	18.53
n66_40MHz_15kHz_1745MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	25.00
n66_40MHz_15kHz_1745MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@214	25.22
n66_40MHz_15kHz_1745MHz_DFT-s-OFDM $\pi/2$ BPSK_RB108@54	25.01
n66_40MHz_15kHz_1745MHz_DFT-s-OFDM $\pi/2$ BPSK_RB216@0	24.88
n66_40MHz_15kHz_1745MHz_DFT-s-OFDM QPSK_RB1@1	24.86
n66_40MHz_15kHz_1745MHz_DFT-s-OFDM QPSK_RB1@214	25.03
n66_40MHz_15kHz_1745MHz_DFT-s-OFDM QPSK_RB108@54	25.01
n66_40MHz_15kHz_1745MHz_DFT-s-OFDM QPSK_RB216@0	24.01
n66_40MHz_15kHz_1745MHz_DFT-s-OFDM 16 QAM_RB216@0	23.57
n66_40MHz_15kHz_1745MHz_DFT-s-OFDM 64 QAM_RB216@0	23.05
n66_40MHz_15kHz_1745MHz_DFT-s-OFDM 256 QAM_RB216@0	21.06
n66_40MHz_15kHz_1745MHz_CP-OFDM QPSK_RB1@1	23.41
n66_40MHz_15kHz_1745MHz_CP-OFDM QPSK_RB1@214	23.93
n66_40MHz_15kHz_1745MHz_CP-OFDM QPSK_RB108@54	23.63
n66_40MHz_15kHz_1745MHz_CP-OFDM QPSK_RB216@0	22.36
n66_40MHz_15kHz_1745MHz_CP-OFDM 16 QAM_RB216@0	22.12
n66_40MHz_15kHz_1745MHz_CP-OFDM 64 QAM_RB216@0	21.70
n66_40MHz_15kHz_1745MHz_CP-OFDM 256 QAM_RB216@0	18.87
n66_40MHz_15kHz_1760MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	25.10
n66_40MHz_15kHz_1760MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@214	25.43
n66_40MHz_15kHz_1760MHz_DFT-s-OFDM $\pi/2$ BPSK_RB108@54	25.30
n66_40MHz_15kHz_1760MHz_DFT-s-OFDM $\pi/2$ BPSK_RB216@0	24.65
n66_40MHz_15kHz_1760MHz_DFT-s-OFDM QPSK_RB1@1	24.95
n66_40MHz_15kHz_1760MHz_DFT-s-OFDM QPSK_RB1@214	25.13

n66_40MHz_15kHz_1760MHz_DFT-s-OFDM QPSK_RB108@54	25.09
n66_40MHz_15kHz_1760MHz_DFT-s-OFDM QPSK_RB216@0	24.34
n66_40MHz_15kHz_1760MHz_DFT-s-OFDM 16 QAM_RB216@0	23.17
n66_40MHz_15kHz_1760MHz_DFT-s-OFDM 64 QAM_RB216@0	22.91
n66_40MHz_15kHz_1760MHz_DFT-s-OFDM 256 QAM_RB216@0	20.84
n66_40MHz_15kHz_1760MHz_CP-OFDM QPSK_RB1@1	23.77
n66_40MHz_15kHz_1760MHz_CP-OFDM QPSK_RB1@214	23.66
n66_40MHz_15kHz_1760MHz_CP-OFDM QPSK_RB108@54	23.67
n66_40MHz_15kHz_1760MHz_CP-OFDM QPSK_RB216@0	22.37
n66_40MHz_15kHz_1760MHz_CP-OFDM 16 QAM_RB216@0	22.44
n66_40MHz_15kHz_1760MHz_CP-OFDM 64 QAM_RB216@0	21.85
n66_40MHz_15kHz_1760MHz_CP-OFDM 256 QAM_RB216@0	18.94

5G NR n71:

Mode	Conducted Average Power(dBm)
n71_20MHz_15kHz_673MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	23.71
n71_20MHz_15kHz_673MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@104	24.00
n71_20MHz_15kHz_673MHz_DFT-s-OFDM $\pi/2$ BPSK_RB50@25	23.97
n71_20MHz_15kHz_673MHz_DFT-s-OFDM $\pi/2$ BPSK_RB100@0	23.16
n71_20MHz_15kHz_673MHz_DFT-s-OFDM QPSK_RB1@1	23.93
n71_20MHz_15kHz_673MHz_DFT-s-OFDM QPSK_RB1@104	23.95
n71_20MHz_15kHz_673MHz_DFT-s-OFDM QPSK_RB50@25	24.17
n71_20MHz_15kHz_673MHz_DFT-s-OFDM QPSK_RB100@0	23.19
n71_20MHz_15kHz_673MHz_DFT-s-OFDM 16 QAM_RB100@0	22.14
n71_20MHz_15kHz_673MHz_DFT-s-OFDM 64 QAM_RB100@0	21.23
n71_20MHz_15kHz_673MHz_DFT-s-OFDM 256 QAM_RB100@0	19.28
n71_20MHz_15kHz_673MHz_CP-OFDM QPSK_RB1@1	22.13
n71_20MHz_15kHz_673MHz_CP-OFDM QPSK_RB1@104	22.60
n71_20MHz_15kHz_673MHz_CP-OFDM QPSK_RB53@26	22.81
n71_20MHz_15kHz_673MHz_CP-OFDM QPSK_RB106@0	21.16
n71_20MHz_15kHz_673MHz_CP-OFDM 16 QAM_RB106@0	20.93
n71_20MHz_15kHz_673MHz_CP-OFDM 64 QAM_RB106@0	20.48
n71_20MHz_15kHz_673MHz_CP-OFDM 256 QAM_RB106@0	17.31
n71_20MHz_15kHz_680.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	23.99
n71_20MHz_15kHz_680.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@104	24.13
n71_20MHz_15kHz_680.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB50@25	23.99
n71_20MHz_15kHz_680.5MHz_DFT-s-OFDM $\pi/2$ BPSK_RB100@0	23.69
n71_20MHz_15kHz_680.5MHz_DFT-s-OFDM QPSK_RB1@1	24.01
n71_20MHz_15kHz_680.5MHz_DFT-s-OFDM QPSK_RB1@104	23.83
n71_20MHz_15kHz_680.5MHz_DFT-s-OFDM QPSK_RB50@25	24.76
n71_20MHz_15kHz_680.5MHz_DFT-s-OFDM QPSK_RB100@0	23.36
n71_20MHz_15kHz_680.5MHz_DFT-s-OFDM 16 QAM_RB100@0	22.11
n71_20MHz_15kHz_680.5MHz_DFT-s-OFDM 64 QAM_RB100@0	21.35
n71_20MHz_15kHz_680.5MHz_DFT-s-OFDM 256 QAM_RB100@0	19.80
n71_20MHz_15kHz_680.5MHz_CP-OFDM QPSK_RB1@1	22.23
n71_20MHz_15kHz_680.5MHz_CP-OFDM QPSK_RB1@104	22.34
n71_20MHz_15kHz_680.5MHz_CP-OFDM QPSK_RB53@26	22.39
n71_20MHz_15kHz_680.5MHz_CP-OFDM QPSK_RB106@0	21.23
n71_20MHz_15kHz_680.5MHz_CP-OFDM 16 QAM_RB106@0	21.08
n71_20MHz_15kHz_680.5MHz_CP-OFDM 64 QAM_RB106@0	20.43
n71_20MHz_15kHz_680.5MHz_CP-OFDM 256 QAM_RB106@0	17.65
n71_20MHz_15kHz_688MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	24.13
n71_20MHz_15kHz_688MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@104	23.71
n71_20MHz_15kHz_688MHz_DFT-s-OFDM $\pi/2$ BPSK_RB50@25	24.26
n71_20MHz_15kHz_688MHz_DFT-s-OFDM $\pi/2$ BPSK_RB100@0	23.67
n71_20MHz_15kHz_688MHz_DFT-s-OFDM QPSK_RB1@1	23.79
n71_20MHz_15kHz_688MHz_DFT-s-OFDM QPSK_RB1@104	23.81

n71_20MHz_15kHz_688MHz_DFT-s-OFDM QPSK_RB50@25	24.20
n71_20MHz_15kHz_688MHz_DFT-s-OFDM QPSK_RB100@0	23.06
n71_20MHz_15kHz_688MHz_DFT-s-OFDM 16 QAM_RB100@0	21.82
n71_20MHz_15kHz_688MHz_DFT-s-OFDM 64 QAM_RB100@0	21.47
n71_20MHz_15kHz_688MHz_DFT-s-OFDM 256 QAM_RB100@0	19.61
n71_20MHz_15kHz_688MHz_CP-OFDM QPSK_RB1@1	22.12
n71_20MHz_15kHz_688MHz_CP-OFDM QPSK_RB1@104	22.02
n71_20MHz_15kHz_688MHz_CP-OFDM QPSK_RB53@26	22.32
n71_20MHz_15kHz_688MHz_CP-OFDM QPSK_RB106@0	20.85
n71_20MHz_15kHz_688MHz_CP-OFDM 16 QAM_RB106@0	20.92
n71_20MHz_15kHz_688MHz_CP-OFDM 64 QAM_RB106@0	20.54
n71_20MHz_15kHz_688MHz_CP-OFDM 256 QAM_RB106@0	17.61

5G NR n77 Lower:

Mode	Conducted Average Power(dBm)
n77_1_100MHz_30kHz_3500MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	21.95
n77_1_100MHz_30kHz_3500MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@271	21.64
n77_1_100MHz_30kHz_3500MHz_DFT-s-OFDM $\pi/2$ BPSK_RB135@67	22.03
n77_1_100MHz_30kHz_3500MHz_DFT-s-OFDM $\pi/2$ BPSK_RB270@0	21.32
n77_1_100MHz_30kHz_3500MHz_DFT-s-OFDM QPSK_RB1@1	22.83
n77_1_100MHz_30kHz_3500MHz_DFT-s-OFDM QPSK_RB1@271	22.30
n77_1_100MHz_30kHz_3500MHz_DFT-s-OFDM QPSK_RB135@67	22.52
n77_1_100MHz_30kHz_3500MHz_DFT-s-OFDM QPSK_RB270@0	21.86
n77_1_100MHz_30kHz_3500MHz_DFT-s-OFDM 16 QAM_RB270@0	19.81
n77_1_100MHz_30kHz_3500MHz_DFT-s-OFDM 64 QAM_RB270@0	19.50
n77_1_100MHz_30kHz_3500MHz_DFT-s-OFDM 256 QAM_RB270@0	17.76
n77_1_100MHz_30kHz_3500MHz_CP-OFDM QPSK_RB1@1	20.62
n77_1_100MHz_30kHz_3500MHz_CP-OFDM QPSK_RB1@271	20.17
n77_1_100MHz_30kHz_3500MHz_CP-OFDM QPSK_RB137@68	20.83
n77_1_100MHz_30kHz_3500MHz_CP-OFDM QPSK_RB273@0	19.22
n77_1_100MHz_30kHz_3500MHz_CP-OFDM 16 QAM_RB273@0	19.08
n77_1_100MHz_30kHz_3500MHz_CP-OFDM 64 QAM_RB273@0	18.67
n77_1_100MHz_30kHz_3500MHz_CP-OFDM 256 QAM_RB273@0	15.36

5G NR n77 Middle:

Mode	Conducted Average Power(dBm)
n77_2_100MHz_30kHz_3600MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	21.62
n77_2_100MHz_30kHz_3600MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@271	21.61
n77_2_100MHz_30kHz_3600MHz_DFT-s-OFDM $\pi/2$ BPSK_RB135@67	21.83
n77_2_100MHz_30kHz_3600MHz_DFT-s-OFDM $\pi/2$ BPSK_RB270@0	21.11
n77_2_100MHz_30kHz_3600MHz_DFT-s-OFDM QPSK_RB1@1	22.04
n77_2_100MHz_30kHz_3600MHz_DFT-s-OFDM QPSK_RB1@271	22.18
n77_2_100MHz_30kHz_3600MHz_DFT-s-OFDM QPSK_RB135@67	22.03
n77_2_100MHz_30kHz_3600MHz_DFT-s-OFDM QPSK_RB270@0	21.29
n77_2_100MHz_30kHz_3600MHz_DFT-s-OFDM 16 QAM_RB270@0	19.46
n77_2_100MHz_30kHz_3600MHz_DFT-s-OFDM 64 QAM_RB270@0	18.65
n77_2_100MHz_30kHz_3600MHz_DFT-s-OFDM 256 QAM_RB270@0	17.00
n77_2_100MHz_30kHz_3600MHz_CP-OFDM QPSK_RB1@1	19.98
n77_2_100MHz_30kHz_3600MHz_CP-OFDM QPSK_RB1@271	20.06
n77_2_100MHz_30kHz_3600MHz_CP-OFDM QPSK_RB137@68	20.05
n77_2_100MHz_30kHz_3600MHz_CP-OFDM QPSK_RB273@0	18.71
n77_2_100MHz_30kHz_3600MHz_CP-OFDM 16 QAM_RB273@0	18.65
n77_2_100MHz_30kHz_3600MHz_CP-OFDM 64 QAM_RB273@0	17.66
n77_2_100MHz_30kHz_3600MHz_CP-OFDM 256 QAM_RB273@0	14.92
n77_2_100MHz_30kHz_3612.5MHz_DFT-s-OFDM QPSK_RB1@1	22.01
n77_2_100MHz_30kHz_3612.5MHz_DFT-s-OFDM QPSK_RB1@271	22.12
n77_2_100MHz_30kHz_3612.5MHz_DFT-s-OFDM QPSK_RB135@67	22.04
n77_2_100MHz_30kHz_3612.5MHz_DFT-s-OFDM QPSK_RB270@0	21.31
n77_2_100MHz_30kHz_3625MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	22.57
n77_2_100MHz_30kHz_3625MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@271	22.08
n77_2_100MHz_30kHz_3625MHz_DFT-s-OFDM $\pi/2$ BPSK_RB135@67	21.73
n77_2_100MHz_30kHz_3625MHz_DFT-s-OFDM $\pi/2$ BPSK_RB270@0	21.18
n77_2_100MHz_30kHz_3625MHz_DFT-s-OFDM QPSK_RB1@1	21.82
n77_2_100MHz_30kHz_3625MHz_DFT-s-OFDM QPSK_RB1@271	21.77
n77_2_100MHz_30kHz_3625MHz_DFT-s-OFDM QPSK_RB135@67	22.12
n77_2_100MHz_30kHz_3625MHz_DFT-s-OFDM QPSK_RB270@0	21.08
n77_2_100MHz_30kHz_3625MHz_DFT-s-OFDM 16 QAM_RB270@0	19.44
n77_2_100MHz_30kHz_3625MHz_DFT-s-OFDM 64 QAM_RB270@0	18.51
n77_2_100MHz_30kHz_3625MHz_DFT-s-OFDM 256 QAM_RB270@0	16.66
n77_2_100MHz_30kHz_3625MHz_CP-OFDM QPSK_RB1@1	19.98
n77_2_100MHz_30kHz_3625MHz_CP-OFDM QPSK_RB1@271	19.81
n77_2_100MHz_30kHz_3625MHz_CP-OFDM QPSK_RB137@68	19.80
n77_2_100MHz_30kHz_3625MHz_CP-OFDM QPSK_RB273@0	18.25
n77_2_100MHz_30kHz_3625MHz_CP-OFDM 16 QAM_RB273@0	18.43
n77_2_100MHz_30kHz_3625MHz_CP-OFDM 64 QAM_RB273@0	17.76
n77_2_100MHz_30kHz_3625MHz_CP-OFDM 256 QAM_RB273@0	14.54
n77_2_100MHz_30kHz_3650MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	21.16
n77_2_100MHz_30kHz_3650MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@271	21.18

n77_2_100MHz_30kHz_3650MHz_DFT-s-OFDM $\pi/2$ BPSK_RB135@67	21.60
n77_2_100MHz_30kHz_3650MHz_DFT-s-OFDM $\pi/2$ BPSK_RB270@0	21.42
n77_2_100MHz_30kHz_3650MHz_DFT-s-OFDM QPSK_RB1@1	22.04
n77_2_100MHz_30kHz_3650MHz_DFT-s-OFDM QPSK_RB1@271	21.79
n77_2_100MHz_30kHz_3650MHz_DFT-s-OFDM QPSK_RB135@67	22.35
n77_2_100MHz_30kHz_3650MHz_DFT-s-OFDM QPSK_RB270@0	21.44
n77_2_100MHz_30kHz_3650MHz_DFT-s-OFDM 16 QAM_RB270@0	19.64
n77_2_100MHz_30kHz_3650MHz_DFT-s-OFDM 64 QAM_RB270@0	18.98
n77_2_100MHz_30kHz_3650MHz_DFT-s-OFDM 256 QAM_RB270@0	16.94
n77_2_100MHz_30kHz_3650MHz_CP-OFDM QPSK_RB1@1	20.01
n77_2_100MHz_30kHz_3650MHz_CP-OFDM QPSK_RB1@271	20.74
n77_2_100MHz_30kHz_3650MHz_CP-OFDM QPSK_RB137@68	20.12
n77_2_100MHz_30kHz_3650MHz_CP-OFDM QPSK_RB273@0	18.42
n77_2_100MHz_30kHz_3650MHz_CP-OFDM 16 QAM_RB273@0	18.57
n77_2_100MHz_30kHz_3650MHz_CP-OFDM 64 QAM_RB273@0	18.22
n77_2_100MHz_30kHz_3650MHz_CP-OFDM 256 QAM_RB273@0	15.36

5G NR n77 Upper:

Mode	Conducted Average Power(dBm)
n77_3_100MHz_30kHz_3750MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	22.07
n77_3_100MHz_30kHz_3750MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@271	22.35
n77_3_100MHz_30kHz_3750MHz_DFT-s-OFDM $\pi/2$ BPSK_RB135@67	23.95
n77_3_100MHz_30kHz_3750MHz_DFT-s-OFDM $\pi/2$ BPSK_RB270@0	22.50
n77_3_100MHz_30kHz_3750MHz_DFT-s-OFDM QPSK_RB1@1	22.75
n77_3_100MHz_30kHz_3750MHz_DFT-s-OFDM QPSK_RB1@271	23.29
n77_3_100MHz_30kHz_3750MHz_DFT-s-OFDM QPSK_RB135@67	23.49
n77_3_100MHz_30kHz_3750MHz_DFT-s-OFDM QPSK_RB270@0	22.57
n77_3_100MHz_30kHz_3750MHz_DFT-s-OFDM 16 QAM_RB270@0	20.83
n77_3_100MHz_30kHz_3750MHz_DFT-s-OFDM 64 QAM_RB270@0	20.30
n77_3_100MHz_30kHz_3750MHz_DFT-s-OFDM 256 QAM_RB270@0	18.41
n77_3_100MHz_30kHz_3750MHz_CP-OFDM QPSK_RB1@1	20.68
n77_3_100MHz_30kHz_3750MHz_CP-OFDM QPSK_RB1@271	20.96
n77_3_100MHz_30kHz_3750MHz_CP-OFDM QPSK_RB137@68	22.05
n77_3_100MHz_30kHz_3750MHz_CP-OFDM QPSK_RB273@0	19.55
n77_3_100MHz_30kHz_3750MHz_CP-OFDM 16 QAM_RB273@0	19.62
n77_3_100MHz_30kHz_3750MHz_CP-OFDM 64 QAM_RB273@0	19.32
n77_3_100MHz_30kHz_3750MHz_CP-OFDM 256 QAM_RB273@0	16.14
n77_3_100MHz_30kHz_3780MHz_DFT-s-OFDM QPSK_RB1@1	22.75
n77_3_100MHz_30kHz_3780MHz_DFT-s-OFDM QPSK_RB1@271	23.09
n77_3_100MHz_30kHz_3780MHz_DFT-s-OFDM QPSK_RB135@67	23.39
n77_3_100MHz_30kHz_3780MHz_DFT-s-OFDM QPSK_RB270@0	22.47
n77_3_100MHz_30kHz_3810MHz_DFT-s-OFDM QPSK_RB1@1	22.75
n77_3_100MHz_30kHz_3810MHz_DFT-s-OFDM QPSK_RB1@271	23.05
n77_3_100MHz_30kHz_3810MHz_DFT-s-OFDM QPSK_RB135@67	23.25
n77_3_100MHz_30kHz_3810MHz_DFT-s-OFDM QPSK_RB270@0	22.50
n77_3_100MHz_30kHz_3840MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	22.43
n77_3_100MHz_30kHz_3840MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@271	22.33
n77_3_100MHz_30kHz_3840MHz_DFT-s-OFDM $\pi/2$ BPSK_RB135@67	22.42
n77_3_100MHz_30kHz_3840MHz_DFT-s-OFDM $\pi/2$ BPSK_RB270@0	22.23
n77_3_100MHz_30kHz_3840MHz_DFT-s-OFDM QPSK_RB1@1	23.03
n77_3_100MHz_30kHz_3840MHz_DFT-s-OFDM QPSK_RB1@271	23.38
n77_3_100MHz_30kHz_3840MHz_DFT-s-OFDM QPSK_RB135@67	23.18
n77_3_100MHz_30kHz_3840MHz_DFT-s-OFDM QPSK_RB270@0	22.16
n77_3_100MHz_30kHz_3840MHz_DFT-s-OFDM 16 QAM_RB270@0	20.34
n77_3_100MHz_30kHz_3840MHz_DFT-s-OFDM 64 QAM_RB270@0	19.82
n77_3_100MHz_30kHz_3840MHz_DFT-s-OFDM 256 QAM_RB270@0	18.17
n77_3_100MHz_30kHz_3840MHz_CP-OFDM QPSK_RB1@1	21.16
n77_3_100MHz_30kHz_3840MHz_CP-OFDM QPSK_RB1@271	21.13
n77_3_100MHz_30kHz_3840MHz_CP-OFDM QPSK_RB137@68	20.98
n77_3_100MHz_30kHz_3840MHz_CP-OFDM QPSK_RB273@0	19.32
n77_3_100MHz_30kHz_3840MHz_CP-OFDM 16 QAM_RB273@0	19.61

n77_3_100MHz_30kHz_3840MHz_CP-OFDM 64 QAM_RB273@0	19.00
n77_3_100MHz_30kHz_3840MHz_CP-OFDM 256 QAM_RB273@0	15.74
n77_3_100MHz_30kHz_3900MHz_DFT-s-OFDM QPSK_RB1@1	23.22
n77_3_100MHz_30kHz_3900MHz_DFT-s-OFDM QPSK_RB1@271	23.70
n77_3_100MHz_30kHz_3900MHz_DFT-s-OFDM QPSK_RB135@67	23.20
n77_3_100MHz_30kHz_3900MHz_DFT-s-OFDM QPSK_RB270@0	22.18
n77_3_100MHz_30kHz_3930MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	22.50
n77_3_100MHz_30kHz_3930MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@271	22.54
n77_3_100MHz_30kHz_3930MHz_DFT-s-OFDM $\pi/2$ BPSK_RB135@67	22.62
n77_3_100MHz_30kHz_3930MHz_DFT-s-OFDM $\pi/2$ BPSK_RB270@0	22.63
n77_3_100MHz_30kHz_3930MHz_DFT-s-OFDM QPSK_RB1@1	23.31
n77_3_100MHz_30kHz_3930MHz_DFT-s-OFDM QPSK_RB1@271	23.77
n77_3_100MHz_30kHz_3930MHz_DFT-s-OFDM QPSK_RB135@67	23.30
n77_3_100MHz_30kHz_3930MHz_DFT-s-OFDM QPSK_RB270@0	22.18
n77_3_100MHz_30kHz_3930MHz_DFT-s-OFDM 16 QAM_RB270@0	20.73
n77_3_100MHz_30kHz_3930MHz_DFT-s-OFDM 64 QAM_RB270@0	20.57
n77_3_100MHz_30kHz_3930MHz_DFT-s-OFDM 256 QAM_RB270@0	18.38
n77_3_100MHz_30kHz_3930MHz_CP-OFDM QPSK_RB1@1	21.19
n77_3_100MHz_30kHz_3930MHz_CP-OFDM QPSK_RB1@271	21.09
n77_3_100MHz_30kHz_3930MHz_CP-OFDM QPSK_RB137@68	21.71
n77_3_100MHz_30kHz_3930MHz_CP-OFDM QPSK_RB273@0	19.81
n77_3_100MHz_30kHz_3930MHz_CP-OFDM 16 QAM_RB273@0	20.18
n77_3_100MHz_30kHz_3930MHz_CP-OFDM 64 QAM_RB273@0	19.58
n77_3_100MHz_30kHz_3930MHz_CP-OFDM 256 QAM_RB273@0	16.74

5G NR n78 Lower:

Mode	Conducted Average Power(dBm)
n78_1_100MHz_30kHz_3500MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	22.95
n78_1_100MHz_30kHz_3500MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@271	22.36
n78_1_100MHz_30kHz_3500MHz_DFT-s-OFDM $\pi/2$ BPSK_RB135@67	22.90
n78_1_100MHz_30kHz_3500MHz_DFT-s-OFDM $\pi/2$ BPSK_RB270@0	21.88
n78_1_100MHz_30kHz_3500MHz_DFT-s-OFDM QPSK_RB1@1	22.68
n78_1_100MHz_30kHz_3500MHz_DFT-s-OFDM QPSK_RB1@271	22.65
n78_1_100MHz_30kHz_3500MHz_DFT-s-OFDM QPSK_RB135@67	22.63
n78_1_100MHz_30kHz_3500MHz_DFT-s-OFDM QPSK_RB270@0	21.78
n78_1_100MHz_30kHz_3500MHz_DFT-s-OFDM 16 QAM_RB270@0	20.74
n78_1_100MHz_30kHz_3500MHz_DFT-s-OFDM 64 QAM_RB270@0	20.17
n78_1_100MHz_30kHz_3500MHz_DFT-s-OFDM 256 QAM_RB270@0	18.02
n78_1_100MHz_30kHz_3500MHz_CP-OFDM QPSK_RB1@1	21.33
n78_1_100MHz_30kHz_3500MHz_CP-OFDM QPSK_RB1@271	20.96
n78_1_100MHz_30kHz_3500MHz_CP-OFDM QPSK_RB137@68	20.85
n78_1_100MHz_30kHz_3500MHz_CP-OFDM QPSK_RB273@0	19.75
n78_1_100MHz_30kHz_3500MHz_CP-OFDM 16 QAM_RB273@0	19.55
n78_1_100MHz_30kHz_3500MHz_CP-OFDM 64 QAM_RB273@0	18.91
n78_1_100MHz_30kHz_3500MHz_CP-OFDM 256 QAM_RB273@0	16.10

5G NR n78 Middle:

Mode	Conducted Average Power(dBm)
n78_2_100MHz_30kHz_3600MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	21.16
n78_2_100MHz_30kHz_3600MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@271	21.78
n78_2_100MHz_30kHz_3600MHz_DFT-s-OFDM $\pi/2$ BPSK_RB135@67	21.20
n78_2_100MHz_30kHz_3600MHz_DFT-s-OFDM $\pi/2$ BPSK_RB270@0	21.74
n78_2_100MHz_30kHz_3600MHz_DFT-s-OFDM QPSK_RB1@1	21.33
n78_2_100MHz_30kHz_3600MHz_DFT-s-OFDM QPSK_RB1@271	21.64
n78_2_100MHz_30kHz_3600MHz_DFT-s-OFDM QPSK_RB135@67	21.66
n78_2_100MHz_30kHz_3600MHz_DFT-s-OFDM QPSK_RB270@0	21.35
n78_2_100MHz_30kHz_3600MHz_DFT-s-OFDM 16 QAM_RB270@0	20.64
n78_2_100MHz_30kHz_3600MHz_DFT-s-OFDM 64 QAM_RB270@0	20.02
n78_2_100MHz_30kHz_3600MHz_DFT-s-OFDM 256 QAM_RB270@0	17.69
n78_2_100MHz_30kHz_3600MHz_CP-OFDM QPSK_RB1@1	20.90
n78_2_100MHz_30kHz_3600MHz_CP-OFDM QPSK_RB1@271	20.93
n78_2_100MHz_30kHz_3600MHz_CP-OFDM QPSK_RB137@68	20.84
n78_2_100MHz_30kHz_3600MHz_CP-OFDM QPSK_RB273@0	19.21
n78_2_100MHz_30kHz_3600MHz_CP-OFDM 16 QAM_RB273@0	19.41
n78_2_100MHz_30kHz_3600MHz_CP-OFDM 64 QAM_RB273@0	18.82
n78_2_100MHz_30kHz_3600MHz_CP-OFDM 256 QAM_RB273@0	16.10
n78_2_100MHz_30kHz_3612.5MHz_DFT-s-OFDM QPSK_RB1@1	21.30
n78_2_100MHz_30kHz_3612.5MHz_DFT-s-OFDM QPSK_RB1@271	21.60
n78_2_100MHz_30kHz_3612.5MHz_DFT-s-OFDM QPSK_RB135@67	21.61
n78_2_100MHz_30kHz_3612.5MHz_DFT-s-OFDM QPSK_RB270@0	21.32
n78_2_100MHz_30kHz_3625MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	21.50
n78_2_100MHz_30kHz_3625MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@271	21.28
n78_2_100MHz_30kHz_3625MHz_DFT-s-OFDM $\pi/2$ BPSK_RB135@67	21.39
n78_2_100MHz_30kHz_3625MHz_DFT-s-OFDM $\pi/2$ BPSK_RB270@0	22.16
n78_2_100MHz_30kHz_3625MHz_DFT-s-OFDM QPSK_RB1@1	21.11
n78_2_100MHz_30kHz_3625MHz_DFT-s-OFDM QPSK_RB1@271	21.76
n78_2_100MHz_30kHz_3625MHz_DFT-s-OFDM QPSK_RB135@67	21.54
n78_2_100MHz_30kHz_3625MHz_DFT-s-OFDM QPSK_RB270@0	21.28
n78_2_100MHz_30kHz_3625MHz_DFT-s-OFDM 16 QAM_RB270@0	20.62
n78_2_100MHz_30kHz_3625MHz_DFT-s-OFDM 64 QAM_RB270@0	20.20
n78_2_100MHz_30kHz_3625MHz_DFT-s-OFDM 256 QAM_RB270@0	17.53
n78_2_100MHz_30kHz_3625MHz_CP-OFDM QPSK_RB1@1	20.70
n78_2_100MHz_30kHz_3625MHz_CP-OFDM QPSK_RB1@271	21.33
n78_2_100MHz_30kHz_3625MHz_CP-OFDM QPSK_RB137@68	20.84
n78_2_100MHz_30kHz_3625MHz_CP-OFDM QPSK_RB273@0	19.57
n78_2_100MHz_30kHz_3625MHz_CP-OFDM 16 QAM_RB273@0	19.47
n78_2_100MHz_30kHz_3625MHz_CP-OFDM 64 QAM_RB273@0	18.98
n78_2_100MHz_30kHz_3625MHz_CP-OFDM 256 QAM_RB273@0	16.14
n78_2_100MHz_30kHz_3650MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	21.19
n78_2_100MHz_30kHz_3650MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@271	22.04

n78_2_100MHz_30kHz_3650MHz_DFT-s-OFDM $\pi/2$ BPSK_RB135@67	21.62
n78_2_100MHz_30kHz_3650MHz_DFT-s-OFDM $\pi/2$ BPSK_RB270@0	21.23
n78_2_100MHz_30kHz_3650MHz_DFT-s-OFDM QPSK_RB1@1	21.14
n78_2_100MHz_30kHz_3650MHz_DFT-s-OFDM QPSK_RB1@271	21.80
n78_2_100MHz_30kHz_3650MHz_DFT-s-OFDM QPSK_RB135@67	21.78
n78_2_100MHz_30kHz_3650MHz_DFT-s-OFDM QPSK_RB270@0	21.97
n78_2_100MHz_30kHz_3650MHz_DFT-s-OFDM 16 QAM_RB270@0	20.65
n78_2_100MHz_30kHz_3650MHz_DFT-s-OFDM 64 QAM_RB270@0	20.06
n78_2_100MHz_30kHz_3650MHz_DFT-s-OFDM 256 QAM_RB270@0	17.65
n78_2_100MHz_30kHz_3650MHz_CP-OFDM QPSK_RB1@1	20.55
n78_2_100MHz_30kHz_3650MHz_CP-OFDM QPSK_RB1@271	21.73
n78_2_100MHz_30kHz_3650MHz_CP-OFDM QPSK_RB137@68	21.26
n78_2_100MHz_30kHz_3650MHz_CP-OFDM QPSK_RB273@0	19.58
n78_2_100MHz_30kHz_3650MHz_CP-OFDM 16 QAM_RB273@0	19.52
n78_2_100MHz_30kHz_3650MHz_CP-OFDM 64 QAM_RB273@0	18.80
n78_2_100MHz_30kHz_3650MHz_CP-OFDM 256 QAM_RB273@0	15.71

5G NR n78 Upper:

Mode	Conducted Average Power(dBm)
n78_3_100MHz_30kHz_3750MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@1	23.02
n78_3_100MHz_30kHz_3750MHz_DFT-s-OFDM $\pi/2$ BPSK_RB1@271	22.99
n78_3_100MHz_30kHz_3750MHz_DFT-s-OFDM $\pi/2$ BPSK_RB135@67	23.83
n78_3_100MHz_30kHz_3750MHz_DFT-s-OFDM $\pi/2$ BPSK_RB270@0	22.94
n78_3_100MHz_30kHz_3750MHz_DFT-s-OFDM QPSK_RB1@1	23.24
n78_3_100MHz_30kHz_3750MHz_DFT-s-OFDM QPSK_RB1@271	23.17
n78_3_100MHz_30kHz_3750MHz_DFT-s-OFDM QPSK_RB135@67	24.02
n78_3_100MHz_30kHz_3750MHz_DFT-s-OFDM QPSK_RB270@0	22.47
n78_3_100MHz_30kHz_3750MHz_DFT-s-OFDM 16 QAM_RB270@0	21.54
n78_3_100MHz_30kHz_3750MHz_DFT-s-OFDM 64 QAM_RB270@0	20.89
n78_3_100MHz_30kHz_3750MHz_DFT-s-OFDM 256 QAM_RB270@0	18.76
n78_3_100MHz_30kHz_3750MHz_CP-OFDM QPSK_RB1@1	21.47
n78_3_100MHz_30kHz_3750MHz_CP-OFDM QPSK_RB1@271	21.45
n78_3_100MHz_30kHz_3750MHz_CP-OFDM QPSK_RB137@68	22.33
n78_3_100MHz_30kHz_3750MHz_CP-OFDM QPSK_RB273@0	20.09
n78_3_100MHz_30kHz_3750MHz_CP-OFDM 16 QAM_RB273@0	20.55
n78_3_100MHz_30kHz_3750MHz_CP-OFDM 64 QAM_RB273@0	19.66
n78_3_100MHz_30kHz_3750MHz_CP-OFDM 256 QAM_RB273@0	17.26

Remark:

1. The data of GSM/WCDMA/LTE/EN-DC Band (except for LTE band 42), NFC, WLAN/Bluetooth and SAR simultaneous transmission description, please refer to FCC ID: 2BU6A-A1, SAR report of 2602P41234E-20A[#], issued by Bay Area Compliance Laboratories Corp.(Dongguan).
2. The data of WLAN 6G, please refer to FCC ID: 2BU6A-A1, SAR report of Ti-CC26020196-701[#] and Ti-CC26020196-703[#], issued by Shenzhen BALUN Technology Co., Ltd.

Notes:

1. The frequency range of 5G NR n41 is 2496~2690MHz. Per KDB 447498 D01, according to the following formula Calculate N_c is 5.
2. The frequency range of 5G NR n77 Middle is 3550-3700MHz. Per KDB 447498 D01, according to the following formula Calculate N_c is 4.
3. The frequency range of 5G NR n77 Upper is 3700-3980MHz. Per KDB 447498 D01, according to the following formula Calculate N_c is 6.
4. The frequency range of 5G NR n78 Middle is 3550-3700MHz. Per KDB 447498 D01, according to the following formula Calculate N_c is 4.

KDB procedures, the following should be applied to determine the number of required test channels. The test channels should be evenly spread across the transmission frequency band of each wireless mode.¹⁴

$$N_c = \text{Round} \left\{ \left[100(f_{\text{high}} - f_{\text{low}}) / f_c \right]^{0.5} \times (f_c / 100)^{0.2} \right\},$$


where

- N_c is the number of test channels, rounded to the nearest integer,
- f_{high} and f_{low} are the highest and lowest channel frequencies within the transmission band,
- f_c is the mid-band channel frequency,
- all frequencies are in MHz.

STANDALONE SAR TEST EXCLUSION CONSIDERATIONS

Antennas Location:

Antennas Location (EUT Back View)

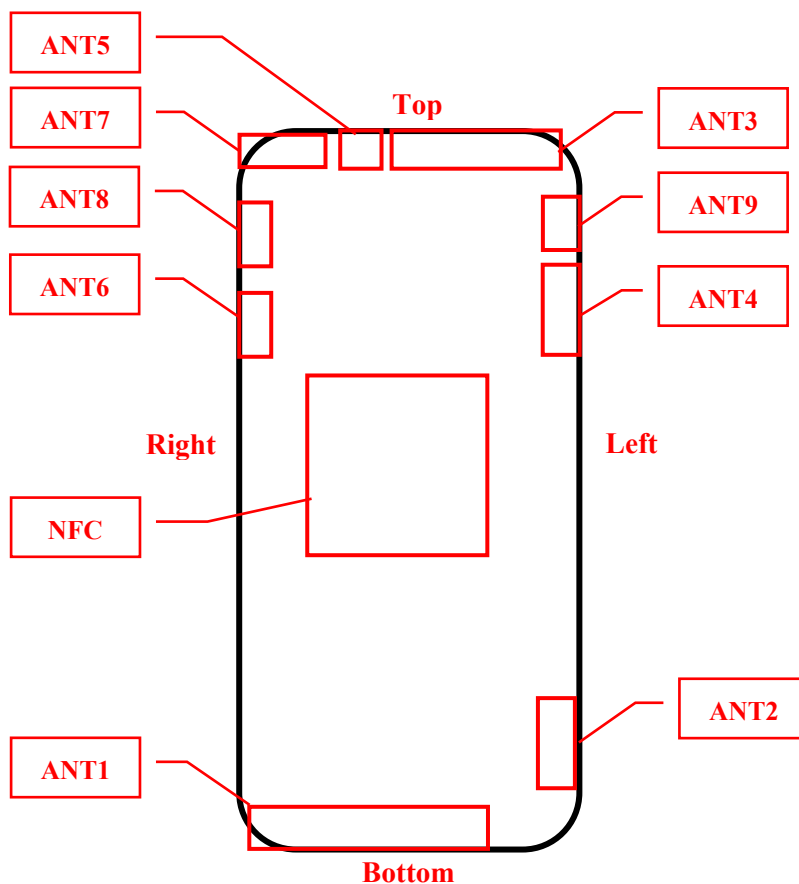

Antenna	Description
ANT1	GSM 850, WCDMA Band 5 LTE Band 5/12/13/17/26/71 5G NR n5/12/71
ANT2	LTE Band 7/38/41 5G NR n7/38/41
ANT4	GSM 1900, WCDMA Band 2/4 LTE Band 2/4/25/66 5G NR n2/66
ANT5	LTE Band 42 5G NR n77/78
ANT7	WIFI 2.4G (Chain 0), Bluetooth
ANT8	WIFI 5G (Chain 0), WIFI 6G (Chain 0)
ANT9	WIFI 2.4G (Chain 1), WIFI 5G (Chain 1), WIFI 6G (Chain 1)
NFC	NFC

Note: The above statistics only include antennas with transmitting

Antenna Distance To Edge (TRX)

Antenna Distance To Edge(mm)						
Antenna	Front	Back	Left	Right	Top	Bottom
Ant1	<5	<5	9	<5	160	<5
Ant2	<5	<5	<5	69	145	8
Ant4	<5	<5	<5	68	31	110
Ant5	<5	<5	36	26	<5	164
Ant7	<5	<5	53	<5	<5	157
Ant8	<5	<5	56	<5	18	136
Ant9	<5	<5	<5	64	9	151

SAR test exclusion for the EUT edge considerations Result

Mode	Front	Back	Left	Right	Top	Bottom
Ant1	Required	Required	Required	Required	Exclusion	Required
Ant2	Required	Required	Required	Exclusion	Exclusion	Required
Ant4	Required	Required	Required	Exclusion	Exclusion	Exclusion
Ant5	Required	Required	Exclusion	Exclusion	Required	Exclusion

Note:

Required : The distance to Edge is less than 25mm, testing is required.

Exclusion: The distance to Edge is more than 25 mm, testing is not required.

Extremity Exposure Considerations

Per KDB 648474 D04 v01r03, this device is considered a “Phablet” since the diagonal dimension is >160mm and < 200mm, when hotspot mode applies, extremity SAR is required only for the surfaces and edges with hotspot mode scaled to the maximum output power (with tolerance is 1g SAR > 1.2W/kg)

Extremity Exposure Condition		
Worst Mode	Hotspot SAR value	Extremity Condition Test
WCDMA Band 5	0.97 W/kg@1g	Exclusion

Remark:

1. The data of GSM/WCDMA/LTE/EN-DC Band (except for LTE band 42), NFC, WLAN/Bluetooth and SAR simultaneous transmission description, please refer to FCC ID: 2BU6A-A1, SAR report of 2602P41234E-20A#, issued by Bay Area Compliance Laboratories Corp.(Dongguan).
2. The data of WLAN 6G, please refer to FCC ID: 2BU6A-A1, SAR report of Ti-CC26020196-701# and Ti-CC26020196-703#, issued by Shenzhen BALUN Technology Co., Ltd.

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetry evaluation.

Test Results:

Environmental Conditions:

Ambient Temperature:	21.2 ~ 22.3℃	21.5 ~ 22.9℃	20.5 ~ 21.9℃	21.5 ~ 22.7℃	21.6 ~ 22.6℃	21.3 ~ 21.9℃
Relative Humidity:	61 ~ 68%	58 ~ 70%	45 ~ 69%	52 ~ 65%	51 ~ 67%	55 ~ 69%
ATM Pressure:	100.8 kPa	101.1 kPa	100.4 kPa	100.8 kPa	101.1 kPa	100.4 kPa
Test Date:	2026/01/26	2026/01/27	2026/01/28	2026/01/29	2026/01/30	2026/01/31

Ambient Temperature:	21.3 ~ 22.5℃	20.9 ~ 22.5℃	21 ~ 22.7℃
Relative Humidity:	37 ~ 49%	39 ~ 53%	41 ~ 59%
ATM Pressure:	101.2 kPa	100.8 kPa	100.6 kPa
Test Date:	2026/02/02	2026/02/03	2026/02/04

* Testing was performed by Bob Lu, Danil Qiu and Sid Luo.

LTE Band 42(ANT5):

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	3460	20	1RB	-0.08	22.24	22.5	1.062	0.482	0.52	/
	3500	20	1RB	0.05	21.97	22.5	1.130	0.555	0.63	/
	3540	20	1RB	0.06	22.22	22.5	1.067	0.547	0.59	/
	3500	20	50%RB	-0.09	20.99	22.5	1.416	0.567	0.81	1#
Head Left Tilt	3460	20	1RB	/	/	/	/	/	/	/
	3500	20	1RB	-0.09	21.97	22.5	1.130	0.509	0.58	/
	3540	20	1RB	/	/	/	/	/	/	/
	3500	20	50%RB	0.13	20.99	22.5	1.416	0.525	0.75	/
Head Right Cheek	3460	20	1RB	/	/	/	/	/	/	/
	3500	20	1RB	0.13	21.97	22.5	1.130	0.527	0.60	/
	3540	20	1RB	/	/	/	/	/	/	/
	3500	20	50%RB	0.04	20.99	22.5	1.416	0.539	0.77	/
Head Right Tilt	3460	20	1RB	/	/	/	/	/	/	/
	3500	20	1RB	0.19	21.97	22.5	1.130	0.429	0.49	/
	3540	20	1RB	/	/	/	/	/	/	/
	3500	20	50%RB	0.16	20.99	22.5	1.416	0.458	0.65	/
Body Front (10 mm)	3460	20	1RB	/	/	/	/	/	/	/
	3500	20	1RB	-0.11	21.97	22.5	1.130	0.122	0.14	/
	3540	20	1RB	/	/	/	/	/	/	/
	3500	20	50%RB	0.08	20.99	22.5	1.416	0.125	0.18	/
Body Back (10 mm)	3460	20	1RB	0.19	22.24	22.5	1.062	0.254	0.27	/
	3500	20	1RB	-0.10	21.97	22.5	1.130	0.253	0.29	/
	3540	20	1RB	0.01	22.22	22.5	1.067	0.270	0.29	/
	3500	20	50%RB	-0.16	20.99	22.5	1.416	0.287	0.41	2#
Body Top (10 mm)	3460	20	1RB	/	/	/	/	/	/	/
	3500	20	1RB	0.20	21.97	22.5	1.130	0.181	0.21	/
	3540	20	1RB	/	/	/	/	/	/	/
	3500	20	50%RB	0.07	20.99	22.5	1.416	0.184	0.27	/

The data above was performed on 2026/02/02

Notes:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
3. KDB 941225 D05-SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is $> 0.5\text{ dB}$ higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is $> 1.45\text{ W/kg}$
4. KDB 941225 D05-For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is $< 1.45\text{ W/kg}$, tests for the remaining required test channels are optional.
5. KDB 941225 D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are $\leq 0.8\text{ W/kg}$.
6. KDB 941225 D05- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
7. KDB 941225 D05- other channel bandwidths SAR test is required when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> 0.5\text{ dB}$ higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is $> 1.45\text{ W/kg}$.

5G NR n2(ANT4):

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	1870	40	1RB	/	/	/	/	/	/	/
	1880	40	1RB	-0.19	25.04	25.5	1.112	0.095	0.11	/
	1890	40	1RB	/	/	/	/	/	/	/
	1880	40	50%RB	0.03	24.70	25.5	1.202	0.090	0.11	/
Head Left Tilt	1870	40	1RB	/	/	/	/	/	/	/
	1880	40	1RB	-0.16	25.04	25.5	1.112	0.053	0.06	/
	1890	40	1RB	/	/	/	/	/	/	/
	1880	40	50%RB	-0.16	24.70	25.5	1.202	0.054	0.07	/
Head Right Cheek	1870	40	1RB	0.10	24.55	25.5	1.245	0.297	0.37	/
	1880	40	1RB	-0.09	25.04	25.5	1.112	0.282	0.32	/
	1890	40	1RB	0.11	24.52	25.5	1.253	0.298	0.38	3#
	1880	40	50%RB	-0.08	24.70	25.5	1.202	0.240	0.29	/
Head Right Tilt	1870	40	1RB	/	/	/	/	/	/	/
	1880	40	1RB	-0.05	25.04	25.5	1.112	0.132	0.15	/
	1890	40	1RB	/	/	/	/	/	/	/
	1880	40	50%RB	-0.08	24.70	25.5	1.202	0.115	0.14	/
Body Front (10 mm)	1870	40	1RB	/	/	/	/	/	/	/
	1880	40	1RB	0.18	25.04	25.5	1.112	0.068	0.08	/
	1890	40	1RB	/	/	/	/	/	/	/
	1880	40	50%RB	0.19	24.70	25.5	1.202	0.068	0.09	/
Body Back (10 mm)	1870	40	1RB	0.20	24.55	25.5	1.245	0.346	0.43	4#
	1880	40	1RB	-0.09	25.04	25.5	1.112	0.357	0.40	/
	1890	40	1RB	0.04	24.52	25.5	1.253	0.337	0.43	/
	1880	40	50%RB	-0.13	24.70	25.5	1.202	0.341	0.41	/
Body Left (10 mm)	1870	40	1RB	/	/	/	/	/	/	/
	1880	40	1RB	0.06	25.04	25.5	1.112	0.261	0.30	/
	1890	40	1RB	/	/	/	/	/	/	/
	1880	40	50%RB	-0.04	24.70	25.5	1.202	0.272	0.33	/

The data above was performed on 2026/01/28

5G NR n5(ANT1):

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	834	20	1RB	/	/	/	/	/	/	/
	836.5	20	1RB	-0.03	24.28	24.3	1.005	0.143	0.15	/
	839	20	1RB	/	/	/	/	/	/	/
	836.5	20	50%RB	0.09	24.21	24.3	1.021	0.145	0.15	/
Head Left Tilt	834	20	1RB	/	/	/	/	/	/	/
	836.5	20	1RB	-0.07	24.28	24.3	1.005	0.080	0.09	/
	839	20	1RB	/	/	/	/	/	/	/
	836.5	20	50%RB	0.05	24.21	24.3	1.021	0.080	0.09	/
Head Right Cheek	834	20	1RB	-0.12	23.90	24.3	1.096	0.193	0.22	5#
	836.5	20	1RB	-0.13	24.28	24.3	1.005	0.169	0.17	/
	839	20	1RB	0.03	24.25	24.3	1.012	0.203	0.21	/
	836.5	20	50%RB	-0.17	24.21	24.3	1.021	0.175	0.18	/
Head Right Tilt	834	20	1RB	/	/	/	/	/	/	/
	836.5	20	1RB	-0.02	24.28	24.3	1.005	0.088	0.09	/
	839	20	1RB	/	/	/	/	/	/	/
	836.5	20	50%RB	0.16	24.21	24.3	1.021	0.091	0.10	/
Body Front (10 mm)	834	20	1RB	/	/	/	/	/	/	/
	836.5	20	1RB	-0.10	24.28	24.3	1.005	0.143	0.15	/
	839	20	1RB	/	/	/	/	/	/	/
	836.5	20	50%RB	0.11	24.21	24.3	1.021	0.150	0.16	/
Body Back (10 mm)	834	20	1RB	-0.05	23.90	24.3	1.096	0.434	0.48	/
	836.5	20	1RB	-0.08	24.28	24.3	1.005	0.453	0.46	/
	839	20	1RB	0.17	24.25	24.3	1.012	0.494	0.50	6#
	836.5	20	50%RB	0.05	24.21	24.3	1.021	0.476	0.49	/
Body Left (10 mm)	834	20	1RB	/	/	/	/	/	/	/
	836.5	20	1RB	0.05	24.28	24.3	1.005	0.050	0.06	/
	839	20	1RB	/	/	/	/	/	/	/
	836.5	20	50%RB	-0.03	24.21	24.3	1.021	0.052	0.06	/
Body Right (10 mm)	834	20	1RB	/	/	/	/	/	/	/
	836.5	20	1RB	-0.16	24.28	24.3	1.005	0.164	0.17	/
	839	20	1RB	/	/	/	/	/	/	/
	836.5	20	50%RB	0.02	24.21	24.3	1.021	0.170	0.18	/
Body Bottom (10 mm)	834	20	1RB	/	/	/	/	/	/	/
	836.5	20	1RB	0.08	24.28	24.3	1.005	0.213	0.22	/
	839	20	1RB	/	/	/	/	/	/	/
	836.5	20	50%RB	0.17	24.21	24.3	1.021	0.225	0.23	/

The data above was performed on 2026/01/26

5G NR n7(ANT2):

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	2525	50	1RB	0.00	22.23	23.0	1.194	0.047	0.06	/
	2535	50	1RB	-0.19	22.40	23.0	1.148	0.046	0.06	/
	2545	50	1RB	0.00	22.38	23.0	1.153	0.053	0.07	7#
	2535	50	50%RB	0.17	22.27	23.0	1.183	0.047	0.06	/
Head Left Tilt	2525	50	1RB	/	/	/	/	/	/	/
	2535	50	1RB	-0.03	22.40	23.0	1.148	0.005	0.01	/
	2545	50	1RB	/	/	/	/	/	/	/
	2535	50	50%RB	0.07	22.27	23.0	1.183	0.005	0.01	/
Head Right Cheek	2525	50	1RB	/	/	/	/	/	/	/
	2535	50	1RB	0.00	22.40	23.0	1.148	0.020	0.03	/
	2545	50	1RB	/	/	/	/	/	/	/
	2535	50	50%RB	0.01	22.27	23.0	1.183	0.022	0.03	/
Head Right Tilt	2525	50	1RB	/	/	/	/	/	/	/
	2535	50	1RB	-0.01	22.40	23.0	1.148	0.022	0.03	/
	2545	50	1RB	/	/	/	/	/	/	/
	2535	50	50%RB	-0.06	22.27	23.0	1.183	0.024	0.03	/
Body Front (10 mm)	2525	50	1RB	/	/	/	/	/	/	/
	2535	50	1RB	-0.04	22.40	23.0	1.148	0.055	0.07	/
	2545	50	1RB	/	/	/	/	/	/	/
	2535	50	50%RB	-0.09	22.27	23.0	1.183	0.056	0.07	/
Body Back (10 mm)	2525	50	1RB	-0.04	22.23	23.0	1.194	0.202	0.25	8#
	2535	50	1RB	-0.10	22.40	23.0	1.148	0.186	0.22	/
	2545	50	1RB	-0.05	22.38	23.0	1.153	0.207	0.24	/
	2535	50	50%RB	-0.18	22.27	23.0	1.183	0.195	0.24	/
Body Left (10 mm)	2525	50	1RB	/	/	/	/	/	/	/
	2535	50	1RB	-0.04	22.40	23.0	1.148	0.085	0.10	/
	2545	50	1RB	/	/	/	/	/	/	/
	2535	50	50%RB	-0.05	22.27	23.0	1.183	0.088	0.11	/
Body Bottom (10 mm)	2525	50	1RB	/	/	/	/	/	/	/
	2535	50	1RB	0.00	22.40	23.0	1.148	0.084	0.10	/
	2545	50	1RB	/	/	/	/	/	/	/
	2535	50	50%RB	-0.14	22.27	23.0	1.183	0.084	0.10	/

The data above was performed on 2026/01/30

5G NR n12(ANT1):

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	706.5	15	1RB	/	/	/	/	/	/	/
	707.5	15	1RB	-0.01	23.79	24.0	1.050	0.111	0.12	/
	708.5	15	1RB	/	/	/	/	/	/	/
	707.5	15	50%RB	-0.10	23.66	24.0	1.081	0.115	0.13	/
Head Left Tilt	706.5	15	1RB	/	/	/	/	/	/	/
	707.5	15	1RB	0.05	23.79	24.0	1.050	0.077	0.09	/
	708.5	15	1RB	/	/	/	/	/	/	/
	707.5	15	50%RB	0.02	23.66	24.0	1.081	0.082	0.09	/
Head Right Cheek	706.5	15	1RB	-0.14	23.90	24.0	1.023	0.122	0.13	/
	707.5	15	1RB	0.18	23.79	24.0	1.050	0.130	0.14	/
	708.5	15	1RB	0.06	23.68	24.0	1.076	0.128	0.14	/
	707.5	15	50%RB	0.00	23.66	24.0	1.081	0.138	0.15	9#
Head Right Tilt	706.5	15	1RB	/	/	/	/	/	/	/
	707.5	15	1RB	-0.04	23.79	24.0	1.050	0.066	0.07	/
	708.5	15	1RB	/	/	/	/	/	/	/
	707.5	15	50%RB	-0.16	23.66	24.0	1.081	0.070	0.08	/
Body Front (10 mm)	706.5	15	1RB	/	/	/	/	/	/	/
	707.5	15	1RB	0.11	23.79	24.0	1.050	0.131	0.14	/
	708.5	15	1RB	/	/	/	/	/	/	/
	707.5	15	50%RB	-0.02	23.66	24.0	1.081	0.140	0.16	/
Body Back (10 mm)	706.5	15	1RB	0.10	23.90	24.0	1.023	0.196	0.21	/
	707.5	15	1RB	0.04	23.79	24.0	1.050	0.207	0.22	/
	708.5	15	1RB	0.13	23.68	24.0	1.076	0.198	0.22	/
	707.5	15	50%RB	-0.19	23.66	24.0	1.081	0.218	0.24	10#
Body Left (10 mm)	706.5	15	1RB	/	/	/	/	/	/	/
	707.5	15	1RB	-0.12	23.79	24.0	1.050	0.120	0.13	/
	708.5	15	1RB	/	/	/	/	/	/	/
	707.5	15	50%RB	-0.17	23.66	24.0	1.081	0.128	0.14	/
Body Right (10 mm)	706.5	15	1RB	/	/	/	/	/	/	/
	707.5	15	1RB	-0.16	23.79	24.0	1.050	0.199	0.21	/
	708.5	15	1RB	/	/	/	/	/	/	/
	707.5	15	50%RB	-0.07	23.66	24.0	1.081	0.217	0.24	/
Body Bottom (10 mm)	706.5	15	1RB	/	/	/	/	/	/	/
	707.5	15	1RB	-0.15	23.79	24.0	1.050	0.070	0.08	/
	708.5	15	1RB	/	/	/	/	/	/	/
	707.5	15	50%RB	-0.20	23.66	24.0	1.081	0.076	0.09	/

The data above was performed on 2026/01/27

5G NR n38(ANT2):

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	2590	40	1RB	0.01	23.34	24.0	1.164	0.063	0.08	11#
	2595	40	1RB	0.06	23.22	24.0	1.197	0.054	0.07	/
	2600	40	1RB	0.02	23.39	24.0	1.151	0.062	0.08	/
	2595	40	50%RB	0.13	23.00	24.0	1.259	0.052	0.07	/
Head Left Tilt	2590	40	1RB	/	/	/	/	/	/	/
	2595	40	1RB	-0.17	23.22	24.0	1.197	0.013	0.02	/
	2600	40	1RB	/	/	/	/	/	/	/
	2595	40	50%RB	-0.12	23.00	24.0	1.259	0.008	0.02	/
Head Right Cheek	2590	40	1RB	/	/	/	/	/	/	/
	2595	40	1RB	0.07	23.22	24.0	1.197	0.019	0.03	/
	2600	40	1RB	/	/	/	/	/	/	/
	2595	40	50%RB	-0.02	23.00	24.0	1.259	0.015	0.02	/
Head Right Tilt	2590	40	1RB	/	/	/	/	/	/	/
	2595	40	1RB	-0.06	23.22	24.0	1.197	0.032	0.04	/
	2600	40	1RB	/	/	/	/	/	/	/
	2595	40	50%RB	-0.14	23.00	24.0	1.259	0.031	0.04	/
Body Front (10 mm)	2590	40	1RB	/	/	/	/	/	/	/
	2595	40	1RB	0.08	23.22	24.0	1.197	0.081	0.10	/
	2600	40	1RB	/	/	/	/	/	/	/
	2595	40	50%RB	0.17	23.00	24.0	1.259	0.078	0.10	/
Body Back (10 mm)	2590	40	1RB	0.01	23.34	24.0	1.164	0.272	0.32	12#
	2595	40	1RB	-0.16	23.22	24.0	1.197	0.211	0.26	/
	2600	40	1RB	0.10	23.39	24.0	1.151	0.268	0.31	/
	2595	40	50%RB	-0.04	23.00	24.0	1.259	0.170	0.22	/
Body Left (10 mm)	2590	40	1RB	/	/	/	/	/	/	/
	2595	40	1RB	-0.02	23.22	24.0	1.197	0.110	0.14	/
	2600	40	1RB	/	/	/	/	/	/	/
	2595	40	50%RB	0.00	23.00	24.0	1.259	0.105	0.14	/
Body Bottom (10 mm)	2590	40	1RB	/	/	/	/	/	/	/
	2595	40	1RB	-0.12	23.22	24.0	1.197	0.058	0.07	/
	2600	40	1RB	/	/	/	/	/	/	/
	2595	40	50%RB	-0.07	23.00	24.0	1.259	0.056	0.08	/

The data above was performed on 2026/01/30

5G NR n41(ANT2):

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	2546.01	100	1RB	-0.16	21.97	23.0	1.268	0.054	0.07	/
	2593	100	1RB	0.04	22.49	23.0	1.125	0.071	0.08	/
	2640	100	1RB	-0.13	22.45	23.0	1.135	0.060	0.07	/
	2593	100	50%RB	0.17	21.98	23.0	1.265	0.068	0.09	13#
Head Left Tilt	2546.01	100	1RB	/	/	/	/	/	/	/
	2593	100	1RB	-0.16	22.49	23.0	1.125	0.017	0.02	/
	2640	100	1RB	/	/	/	/	/	/	/
	2593	100	50%RB	-0.02	21.98	23.0	1.265	0.014	0.02	/
Head Right Cheek	2546.01	100	1RB	/	/	/	/	/	/	/
	2593	100	1RB	-0.09	22.49	23.0	1.125	0.041	0.05	/
	2640	100	1RB	/	/	/	/	/	/	/
	2593	100	50%RB	0.15	21.98	23.0	1.265	0.038	0.05	/
Head Right Tilt	2546.01	100	1RB	/	/	/	/	/	/	/
	2593	100	1RB	0.10	22.49	23.0	1.125	0.038	0.05	/
	2640	100	1RB	/	/	/	/	/	/	/
	2593	100	50%RB	-0.09	21.98	23.0	1.265	0.037	0.05	/
Body Front (10 mm)	2546.01	100	1RB	/	/	/	/	/	/	/
	2593	100	1RB	0.07	22.49	23.0	1.125	0.088	0.10	/
	2640	100	1RB	/	/	/	/	/	/	/
	2593	100	50%RB	-0.10	21.98	23.0	1.265	0.084	0.11	/
Body Back (10 mm)	2546.01	100	1RB	-0.16	21.97	23.0	1.268	0.256	0.33	/
	2593	100	1RB	-0.19	22.49	23.0	1.125	0.279	0.32	/
	2640	100	1RB	-0.07	22.45	23.0	1.135	0.313	0.36	14#
	2593	100	50%RB	0.12	21.98	23.0	1.265	0.268	0.34	/
Body Left (10 mm)	2546.01	100	1RB	/	/	/	/	/	/	/
	2593	100	1RB	-0.08	22.49	23.0	1.125	0.139	0.16	/
	2640	100	1RB	/	/	/	/	/	/	/
	2593	100	50%RB	-0.11	21.98	23.0	1.265	0.130	0.17	/
Body Bottom (10 mm)	2546.01	100	1RB	/	/	/	/	/	/	/
	2593	100	1RB	-0.01	22.49	23.0	1.125	0.086	0.10	/
	2640	100	1RB	/	/	/	/	/	/	/
	2593	100	50%RB	-0.10	21.98	23.0	1.265	0.081	0.11	/

The data above was performed on 2026/01/31

5G NR n66(ANT4):

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	1730	40	1RB	/	/	/	/	/	/	/
	1745	40	1RB	-0.06	25.03	26.0	1.250	0.167	0.21	/
	1760	40	1RB	/	/	/	/	/	/	/
	1745	40	50%RB	-0.18	25.01	26.0	1.256	0.176	0.23	/
Head Left Tilt	1730	40	1RB	/	/	/	/	/	/	/
	1745	40	1RB	-0.01	25.03	26.0	1.250	0.110	0.14	/
	1760	40	1RB	/	/	/	/	/	/	/
	1745	40	50%RB	-0.12	25.01	26.0	1.256	0.109	0.14	/
Head Right Cheek	1730	40	1RB	0.15	25.15	26.0	1.216	0.361	0.44	/
	1745	40	1RB	0.04	25.03	26.0	1.250	0.311	0.39	/
	1760	40	1RB	0.10	25.13	26.0	1.222	0.409	0.50	15#
	1745	40	50%RB	0.17	25.01	26.0	1.256	0.317	0.40	/
Head Right Tilt	1730	40	1RB	/	/	/	/	/	/	/
	1745	40	1RB	-0.07	25.03	26.0	1.250	0.145	0.19	/
	1760	40	1RB	/	/	/	/	/	/	/
	1745	40	50%RB	0.02	25.01	26.0	1.256	0.149	0.19	/
Body Front (10 mm)	1730	40	1RB	/	/	/	/	/	/	/
	1745	40	1RB	-0.17	25.03	26.0	1.250	0.079	0.10	/
	1760	40	1RB	/	/	/	/	/	/	/
	1745	40	50%RB	0.05	25.01	26.0	1.256	0.084	0.11	/
Body Back (10 mm)	1730	40	1RB	/	/	/	/	/	/	/
	1745	40	1RB	-0.04	25.03	26.0	1.250	0.234	0.30	/
	1760	40	1RB	/	/	/	/	/	/	/
	1745	40	50%RB	0.18	25.01	26.0	1.256	0.260	0.33	/
Body Left (10 mm)	1730	40	1RB	-0.15	25.15	26.0	1.216	0.242	0.30	/
	1745	40	1RB	0.17	25.03	26.0	1.250	0.266	0.34	/
	1760	40	1RB	0.05	25.13	26.0	1.222	0.314	0.39	16#
	1745	40	50%RB	-0.06	25.01	26.0	1.256	0.271	0.35	/

The data above was performed on 2026/01/29

5G NR n71(ANT1):

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	673	20	1RB	/	/	/	/	/	/	/
	680.5	20	1RB	-0.14	24.01	25.0	1.256	0.116	0.15	/
	688	20	1RB	/	/	/	/	/	/	/
	680.5	20	50%RB	-0.01	24.76	25.0	1.057	0.144	0.16	/
Head Left Tilt	673	20	1RB	/	/	/	/	/	/	/
	680.5	20	1RB	-0.11	24.01	25.0	1.256	0.078	0.10	/
	688	20	1RB	/	/	/	/	/	/	/
	680.5	20	50%RB	0.20	24.76	25.0	1.057	0.079	0.09	/
Head Right Cheek	673	20	1RB	-0.15	23.95	25.0	1.274	0.143	0.19	/
	680.5	20	1RB	-0.19	24.01	25.0	1.256	0.156	0.20	/
	688	20	1RB	-0.06	23.81	25.0	1.315	0.173	0.23	17#
	680.5	20	50%RB	0.02	24.76	25.0	1.057	0.153	0.17	/
Head Right Tilt	673	20	1RB	/	/	/	/	/	/	/
	680.5	20	1RB	0.17	24.01	25.0	1.256	0.075	0.10	/
	688	20	1RB	/	/	/	/	/	/	/
	680.5	20	50%RB	0.02	24.76	25.0	1.057	0.076	0.09	/
Body Front (10 mm)	673	20	1RB	/	/	/	/	/	/	/
	680.5	20	1RB	-0.04	24.01	25.0	1.256	0.174	0.22	/
	688	20	1RB	/	/	/	/	/	/	/
	680.5	20	50%RB	0.14	24.76	25.0	1.057	0.173	0.19	/
Body Back (10 mm)	673	20	1RB	0.13	23.95	25.0	1.274	0.247	0.32	/
	680.5	20	1RB	0.07	24.01	25.0	1.256	0.294	0.37	/
	688	20	1RB	0.09	23.81	25.0	1.315	0.293	0.39	18#
	680.5	20	50%RB	0.20	24.76	25.0	1.057	0.316	0.34	/
Body Left (10 mm)	673	20	1RB	/	/	/	/	/	/	/
	680.5	20	1RB	-0.06	24.01	25.0	1.256	0.141	0.18	/
	688	20	1RB	/	/	/	/	/	/	/
	680.5	20	50%RB	0.00	24.76	25.0	1.057	0.142	0.16	/
Body Right (10 mm)	673	20	1RB	/	/	/	/	/	/	/
	680.5	20	1RB	-0.03	24.01	25.0	1.256	0.262	0.33	/
	688	20	1RB	/	/	/	/	/	/	/
	680.5	20	50%RB	0.08	24.76	25.0	1.057	0.262	0.28	/
Body Bottom (10 mm)	673	20	1RB	/	/	/	/	/	/	/
	680.5	20	1RB	-0.13	24.01	25.0	1.256	0.204	0.26	/
	688	20	1RB	/	/	/	/	/	/	/
	680.5	20	50%RB	-0.03	24.76	25.0	1.057	0.202	0.22	/

The data above was performed on 2026/01/28

5G NR n77&78 Lower(ANT5):

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	3500	100	1RB	0.02	22.83	23.5	1.167	0.211	0.25	/
	3500	100	50%RB	0.13	22.52	23.5	1.253	0.222	0.28	19#
Head Left Tilt	3500	100	1RB	0.02	22.83	23.5	1.167	0.174	0.21	/
	3500	100	50%RB	-0.03	22.52	23.5	1.253	0.182	0.23	/
Head Right Cheek	3500	100	1RB	0.00	22.83	23.5	1.167	0.169	0.20	/
	3500	100	50%RB	-0.11	22.52	23.5	1.253	0.177	0.23	/
Head Right Tilt	3500	100	1RB	0.05	22.83	23.5	1.167	0.162	0.19	/
	3500	100	50%RB	0.00	22.52	23.5	1.253	0.172	0.22	/
Body Front (10 mm)	3500	100	1RB	0.07	22.83	23.5	1.167	0.048	0.06	/
	3500	100	50%RB	0.15	22.52	23.5	1.253	0.052	0.07	/
Body Back (10 mm)	3500	100	1RB	-0.05	22.83	23.5	1.167	0.206	0.25	/
	3500	100	50%RB	-0.08	22.52	23.5	1.253	0.212	0.27	20#
Body Top (10 mm)	3500	100	1RB	-0.08	22.83	23.5	1.167	0.092	0.11	/
	3500	100	50%RB	-0.14	22.52	23.5	1.253	0.096	0.13	/

The data above was performed on 2026/02/02

Note: The 5G NR n78 Lower is a subset of n77 Lower, and they are same in modulation type and maximum target output power, therefore, they were considered as one frequency band during SAR measurement.

5G NR n77&78 Middle(ANT5):

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	3600	100	1RB	0.01	22.18	23.0	1.208	0.266	0.33	/
	3625	100	1RB	-0.11	21.82	23.0	1.312	0.291	0.39	/
	3650	100	1RB	0.03	22.04	23.0	1.247	0.321	0.41	21#
	3625	100	50%RB	-0.05	22.12	23.0	1.225	0.318	0.39	/
Head Left Tilt	3600	100	1RB	/	/	/	/	/	/	/
	3625	100	1RB	0.15	21.82	23.0	1.312	0.237	0.32	/
	3650	100	1RB	/	/	/	/	/	/	/
	3625	100	50%RB	-0.01	22.12	23.0	1.225	0.280	0.35	/
Head Right Cheek	3600	100	1RB	/	/	/	/	/	/	/
	3625	100	1RB	-0.12	21.82	23.0	1.312	0.273	0.36	/
	3650	100	1RB	/	/	/	/	/	/	/
	3625	100	50%RB	0.07	22.12	23.0	1.225	0.294	0.37	/
Head Right Tilt	3600	100	1RB	/	/	/	/	/	/	/
	3625	100	1RB	0.10	21.82	23.0	1.312	0.227	0.30	/
	3650	100	1RB	/	/	/	/	/	/	/
	3625	100	50%RB	0.05	22.12	23.0	1.225	0.243	0.30	/
Body Front (10 mm)	3600	100	1RB	/	/	/	/	/	/	/
	3625	100	1RB	0.11	21.82	23.0	1.312	0.064	0.09	/
	3650	100	1RB	/	/	/	/	/	/	/
	3625	100	50%RB	-0.14	22.12	23.0	1.225	0.069	0.09	/
Body Back (10 mm)	3600	100	1RB	0.12	22.18	23.0	1.208	0.129	0.16	/
	3625	100	1RB	-0.12	21.82	23.0	1.312	0.146	0.20	22#
	3650	100	1RB	0.18	22.04	23.0	1.247	0.132	0.17	/
	3625	100	50%RB	-0.17	22.12	23.0	1.225	0.147	0.19	/
Body Top (10 mm)	3600	100	1RB	/	/	/	/	/	/	/
	3625	100	1RB	-0.18	21.82	23.0	1.312	0.121	0.16	/
	3650	100	1RB	/	/	/	/	/	/	/
	3625	100	50%RB	0.12	22.12	23.0	1.225	0.132	0.17	/

The data above was performed on 2026/02/03

Note: The 5G NR n78 Middle is a subset of n77 Middle, and they are same in modulation type and maximum target output power, therefore, they were considered as one frequency band during SAR measurement.

5G NR n77&78 Upper(ANT5):

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	3750	100	1RB	-0.05	23.29	24.1	1.205	0.401	0.49	23#
	3840	100	1RB	-0.01	23.38	24.1	1.180	0.305	0.36	/
	3930	100	1RB	-0.15	23.77	24.1	1.079	0.265	0.29	/
	3840	100	50%RB	-0.15	23.18	24.1	1.236	0.290	0.36	/
Head Left Tilt	3750	100	1RB	/	/	/	/	/	/	/
	3840	100	1RB	-0.13	23.38	24.1	1.180	0.274	0.33	/
	3930	100	1RB	/	/	/	/	/	/	/
	3840	100	50%RB	-0.18	23.18	24.1	1.236	0.260	0.33	/
Head Right Cheek	3750	100	1RB	/	/	/	/	/	/	/
	3840	100	1RB	0.09	23.38	24.1	1.180	0.253	0.30	/
	3930	100	1RB	/	/	/	/	/	/	/
	3840	100	50%RB	0.01	23.18	24.1	1.236	0.234	0.29	/
Head Right Tilt	3750	100	1RB	/	/	/	/	/	/	/
	3840	100	1RB	0.02	23.38	24.1	1.180	0.244	0.29	/
	3930	100	1RB	/	/	/	/	/	/	/
	3840	100	50%RB	-0.11	23.18	24.1	1.236	0.227	0.29	/
Body Front (10 mm)	3750	100	1RB	/	/	/	/	/	/	/
	3840	100	1RB	-0.01	23.38	24.1	1.180	0.092	0.11	/
	3930	100	1RB	/	/	/	/	/	/	/
	3840	100	50%RB	0.10	23.18	24.1	1.236	0.079	0.10	/
Body Back (10 mm)	3750	100	1RB	0.10	23.29	24.1	1.205	0.266	0.33	24#
	3840	100	1RB	-0.04	23.38	24.1	1.180	0.191	0.23	/
	3930	100	1RB	0.16	23.77	24.1	1.079	0.146	0.16	/
	3840	100	50%RB	0.10	23.18	24.1	1.236	0.178	0.22	/
Body Top (10 mm)	3750	100	1RB	/	/	/	/	/	/	/
	3840	100	1RB	-0.16	23.38	24.1	1.180	0.150	0.18	/
	3930	100	1RB	/	/	/	/	/	/	/
	3840	100	50%RB	0.05	23.18	24.1	1.236	0.134	0.17	/

The data above was performed on 2026/02/03&2026/02/04

Note: The 5G NR n78 Upper is a subset of n77 Upper, and they are same in modulation type and maximum target output power, therefore, they were considered as one frequency band during SAR measurement.

Notes:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. SAR test for NR bands and LTE anchor Bands were performed separately due to limitations in SAR probe calibration factors. And, due to test setup limitations, SAR testing for NR was performed using test mode software to establish the connection.
3. FR1 supported standalone.
4. KDB941225D05-SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is $> 0.5\text{ dB}$ higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is $> 1.45\text{ W/kg}$
5. KDB941225D05-For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is $< 1.45\text{ W/kg}$, tests for the remaining required test channels are optional.
6. KDB941225D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are $\leq 0.8\text{ W/kg}$.
7. KDB941225D05- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
8. KDB941225D05- other channel bandwidths SAR test is required when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> 0.5\text{ dB}$ higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is $> 1.45\text{ W/kg}$.
9. The SAR value calculation table only displays low, mid, and high channels. For detailed channel reference, please refer to the corresponding band's power table.

SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results:

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The Highest Measured SAR Configuration in Each Frequency Band

Head

SAR probe calibration point	Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
				Original	Repeated	
/	/	/	/	/	/	/

Body

SAR probe calibration point	Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
				Original	Repeated	
/	/	/	/	/	/	/

Note:

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .
2. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
3. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements.

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

Notes:

1. The data of GSM/WCDMA/LTE/EN-DC Band (except for LTE band 42), NFC, WLAN/Bluetooth and SAR simultaneous transmission description, please refer to FCC ID: 2BU6A-A1, SAR report of 2602P41234E-20A#, issued by Bay Area Compliance Laboratories Corp.(Dongguan).
2. The data of WLAN 6G, please refer to FCC ID: 2BU6A-A1, SAR report of Ti-CC26020196-701[#] and Ti-CC26020196-703[#], issued by Shenzhen BALUN Technology Co., Ltd.

SAR Plots

Please Refer to the Attachment.

APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

Measurement uncertainty evaluation for IEEE1528-2013 SAR test

Source of uncertainty	Tolerance/ Uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard Uncertainty ± %, (1 g)	Standard Uncertainty ± %, (10 g)
Measurement system							
Probe calibration	13.9	N	1	1	1	13.9	13.9
Axial Isotropy	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0	0	0.0	0.0
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Modulation response	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Integration time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
RF ambient conditions–reflections	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	$\sqrt{3}$	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	$\sqrt{3}$	1	1	3.9	3.9
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	3.9	R	$\sqrt{3}$	1	1	2.3	2.3
Test sample related							
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Device holder uncertainty	6.3	N	1	1	1	6.3	6.3
Drift of output power	5.0	R	$\sqrt{3}$	1	1	2.9	2.9
SAR scaling	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
Phantom and tissue parameters							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Uncertainty in SAR correction for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.9	1.6
Liquid conductivity measurement	5.5	N	1	0.78	0.71	4.3	3.9
Liquid permittivity measurement	2.9	N	1	0.23	0.26	0.7	0.8
Liquid conductivity—temperature uncertainty	1.7	R	$\sqrt{3}$	0.78	0.71	0.8	0.7
Liquid permittivity—temperature uncertainty	2.7	R	$\sqrt{3}$	0.23	0.26	0.4	0.4
Combined standard uncertainty		RSS				12.2	12.0
Expanded uncertainty 95 % confidence interval)						24.3	23.9

APPENDIX B EUT TEST POSITION PHOTOS

Please Refer to the Attachment.

APPENDIX C CALIBRATION CERTIFICATES

Please Refer to the Attachment.

APPENDIX D RETURN LOSS&IMPEDANCE MEASUREMENT

Please Refer to the Attachment.

******* END OF REPORT *******