

FCC SAR TEST REPORT

Applicant: MYAVRO LIMITED

Address: 50a London Street Reading berkshire RG14SQ United Kingdom

Product Name: 5G digital mobile smartphone

FCC ID: 2BU6A-A1

Standard(s): 47 CFR Part 2(2.1093)

Report Number: 2602P41234E-20A

Report Date: 2026/05/09

The above device has been tested and found compliant with the requirement of the relevant standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Rocky Xiao

Reviewed By: Rocky Xiao
Title: RF Supervisor

Brave Lu

Approved By: Brave Lu
Title: SAR Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

SAR TEST RESULTS SUMMARY

Mode	Max. Reported SAR Level(s) (W/kg)		Limit (W/kg)
GSM 850	1g Head SAR	0.18	1.6
	1g Body SAR	0.51	
PCS 1900	1g Head SAR	0.75	
	1g Body SAR	0.90	
WCDMA Band 2	1g Head SAR	0.41	
	1g Body SAR	0.62	
WCDMA Band 4	1g Head SAR	0.48	
	1g Body SAR	0.48	
WCDMA Band 5	1g Head SAR	0.34	
	1g Body SAR	0.97	
LTE Band 7	1g Head SAR	0.08	
	1g Body SAR	0.32	
LTE Band 12&17	1g Head SAR	0.19	
	1g Body SAR	0.36	
LTE Band 13	1g Head SAR	0.27	
	1g Body SAR	0.59	
LTE Band 25&2	1g Head SAR	0.57	
	1g Body SAR	0.48	
LTE Band 26&5	1g Head SAR	0.26	
	1g Body SAR	0.46	
LTE Band 41&38	1g Head SAR	0.07	
	1g Body SAR	0.24	
LTE Band 66&4	1g Head SAR	0.47	
	1g Body SAR	0.66	
LTE Band 71	1g Head SAR	0.23	
	1g Body SAR	0.38	
WLAN 2.4G	1g Head SAR	0.39	
	1g Body SAR	0.19	
WLAN 5.2G	1g Head SAR	0.10	
	1g Body SAR	0.22	
WLAN 5.3G	1g Head SAR	0.11	
	1g Body SAR	0.18	
WLAN 5.6G	1g Head SAR	0.20	
	1g Body SAR	0.13	

Mode	Max. Reported SAR Level(s) (W/kg)		Limit (W/kg)
WLAN 5.8G	1g Head SAR	0.20	1.6
	1g Body SAR	0.10	
Simultaneous	1g Head SAR	1.33	
	1g Body SAR	1.28	
	1g Body SAR	1.28 (Hotspot)	

Applicable Standards	FCC 47 CFR part 2.1093 Radiofrequency radiation exposure evaluation: portable devices
	IEEE1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
	RF Exposure Procedures: TCB Workshop April 2019
	KDB procedures KDB 447498 D01 General RF Exposure Guidance v06 KDB 648474 D04 Handset SAR v01r03 KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02 KDB 941225 D01 3G SAR Procedures v03r01 KDB 941225 D05 SAR for LTE Devices v02r05 KDB 941225 D06 Hotspot Mode v02r01 KDB 248227 D01 802.11 Wi-Fi SAR v02r02
Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in FCC 47 CFR part 2.1093 and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures. The results and statements contained in this report pertain only to the device(s) evaluated.	

Note ▲:

1. The test data of LTE Band 42/5G NR, please refer to SAR report of 2601P41234E-SAA, issued by Bay Area Compliance Laboratories Corp. (Shenzhen).
2. The test data of WLAN 6G, please refer to SAR report of Ti-CC26020196-701 & Ti-CC26020196-703, issued by Shenzhen BALUN Technology Co., Ltd.

CONTENTS

SAR TEST RESULTS SUMMARY	2
DOCUMENT REVISION HISTORY	6
1. GENERAL INFORMATION	7
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	7
2. REFERENCE, STANDARDS, AND GUIDELINES	9
2.1 SAR LIMITS	9
2.2 TEST FACILITY	10
3. DESCRIPTION OF TEST SYSTEM	11
4. EQUIPMENT LIST AND CALIBRATION	16
4.1 EQUIPMENTS LIST & CALIBRATION INFORMATION	16
5. SAR MEASUREMENT SYSTEM VERIFICATION	17
5.1 LIQUID VERIFICATION	17
5.2 LIQUID VERIFICATION RESULTS	17
5.3 SYSTEM ACCURACY VERIFICATION	21
5.4 SYSTEM ACCURACY CHECK RESULTS	21
5.5 SAR SYSTEM VALIDATION DATA	22
6. EUT TEST STRATEGY AND METHODOLOGY	34
6.1 TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON'S EAR	34
6.2 CHEEK/TOUCH POSITION	35
6.3 EAR/TILT POSITION	35
6.4 TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS	36
6.5 TEST DISTANCE FOR SAR EVALUATION	36
6.6 SAR EVALUATION PROCEDURE	37
7. CONDUCTED OUTPUT POWER MEASUREMENT	38
7.1 TEST PROCEDURE	38
7.2 RADIO CONFIGURATION	38
7.3 MAXIMUM TARGET OUTPUT POWER	44
7.4 TEST RESULTS:	47
8. STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	79
8.1 ANTENNAS LOCATION:	79
8.2 ANTENNA DISTANCE TO EDGE	79
8.3 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	80
8.4 STANDALONE SAR ESTIMATION:	81
8.5 SAR TEST EXCLUSION FOR THE EUT EDGE CONSIDERATIONS RESULT	81
9. SAR MEASUREMENT RESULTS	82
9.1 SAR TEST DATA	82

10. MEASUREMENT VARIABILITY	108
11. DUT HOLDER PERTURBATIONS	109
12. SAR SIMULTANEOUS TRANSMISSION DESCRIPTION	110
12.1 SIMULTANEOUS TRANSMISSION:.....	110
12.2 SIMULTANEOUS SAR TEST EXCLUSION CONSIDERATIONS:	115
APPENDIX A - MEASUREMENT UNCERTAINTY	117
APPENDIX B - SAR PLOTS	118
APPENDIX C - EUT TEST POSITION PHOTOS	119
APPENDIX D - PROBE CALIBRATION CERTIFICATES	120
APPENDIX E - DIPOLE CALIBRATION CERTIFICATES	121
APPENDIX F - RETURN LOSS AND IMPEDANCE MEASUREMENT	122

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2602P41234E-20A	Original Report	2026/05/09

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	5G digital mobile smartphone
EUT Model:	myAvro A1
Multiple Models:	N/A
Device Type:	Portable
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Internal Antenna
Body-Worn Accessories:	None
Proximity Sensor:	None
Carrier Aggregation:	None
EN-DC Bands:	DC_2A_n5A, DC_2A_n78A, DC_4A_n5A, DC_4A_n78A, DC_5A_n2A, DC_5A_n7A, DC_5A_n66A, DC_5A_n77A, DC_5A_n78A, DC_7A_n5A, DC_7A_n77A, DC_7A_n78A, DC_17A_n2A, DC_26A_n77A, DC_26A_n78A, DC_38A_n78A, DC_41A_n77A, DC_41A_n78A, DC_66A_n5A, DC_66A_n77A, DC_66A_n78A
Operation Modes:	GSM Voice, GPRS/EGPRS Data, WCDMA(R99 (Data), HSUPA/HSDPA/DC-HSDPA/HSPA+), FDD-LTE, TDD-LTE, 5G NR, WLAN, Bluetooth, BLE, NFC
Frequency Band:	GSM 850: 824-849 MHz(TX); 869-894 MHz(RX)
	PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX)
	WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX)
	WCDMA Band 4: 1710-1755 MHz(TX); 2110-2155 MHz(RX)
	WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX)
	LTE Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX)
	LTE Band 4: 1710-1755 MHz(TX); 2110-2155 MHz(RX)
	LTE Band 5: 824-849 MHz(TX); 869-894 MHz(RX)
	LTE Band 7: 2500-2570 MHz(TX); 2620-2690 MHz(RX)
	LTE Band 12: 699-716 MHz(TX); 729-746 MHz(RX)
	LTE Band 13: 777-787MHz(TX); 746-756MHz(RX)
	LTE Band 17: 704-716 MHz(TX); 734-746 MHz(RX)
	LTE Band 25: 1850-1915MHz(TX); 1930-1995MHz(RX)
	LTE Band 26: 814-849MHz(TX); 859-894MHz(RX)
	LTE Band 38: 2570-2620 MHz(TX/RX)
	LTE Band 41: 2496-2690 MHz(TX/RX)
	LTE Band 42: 3450-3550 MHz(TX/RX)
	LTE Band 66: 1710-1780 MHz(TX); 2110-2180 MHz(RX)
	LTE Band 71: 663-698MHz(TX); 617-652MHz(RX)
	5G NR Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX)
	5G NR Band 5: 824-849 MHz(TX); 869-894 MHz(RX)
	5G NR Band 7: 2500-2570 MHz(TX); 2620-2690 MHz(RX)
	5G NR Band 12: 699-716 MHz(TX); 729-746 MHz(RX)
	5G NR Band 38: 2570-2620 MHz(TX/RX)
	5G NR Band 41: 2496-2690 MHz(TX/RX)
	5G NR Band 66: 1710-1780 MHz(TX); 2110-2180 MHz(RX)

	5G NR Band 71: 663-698 MHz(TX);617-652 MHz(RX)
	5G NR Band 77_1: 3450-3550 MHz(TX/RX)
	5G NR Band 77_2: 3550-3700 MHz(TX/RX)
	5G NR Band 77_3: 3700-3980 MHz(TX/RX)
	5G NR Band 78_1: 3450-3550 MHz(TX/RX)
	5G NR Band 78_2: 3550-3700 MHz(TX/RX)
	5G NR Band 78_3: 3700-3800 MHz(TX/RX)
	Wi-Fi 2.4G: 2412-2462 MHz /2422-2452 MHz (TX/RX)
	Wi-Fi 5.2G: 5150-5250 MHz(TX/RX)
	Wi-Fi 5.3G: 5250-5350 MHz(TX/RX)
	Wi-Fi 5.6G: 5470-5725MHz(TX/RX)
	Wi-Fi 5.8G: 5725-5850 MHz(TX/RX)
	U-NII 5 (5925-6425 MHz Band): 5955-6415 MHz (802.11ax he20) 5965-6405 MHz (802.11ax he40) 5985-6385 MHz (802.11ax he80)
	U-NII 6 (6425-6525 MHz Band): 6435-6515 MHz (802.11ax he20) 6445-6525 MHz (802.11ax he40) 6465-6545 MHz (802.11ax he80)
	U-NII 7 (6525-6875 MHz Band): 6535-6855 MHz (802.11ax he20) 6565-6845 MHz (802.11ax he40) 6625-6865 MHz (802.11ax he80)
	U-NII 8 (6875-7125 MHz Band): 6875-7095 MHz (802.11ax he20) 6885-7085 MHz (802.11ax he40) 6945-7025 MHz (802.11ax he80)
	Bluetooth: 2402-2480MHz(TX/RX)
	BLE 1M: 2402-2480MHz(TX/RX)
	BLE 2M: 2404-2478MHz(TX/RX)
	NFC: 13.56MHz
Dimensions (L*W*H):	170mm (L) *78mm (W) *10mm (H)
Power Source:	DC 3.88V from Rechargeable Battery
Serial Number:	3FXQ-6
Normal Operation:	Head and Body
EUT Received Date:	2026/01/10
Test Date:	2026/03/23 ~ 2026/04/02
EUT Received Status:	Good

Note▲:

1. The test data of LTE Band 42/5G NR, please refer to SAR report of 2601P41234E-SAA, issued by Bay Area Compliance Laboratories Corp. (Shenzhen).
2. The test data of WLAN 6G, please refer to SAR report of Ti-CC26020196-701& Ti-CC26020196-703, issued by Shenzhen BALUN Technology Co., Ltd.

2. REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

2.1 SAR Limits

FCC Limit

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.6	8
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4	20

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that maybe incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6 W/kg(FCC) for 1g Body(Head) SAR applied to the EUT.

2.2 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. :829273, the FCC Designation No. : CN5044.


3. DESCRIPTION OF TEST SYSTEM

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:



DASY5 System Description

The DASY5 system for performing compliance tests consists of the following items:

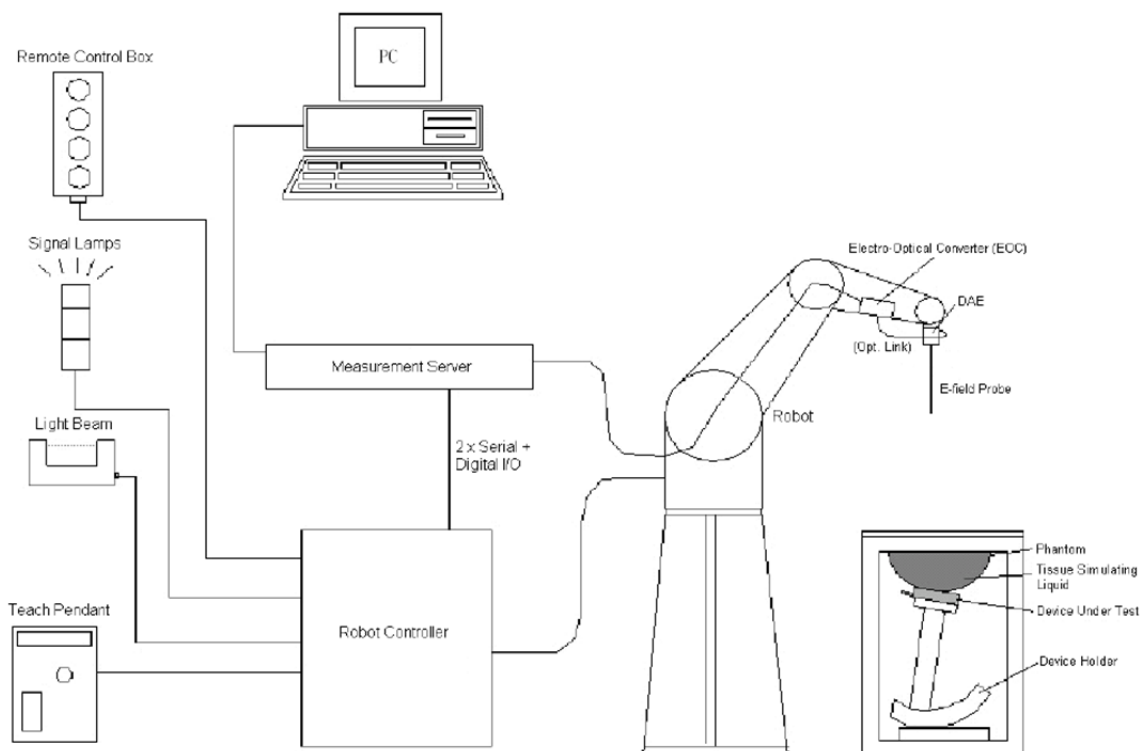

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

DASY5 Measurement Server

The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz Intel ULV Celeron, 128MB chip-disk and 128MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16 bit AD-converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized point out, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



Data Acquisition Electronics

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

EX3DV4 E-Field Probes

Frequency	4 MHz–6 GHz Linearity: ± 0.2 dB (30 MHz–10 GHz)
Directivity(typical)	± 0.1 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g – > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Applications	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52, DASY6, DASY8, EASY6, EASY4/MRI

SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness

increases to 6 mm). The phantom has three measurement areas:

- _ Left Head
- _ Right Head
- _ Flat phantom

The phantom table for the DASY systems based on the robots have the size of 100 x 50 x 85 cm (L x W x H). For easy dislocation these tables have fork lift cut outs at the bottom.

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different liquids)



A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible.

Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

Robots

The DASY5 system uses the high precision industrial robot. The robot offers the same features important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The above mentioned robots are controlled by the Staubli CS7MB robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is contained on the CDs delivered along with the robot. Paper manuals are available upon request direct from Staubli.

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm² step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side length of the 10g cube is 21.5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE1528:2013

Recommended Tissue Dielectric Parameters for Head liquid

Table 3—Target dielectric properties of head tissue-equivalent material in the 300 MHz to 6000 MHz frequency range

Frequency (MHz)	Relative permittivity (ϵ'_r)	Conductivity (σ) (S/m)
300	45.3	0.87
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1500	40.4	1.23
1640	40.2	1.31
1750	40.1	1.37
1800	40.0	1.40
1900	40.0	1.40
2000	40.0	1.40
2100	39.8	1.49
2300	39.5	1.67
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
3500	37.9	2.91
4000	37.4	3.43
4500	36.8	3.94
5000	36.2	4.45
5200	36.0	4.66
5400	35.8	4.86
5600	35.5	5.07
5800	35.3	5.27
6000	35.1	5.48

NOTE—For convenience, permittivity and conductivity values at some frequencies that are not part of the original data from Drossos et al. [B60] or the extension to 5800 MHz are provided (i.e., the values shown in italics). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6000 MHz that were linearly extrapolated from the values at 3000 MHz and 5800 MHz.

4. EQUIPMENT LIST AND CALIBRATION


4.1 Equipments List & Calibration Information

Equipment	Model	S/N	Calibration Date	Calibration Due Date
DASY5 Test Software	DASY52.10	N/A	NCR	NCR
DASY5 Measurement Server	DASY5 4.5.12	1470	NCR	NCR
Data Acquisition Electronics	DAE4	772	2026/2/26	2027/2/25
E-Field Probe	EX3DV4	7329	2025/5/26	2026/5/25
Mounting Device	MD4HHTV5	SD 000 H01 KA	NCR	NCR
Twin SAM	Twin SAM V5.0	1097	NCR	NCR
Dipole, 750 MHz	D750V3	1167	2025/10/13	2028/10/12
Dipole, 1750 MHz	D1750V2	1141	2024/6/17	2027/6/16
Dipole, 1900 MHz	D1900V2	543	2025/10/13	2028/10/12
Dipole, 2450 MHz	D2450V2	971	2024/6/15	2027/6/14
Dipole, 2600 MHz	D2600V2	1132	2025/10/14	2028/10/13
Dipole, 5 GHz	D5GHzV2	1246	2025/10/14	2028/10/13
Simulated Tissue Liquid Head	HBBL600-10000V6	SL AAH U126 CA (Batch:250429-1)	N/A	N/A
Network Analyzer	8753C +85047A	3029A01355 +3033A02857	2025/7/3	2026/7/2
Dielectric assessment kit	DAK-3.5	1253	NCR	NCR
Signal Generator	8665B	3438a00584	2025/7/29	2026/7/28
EPM Series Power Meter	E4419B	MY45103907	2025/7/29	2026/7/28
Power Sensor	8482A	US37296108	2025/7/29	2026/7/28
Power Meter	EPM-441A	GB37481494	2025/7/29	2026/7/28
Power Amplifier	ZHL-5W-202-S+	416402204	NCR	NCR
Power Amplifier	ZVE-6W-83+	637202210	NCR	NCR
Directional Coupler	520Z	441493	NCR	NCR
Directional Coupler	1818	0955-0101	NCR	NCR
Attenuator	20dB, 100W	LN749	NCR	NCR
Attenuator	6dB, 150W	2754	NCR	NCR
Thermometer	DTM3000	3635	2025/8/8	2026/8/7
Hygrothermograph	HTC-2	EM072	2025/8/4	2026/8/3
Wideband Radio Communication Tester	CMW500	147473	2025/7/28	2026/7/27
Wireless Communication Test Set	E5515C	MY50266471	2025/7/28	2026/7/27
Spectrum Analyzer	FSV40	101461	2025/8/3	2026/8/2

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

5. SAR MEASUREMENT SYSTEM VERIFICATION

5.1 Liquid Verification

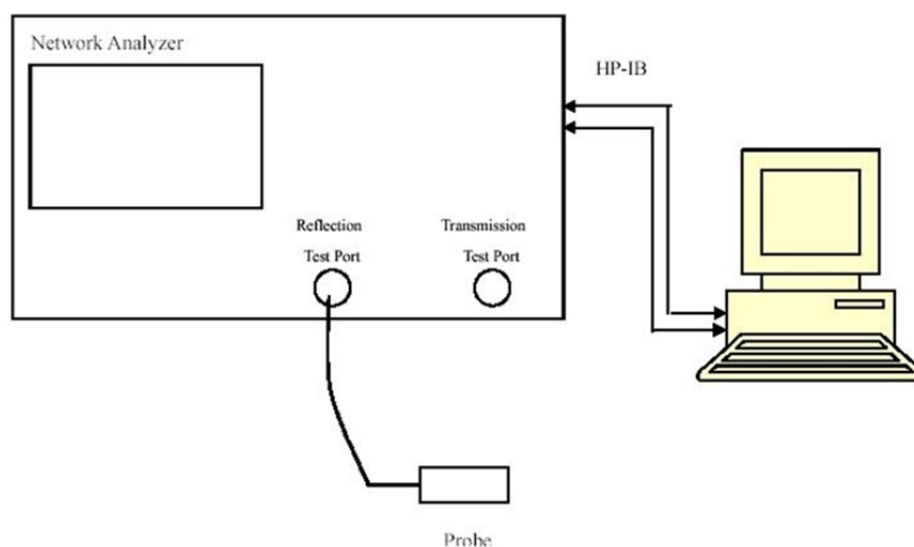

5.2 Liquid Verification Results

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
704	Simulated Tissue Liquid Head	42.906	0.879	42.15	0.89	1.79	-1.24	± 5
707.5	Simulated Tissue Liquid Head	42.887	0.882	42.13	0.89	1.8	-0.9	± 5
711	Simulated Tissue Liquid Head	42.862	0.883	42.11	0.89	1.79	-0.79	± 5
750	Simulated Tissue Liquid Head	42.359	0.897	41.9	0.89	1.1	0.79	± 5
824.2	Simulated Tissue Liquid Head	41.511	0.931	41.55	0.9	-0.09	3.44	± 5
836.6	Simulated Tissue Liquid Head	41.312	0.934	41.5	0.9	-0.45	3.78	± 5
848.8	Simulated Tissue Liquid Head	41.199	0.945	41.5	0.91	-0.73	3.85	± 5

*Liquid Verification above was performed on 2026/03/23.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
673	Simulated Tissue Liquid Head	43.418	0.858	42.31	0.88	2.62	-2.5	± 5
680.5	Simulated Tissue Liquid Head	43.396	0.861	42.27	0.89	2.66	-3.26	± 5
688	Simulated Tissue Liquid Head	43.362	0.867	42.23	0.89	2.68	-2.58	± 5
750	Simulated Tissue Liquid Head	42.825	0.896	41.9	0.89	2.21	0.67	± 5
782	Simulated Tissue Liquid Head	42.496	0.91	41.75	0.89	1.79	2.25	± 5

*Liquid Verification above was performed on 2026/03/24.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
750	Simulated Tissue Liquid Head	42.591	0.872	41.9	0.89	1.65	-2.02	±5
826.4	Simulated Tissue Liquid Head	41.722	0.922	41.54	0.9	0.44	2.44	±5
831.5	Simulated Tissue Liquid Head	41.672	0.924	41.52	0.9	0.37	2.67	±5
836.5	Simulated Tissue Liquid Head	41.627	0.926	41.5	0.9	0.31	2.89	±5
836.6	Simulated Tissue Liquid Head	41.626	0.926	41.5	0.9	0.3	2.89	±5
841.5	Simulated Tissue Liquid Head	41.553	0.928	41.5	0.91	0.13	1.98	±5
846.6	Simulated Tissue Liquid Head	41.408	0.933	41.5	0.91	-0.22	2.53	±5

*Liquid Verification above was performed on 2026/03/25.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1712.4	Simulated Tissue Liquid Head	40.706	1.335	40.13	1.35	1.44	-1.11	±5
1720	Simulated Tissue Liquid Head	40.635	1.339	40.13	1.35	1.26	-0.81	±5
1732.6	Simulated Tissue Liquid Head	40.599	1.35	40.12	1.36	1.19	-0.74	±5
1745	Simulated Tissue Liquid Head	40.524	1.365	40.1	1.37	1.06	-0.36	±5
1750	Simulated Tissue Liquid Head	40.467	1.373	40.1	1.37	0.92	0.22	±5
1752.6	Simulated Tissue Liquid Head	40.464	1.377	40.09	1.37	0.93	0.51	±5
1770	Simulated Tissue Liquid Head	40.355	1.392	40.06	1.38	0.74	0.87	±5

*Liquid Verification above was performed on 2026/03/26.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1850.2	Simulated Tissue Liquid Head	40.321	1.384	40	1.4	0.8	-1.14	±5
1860	Simulated Tissue Liquid Head	40.254	1.391	40	1.4	0.63	-0.64	±5
1880	Simulated Tissue Liquid Head	40.067	1.402	40	1.4	0.17	0.14	±5
1882.5	Simulated Tissue Liquid Head	40.016	1.404	40	1.4	0.04	0.29	±5
1900	Simulated Tissue Liquid Head	39.773	1.412	40	1.4	-0.57	0.86	±5
1905	Simulated Tissue Liquid Head	39.745	1.414	40	1.4	-0.64	1	±5
1909.8	Simulated Tissue Liquid Head	39.718	1.415	40	1.4	-0.7	1.07	±5

*Liquid Verification above was performed on 2026/03/27.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1852.4	Simulated Tissue Liquid Head	40.054	1.399	40	1.4	0.14	-0.07	± 5
1880	Simulated Tissue Liquid Head	39.837	1.417	40	1.4	-0.41	1.21	± 5
1900	Simulated Tissue Liquid Head	39.691	1.428	40	1.4	-0.77	2	± 5
1907.6	Simulated Tissue Liquid Head	39.611	1.431	40	1.4	-0.97	2.21	± 5

*Liquid Verification above was performed on 2026/03/28.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
2412	Simulated Tissue Liquid Head	40.36	1.728	39.28	1.77	2.75	-2.37	± 5
2437	Simulated Tissue Liquid Head	40.181	1.767	39.23	1.79	2.42	-1.28	± 5
2450	Simulated Tissue Liquid Head	40.096	1.793	39.2	1.8	2.29	-0.39	± 5
2462	Simulated Tissue Liquid Head	39.839	1.806	39.18	1.81	1.68	-0.22	± 5

*Liquid Verification above was performed on 2026/03/28.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
2510	Simulated Tissue Liquid Head	39.879	1.877	39.12	1.86	1.94	0.91	± 5
2535	Simulated Tissue Liquid Head	39.516	1.915	39.09	1.89	1.09	1.32	± 5
2560	Simulated Tissue Liquid Head	39.319	1.958	39.05	1.92	0.69	1.98	± 5
2593	Simulated Tissue Liquid Head	39.069	1.981	39.01	1.95	0.15	1.59	± 5
2600	Simulated Tissue Liquid Head	39.017	1.988	39	1.96	0.04	1.43	± 5
2680	Simulated Tissue Liquid Head	38.513	2.064	38.9	2.05	-0.99	0.68	± 5

*Liquid Verification above was performed on 2026/03/29.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
5180	Simulated Tissue Liquid Head	36.933	4.552	36.02	4.64	2.53	-1.9	± 5
5200	Simulated Tissue Liquid Head	36.809	4.634	36	4.66	2.25	-0.56	± 5
5240	Simulated Tissue Liquid Head	36.482	4.714	35.96	4.7	1.45	0.3	± 5
5250	Simulated Tissue Liquid Head	36.376	4.738	35.95	4.71	1.18	0.59	± 5

*Liquid Verification above was performed on 2026/03/30.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
5250	Simulated Tissue Liquid Head	36.907	4.742	35.95	4.71	2.66	0.68	± 5
5260	Simulated Tissue Liquid Head	36.88	4.752	35.94	4.72	2.62	0.68	± 5
5280	Simulated Tissue Liquid Head	36.509	4.789	35.92	4.74	1.64	1.03	± 5
5290	Simulated Tissue Liquid Head	36.397	4.797	35.91	4.75	1.36	0.99	± 5
5320	Simulated Tissue Liquid Head	36.088	4.824	35.88	4.78	0.58	0.92	± 5

*Liquid Verification above was performed on 2026/03/31.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
5500	Simulated Tissue Liquid Head	36.583	4.893	35.65	4.97	2.62	-1.55	± 5
5510	Simulated Tissue Liquid Head	36.509	4.895	35.64	4.98	2.44	-1.71	± 5
5590	Simulated Tissue Liquid Head	35.727	5.009	35.52	5.06	0.58	-1.01	± 5
5600	Simulated Tissue Liquid Head	35.672	5.011	35.5	5.07	0.48	-1.16	± 5
5670	Simulated Tissue Liquid Head	35.163	5.08	35.43	5.14	-0.75	-1.17	± 5
5700	Simulated Tissue Liquid Head	34.944	5.132	35.4	5.17	-1.29	-0.74	± 5

*Liquid Verification above was performed on 2026/04/01.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
5710	Simulated Tissue Liquid Head	35.874	5.184	35.39	5.18	1.37	0.08	± 5
5720	Simulated Tissue Liquid Head	35.843	5.197	35.38	5.19	1.31	0.13	± 5
5745	Simulated Tissue Liquid Head	35.456	5.243	35.36	5.22	0.27	0.44	± 5
5750	Simulated Tissue Liquid Head	35.443	5.249	35.35	5.22	0.26	0.56	± 5
5775	Simulated Tissue Liquid Head	35.262	5.279	35.33	5.25	-0.19	0.55	± 5
5785	Simulated Tissue Liquid Head	35.2	5.285	35.32	5.26	-0.34	0.48	± 5
5800	Simulated Tissue Liquid Head	35.126	5.318	35.3	5.27	-0.49	0.91	± 5
5825	Simulated Tissue Liquid Head	34.866	5.368	35.28	5.3	-1.17	1.28	± 5

*Liquid Verification above was performed on 2026/04/02.


5.3 System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- $s = 15 \text{ mm} \pm 0,2 \text{ mm}$ for $300 \text{ MHz} \leq f \leq 1\,000 \text{ MHz}$;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $1\,000 \text{ MHz} < f \leq 3\,000 \text{ MHz}$;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $3\,000 \text{ MHz} < f \leq 6\,000 \text{ MHz}$.
- $s = 0 \text{ mm}$ for $f = 150 \text{ MHz}$ (Loop Antenna).

System Verification Setup Block Diagram

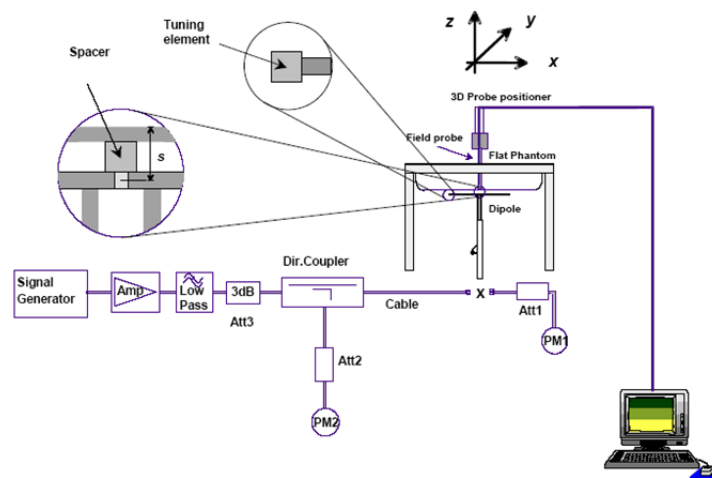

5.4 System Accuracy Check Results

Date	Frequency Band (MHz)	Liquid Type	Input Power (mW)	Measured SAR (W/kg)	Normalized to 1W (W/kg)	Target Value (W/Kg)	Delta (%)	Tolerance (%)
2026/03/23	750	Simulated Tissue Liquid Head	100	1g 0.842	8.42	8.56	-1.64	± 10
2026/03/24	750	Simulated Tissue Liquid Head	100	1g 0.837	8.37	8.56	-2.22	± 10
2026/03/25	750	Simulated Tissue Liquid Head	100	1g 0.832	8.32	8.56	-2.80	± 10
2026/03/26	1750	Simulated Tissue Liquid Head	100	1g 3.76	37.6	36.1	4.16	± 10
2026/03/27	1900	Simulated Tissue Liquid Head	100	1g 3.94	39.4	39.9	-1.25	± 10
2026/03/28	1900	Simulated Tissue Liquid Head	100	1g 4.02	40.2	39.9	0.75	± 10
2026/03/28	2450	Simulated Tissue Liquid Head	100	1g 5.09	50.9	52.7	-3.42	± 10
2026/03/29	2600	Simulated Tissue Liquid Head	100	1g 5.44	54.4	55.2	-1.45	± 10
2026/03/30	5250	Simulated Tissue Liquid Head	100	1g 7.59	75.9	79.3	-4.29	± 10
2026/03/31	5250	Simulated Tissue Liquid Head	100	1g 7.98	79.8	79.3	0.63	± 10
2026/04/01	5600	Simulated Tissue Liquid Head	100	1g 8.01	80.1	81.1	-1.23	± 10
2026/04/02	5800	Simulated Tissue Liquid Head	100	1g 7.5	75	77.9	-3.72	± 10

Note: All the SAR values are normalized to 1Watt forward power.

5.5 SAR SYSTEM VALIDATION DATA

System Performance 750 MHz Head was performed on 2026/03/23

DUT: D750V3; Type: 750 MHz; Serial: 1167

Communication System: CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.359$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 750 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2026/2/26
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.952 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.86 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.842 W/kg; SAR(10 g) = 0.552 W/kg

Smallest distance from peaks to all points 3 dB below = 17.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.9%

Maximum value of SAR (measured) = 0.990 W/kg

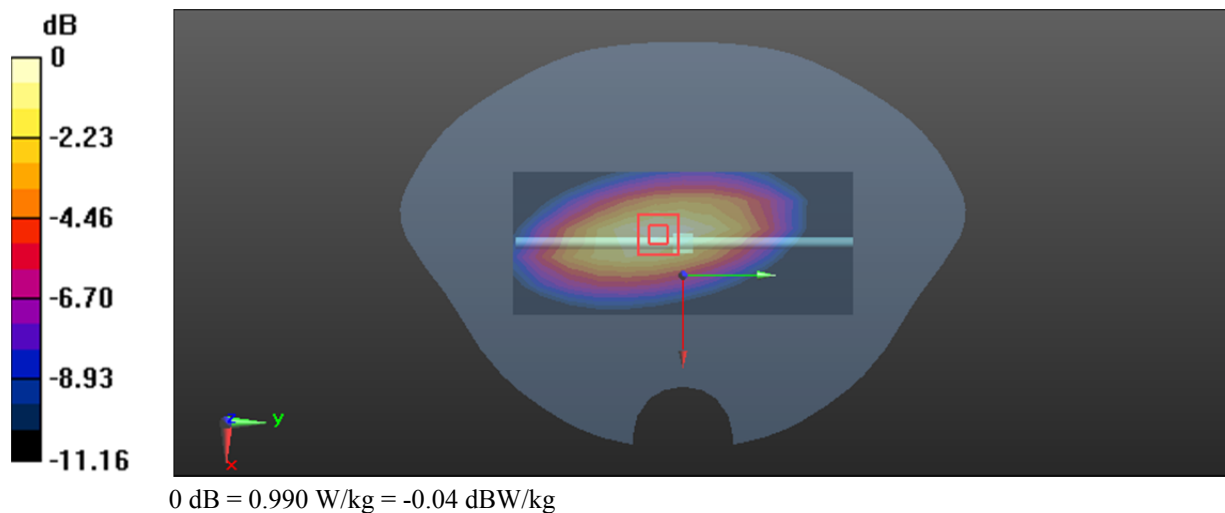

System Performance 750 MHz Head was performed on 2026/03/24**DUT: D750V3; Type: 750 MHz; Serial: 1167**


Communication System: CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.825$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 750 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2026/2/26
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.896 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 33.94 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 1.27 W/kg
SAR(1 g) = 0.837 W/kg; SAR(10 g) = 0.547 W/kg
Smallest distance from peaks to all points 3 dB below = 18.7 mm
Ratio of SAR at M2 to SAR at M1 = 66.4%
Maximum value of SAR (measured) = 0.980 W/kg

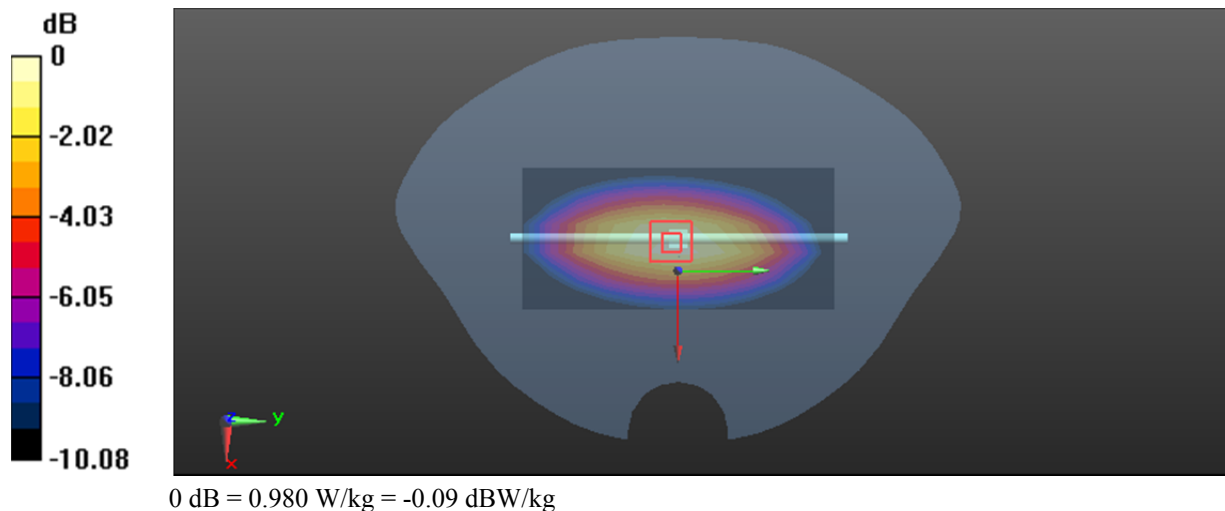

System Performance 750 MHz Head was performed on 2026/03/25**DUT: D750V3; Type: 750 MHz; Serial: 1167**


Communication System: CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 42.591$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 750 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2026/2/26
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.08 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 27.82 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 1.21 W/kg
SAR(1 g) = 0.832 W/kg; SAR(10 g) = 0.551 W/kg
Smallest distance from peaks to all points 3 dB below = 16 mm
Ratio of SAR at M2 to SAR at M1 = 68.3%
Maximum value of SAR (measured) = 1.09 W/kg

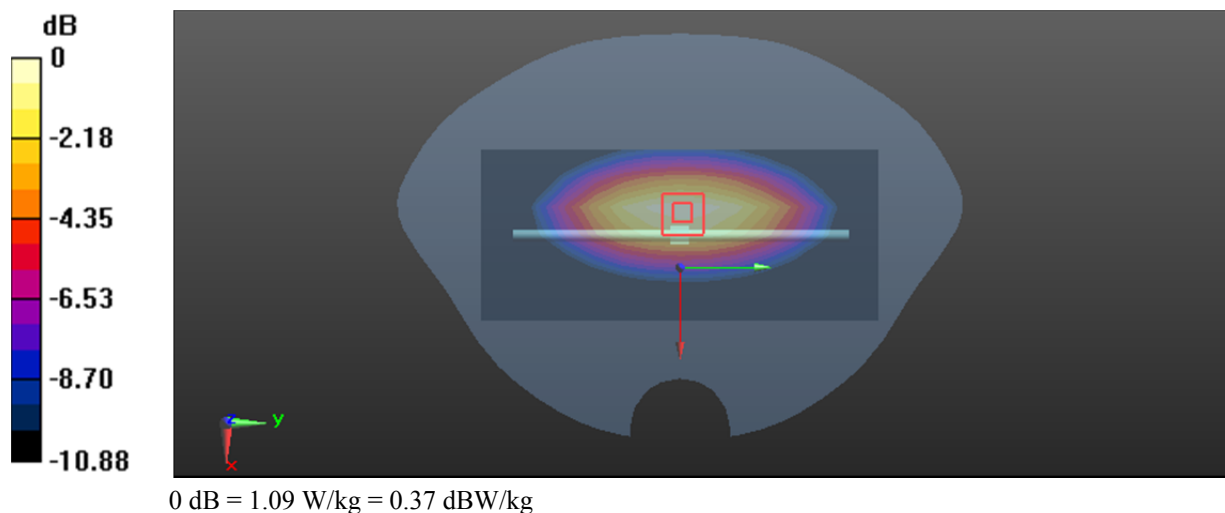

System Performance 1750 MHz Head**DUT: D1750V2; Type: 1750 MHz; Serial: 1141**

Communication System: CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 40.467$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.45, 8.45, 8.45) @ 1750 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2026/2/26
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.64 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.44 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 6.50 W/kg

SAR(1 g) = 3.76 W/kg; SAR(10 g) = 2.04 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.3%

Maximum value of SAR (measured) = 4.21 W/kg

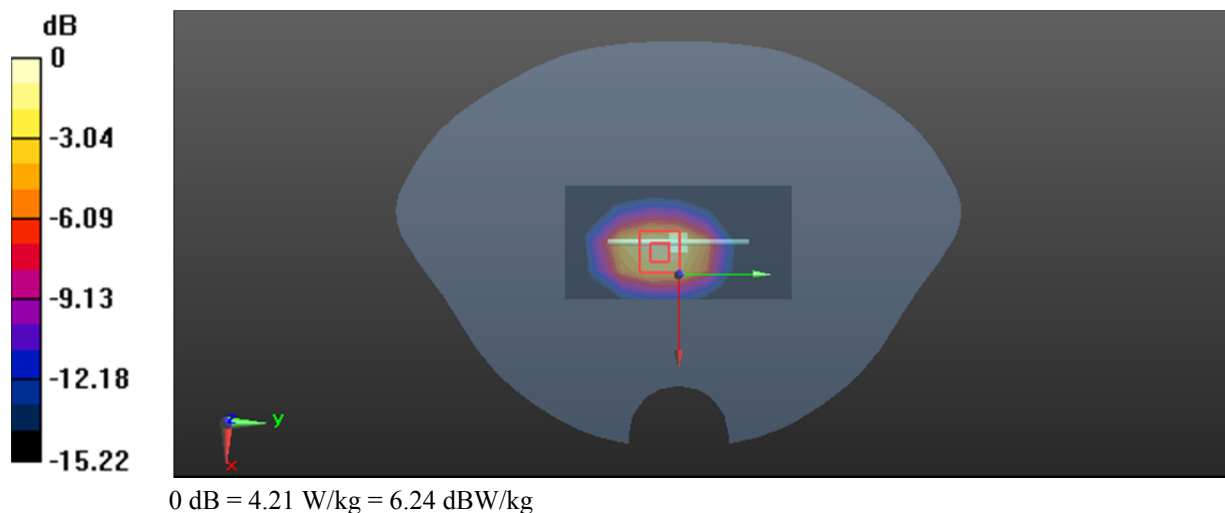

System Performance 1900 MHz Head was performed on 2026/03/27**DUT: D1900V2; Type: 1900 MHz; Serial: 543**

Communication System: CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 39.773$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.12, 8.12, 8.12) @ 1900 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2026/2/26
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.44 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.26 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 7.01 W/kg

SAR(1 g) = 3.94 W/kg; SAR(10 g) = 2.07 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 4.35 W/kg

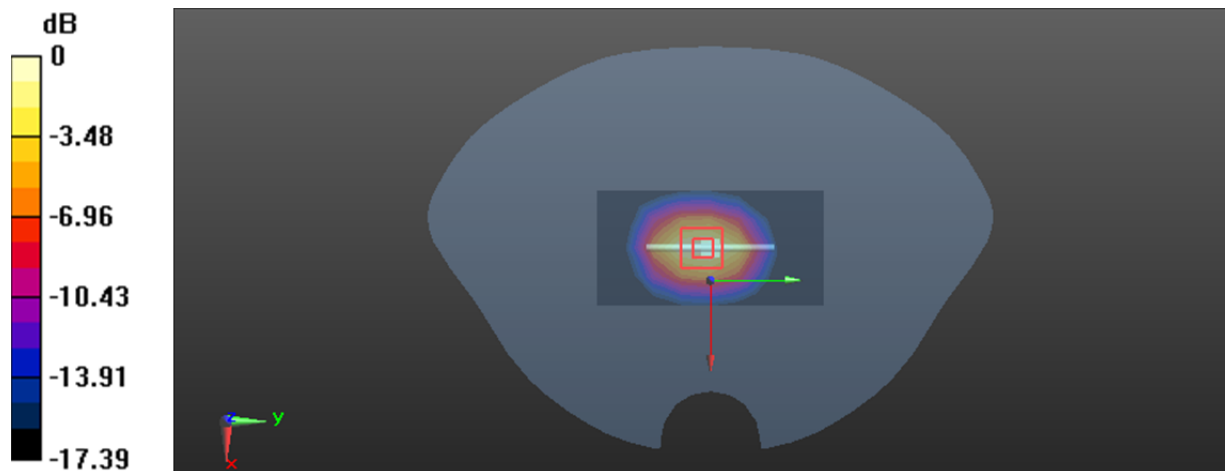

0 dB = 4.35 W/kg = 6.38 dBW/kg

System Performance 1900 MHz Head was performed on 2026/03/28**DUT: D1900V2; Type: 1900 MHz; Serial: 543**

Communication System: CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.428$ S/m; $\epsilon_r = 39.691$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.12, 8.12, 8.12) @ 1900 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2026/2/26
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.90 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 65.93 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 7.58 W/kg

SAR(1 g) = 4.02 W/kg; SAR(10 g) = 2.07 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 53%

Maximum value of SAR (measured) = 6.19 W/kg

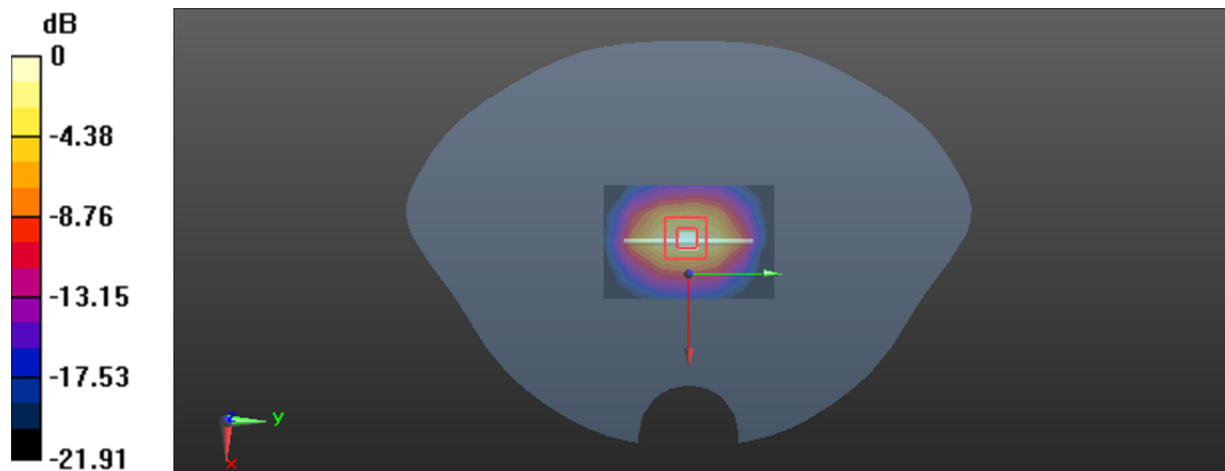

0 dB = 6.19 W/kg = 7.92 dBW/kg

System Performance 2450 MHz Head**DUT: D2450V2; Type: 2450 MHz; Serial: 971**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.793$ S/m; $\epsilon_r = 40.096$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.68, 7.68, 7.68) @ 2450 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2026/2/26
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 6.77 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.71 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 10.4 W/kg

SAR(1 g) = 5.09 W/kg; SAR(10 g) = 2.34 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 48.8%

Maximum value of SAR (measured) = 8.46 W/kg

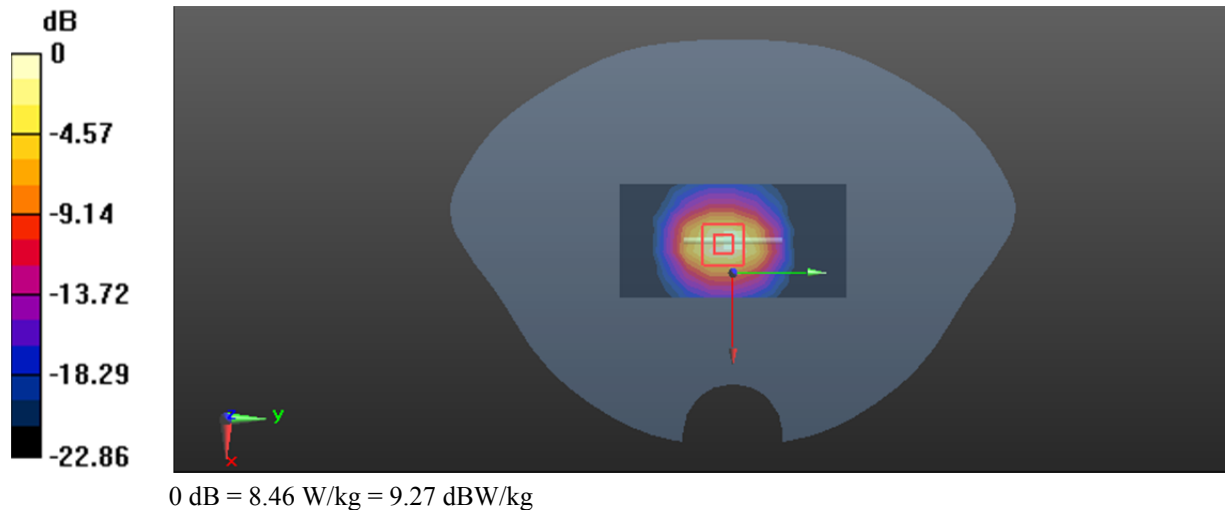

System Performance 2600 MHz Head**DUT: D2600V2; Type: 2600 MHz; Serial: 1132**

Communication System: CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.988$ S/m; $\epsilon_r = 39.017$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.5, 7.5, 7.5) @ 2600 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2026/2/26
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (6x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 8.72 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 49.85 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 11.6 W/kg

SAR(1 g) = 5.44 W/kg; SAR(10 g) = 2.39 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 46.4%

Maximum value of SAR (measured) = 9.26 W/kg

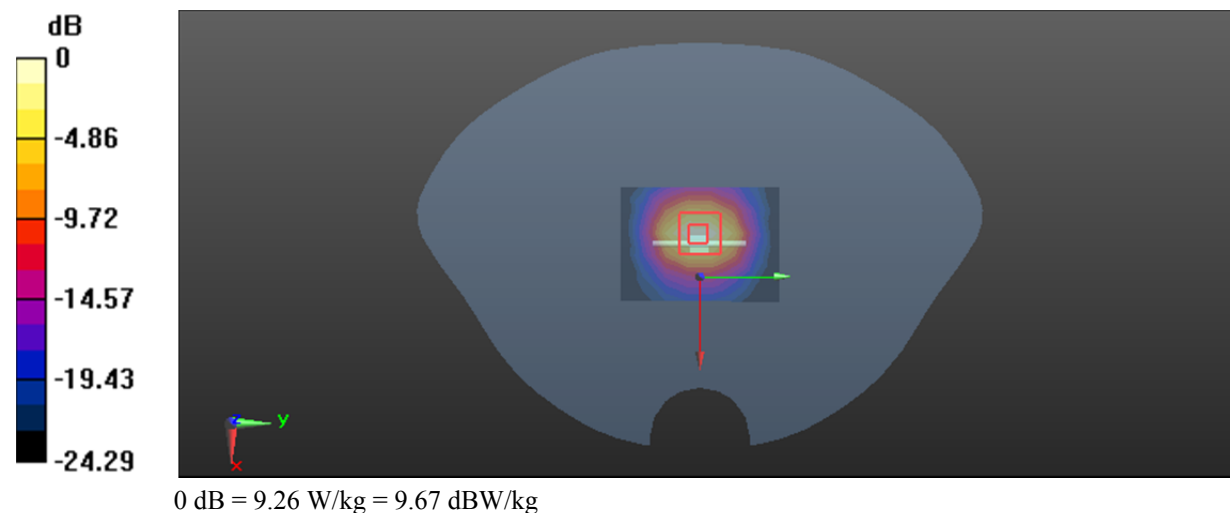

System Performance 5250 MHz Head was performed on 2026/03/08**DUT: D5GHzV2; Type: 5250 MHz; Serial: 1246**

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.738$ S/m; $\epsilon_r = 36.376$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.5, 5.5, 5.5) @ 5250 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2026/2/26
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (5x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 14.4 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 38.42 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 28.2 W/kg

SAR(1 g) = 7.59 W/kg; SAR(10 g) = 2.2 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 18.2 W/kg

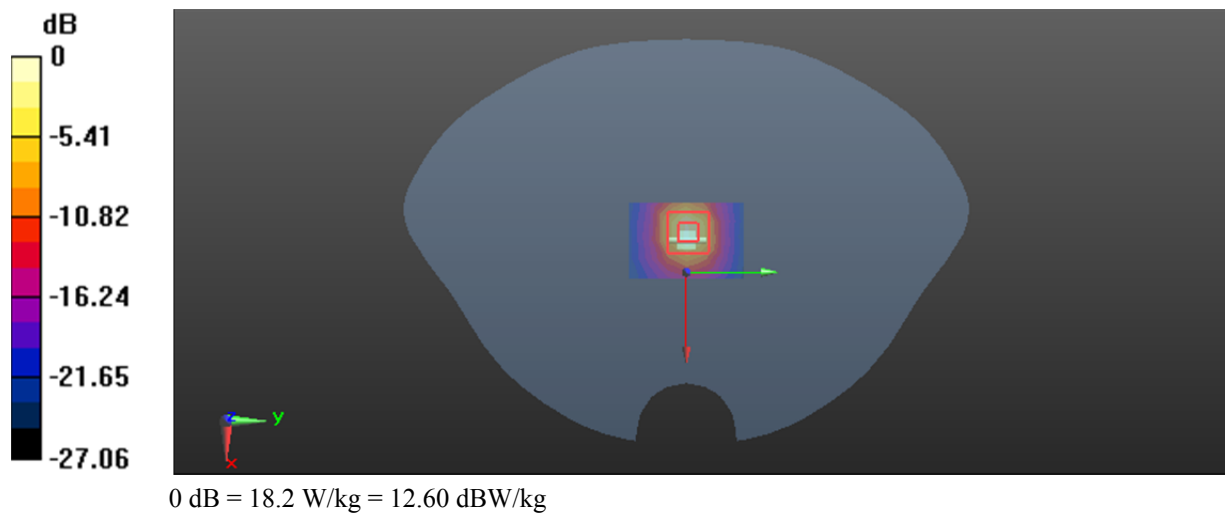

System Performance 5250 MHz Head was performed on 2026/03/09**DUT: D5GHzV2; Type: 5250 MHz; Serial: 1246**

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.742$ S/m; $\epsilon_r = 36.907$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.5, 5.5, 5.5) @ 5250 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2026/2/26
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (5x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 17.1 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 40.86 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 34.8 W/kg

SAR(1 g) = 7.98 W/kg; SAR(10 g) = 2.26 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 20.8 W/kg

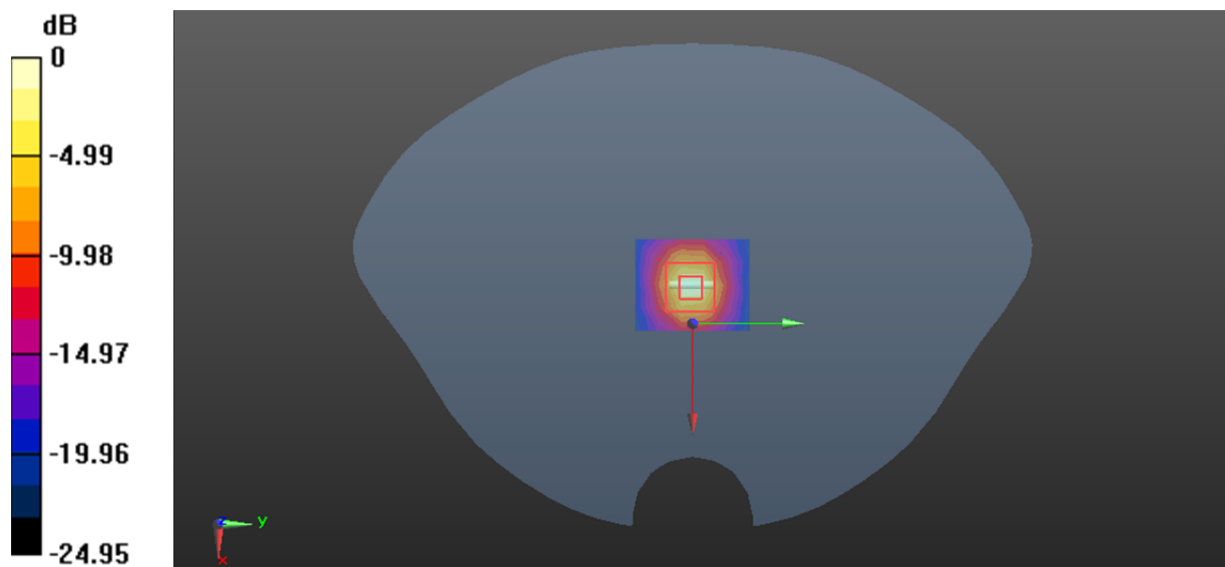

System Performance 5600 MHz Head**DUT: D5GHzV2; Type: 5600 MHz; Serial: 1246**

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.011$ S/m; $\epsilon_r = 35.672$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.9, 4.9, 4.9) @ 5600 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2026/2/26
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (5x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 15.2 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 41.14 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 30.4 W/kg

SAR(1 g) = 8.01 W/kg; SAR(10 g) = 2.32 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 19.7 W/kg

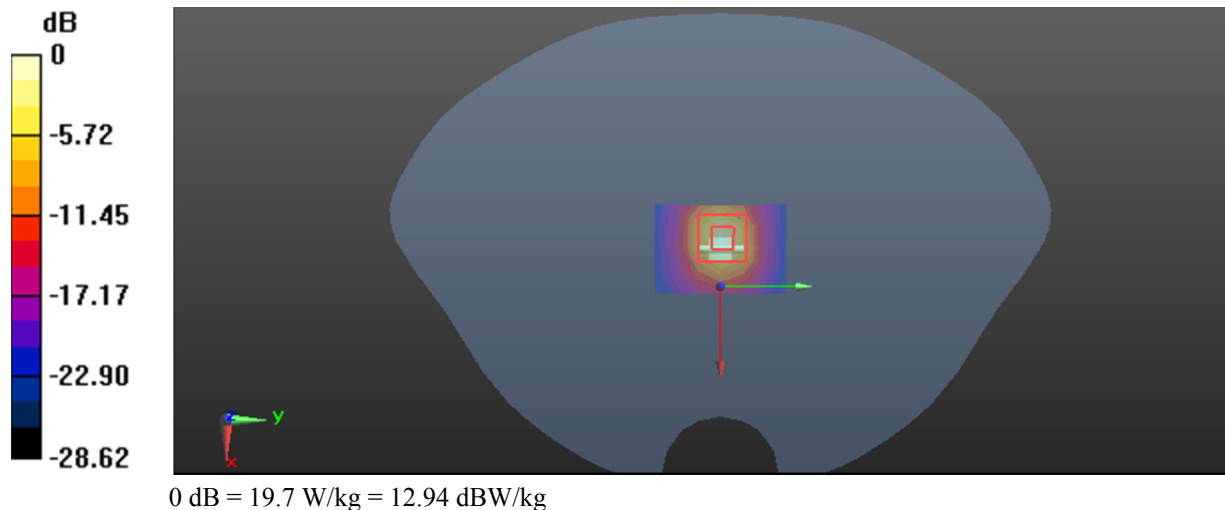

System Performance 5800 MHz Head**DUT: D5GHzV2; Type: 5800 MHz; Serial: 1246**

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.318$ S/m; $\epsilon_r = 35.126$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.02, 5.02, 5.02) @ 5800 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2026/2/26
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (5x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 17.8 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 37.32 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 34.9 W/kg

SAR(1 g) = 7.5 W/kg; SAR(10 g) = 2.12 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.8%

Maximum value of SAR (measured) = 19.8 W/kg

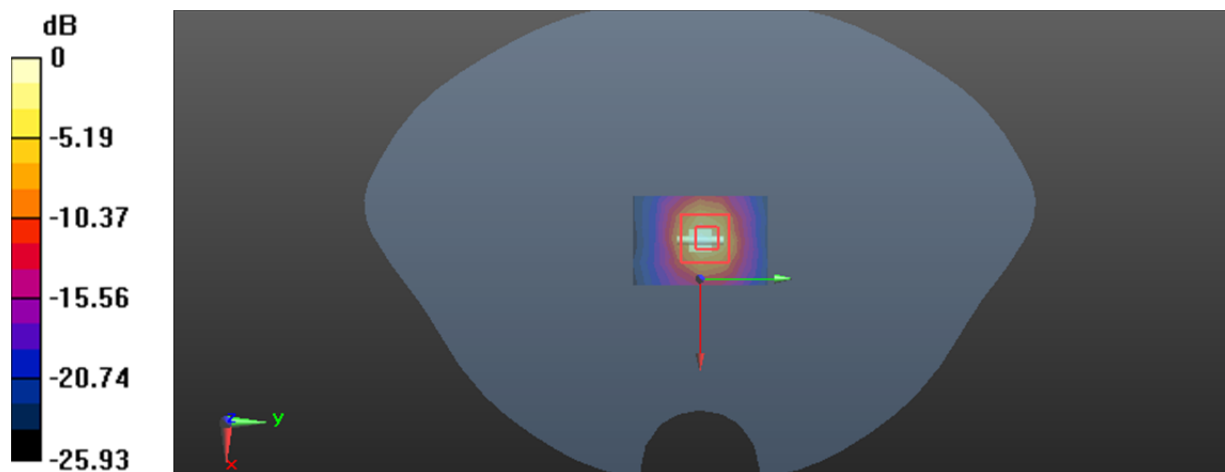



0 dB = 19.8 W/kg = 12.97 dBW/kg

6. EUT TEST STRATEGY AND METHODOLOGY

6.1 Test Positions for Device Operating Next to a Person's Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper $\frac{1}{4}$ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point". The "test device reference point" should be located at the same level as the center of the earpiece region. The "vertical centerline" should bisect the front surface of the handset at its top and bottom edges. A "ear reference point" is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the "phantom reference plane" defined by the three lines joining the center of each "ear reference point" (left and right) and the tip of the mouth.


A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the "N-F" line defined along the base of the ear spacer that contains the "ear reference point". For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The "test device reference point" is aligned to the "ear reference point" on the head phantom and the "vertical centerline" is aligned to the "phantom reference plane". This is called the "initial ear position". While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

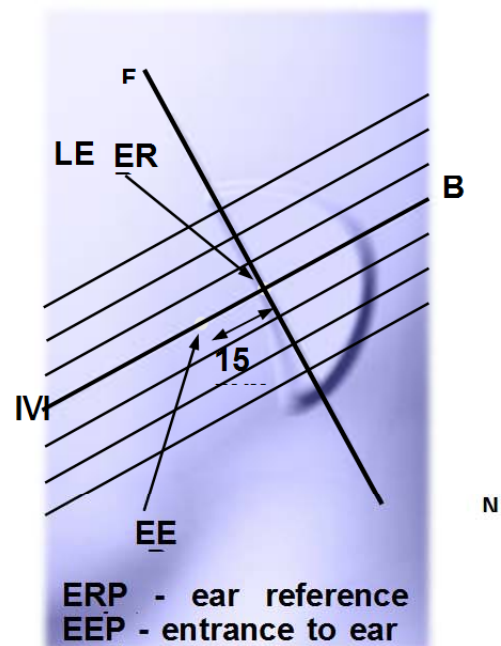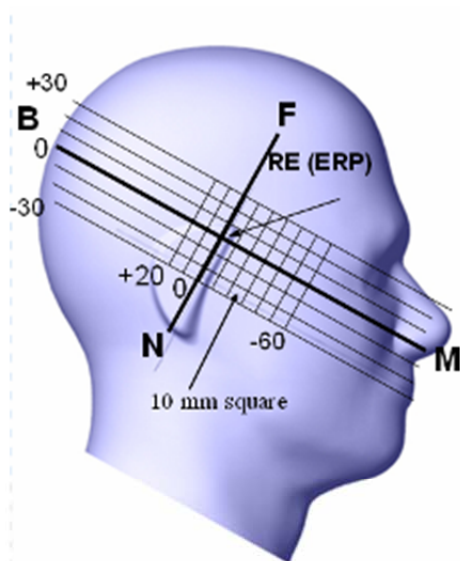

6.2 Cheek/Touch Position

1. The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line for the SCC-34/SC-2 head phantom.
2. This test position is established:
 3. When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
 4. (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.
5. For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek /Touch Position

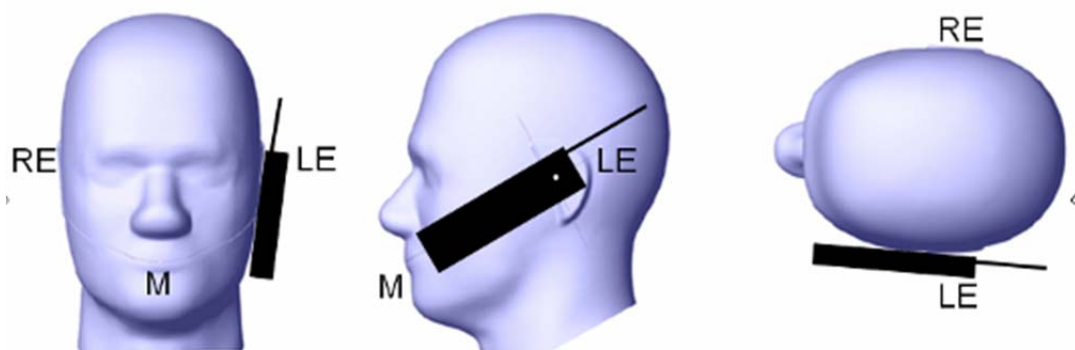

6.3 Ear/Tilt Position

With the handset aligned in the “Cheek/Touch Position”:


1) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.

2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tilt/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

Ear /Tilt 15° Position

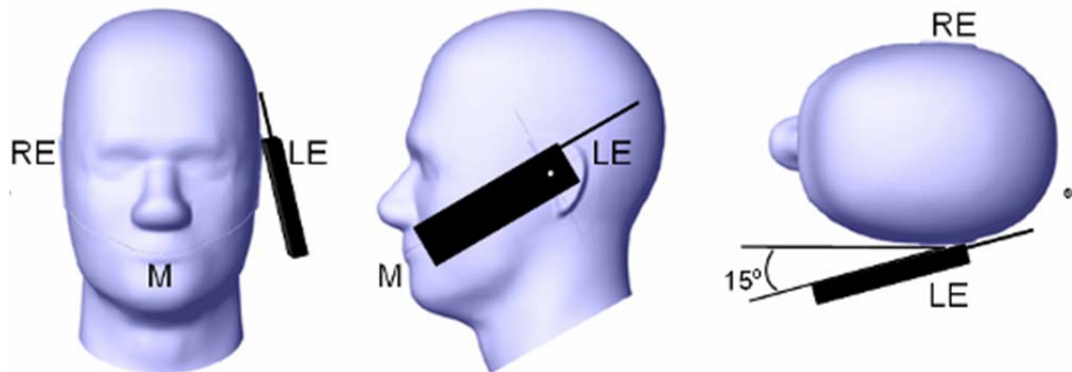

6.4 Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

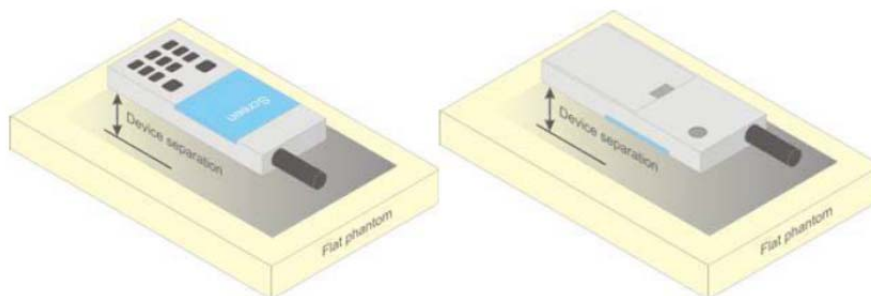


Figure 5 – Test positions for body-worn devices

6.5 Test Distance for SAR Evaluation

For Body mode(1g Body SAR) the EUT(Equipment Under Test) is set 10mm away from the phantom, the test distance is 10mm.

6.6 SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.


All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.


7. CONDUCTED OUTPUT POWER MEASUREMENT

7.1 Test Procedure

The RF output of the transmitter was connected to the input of the Wireless Communication Test Set through Attenuator.

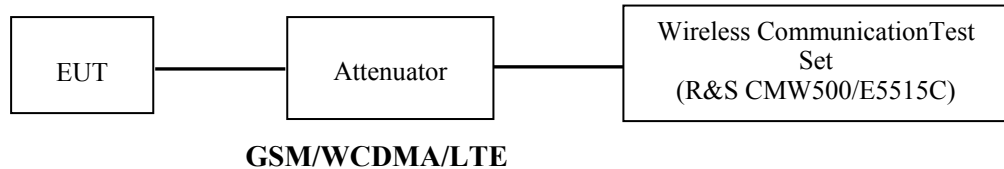

The RF output of the transmitter was connected to the input port of the Power Sensor through Attenuator.

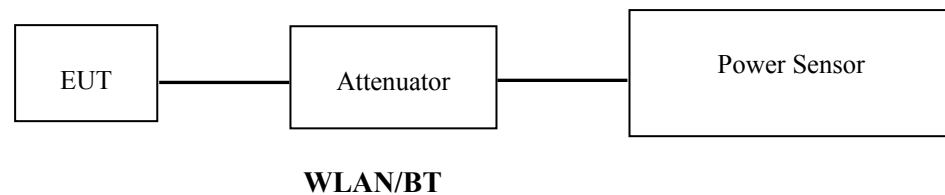

7.2 Radio Configuration

The power measurement was configured by the Wireless Communication Test Set.

GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desired test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

WCDMA Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP

TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP

TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	$\beta_d(\text{SF})$	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	Ahs= β_{hs}/β_c	30/15			

HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI's	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

DC-HSDPA

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

HSPA+

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

FDD-LTE

For UE Power Class 1 and 3, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

For UE Power Class 1 and 3 the specific requirements and identified sub clauses are specified in Table 6.2.4-1 along with the allowed A-MPR values that may be used to meet these requirements. The allowed A-MPR values specified below in Table 6.2.4.-1 to 6.2.4-15 are in addition to the allowed MPR requirements specified in sub clause 6.2.3.

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9	
				Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2	23	5, 10, 15, 20	Table 6.2.4-15	
	6.6.2.2.1				
	6.6.3.2				
...					
NS_32	-	-	-	-	-

TDD-LTE

LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

We used configuration 0 for LTE Band 41&38 SAR test, that is 63.33%(1:1.58)for duty cycle.

7.3 Maximum Target Output Power

Mode/Band	Max Target Power(dBm)			
	Channel			
	Low	Middle	High	Additional
GSM 850	34	34	34	/
GPRS 1 TX Slot	34	34	34	/
GPRS 2 TX Slot	32.8	32.8	32.8	/
GPRS 3 TX Slot	30.5	30.5	30.5	/
GPRS 4 TX Slot	29.5	29.5	29.5	/
EDGE 1 TX Slot	27.1	27.1	27.1	/
EDGE 2 TX Slot	26.2	26.2	26.2	/
EDGE 3 TX Slot	24.2	24.2	24.2	/
EDGE 4 TX Slot	23	23	23	/
PCS 1900	30.7	30.7	30.7	/
GPRS 1 TX Slot	30.6	30.6	30.6	/
GPRS 2 TX Slot	29.3	29.3	29.3	/
GPRS 3 TX Slot	27	27	27	/
GPRS 4 TX Slot	25.8	25.8	25.8	/
EDGE 1 TX Slot	25.9	25.9	25.9	/
EDGE 2 TX Slot	25	25	25	/
EDGE 3 TX Slot	23.1	23.1	23.1	/
EDGE 4 TX Slot	21.7	21.7	21.7	/
WCDMA Band 2	23.6	23.6	23.6	/
HSDPA	22.6	22.6	22.6	/
HSUPA	22.9	22.9	22.9	/
DC-HSDPA	21.9	21.9	21.9	/
HSPA+	22	22	22	/
WCDMA Band 4	24.1	24.1	24.1	/
HSDPA	22.5	22.5	22.5	/
HSUPA	22.8	22.8	22.8	/
DC-HSDPA	22.1	22.1	22.1	/
HSPA+	22.1	22.1	22.1	/
WCDMA Band 5	24.7	24.7	24.7	/
HSDPA	22.8	22.8	22.8	/
HSUPA	23.1	23.1	23.1	/
DC-HSDPA	22.5	22.5	22.5	/
HSPA+	22.5	22.5	22.5	/
LTE Band 2	24.1	24.1	24.1	/
LTE Band 4	24.1	24.1	24.1	/
LTE Band 5	23.6	23.6	23.6	/
LTE Band 7	22.4	22.4	22.4	/
LTE Band 12	23.6	23.6	23.6	/
LTE Band 13	23.7	23.7	23.7	/
LTE Band 17	23.6	23.6	23.6	/
LTE Band 25	24.1	24.1	24.1	/
LTE Band 26	23.7	23.7	23.7	/
LTE Band 38	23	23	23	/
LTE Band 41	23.4	23.4	23.4	/

Mode/Band	Max Target Power(dBm)			
	Channel			
	Low	Middle	High	Additional
LTE Band 66	24.1	24.1	24.1	/
LTE Band 71	23.7	23.7	23.7	/
Wi-Fi 2.4G(802.11b) Chain 0	13.8	12.0	13.8	/
Wi-Fi 2.4G(802.11g) Chain 0	13	11.8	12.5	/
Wi-Fi 2.4G(802.11 n20) Chain 0	13.5	12	13.1	/
Wi-Fi 2.4G(802.11 n40) Chain 0	13.5	12.2	12.2	/
Wi-Fi 2.4G(802.11b) Chain 1	9.7	9.7	9.7	/
Wi-Fi 2.4G(802.11g) Chain 1	9.0	9.0	9.0	/
Wi-Fi 2.4G(802.11 n20) Chain 1	9.2	9.2	9.2	/
Wi-Fi 2.4G(802.11 n40) Chain 1	9.5	9.0	8.5	/
Wi-Fi 5.2G(802.11a) Chain 0	8.2	8.2	8.2	/
Wi-Fi 5.2G(802.11 ac20) Chain 0	8.5	8.5	8.5	/
Wi-Fi 5.2G(802.11 ac40) Chain 0	8.4	/	8.4	/
Wi-Fi 5.2G(802.11 ac80) Chain 0	/	8.2	/	/
Wi-Fi 5.2G(802.11 ax20) Chain 0	8.4	8.4	8.4	/
Wi-Fi 5.2G(802.11 ax40) Chain 0	8.2	/	8.2	/
Wi-Fi 5.2G(802.11 ax80) Chain 0	/	8.4	/	/
Wi-Fi 5.2G(802.11a) Chain 1	6.5	7.5	7.8	/
Wi-Fi 5.2G(802.11 ac20) Chain 1	8.1	8.1	8.1	/
Wi-Fi 5.2G(802.11 ac40) Chain 1	7.5	/	7.9	/
Wi-Fi 5.2G(802.11 ac80) Chain 1	/	7.5	/	/
Wi-Fi 5.2G(802.11 ax20) Chain 1	6.0	6.5	7.5	/
Wi-Fi 5.2G(802.11 ax40) Chain 1	6.5	/	7.0	/
Wi-Fi 5.2G(802.11 ax80) Chain 1	/	8.0	/	/
Wi-Fi 5.3G(802.11a) Chain 0	9.3	9.3	9.3	/
Wi-Fi 5.3G(802.11 ac20) Chain 0	9.5	9.5	9.5	/
Wi-Fi 5.3G(802.11 ac40) Chain 0	9.4	/	9.4	/
Wi-Fi 5.3G(802.11 ac80) Chain 0	/	8.5	/	/
Wi-Fi 5.3G(802.11 ax20) Chain 0	9.2	9.2	9.2	/
Wi-Fi 5.3G(802.11 ax40) Chain 0	9.4	/	9.4	/
Wi-Fi 5.3G(802.11 ax80) Chain 0	/	9.4	/	/
Wi-Fi 5.3G(802.11a) Chain 1	8.5	8.5	8.5	/
Wi-Fi 5.3G(802.11 ac20) Chain 1	8.5	8.5	8.5	/
Wi-Fi 5.3G(802.11 ac40) Chain 1	8.5	/	8.5	/
Wi-Fi 5.3G(802.11 ac80) Chain 1	/	9.0	/	/
Wi-Fi 5.3G(802.11 ax20) Chain 1	8.5	8.5	8.5	/
Wi-Fi 5.3G(802.11 ax40) Chain 1	8.5	/	8.5	/
Wi-Fi 5.3G(802.11 ax80) Chain 1	/	8.8	/	/
Wi-Fi 5.6G(802.11a) Chain 0	10.5	11.2	10	10
Wi-Fi 5.6G(802.11 ac20) Chain 0	10.5	11	9	9.5
Wi-Fi 5.6G(802.11 ac40) Chain 0	11	11.5	10.5	10
Wi-Fi 5.6G(802.11 ac80) Chain 0	9.5	/	9.5	8
Wi-Fi 5.6G(802.11 ax20) Chain 0	10.5	11	9	9.5
Wi-Fi 5.6G(802.11 ax40) Chain 0	10.8	11.4	10.4	9.8
Wi-Fi 5.6G(802.11 ax80) Chain 0	9.5	/	9	8
Wi-Fi 5.6G(802.11a) Chain 1	11.5	11.5	11.5	11.5
Wi-Fi 5.6G(802.11 ac20) Chain 1	10.5	11.2	10	10

Max Target Power(dBm)				
Mode/Band	Channel			
	Low	Middle	High	Additional
Wi-Fi 5.6G(802.11 ac40) Chain 1	10.8	11.4	10	10.2
Wi-Fi 5.6G(802.11 ac80) Chain 1	10.5	/	11.2	10.5
Wi-Fi 5.6G(802.11 ax20) Chain 1	10.5	11.2	10.5	10
Wi-Fi 5.6G(802.11 ax40) Chain 1	11	11.4	10.5	10.5
Wi-Fi 5.6G(802.11 ax80) Chain 1	11	/	11.4	10.5
Wi-Fi 5.8G(802.11a) Chain 0	10	10	10	/
Wi-Fi 5.8G(802.11 ac20) Chain 0	9.5	9.5	9.5	/
Wi-Fi 5.8G(802.11 ac40) Chain 0	8	/	8	/
Wi-Fi 5.8G(802.11 ac80) Chain 0	/	7.5	/	/
Wi-Fi 5.8G(802.11 ax20) Chain 0	8	8	8	/
Wi-Fi 5.8G(802.11 ax40) Chain 0	9.5	/	9.5	/
Wi-Fi 5.8G(802.11 ax80) Chain 0	/	8	/	/
Wi-Fi 5.8G(802.11a) Chain 1	14	14	14	/
Wi-Fi 5.8G(802.11 ac20) Chain 1	14	14	14	/
Wi-Fi 5.8G(802.11 ac40) Chain 1	13.5	/	13.5	/
Wi-Fi 5.8G(802.11 ac80) Chain 1	/	14.5	/	/
Wi-Fi 5.8G(802.11 ax20) Chain 1	14	14	14	/
Wi-Fi 5.8G(802.11 ax40) Chain 1	14	/	14	/
Wi-Fi 5.8G(802.11 ax80) Chain 1	/	14	/	/
Bluetooth BDR	1.5	1.5	1.5	/
Bluetooth EDR	0.5	1.5	1.5	/
BLE 1M	1.0	1.5	1.5	/
BLE 2M	1.0	1.5	1.5	/

Note: The Maximum Target Power for LTE bands corresponds to their maximum power in QPSK modes with maximum bandwidth.

7.4 Test Results:**GSM:**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)
GSM 850	128	824.2	33.78
	190	836.6	33.78
	251	848.8	33.66
PCS 1900	512	1850.2	30.59
	661	1880	30.59
	810	1909.8	30.43

GPRS:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	33.85	32.67	30.38	29.40
	190	836.6	33.73	32.32	29.96	28.87
	251	848.8	33.51	32.24	29.97	28.86
PCS 1900	512	1850.2	30.50	29.20	26.79	25.59
	661	1880	30.39	29.24	26.87	25.73
	810	1909.8	30.38	29.15	26.68	25.50

EDGE:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	27.01	26.06	24.12	22.94
	190	836.6	26.95	25.97	23.94	22.74
	251	848.8	26.89	25.91	23.92	22.86
PCS 1900	512	1850.2	25.82	24.88	22.99	21.63
	661	1880	25.57	24.71	22.69	21.59
	810	1909.8	25.50	24.63	22.77	21.56

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

The time based average power for GSM

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)
GSM 850	128	824.2	24.78
	190	836.6	24.78
	251	848.8	24.66
PCS 1900	512	1850.2	21.59
	661	1880	21.59
	810	1909.8	21.43

The time based average power for GPRS

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	24.85	26.67	26.13	26.4
	190	836.6	24.73	26.32	25.71	25.87
	251	848.8	24.51	26.24	25.72	25.86
PCS 1900	512	1850.2	21.5	23.2	22.54	22.59
	661	1880	21.39	23.24	22.62	22.73
	810	1909.8	21.38	23.15	22.43	22.5

The time based average power for EDGE

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	18.01	20.06	19.87	19.94
	190	836.6	17.95	19.97	19.69	19.74
	251	848.8	17.89	19.91	19.67	19.86
PCS 1900	512	1850.2	16.82	18.88	18.74	18.63
	661	1880	16.57	18.71	18.44	18.59
	810	1909.8	16.5	18.63	18.52	18.56

Note:

1. Wireless Communication Test Set (E5515C) was used for the measurement of GSM peak and average output power for active timeslots.
2. For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).
3. For EGPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 6(850 MHz band) and 5(1900 MHz band).
4. According to KDB941225D01-SAR for EGPRS mode are not required when the source-based time-averaged output power for data mode is lower than that in the normal GPRS mode.

WCDMA:**WCDMA Band 2:**

Test Mode	Conducted Average Output Power(dBm)		
	Lowest Channel	Middle Channel	Highest Channel
WCDMA	23.48	23.44	22.99
HSDPA Subset 1	22.41	22.23	22.08
HSDPA Subset 2	22.30	22.47	22.06
HSDPA Subset 3	22.25	22.39	22.03
HSDPA Subset 4	22.21	22.29	22.00
HSUPA Subset 1	22.76	22.65	21.98
HSUPA Subset 2	22.71	22.71	22.01
HSUPA Subset 3	22.75	22.60	21.95
HSUPA Subset 4	22.73	22.69	21.86
HSUPA Subset 5	22.75	22.67	22.23
DC-HSDPA Subset 1	21.63	21.80	21.66
DC-HSDPA Subset 2	21.76	21.66	21.83
DC-HSDPA Subset 3	21.76	21.71	21.73
DC-HSDPA Subset 4	21.83	21.73	21.85
HSPA+ Subset 1	21.85	21.84	21.81

WCDMA Band 4:

Test Mode	Conducted Average Output Power(dBm)		
	Lowest Channel	Middle Channel	Highest Channel
WCDMA	23.65	23.83	23.96
HSDPA Subset 1	22.16	22.24	21.98
HSDPA Subset 2	22.36	22.38	22.27
HSDPA Subset 3	22.41	22.27	22.18
HSDPA Subset 4	22.38	22.32	22.27
HSUPA Subset 1	22.59	22.52	22.55
HSUPA Subset 2	22.66	22.61	22.66
HSUPA Subset 3	22.69	22.56	22.68
HSUPA Subset 4	22.67	22.52	22.51
HSUPA Subset 5	22.61	22.49	22.58
DC-HSDPA Subset 1	21.94	21.97	21.96
DC-HSDPA Subset 2	21.96	21.95	22.04
DC-HSDPA Subset 3	22.01	21.90	21.93
DC-HSDPA Subset 4	22.00	21.93	22.00
HSPA+ Subset 1	21.90	22.03	21.93

WCDMA Band 5:

Test Mode	Conducted Average Output Power(dBm)		
	Lowest Channel	Middle Channel	Highest Channel
WCDMA	24.45	24.59	24.35
HSDPA Subset 1	22.38	22.54	22.58
HSDPA Subset 2	22.64	22.73	22.13
HSDPA Subset 3	22.35	22.63	22.05
HSDPA Subset 4	22.41	22.54	22.07
HSUPA Subset 1	22.64	22.88	22.48
HSUPA Subset 2	22.69	22.86	22.43
HSUPA Subset 3	22.6	22.96	22.47
HSUPA Subset 4	22.6	23	22.55
HSUPA Subset 5	22.7	22.95	22.52
DC-HSDPA Subset 1	22.32	22.22	22.25
DC-HSDPA Subset 2	22.28	22.23	22.23
DC-HSDPA Subset 3	22.28	22.32	22.15
DC-HSDPA Subset 4	22.24	22.36	22.19
HSPA+ Subset 1	22.39	22.42	22.37

Note:

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in All 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/DC-HSDPA/HSPA+ when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

LTE Band 2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1@0	23.93	23.74	23.71
		1@3	23.81	23.59	23.76
		1@5	23.99	23.65	23.85
		3@0	23.77	23.90	23.83
		3@1	23.85	23.88	23.82
		3@3	23.74	23.90	23.91
		6@0	22.69	22.78	22.67
	16-QAM	1@0	23.30	22.80	22.70
		1@3	23.09	22.72	22.66
		1@5	23.11	22.60	22.84
		3@0	23.05	23.08	22.99
		3@1	23.11	23.03	23.01
		3@3	23.08	22.96	23.13
		6@0	21.64	22.03	22.07
3M	QPSK	1@0	23.86	23.75	23.89
		1@8	23.88	23.71	23.97
		1@14	23.95	23.69	23.83
		8@0	22.95	22.83	22.94
		8@4	22.93	22.84	22.89
		8@7	22.89	22.91	22.86
		15@0	22.86	22.88	22.84
	16-QAM	1@0	23.24	22.81	22.72
		1@8	23.29	22.63	22.75
		1@14	23.15	22.63	22.76
		8@0	21.98	21.91	22.04
		8@4	21.92	21.88	21.93
		8@7	22.00	21.89	21.78
		15@0	21.87	21.90	22.06
5M	QPSK	1@0	23.72	23.96	23.59
		1@12	23.71	23.95	23.79
		1@24	23.80	23.91	23.72
		12@0	22.84	23.00	22.90
		12@7	22.80	22.89	22.79
		12@13	22.79	22.89	22.87
		25@0	22.88	23.02	22.96
	16-QAM	1@0	22.71	22.90	23.44
		1@12	22.88	22.89	23.40
		1@24	22.91	23.02	23.40
		12@0	22.07	22.02	22.05
		12@7	22.07	22.05	21.91
		12@13	21.96	22.03	22.06
		25@0	21.86	22.04	22.08

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	1@0	23.54	23.95	23.96
		1@25	23.63	23.91	23.95
		1@49	23.66	23.91	23.97
		25@0	22.87	22.90	22.84
		25@12	22.80	22.84	22.85
		25@25	22.94	22.83	22.83
		50@0	22.94	22.93	22.97
	16-QAM	1@0	22.74	22.90	23.38
		1@25	22.63	22.66	23.18
		1@49	22.66	22.73	23.21
		25@0	22.03	21.99	22.01
		25@12	21.95	22.01	21.96
		25@25	22.04	22.07	21.78
		50@0	21.90	21.89	21.95
15M	QPSK	1@0	23.85	23.87	24.01
		1@37	23.88	23.83	24.02
		1@74	23.96	23.89	23.97
		36@0	22.76	22.88	22.86
		36@20	22.73	22.94	22.85
		36@39	22.82	22.78	22.85
		75@0	22.90	22.90	22.85
	16-QAM	1@0	22.83	22.94	23.23
		1@37	22.67	22.84	23.24
		1@74	22.84	22.86	23.29
		36@0	21.71	21.95	21.81
		36@20	21.77	22.00	21.76
		36@39	21.83	21.88	21.89
		75@0	21.89	21.88	21.85
20M	QPSK	1@0	23.52	23.82	23.72
		1@49	23.65	23.68	23.67
		1@99	23.73	23.83	23.61
		50@0	22.72	22.9	22.8
		50@24	22.89	22.8	22.88
		50@50	22.85	22.93	22.84
		100@0	22.73	22.86	22.79
	16-QAM	1@0	22.99	23.65	23.06
		1@49	23.04	23.6	23.07
		1@99	23.19	23.56	23.05
		50@0	21.71	21.94	21.87
		50@24	21.89	21.82	21.81
		50@50	21.93	21.96	21.75
		100@0	21.77	21.87	21.83

LTE Band 4:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1@0	23.93	23.69	23.61
		1@3	23.87	23.69	23.67
		1@5	23.98	23.71	23.62
		3@0	23.95	23.72	23.8
		3@1	23.88	23.72	23.74
		3@3	23.83	23.75	23.9
		6@0	22.82	22.77	22.77
	16-QAM	1@0	23.22	22.63	22.7
		1@3	23.28	22.58	22.52
		1@5	23.16	22.71	22.7
		3@0	23.2	22.83	23.01
		3@1	23.18	22.86	22.91
		3@3	23.13	22.78	22.93
		6@0	21.85	21.98	21.95
3M	QPSK	1@0	23.72	23.82	23.93
		1@8	23.68	23.83	23.85
		1@14	23.73	23.87	23.88
		8@0	22.85	22.79	22.77
		8@4	22.83	22.91	22.73
		8@7	22.84	22.92	22.8
		15@0	22.94	22.85	22.77
	16-QAM	1@0	22.51	22.84	23.21
		1@8	22.55	22.88	23.09
		1@14	22.53	22.83	23.23
		8@0	21.95	21.94	21.97
		8@4	21.87	21.95	21.86
		8@7	21.85	21.84	21.83
		15@0	21.85	22.01	21.79
5M	QPSK	1@0	23.61	23.96	23.67
		1@12	23.75	23.92	23.65
		1@24	23.68	24.02	23.68
		12@0	22.81	22.82	22.85
		12@7	22.89	22.93	22.82
		12@13	22.87	22.77	22.83
		25@0	22.96	22.93	22.87
	16-QAM	1@0	22.92	22.93	23.35
		1@12	22.73	23.03	23.65
		1@24	22.8	23.03	23.48
		12@0	22.09	21.91	22.07
		12@7	22.03	21.85	22.04
		12@13	22.11	21.84	22.04
		25@0	22.01	21.85	21.97

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	1@0	23.65	23.92	23.94
		1@25	23.7	23.86	23.91
		1@49	23.69	23.88	24.01
		25@0	22.93	22.86	22.76
		25@12	22.97	22.96	22.87
		25@25	22.98	22.96	22.76
		50@0	22.88	22.97	22.81
	16-QAM	1@0	22.54	22.93	23.17
		1@25	22.61	22.68	23.27
		1@49	22.66	22.91	23.16
		25@0	22.01	21.99	21.98
		25@12	22.07	21.97	21.97
		25@25	22.1	21.92	21.83
		50@0	21.9	21.85	21.85
15M	QPSK	1@0	23.81	23.94	24.03
		1@37	23.93	23.92	23.94
		1@74	23.95	23.93	23.96
		36@0	22.73	22.8	22.85
		36@20	22.74	22.74	22.73
		36@39	22.93	22.78	22.94
		75@0	22.7	22.79	22.81
	16-QAM	1@0	22.8	22.84	23.27
		1@37	22.65	22.75	23.23
		1@74	22.77	22.89	23.26
		36@0	21.71	21.86	21.84
		36@20	21.76	21.91	21.8
		36@39	21.92	21.95	21.95
		75@0	21.8	21.82	21.88
20M	QPSK	1@0	23.75	23.83	23.82
		1@49	23.65	23.7	23.75
		1@99	23.86	23.88	23.82
		50@0	22.82	23	22.98
		50@24	22.99	22.97	22.84
		50@50	22.87	22.89	22.9
		100@0	22.85	22.86	22.9
	16-QAM	1@0	23.11	23.62	23.11
		1@49	23.04	23.61	23.07
		1@99	23.26	23.73	23.09
		50@0	21.88	21.96	22.06
		50@24	21.87	21.89	21.9
		50@50	21.84	22	22.06
		100@0	21.94	22.05	22

LTE Band 5:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1@0	23.12	23.35	22.96
		1@3	22.94	23.3	22.8
		1@5	23.12	23.26	22.97
		3@0	23.16	23.25	22.88
		3@1	23.21	23.23	22.88
		3@3	23.27	23.36	22.72
		6@0	22.26	22.39	21.89
	16-QAM	1@0	22	22.1	22.33
		1@3	22.05	22.16	22.21
		1@5	22.12	22.14	22.15
		3@0	22.44	22.36	22.26
		3@1	22.41	22.47	22.11
		3@3	22.4	22.54	22.17
		6@0	21.56	21.51	21.02
3M	QPSK	1@0	23.02	23.06	23.03
		1@8	23.13	23.16	23.04
		1@14	23.09	23.07	22.97
		8@0	22.38	22.26	21.97
		8@4	22.33	22.27	22.1
		8@7	22.32	22.31	22.02
		15@0	22.25	22.22	22.06
	16-QAM	1@0	22.25	22.15	22.07
		1@8	21.93	22.07	21.98
		1@14	21.94	22.06	21.74
		8@0	21.37	21.3	21.2
		8@4	21.29	21.23	21.24
		8@7	21.34	21.34	21.16
		15@0	21.28	21.36	21.21
5M	QPSK	1@0	23.29	23.42	23.08
		1@12	23.03	23.53	22.94
		1@24	23.14	23.32	22.83
		12@0	22.31	22.41	22
		12@7	22.35	22.38	22.02
		12@13	22.28	22.34	22.04
		25@0	22.28	22.4	21.98
	16-QAM	1@0	22.25	22.47	22.83
		1@12	22.26	22.33	22.78
		1@24	22.27	22.31	22.63
		12@0	21.44	21.36	21.21
		12@7	21.51	21.31	21.14
		12@13	21.45	21.28	21.1
		25@0	21.3	21.32	21.26

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	1@0	23.26	23.5	23.35
		1@25	23.22	23.46	23.18
		1@49	23.3	23.5	23.02
		25@0	22.42	22.36	22.51
		25@12	22.36	22.32	22.37
		25@25	22.45	22.39	22.18
		50@0	22.44	22.41	22.36
	16-QAM	1@0	22.16	22.37	22.35
		1@25	22.09	22.31	22.09
		1@49	22.28	22.44	21.71
		25@0	21.48	21.48	21.48
		25@12	21.36	21.43	21.42
		25@25	21.45	21.37	21.27
		50@0	21.44	21.28	21.3

LTE Band 7:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1@0	22.11	22.09	22.17
		1@12	22.11	22.18	21.43
		1@24	22.14	22.17	21.32
		12@0	21.14	21.27	20.39
		12@7	21.27	21.23	20.51
		12@13	21.11	21.21	20.51
		25@0	21.31	21.27	20.45
	16-QAM	1@0	21.78	21.25	20.52
		1@12	21.78	21.25	20.59
		1@24	21.79	21.17	20.56
		12@0	20.35	20.47	19.57
		12@7	20.43	20.4	19.66
		12@13	20.46	20.48	19.64
		25@0	20.48	20.27	19.43
10M	QPSK	1@0	22.04	22.31	21.4
		1@25	22.02	22.14	21.45
		1@49	22.14	22.15	21.57
		25@0	21.21	20.35	20.45
		25@12	21.18	20.36	20.4
		25@25	21.13	20.32	20.47
		50@0	21.21	20.33	20.55
	16-QAM	1@0	20.85	20.22	19.74
		1@25	20.94	20.21	19.75
		1@49	20.88	20.22	19.95
		25@0	20.34	19.49	18.42
		25@12	20.36	19.33	18.44
		25@25	20.35	19.46	18.63
		50@0	20.41	19.35	18.55
15M	QPSK	1@0	22.25	22.29	21.35
		1@37	22.18	21.15	20.54
		1@74	22.22	21.31	20.75
		36@0	21.21	20.18	19.38
		36@20	21.18	20.19	19.45
		36@39	21.1	20.25	19.46
		75@0	21.26	20.23	19.47
	16-QAM	1@0	21.22	20.27	19.73
		1@37	21.17	20.28	19.79
		1@74	21.13	20.21	19.85
		36@0	20.37	19.4	18.45
		36@20	20.3	19.37	18.35
		36@39	20.2	19.4	18.58
		75@0	20.21	19.35	18.42

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
20M	QPSK	1@0	22.03	21.76	21.24
		1@49	22.05	21.86	21.44
		1@99	22.14	21.96	21.67
		50@0	21.23	20.92	20.55
		50@24	21.18	20.95	20.64
		50@50	21.38	21.21	20.93
		100@0	21.27	20.82	20.57
	16-QAM	1@0	21.38	20.99	19.54
		1@49	21.41	20.92	19.53
		1@99	20.54	20.99	19.80
		50@0	19.23	19.34	18.43
		50@24	19.36	19.30	18.42
		50@50	19.19	19.42	18.51
		100@0	19.34	19.36	18.52

LTE Band 12:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1@0	23.12	23.1	23.25
		1@3	22.86	23.24	23.08
		1@5	23.03	23.14	23.15
		3@0	23.12	23.36	23.12
		3@1	23.19	23.22	23.02
		3@3	23.24	23.35	23.06
		6@0	22.23	22.27	22.11
	16-QAM	1@0	22.01	22.09	22.58
		1@3	22.01	22.21	22.56
		1@5	22.09	22.2	22.38
		3@0	22.31	22.37	22.39
		3@1	22.31	22.5	22.35
		3@3	22.37	22.61	22.39
		6@0	21.32	21.25	21.04
3M	QPSK	1@0	23.08	23.27	22.94
		1@8	23.23	23.28	22.96
		1@14	23.35	23.4	23.1
		8@0	22.25	22.18	22.33
		8@4	22.45	22.17	22.08
		8@7	22.32	22.2	22.14
		15@0	22.21	22.28	22.26
	16-QAM	1@0	22.02	22.46	21.92
		1@8	22.12	22.67	21.91
		1@14	22.27	22.56	21.94
		8@0	21.28	21.36	21.16
		8@4	21.46	21.27	21.07
		8@7	21.38	21.34	21.08
		15@0	21.42	21.2	21.08
5M	QPSK	1@0	23.1	23.38	23.08
		1@12	23.28	23.31	23.19
		1@24	23.42	23.36	23.05
		12@0	22.23	22.31	22.13
		12@7	22.35	22.28	22.11
		12@13	22.38	22.24	22.21
		25@0	22.37	22.22	22.23
	16-QAM	1@0	22.13	22.3	22.95
		1@12	22.33	22.27	22.84
		1@24	22.33	22.35	22.84
		12@0	21.38	21.3	21.34
		12@7	21.53	21.26	21.29
		12@13	21.49	21.27	21.25
		25@0	21.25	21.29	21.24

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	1@0	23.41	23.24	23.26
		1@25	23.53	23.29	23.34
		1@49	23.43	22.94	23.24
		25@0	22.33	22.45	22.23
		25@12	22.29	22.22	22.07
		25@25	22.18	22.34	22.04
		50@0	22.38	22.28	22.07
	16-QAM	1@0	22.65	22.19	22.19
		1@25	22.75	22.04	22.03
		1@49	22.57	21.99	22.16
		25@0	21.37	21.57	21.28
		25@12	21.47	21.25	21.31
		25@25	21.22	21.34	21.24
		50@0	21.19	21.5	21.08

LTE Band 13:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1@0	23.48	/	23.62
		1@12	23.50	/	23.50
		1@24	23.50	/	23.53
		12@0	22.63	/	22.81
		12@7	22.63	/	22.68
		12@13	22.69	/	22.65
		25@0	22.66	/	22.64
	16-QAM	1@0	23.28	/	22.65
		1@12	23.20	/	22.65
		1@24	23.46	/	22.68
		12@0	21.83	/	21.82
		12@7	21.65	/	21.84
		12@13	21.84	/	21.76
		25@0	21.71	/	21.65
10M	QPSK	1@0	/	23.47	/
		1@25	/	23.47	/
		1@49	/	23.63	/
		25@0	/	22.53	/
		25@12	/	22.67	/
		25@25	/	22.68	/
		50@0	/	22.67	/
	16-QAM	1@0	/	22.37	/
		1@25	/	22.46	/
		1@49	/	22.48	/
		25@0	/	21.65	/
		25@12	/	21.72	/
		25@25	/	21.75	/
		50@0	/	21.68	/

LTE Band 17:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1@0	23.25	23.12	23.18
		1@12	23.15	23.05	23.04
		1@24	22.99	23.13	23.02
		12@0	22.31	22.11	22.13
		12@7	22.2	22.17	22.07
		12@13	22.2	22.14	21.89
		25@0	22.25	22.12	22.1
	16-QAM	1@0	22.96	22.09	22.21
		1@12	22.95	22.21	22.17
		1@24	22.7	22.02	22.02
		12@0	21.37	21.11	21.16
		12@7	21.3	21.27	21.17
		12@13	21.36	21.32	21.06
		25@0	21.3	21.21	21.1
10M	QPSK	1@0	23.19	23.25	23.45
		1@25	22.68	23.16	23.33
		1@49	22.99	23.15	23.21
		25@0	22.24	22.23	22.18
		25@12	22.17	22.14	22.18
		25@25	22.11	22.01	21.96
		50@0	22.18	22.08	22
	16-QAM	1@0	22.07	22.28	22.66
		1@25	21.66	22.11	22.57
		1@49	21.92	22.03	22.5
		25@0	21.3	21.24	21.07
		25@12	21.2	21.29	21.15
		25@25	21.42	21.2	21.09
		50@0	21.28	21.16	21.14

LTE Band 25:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1@0	23.77	23.38	23.67
		1@3	23.48	23.53	23.65
		1@5	23.69	23.49	23.09
		3@0	23.76	23.53	23.88
		3@1	23.63	23.68	23.69
		3@3	23.60	23.88	23.35
		6@0	22.62	22.87	22.54
	16-QAM	1@0	23.17	22.76	22.38
		1@3	23.06	22.52	22.33
		1@5	22.94	22.60	22.68
		3@0	22.97	22.92	22.91
		3@1	22.91	22.87	22.88
		3@3	23.06	22.95	22.90
		6@0	21.62	21.71	21.90
3M	QPSK	1@0	23.46	23.86	23.93
		1@8	23.46	23.97	23.67
		1@14	23.43	23.71	23.61
		8@0	22.72	22.65	22.90
		8@4	22.54	22.65	22.87
		8@7	22.57	22.90	22.75
		15@0	22.67	22.77	22.70
	16-QAM	1@0	22.49	22.95	23.04
		1@8	22.41	22.62	23.16
		1@14	22.51	22.63	22.99
		8@0	21.64	21.97	22.05
		8@4	21.57	22.05	21.88
		8@7	21.84	21.81	21.96
		15@0	21.68	21.84	21.70
5M	QPSK	1@0	23.46	23.96	23.63
		1@12	23.41	23.82	23.51
		1@24	23.60	23.94	23.30
		12@0	22.89	22.65	22.68
		12@7	22.78	22.93	22.72
		12@13	22.79	22.63	23.01
		25@0	22.94	22.75	22.57
	16-QAM	1@0	22.72	22.90	23.34
		1@12	22.54	22.73	23.29
		1@24	22.69	22.81	23.10
		12@0	21.99	21.94	22.09
		12@7	21.89	21.76	21.94
		12@13	21.74	21.57	22.04
		25@0	21.54	21.85	21.91

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	1@0	23.37	23.65	23.76
		1@25	23.37	23.87	23.82
		1@49	23.68	23.72	23.8
		25@0	22.59	22.71	22.7
		25@12	22.84	22.74	22.74
		25@25	22.82	22.68	22.58
		50@0	22.69	22.74	22.76
	16-QAM	1@0	22.68	22.62	23.26
		1@25	22.56	22.8	22.92
		1@49	22.53	22.61	23.21
		25@0	21.83	21.74	21.82
		25@12	21.74	21.79	21.82
		25@25	21.98	21.66	21.78
		50@0	21.61	21.65	21.68
15M	QPSK	1@0	23.8	23.74	23.89
		1@37	23.62	23.63	23.96
		1@74	23.48	23.75	23.7
		36@0	22.78	22.74	22.69
		36@20	22.86	22.74	22.79
		36@39	22.76	22.95	22.59
		75@0	22.62	22.93	22.86
	16-QAM	1@0	22.75	22.64	23.18
		1@37	22.6	22.92	23.06
		1@74	22.66	22.57	23.08
		36@0	21.65	21.68	21.65
		36@20	21.65	21.73	21.78
		36@39	21.74	21.87	21.79
		75@0	21.76	21.79	21.53
20M	QPSK	1@0	23.58	23.63	23.45
		1@49	23.79	23.84	23.69
		1@99	23.51	23.57	23.56
		50@0	22.76	22.9	22.78
		50@24	23.17	23.62	23.23
		50@50	22.86	22.98	22.88
		100@0	22.47	22.92	22.79
	16-QAM	1@0	22.83	23.47	22.8
		1@49	22.9	23.45	22.98
		1@99	23.12	23.44	22.89
		50@0	21.55	21.86	21.78
		50@24	21.7	21.89	21.52
		50@50	21.61	21.56	21.6
		100@0	21.77	21.83	21.7

LTE Band 26:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1@0	23.41	23.31	22.84
		1@3	23.4	23.21	22.92
		1@5	23.36	23.24	22.87
		3@0	23.37	23.38	22.95
		3@1	23.29	23.34	23.03
		3@3	23.35	23.32	22.88
		6@0	22.34	22.36	21.89
	16-QAM	1@0	22.14	22.25	21.92
		1@3	22.17	22.32	21.78
		1@5	22.22	22.35	21.96
		3@0	22.46	22.58	22.15
		3@1	22.5	22.71	22.26
		3@3	22.51	22.76	22.07
		6@0	21.47	21.46	21.18
3M	QPSK	1@0	23.25	23.53	22.86
		1@8	23.39	23.64	22.89
		1@14	23.32	23.59	22.9
		8@0	22.36	22.55	22.04
		8@4	22.31	22.43	21.99
		8@7	22.31	22.51	21.96
		15@0	22.31	22.52	22.02
	16-QAM	1@0	22.23	22.85	21.85
		1@8	22.16	22.89	21.92
		1@14	22.06	22.84	21.85
		8@0	21.41	21.68	21.05
		8@4	21.46	21.52	21.05
		8@7	21.48	21.58	21.16
		15@0	21.4	21.54	21.1
5M	QPSK	1@0	23.22	23.55	23.33
		1@12	23.15	23.64	22.86
		1@24	23.23	23.5	22.9
		12@0	22.36	22.46	22.2
		12@7	22.44	22.48	22.21
		12@13	22.29	22.53	22.25
		25@0	22.37	22.42	22.14
	16-QAM	1@0	22.28	22.52	23.12
		1@12	22.41	22.51	22.81
		1@24	22.48	22.38	22.68
		12@0	21.45	21.6	21.43
		12@7	21.57	21.54	21.24
		12@13	21.52	21.62	21.3
		25@0	21.45	21.45	21.35

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	1@0	23.4	23.22	23.57
		1@25	23.48	23.27	23.35
		1@49	23.59	23.38	23
		25@0	22.44	22.54	22.66
		25@12	22.45	22.51	22.34
		25@25	22.44	22.53	22.21
		50@0	22.51	22.56	22.44
	16-QAM	1@0	22.77	22.13	22.51
		1@25	22.8	22.17	22.06
		1@49	22.79	22.36	21.95
		25@0	21.4	21.58	21.61
		25@12	21.49	21.67	21.4
		25@25	21.46	21.64	21.32
		50@0	21.37	21.56	21.3
15M	QPSK	1@0	23.52	23.56	23.61
		1@37	23.51	23.55	23.57
		1@74	23.49	23.55	23.18
		36@0	22.47	22.52	22.49
		36@20	22.41	22.52	22.42
		36@39	22.52	22.75	22.58
		75@0	22.45	22.41	22.51
	16-QAM	1@0	22.29	22.53	22.84
		1@37	22.54	22.46	22.9
		1@74	22.42	22.35	22.45
		36@0	21.47	21.53	21.53
		36@20	21.43	21.61	21.59
		36@39	21.35	21.58	21.43
		75@0	21.27	21.54	21.41

LTE Band 38:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1@0	22.1	22.39	22.79
		1@12	22.16	22.5	22.71
		1@24	22.41	22.51	22.81
		12@0	21.17	21.56	21.76
		12@7	21.26	21.7	21.91
		12@13	21.23	21.43	21.85
		25@0	21.28	21.71	21.75
	16-QAM	1@0	21.12	21.54	21.61
		1@12	21.02	21.65	21.88
		1@24	21.13	21.61	21.81
		12@0	19.96	20.53	20.72
		12@7	20.19	20.45	20.88
		12@13	20.08	20.55	20.85
		25@0	20.04	20.59	20.51
10M	QPSK	1@0	22.03	22.26	22.73
		1@25	22.21	22.64	22.55
		1@49	22.16	22.47	22.64
		25@0	21.15	21.45	21.74
		25@12	21.09	21.52	21.69
		25@25	21.35	21.6	21.66
		50@0	21.31	21.35	21.78
	16-QAM	1@0	21.21	21.58	21.53
		1@25	21.12	21.65	21.51
		1@49	21.17	21.45	21.39
		25@0	20.26	20.41	20.77
		25@12	20.19	20.32	20.71
		25@25	20.33	20.67	20.72
		50@0	20.39	20.69	20.76
15M	QPSK	1@0	22.01	22.53	22.66
		1@37	22.24	22.51	22.67
		1@74	22.42	22.75	22.84
		36@0	21.2	21.54	21.62
		36@20	21.33	21.36	21.57
		36@39	21.39	21.6	21.69
		75@0	21.45	21.63	21.67
	16-QAM	1@0	21.39	21.28	21.74
		1@37	21.65	21.5	21.89
		1@74	21.42	21.38	22.05
		36@0	20.44	20.44	20.42
		36@20	20.43	20.67	20.55
		36@39	20.56	20.52	20.76
		75@0	20.09	20.57	20.74

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
20M	QPSK	1@0	22.24	22.28	22.71
		1@49	22.53	22.51	22.87
		1@99	22.75	22.8	22.8
		50@0	21.35	21.64	21.52
		50@24	21.4	21.65	21.64
		50@50	21.66	21.56	21.76
		100@0	21.2	21.32	21.58
	16-QAM	1@0	21.45	21.5	21.55
		1@49	21.39	21.79	21.66
		1@99	21.6	21.79	21.81
		50@0	20.28	20.36	20.67
		50@24	20.39	20.45	20.69
		50@50	20.35	20.62	20.78
		100@0	20.4	20.49	20.71

LTE Band 41:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	2550MHz (dBm)	Middle Channel (dBm)	2636MHz (dBm)	High Channel (dBm)
5M	QPSK	1@0	21.93	22.54	22.76	23.08	23.22
		1@12	22.07	22.7	22.66	23.01	23.29
		1@24	22.01	22.63	22.70	22.97	23.1
		12@0	21.13	21.54	21.57	21.93	22.06
		12@7	21.03	21.59	21.63	21.92	22.09
		12@13	21.14	21.7	21.72	22.01	22.14
		25@0	21.19	21.68	21.76	22.02	22.22
	16-QAM	1@0	21.17	21.65	21.84	22.23	22.2
		1@12	21.16	21.74	21.97	22.33	22.17
		1@24	21.21	21.73	21.83	22.37	22.07
		12@0	20.03	20.73	20.68	21.13	21.19
		12@7	20.14	20.75	20.65	21.19	21.14
		12@13	20.04	20.62	20.72	21.03	21.04
		25@0	20.2	20.53	20.64	20.94	21.05
10M	QPSK	1@0	22.11	22.51	22.63	22.90	23.07
		1@25	22.09	22.55	22.61	22.92	23
		1@49	22.12	22.77	22.57	23.02	23.05
		25@0	21.21	21.49	21.69	21.92	22.06
		25@12	21.13	21.54	21.76	21.99	22.15
		25@25	21.04	21.68	21.71	21.89	21.99
		50@0	21.19	21.58	21.58	22.02	22.06
	16-QAM	1@0	21.15	21.44	21.70	22.22	22.1
		1@25	21	21.44	21.67	22.17	22.03
		1@49	21.13	21.46	21.97	22.31	22.05
		25@0	20.23	20.44	20.54	20.95	21.09
		25@12	20.19	20.64	20.66	21.10	21.08
		25@25	20.05	20.58	20.61	21.09	21.12
		50@0	20.22	20.61	20.60	21.02	21.11
15M	QPSK	1@0	22.1	22.62	22.48	22.89	23.08
		1@37	22.02	22.56	22.56	23.02	23.02
		1@74	22.12	22.71	22.61	22.84	22.97
		36@0	21.13	21.49	21.53	21.97	22.07
		36@20	21.07	21.7	21.67	22.04	22
		36@39	21.12	21.72	21.65	21.93	22.04
		75@0	21.16	21.55	21.67	22.06	21.97
	16-QAM	1@0	21.37	21.31	21.67	22.31	22.19
		1@37	21.17	21.42	21.92	22.20	22.14
		1@74	21.3	21.46	21.83	22.27	22.07
		36@0	20.16	20.72	20.58	21.02	21.06
		36@20	20.18	20.76	20.75	20.89	21.04
		36@39	20.08	20.67	20.82	20.86	20.96
		75@0	19.99	20.69	20.64	21.05	21.01

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	2550MHz (dBm)	Middle Channel (dBm)	2636MHz (dBm)	High Channel (dBm)
20M	QPSK	1@0	22.30	22.41	22.74	23.02	23.28
		1@49	22.44	22.59	22.75	23.13	23.11
		1@99	22.86	22.96	22.85	23.16	23.32
		50@0	21.02	21.64	21.88	22.12	22.14
		50@24	21.15	21.77	21.72	22.05	22.22
		50@50	21.15	21.77	21.77	22.06	22.09
		100@0	21.04	21.58	21.69	22.00	22.02
	16-QAM	1@0	21.20	21.70	21.93	22.06	22.06
		1@49	21.13	21.64	22.04	22.08	22.02
		1@99	21.10	21.77	22.20	21.97	21.75
		50@0	20.06	20.68	20.62	21.16	21.21
		50@24	20.12	20.70	20.75	21.07	21.20
		50@50	20.23	20.72	20.75	20.96	21.22
		100@0	20.09	20.62	20.68	21.09	21.19

LTE Band 66:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1@0	23.32	23.50	23.55
		1@3	23.50	23.50	23.55
		1@5	23.41	23.41	23.49
		3@0	23.75	23.38	23.63
		3@1	23.45	23.53	23.39
		3@3	23.58	23.62	23.59
		6@0	22.58	22.37	22.36
	16-QAM	1@0	22.24	22.36	22.85
		1@3	22.31	22.53	22.66
		1@5	22.49	22.52	22.93
		3@0	22.70	22.87	22.70
		3@1	22.67	22.67	22.76
		3@3	22.97	22.65	22.96
		6@0	21.71	21.64	21.49
3M	QPSK	1@0	23.44	23.63	23.59
		1@8	23.62	23.48	23.67
		1@14	23.44	23.42	23.54
		8@0	22.50	22.60	22.44
		8@4	22.71	22.52	22.50
		8@7	22.41	22.70	22.63
		15@0	22.81	22.46	22.58
	16-QAM	1@0	22.46	22.26	22.72
		1@8	22.20	22.45	22.93
		1@14	22.38	22.37	23.03
		8@0	21.68	21.71	21.61
		8@4	21.54	21.67	21.65
		8@7	21.69	21.49	21.62
		15@0	21.71	21.55	21.58
5M	QPSK	1@0	23.39	23.70	23.17
		1@12	23.38	23.44	23.46
		1@24	23.47	23.67	23.29
		12@0	22.74	22.59	22.59
		12@7	22.67	22.52	22.68
		12@13	22.56	22.51	22.42
		25@0	22.82	22.68	22.53
	16-QAM	1@0	22.68	22.72	23.01
		1@12	22.57	22.72	23.10
		1@24	22.68	22.69	23.17
		12@0	21.58	21.59	21.71
		12@7	21.82	21.75	21.79
		12@13	21.74	21.65	21.51
		25@0	21.67	21.66	21.74

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	1@0	23.54	23.66	23.63
		1@25	23.27	23.45	23.75
		1@49	23.47	23.58	23.98
		25@0	22.69	22.47	22.49
		25@12	22.65	22.57	22.65
		25@25	22.77	22.45	22.59
		50@0	22.55	22.53	22.50
	16-QAM	1@0	22.26	22.44	22.95
		1@25	22.39	22.58	22.96
		1@49	22.31	22.63	22.84
		25@0	21.70	21.83	21.37
		25@12	21.76	21.51	21.54
		25@25	21.76	21.83	21.77
		50@0	21.73	21.53	21.58
15M	QPSK	1@0	23.48	23.64	23.95
		1@37	23.69	23.66	23.62
		1@74	23.52	23.69	23.86
		36@0	22.46	22.54	22.41
		36@20	22.54	22.43	22.37
		36@39	22.61	22.55	22.49
		75@0	22.70	22.37	22.40
	16-QAM	1@0	22.63	22.59	22.95
		1@37	22.30	22.57	22.96
		1@74	22.75	22.36	22.77
		36@0	21.70	21.48	21.51
		36@20	21.68	21.59	21.61
		36@39	21.56	21.66	21.49
		75@0	21.59	21.74	21.62
20M	QPSK	1@0	23.25	23.42	23.61
		1@49	23.44	23.47	23.39
		1@99	23.47	23.47	23.62
		50@0	22.75	22.69	22.78
		50@24	22.86	22.77	22.83
		50@50	22.79	22.51	22.76
		100@0	22.64	22.48	22.67
	16-QAM	1@0	22.69	23.47	22.56
		1@49	22.75	23.08	22.71
		1@99	22.99	23.5	22.71
		50@0	21.66	21.43	21.56
		50@24	21.63	21.69	21.56
		50@50	21.73	21.41	21.62
		100@0	21.64	21.51	21.57

LTE Band 71:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1@0	22.95	23.45	22.14
		1@12	23.12	23.51	23.11
		1@24	23.14	23.47	22.98
		12@0	21.90	22.37	22.17
		12@7	21.86	22.49	22.00
		12@13	21.99	22.53	21.91
		25@0	22.03	22.48	22.07
	16-QAM	1@0	22.00	22.38	22.14
		1@12	22.04	22.49	22.02
		1@24	22.15	22.38	22.02
		12@0	20.89	21.51	21.21
		12@7	20.84	21.57	21.19
		12@13	20.92	21.50	21.05
		25@0	20.78	21.54	21.14
10M	QPSK	1@0	22.70	23.31	22.43
		1@25	22.73	23.39	23.05
		1@49	23.01	23.21	22.84
		25@0	21.93	22.33	22.22
		25@12	21.97	22.44	22.24
		25@25	22.21	22.43	22.00
		50@0	22.02	22.45	22.13
	16-QAM	1@0	21.76	22.09	22.28
		1@25	21.82	22.36	21.84
		1@49	22.02	22.25	21.74
		25@0	20.89	21.54	21.35
		25@12	21.06	21.53	21.29
		25@25	21.13	21.65	21.12
		50@0	20.84	21.45	21.22
15M	QPSK	1@0	23.14	23.27	23.53
		1@37	23.33	23.61	23.53
		1@74	23.53	23.52	23.11
		36@0	21.92	22.48	22.31
		36@20	22.11	22.41	22.34
		36@39	22.32	22.37	22.20
		75@0	22.24	22.47	22.30
	16-QAM	1@0	22.33	22.26	22.36
		1@37	22.52	22.50	22.45
		1@74	22.74	22.34	22.13
		36@0	20.78	21.36	21.22
		36@20	20.96	21.42	21.20
		36@39	21.26	21.45	21.09
		75@0	21.14	21.45	21.21

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
20M	QPSK	1@0	22.86	23.21	22.99
		1@49	23.12	23.39	23.22
		1@99	23.44	23.47	23.33
		50@0	22.10	22.29	22.38
		50@24	22.23	22.48	22.35
		50@50	22.46	22.64	22.43
		100@0	22.31	22.42	22.36
	16-QAM	1@0	22.40	22.62	22.77
		1@49	22.63	22.85	22.70
		1@99	22.98	22.81	22.47
		50@0	20.86	21.28	21.29
		50@24	21.10	21.43	21.35
		50@50	21.47	21.52	21.12
		100@0	21.14	21.37	21.36

WLAN 2.4G:

Mode	Channel frequency (MHz)	Data Rate	Duty cycle (%)	RF Output Power(dBm)		
				Chain 0	Chain 1	Total
802.11b	2412	1Mbps	100	13.23	9.14	/
	2437			11.83	9.35	/
	2462			13.66	9.61	/
802.11g	2412	6Mbps	100	12.93	8.17	/
	2437			11.69	8.92	/
	2462			12.44	8.64	/
802.11n ht20	2412	MCS0	100	13.32	8.52	14.56
	2437			11.79	8.91	13.59
	2462			12.99	9.03	14.46
802.11n ht40	2422	MCS0	100	13.22	9.29	14.7
	2437			12.01	8.53	13.62
	2452			12.14	7.97	13.55

Note: The duty cycle plots, please refer to the radio report: 2602P41234E-RF-00C, which was issued by Bay Area Compliance Laboratories Corp. (Dongguan).

WLAN 5.2G:

Mode	Channel frequency (MHz)	Data Rate	Duty cycle (%)	RF Output Power(dBm)		
				Chain 0	Chain 1	Total
802.11a	5180	6Mbps	100	8.13	6.15	/
	5200			7.76	7.03	/
	5240			7.98	7.74	/
802.11ac20	5180	MCS0	100	8.18	7.48	10.85
	5200			7.93	7.53	10.74
	5240			8.27	7.98	11.14
802.11ac40	5190	MCS0	100	8.22	7.21	10.75
	5230			7.79	7.83	10.82
802.11ac80	5210	MCS0	100	8.01	7.29	10.68
802.11ax20_RU_Full	5180	MCS0	100	7.88	5.71	9.94
	5200			7.89	6.25	10.16
	5240			8.23	7.01	10.67
802.11ax40_RU_Full	5190	MCS0	100	7.99	6.07	10.15
	5230			8.06	6.95	10.55
802.11ax80_RU_Full	5210	MCS0	100	8.21	7.85	11.04

Note:

1. The system support 802.11a/n20/n40/ac20/ac40/ac80/ax20/ax40/ax80, the 802.11n20/n40 were reduced since the identical parameters with 802.11 ac20/ac40.
2. The duty cycle plots, please refer to the radio report: 2602P41234E-RF-00G, which was issued by Bay Area Compliance Laboratories Corp. (Dongguan).

WLAN 5.3G:

Mode	Channel frequency (MHz)	Data Rate	Duty cycle (%)	RF Output Power(dBm)		
				Chain 0	Chain 1	Total
802.11a	5260	6Mbps	100	8.55	7.24	/
	5280			8.65	8.29	/
	5320			9.19	8.33	/
802.11ac20	5260	MCS0	100	8.75	8.15	11.47
	5280			8.65	7.88	11.29
	5320			9.43	8.36	11.94
802.11ac40	5270	MCS0	100	8.63	8.27	11.46
	5310			9.34	8.35	11.88
802.11ac80	5290	MCS0	100	8.26	8.57	11.43
802.11ax20_RU_Full	5260	MCS0	100	8.99	7.91	11.49
	5280			8.94	8.04	11.52
	5320			9.09	8.08	11.62
802.11ax40_RU_Full	5270	MCS0	100	8.96	7.69	11.38
	5310			9.34	8.11	11.78
802.11ax80_RU_Full	5290	MCS0	100	9.37	8.52	11.98

Note:

1. The system support 802.11a/n20/n40/ac20/ac40/ac80/ax20/ax40/ax80, the 802.11n20/n40 were reduced since the identical parameters with 802.11 ac20/ac40.

2. The duty cycle plots, please refer to the radio report: 2602P41234E-RF-00G, which was issued by Bay Area Compliance Laboratories Corp. (Dongguan).

WLAN 5.6G:

Mode	Channel frequency (MHz)	Data Rate	Duty cycle (%)	RF Output Power(dBm)		
				Chain 0	Chain 1	Total
802.11a	5500	6Mbps	100	10.06	10.47	/
	5600			11.11	11.46	/
	5700			9.85	10.23	/
	5720			9.58	9.97	/
802.11ac20	5500	MCS0	100	10.24	9.96	13.11
	5600			10.87	10.94	13.92
	5700			8.91	9.88	12.43
	5720			9.27	9.65	12.47
802.11ac40	5510	MCS0	100	10.88	10.58	13.74
	5590			11.17	11.36	14.28
	5670			10.39	9.86	13.14
	5710			9.87	10.08	12.99
802.11ac80	5530	MCS0	100	9.39	10.34	12.9
	5610			9.24	11.12	13.29
	5690			7.82	10.32	12.26
802.11ax20_RU_Full	5500	MCS0	100	10.16	10.04	13.11
	5600			10.76	11.07	13.93
	5700			8.88	10.01	12.49
	5720			9.08	9.63	12.37
802.11ax40_RU_Full	5510	MCS0	100	10.51	10.52	13.53
	5590			11.14	11.32	14.24
	5670			10.15	10.02	13.1
	5710			9.68	10.47	13.1
802.11ax80_RU_Full	5530	MCS0	100	9.17	10.72	13.02
	5610			8.52	11.38	13.19
	5690			7.74	10.26	12.19

Note:

1. The system support 802.11a/n20/n40/ac20/ac40/ac80/ax20/ax40/ax80, the 802.11n20/n40 were reduced since the identical parameters with 802.11 ac20/ac40.
2. The duty cycle plots, please refer to the radio report: 2602P41234E-RF-00G, which was issued by Bay Area Compliance Laboratories Corp. (Dongguan).

WLAN 5.8G:

Mode	Channel frequency (MHz)	Data Rate	Duty cycle (%)	RF Output Power(dBm)		
				Chain 0	Chain 1	Total
802.11a	5745	6Mbps	100	9.39	13.47	/
	5785			9.71	13.81	/
	5825			9.77	13.76	/
802.11ac20	5745	MCS0	100	8.96	13.32	14.68
	5785			9.05	13.88	15.11
	5825			8.91	13.68	14.93
802.11ac40	5755	MCS0	100	7.57	13.38	14.39
	5795			7.47	12.69	13.83
802.11ac80	5775	MCS0	100	7.24	14.03	14.86
802.11ax20_RU_Full	5745	MCS0	100	7.18	13.37	14.31
	5785			7.27	13.97	14.81
	5825			7.93	13.73	14.74
802.11ax40_RU_Full	5755	MCS0	100	9.26	13.67	15.01
	5795			8.83	13.76	14.97
802.11ax80_RU_Full	5775	MCS0	100	7.72	13.89	14.83

Note:

1. The system support 802.11a/n20/n40/ac20/ac40/ac80/ax20/ax40/ax80, the 802.11n20/n40 were reduced since the identical parameters with 802.11 ac20/ac40.

2. The duty cycle plots, please refer to the radio report: 2602P41234E-RF-00G, which was issued by Bay Area Compliance Laboratories Corp. (Dongguan).

Bluetooth:

Mode	Channel frequency (MHz)	RF Output Power (dBm)
BDR(GFSK)	2402	0.81
	2441	1.44
	2480	1.21
EDR($\pi/4$ -DQPSK)	2402	0.03
	2441	0.91
	2480	0.72
EDR(8DPSK)	2402	0.23
	2441	1.17
	2480	0.95
BLE 1Mbps	2402	0.67
	2440	1.34
	2480	0.95
BLE 2Mbps	2404	0.37
	2440	0.92
	2478	0.84

8. STANDALONE SAR TEST EXCLUSION CONSIDERATIONS

8.1 Antennas Location:



8.2 Antenna Distance To Edge

Antenna Distance To Edge(mm)						
Antenna	Back	Front	Left	Right	Top	Bottom
Ant 1	< 5	< 5	9	< 5	160	< 5
Ant 2	< 5	< 5	< 5	69	145	8
Ant 4	< 5	< 5	< 5	68	31	110
Ant 5	< 5	< 5	36	26	< 5	164
Ant 7	< 5	< 5	53	< 5	< 5	157
Ant 8	< 5	< 5	56	< 5	18	136
Ant 9	< 5	< 5	< 5	64	9	151

Antenna	Description
Ant 1	GSM 850, WCDMA B5, LTE B5/12/13/17/26/71, NR B5/12/71
Ant 2	LTE B7/38/41, NR B7/38/41
Ant 4	GSM 1900, WCDMA B2/4, LTE B2/4/25/66, NR B2/66
Ant 5	LTE B42, NR B77/78
Ant 7	WIFI 2.4G (Chain 0), Bluetooth
Ant 8	WIFI 5G (Chain 0), WIFI 6G (Chain 0)
Ant 9	WIFI 2.4G (Chain1), WIFI 5G (Chain1) , WIFI 6G (Chain1)

Note: The above statistics only include antennas with transmitting

8.3 Standalone SAR test exclusion considerations

Mode	Frequency (MHz)	Pavg (dBm)	Pavg (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
WIFI 2.4G	2462	13.8	23.99	0	7.5	3	NO
WIFI 5.2G	5240	8.5	7.08	0	3.2	3	NO
WIFI 5.3G	5320	9.5	8.91	0	4.1	3	NO
WIFI 5.6G	5720	11.5	14.13	0	6.8	3	NO
WIFI 5.8G	5825	14.5	28.18	0	13.6	3	NO
Bluetooth	2480	1.5	1.41	0	0.4	3	YES

Note: The WLAN based average power for calculation. and bluetooth based peak output power for calculation.

NOTE:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

According to KDB447498 D01 General RF Exposure Guidance v06: 4.3. General SAR test exclusion guidance

c) For frequencies below 100 MHz, the following may be considered for SAR test exclusion (also illustrated in Appendix C):

- 1) For test separation distances > 50 mm and < 200 mm, the power threshold at the corresponding test separation distance at 100 MHz in step b) is multiplied by $[1 + \log(100/f(\text{MHz}))]$
- 2) For test separation distances ≤ 50 mm, the power threshold determined by the equation in c) 1) for 50 mm and 100 MHz is multiplied by $\frac{1}{2}$
- 3) SAR measurement procedures are not established below 100 MHz

Measurement Result:

For NFC, the power of EUT: E Field@3m is 55.35dBuV/m = -39.85dBm (0.0001mW)

Note: $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2$ for $d = 3$ m.

SAR test exclusion threshold for NFC(13.56MHz) separation distance < 50 mm

$$= [474 * (1 + \log(100/f(\text{MHz}))) / 2]$$

$$= 443\text{mW}$$

$$> 0.0001\text{mW}$$

Conclusion:

The NFC SAR evaluation can be exempted.

Note: E Field please refer to RF Report Number: 2602P41234E-RF-00F

8.4 Standalone SAR estimation:

Mode	Frequency (MHz)	Max target Power (dBm)	Max target Power (dBm)	Distance (mm)	Estimated 1-g (W/kg)
BT Head	2480	1.5	1.41	0	0.06
BT Body	2480	1.5	1.41	10	0.03

Note: The bluetooth based peak power for calculation.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})/x}]$$

W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

8.5 SAR test exclusion for the EUT edge considerations Result

Antenna	Back	Front	Left	Right	Top	Bottom
Ant 1	Required	Required	Required	Required	Exclusion	Required
Ant 2	Required	Required	Required	Exclusion	Exclusion	Required
Ant 4	Required	Required	Required	Exclusion	Exclusion	Exclusion
Ant 5	Required	Required	Exclusion	Exclusion	Required	Exclusion
Ant 7	Required	Required	Exclusion	Required	Required	Exclusion
Ant 8	Required	Required	Exclusion	Required	Required	Exclusion
Ant 9	Required	Required	Required	Exclusion	Required	Exclusion
BT	Exclusion*	Exclusion*	Exclusion*	Exclusion*	Exclusion*	Exclusion*

Note:

Required: The distance is less than 25mm, the SAR test is required.

Exclusion*: SAR test exclusion evaluation has been done above.

Exclusion: The distance is large than 25mm, SAR test is not required.

Extremity Exposure Considerations

Per KDB 648474 D04 v01r03, this device is considered a “Phablet” since the diagonal dimension is >160 mm and <200 mm, when hotspot mode applies, extremity SAR is required only for the surfaces and edges with hotspot mode scaled to the maximum output power (with tolerance is 1g SAR > 1.2 W/kg)

Extremity Exposure Condition		
Worst Mode	Hotspot SAR value	Extremity Condition Test
WCDMA Band 5	0.97 W/kg @1g	Exclusion

9. SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

9.1 SAR Test Data

Environmental Conditions

Environmental Temperature:	20.8-21.5°C	21.7-22.2°C	21.5-22.2°C	21.8-22.4°C	21.5-22.3°C
Relative Humidity:	43%	37%	36%	36%	32%
ATM Pressure:	100.9kPa	100.8kPa	100.7kPa	100.6kPa	100.6kPa
Test Date:	2026/03/23	2026/03/24	2026/03/25	2026/03/26	2026/03/27
Environmental Temperature:	21.5-22.1°C	21.2-21.9°C	21.6-22.0°C	21.9-22.4°C	21.3-21.8°C
Relative Humidity:	32%	38%	38%	33%	33%
ATM Pressure:	100.5kPa	100.3kPa	100.3kPa	100.3kPa	100.7kPa
Test Date:	2026/03/28	2026/03/29	2026/03/30	2026/03/31	2026/04/01
Environmental Temperature:	20.2-20.8°C	/	/	/	/
Relative Humidity:	35%	/	/	/	/
ATM Pressure:	100.7kPa	/	/	/	/
Test Date:	2026/04/02	/	/	/	/

Testing was performed by Mikasa Mo and Led Lu.

GSM 850:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	32.32	32.8	1.117	0.114	0.13	/
	848.8	GPRS	/	/	/	/	/	/
Head Left Tilt	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	32.32	32.8	1.117	0.069	0.08	/
	848.8	GPRS	/	/	/	/	/	/
Head Right Cheek	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	32.32	32.8	1.117	0.158	0.18	1#
	848.8	GPRS	/	/	/	/	/	/
Head Right Tilt	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	32.32	32.8	1.117	0.072	0.08	/
	848.8	GPRS	/	/	/	/	/	/
Body Front (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	32.32	32.8	1.117	0.139	0.16	/
	848.8	GPRS	/	/	/	/	/	/
Body Back (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	32.32	32.8	1.117	0.455	0.51	2#
	848.8	GPRS	/	/	/	/	/	/
Body Left (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	32.32	32.8	1.117	0.05	0.06	/
	848.8	GPRS	/	/	/	/	/	/
Body Right (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	32.32	32.8	1.117	0.159	0.18	/
	848.8	GPRS	/	/	/	/	/	/
Body Bottom (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	32.32	32.8	1.117	0.22	0.25	/
	848.8	GPRS	/	/	/	/	/	/

The data above was performed on 2026/03/23.

Note:

1. When the SAR value is less than half of the limit, testing for other channels are optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is > 0.5 dB, instead of the middle channel, the highest output power channel must be used.
5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 3DL+2UL is the worst case.
6. The max. time based average power of GSM/GPRS/EGPRS mode was selected to Body/Limb SAR testing.

PCS 1900:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	29.24	29.3	1.014	0.361	0.37	/
	1909.8	GPRS	/	/	/	/	/	/
Head Left Tilt	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	29.24	29.3	1.014	0.169	0.17	/
	1909.8	GPRS	/	/	/	/	/	/
Head Right Cheek	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	29.24	29.3	1.014	0.741	0.75	3#
	1909.8	GPRS	/	/	/	/	/	/
Head Right Tilt	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	29.24	29.3	1.014	0.284	0.29	/
	1909.8	GPRS	/	/	/	/	/	/
Body Front (10mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	29.24	29.3	1.014	0.183	0.19	/
	1909.8	GPRS	/	/	/	/	/	/
Body Back (10mm)	1850.2	GPRS	29.2	29.3	1.023	0.814	0.83	/
	1880	GPRS	29.24	29.3	1.014	0.815	0.83	/
	1909.8	GPRS	29.15	29.3	1.035	0.794	0.82	/
Body Left (10mm)	1850.2	GPRS	29.2	29.3	1.023	0.783	0.80	/
	1880	GPRS	29.24	29.3	1.014	0.884	0.90	4#
	1909.8	GPRS	29.15	29.3	1.035	0.856	0.89	/

The data above was performed on 2026/03/27.

Note:

1. When the SAR value is less than half of the limit, testing for other channels are optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is > 0.5 dB, instead of the middle channel, the highest output power channel must be used.
5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 3DL+2UL is the worst case.
6. The max. time based average power of GSM/GPRS/EGPRS mode was selected to Body/Limb SAR testing.

WCDMA Band 2:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.44	23.6	1.038	0.198	0.21	/
	1907.6	RMC	/	/	/	/	/	/
Head Left Tilt	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.44	23.6	1.038	0.103	0.11	/
	1907.6	RMC	/	/	/	/	/	/
Head Right Cheek	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.44	23.6	1.038	0.392	0.41	5#
	1907.6	RMC	/	/	/	/	/	/
Head Right Tilt	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.44	23.6	1.038	0.166	0.17	/
	1907.6	RMC	/	/	/	/	/	/
Body Front (10mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.44	23.6	1.038	0.121	0.13	/
	1907.6	RMC	/	/	/	/	/	/
Body Back (10mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.44	23.6	1.038	0.557	0.58	/
	1907.6	RMC	/	/	/	/	/	/
Body Left (10mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.44	23.6	1.038	0.598	0.62	6#
	1907.6	RMC	/	/	/	/	/	/

The data above was performed on 2026/03/28.

WCDMA Band 4:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	1712.4	RMC	/	/	/	/	/	/
	1732.6	RMC	23.83	24.1	1.064	0.205	0.22	/
	1752.6	RMC	/	/	/	/	/	/
Head Left Tilt	1712.4	RMC	/	/	/	/	/	/
	1732.6	RMC	23.83	24.1	1.064	0.145	0.15	/
	1752.6	RMC	/	/	/	/	/	/
Head Right Cheek	1712.4	RMC	/	/	/	/	/	/
	1732.6	RMC	23.83	24.1	1.064	0.447	0.48	7#
	1752.6	RMC	/	/	/	/	/	/
Head Right Tilt	1712.4	RMC	/	/	/	/	/	/
	1732.6	RMC	23.83	24.1	1.064	0.151	0.16	/
	1752.6	RMC	/	/	/	/	/	/
Body Front (10mm)	1712.4	RMC	/	/	/	/	/	/
	1732.6	RMC	23.83	24.1	1.064	0.096	0.10	/
	1752.6	RMC	/	/	/	/	/	/
Body Back (10mm)	1712.4	RMC	/	/	/	/	/	/
	1732.6	RMC	23.83	24.1	1.064	0.417	0.44	/
	1752.6	RMC	/	/	/	/	/	/
Body Left (10mm)	1712.4	RMC	/	/	/	/	/	/
	1732.6	RMC	23.83	24.1	1.064	0.455	0.48	8#
	1752.6	RMC	/	/	/	/	/	/

The data above was performed on 2026/03/26.

WCDMA Band 5:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	24.59	24.7	1.026	0.238	0.24	/
	846.6	RMC	/	/	/	/	/	/
Head Left Tilt	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	24.59	24.7	1.026	0.136	0.14	/
	846.6	RMC	/	/	/	/	/	/
Head Right Cheek	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	24.59	24.7	1.026	0.336	0.34	9#
	846.6	RMC	/	/	/	/	/	/
Head Right Tilt	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	24.59	24.7	1.026	0.151	0.15	/
	846.6	RMC	/	/	/	/	/	/
Body Front (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	24.59	24.7	1.026	0.269	0.28	/
	846.6	RMC	/	/	/	/	/	/
Body Back (10mm)	826.4	RMC	24.45	24.7	1.059	0.862	0.91	/
	836.6	RMC	24.59	24.7	1.026	0.946	0.97	10#
	846.6	RMC	24.35	24.7	1.084	0.791	0.86	/
Body Left (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	24.59	24.7	1.026	0.124	0.13	/
	846.6	RMC	/	/	/	/	/	/
Body Right (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	24.59	24.7	1.026	0.327	0.34	/
	846.6	RMC	/	/	/	/	/	/
Body Bottom (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	24.59	24.7	1.026	0.479	0.49	/
	846.6	RMC	/	/	/	/	/	/

The data above was performed on 2026/03/25.

Note:

1. When the SAR value is less than half of the limit, testing for other channels are optional.
2. The EUT transmit and receive through the same antenna while testing SAR.
3. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC(reference measurement Channel) Configured in All 1.
4. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/DC-HSDPA/HSPA+ when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested

LTE Band 7:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	21.96	22.4	1.107	0.059	0.07	/
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.21	22.4	1.315	0.062	0.08	11#
Head Left Tilt	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	21.96	22.4	1.107	0.021	0.02	/
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.21	22.4	1.315	0.023	0.03	/
Head Right Cheek	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	21.96	22.4	1.107	0.039	0.04	/
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.21	22.4	1.315	0.04	0.05	/
Head Right Tilt	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	21.96	22.4	1.107	0.035	0.04	/
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.21	22.4	1.315	0.038	0.05	/
Body Front (10mm)	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	21.96	22.4	1.107	0.061	0.07	/
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.21	22.4	1.315	0.059	0.08	/
Body Back (10mm)	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	21.96	22.4	1.107	0.246	0.27	/
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.21	22.4	1.315	0.243	0.32	12#
Body Left (10mm)	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	21.96	22.4	1.107	0.091	0.10	/
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.21	22.4	1.315	0.086	0.11	/
Body Bottom (10mm)	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	21.96	22.4	1.107	0.054	0.06	/
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.21	22.4	1.315	0.055	0.07	/

The data above was performed on 2026/03/29.

LTE Band 12&17:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.29	23.6	1.074	0.173	0.19	13#
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	22.45	23.6	1.303	0.141	0.18	/
Head Left Tilt	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.29	23.6	1.074	0.081	0.09	/
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	22.45	23.6	1.303	0.063	0.08	/
Head Right Cheek	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.29	23.6	1.074	0.094	0.10	/
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	22.45	23.6	1.303	0.073	0.10	/
Head Right Tilt	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.29	23.6	1.074	0.042	0.05	/
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	22.45	23.6	1.303	0.034	0.04	/
Body Front (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.29	23.6	1.074	0.151	0.16	/
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	22.45	23.6	1.303	0.122	0.16	/
Body Back (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.29	23.6	1.074	0.331	0.36	14#
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	22.45	23.6	1.303	0.27	0.35	/
Body Left (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.29	23.6	1.074	0.045	0.05	/
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	22.45	23.6	1.303	0.034	0.04	/
Body Right (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.29	23.6	1.074	0.137	0.15	/
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	22.45	23.6	1.303	0.11	0.14	/
Body Bottom (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.29	23.6	1.074	0.144	0.15	/
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	22.45	23.6	1.303	0.112	0.15	/

The data above was performed on 2026/03/23.

Note:

The E-UTRA Operating Band 17 is a subset of band 12, and they are same in modulation type and they rated output power is no greater than that of Band 12, therefore, they were considered as one frequency band during SAR measurement, LTE Band 12 (the wide frequency range) was selected to test.

LTE Band 13:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	782	10	1RB	23.63	23.7	1.016	0.27	0.27	15#
	782	10	50%RB	22.68	23.7	1.265	0.205	0.26	/
Head Left Tilt	782	10	1RB	23.63	23.7	1.016	0.117	0.12	/
	782	10	50%RB	22.68	23.7	1.265	0.088	0.11	/
Head Right Cheek	782	10	1RB	23.63	23.7	1.016	0.137	0.14	/
	782	10	50%RB	22.68	23.7	1.265	0.104	0.13	/
Head Right Tilt	782	10	1RB	23.63	23.7	1.016	0.092	0.09	/
	782	10	50%RB	22.68	23.7	1.265	0.058	0.07	/
Body Front (10mm)	782	10	1RB	23.63	23.7	1.016	0.151	0.15	/
	782	10	50%RB	22.68	23.7	1.265	0.121	0.15	/
Body Back (10mm)	782	10	1RB	23.63	23.7	1.016	0.584	0.59	16#
	782	10	50%RB	22.68	23.7	1.265	0.47	0.59	/
Body Left (10mm)	782	10	1RB	23.63	23.7	1.016	0.038	0.04	/
	782	10	50%RB	22.68	23.7	1.265	0.029	0.04	/
Body Right (10mm)	782	10	1RB	23.63	23.7	1.016	0.132	0.13	/
	782	10	50%RB	22.68	23.7	1.265	0.099	0.13	/
Body Bottom (10mm)	782	10	1RB	23.63	23.7	1.016	0.281	0.29	/
	782	10	50%RB	22.68	23.7	1.265	0.225	0.28	/

The data above was performed on 2026/03/24.

LTE Band 25&2:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	1860	20	1RB	/	/	/	/	/	/
	1882.5	20	1RB	23.84	24.1	1.062	0.334	0.35	/
	1905	20	1RB	/	/	/	/	/	/
	1882.5	20	50%RB	23.62	24.1	1.117	0.262	0.29	/
Head Left Tilt	1860	20	1RB	/	/	/	/	/	/
	1882.5	20	1RB	23.84	24.1	1.062	0.119	0.13	/
	1905	20	1RB	/	/	/	/	/	/
	1882.5	20	50%RB	23.62	24.1	1.117	0.094	0.10	/
Head Right Cheek	1860	20	1RB	/	/	/	/	/	/
	1882.5	20	1RB	23.84	24.1	1.062	0.537	0.57	17#
	1905	20	1RB	/	/	/	/	/	/
	1882.5	20	50%RB	23.62	24.1	1.117	0.511	0.57	/
Head Right Tilt	1860	20	1RB	/	/	/	/	/	/
	1882.5	20	1RB	23.84	24.1	1.062	0.193	0.20	/
	1905	20	1RB	/	/	/	/	/	/
	1882.5	20	50%RB	23.62	24.1	1.117	0.151	0.17	/
Body Front (10mm)	1860	20	1RB	/	/	/	/	/	/
	1882.5	20	1RB	23.84	24.1	1.062	0.15	0.16	/
	1905	20	1RB	/	/	/	/	/	/
	1882.5	20	50%RB	23.62	24.1	1.117	0.117	0.13	/
Body Back (10mm)	1860	20	1RB	/	/	/	/	/	/
	1882.5	20	1RB	23.84	24.1	1.062	0.454	0.48	18#
	1905	20	1RB	/	/	/	/	/	/
	1882.5	20	50%RB	23.62	24.1	1.117	0.396	0.44	/
Body Left (10mm)	1860	20	1RB	/	/	/	/	/	/
	1882.5	20	1RB	23.84	24.1	1.062	0.141	0.15	/
	1905	20	1RB	/	/	/	/	/	/
	1882.5	20	50%RB	23.62	24.1	1.117	0.14	0.16	/

The data above was performed on 2026/03/27.

Note:

The E-UTRA Operating Band 2 is a subset of band 25, and they are same in modulation type and they rated output power is no greater than that of Band 25, therefore, they were considered as one frequency band during SAR measurement, LTE Band 25 (the wide frequency range) was selected to test.

LTE Band 26&5:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	821.5	15	1RB	/	/	/	/	/	/
	836.5	15	1RB	23.56	23.7	1.033	0.251	0.26	19#
	841.5	15	1RB	/	/	/	/	/	/
	836.5	15	50%RB	22.75	23.7	1.245	0.19	0.24	/
Head Left Tilt	821.5	15	1RB	/	/	/	/	/	/
	836.5	15	1RB	23.56	23.7	1.033	0.107	0.11	/
	841.5	15	1RB	/	/	/	/	/	/
	836.5	15	50%RB	22.75	23.7	1.245	0.086	0.11	/
Head Right Cheek	821.5	15	1RB	/	/	/	/	/	/
	836.5	15	1RB	23.56	23.7	1.033	0.136	0.14	/
	841.5	15	1RB	/	/	/	/	/	/
	836.5	15	50%RB	22.75	23.7	1.245	0.113	0.14	/
Head Right Tilt	821.5	15	1RB	/	/	/	/	/	/
	836.5	15	1RB	23.56	23.7	1.033	0.089	0.09	/
	841.5	15	1RB	/	/	/	/	/	/
	836.5	15	50%RB	22.75	23.7	1.245	0.078	0.10	/
Body Front (10mm)	821.5	15	1RB	/	/	/	/	/	/
	836.5	15	1RB	23.56	23.7	1.033	0.181	0.19	/
	841.5	15	1RB	/	/	/	/	/	/
	836.5	15	50%RB	22.75	23.7	1.245	0.147	0.19	/
Body Back (10mm)	821.5	15	1RB	/	/	/	/	/	/
	836.5	15	1RB	23.56	23.7	1.033	0.448	0.46	20#
	841.5	15	1RB	/	/	/	/	/	/
	836.5	15	50%RB	22.75	23.7	1.245	0.371	0.46	/
Body Left (10mm)	821.5	15	1RB	/	/	/	/	/	/
	836.5	15	1RB	23.56	23.7	1.033	0.05	0.05	/
	841.5	15	1RB	/	/	/	/	/	/
	836.5	15	50%RB	22.75	23.7	1.245	0.043	0.05	/
Body Right (10mm)	821.5	15	1RB	/	/	/	/	/	/
	836.5	15	1RB	23.56	23.7	1.033	0.128	0.13	/
	841.5	15	1RB	/	/	/	/	/	/
	836.5	15	50%RB	22.75	23.7	1.245	0.103	0.13	/
Body Bottom (10mm)	821.5	15	1RB	/	/	/	/	/	/
	836.5	15	1RB	23.56	23.7	1.033	0.32	0.33	/
	841.5	15	1RB	/	/	/	/	/	/
	836.5	15	50%RB	22.75	23.7	1.245	0.26	0.32	/

The data above was performed on 2026/03/25.

Note:

The E-UTRA Operating Band 5 is a subset of band 26, and they are same in modulation type and they rated output power is no greater than that of Band 26, therefore, they were considered as one frequency band during SAR measurement, LTE Band 26 (the wide frequency range) was selected to test.

LTE Band 41&38:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	2506	20	1RB	/	/	/	/	/	/
	2550	20	1RB	/	/	/	/	/	/
	2593	20	1RB	22.85	23.4	1.135	0.061	0.07	21#
	2636	20	1RB	/	/	/	/	/	/
	2680	20	1RB	/	/	/	/	/	/
	2593	20	50%RB	21.88	23.4	1.419	0.051	0.07	/
Head Left Tilt	2506	20	1RB	/	/	/	/	/	/
	2550	20	1RB	/	/	/	/	/	/
	2593	20	1RB	22.85	23.4	1.135	0.02	0.02	/
	2636	20	1RB	/	/	/	/	/	/
	2680	20	1RB	/	/	/	/	/	/
	2593	20	50%RB	21.88	23.4	1.419	0.02	0.03	/
Head Right Cheek	2506	20	1RB	/	/	/	/	/	/
	2550	20	1RB	/	/	/	/	/	/
	2593	20	1RB	22.85	23.4	1.135	0.042	0.05	/
	2636	20	1RB	/	/	/	/	/	/
	2680	20	1RB	/	/	/	/	/	/
	2593	20	50%RB	21.88	23.4	1.419	0.041	0.06	/
Head Right Tilt	2506	20	1RB	/	/	/	/	/	/
	2550	20	1RB	/	/	/	/	/	/
	2593	20	1RB	22.85	23.4	1.135	0.036	0.04	/
	2636	20	1RB	/	/	/	/	/	/
	2680	20	1RB	/	/	/	/	/	/
	2593	20	50%RB	21.88	23.4	1.419	0.037	0.05	/
Body Front (10mm)	2506	20	1RB	/	/	/	/	/	/
	2550	20	1RB	/	/	/	/	/	/
	2593	20	1RB	22.85	23.4	1.135	0.067	0.08	/
	2636	20	1RB	/	/	/	/	/	/
	2680	20	1RB	/	/	/	/	/	/
	2593	20	50%RB	21.88	23.4	1.419	0.067	0.10	/
Body Back (10mm)	2506	20	1RB	/	/	/	/	/	/
	2550	20	1RB	/	/	/	/	/	/
	2593	20	1RB	22.85	23.4	1.135	0.166	0.19	/
	2636	20	1RB	/	/	/	/	/	/
	2680	20	1RB	/	/	/	/	/	/
	2593	20	50%RB	21.88	23.4	1.419	0.167	0.24	22#
Body Left (10mm)	2506	20	1RB	/	/	/	/	/	/
	2550	20	1RB	/	/	/	/	/	/
	2593	20	1RB	22.85	23.4	1.135	0.081	0.09	/
	2636	20	1RB	/	/	/	/	/	/
	2680	20	1RB	/	/	/	/	/	/
	2593	20	50%RB	21.88	23.4	1.419	0.079	0.11	/

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Bottom (10mm)	2506	20	1RB	/	/	/	/	/	/
	2550	20	1RB	/	/	/	/	/	/
	2593	20	1RB	22.85	23.4	1.135	0.05	0.06	/
	2636	20	1RB	/	/	/	/	/	/
	2680	20	1RB	/	/	/	/	/	/
	2593	20	50%RB	21.88	23.4	1.419	0.05	0.07	/

The data above was performed on 2026/03/29.

Note:

1. The E-UTRA Operating Band 38 is a subset of band 41, and they are same in modulation type and they rated output power is no greater than that of Band 41, therefore, they were considered as one frequency band during SAR measurement, LTE Band 41 (the wide frequency range) was selected to test.

2. The frequency range of LTE Band 41 is 2496~ 2690MHz. Per KDB 447498 D01, according to the following formula Calculate N_c is 5.

KDB procedures, the following should be applied to determine the number of required test channels. The test channels should be evenly spread across the transmission frequency band of each wireless mode.¹⁴

$$N_c = \text{Round} \left\{ \left[100(f_{\text{high}} - f_{\text{low}}) / f_c \right]^{0.5} \times (f_c / 100)^{0.2} \right\},$$

where

- N_c is the number of test channels, rounded to the nearest integer,
- f_{high} and f_{low} are the highest and lowest channel frequencies within the transmission band,
- f_c is the mid-band channel frequency,
- all frequencies are in MHz.

3. The power class 3 used for LTE Band 41 SAR testing.

LTE Band 66&4:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	1720	20	1RB	/	/	/	/	/	/
	1745	20	1RB	23.47	24.1	1.156	0.18	0.18	/
	1770	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.77	24.1	1.358	0.185	0.25	/
Head Left Tilt	1720	20	1RB	/	/	/	/	/	/
	1745	20	1RB	23.47	24.1	1.156	0.132	0.15	/
	1770	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.77	24.1	1.358	0.129	0.18	/
Head Right Cheek	1720	20	1RB	/	/	/	/	/	/
	1745	20	1RB	23.47	24.1	1.156	0.336	0.39	/
	1770	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.77	24.1	1.358	0.346	0.47	23#
Head Right Tilt	1720	20	1RB	/	/	/	/	/	/
	1745	20	1RB	23.47	24.1	1.156	0.137	0.16	/
	1770	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.77	24.1	1.358	0.14	0.19	/
Body Front (10mm)	1720	20	1RB	/	/	/	/	/	/
	1745	20	1RB	23.47	24.1	1.156	0.08	0.09	/
	1770	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.77	24.1	1.358	0.08	0.11	/
Body Back (10mm)	1720	20	1RB	/	/	/	/	/	/
	1745	20	1RB	23.47	24.1	1.156	0.332	0.38	/
	1770	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.77	24.1	1.358	0.348	0.47	/
Body Left (10mm)	1720	20	1RB	/	/	/	/	/	/
	1745	20	1RB	23.47	24.1	1.156	0.478	0.55	/
	1770	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.77	24.1	1.358	0.484	0.66	24#

The data above was performed on 2026/03/26.

Note:

The E-UTRA Operating Band 4 is a subset of band 66, and they are same in modulation type and they rated output power is no greater than that of Band 66, therefore, they were considered as one frequency band during SAR measurement, LTE Band 66 (the wide frequency range) was selected to test.

LTE Band 71:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	673	20	1RB	/	/	/	/	/	/
	680.5	20	1RB	23.47	23.7	1.054	0.205	0.22	/
	688	20	1RB	/	/	/	/	/	/
	680.5	20	50%RB	22.64	23.7	1.276	0.172	0.22	/
Head Left Tilt	673	20	1RB	/	/	/	/	/	/
	680.5	20	1RB	23.47	23.7	1.054	0.143	0.15	/
	688	20	1RB	/	/	/	/	/	/
	680.5	20	50%RB	22.64	23.7	1.276	0.118	0.15	/
Head Right Cheek	673	20	1RB	/	/	/	/	/	/
	680.5	20	1RB	23.47	23.7	1.054	0.214	0.23	25#
	688	20	1RB	/	/	/	/	/	/
	680.5	20	50%RB	22.64	23.7	1.276	0.173	0.22	/
Head Right Tilt	673	20	1RB	/	/	/	/	/	/
	680.5	20	1RB	23.47	23.7	1.054	0.095	0.10	/
	688	20	1RB	/	/	/	/	/	/
	680.5	20	50%RB	22.64	23.7	1.276	0.078	0.10	/
Body Front (10mm)	673	20	1RB	/	/	/	/	/	/
	680.5	20	1RB	23.47	23.7	1.054	0.127	0.13	/
	688	20	1RB	/	/	/	/	/	/
	680.5	20	50%RB	22.64	23.7	1.276	0.106	0.14	/
Body Back (10mm)	673	20	1RB	/	/	/	/	/	/
	680.5	20	1RB	23.47	23.7	1.054	0.365	0.38	26#
	688	20	1RB	/	/	/	/	/	/
	680.5	20	50%RB	22.64	23.7	1.276	0.296	0.38	/
Body Left (10mm)	673	20	1RB	/	/	/	/	/	/
	680.5	20	1RB	23.47	23.7	1.054	0.048	0.05	/
	688	20	1RB	/	/	/	/	/	/
	680.5	20	50%RB	22.64	23.7	1.276	0.047	0.06	/
Body Right (10mm)	673	20	1RB	/	/	/	/	/	/
	680.5	20	1RB	23.47	23.7	1.054	0.227	0.24	
	688	20	1RB	/	/	/	/	/	/
	680.5	20	50%RB	22.64	23.7	1.276	0.194	0.25	/
Body Bottom (10mm)	673	20	1RB	/	/	/	/	/	/
	680.5	20	1RB	23.47	23.7	1.054	0.147	0.15	/
	688	20	1RB	/	/	/	/	/	/
	680.5	20	50%RB	22.64	23.7	1.276	0.121	0.15	/

The data above was performed on 2026/03/24.

Note:

1. When the SAR value is less than half of the limit, testing for other channels are optional.
2. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02r05.
3. KDB 941225 D05-SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is > 0.5 dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg
4. KDB 941225 D05-For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is < 1.45 W/kg, tests for the remaining required test channels are optional.
5. KDB 941225 D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
6. KDB 941225 D05- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
7. KDB 941225 D05- other channel bandwidths SAR test is required when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > 0.5 dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

WLAN 2.4G Chain 0:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Scaled Factor	Duty cycle Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	/	/	/	/	/	/	/
	2462	802.11b	13.66	13.8	1.033	1	0.382	0.39	27#
Head Left Tilt	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	/	/	/	/	/	/	/
	2462	802.11b	13.66	13.8	1.033	1	0.12	0.12	/
Head Right Cheek	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	/	/	/	/	/	/	/
	2462	802.11b	13.66	13.8	1.033	1	0.064	0.07	/
Head Right Tilt	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	/	/	/	/	/	/	/
	2462	802.11b	13.66	13.8	1.033	1	0.057	0.06	/
Body Front (10mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	/	/	/	/	/	/	/
	2462	802.11b	13.66	13.8	1.033	1	0.029	0.03	/
Body Back (10mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	/	/	/	/	/	/	/
	2462	802.11b	13.66	13.8	1.033	1	0.044	0.05	/
Body Right (10mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	/	/	/	/	/	/	/
	2462	802.11b	13.66	13.8	1.033	1	0.169	0.17	28#
Body Top (10mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	/	/	/	/	/	/	/
	2462	802.11b	13.66	13.8	1.033	1	0.022	0.02	/

The data above was performed on 2026/03/28.

Note:

1. When the SAR value is less than half of the limit, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. KDB 248227 D01-SAR measurement is not required for 2.4 GHz OFDM(802.11g/n) when the highest reported SAR for DSSS(802.11b) is ≤ 1.2 W/kg, and the output power for DSSS is not less than that for OFDM.
4. According to KDB 248227 D01, for SAR testing of WLAN with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

WLAN 2.4G Chain 1:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Scaled Factor	Duty cycle Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	9.35	9.7	1.084	1	0.096	0.10	/
	2462	802.11b	/	/	/	/	/	/	/
Head Left Tilt	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	9.35	9.7	1.084	1	0.083	0.09	/
	2462	802.11b	/	/	/	/	/	/	/
Head Right Cheek	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	9.35	9.7	1.084	1	0.176	0.19	29#
	2462	802.11b	/	/	/	/	/	/	/
Head Right Tilt	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	9.35	9.7	1.084	1	0.162	0.18	/
	2462	802.11b	/	/	/	/	/	/	/
Body Front (10mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	9.35	9.7	1.084	1	0.074	0.08	/
	2462	802.11b	/	/	/	/	/	/	/
Body Back (10mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	9.35	9.7	1.084	1	0.172	0.19	30#
	2462	802.11b	/	/	/	/	/	/	/
Body Left (10mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	9.35	9.7	1.084	1	0.043	0.05	/
	2462	802.11b	/	/	/	/	/	/	/
Body Top (10mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	9.35	9.7	1.084	1	0.065	0.07	/
	2462	802.11b	/	/	/	/	/	/	/

The data above was performed on 2026/03/28.

Note:

1. When the SAR value is less than half of the limit, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. KDB 248227 D01-SAR measurement is not required for 2.4 GHz OFDM(802.11g/n) when the highest reported SAR for DSSS(802.11b) is ≤ 1.2 W/kg, and the output power for DSSS is not less than that for OFDM.
4. According to KDB 248227 D01, for SAR testing of WLAN with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

WLAN 5.2G Chain 0:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Scaled Factor	Duty cycle Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	5180	802.11ac20	/	/	/	/	/	/	/
	5200	802.11ac20	7.93	8.5	1.14	1	0.086	0.10	31#
	5240	802.11ac20	/	/	/	/	/	/	/
Head Left Tilt	5180	802.11ac20	/	/	/	/	/	/	/
	5200	802.11ac20	7.93	8.5	1.14	1	0.047	0.05	/
	5240	802.11ac20	/	/	/	/	/	/	/
Head Right Cheek	5180	802.11ac20	/	/	/	/	/	/	/
	5200	802.11ac20	7.93	8.5	1.14	1	0.056	0.06	/
	5240	802.11ac20	/	/	/	/	/	/	/
Head Right Tilt	5180	802.11ac20	/	/	/	/	/	/	/
	5200	802.11ac20	7.93	8.5	1.14	1	0.045	0.05	/
	5240	802.11ac20	/	/	/	/	/	/	/
Body Front (10mm)	5180	802.11ac20	/	/	/	/	/	/	/
	5200	802.11ac20	7.93	8.5	1.14	1	0.021	0.02	/
	5240	802.11ac20	/	/	/	/	/	/	/
Body Back (10mm)	5180	802.11ac20	/	/	/	/	/	/	/
	5200	802.11ac20	7.93	8.5	1.14	1	0.191	0.22	32#
	5240	802.11ac20	/	/	/	/	/	/	/
Body Right (10mm)	5180	802.11ac20	/	/	/	/	/	/	/
	5200	802.11ac20	7.93	8.5	1.14	1	0.069	0.08	/
	5240	802.11ac20	/	/	/	/	/	/	/
Body Top (10mm)	5180	802.11ac20	/	/	/	/	/	/	/
	5200	802.11ac20	7.93	8.5	1.14	1	0.026	0.03	/
	5240	802.11ac20	/	/	/	/	/	/	/

The data above was performed on 2026/03/30.

Note:

1. When the SAR value is less than half of the limit, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For 802.11ac20 mode power is the largest among 802.11a/n/ac/ax, 802.11ac20 mode as initial test configuration is selected to test.
4. According to KDB 248227 D01, for SAR testing of WLAN with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

WLAN 5.2G Chain 1:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Scaled Factor	Duty cycle Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	5180	802.11ac20	/	/	/	/	/	/	/
	5200	802.11ac20	7.53	8.1	1.14	1	0.034	0.04	/
	5240	802.11ac20	/	/	/	/	/	/	/
Head Left Tilt	5180	802.11ac20	/	/	/	/	/	/	/
	5200	802.11ac20	7.53	8.1	1.14	1	0.026	0.03	/
	5240	802.11ac20	/	/	/	/	/	/	/
Head Right Cheek	5180	802.11ac20	/	/	/	/	/	/	/
	5200	802.11ac20	7.53	8.1	1.14	1	0.073	0.08	33#
	5240	802.11ac20	/	/	/	/	/	/	/
Head Right Tilt	5180	802.11ac20	/	/	/	/	/	/	/
	5200	802.11ac20	7.53	8.1	1.14	1	0.054	0.06	/
	5240	802.11ac20	/	/	/	/	/	/	/
Body Front (10mm)	5180	802.11ac20	/	/	/	/	/	/	/
	5200	802.11ac20	7.53	8.1	1.14	1	0.017	0.02	/
	5240	802.11ac20	/	/	/	/	/	/	/
Body Back (10mm)	5180	802.11ac20	/	/	/	/	/	/	/
	5200	802.11ac20	7.53	8.1	1.14	1	0.04	0.05	/
	5240	802.11ac20	/	/	/	/	/	/	/
Body Left (10mm)	5180	802.11ac20	/	/	/	/	/	/	/
	5200	802.11ac20	7.53	8.1	1.14	1	0.041	0.05	34#
	5240	802.11ac20	/	/	/	/	/	/	/
Body Top (10mm)	5180	802.11ac20	/	/	/	/	/	/	/
	5200	802.11ac20	7.53	8.1	1.14	1	0.013	0.01	/
	5240	802.11ac20	/	/	/	/	/	/	/

The data above was performed on 2026/03/30.

Note:

1. When the SAR value is less than half of the limit, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For 802.11ac20 mode power is the largest among 802.11a/n/ac/ax, 802.11ac20 mode as initial test configuration is selected to test.
4. According to KDB 248227 D01, for SAR testing of WLAN with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

WLAN 5.3G Chain 0:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Scaled Factor	Duty cycle Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	5260	802.11ac20	/	/	/	/	/	/	/
	5280	802.11ac20	8.65	9.5	1.216	1	0.087	0.11	35#
	5320	802.11ac20	/	/	/	/	/	/	/
Head Left Tilt	5260	802.11ac20	/	/	/	/	/	/	/
	5280	802.11ac20	8.65	9.5	1.216	1	0.083	0.10	/
	5320	802.11ac20	/	/	/	/	/	/	/
Head Right Cheek	5260	802.11ac20	/	/	/	/	/	/	/
	5280	802.11ac20	8.65	9.5	1.216	1	0.032	0.04	/
	5320	802.11ac20	/	/	/	/	/	/	/
Head Right Tilt	5260	802.11ac20	/	/	/	/	/	/	/
	5280	802.11ac20	8.65	9.5	1.216	1	0.047	0.06	/
	5320	802.11ac20	/	/	/	/	/	/	/
Body Front (10mm)	5260	802.11ac20	/	/	/	/	/	/	/
	5280	802.11ac20	8.65	9.5	1.216	1	0.0083	0.01	/
	5320	802.11ac20	/	/	/	/	/	/	/
Body Back (10mm)	5260	802.11ac20	/	/	/	/	/	/	/
	5280	802.11ac20	8.65	9.5	1.216	1	0.144	0.18	36#
	5320	802.11ac20	/	/	/	/	/	/	/
Body Right (10mm)	5260	802.11ac20	/	/	/	/	/	/	/
	5280	802.11ac20	8.65	9.5	1.216	1	0.044	0.05	/
	5320	802.11ac20	/	/	/	/	/	/	/
Body Top (10mm)	5260	802.11ac20	/	/	/	/	/	/	/
	5280	802.11ac20	8.65	9.5	1.216	1	0.01	0.01	/
	5320	802.11ac20	/	/	/	/	/	/	/

The data above was performed on 2026/03/31.

Note:

1. When the SAR value is less than half of the limit, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For 802.11ac20 mode power is the largest among 802.11a/n/ac/ax, 802.11ac20 mode as initial test configuration is selected to test.
4. According to KDB 248227 D01, for SAR testing of WLAN with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

WLAN 5.3G Chain 1:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Scaled Factor	Duty cycle Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	/	/	/	/	/	/	/	/	/
	5290	802.11ac80	8.57	9	1.104	1	0.015	0.02	/
	/	/	/	/	/	/	/	/	/
Head Left Tilt	/	/	/	/	/	/	/	/	/
	5290	802.11ac80	8.57	9	1.104	1	0.046	0.05	/
	/	/	/	/	/	/	/	/	/
Head Right Cheek	/	/	/	/	/	/	/	/	/
	5290	802.11ac80	8.57	9	1.104	1	0.057	0.06	37#
	/	/	/	/	/	/	/	/	/
Head Right Tilt	/	/	/	/	/	/	/	/	/
	5290	802.11ac80	8.57	9	1.104	1	0.028	0.03	/
	/	/	/	/	/	/	/	/	/
Body Front (10mm)	/	/	/	/	/	/	/	/	/
	5290	802.11ac80	8.57	9	1.104	1	0.019	0.02	/
	/	/	/	/	/	/	/	/	/
Body Back (10mm)	/	/	/	/	/	/	/	/	/
	5290	802.11ac80	8.57	9	1.104	1	0.04	0.04	38#
	/	/	/	/	/	/	/	/	/
Body Left (10mm)	/	/	/	/	/	/	/	/	/
	5290	802.11ac80	8.57	9	1.104	1	0.033	0.04	/
	/	/	/	/	/	/	/	/	/
Body Top (10mm)	/	/	/	/	/	/	/	/	/
	5290	802.11ac80	8.57	9	1.104	1	0.016	0.02	/
	/	/	/	/	/	/	/	/	/

The data above was performed on 2026/03/31.

Note:

1. When the SAR value is less than half of the limit, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For 802.11ac80 mode power is the largest among 802.11a/n/ac/ax, 802.11ac80 mode as initial test configuration is selected to test.
4. According to KDB 248227 D01, for SAR testing of WLAN with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

WLAN 5.6G Chain 0:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Scaled Factor	Duty cycle Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	5510	802.11ac40	/	/	/	/	/	/	/
	5590	802.11ac40	11.17	11.5	1.079	1	0.116	0.13	39#
	5670	802.11ac40	/	/	/	/	/	/	/
	5710	802.11ac40	/	/	/	/	/	/	/
Head Left Tilt	5510	802.11ac40	/	/	/	/	/	/	/
	5590	802.11ac40	11.17	11.5	1.079	1	0.029	0.03	/
	5670	802.11ac40	/	/	/	/	/	/	/
	5710	802.11ac40	/	/	/	/	/	/	/
Head Right Cheek	5510	802.11ac40	/	/	/	1	/	/	/
	5590	802.11ac40	11.17	11.5	1.079	/	0.035	0.04	/
	5670	802.11ac40	/	/	/	/	/	/	/
	5710	802.11ac40	/	/	/	1	/	/	/
Head Right Tilt	5510	802.11ac40	/	/	/	/	/	/	/
	5590	802.11ac40	11.17	11.5	1.079	/	0.017	0.02	/
	5670	802.11ac40	/	/	/	1	/	/	/
	5710	802.11ac40	/	/	/	/	/	/	/
Body Front (10mm)	5510	802.11ac40	/	/	/	/	/	/	/
	5590	802.11ac40	11.17	11.5	1.079	1	0.021	0.02	/
	5670	802.11ac40	/	/	/	/	/	/	/
	5710	802.11ac40	/	/	/	/	/	/	/
Body Back (10mm)	5510	802.11ac40	/	/	/	/	/	/	/
	5590	802.11ac40	11.17	11.5	1.079	1	0.093	0.10	40#
	5670	802.11ac40	/	/	/	/	/	/	/
	5710	802.11ac40	/	/	/	/	/	/	/
Body Right (10mm)	5510	802.11ac40	/	/	/	/	/	/	/
	5590	802.11ac40	11.17	11.5	1.079	1	0.049	0.05	/
	5670	802.11ac40	/	/	/	/	/	/	/
	5710	802.11ac40	/	/	/	/	/	/	/
Body Top (10mm)	5510	802.11ac40	/	/	/	/	/	/	/
	5590	802.11ac40	11.17	11.5	1.079	1	0.016	0.02	/
	5670	802.11ac40	/	/	/	/	/	/	/
	5710	802.11ac40	/	/	/	/	/	/	/

The data above was performed on 2026/04/01.

Note:

1. When the SAR value is less than half of the limit, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For 802.11ac40 mode power is the largest among 802.11a/n/ac/ax, 802.11ac40 mode as initial test configuration is selected to test.
4. According to KDB 248227 D01, for SAR testing of WLAN with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

WLAN 5.6G Chain 1:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Scaled Factor	Duty cycle Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	5500	802.11a	/	/	/	/	/	/	/
	5600	802.11a	11.46	11.5	1.009	1	0.097	0.10	/
	5700	802.11a	/	/	/	/	/	/	/
	5720	802.11a	/	/	/	/	/	/	/
Head Left Tilt	5500	802.11a	/	/	/	/	/	/	/
	5600	802.11a	11.46	11.5	1.009	1	0.107	0.11	/
	5700	802.11a	/	/	/	/	/	/	/
	5720	802.11a	/	/	/	/	/	/	/
Head Right Cheek	5500	802.11a	/	/	/	/	/	/	/
	5600	802.11a	11.46	11.5	1.009	1	0.201	0.20	41#
	5700	802.11a	/	/	/	/	/	/	/
	5720	802.11a	/	/	/	/	/	/	/
Head Right Tilt	5500	802.11a	/	/	/	/	/	/	/
	5600	802.11a	11.46	11.5	1.009	1	0.081	0.08	/
	5700	802.11a	/	/	/	/	/	/	/
	5720	802.11a	/	/	/	/	/	/	/
Body Front (10mm)	5500	802.11a	/	/	/	/	/	/	/
	5600	802.11a	11.46	11.5	1.009	1	0.032	0.03	/
	5700	802.11a	/	/	/	/	/	/	/
	5720	802.11a	/	/	/	/	/	/	/
Body Back (10mm)	5500	802.11a	/	/	/	/	/	/	/
	5600	802.11a	11.46	11.5	1.009	1	0.108	0.11	/
	5700	802.11a	/	/	/	/	/	/	/
	5720	802.11a	/	/	/	/	/	/	/
Body Left (10mm)	5500	802.11a	/	/	/	/	/	/	/
	5600	802.11a	11.46	11.5	1.009	1	0.127	0.13	42#
	5700	802.11a	/	/	/	/	/	/	/
	5720	802.11a	/	/	/	/	/	/	/
Body Top (10mm)	5500	802.11a	/	/	/	/	/	/	/
	5600	802.11a	11.46	11.5	1.009	1	0.038	0.04	/
	5700	802.11a	/	/	/	/	/	/	/
	5720	802.11a	/	/	/	/	/	/	/

The data above was performed on 2026/04/01.

Note:

1. When the SAR value is less than half of the limit, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For 802.11a mode power is the largest among 802.11a/n/ac/ax, 802.11a mode as initial test configuration is selected to test.
4. According to KDB 248227 D01, for SAR testing of WLAN with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

WLAN 5.8G Chain 0:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Scaled Factor	Duty cycle Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	5745	802.11a	/	/	/	/	/	/	/
	5785	802.11a	9.71	10	1.069	1	0.133	0.14	43#
	5825	802.11a	/	/	/	/	/	/	/
Head Left Tilt	5745	802.11a	/	/	/	/	/	/	/
	5785	802.11a	9.71	10	1.069	1	0.032	0.03	/
	5825	802.11a	/	/	/	/	/	/	/
Head Right Cheek	5745	802.11a	/	/	/	/	/	/	/
	5785	802.11a	9.71	10	1.069	1	0.026	0.03	/
	5825	802.11a	/	/	/	/	/	/	/
Head Right Tilt	5745	802.11a	/	/	/	/	/	/	/
	5785	802.11a	9.71	10	1.069	1	0.021	0.02	/
	5825	802.11a	/	/	/	/	/	/	/
Body Front (10mm)	5745	802.11a	/	/	/	/	/	/	/
	5785	802.11a	9.71	10	1.069	1	0.015	0.02	/
	5825	802.11a	/	/	/	/	/	/	/
Body Back (10mm)	5745	802.11a	/	/	/	/	/	/	/
	5785	802.11a	9.71	10	1.069	1	0.097	0.10	44#
	5825	802.11a	/	/	/	/	/	/	/
Body Right (10mm)	5745	802.11a	/	/	/	/	/	/	/
	5785	802.11a	9.71	10	1.069	1	0.043	0.05	/
	5825	802.11a	/	/	/	/	/	/	/
Body Top (10mm)	5745	802.11a	/	/	/	/	/	/	/
	5785	802.11a	9.71	10	1.069	1	0.021	0.02	/
	5825	802.11a	/	/	/	/	/	/	/

The data above was performed on 2026/04/02.

Note:

1. When the SAR value is less than half of the limit, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For 802.11a mode power is the largest among 802.11a/n/ac/ax, 802.11a mode as initial test configuration is selected to test.
4. According to KDB 248227 D01, for SAR testing of WLAN with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

WLAN 5.8G Chain 1:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Scaled Factor	Duty cycle Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	/	/	/	/	/	/	/	/	/
	5775	802.11ac80	14.03	14.5	1.114	1	0.121	0.13	/
	/	/	/	/	/	/	/	/	/
Head Left Tilt	/	/	/	/	/	/	/	/	/
	5775	802.11ac80	14.03	14.5	1.114	1	0.134	0.15	/
	/	/	/	/	/	/	/	/	/
Head Right Cheek	/	/	/	/	/	/	/	/	/
	5775	802.11ac80	14.03	14.5	1.114	1	0.183	0.20	45#
	/	/	/	/	/	/	/	/	/
Head Right Tilt	/	/	/	/	/	/	/	/	/
	5775	802.11ac80	14.03	14.5	1.114	1	0.141	0.16	/
	/	/	/	/	/	/	/	/	/
Body Front (10mm)	/	/	/	/	/	/	/	/	/
	5775	802.11ac80	14.03	14.5	1.114	1	0.047	0.05	/
	/	/	/	/	/	/	/	/	/
Body Back (10mm)	/	/	/	/	/	/	/	/	/
	5775	802.11ac80	14.03	14.5	1.114	1	0.067	0.07	/
	/	/	/	/	/	/	/	/	/
Body Left (10mm)	/	/	/	/	/	/	/	/	/
	5775	802.11ac80	14.03	14.5	1.114	1	0.077	0.09	46#
	/	/	/	/	/	/	/	/	/
Body Top (10mm)	/	/	/	/	/	/	/	/	/
	5775	802.11ac80	14.03	14.5	1.114	1	0.068	0.08	/
	/	/	/	/	/	/	/	/	/

The data above was performed on 2026/04/02.

Note:

1. When the SAR value is less than half of the limit, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For 802.11ac80 mode power is the largest among 802.11a/n/ac/ax, 802.11ac80 mode as initial test configuration is selected to test.
4. According to KDB 248227 D01, for SAR testing of WLAN with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

10. MEASUREMENT VARIABILITY

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Note: The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The Highest Measured SAR Configuration in Each Frequency Band

Head

SAR probe calibration point	Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
				Original	Repeated	
/	/	/	/	/	/	/

Body

SAR probe calibration point	Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
				Original	Repeated	
750 MHz	WDMA Band 5	836.6	Body Back	0.946	0.935	1.01
1900 MHz	PCS 1900	1880	Body Left	0.884	0.861	1.03

Note:

1. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
2. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements.

11. DUT HOLDER PERTURBATIONS

In accordance with TCB workshop October 2016:

- 1) SAR perturbation due to test device holders, depending on antenna locations, buttons locations on phones or device, form factor (e.g. dongles etc.), the measured SAR could be influenced by the relative positions of the test device and its holder
- 2) SAR measurement standards have included protocols to evaluate this with a flat phantom, with and without the device holder
- 3) When the highest reported SAR of an antenna is > 1.2 W/kg, holder perturbation verification is required for each antenna, using the highest SAR configuration among all applicable frequency bands in the same exact device and holder positions used for head and body SAR measurements; i.e. same device/button locations in the holder

Per IEEE 1528: 2013/Annex E/E.4.1.1: Device holder perturbation tolerance for a specific test device: Type B

When it is unknown if a device holder perturbs the fields of a test device, the SAR uncertainty shall be assessed with a flat phantom (see Clause 5) by comparing the SAR with and without the device holder according to the following tests:

The SAR tolerance for device holder disturbance is computed using Equation (E.21) and entered in the corresponding row of the appropriate uncertainty table with an assumed rectangular probability distribution and $\nu_i = \infty$ degrees of freedom:

$$SAR_{\text{tolerance}} [\%] = 100 \times \left(\frac{SAR_{\text{w/holder}} - SAR_{\text{w/o holder}}}{SAR_{\text{w/o holder}}} \right) \quad (\text{E.21})$$

The Highest Measured SAR Configuration among all applicable Frequency Band

Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		The Device holder perturbation uncertainty
			With holder	Without holder	
/	/	/	/	/	/

12. SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

12.1 Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities		
Transmitter Combination	Simultaneous?	Hotspot?
WWAN(GSM/WCDMA/LTE/5G NR) + WIFI 2.4G Chain 0 + WIFI 2.4G Chain 1 + NFC	√	√
WWAN(GSM/WCDMA/LTE/5G NR) + WIFI 5G Chain 0 + WIFI 5G Chain 1 + NFC + Bluetooth	√	√
WWAN(GSM/WCDMA/LTE/5G NR) + WIFI 6G Chain 0 + WIFI 6G Chain 1 + NFC + Bluetooth	√	√
WWAN(GSM/WCDMA/LTE/5G NR) + WIFI 2.4G Chain 1 + Bluetooth + NFC	√	√
WWAN(GSM/WCDMA/LTE/5G NR) + Bluetooth	√	×
WIFI 2.4G Chain 0 + Bluetooth	×	×

Note: WLAN 5.3G/5.6G do not support hotspots

EN-DC Carrier Aggregation Possible Combinations	
LTE Anchor Bands for NR band n2	LTE Band 5/17
LTE Anchor Bands for NR band n5	LTE Band 2/4/7/66
LTE Anchor Bands for NR band n7	LTE Band 5
LTE Anchor Bands for NR band n66	LTE Band 5
LTE Anchor Bands for NR band n77	LTE Band 5/7/26/41/66
LTE Anchor Bands for NR band n78	LTE Band 2/4/5/7/26/38/41/66

Note: 5G NR bands supports SA Band 2/5/7/12/38/41/66/71/77/78 and NSA

DC_2A_n5A, DC_2A_n78A, DC_4A_n5A, DC_4A_n78A, DC_5A_n2A, DC_5A_n7A, DC_5A_n66A, DC_5A_n77A, DC_5A_n78A, DC_7A_n5A, DC_7A_n77A, DC_7A_n78A, DC_17A_n2A, DC_26A_n77A, DC_26A_n78A, DC_38A_n78A, DC_41A_n77A, DC_41A_n78A, DC_66A_n5A, DC_66A_n77A, DC_66A_n78A mode.

EN-DC SAR Assessment:

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
DC_5A_n2A	Head Left	0.26	0.11	0.37
	Head Right	0.14	0.38	0.52
	Body Front	0.19	0.09	0.28
	Body Back	0.46	0.43	0.89
	Body Left	0.05	0.33	0.38
	Body Right	0.13	NA	0.13
	Body Bottom	0.33	NA	0.33
DC_17A_n2A	Head Left	0.19	0.11	0.30
	Head Right	0.10	0.38	0.48
	Body Front	0.16	0.09	0.25
	Body Back	0.36	0.43	0.79
	Body Left	0.05	0.33	0.38
	Body Right	0.15	NA	0.15
	Body Bottom	0.15	NA	0.15
DC_2A_n5A	Head Left	0.35	0.15	0.50
	Head Right	0.57	0.22	0.79
	Body Front	0.16	0.16	0.32
	Body Back	0.48	0.50	0.98
	Body Left	0.16	0.06	0.22
	Body Right	NA	0.18	0.18
	Body Bottom	NA	0.23	0.23
DC_4A_n5A	Head Left	0.25	0.15	0.40
	Head Right	0.47	0.22	0.69
	Body Front	0.11	0.16	0.27
	Body Back	0.47	0.50	0.97
	Body Left	0.66	0.06	0.72
	Body Right	NA	0.18	0.18
	Body Bottom	NA	0.23	0.23
DC_7A_n5A	Head Left	0.08	0.15	0.23
	Head Right	0.05	0.22	0.27
	Body Front	0.08	0.16	0.24
	Body Back	0.32	0.50	0.82
	Body Left	0.11	0.06	0.17
	Body Right	NA	0.18	0.18
	Body Bottom	0.07	0.23	0.30
DC_66A_n5A	Head Left	0.25	0.15	0.40
	Head Right	0.47	0.22	0.69

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
DC_66A_n5A	Body Front	0.11	0.16	0.27
	Body Back	0.47	0.50	0.97
	Body Left	0.66	0.06	0.72
	Body Right	NA	0.18	0.18
	Body Bottom	NA	0.23	0.23
DC_5A_n7A	Head Left	0.26	0.07	0.33
	Head Right	0.14	0.03	0.17
	Body Front	0.19	0.07	0.26
	Body Back	0.46	0.25	0.71
	Body Left	0.05	0.11	0.16
	Body Right	0.13	NA	0.13
	Body Bottom	0.33	0.10	0.43
DC_5A_n66A	Head Left	0.26	0.23	0.49
	Head Right	0.14	0.5	0.64
	Body Front	0.19	0.11	0.30
	Body Back	0.46	0.33	0.79
	Body Left	0.05	0.39	0.44
	Body Right	0.13	NA	0.13
	Body Bottom	0.33	NA	0.33
DC_5A_n77A	Head Left	0.26	0.49	0.75
	Head Right	0.14	0.37	0.51
	Body Front	0.19	0.11	0.30
	Body Back	0.46	0.33	0.79
	Body Left	0.05	NA	0.05
	Body Right	0.13	NA	0.13
	Body Top	NA	0.18	0.18
	Body Bottom	0.33	NA	0.33
DC_7A_n77A	Head Left	0.08	0.49	0.57
	Head Right	0.05	0.37	0.42
	Body Front	0.08	0.11	0.19
	Body Back	0.32	0.33	0.65
	Body Left	0.11	NA	0.11
	Body Top	NA	0.18	0.18
	Body Bottom	0.07	NA	0.07
DC_26A_n77A	Head Left	0.26	0.49	0.75
	Head Right	0.14	0.37	0.51
	Body Front	0.19	0.11	0.30
	Body Back	0.46	0.33	0.79

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
DC_26A_n77A	Body Left	0.05	NA	0.05
	Body Right	0.13	NA	0.13
	Body Top	NA	0.18	0.18
	Body Bottom	0.33	NA	0.33
DC_41A_n77A	Head Left	0.07	0.49	0.56
	Head Right	0.06	0.37	0.43
	Body Front	0.10	0.11	0.21
	Body Back	0.24	0.33	0.57
	Body Left	0.11	NA	0.11
	Body Top	NA	0.18	0.18
	Body Bottom	0.07	NA	0.07
DC_66A_n77A	Head Left	0.25	0.49	0.74
	Head Right	0.47	0.37	0.84
	Body Front	0.11	0.11	0.22
	Body Back	0.47	0.33	0.80
	Body Left	0.66	NA	0.66
	Body Top	NA	0.18	0.18
DC_2A_n78A	Head Left	0.35	0.49	0.84
	Head Right	0.57	0.37	0.94
	Body Front	0.16	0.11	0.27
	Body Back	0.48	0.33	0.81
	Body Left	0.16	NA	0.16
	Body Top	NA	0.18	0.18
DC_4A_n78A	Head Left	0.25	0.49	0.74
	Head Right	0.47	0.37	0.84
	Body Front	0.11	0.11	0.22
	Body Back	0.47	0.33	0.8
	Body Left	0.66	NA	0.66
	Body Top	NA	0.18	0.18
DC_5A_n78A	Head Left	0.26	0.49	0.75
	Head Right	0.14	0.37	0.51
	Body Front	0.19	0.11	0.30
	Body Back	0.46	0.33	0.79
	Body Left	0.05	NA	0.05
	Body Right	0.13	NA	0.13
	Body Top	NA	0.18	0.18
	Body Bottom	0.33	NA	0.33
DC_7A_n78A	Head Left	0.08	0.49	0.57

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
DC_7A_n78A	Head Right	0.05	0.37	0.42
	Body Front	0.08	0.11	0.19
	Body Back	0.32	0.33	0.65
	Body Left	0.11	NA	0.11
	Body Top	NA	0.18	0.18
	Body Bottom	0.07	NA	0.07
DC_26A_n78A	Head Left	0.26	0.49	0.75
	Head Right	0.14	0.37	0.51
	Body Front	0.19	0.11	0.30
	Body Back	0.46	0.33	0.79
	Body Left	0.05	NA	0.05
	Body Right	0.13	NA	0.13
	Body Top	NA	0.18	0.18
	Body Bottom	0.33	NA	0.33
DC_38A_n78A	Head Left	0.07	0.49	0.56
	Head Right	0.06	0.37	0.43
	Body Front	0.10	0.11	0.21
	Body Back	0.24	0.33	0.57
	Body Left	0.11	NA	0.11
	Body Top	NA	0.18	0.18
	Body Bottom	0.07	NA	0.07
DC_41A_n78A	Head Left	0.07	0.49	0.56
	Head Right	0.06	0.37	0.43
	Body Front	0.10	0.11	0.21
	Body Back	0.24	0.33	0.57
	Body Left	0.11	NA	0.11
	Body Top	NA	0.18	0.18
	Body Bottom	0.07	NA	0.07
DC_66A_n78A	Head Left	0.25	0.49	0.74
	Head Right	0.47	0.37	0.84
	Body Front	0.11	0.11	0.22
	Body Back	0.47	0.33	0.80
	Body Left	0.66	NA	0.66
	Body Top	NA	0.18	0.18

12.2 Simultaneous SAR test exclusion considerations:

Mode(SAR1+SAR2+SAR3)	Position	Reported SAR(W/kg)			Σ SAR < 1.6W/kg
		SAR1	SAR2	SAR3	
MAX.WWAN + WIFI 2.4G Chain 1 + Bluetooth	Head Left	0.84	0.10	0.06	1.00
	Head Right	0.94	0.19	0.06	1.19
MAX.WWAN + WIFI 2.4G Chain 1 + Bluetooth (Hotspot)	Body Front	0.32	0.08	0.03	0.43
	Body Back	0.98	0.19	0.03	1.20
	Body Left	0.90	0.05	0.03	0.98
	Body Right	0.34	NA	0.03	0.37
	Body Top	0.27	0.07	0.03	0.35
	Body Bottom	0.49	NA	0.03	0.52
MAX.WWAN + WIFI 2.4G Chain 0 + WIFI 2.4G Chain 1	Head Left	0.84	0.39	0.10	1.33
	Head Right	0.94	0.07	0.19	1.20
MAX.WWAN + WIFI 2.4G Chain 0 + WIFI 2.4G Chain 1 (Hotspot)	Body Front	0.32	0.03	0.08	0.43
	Body Back	0.98	0.05	0.19	1.22
	Body Left	0.90	NA	0.05	0.95
	Body Right	0.34	0.17	NA	0.51
	Body Top	0.27	0.02	0.07	0.36
	Body Bottom	0.49	NA	NA	0.49

Mode(SAR1+SAR2+SAR3+SAR4)	Position	Reported SAR(W/kg)				Σ SAR < 1.6W/kg
		SAR1	SAR2	SAR3	SAR4	
MAX.WWAN + WIFI 5.2G Chain 0 + WIFI 5.2G Chain 1 + Bluetooth	Head Left	0.84	0.10	0.04	0.06	1.04
	Head Right	0.94	0.06	0.08	0.06	1.14
MAX.WWAN + WIFI 5.2G Chain 0 + WIFI 5.2G Chain 1 + Bluetooth (Hotspot)	Body Front	0.32	0.02	0.02	0.03	0.39
	Body Back	0.98	0.22	0.05	0.03	1.28
	Body Left	0.90	NA	0.05	0.03	0.98
	Body Right	0.34	0.08	NA	0.03	0.45
	Body Top	0.27	0.03	0.01	0.03	0.34
	Body Bottom	0.49	NA	NA	0.03	0.52
MAX.WWAN + WIFI 5.3G Chain 0 + WIFI 5.3G Chain 1 + Bluetooth	Head Left	0.84	0.11	0.05	0.06	1.06
	Head Right	0.94	0.06	0.06	0.06	1.12
	Body Front	0.32	0.01	0.02	0.03	0.38
	Body Back	0.98	0.18	0.04	0.03	1.23
	Body Left	0.90	NA	0.04	0.03	0.97
	Body Right	0.34	0.05	NA	0.03	0.42
	Body Top	0.27	0.01	0.02	0.03	0.33
	Body Bottom	0.49	NA	NA	0.03	0.52

Mode(SAR1+SAR2+SAR3+SAR4)	Position	Reported SAR(W/kg)				Σ SAR < 1.6W/kg
		SAR1	SAR2	SAR3	SAR4	
MAX.WWAN + WIFI 5.6G Chain 0 + WIFI 5.6G Chain 1 + Bluetooth	Head Left	0.84	0.13	0.11	0.06	1.14
	Head Right	0.94	0.04	0.20	0.06	1.24
	Body Front	0.32	0.02	0.03	0.03	0.40
	Body Back	0.98	0.10	0.11	0.03	1.22
	Body Left	0.90	NA	0.13	0.03	1.06
	Body Right	0.34	0.05	NA	0.03	0.42
	Body Top	0.27	0.02	0.04	0.03	0.36
	Body Bottom	0.49	NA	NA	0.03	0.52
MAX.WWAN + WIFI 5.8G Chain 0 + WIFI 5.8G Chain 1 + Bluetooth	Head Left	0.84	0.14	0.15	0.06	1.19
	Head Right	0.94	0.03	0.20	0.06	1.23
MAX.WWAN + WIFI 5.8G Chain 0 + WIFI 5.8G Chain 1 + Bluetooth (Hotspot)	Body Front	0.32	0.02	0.05	0.03	0.42
	Body Back	0.98	0.10	0.07	0.03	1.18
	Body Left	0.90	NA	0.09	0.03	1.02
	Body Right	0.34	0.05	NA	0.03	0.42
	Body Top	0.27	0.02	0.08	0.03	0.40
	Body Bottom	0.49	NA	NA	0.03	0.52

Mode(SAR1+SAR2+SAR3+SAR4)	Position	Reported SAR(W/kg)				Σ SAR < 1.6W/kg
		SAR1	SAR2	SAR3	SAR4	
MAX.WWAN + WIFI 6G Chain 0 + WIFI 6G Chain 1 + Bluetooth	Head	0.94	0.09	0.03	0.06	1.12
MAX.WWAN + WIFI 6G Chain 0 + WIFI 6G Chain 1 + Bluetooth	Body	0.98	0.05	0.01	0.03	1.07

Note: For the EIRP of NFC is 0.0001mW, per KDB447498 D01 clause 4.3, the estimated SAR is so lower, so the NFC almost have no influence on the results of simultaneous transmission.

Conclusion:

Sum of SAR: Σ SAR $\leq$ 1.6 W/kg therefore simultaneous transmission SAR with Volume Scans is **not required**.

Note▲:

1. The test data of LTE Band 42/5G NR, please refer to SAR report of 2601P41234E-SAA, issued by Bay Area Compliance Laboratories Corp. (Shenzhen).
2. The test data of WLAN 6G, please refer to SAR report of Ti-CC26020196-701& Ti-CC26020196-703, issued by Shenzhen BALUN Technology Co., Ltd.

APPENDIX A - MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

Measurement uncertainty evaluation for IEEE1528-2013 SAR test

Uncertainty component	Tolerance/uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)
Measurement system							
Probe calibration(k=1)	6.55	N	1	1	1	6.6	6.6
Axial isotropy	4.7	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	1.9	1.9
Hemispherical isotropy	9.6	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	3.9	3.9
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Modulation response	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Integration time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
RF ambient conditions-noise	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
RF ambient conditions-reflections	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Probe positioner mech. tolerance	0.8	R	$\sqrt{3}$	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	$\sqrt{3}$	1	1	3.9	3.9
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
Test sample related							
Test sample positioning	3.3	N	1	1	1	3.3	3.3
Device holder uncertainty	0.8	N	1	1	1	0.8	0.8
Output power variation –SAR draft measurement	5.0	R	$\sqrt{3}$	1	1	2.9	2.9
SAR scaling	2.8	R	$\sqrt{3}$	1	1	1.6	1.6
Phantom and tissue parameters							
Phantom shell uncertainty– shape, thickness and permittivity	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Uncertainty in SAR correction for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.9	1.6
Liquid conductivity meas.	2.5	N	1	0.78	0.71	2.0	1.8
Liquid permittivity meas.	2.5	N	1	0.23	0.26	0.6	0.7
Liquid conductivity – temperature uncertainty	1.7	R	$\sqrt{3}$	0.78	0.71	0.8	0.7
Liquid permittivity – temperature uncertainty	0.3	R	$\sqrt{3}$	0.23	0.26	0.0	0.0
Combined standard uncertainty		RSS				12.1	12.0
Expanded uncertainty (95 % confidence interval)		k=2				24.2	24.0

APPENDIX B - SAR PLOTS

Please refer to the attachment.

APPENDIX C - EUT TEST POSITION PHOTOS

Please refer to the attachment.

APPENDIX D - PROBE CALIBRATION CERTIFICATES

Please refer to the attachment.

APPENDIX E - DIPOLE CALIBRATION CERTIFICATES

Please refer to the attachment.

APPENDIX F - RETURN LOSS AND IMPEDANCE MEASUREMENT

Please refer to the attachment.

*******END OF REPORT*******