




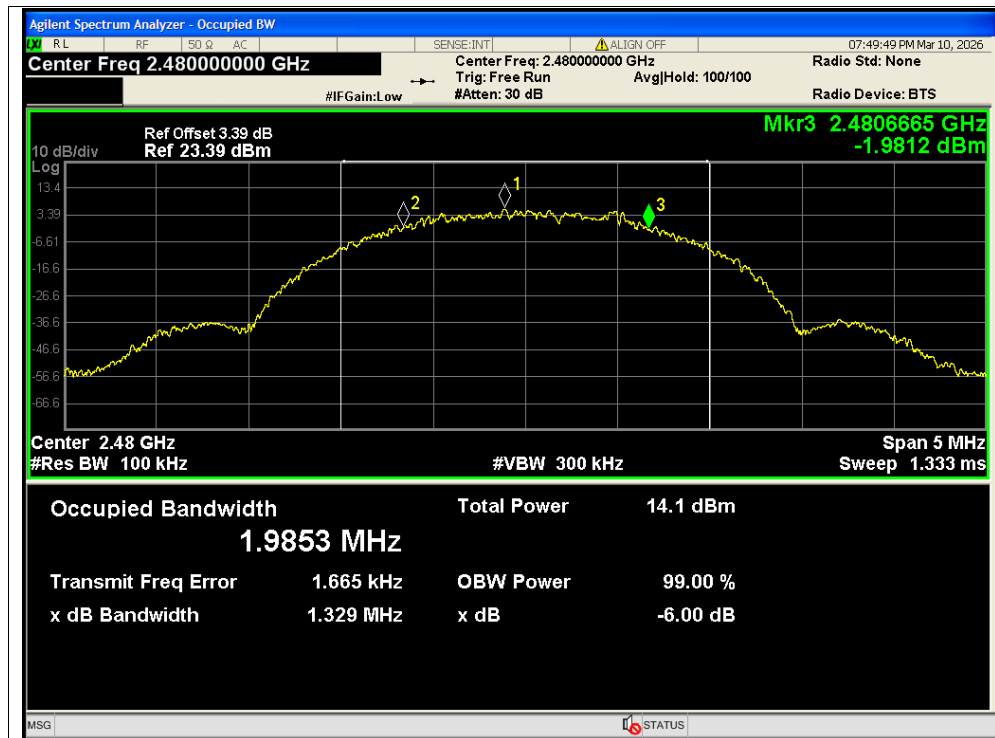


-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

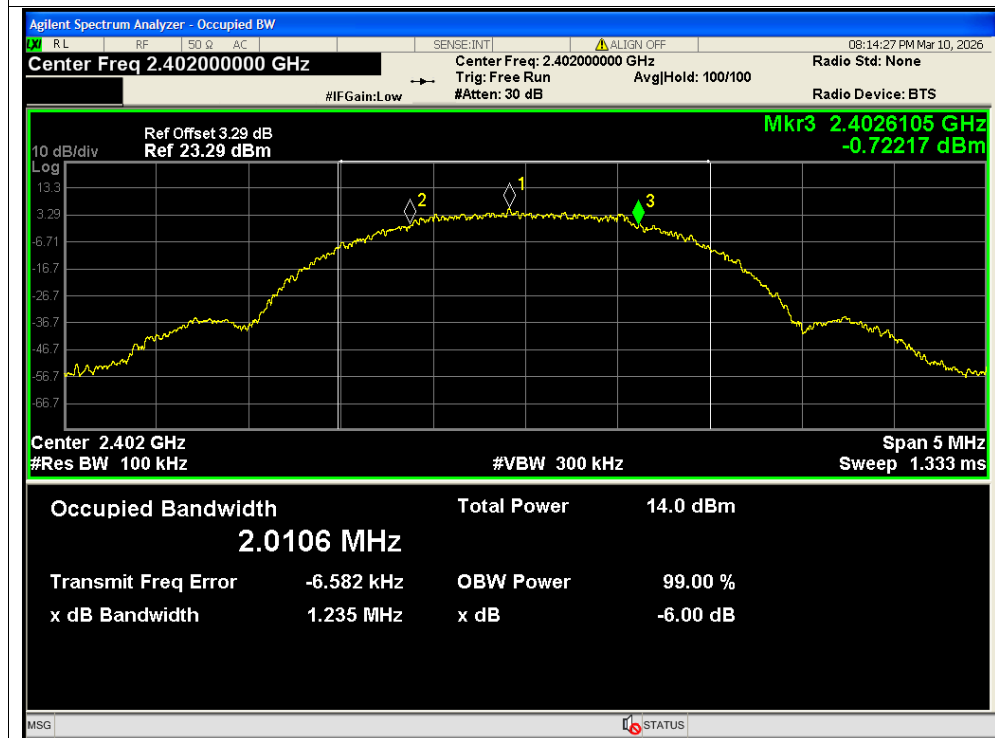

-6dB Bandwidth NVNT BLE 2M 2402MHz Ant2

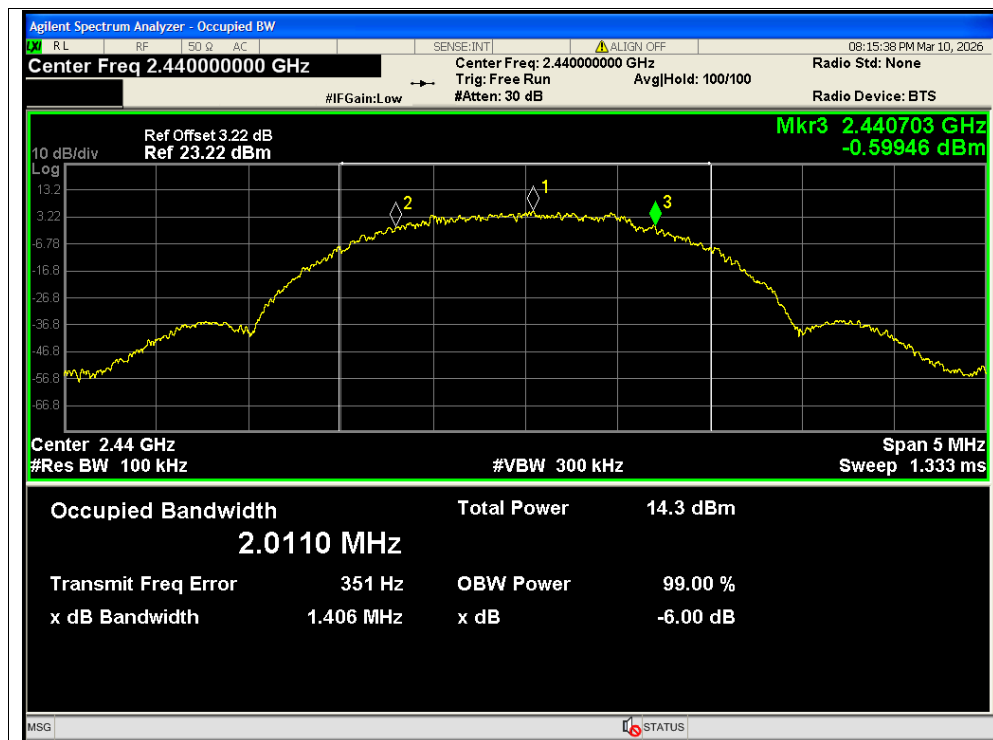


-6dB Bandwidth NVNT BLE 2M 2440MHz Ant2

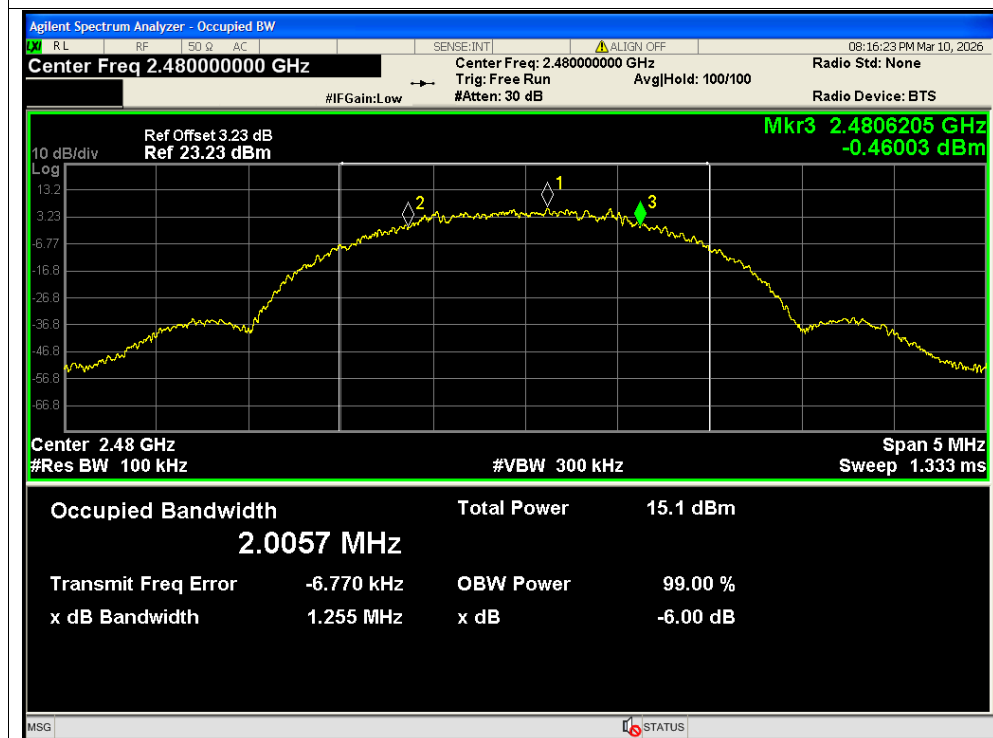


-6dB Bandwidth NVNT BLE 2M 2480MHz Ant2

**A.5. Conducted Spurious Emissions**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-39.27	-20	Pass
NVNT	BLE 1M	2440	Ant1	-40.58	-20	Pass
NVNT	BLE 1M	2480	Ant1	-41.83	-20	Pass
NVNT	BLE 1M	2402	Ant2	-46.13	-20	Pass
NVNT	BLE 1M	2440	Ant2	-46.48	-20	Pass
NVNT	BLE 1M	2480	Ant2	-47.11	-20	Pass
NVNT	BLE 2M	2402	Ant1	-39.15	-20	Pass
NVNT	BLE 2M	2440	Ant1	-41.26	-20	Pass
NVNT	BLE 2M	2480	Ant1	-42.29	-20	Pass
NVNT	BLE 2M	2402	Ant2	-45.05	-20	Pass
NVNT	BLE 2M	2440	Ant2	-44.14	-20	Pass
NVNT	BLE 2M	2480	Ant2	-45.73	-20	Pass

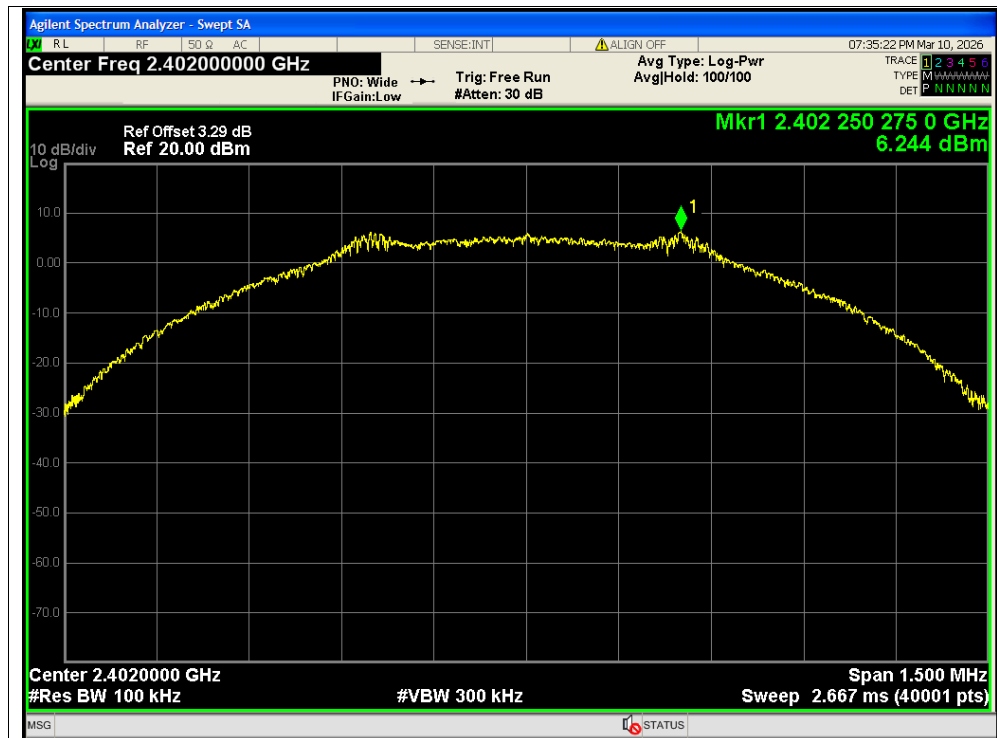


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

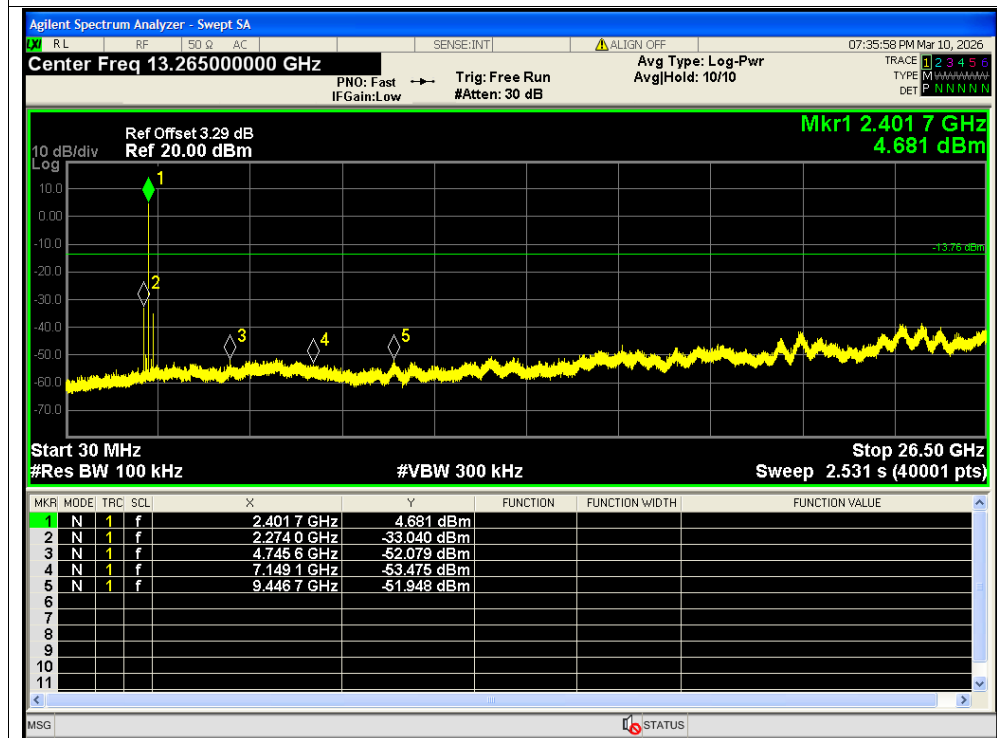


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

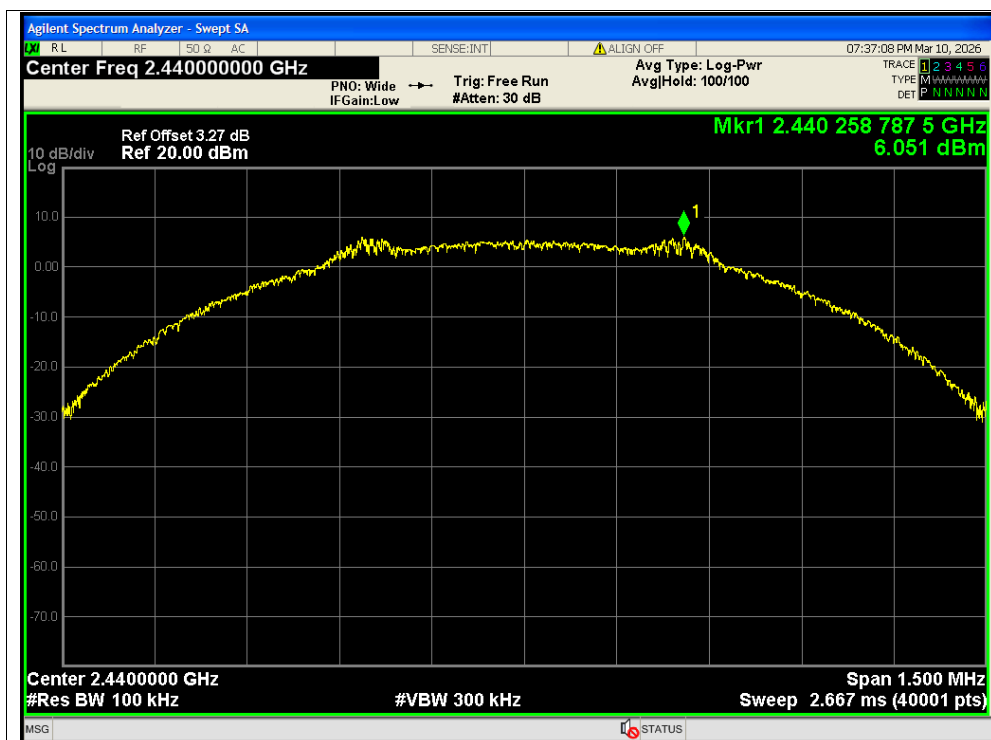


Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

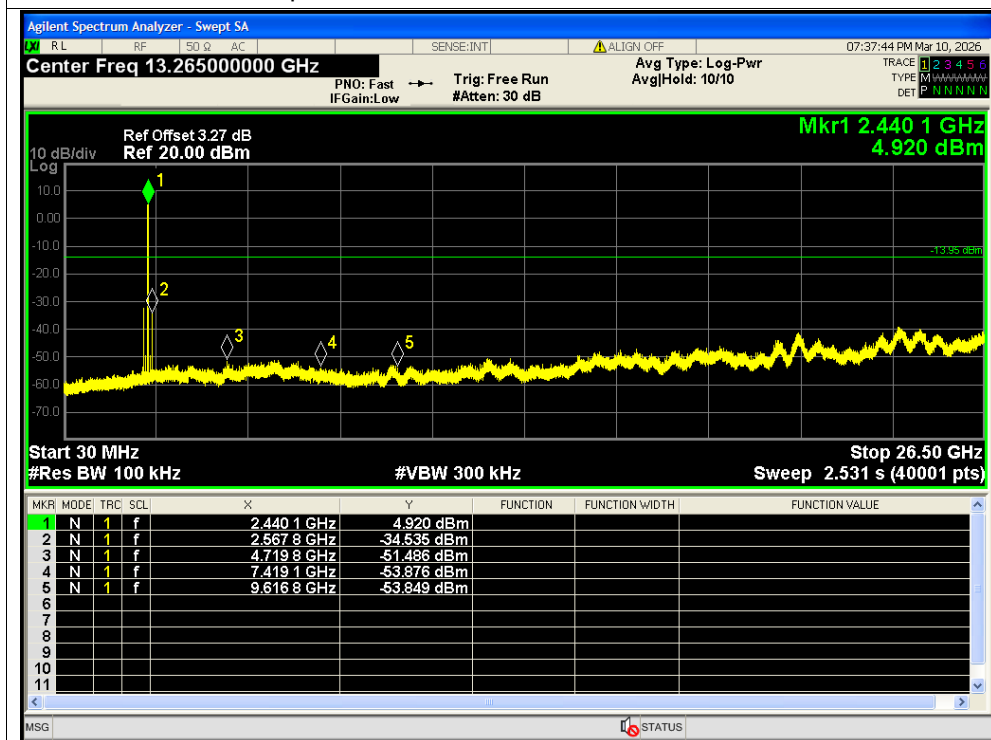


Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

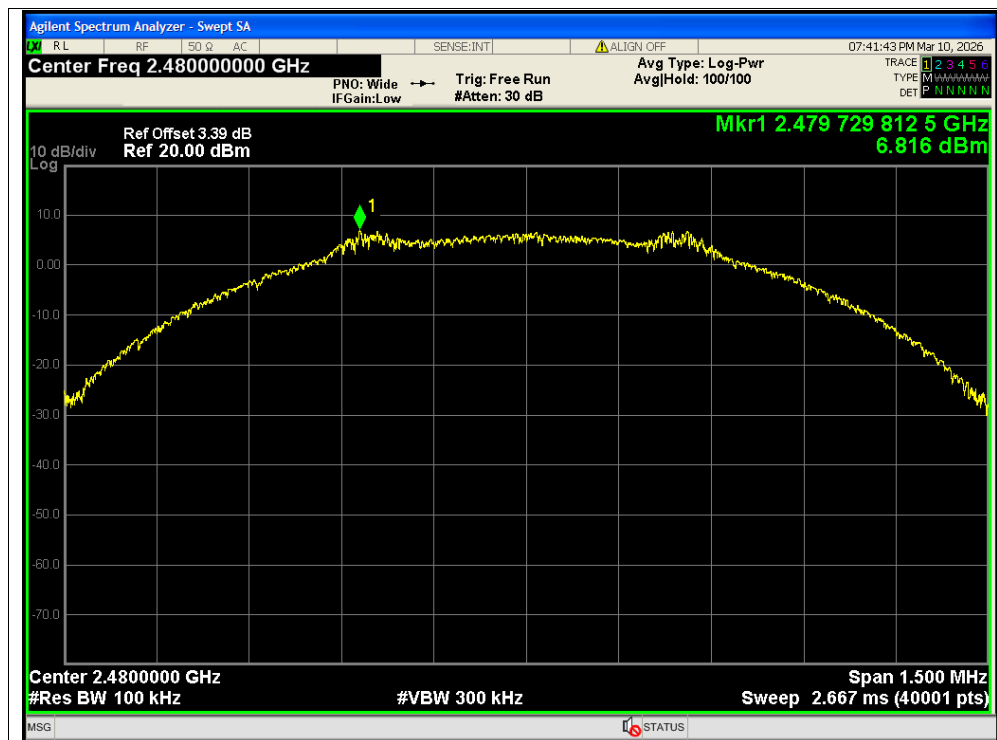


Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

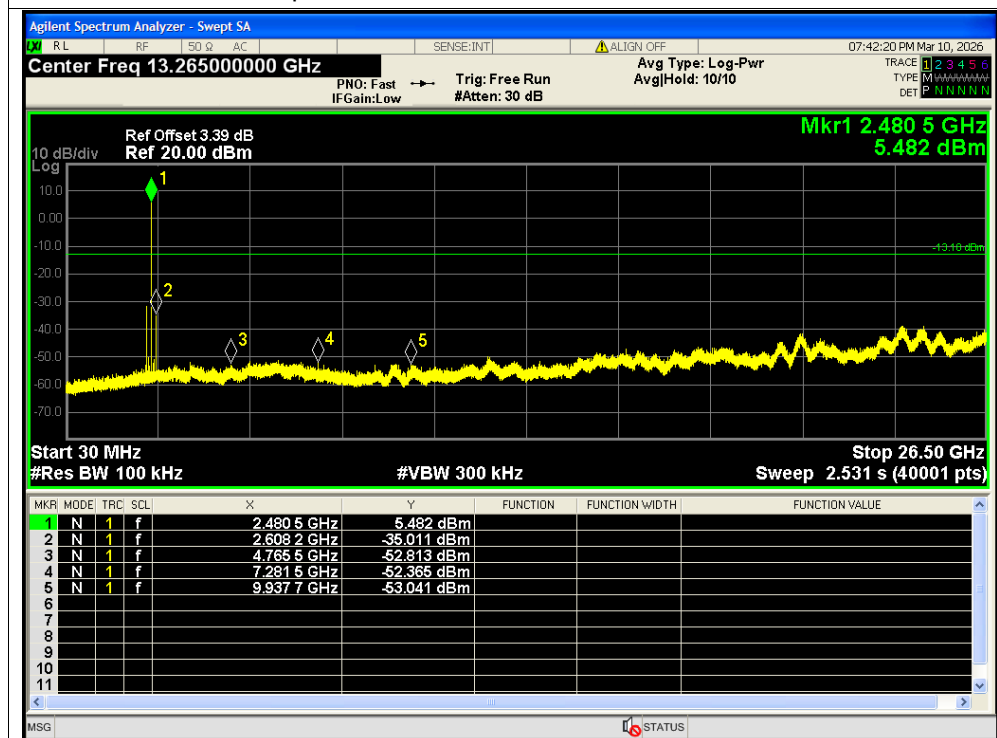


Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

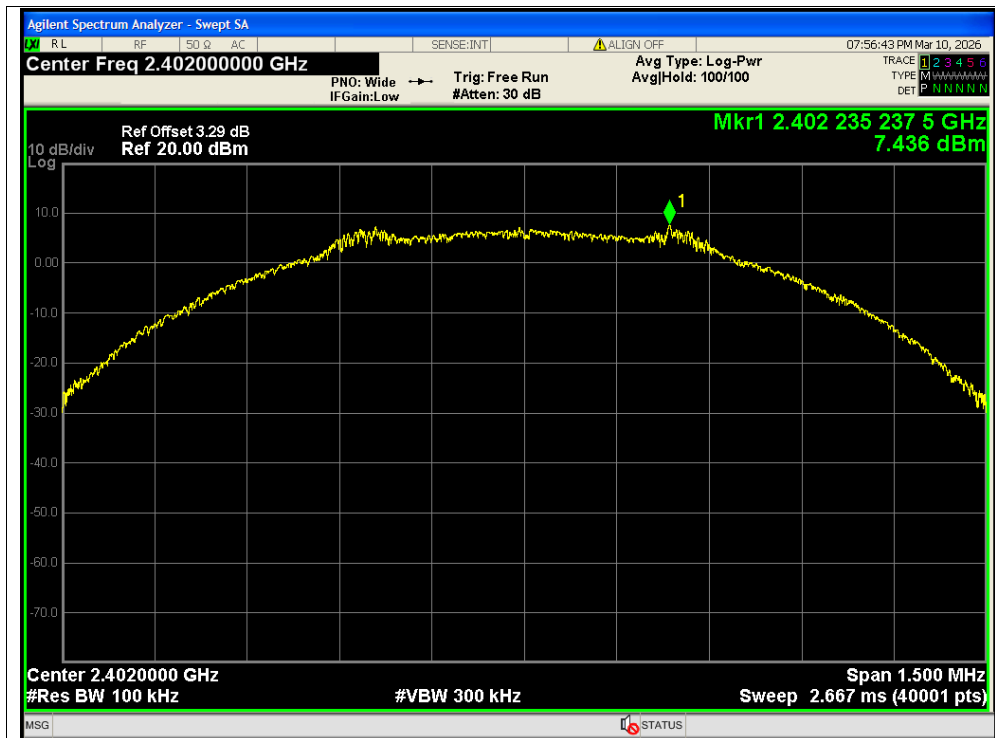


Tx. Spurious NVNT BLE 1M 2402MHz Ant2 Ref

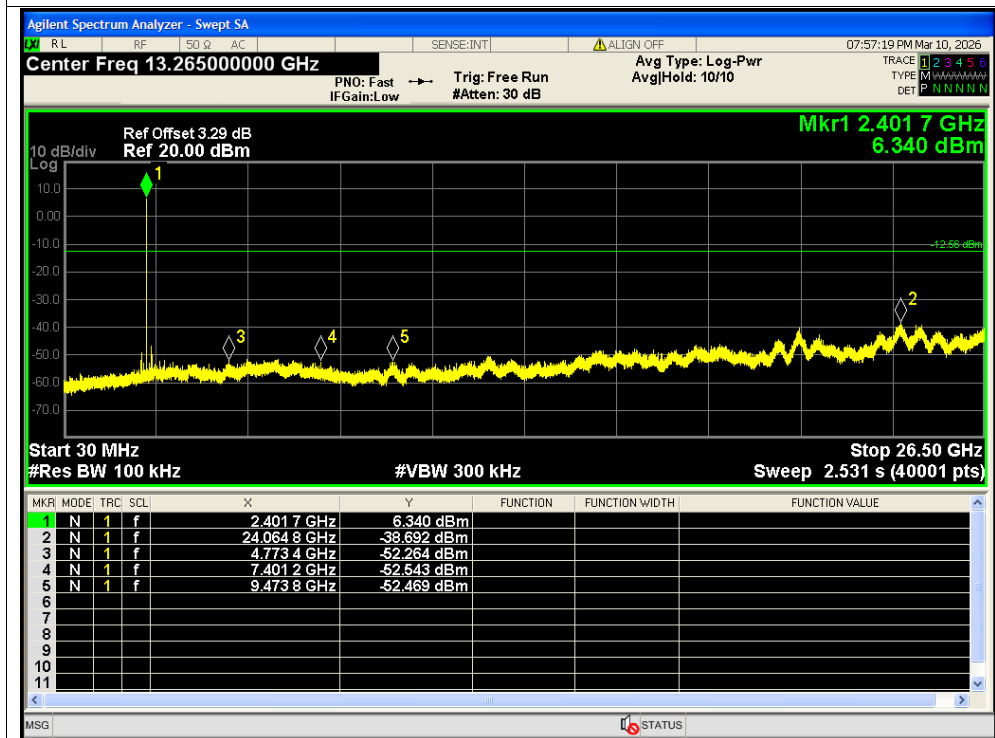


Tx. Spurious NVNT BLE 1M 2402MHz Ant2 Emission

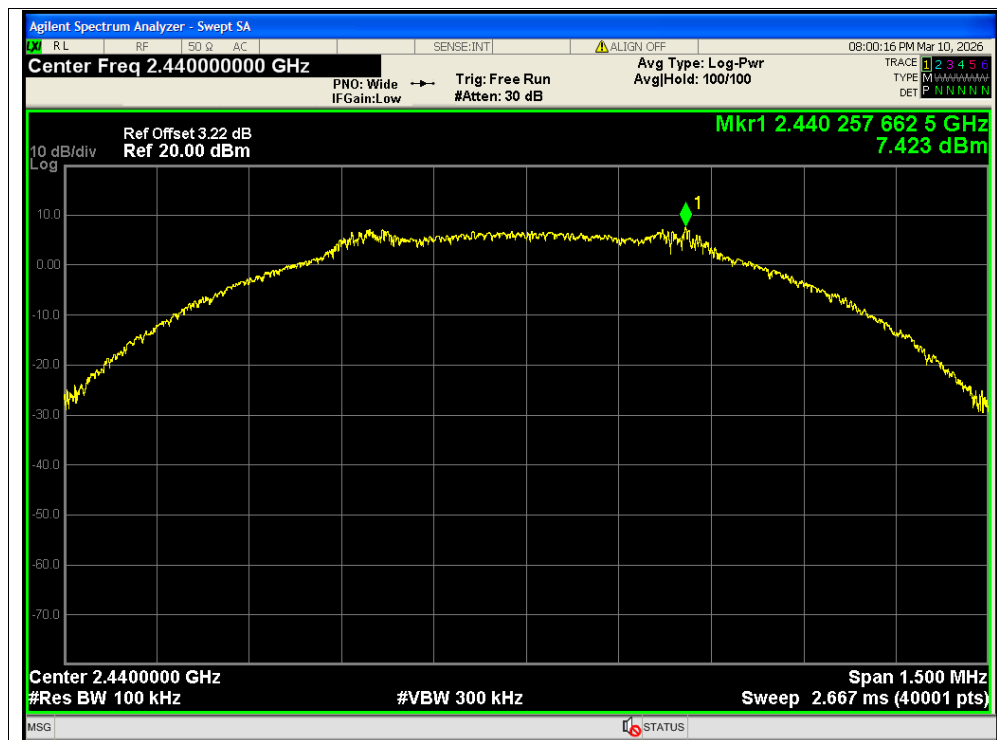


Tx. Spurious NVNT BLE 1M 2440MHz Ant2 Ref

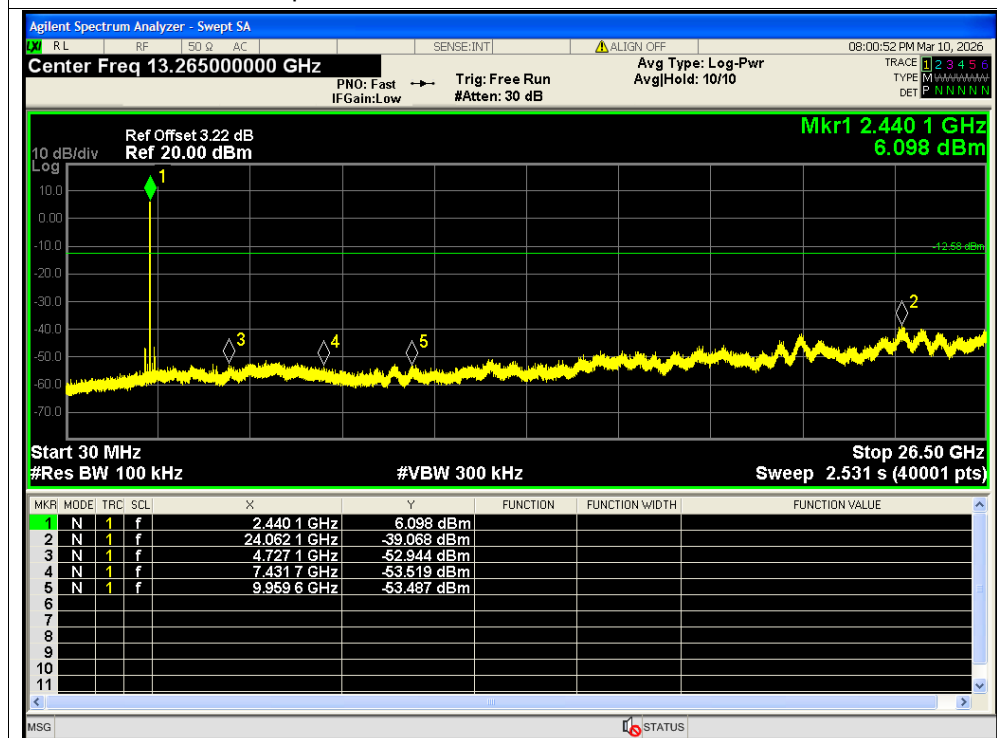


Tx. Spurious NVNT BLE 1M 2440MHz Ant2 Emission

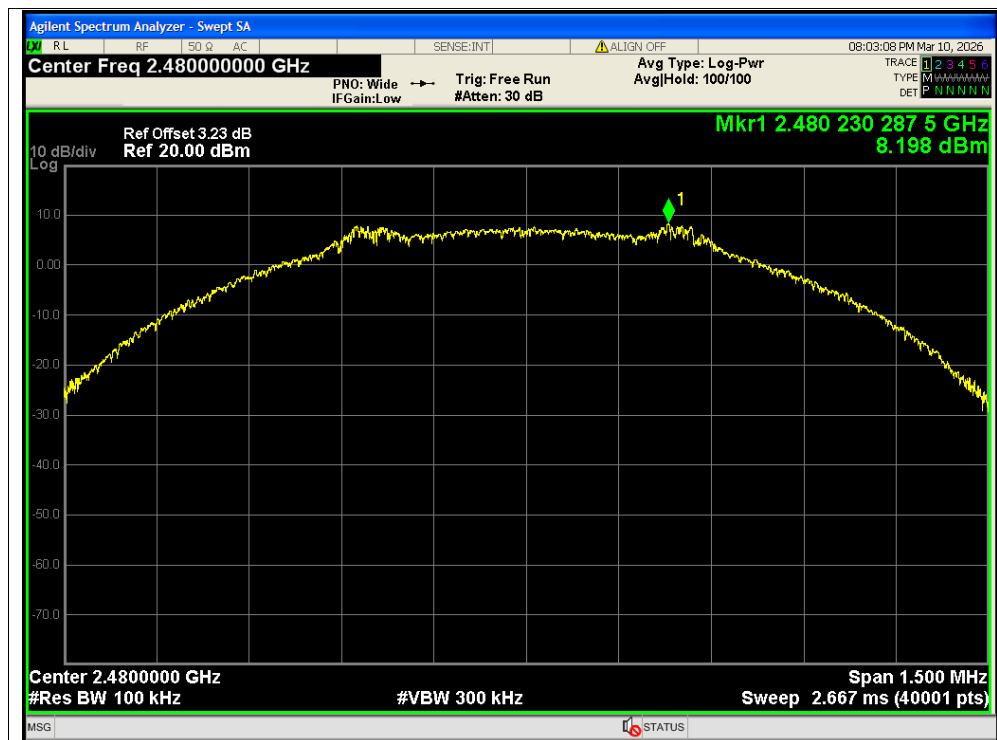


Tx. Spurious NVNT BLE 1M 2480MHz Ant2 Ref

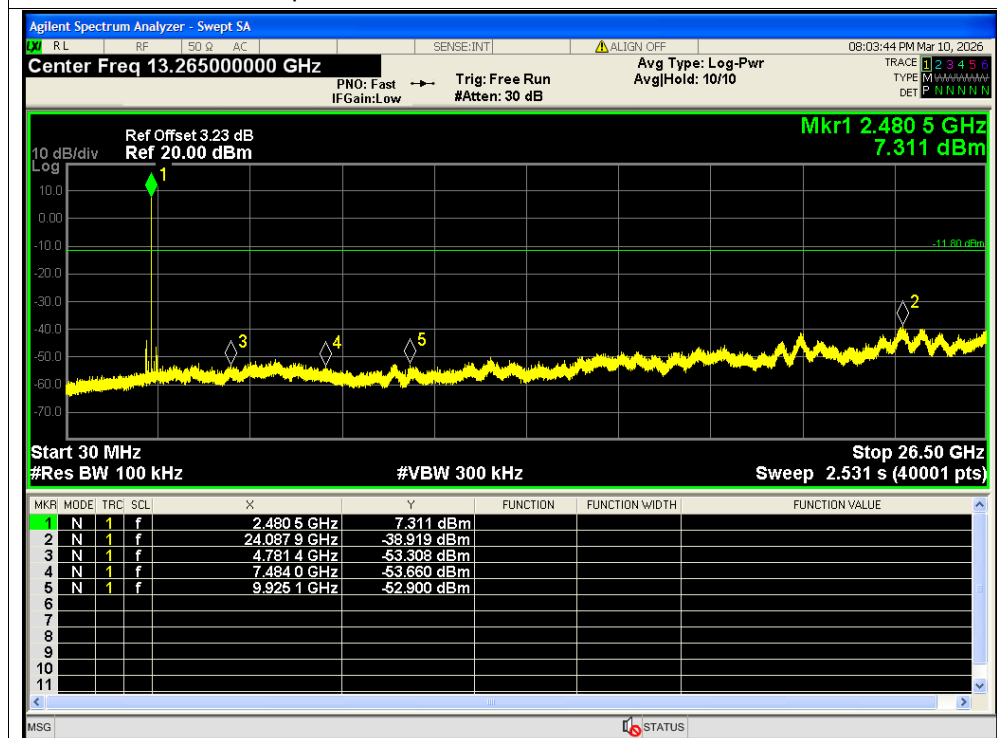


Tx. Spurious NVNT BLE 1M 2480MHz Ant2 Emission

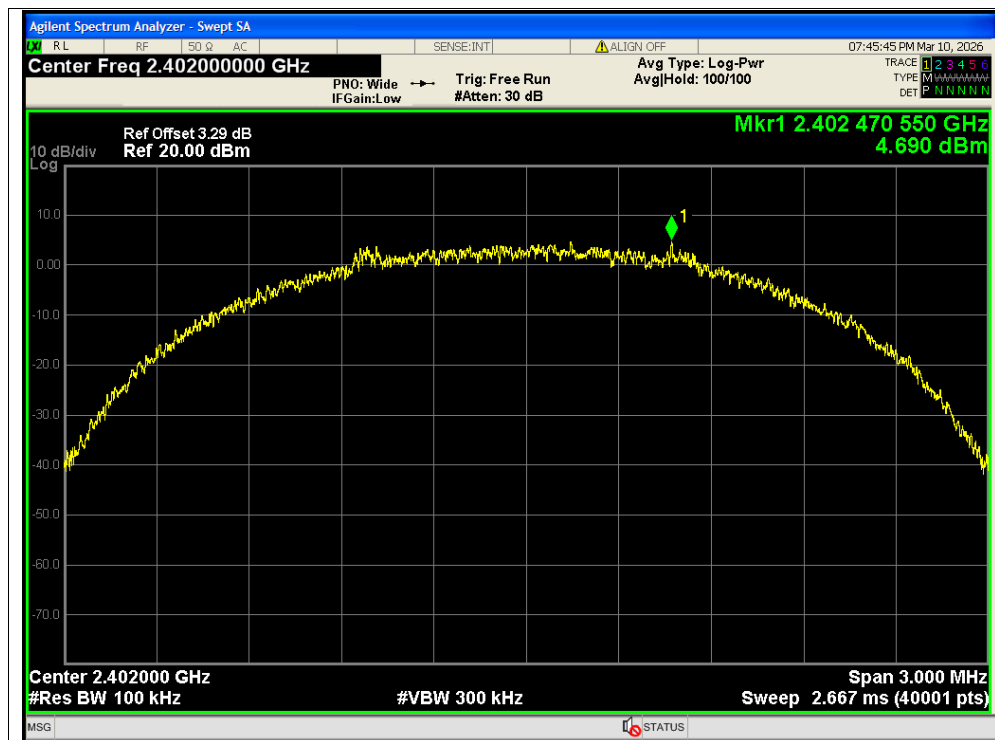


Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref

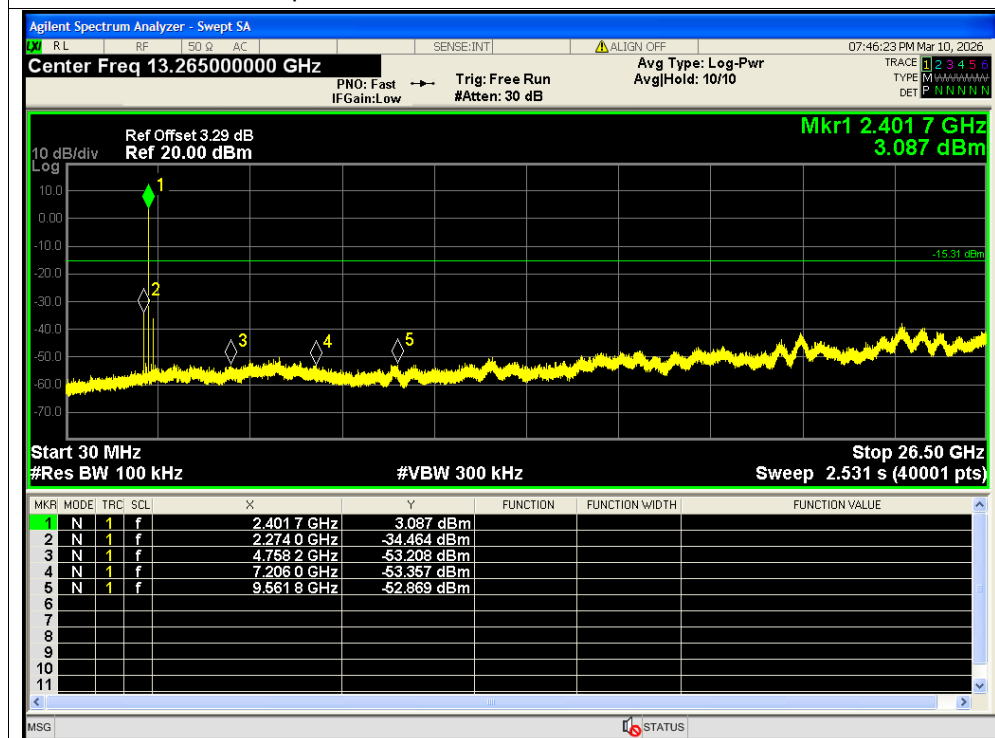


Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission

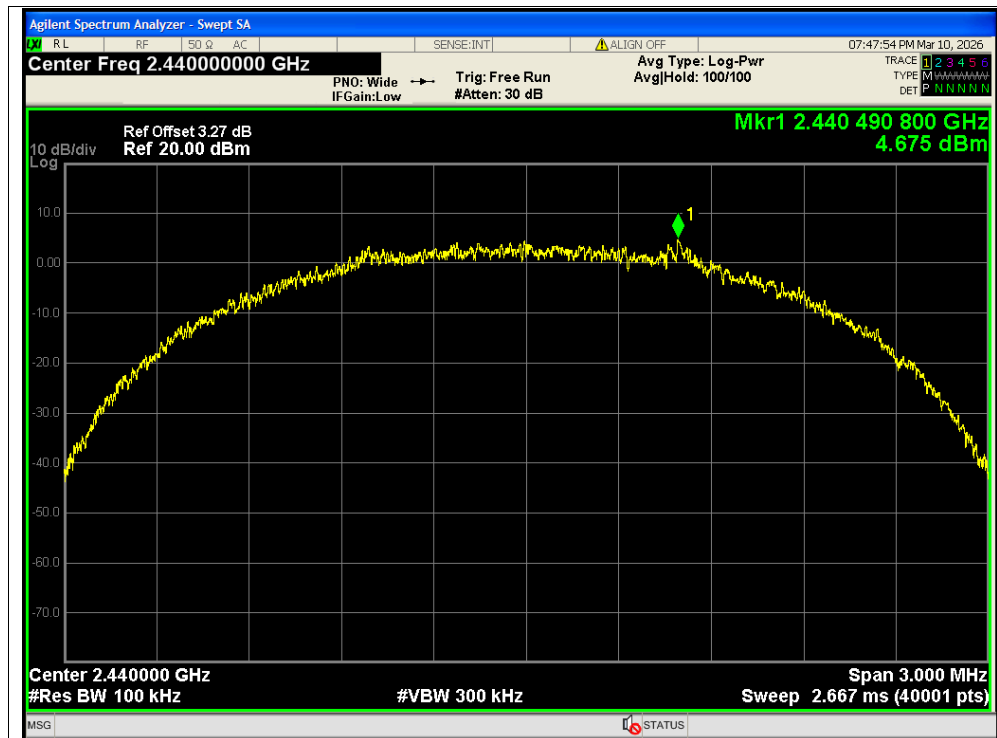


Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Ref

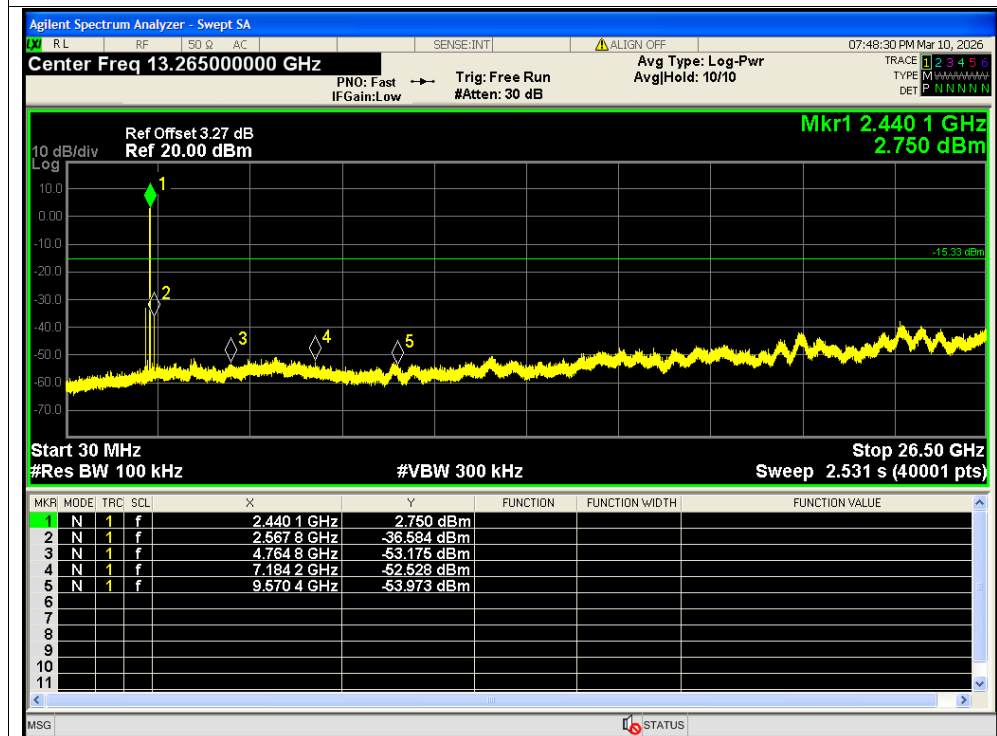


Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Emission

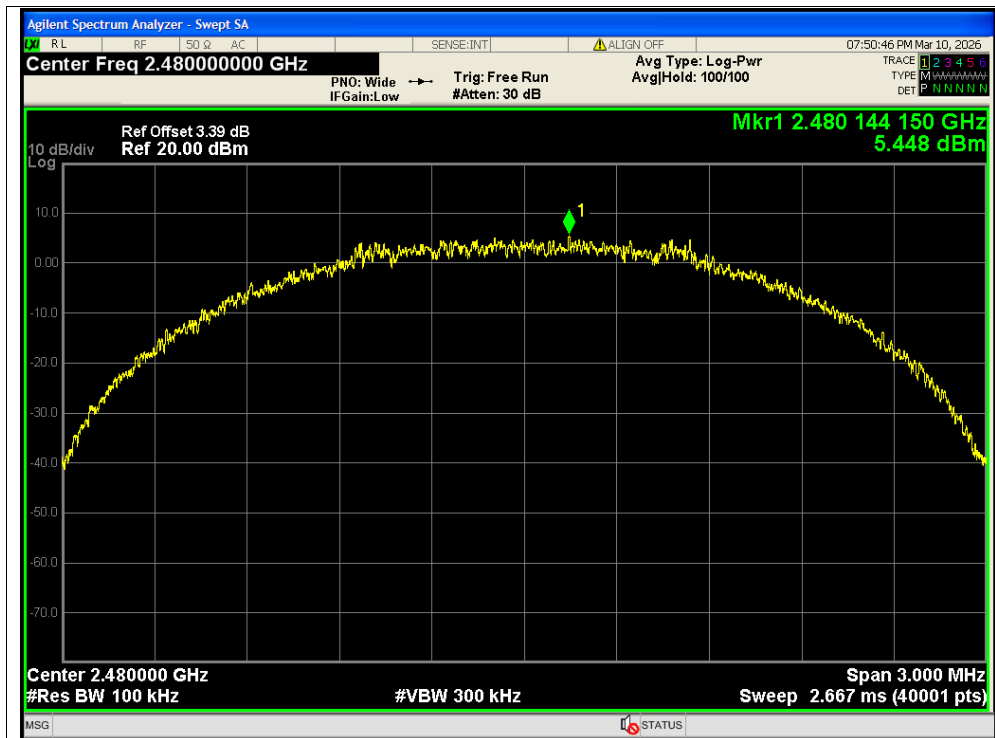


Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref

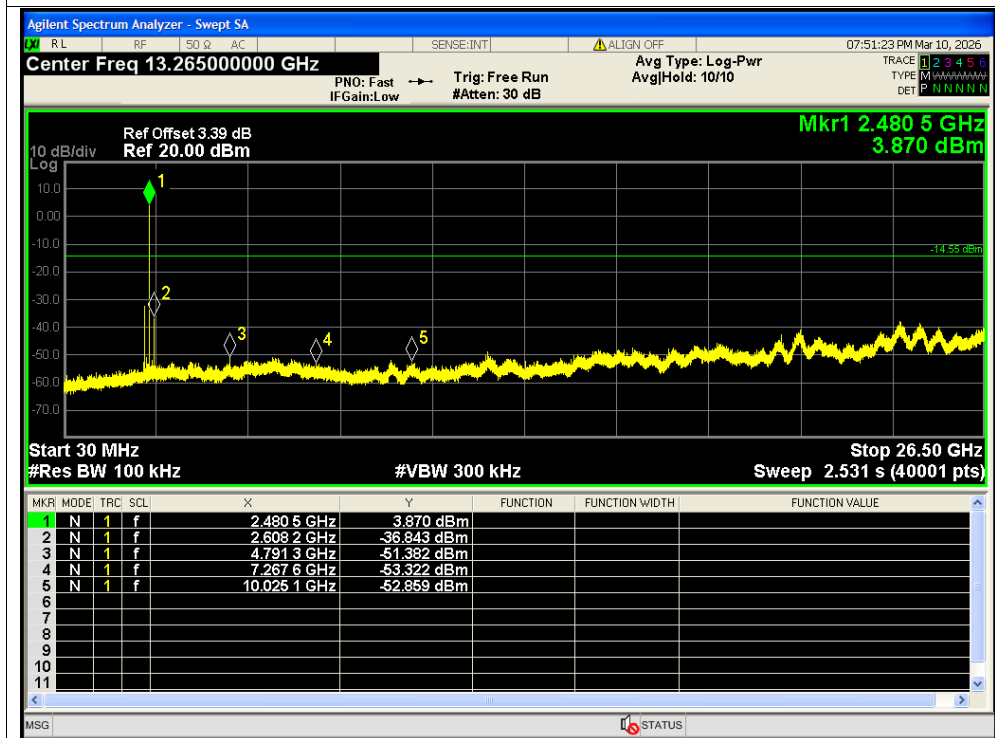


Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

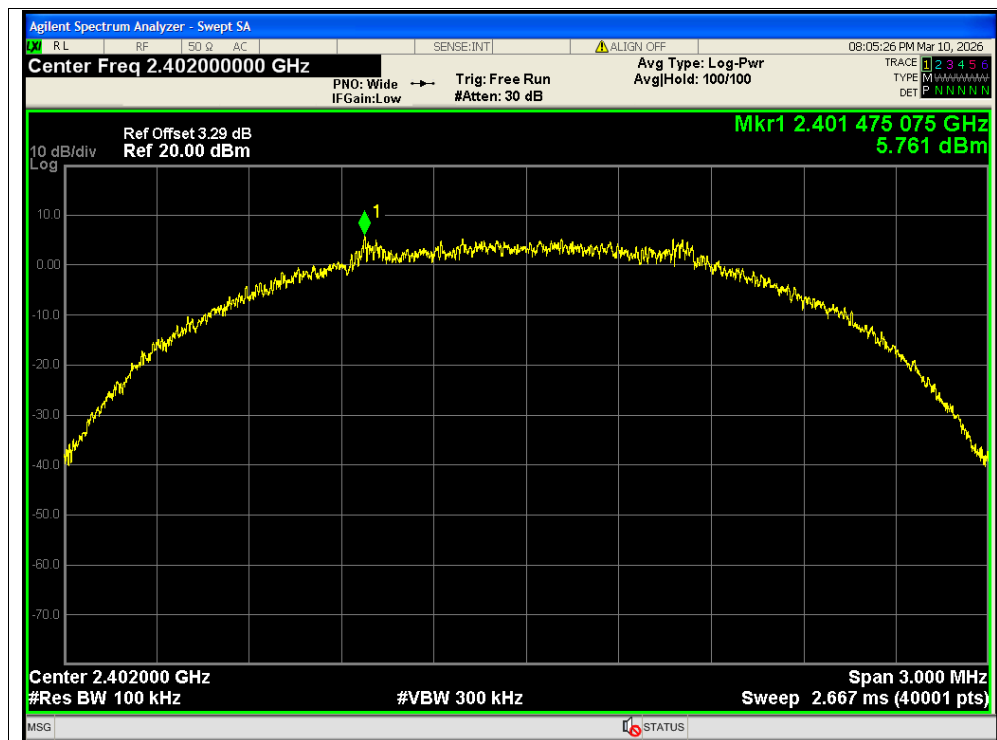


Tx. Spurious NVNT BLE 2M 2402MHz Ant2 Ref

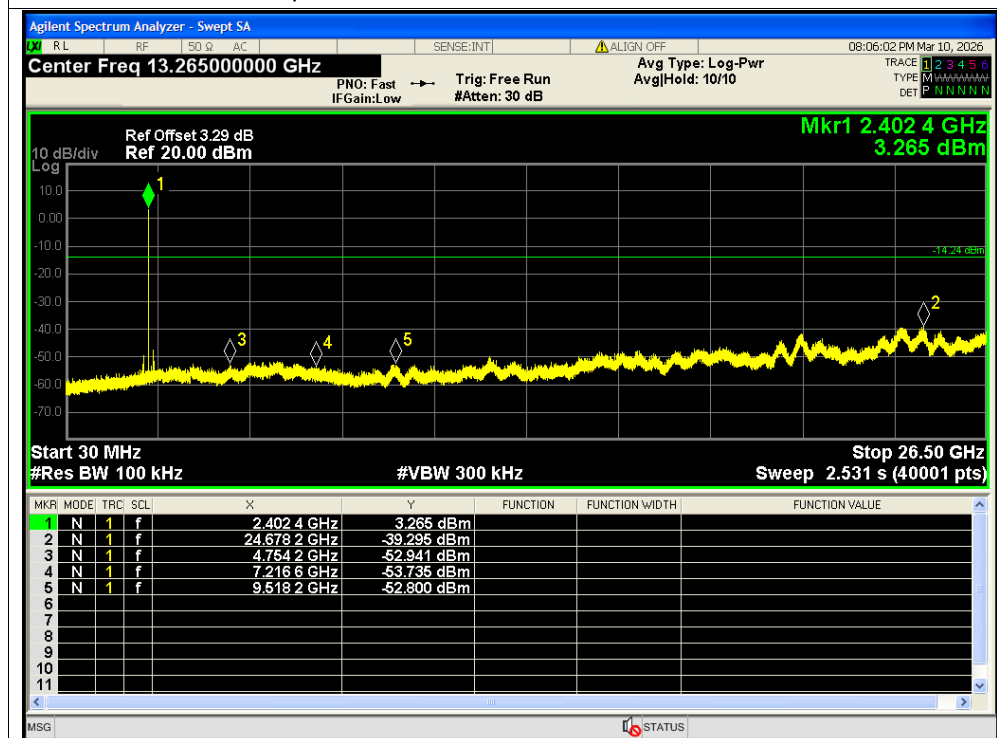


Tx. Spurious NVNT BLE 2M 2402MHz Ant2 Emission

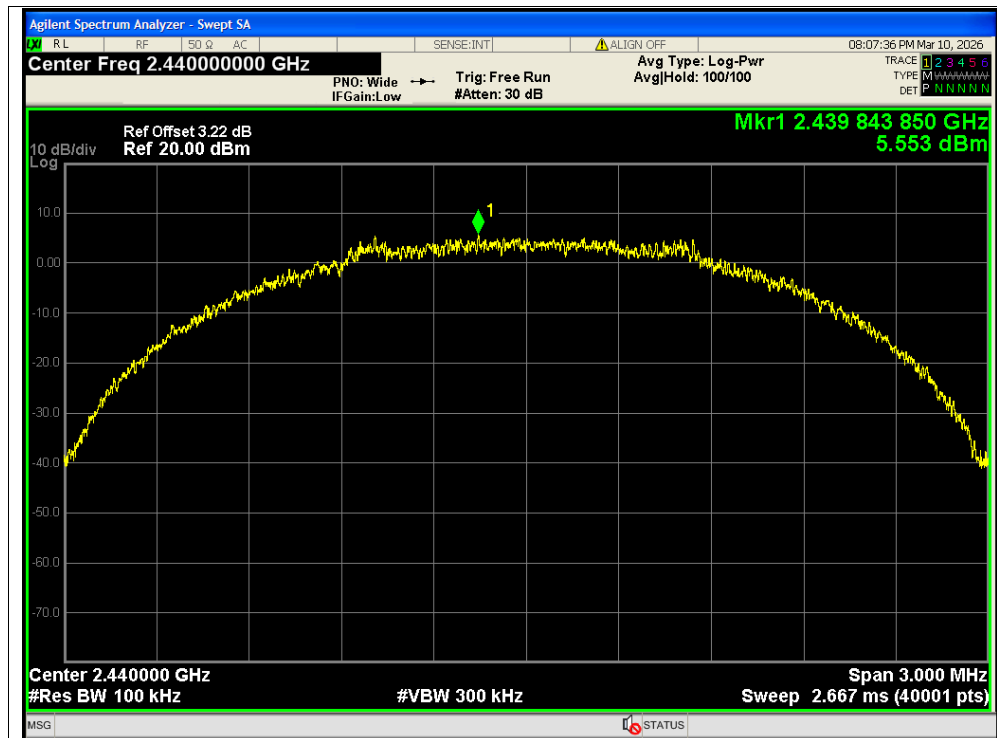


Tx. Spurious NVNT BLE 2M 2440MHz Ant2 Ref

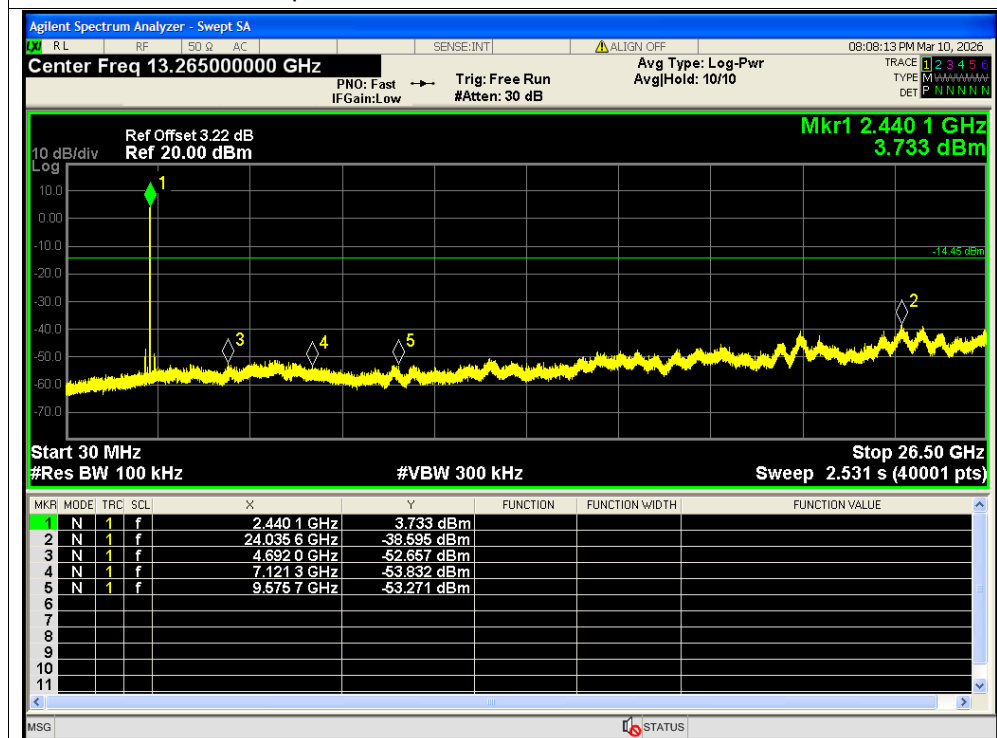

Tx. Spurious NVNT BLE 2M 2440MHz Ant2 Emission

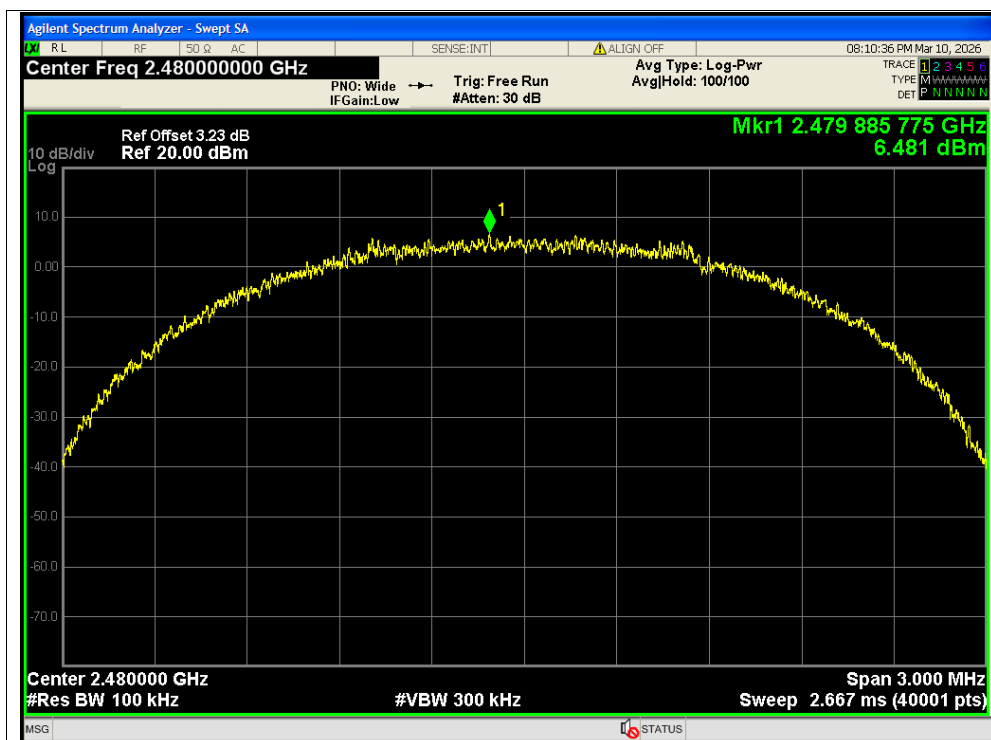


Tx. Spurious NVNT BLE 2M 2480MHz Ant2 Ref

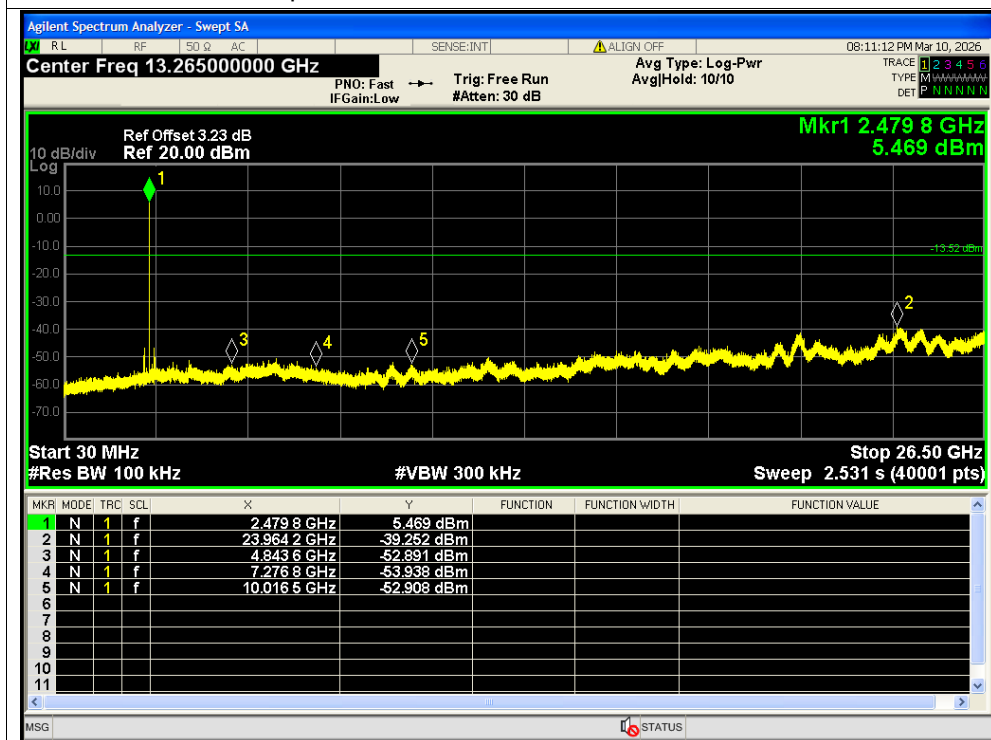


Tx. Spurious NVNT BLE 2M 2480MHz Ant2 Emission

**A.6. Band Edge**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-55.63	-20	Pass
NVNT	BLE 1M	2480	Ant1	-62.05	-20	Pass
NVNT	BLE 1M	2402	Ant2	-59.11	-20	Pass
NVNT	BLE 1M	2480	Ant2	-62.85	-20	Pass
NVNT	BLE 2M	2402	Ant1	-45.52	-20	Pass
NVNT	BLE 2M	2480	Ant1	-60.05	-20	Pass
NVNT	BLE 2M	2402	Ant2	-44.42	-20	Pass
NVNT	BLE 2M	2480	Ant2	-62.33	-20	Pass

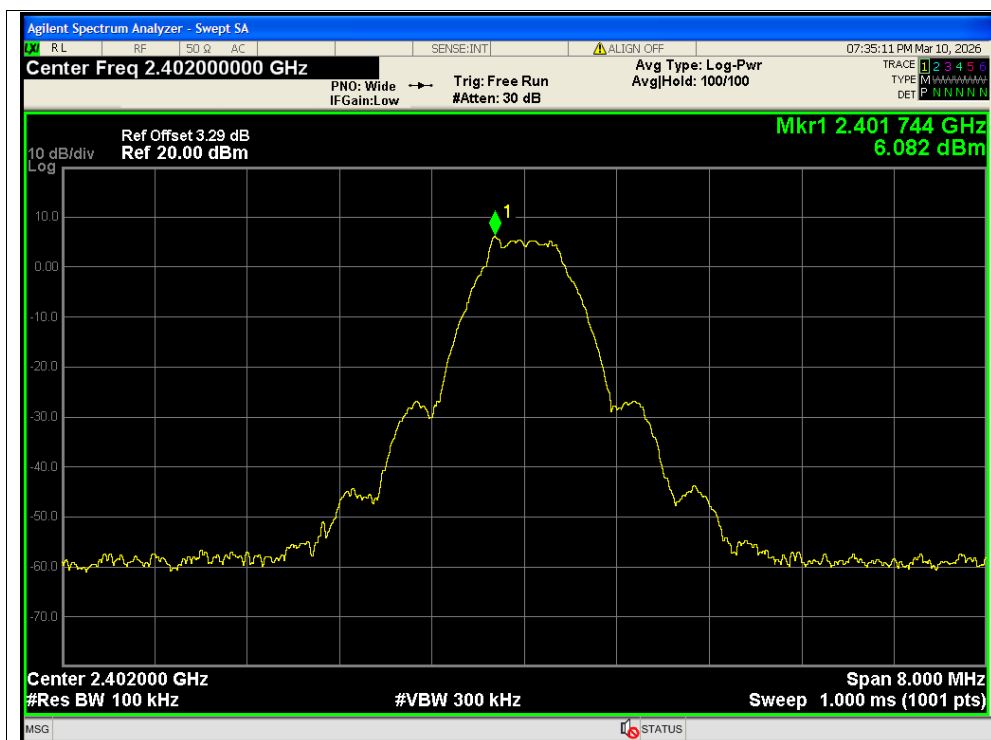


Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

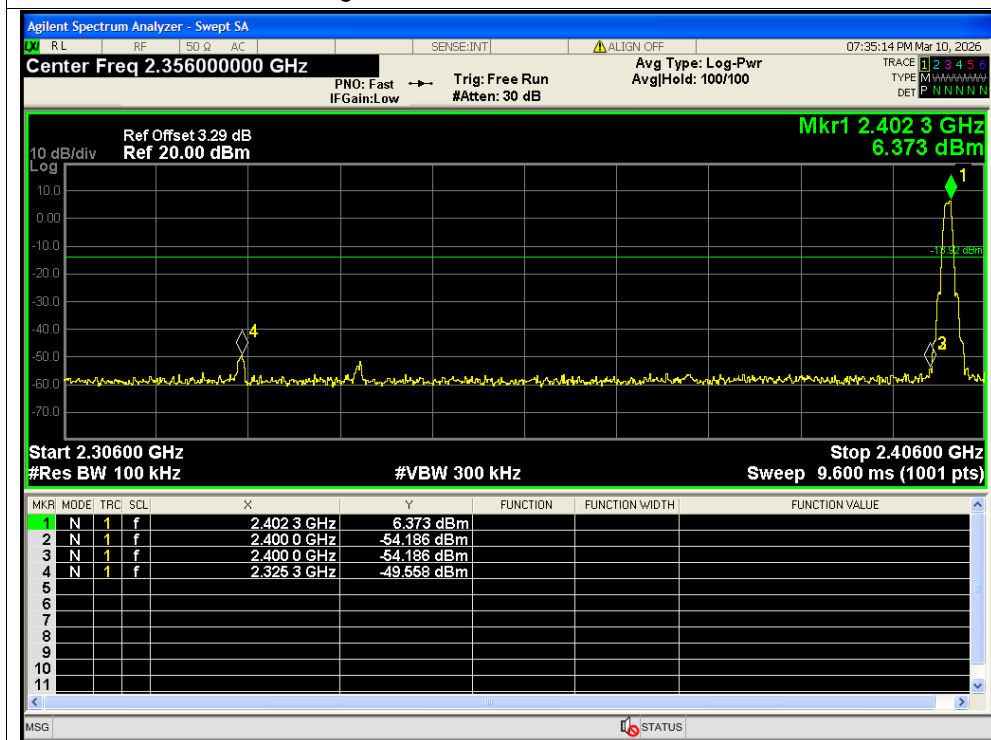


Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

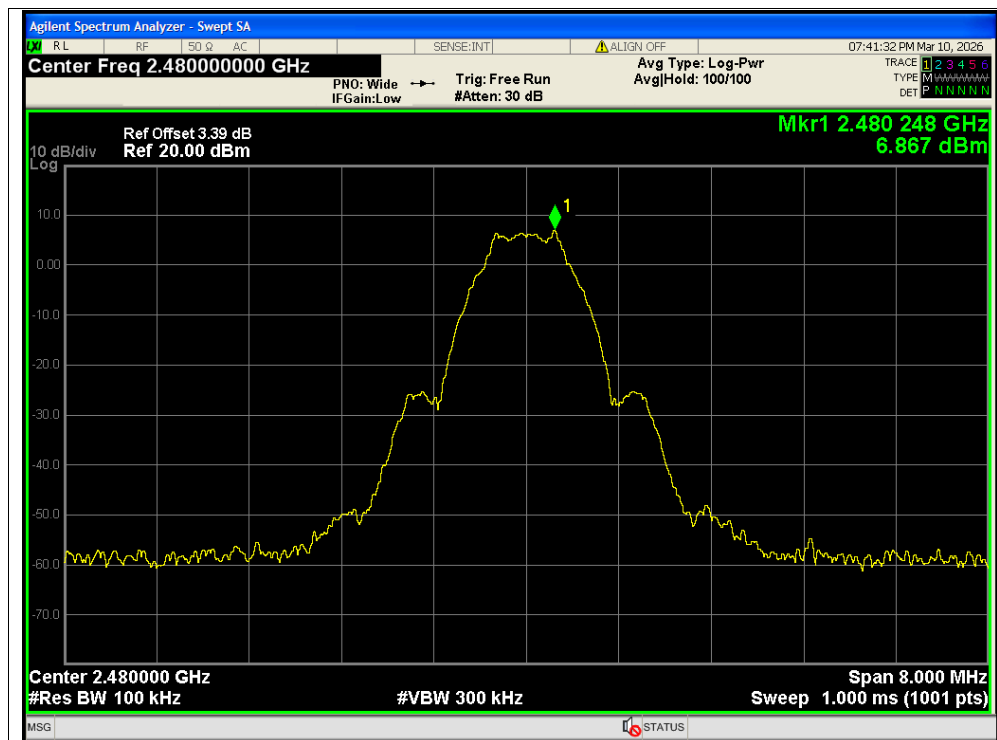


Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

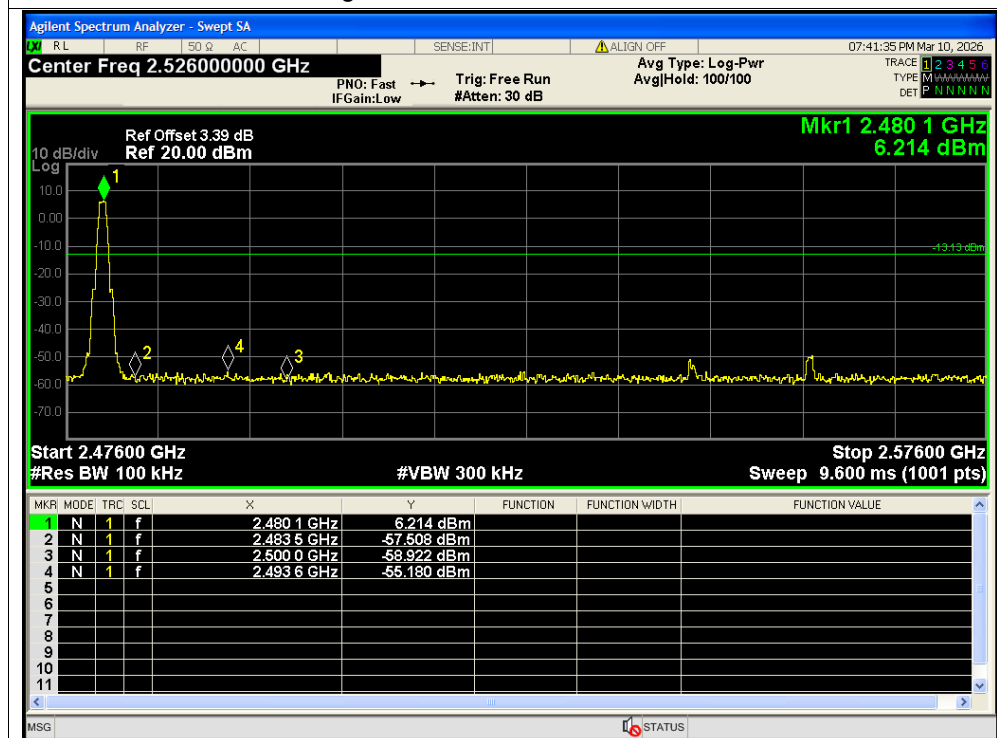


Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

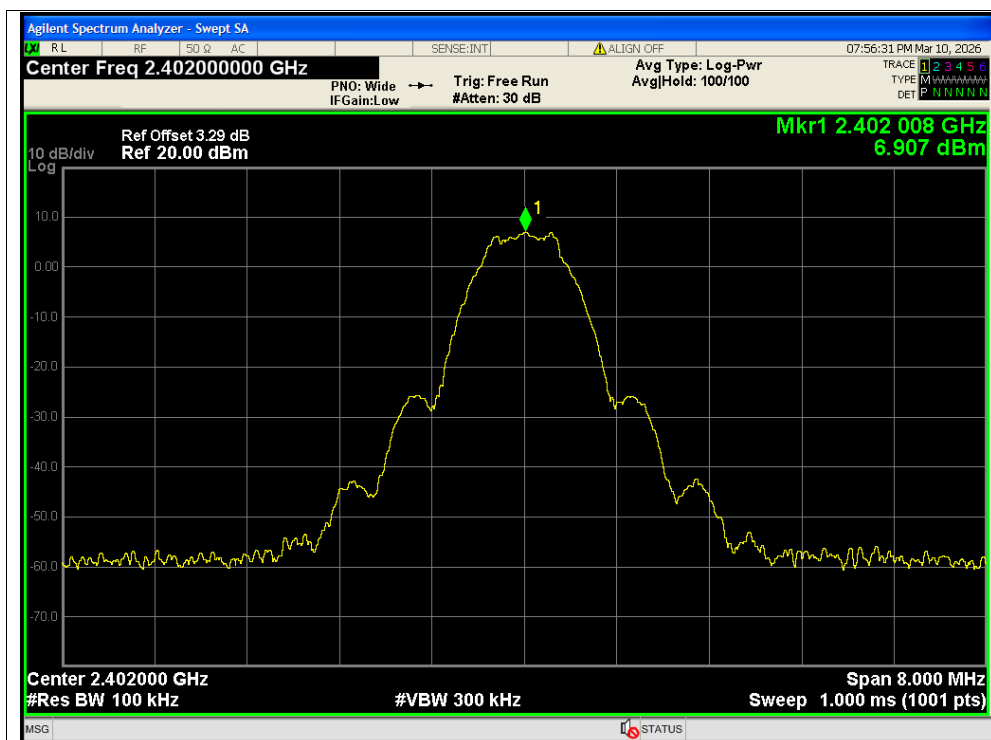


Band Edge NVNT BLE 1M 2402MHz Ant2 Ref

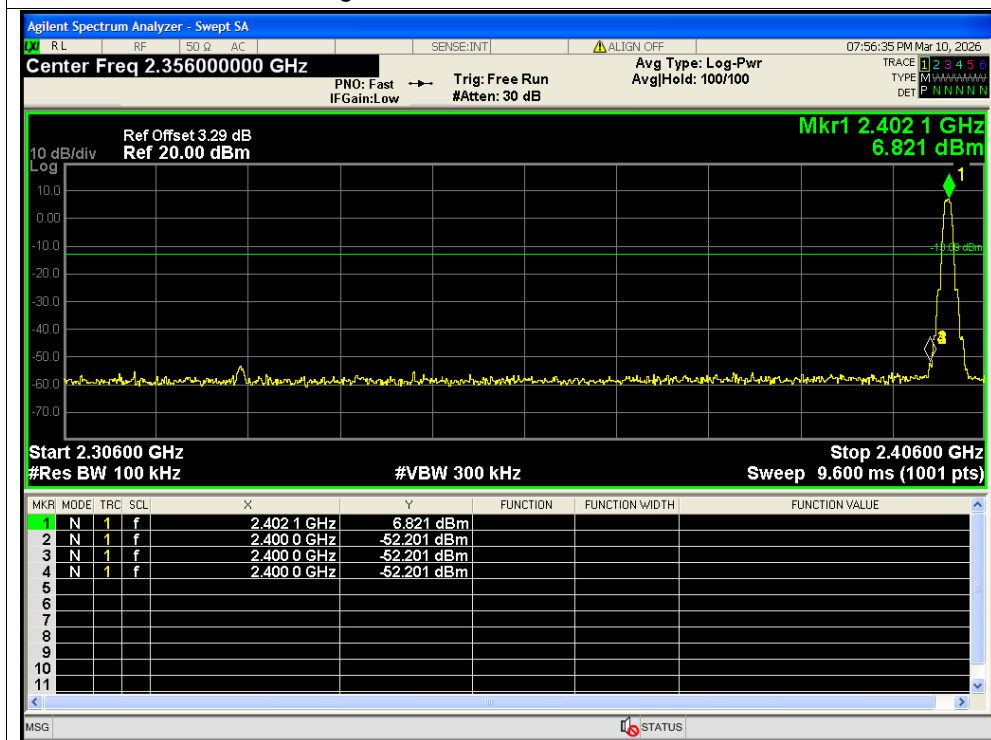


Band Edge NVNT BLE 1M 2402MHz Ant2 Emission

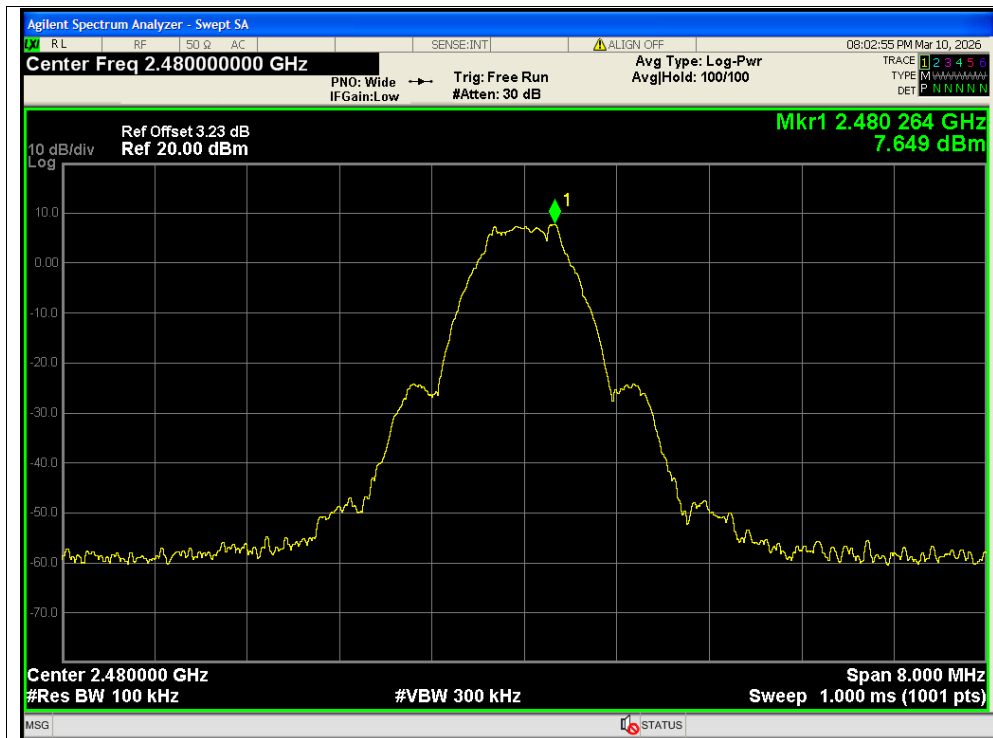


Band Edge NVNT BLE 1M 2480MHz Ant2 Ref

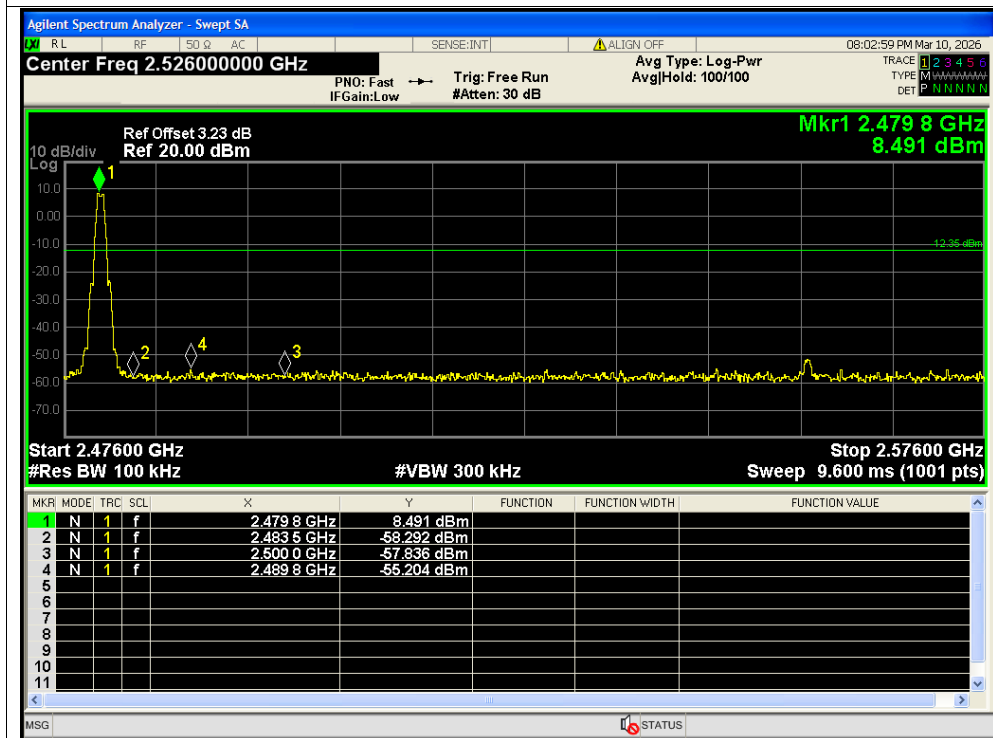


Band Edge NVNT BLE 1M 2480MHz Ant2 Emission

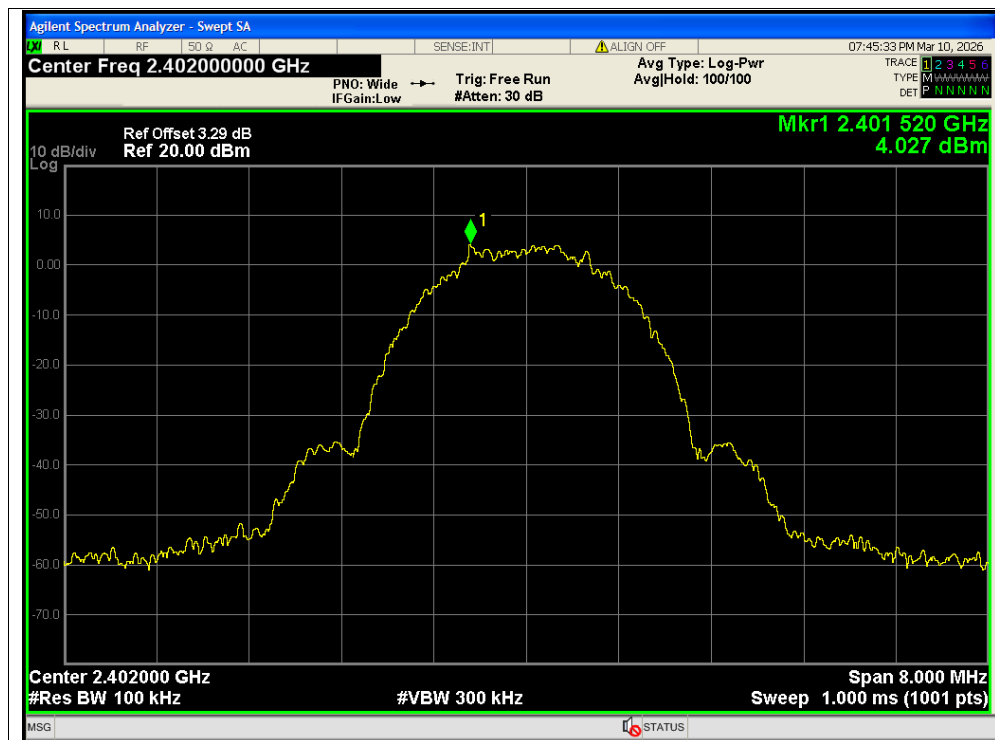


Band Edge NVNT BLE 2M 2402MHz Ant1 Ref

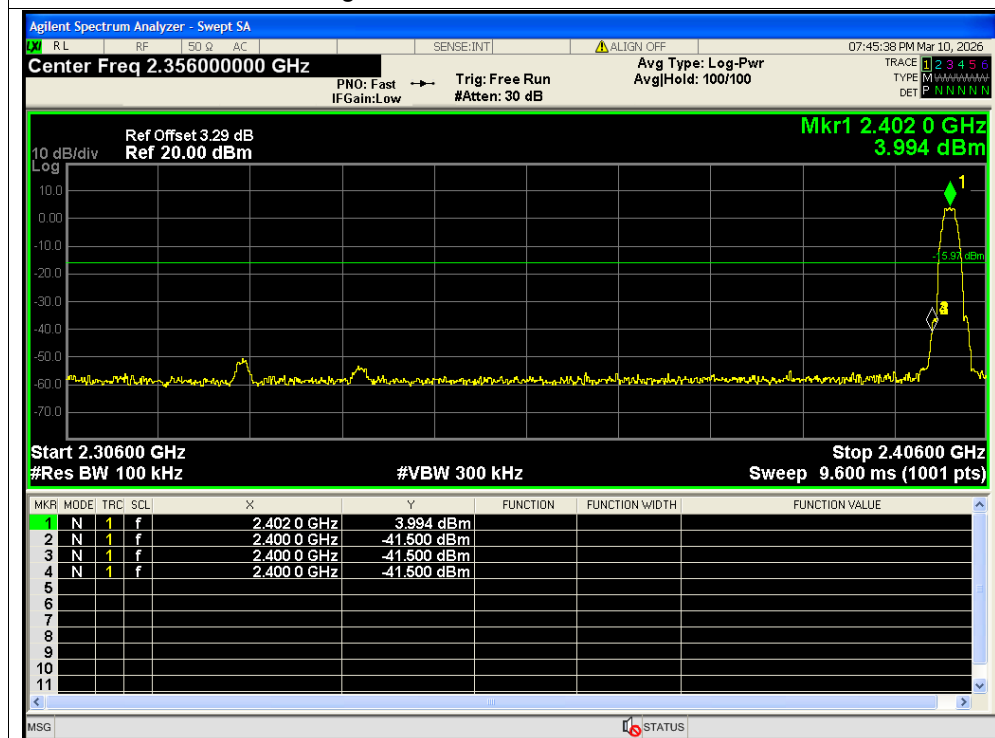


Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

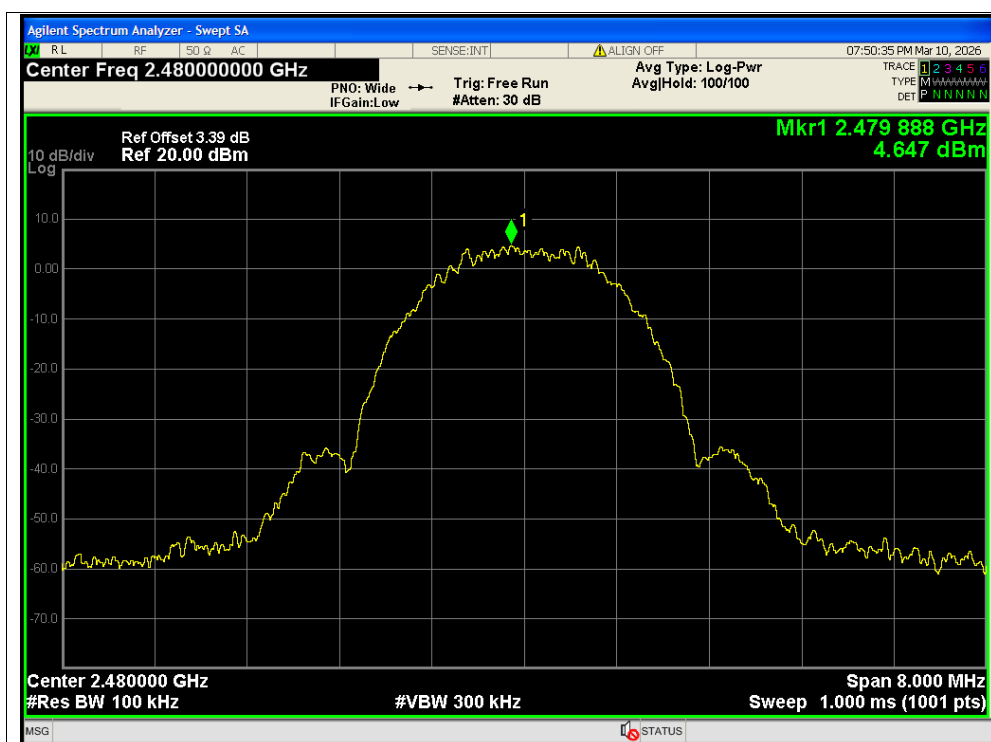


Band Edge NVNT BLE 2M 2480MHz Ant1 Ref

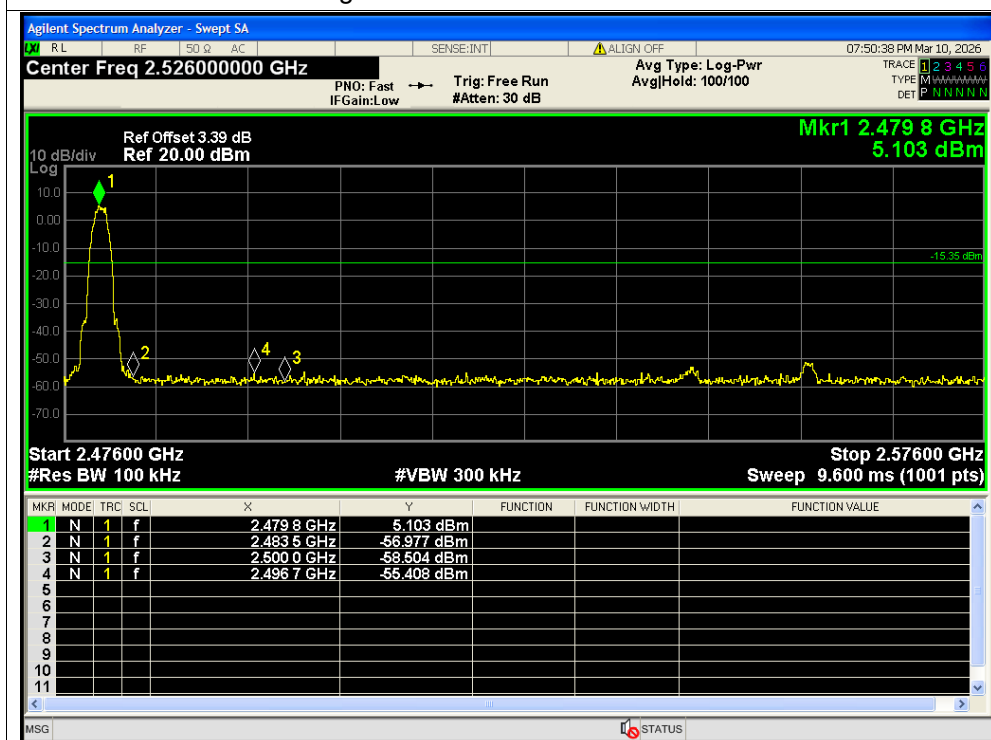


Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

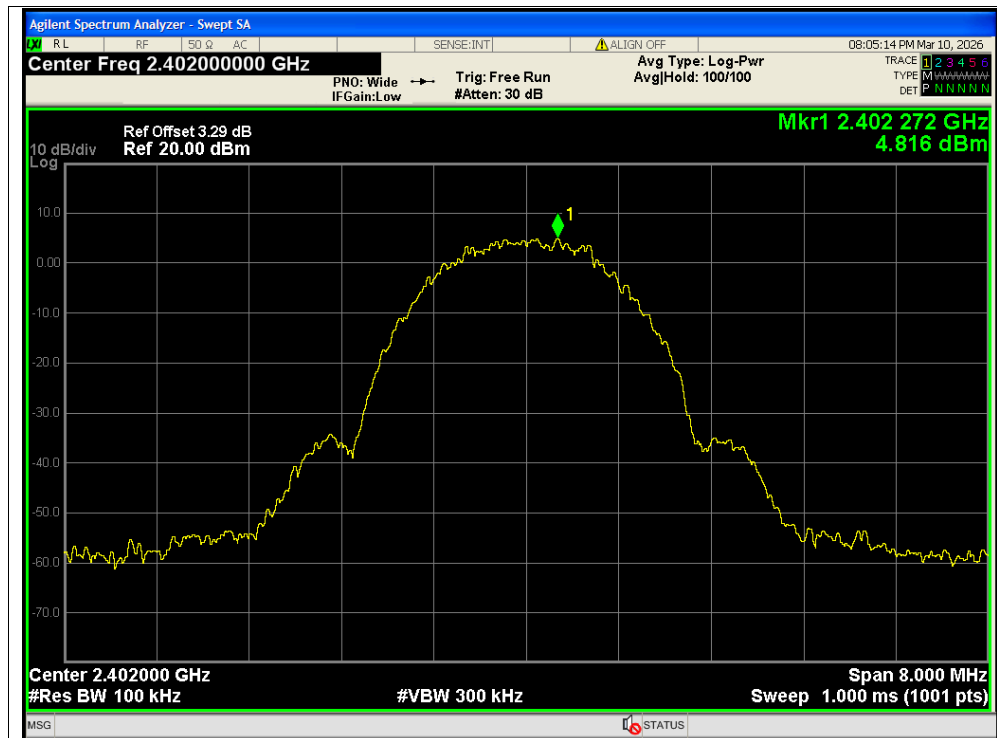


Band Edge NVNT BLE 2M 2402MHz Ant2 Ref

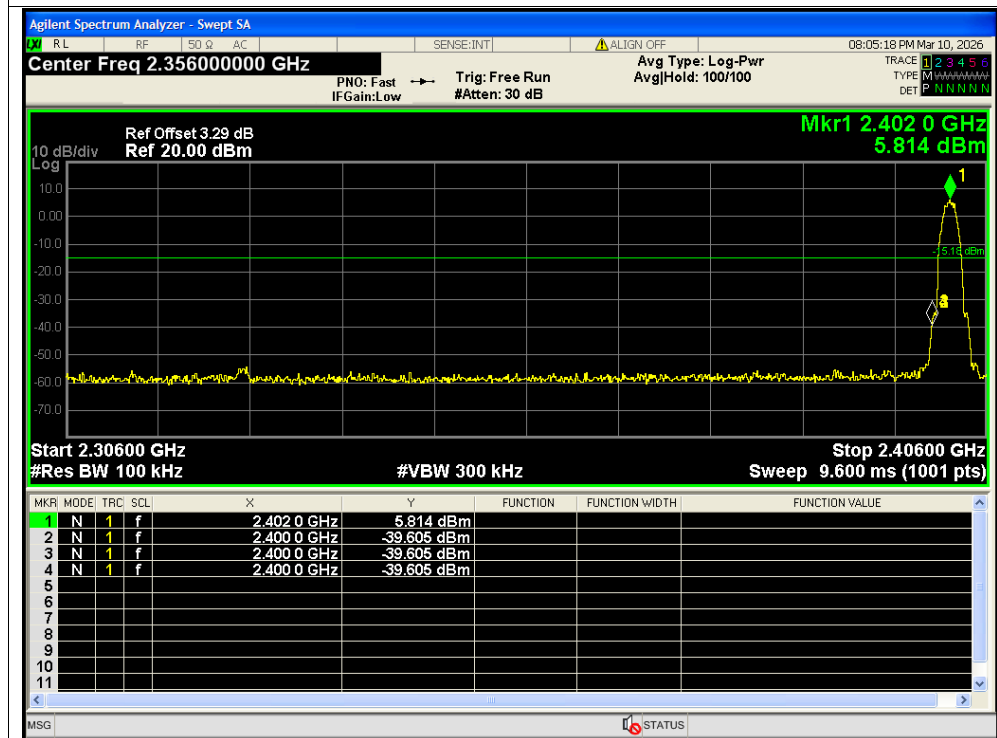

Band Edge NVNT BLE 2M 2402MHz Ant2 Emission

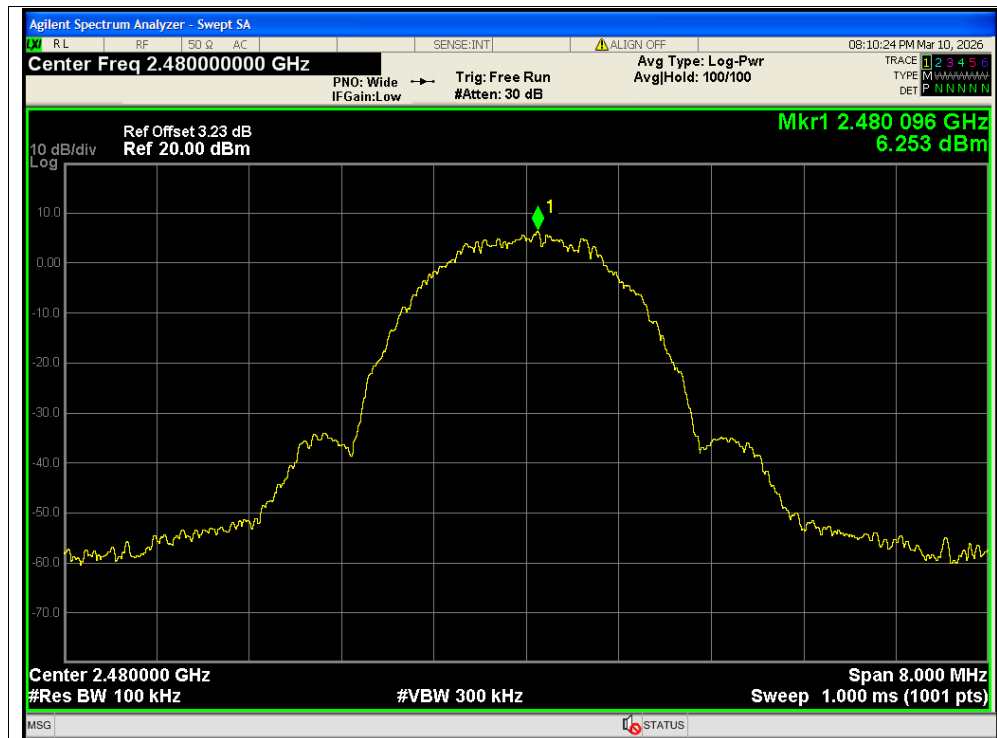


Band Edge NVNT BLE 2M 2480MHz Ant2 Ref

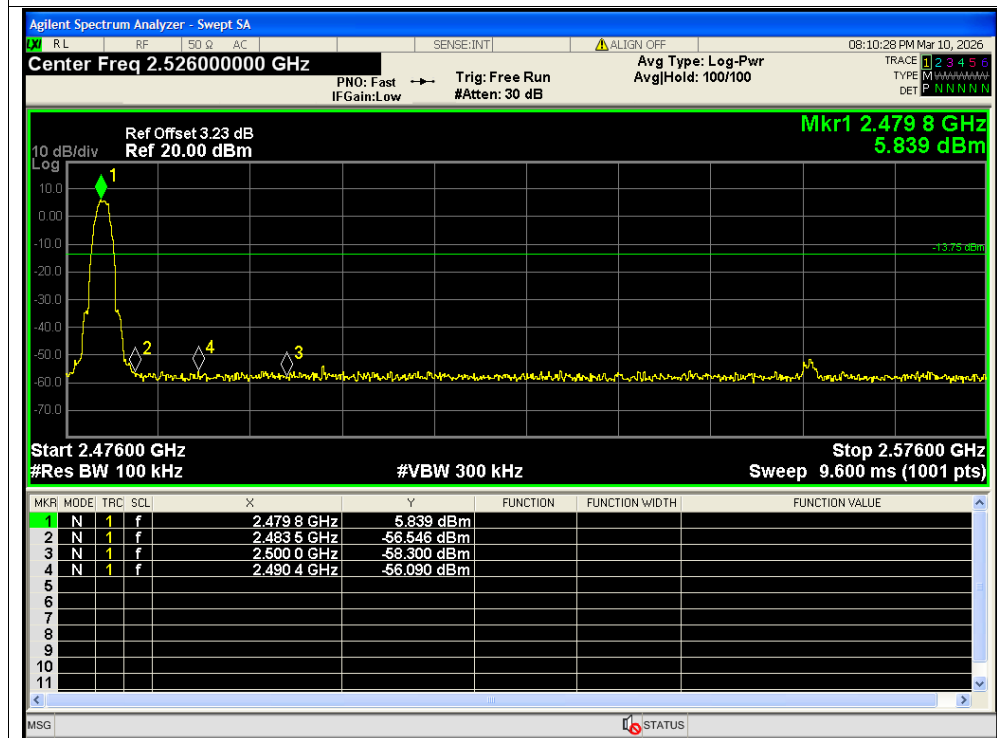


Band Edge NVNT BLE 2M 2480MHz Ant2 Emission

**A.7. Power Spectral Density**


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-6.06	0	-6.06	8	Pass
NVNT	BLE 1M	2440	Ant1	-6.13	0	-6.13	8	Pass
NVNT	BLE 1M	2480	Ant1	-4.32	0	-4.32	8	Pass
NVNT	BLE 1M	2402	Ant2	-4.33	0	-4.33	8	Pass
NVNT	BLE 1M	2440	Ant2	-3.03	0	-3.03	8	Pass
NVNT	BLE 1M	2480	Ant2	-3.16	0	-3.16	8	Pass
NVNT	BLE 2M	2402	Ant1	-8.01	0	-8.01	8	Pass
NVNT	BLE 2M	2440	Ant1	-7.75	0	-7.75	8	Pass
NVNT	BLE 2M	2480	Ant1	-7.14	0	-7.14	8	Pass
NVNT	BLE 2M	2402	Ant2	-7.41	0	-7.41	8	Pass
NVNT	BLE 2M	2440	Ant2	-7.11	0	-7.11	8	Pass
NVNT	BLE 2M	2480	Ant2	-6.65	0	-6.65	8	Pass

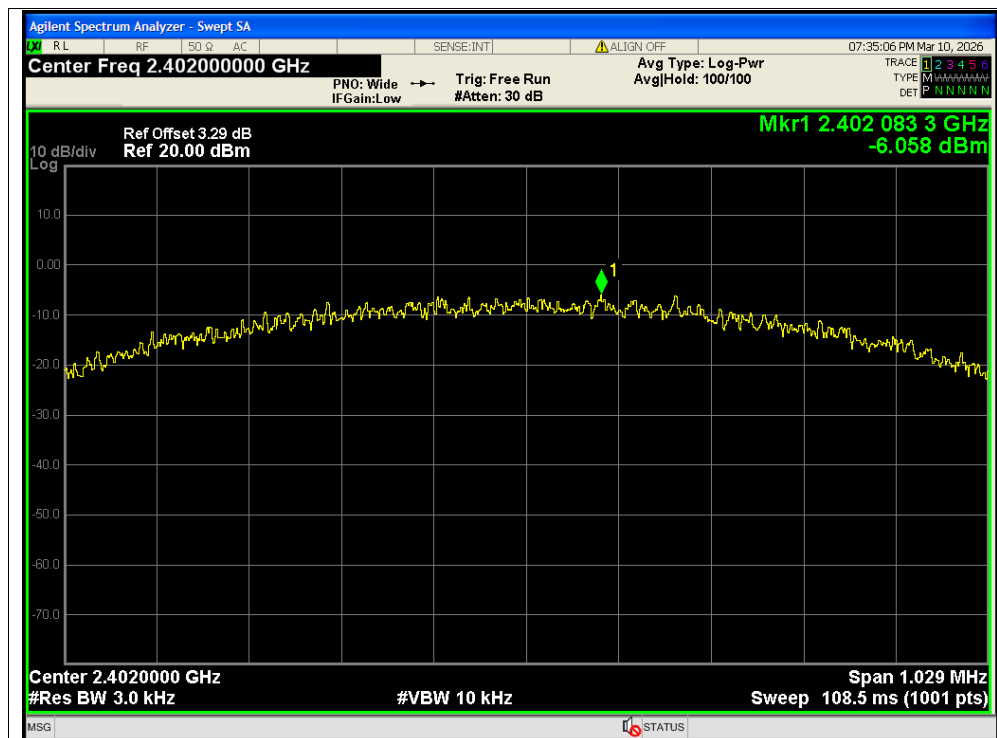


PSD NVNT BLE 1M 2402MHz Ant1

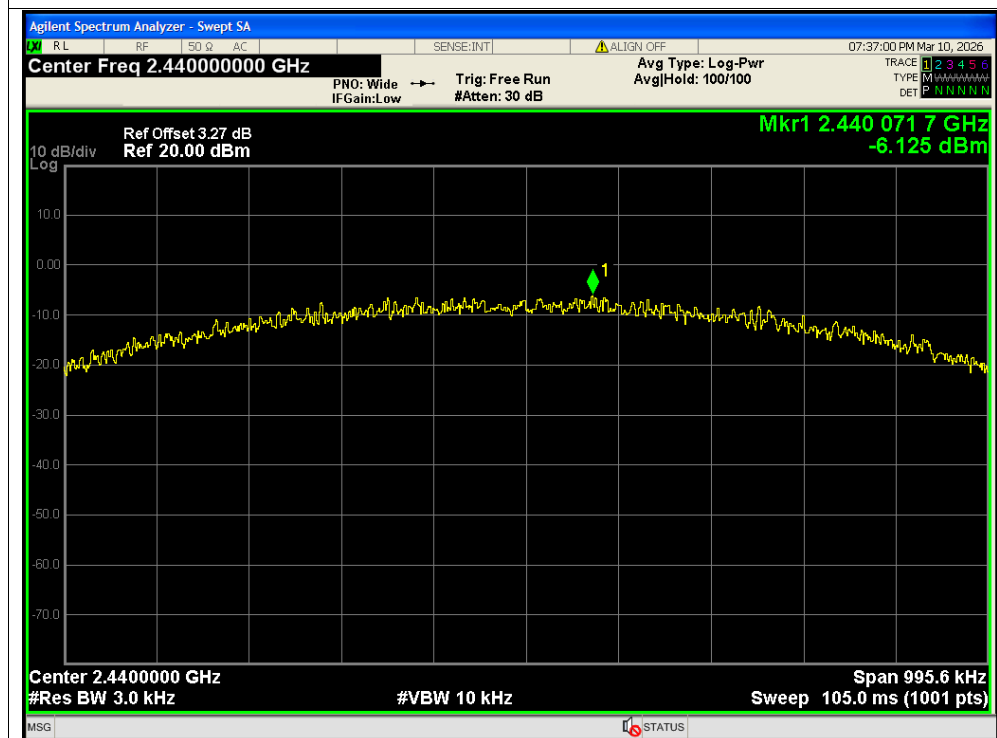


PSD NVNT BLE 1M 2440MHz Ant1

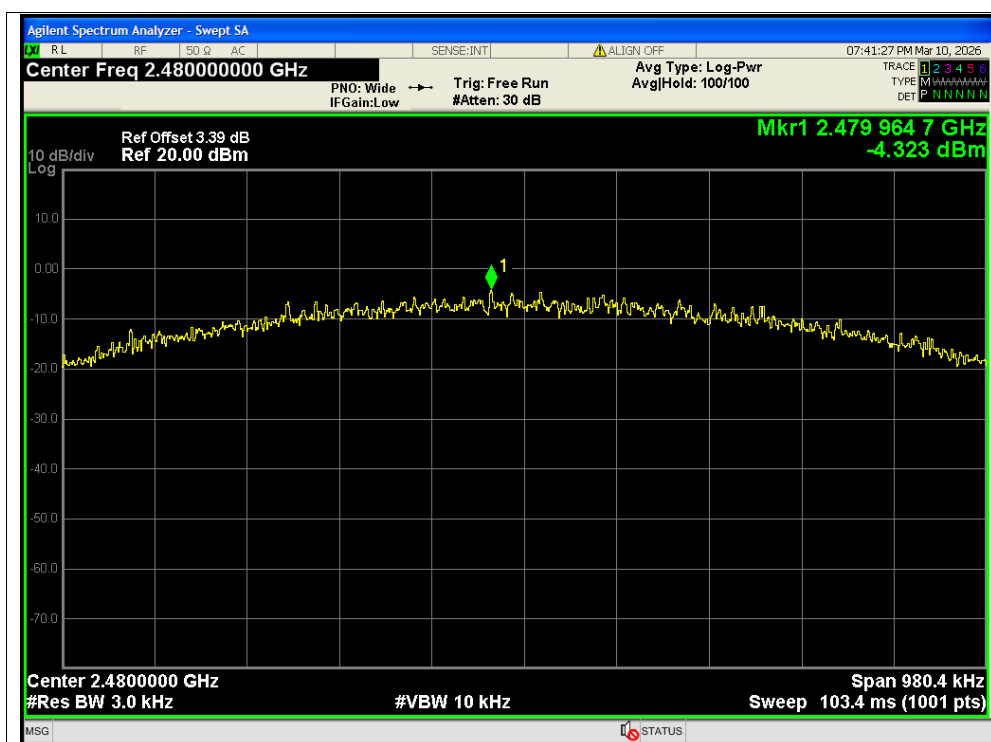


PSD NVNT BLE 1M 2480MHz Ant1

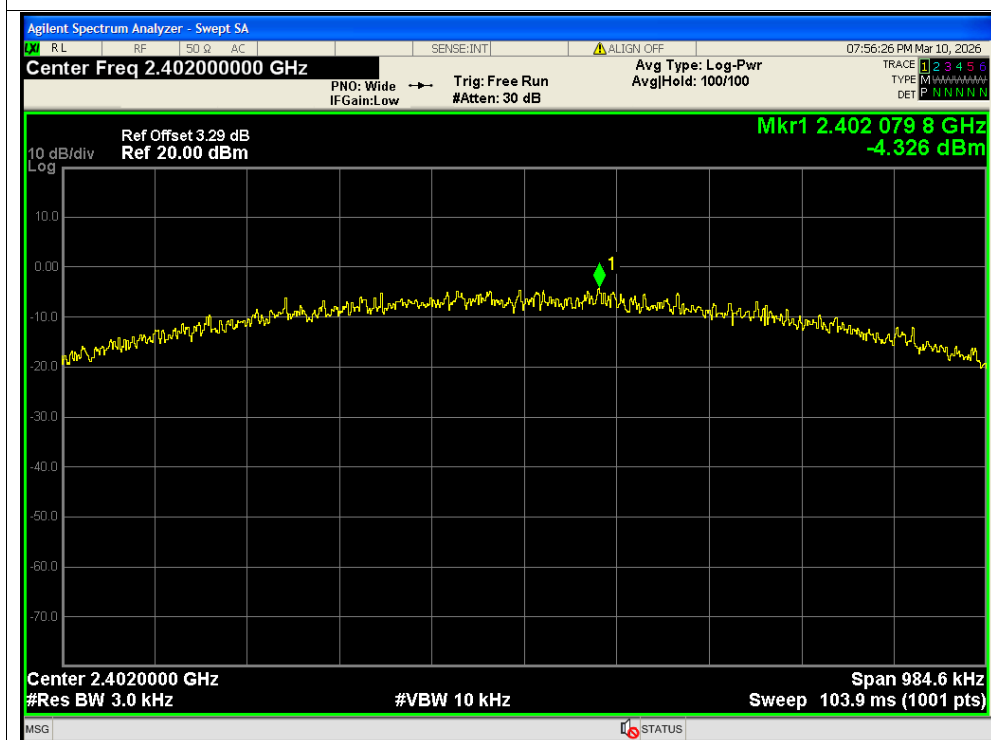


PSD NVNT BLE 1M 2402MHz Ant2

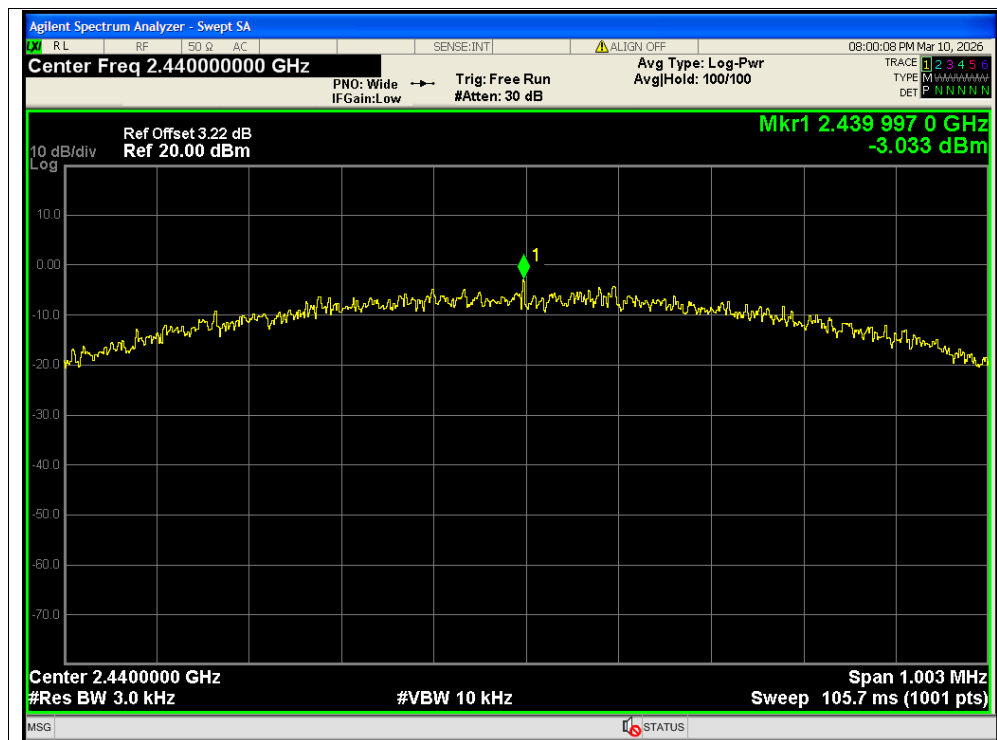


PSD NVNT BLE 1M 2440MHz Ant2

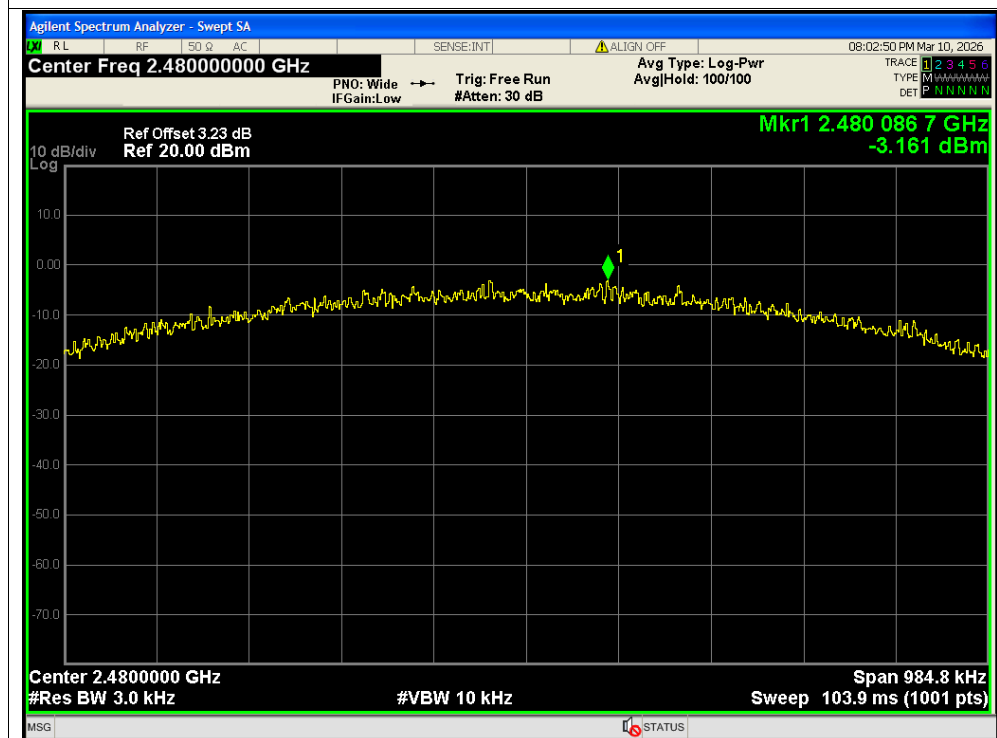


PSD NVNT BLE 1M 2480MHz Ant2

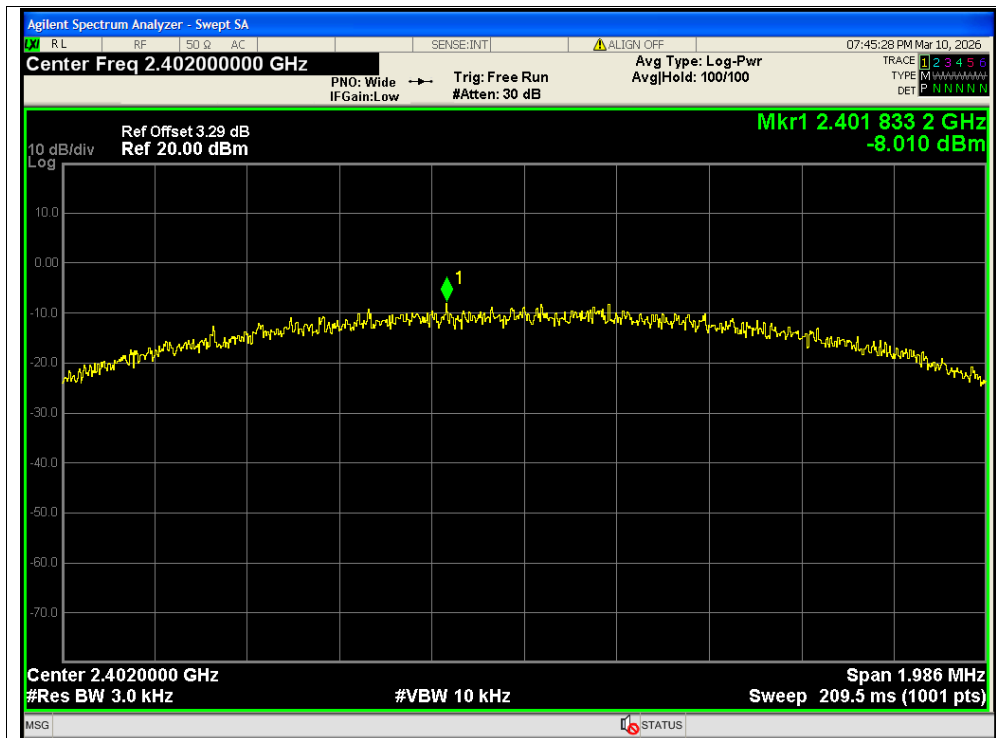


PSD NVNT BLE 2M 2402MHz Ant1

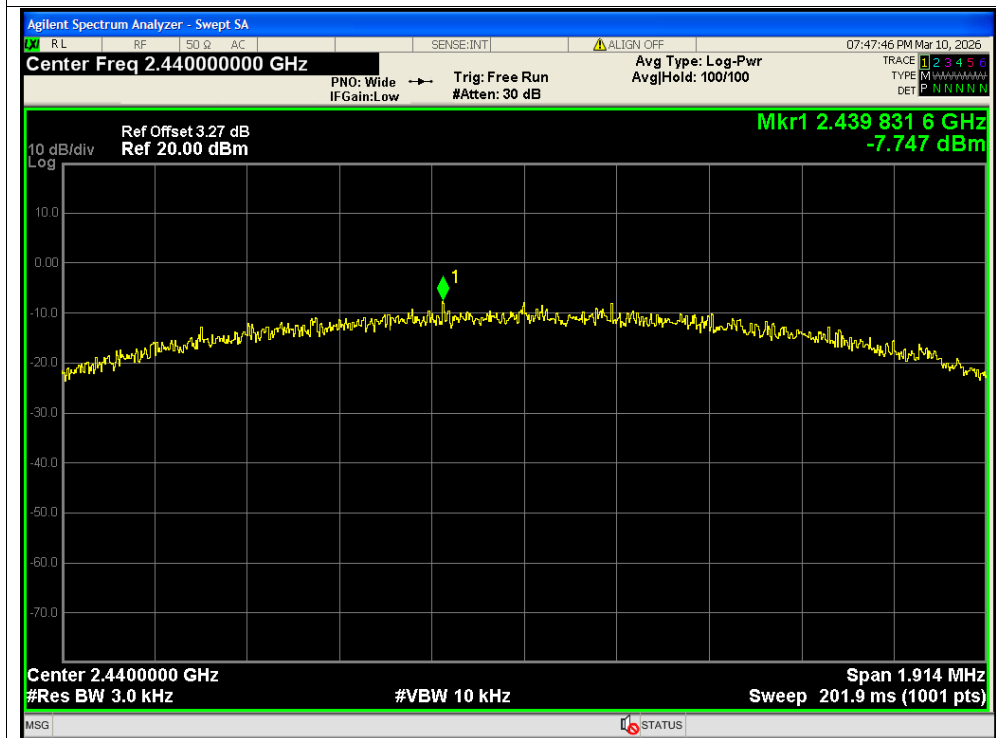


PSD NVNT BLE 2M 2440MHz Ant1

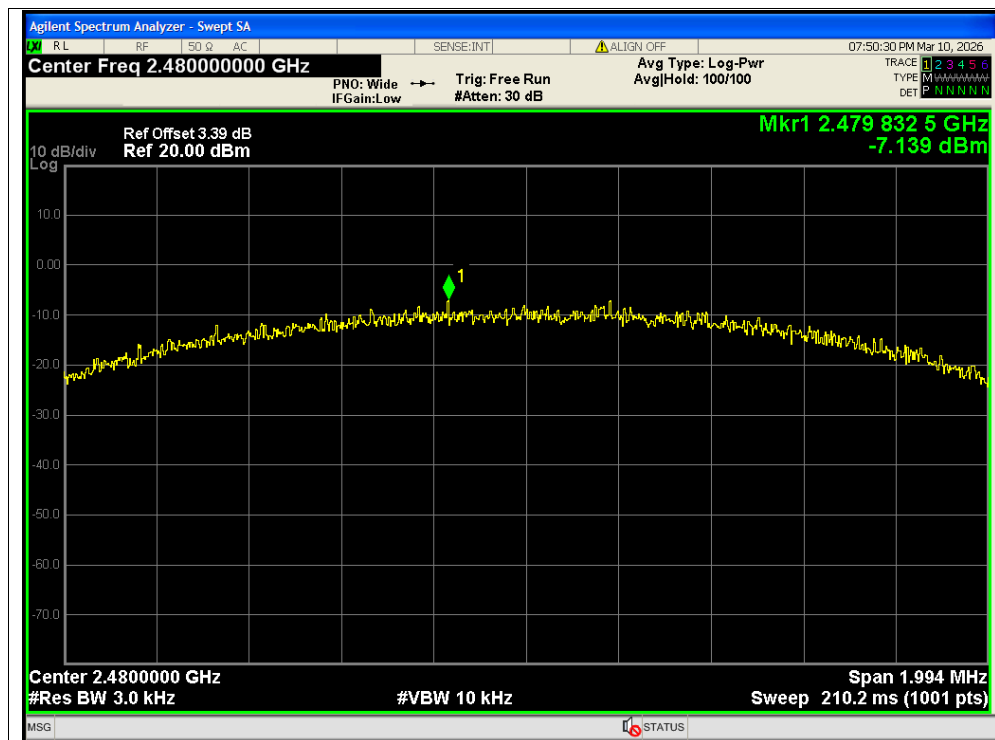


PSD NVNT BLE 2M 2480MHz Ant1

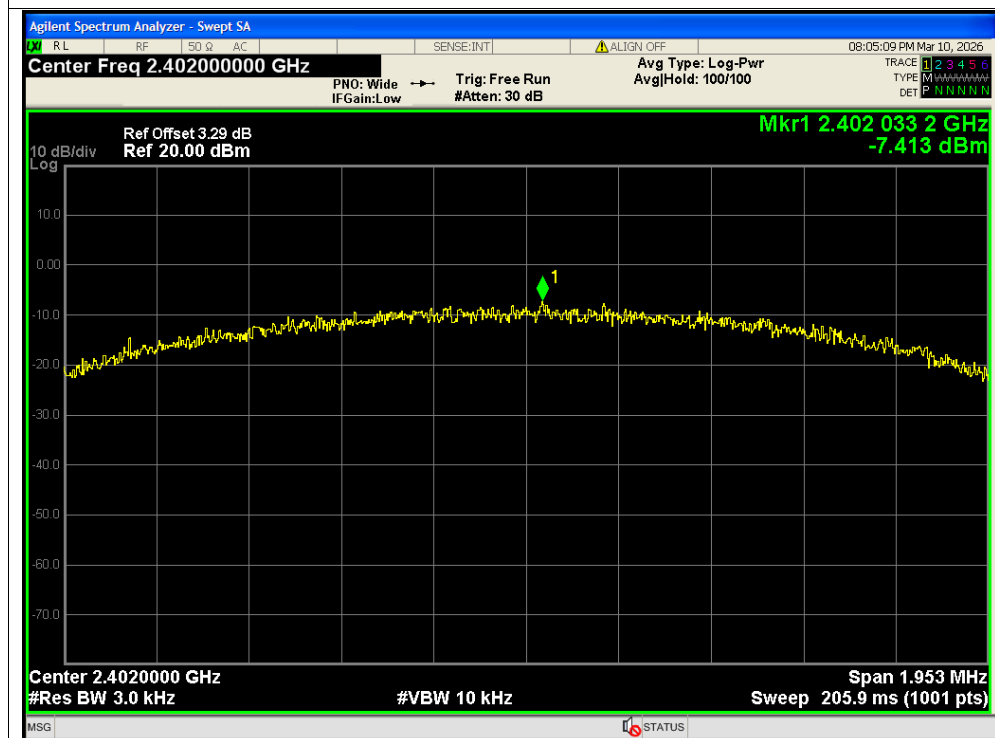

PSD NVNT BLE 2M 2402MHz Ant2

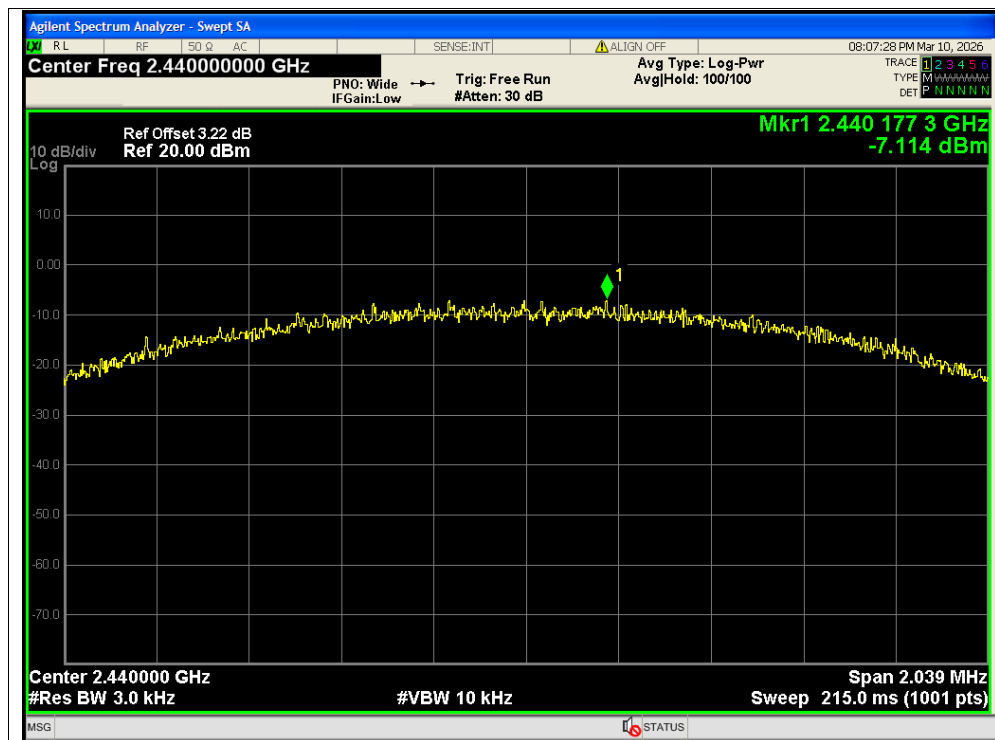

PSD NVNT BLE 2M 2440MHz Ant2

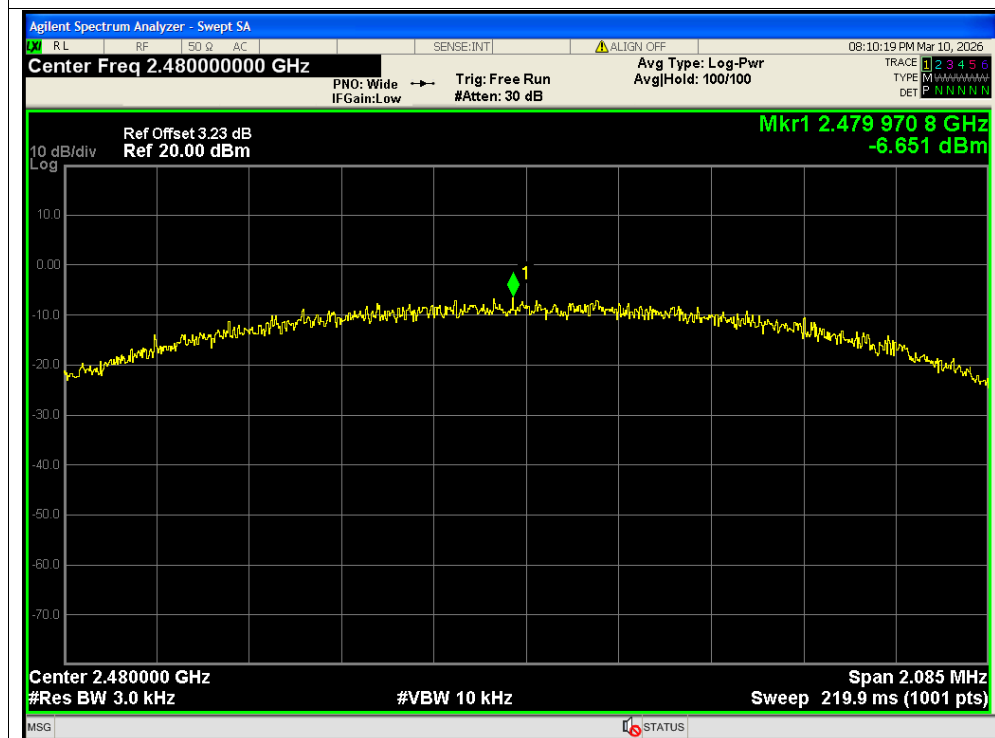

PSD NVNT BLE 2M 2480MHz Ant2




A.8. Restricted Frequency Bands

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition was recorded in this test report.


1Mbps

Plot for Channel 0

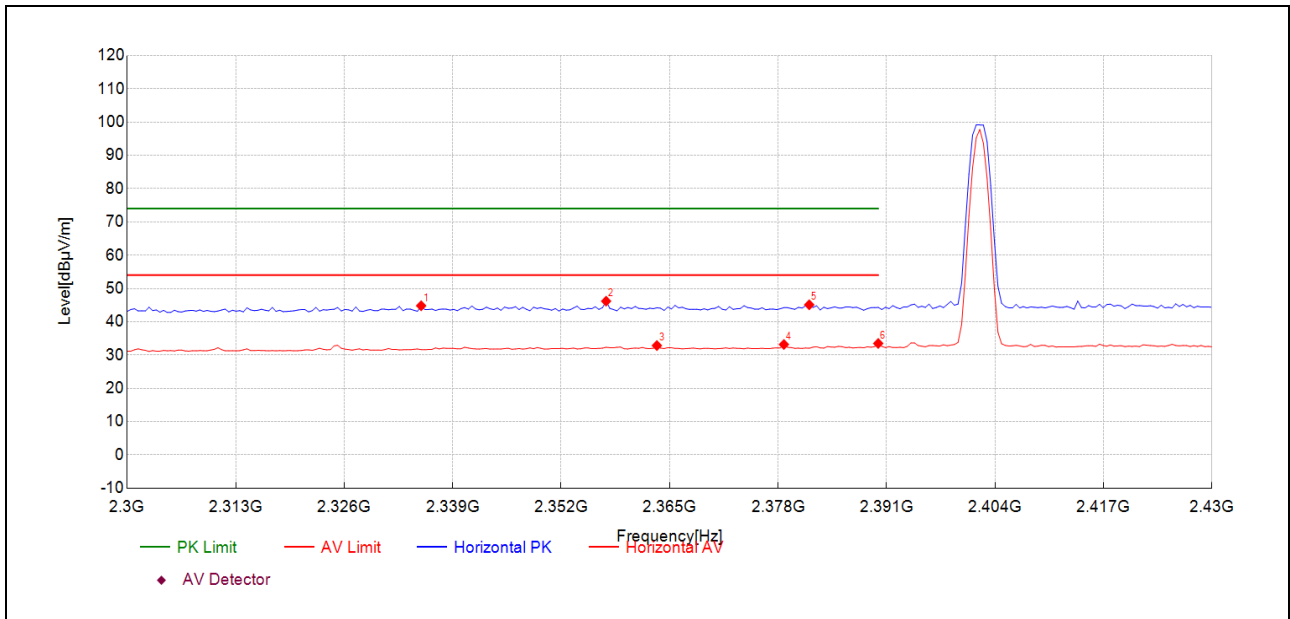

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2335.22	12.5	44.80	32.260	74.00	29.20	165	320	PK	PASS
2357.39	13.8	46.18	32.420	74.00	27.82	165	86	PK	PASS
2363.48	0.4	32.84	32.450	54.00	21.16	165	105	AV	PASS
2378.70	0.6	33.15	32.510	54.00	20.85	165	96	AV	PASS
2381.74	12.6	45.09	32.510	74.00	28.91	165	152	PK	PASS
2390.00	0.9	33.47	32.540	54.00	20.53	165	67	AV	PASS


Plot for Channel 39

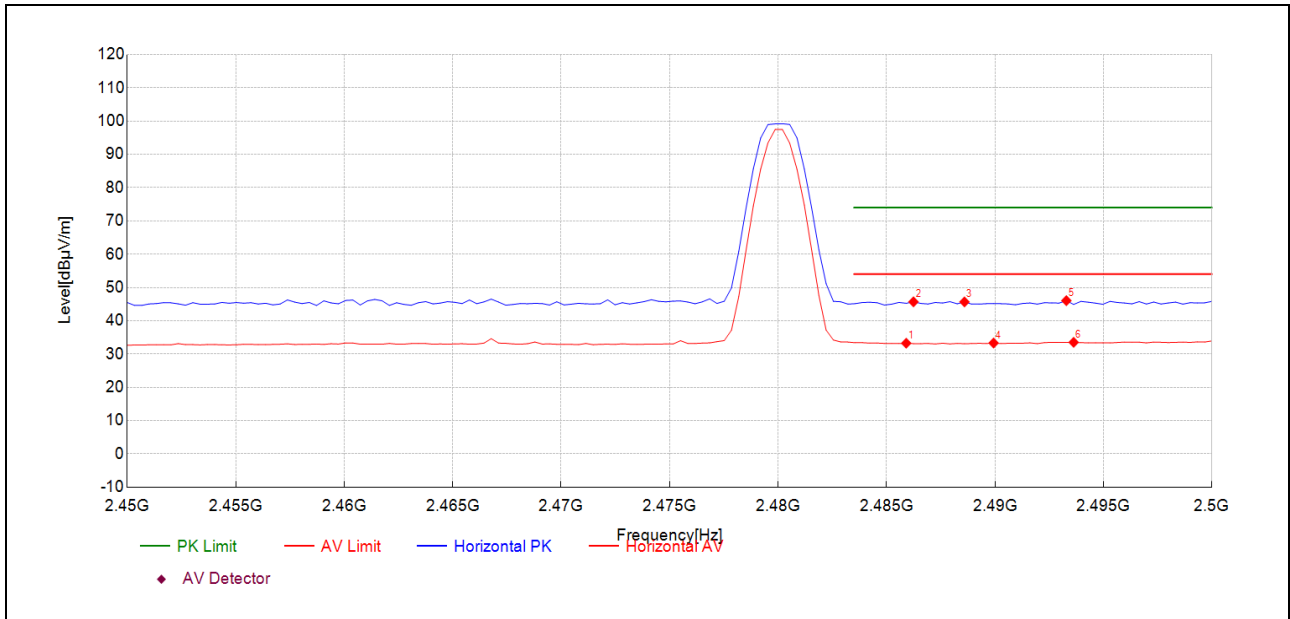

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2485.91	0.2	33.24	33.030	54.00	20.76	165	80	AV	PASS
2486.24	12.7	45.68	33.030	74.00	28.32	165	44	PK	PASS
2488.59	12.6	45.65	33.020	74.00	28.35	165	25	PK	PASS
2489.93	0.3	33.30	33.020	54.00	20.70	165	53	AV	PASS
2493.29	13.0	46.04	33.010	74.00	27.96	165	4	PK	PASS
2493.62	0.5	33.51	33.010	54.00	20.49	165	53	AV	PASS

**2Mbps**


Plot for Channel 0

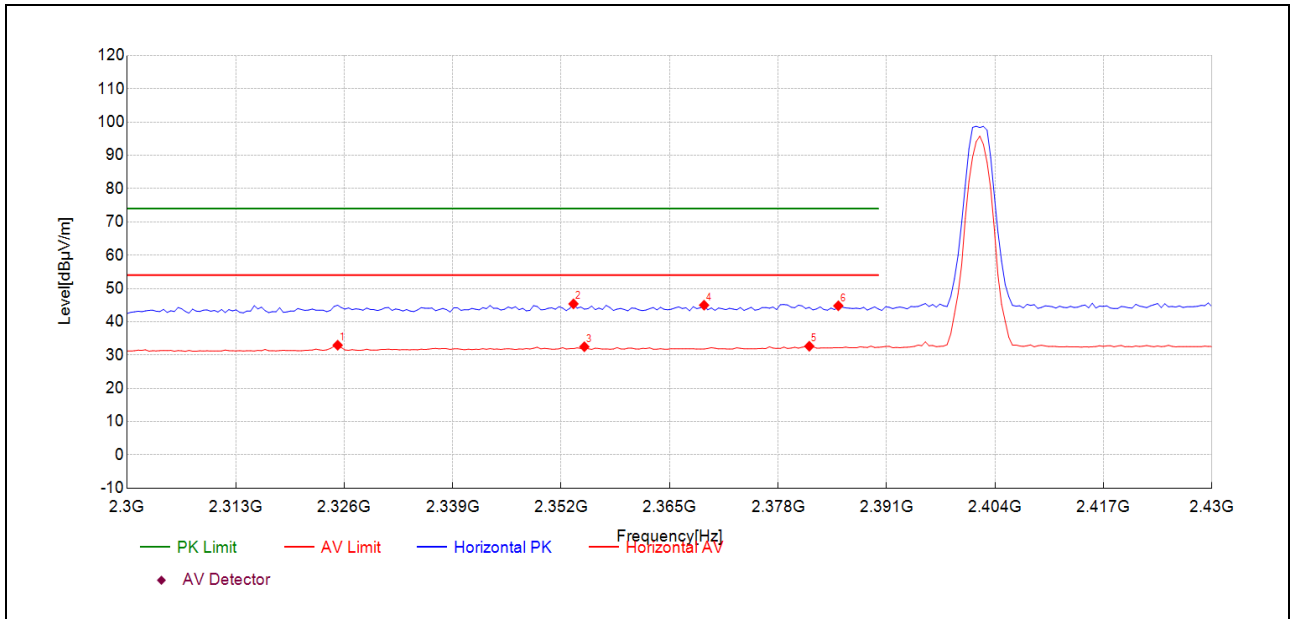

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2325.22	0.8	32.93	32.160	54.00	21.07	165	50	AV	PASS
2353.48	12.9	45.36	32.420	74.00	28.64	165	68	PK	PASS
2354.78	0.1	32.48	32.420	54.00	21.52	165	68	AV	PASS
2369.13	12.5	44.97	32.470	74.00	29.03	165	182	PK	PASS
2381.74	0.1	32.63	32.510	54.00	21.37	165	68	AV	PASS
2385.22	12.3	44.79	32.530	74.00	29.21	165	145	PK	PASS



Plot for Channel 39

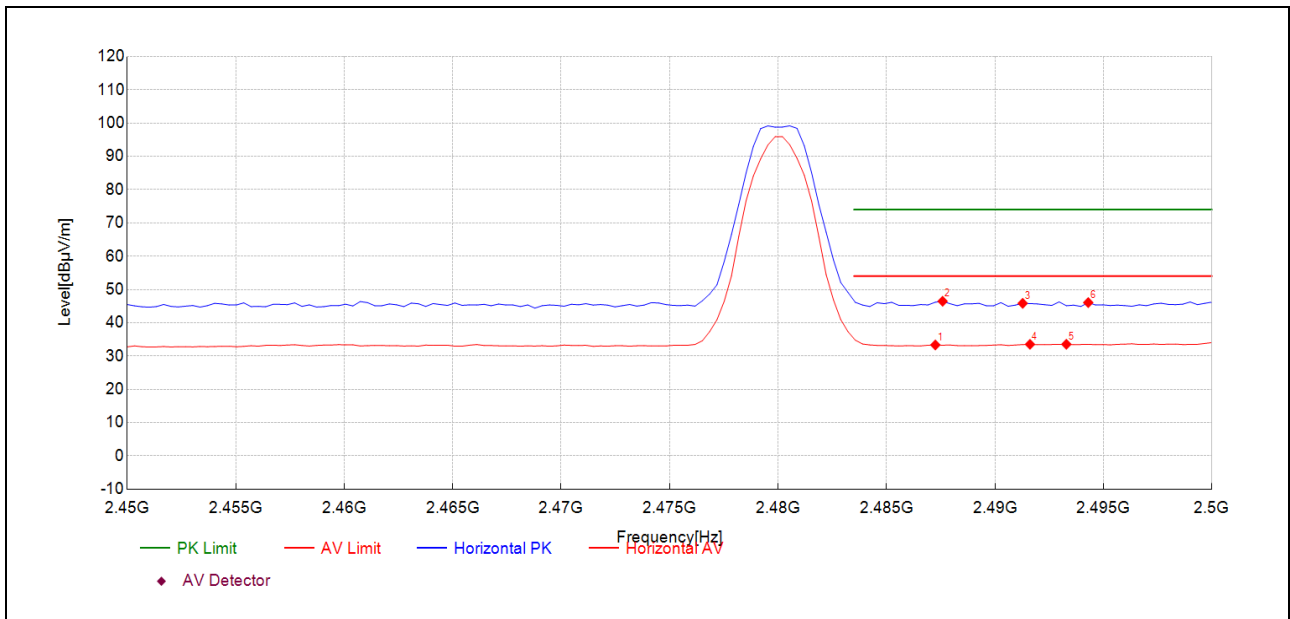

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2487.25	0.3	33.31	33.030	54.00	20.69	165	54	AV	PASS
2487.58	13.4	46.45	33.020	74.00	27.55	165	349	PK	PASS
2491.28	12.8	45.82	33.020	74.00	28.18	165	25	PK	PASS
2491.61	0.5	33.50	33.020	54.00	20.50	165	44	AV	PASS
2493.29	0.5	33.52	33.010	54.00	20.48	165	44	AV	PASS
2494.30	13.1	46.06	33.010	74.00	27.94	165	349	PK	PASS



A.9. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note4: All test modes were considered and evaluated respectively by performing full test, only the worst data were recorded.


**1Mbps**

Plot for Channel 0

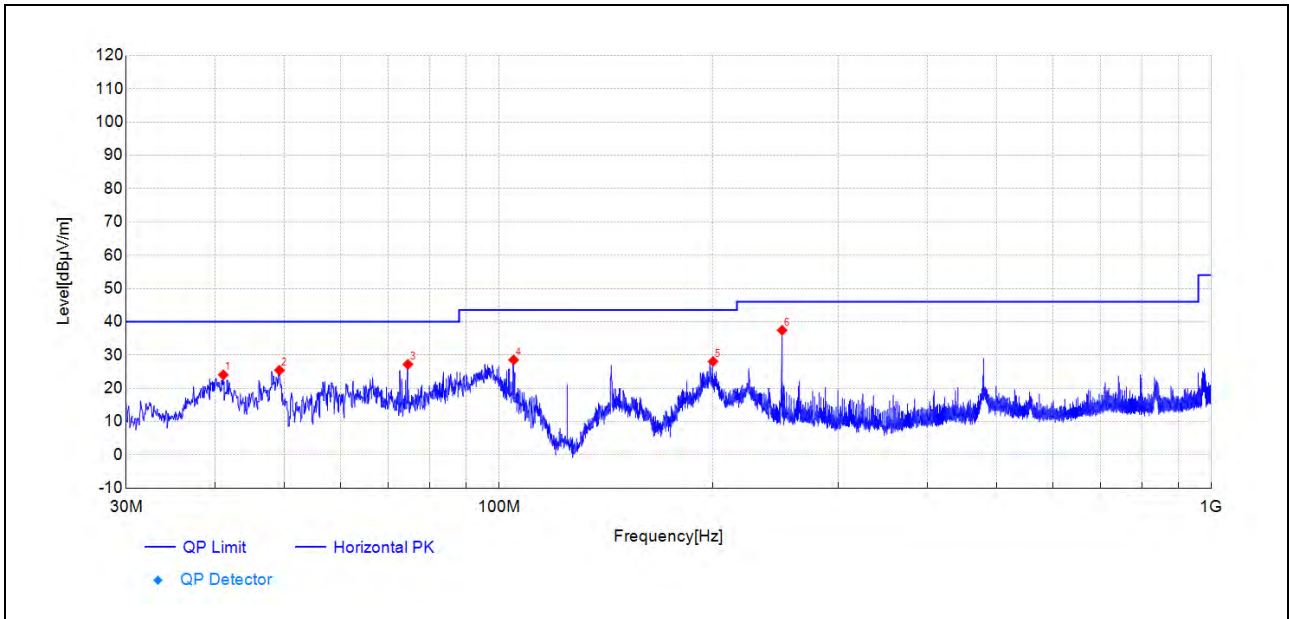


(Antenna Horizontal, 30MHz to 1GHz)

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
41.05	9.1	24.03	14.900	40.00	15.97	165	348	PK	PASS
49.22	10.2	25.40	15.220	40.00	14.60	165	2	PK	PASS
74.56	18.6	27.19	8.550	40.00	12.81	165	45	PK	PASS
104.96	15.6	28.52	12.930	43.50	14.98	165	108	PK	PASS
199.97	15.1	28.05	12.930	43.50	15.45	165	122	PK	PASS
250.00	22.7	37.42	14.700	46.00	8.58	165	348	PK	PASS

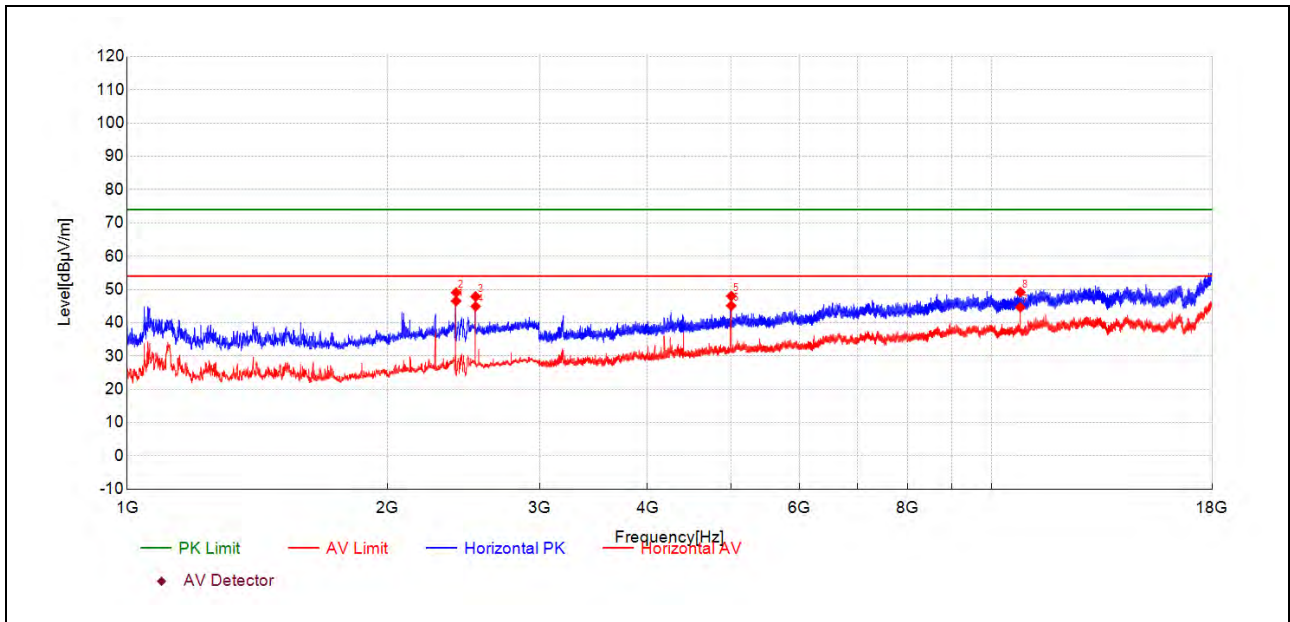


(Antenna Horizontal, 1GHz to 18GHz)

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2402.20	45.8	46.53	0.750	-	-	165	58	AV	NA
2402.20	48.3	49.04	0.750	-	-	165	58	PK	NA
2529.67	47.0	47.86	0.840	74.00	26.14	165	58	PK	PASS
2530.16	44.1	44.92	0.830	54.00	9.08	165	58	AV	PASS
4999.67	58.0	48.03	-10.010	74.00	25.97	165	10	PK	PASS
4999.67	55.1	45.12	-10.010	54.00	8.88	165	332	AV	PASS
10800.30	44.4	44.60	0.180	54.00	9.40	165	171	AV	PASS
10800.30	49.0	49.17	0.180	74.00	24.83	165	171	PK	PASS

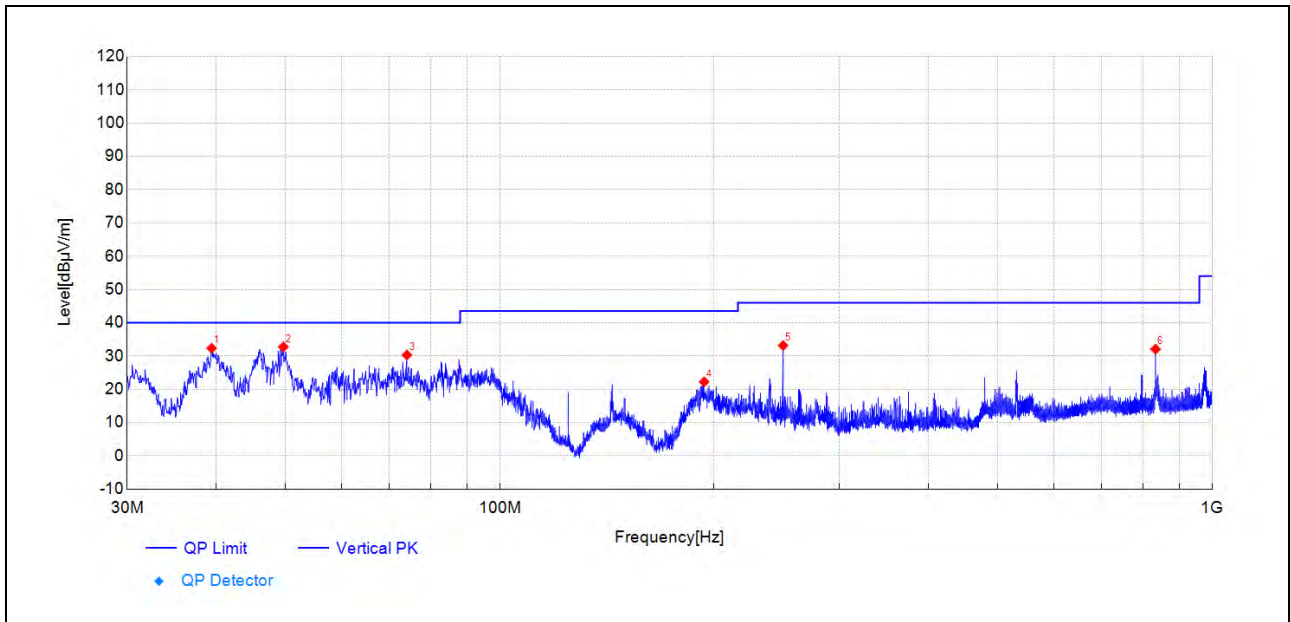

(Antenna Vertical, 30MHz to 1GHz)


Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
39.41	17.9	32.33	14.400	40.00	7.67	165	99	PK	PASS
49.70	17.6	32.74	15.180	40.00	7.26	165	177	PK	PASS
74.09	21.7	30.30	8.590	40.00	9.70	165	358	PK	PASS
193.68	8.7	22.24	13.560	43.50	21.26	165	177	PK	PASS
250.00	18.5	33.16	14.700	46.00	12.84	165	360	PK	PASS
833.33	7.0	32.05	25.040	46.00	13.95	165	201	PK	PASS

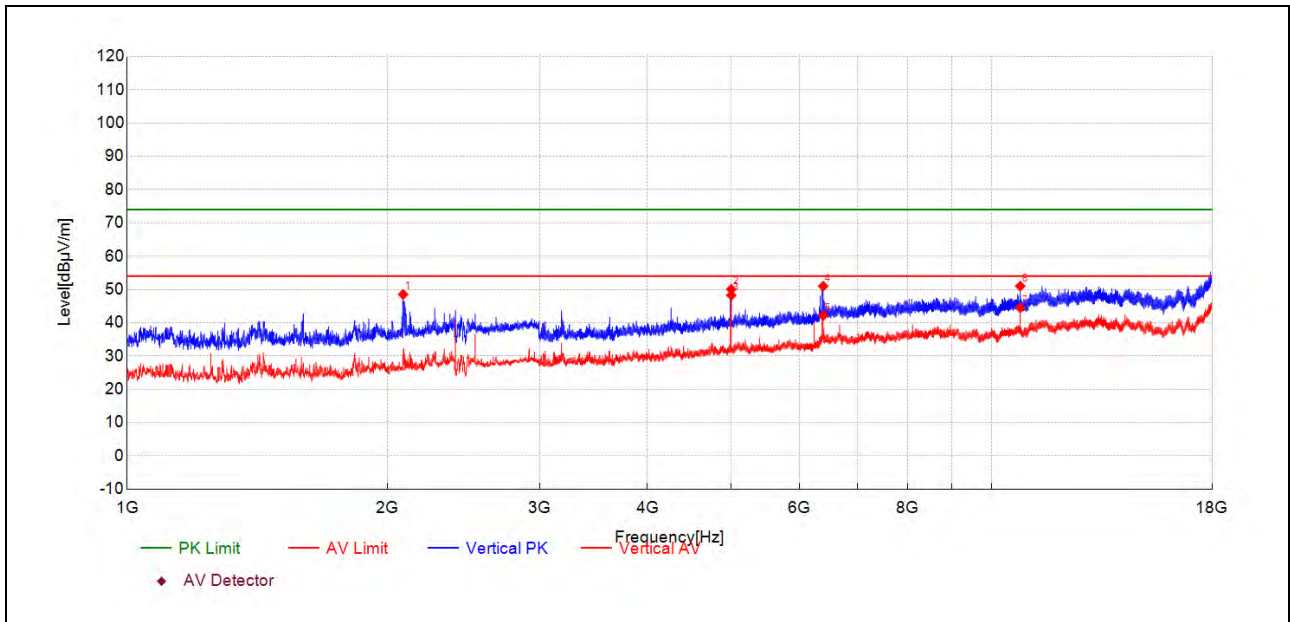

(Antenna Vertical, 1GHz to 18GHz)


Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2085.71	49.7	48.50	-1.200	74.00	25.50	165	13	PK	PASS
4999.67	60.1	50.05	-10.010	74.00	23.95	165	100	PK	PASS
4999.67	58.3	48.25	-10.010	54.00	5.75	165	100	AV	PASS
6388.77	56.3	51.01	-5.300	74.00	22.99	165	283	PK	PASS
6388.77	47.5	42.15	-5.300	54.00	11.85	165	262	AV	PASS
10800.30	50.8	51.01	0.180	74.00	22.99	165	192	PK	PASS
10800.30	44.3	44.50	0.180	54.00	9.50	165	192	AV	PASS

Plot for Channel 19

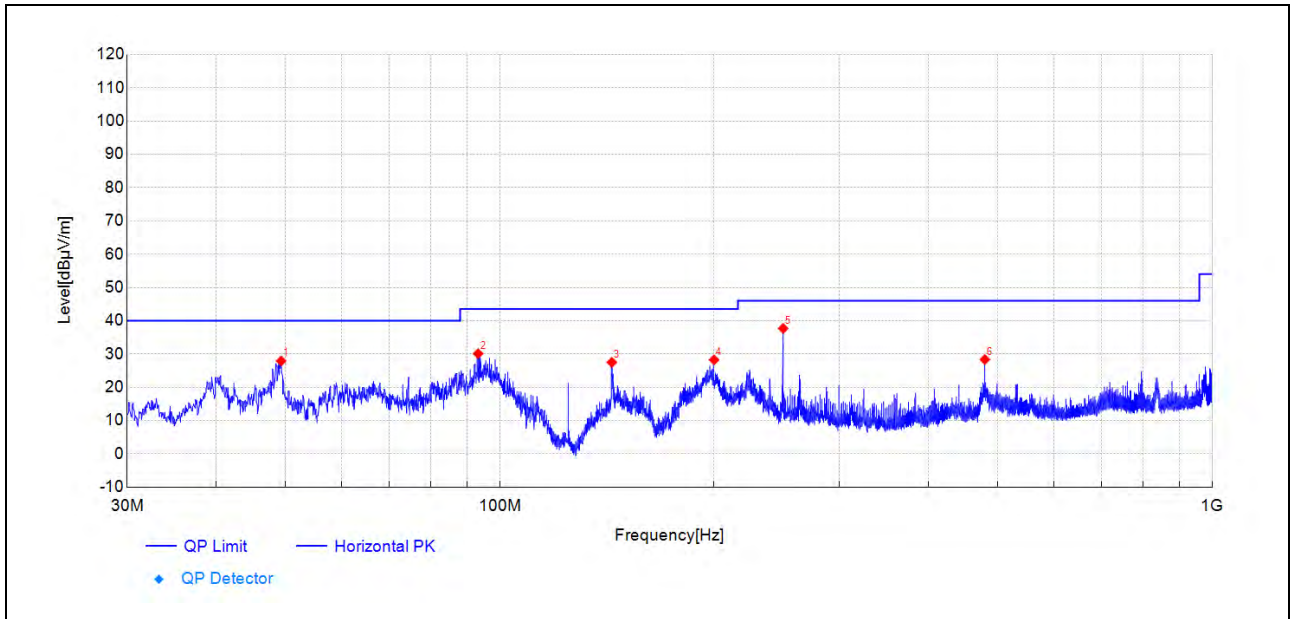


(Antenna Horizontal, 30MHz to 1GHz)

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
49.34	12.7	27.90	15.220	40.00	12.10	165	0	PK	PASS
93.26	17.7	30.10	12.430	43.50	13.40	165	122	PK	PASS
143.70	17.8	27.49	9.710	43.50	16.01	165	97	PK	PASS
199.97	15.3	28.23	12.930	43.50	15.27	165	122	PK	PASS
250.00	23.0	37.68	14.700	46.00	8.32	165	350	PK	PASS
479.99	8.4	28.34	19.900	46.00	17.66	165	97	PK	PASS

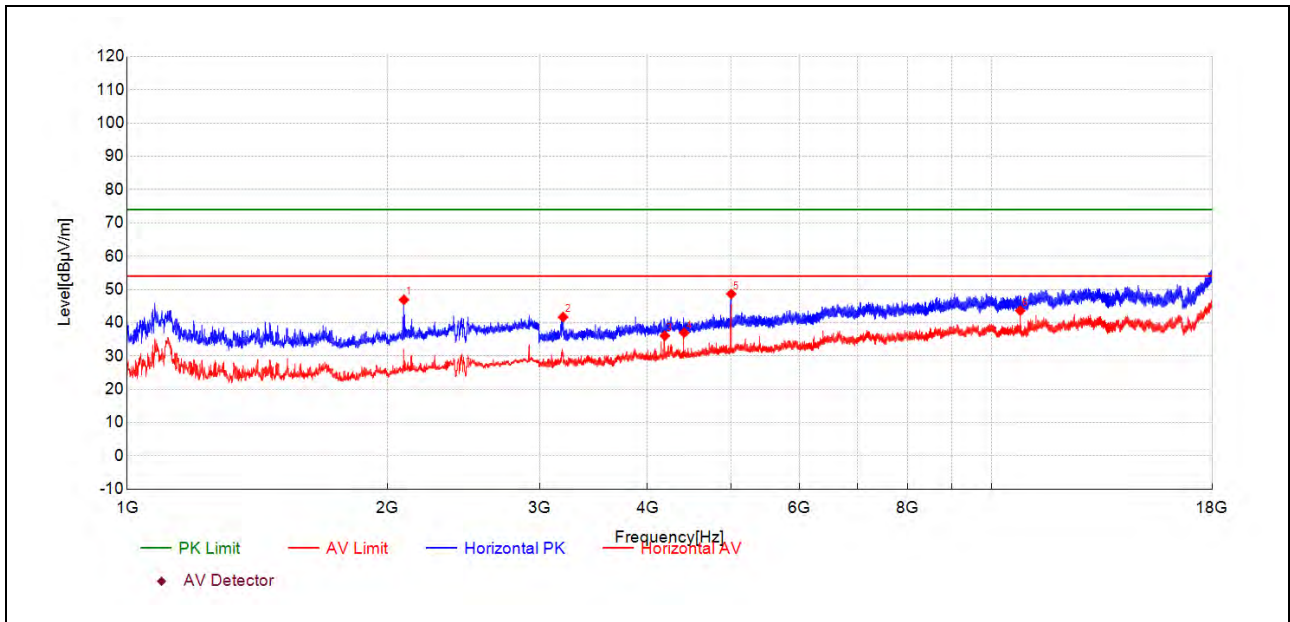


(Antenna Horizontal, 1GHz to 18GHz)

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2090.11	48.0	46.90	-1.140	74.00	27.10	165	317	PK	PASS
3194.38	57.2	41.68	-15.520	74.00	32.32	165	55	PK	PASS
4188.74	48.9	36.09	-12.800	54.00	17.91	165	124	AV	PASS
4409.54	49.0	36.98	-12.050	54.00	17.02	165	148	AV	PASS
4999.67	58.7	48.64	-10.010	74.00	25.36	165	334	PK	PASS
10800.30	43.4	43.60	0.180	54.00	10.40	165	172	AV	PASS

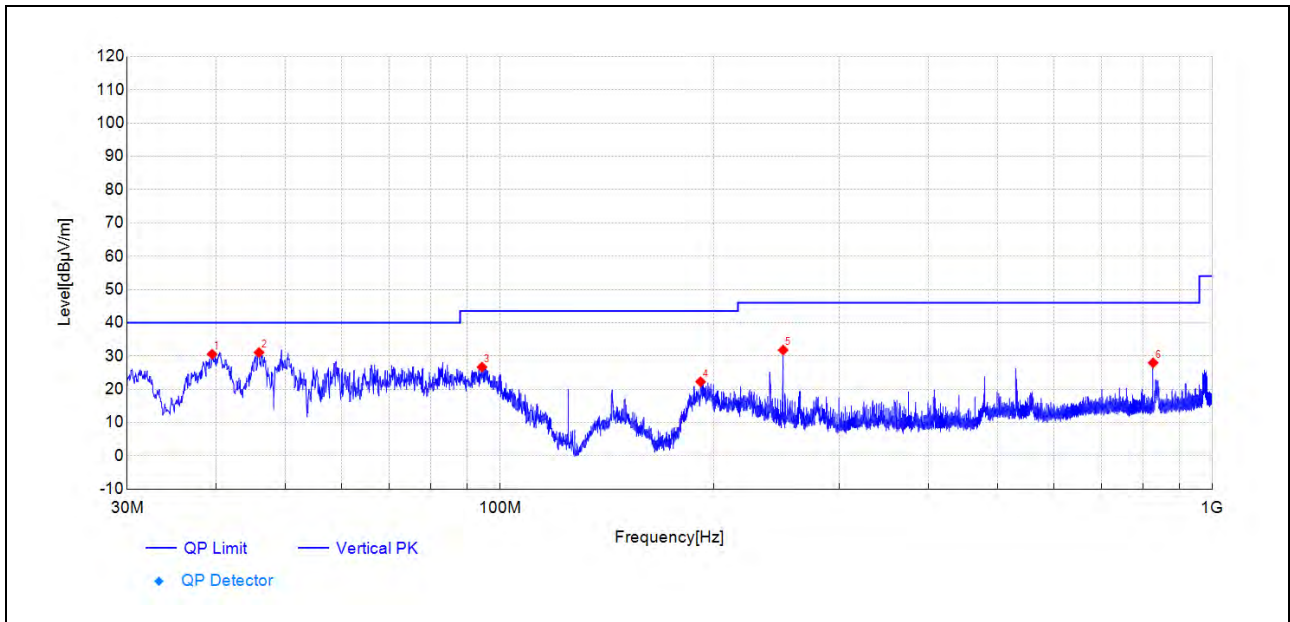

(Antenna Vertical, 30MHz to 1GHz)


Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
39.47	16.1	30.56	14.420	40.00	9.44	165	100	PK	PASS
45.93	15.7	31.04	15.320	40.00	8.96	165	139	PK	PASS
94.44	14.0	26.66	12.620	43.50	16.84	165	176	PK	PASS
191.44	8.8	22.25	13.420	43.50	21.25	165	176	PK	PASS
250.00	17.1	31.78	14.700	46.00	14.22	165	360	PK	PASS
826.74	3.0	27.95	24.920	46.00	18.05	165	11	PK	PASS

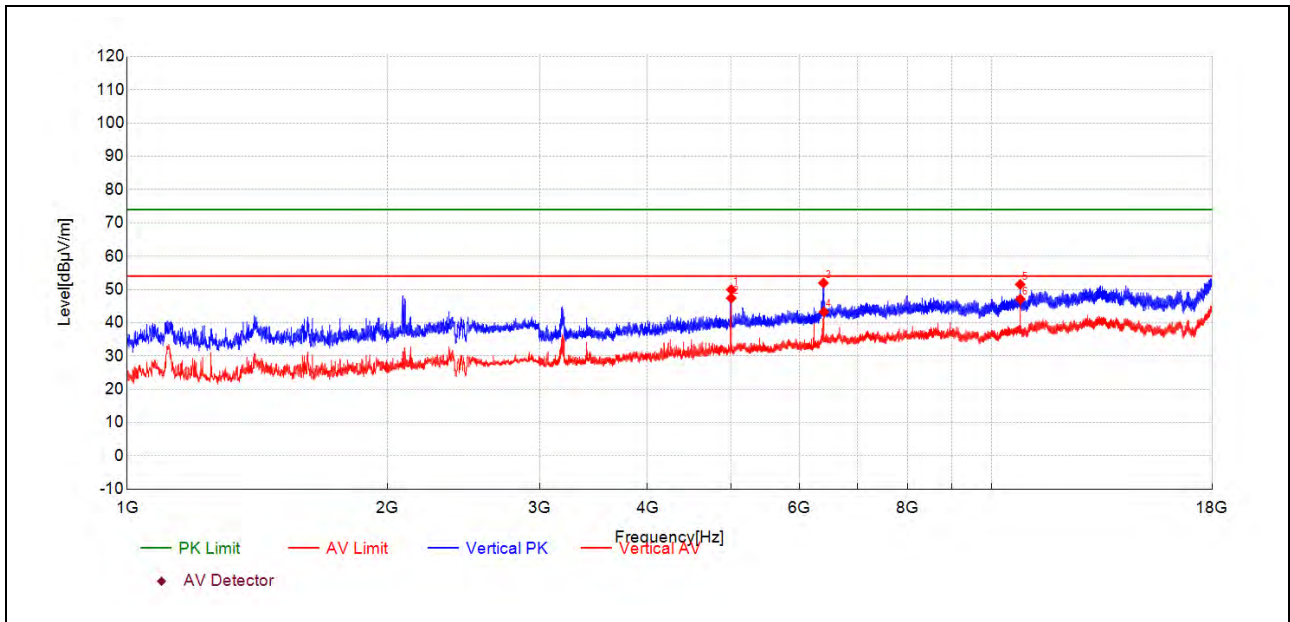

(Antenna Vertical, 1GHz to 18GHz)


Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
4999.67	60.0	49.95	-10.010	74.00	24.05	165	100	PK	PASS
4999.67	57.4	47.39	-10.010	54.00	6.61	165	80	AV	PASS
6392.76	57.2	51.95	-5.260	74.00	22.05	165	80	PK	PASS
6400.23	48.5	43.27	-5.180	54.00	10.73	165	80	AV	PASS
10800.30	51.3	51.51	0.180	74.00	22.49	165	146	PK	PASS
10800.30	46.9	47.09	0.180	54.00	6.91	165	172	AV	PASS

Plot for Channel 39

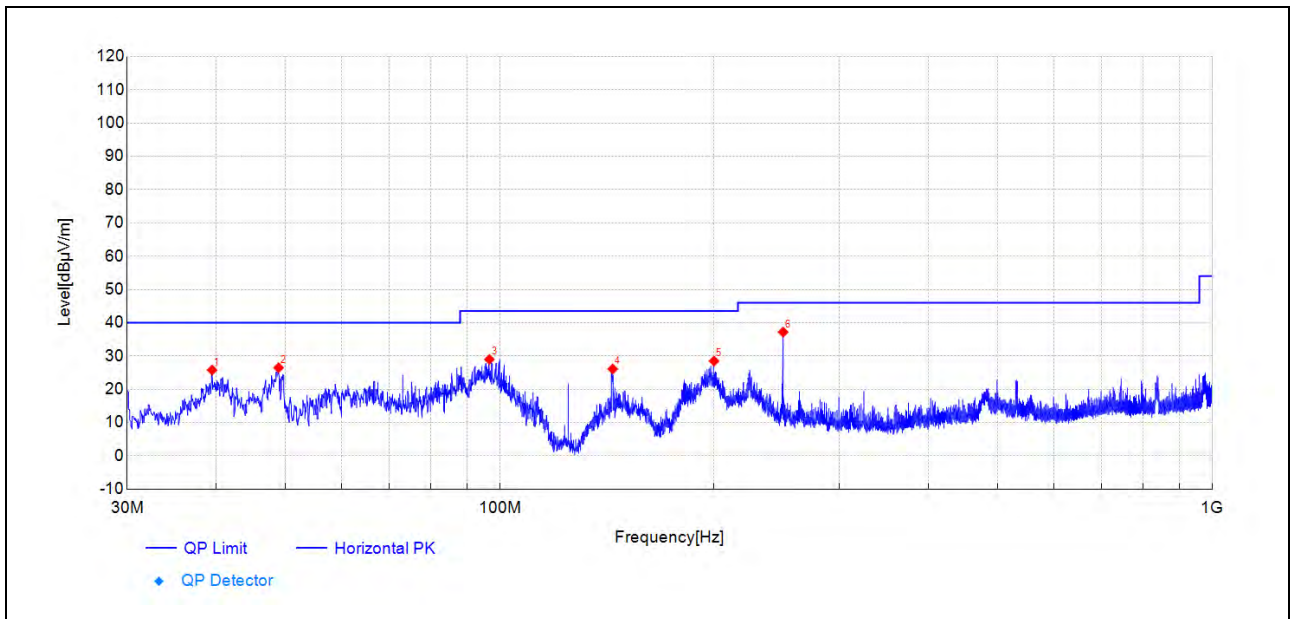


(Antenna Horizontal, 30MHz to 1GHz)

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
39.47	11.3	25.76	14.420	40.00	14.24	165	0	PK	PASS
48.93	11.2	26.46	15.250	40.00	13.54	165	336	PK	PASS
96.73	16.0	28.96	12.960	43.50	14.54	165	351	PK	PASS
144.11	16.4	26.08	9.710	43.50	17.42	165	110	PK	PASS
199.97	15.6	28.48	12.930	43.50	15.02	165	135	PK	PASS
250.00	22.5	37.19	14.700	46.00	8.81	165	351	PK	PASS

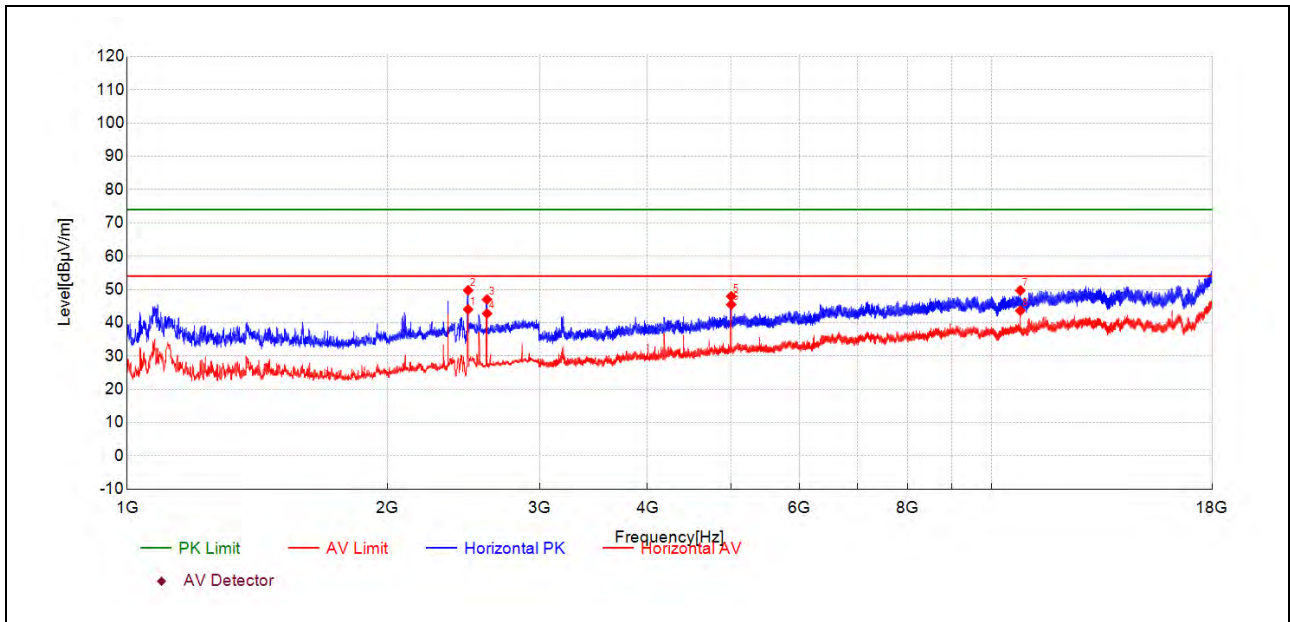


(Antenna Horizontal, 1GHz to 18GHz)

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2479.85	43.1	43.99	0.920	-	-	165	47	AV	NA
2479.85	48.8	49.72	0.920	-	-	165	47	PK	NA
2607.81	46.7	46.99	0.310	74.00	27.01	165	47	PK	PASS
2608.30	42.5	42.76	0.310	54.00	11.24	165	47	AV	PASS
4999.67	57.9	47.93	-10.010	74.00	26.07	165	308	PK	PASS
4999.67	55.5	45.45	-10.010	54.00	8.55	165	11	AV	PASS
10800.30	49.5	49.68	0.180	74.00	24.32	165	147	PK	PASS
10800.30	43.4	43.61	0.180	54.00	10.39	165	147	AV	PASS

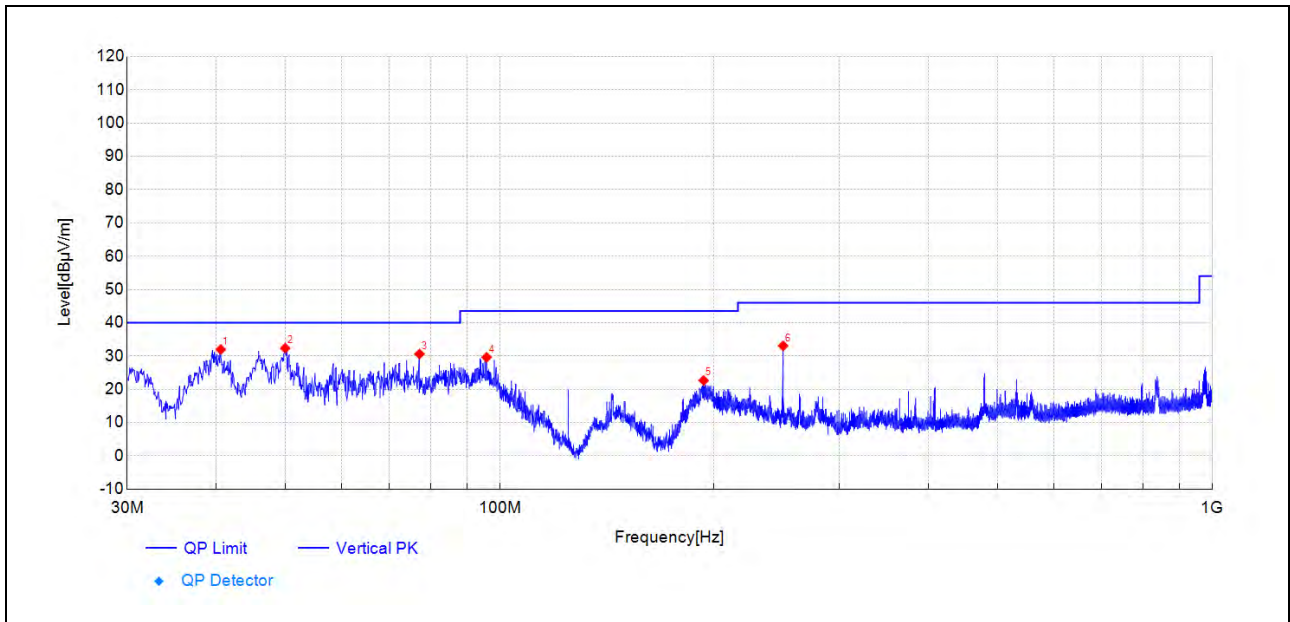

(Antenna Vertical, 30MHz to 1GHz)

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
40.58	17.2	31.94	14.760	40.00	8.06	165	161	PK	PASS
49.99	17.2	32.35	15.150	40.00	7.65	165	250	PK	PASS
77.15	22.3	30.59	8.320	40.00	9.41	165	359	PK	PASS
95.85	16.7	29.60	12.860	43.50	13.90	165	85	PK	PASS
193.32	9.1	22.65	13.520	43.50	20.85	165	188	PK	PASS
250.00	18.4	33.05	14.700	46.00	12.95	165	360	PK	PASS

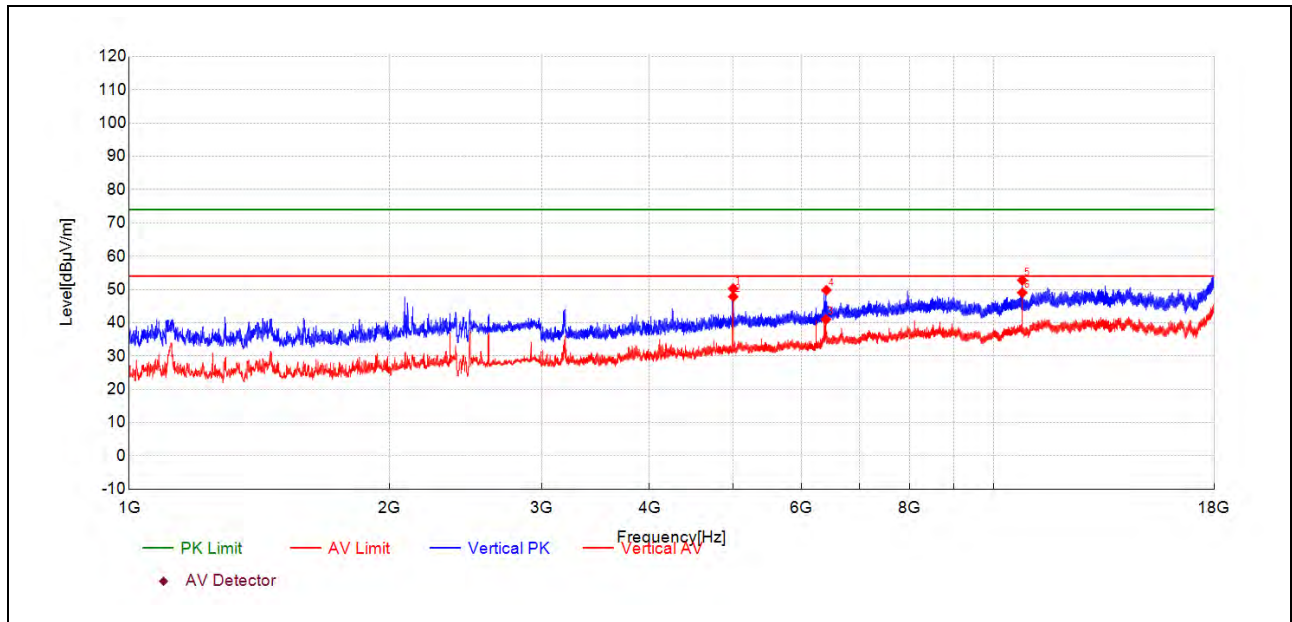

(Antenna Vertical, 1GHz to 18GHz)

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
4999.67	60.3	50.25	-10.010	74.00	23.75	165	100	PK	PASS
4999.67	57.8	47.83	-10.010	54.00	6.17	165	100	AV	PASS
6401.23	46.1	40.97	-5.170	54.00	13.03	165	360	AV	PASS
6407.71	54.9	49.76	-5.100	74.00	24.24	165	100	PK	PASS
10800.30	52.6	52.76	0.180	74.00	21.24	165	172	PK	PASS
10800.30	48.9	49.04	0.180	54.00	4.96	165	146	AV	PASS



Notes

1. The report shall have report stamp or our company stamp.
2. The report shall be invalid without all the signatures of the editor and approver.
3. The report shall not be changed.
4. Any objections must be raised to Morlab within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.
5. Conformity declaration:
 - ☒ Morlab issues a statement of conformity based on the corresponding standards (default)
 - ☐ Morlab issues a statement of conformity based on the applicant requirement
6. Use of uncertainty of measurement for decisions on conformity (decision rule):

No decision rule is specified by the testing standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule).

————— END OF REPORT —————