SLEVE
BOOM MINI

QUICK MANUAL

First time Set Up

Press and hold the power button for 3s. Indicator flash White rapidly.

Select SLEVE BOOM MINI in your device setting to connect. Indicator flash slowly



Note:
If the pairing process is failed, press and hold the power button for 5s to turn off the device and repeat the above steps.
If required, enter the PIN code "0000" and confirm the entry.
Onced paired with your devices, when powered on, MOOM MINI will automatically search for the last paired device to connect.

Accessories

Lanyard

USB Cable

Sticker

SP018

Multi-Speaker Connection Guide

Setting Up the Master Speaker

Pair up a SLEVE BOOM MINI speaker with your Bluetooth device as Master speaker. Double click the button ③ to activate broadcasting function.

Pairing Additional Speakers

Place the speakers you wish to connect with within 1 meter to the Master. Turn on the speakers and disconnect them with other devices. Double-click the button ③ to enter broadcast mode. In few seconds, the speakers will connect with the Master speaker automatically.

Note: Only the control buttons on the master speaker works after connection. To adjust volume or music track, please adjust on your Bluetooth device or master speaker.

Parts&Buttons

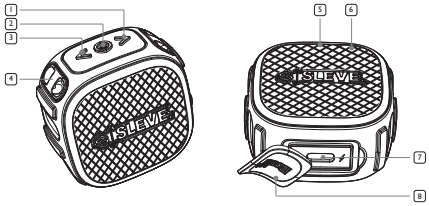

1	Vol+/Next track/Siri	5	Indicator
2	MFB	6	Mic
3	Vol-/Previous track/Broadcast	7	TYPE-C
4	Lanyard loop	8	Rubber Cover

Press & hold **3**s	
Press & hold **5**s	
1 x Click	
Press & hold **1**s	<
Press & hold **1**s	>
1 x Click	>
1 x Click	<

2 x Clicks	>
2 x Clicks	<
1 x Click	
1 x Click	
2 x Clicks	

Note:
Ⓐ Broadcast function.
Press and hold the MFB for 8 seconds can restore factory settings to clear paring record.

Charging Guide

For the first time use, please fully charge the product before turning it on. This helps calibrate the battery. And it is recommended to charge the product regularly.

If you do not plan to use the product for an extended period, please charge the battery to approximately 50-60%. Store the product in a cool, dry place and recharge it every three months to maintain battery health.

Connect BOOM MINI with power supply rated 5V-1A via the provided charging cable to charge, the Indicator will be solid green. It will take 2-3 hours to fully charge the device. Once fully charged, the indicator will turn solid White.

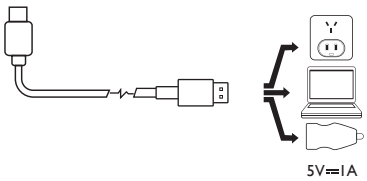

Note:

Use only the provided or manufacturer-approved charger and cable.
Avoid exposing the product to extreme temperatures during charging.
To save energy, disconnected with devices for 10 minutes, BOOM MINI will turn off automatically.

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.