

PRODUCT SPECIFICATION SHEET

APPELLATION: A11 Wireless transmission single coil module.

MODE: YX-A11-R500853-G0845.

No.: _____.

Producer	TECHNICAL	QUALITY	PROJECT	DEVELOPING
	Jiuguijiang	wangxue	wangchunxia	Jiuguijiang


client	Materials Engineer	Engineer	Approval	R & D System

Producer : Shenzhen Cilianda Electronics
Co. , Ltd.

Supplier Address: 5th Floor, West Building, No. 221, Niu
Cheng Village, Xili Town, Nan Shenzhen District, Shenzhen

CityTelephone: 13923779042、13560769647


E-mail: sadecn2002@163.com、jiuguijiang@163.com



Revision History

[illegible]

1. DIMENSIONS & MARKING:

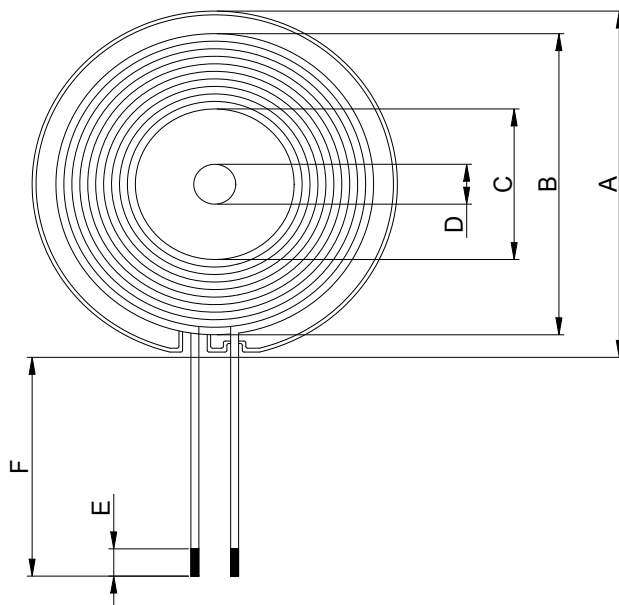

Symbol	A	B	C	D	E	F
Value(mm)	50.00±1.00	43.00±1.00	20.0±0.50	5.50±0.50	3.00±1.00	45.00±1.00

2. ELECTRICAL SPECIFICATIONS @25℃

- 2.1 Operating Temperature range: -40℃~+85℃
- 2.2 Storage temperature range: -25℃ TO +125℃
- 2.3 The test frequency: 100 KHz, 100mV @ 25℃,65%
- 2.4 OCL : $6.30 \pm 10\% \mu\text{H}$.
- 2.5 Diameter : 0.08mm*105P
- 2.6 Turns Ratio: 10T
- 2.7 Q Value: 40 MIN
- 2.8 DCR: 75mΩ MAX

DRAWN BY:	CHECKED BY:	APPROVED BY:	CUSTOMER:
jiuguijiang	jiuguijiang	wangchunxia	PART NO. : YX-A11-R500853-G0845

Shenzhen Cilianda Electronics Co. , Ltd.


REV. : A

PAGE: 3 Of 4

3、 Bill of materials:

Serial	Designation	specification	Use	Remark
1	Silk-covered thread	0.08mm*105P	√	
2	Self-adhesive thread	0.08mm*105P		
3	Magnetic sheet	G50.0*5.3*0.8mm	√	
4	High-temperature adhesive tape	8.00*0.05mm	√	
5	Back adhesive sticker Glue	T 48.0*5.5mm		
6	Glue	/	√	
7	Tin rod	Sn97.3-0.7Cu	√	

4、 Packaging:

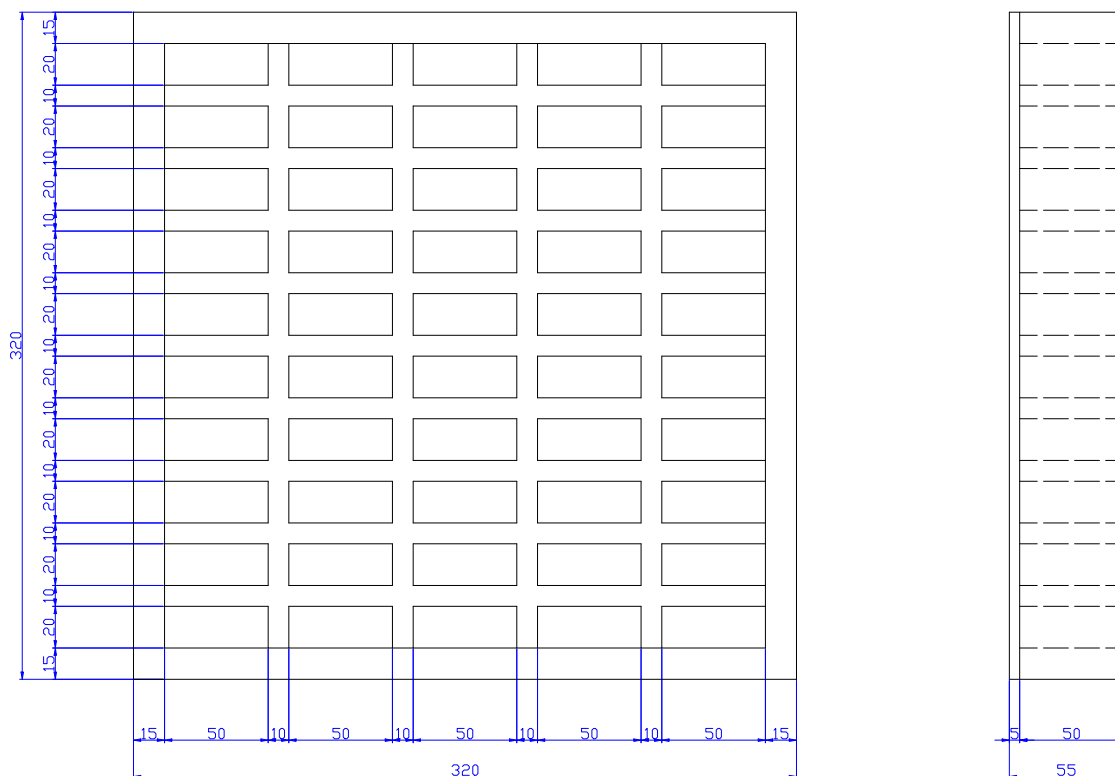

4.1 Quantity per grid: 6 PCS

4.2 Quantity per carton: 6*50 = 300PCS

4.3 Quantity per carton: 300*3 = 900PCS

4.4 Carton size: 350*350*180mm.

DRAWN BY:	CHECKED BY:	APPROVED BY:	CUSTOMER:
jiugujiang	jiugujiang	wangchunxia	PART NO. : YX-A11-R500853-G0845
Shenzhen Cilianda Electronics Co. , Ltd.			REV. : A
			PAGE: 4 Of 4