



FCC TEST REPORT

FCC ID: 2BUC5-S133E6-F1

On Behalf of

INKJOY FRAME TECHNOLOGY CO., LIMITED

InkJoy ePaper Frame

Model No.: S133E6-F1

Prepared for : INKJOY FRAME TECHNOLOGY CO., LIMITED
Address : NO.34 ASHLEY ROAD, TSIM SHA TSUI, Kowloon, Hong Kong

Prepared By : Shenzhen PSI Testing Co., Ltd.
1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West
Address : Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong,
China

Report Number : psi2512108-C01-R07
Date of Receipt : December 19, 2025
Date of Test : December 19, 2025- January 7, 2026
Date of Report : January 7, 2026
Version Number : V0

TABLE OF CONTENTS

	Description	Page
1	TEST SUMMARY	5
1.1	MEASUREMENT UNCERTAINTY.....	5
2	GENERAL INFORMATION	6
2.1	GENERAL DESCRIPTION OF EUT	6
2.2	TEST MODE	7
2.3	TEST FACILITY	7
2.4	DESCRIPTION OF SUPPORT UNITS	7
2.5	DEVIATION FROM STANDARDS	8
2.6	ABNORMALITIES FROM STANDARD CONDITIONS.....	8
2.7	OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
2.8	ADDITIONAL INSTRUCTIONS	8
2.9	TEST CONDITIONS	8
3	TEST INSTRUMENTS LIST	9
4	TEST RESULTS AND MEASUREMENT DATA.....	10
4.1	ANTENNA REQUIREMENT:	10
4.2	CONDUCTED EMISSIONS	11
4.3	EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	14
4.4	MAXIMUM CONDUCTED OUTPUT POWER.....	43
4.5	POWER SPECTRAL DENSITY.....	46
4.6	BAND EDGE.....	61
4.7	RADIATED EMISSION	72
4.8	FREQUENCY STABILITY	79
5	PHOTOS OF TEST SETUP.....	81
6	PHOTOS OF EUT	81

TEST REPORT DECLARATION

Applicant : INKJOY FRAME TECHNOLOGY CO., LIMITED
Address : NO.34 ASHLEY ROAD, TSIM SHA TSUI, Kowloon, Hong Kong
Manufacturer : INKJOY FRAME TECHNOLOGY CO., LIMITED
Address : NO.34 ASHLEY ROAD, TSIM SHA TSUI, Kowloon, Hong Kong
EUT Description : InkJoy ePaper Frame
(A) Model No. : S133E6-F1
(B) Trademark : InkJoy

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart E

ANSI C63.10-2020

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart E limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:

Jensen Wang

Test Engineer

Jensen Wang

Approved by (name + signature).....:

Simple Guan

Project Manager

Simple Guan

Date of issue.....:

January 7, 2026

Revision History

Revision	Issue Date	Revisions	Revised By
V0	January 7, 2026	Initial released Issue	Jensen Wang



1 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203 Section 7.1.4	PASS
AC Power Line Conducted Emission	15.207 Section 7.2.4, 15.407(b)(9)	PASS
Occupied bandwidth	15.407(a), 15.407(e)	PASS
Maximum Conducted Output Power	15.407(a)(1)(iv)-(B1), (a)(3)(i)-(B4)	PASS
Power Spectral Density	15.407(a)(1)(iv)-(B1), (a)(3)(i)-(B4)	PASS
Radiated Emission	15.205, 15.209, 15.407(b)(1)-(B1), (4) -(B4)	PASS
Band Edge	15.407(b), 15.209	PASS
Frequency Stability	15.407(g)	PASS

Remark:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Frequency Stability: The manufacturer stated in the user's manual.
3. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.
4. Measurement-method usage KDB 789033 D02 General UNII Test Procedures New Rules v02r01
5. All tests are according to ANSI C63.10-2020.

1.1 Measurement Uncertainty

Item	Uncertainty
Power Line Conducted Emissions Test	2.13dB
Radiation Emission test in 3m chamber(Below 30MHz)	4.07dB
Radiation Emission test in 3m chamber(30MHz to 1GHz)	4.51dB
Radiation Emission test in 3m chamber(1GHz to 18GHz)	5.07dB
Radiation Emission test in 3m chamber(18GHz to 40GHz)	5.21dB
Radio Frequency	48.24KHz
Conducted RF Power	0.41dB
Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Duty Cycle	1%
Conducted-Spurious Emission	1.26dB

2 General Information

2.1 General Description of EUT

EUT Name : InkJoy ePaper Frame
Model : S133E6-F1
Diff : N/A
Test Voltage : DC 5V from adapter, DC 3.85V from adapter

Radio Technology : 5G WIFI

Operation frequency : 802.11a/802.11ac20/802.11n(HT20): 5180-5240MHz, 5745-5845MHz
802.11ac40/802.11n(HT40): 5190-5230MHz, 5755-5795MHz
Channel separation : 20MHz for 802.11a/802.11ac20/802.11n(HT20)
40MHz for 802.11n(HT40)
Modulation technology: : IEEE 802.11n: OFDM (64QAM,16QAM,QPSK,BPSK)
IEEE 802.11a: OFDM (64QAM,16QAM,QPSK,BPSK)
IEEE 802.11ac: OFDM (64QAM,16QAM, 256QAM,QPSK,BPSK)
Antenna Type : Internal antenna 1, Maximum Gain is 3.03dBi.

PMN : N/A
HVIN : N/A

Software version : N/A
Hardware version : N/A
FVIN

Note : Antenna information is provided by applicant.
Testing lab is not responsible for the accuracy of the information.

2.2 Test mode

Transmitting mode Keep the EUT in transmitting with modulation.
EUT was test with 99% duty cycle at its maximum power control level.

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

2.3 Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission
Registration Number: 916281

September 21, 2023 Certificated by IC
Registration Number: 31123
CAB identifier: CN0158

2.4 Description of Support Units

Accessories 1 : N/A
Manufacturer : N/A
Model : N/A
Rating : N/A

2.5 Deviation from Standards

None.

2.6 Abnormalities from Standard Conditions

None.

2.7 Other Information Requested by the Customer

None.

2.8 Additional instructions

Software (Used for test) from client

Channel	Power level
Lowest	Default
Middle	Default
Highest	Default

2.9 Test Conditions


Items	Required	Actual
Temperature range:	15-35℃	26℃
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	101kPa

3 Test Instruments list

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2025.12.19	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2025.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV 216	102282	/	2025.12.18	1 Year
4.	L.I.S.N.#2	EMCO	3810-2	00094944	/	2025.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV40-N	101648	3.70	2025.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LNPA_0118 G-50	SK20220329 01	/	2025.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_1840 G-50	SK20190403 02	/	2025.12.18	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02 -1111533-Fz	/	2025.12.18	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P0 08	/	2025.12.18	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2025.12.18	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2025.12.18	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10 A	20221125163 8	/	2025.12.18	1 Year
17.	Cable	SKET	Cable-RE-1	#02/#03	/	2025.12.18	1 Year
18.	Cable	SKET	Cable-RE-2	#01	/	2025.12.18	1 Year
19.	Cable	SKET	Cable-RE-3	#04	/	2025.12.18	1 Year
20.	Cable	SKET	Cable-CE-1	A-E-24	/	2025.12.18	1 Year
21.	6dB Attenuator	Schwarzbeck	DGA 9552N 6dB	CK4186	/	2025.12.18	1 Year
22.	Power meter	Agilent	E4419B	GB40202121	/	2025.12.18	1 Year
23.	Comprehensive Test Instrument	Rohde&Schwarz	CMW 500	145266	/	2025.12.18	1 Year
For Test Software Information							
Item	Software Name	Manufacturer			Version		
RE	EZ EMC	Farad			PSI-3A1		
CE	EZ EMC	Farad			PSI-3A1		

4 Test results and Measurement Data

4.1 Antenna requirement:

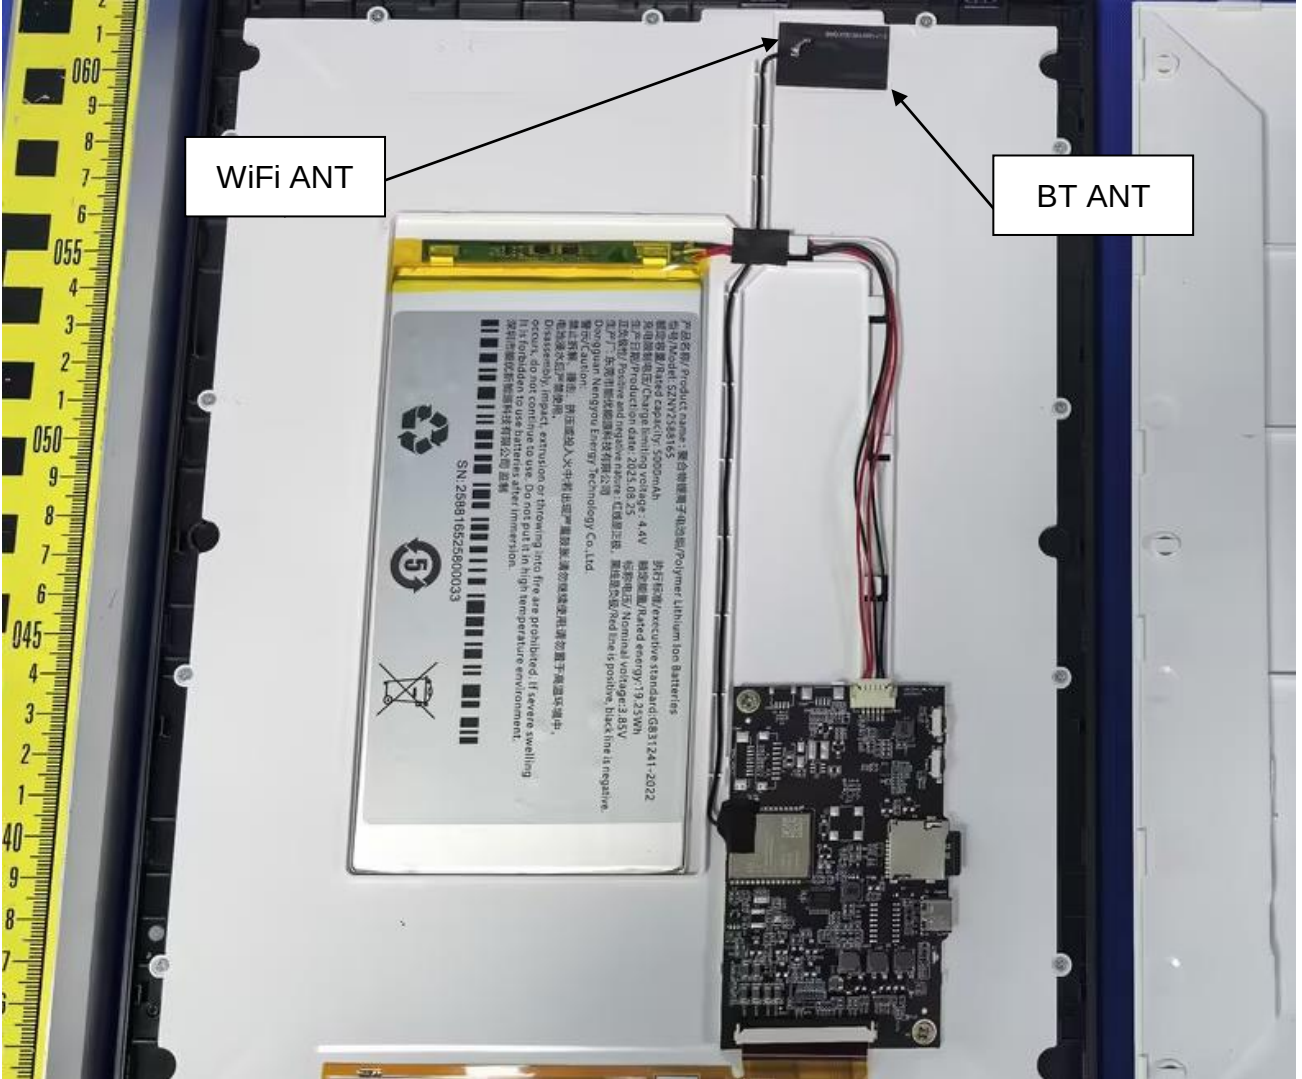Standard requirement:	FCC Part15 C Section 15.203 Section 7.1.4
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
Internal antenna 1, Maximum Gain is 0dBi Maximum Gain is 3.03dBi, for 5180-5240MHz, 5745-5845MHz	
 The image shows the internal components of a device. A yellow ruler is visible on the left side, indicating measurements in centimeters. The main components are a large battery pack in the center, a main circuit board at the bottom, and two small antenna modules at the top. One antenna is labeled 'WiFi ANT' and the other 'BT ANT'. The battery pack has a label with technical specifications and a barcode. The main board has various electronic components and connectors. The device is housed in a white plastic casing.	


4.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207 Section 7.2.4, 15.407(b)(9)		
Test Method:	ANSI C63.10-2020		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10-2020 on conducted measurement.		
Test setup:	Reference Plane LISN AUX Equipment E.U.T LISN Filter EMI Receiver 40cm 80cm AC power Test table/Insulation plane Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 3.0 for details		
Test mode:	Refer to section 2.2 for details		
Test results:	Pass		

Measurement Data


An initial pre-scan was performed on the line and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Line:

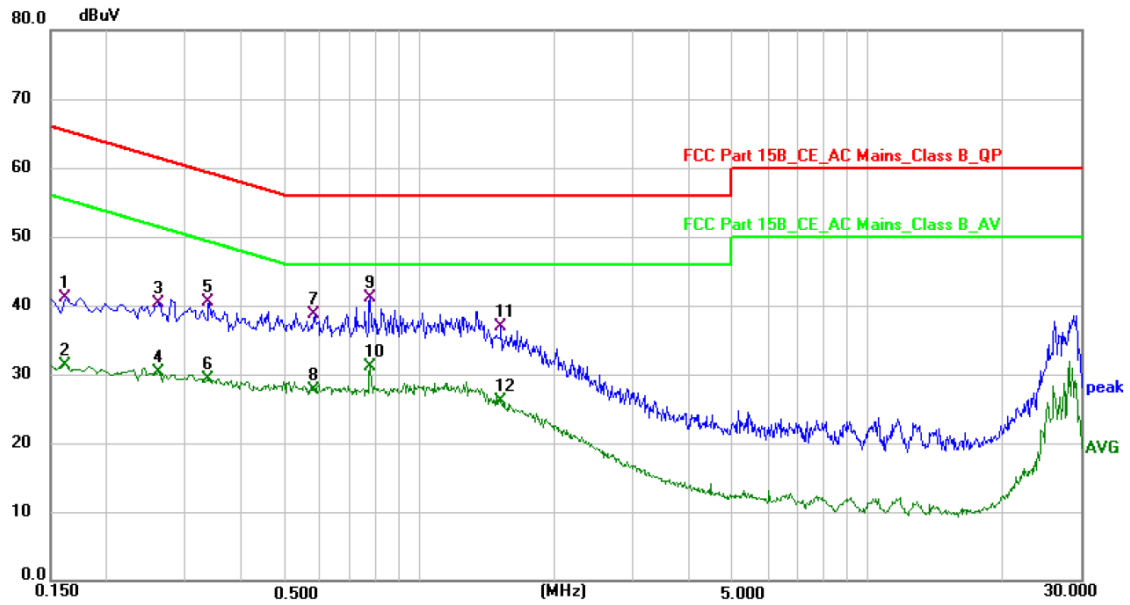

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1620	31.15	9.94	41.09	65.36	-24.27	QP
2	0.1620	21.46	9.94	31.40	55.36	-23.96	AVG
3	0.2620	30.31	9.97	40.28	61.37	-21.09	QP
4	0.2620	20.31	9.97	30.28	51.37	-21.09	AVG
5	0.3379	30.73	9.85	40.58	59.25	-18.67	QP
6	0.3379	19.39	9.85	29.24	49.25	-20.01	AVG
7	0.5820	29.09	9.71	38.80	56.00	-17.20	QP
8	0.5820	18.02	9.71	27.73	46.00	-18.27	AVG
9	0.7780	31.66	9.42	41.08	56.00	-14.92	QP
10 *	0.7780	21.68	9.42	31.10	46.00	-14.90	AVG
11	1.5260	27.41	9.40	36.81	56.00	-19.19	QP
12	1.5260	16.65	9.40	26.05	46.00	-19.95	AVG

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

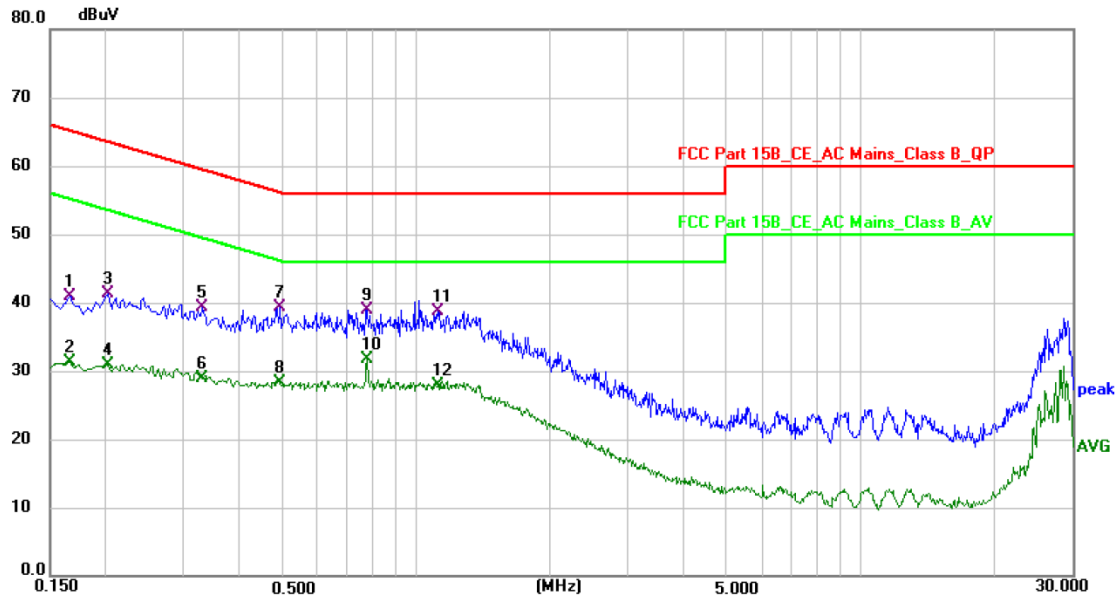Neutral:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1660	31.01	9.86	40.87	65.16	-24.29	QP
2	0.1660	21.47	9.86	31.33	55.16	-23.83	AVG
3	0.2020	31.28	10.04	41.32	63.53	-22.21	QP
4	0.2020	20.83	10.04	30.87	53.53	-22.66	AVG
5	0.3300	29.57	9.71	39.28	59.45	-20.17	QP
6	0.3300	19.25	9.71	28.96	49.45	-20.49	AVG
7	0.4940	29.44	9.77	39.21	56.10	-16.89	QP
8	0.4940	18.52	9.77	28.29	46.10	-17.81	AVG
9	0.7780	29.20	9.71	38.91	56.00	-17.09	QP
10 *	0.7780	22.01	9.71	31.72	46.00	-14.28	AVG
11	1.1220	29.27	9.48	38.75	56.00	-17.25	QP
12	1.1220	18.41	9.48	27.89	46.00	-18.11	AVG

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

All modes and channels have been tested and only the A 5180MHz mode with the worst data is listed.


4.3 Emission Bandwidth and 99% Occupied Bandwidth

Test Requirement:	FCC Part15 E Section 15.407(a), 15.407(e)
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	N/A
Test setup:	 Spectrum Analyzer EUT
Test procedure:	According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass


Measurement Data:

Band 1 (5150-5250 MHz):


Condition	Antenna	Modulation	Frequency(MHz)	26dB Emission Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT1	802.11a	5180.00	36.48	16.80
NVNT	ANT1	802.11a	5200.00	34.92	17.04
NVNT	ANT1	802.11a	5240.00	35.37	16.92
NVNT	ANT1	802.11n(HT20)	5180.00	38.98	17.80
NVNT	ANT1	802.11n(HT20)	5200.00	38.39	17.87
NVNT	ANT1	802.11n(HT20)	5240.00	39.25	17.85
NVNT	ANT1	802.11ac(VHT20)	5180.00	39.09	17.73
NVNT	ANT1	802.11ac(VHT20)	5200.00	37.49	17.81
NVNT	ANT1	802.11ac(VHT20)	5240.00	38.76	17.86
NVNT	ANT1	802.11n(HT40)	5190.00	75.41	37.34
NVNT	ANT1	802.11n(HT40)	5230.00	74.20	36.97

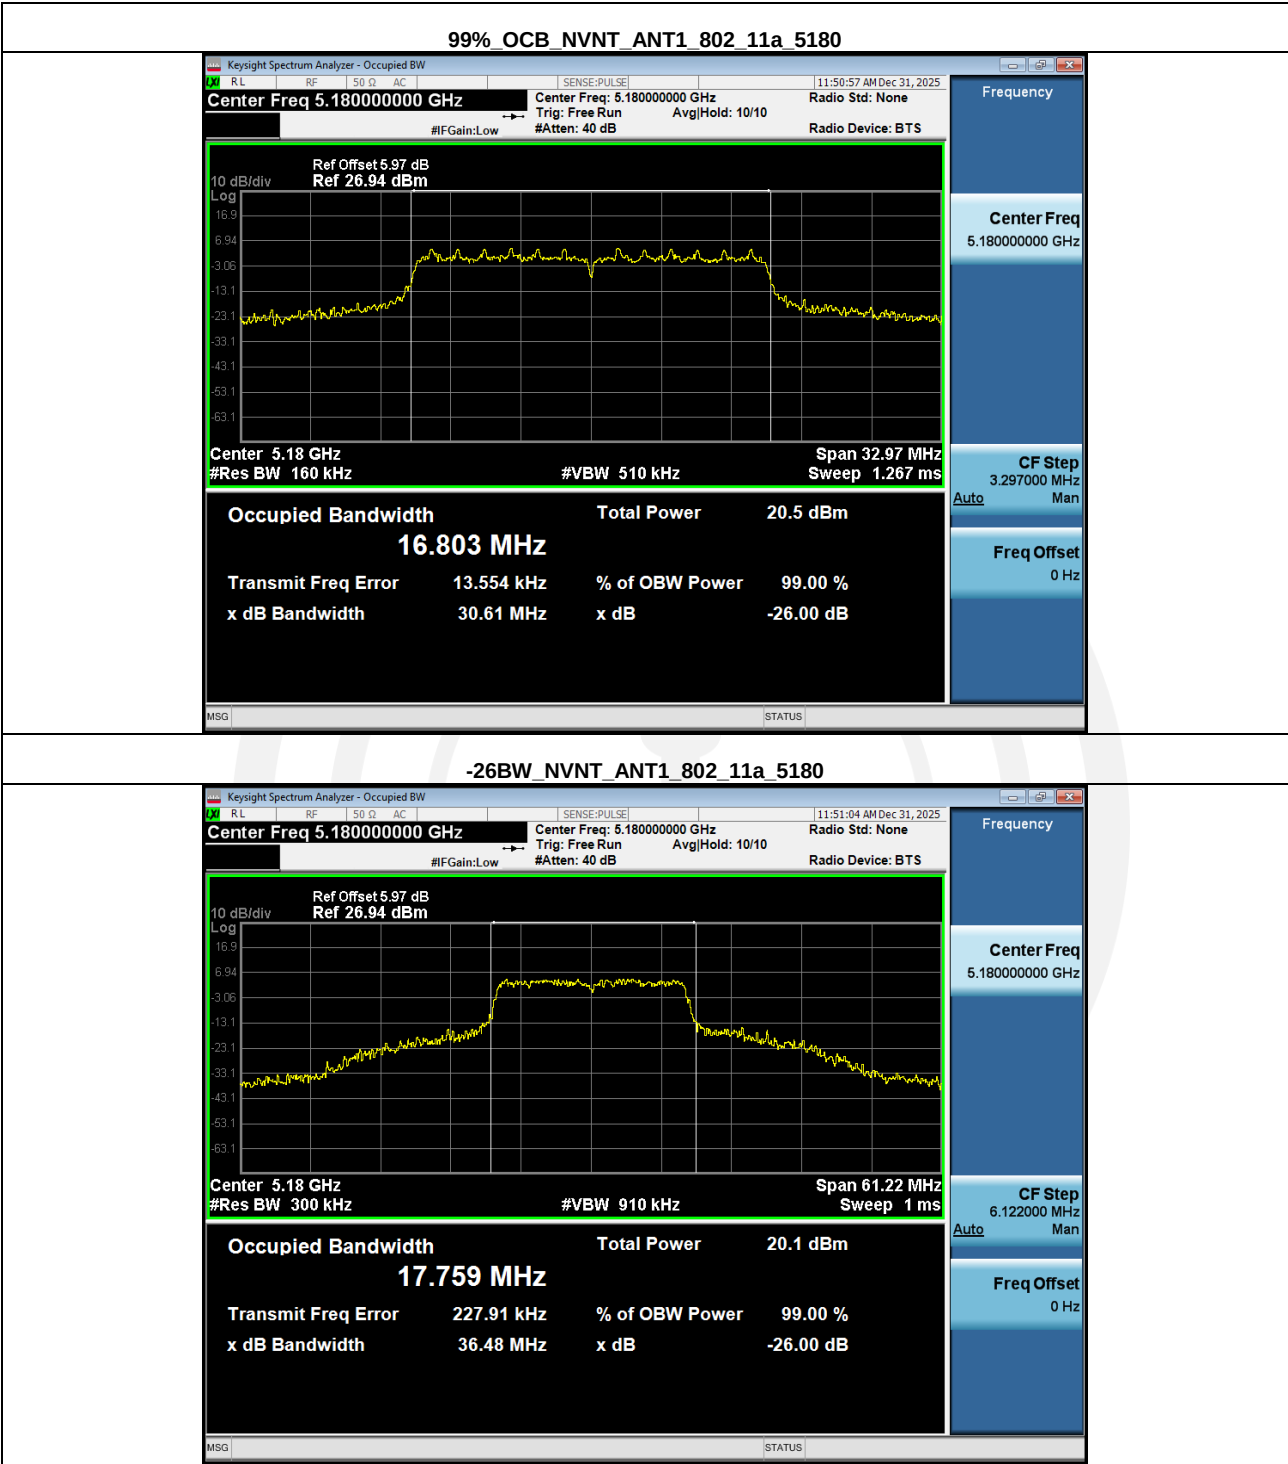



99%_OCB_NVNT_ANT1_802_11a_5200

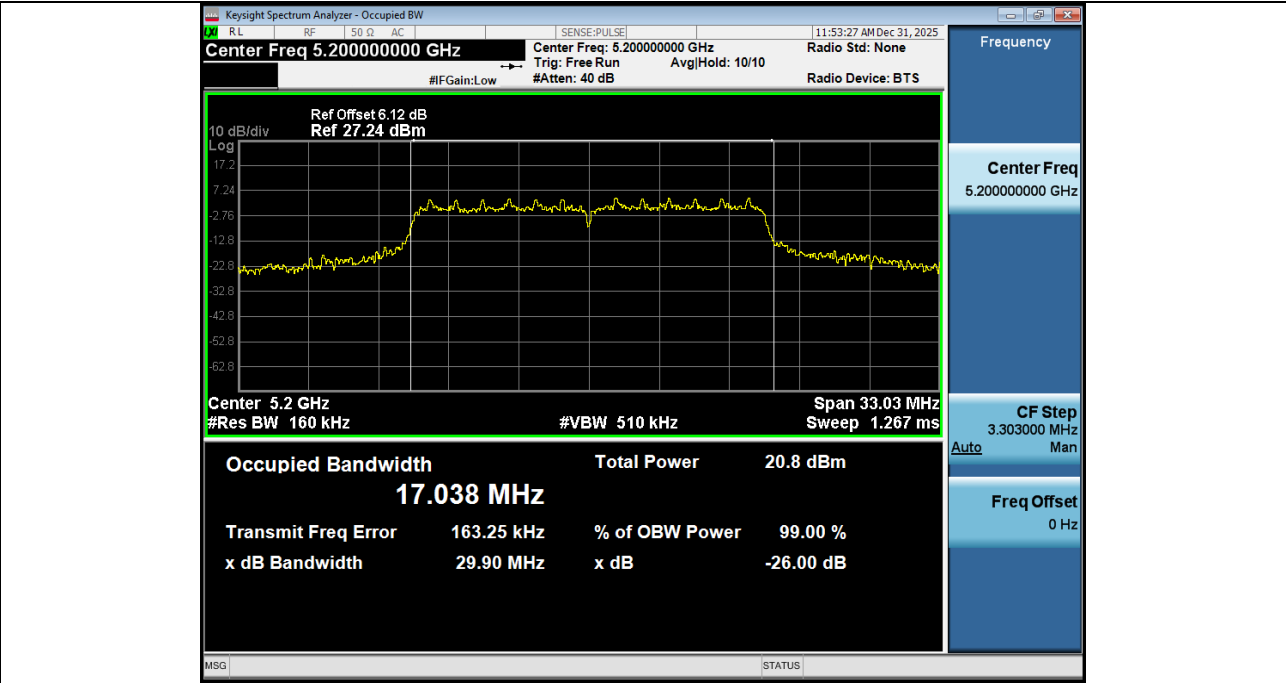


-26BW_NVNT_ANT1_802_11a_5200

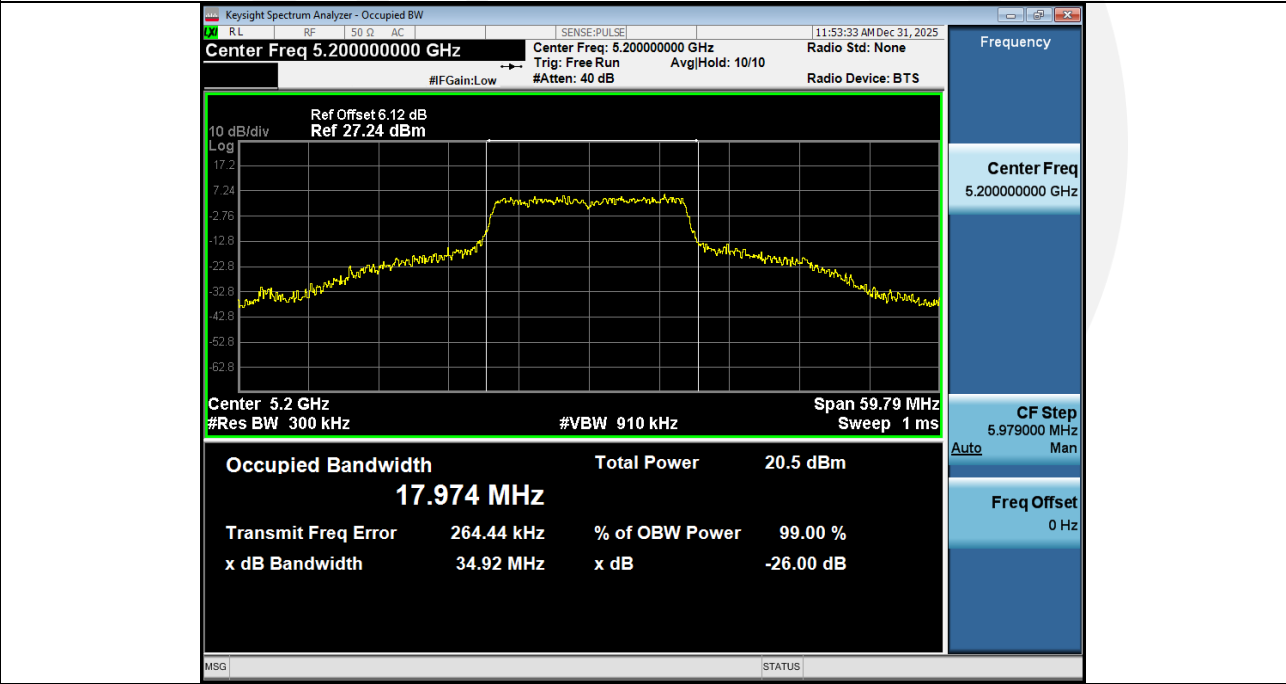


99%_OCB_NVNT_ANT1_802_11a_5240

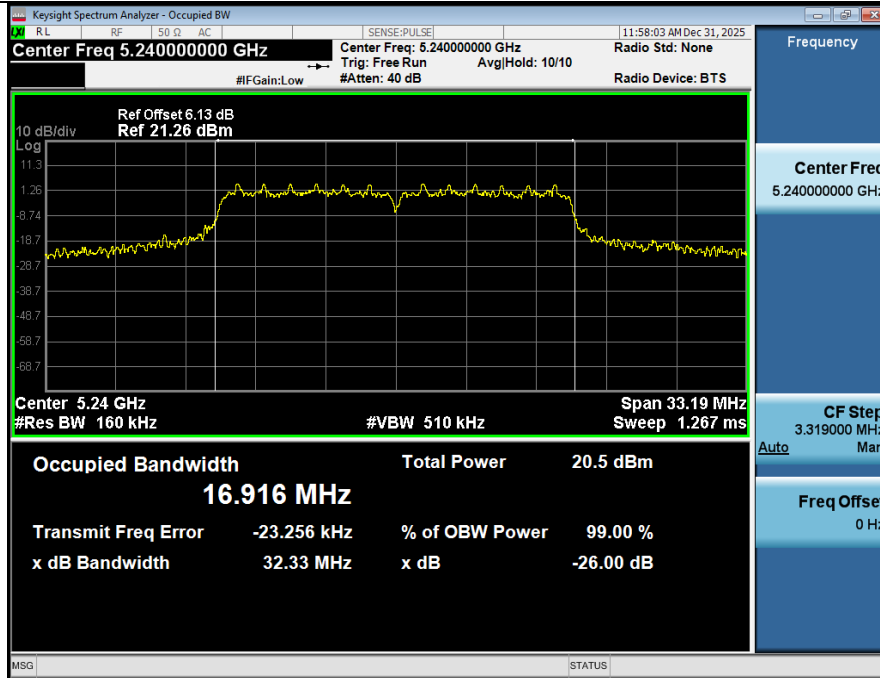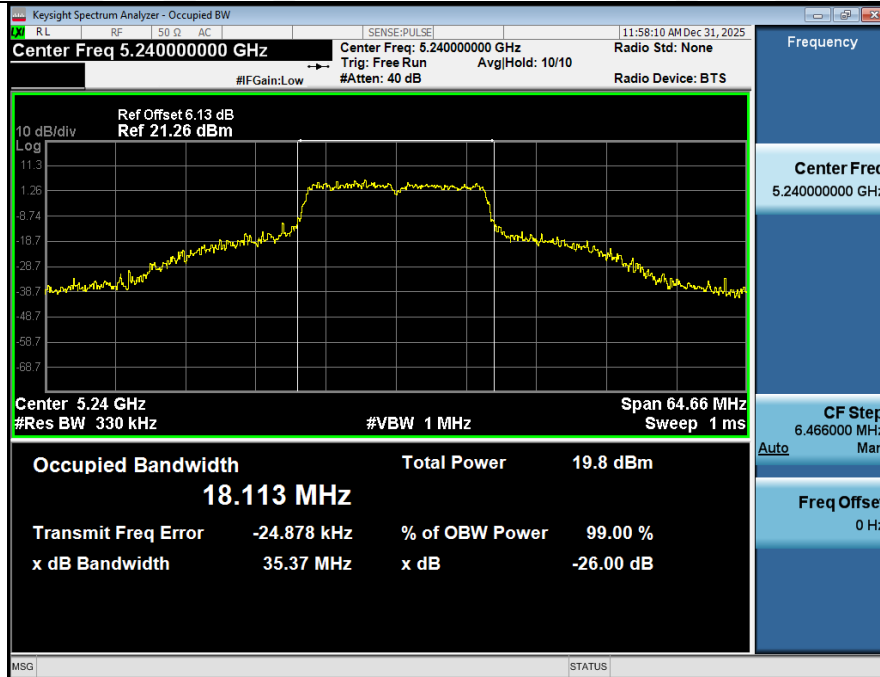
**-26BW_NVNT_ANT1_802_11a_5240****99%_OCB_NVNT_ANT1_802_11n(HT20)_5180**

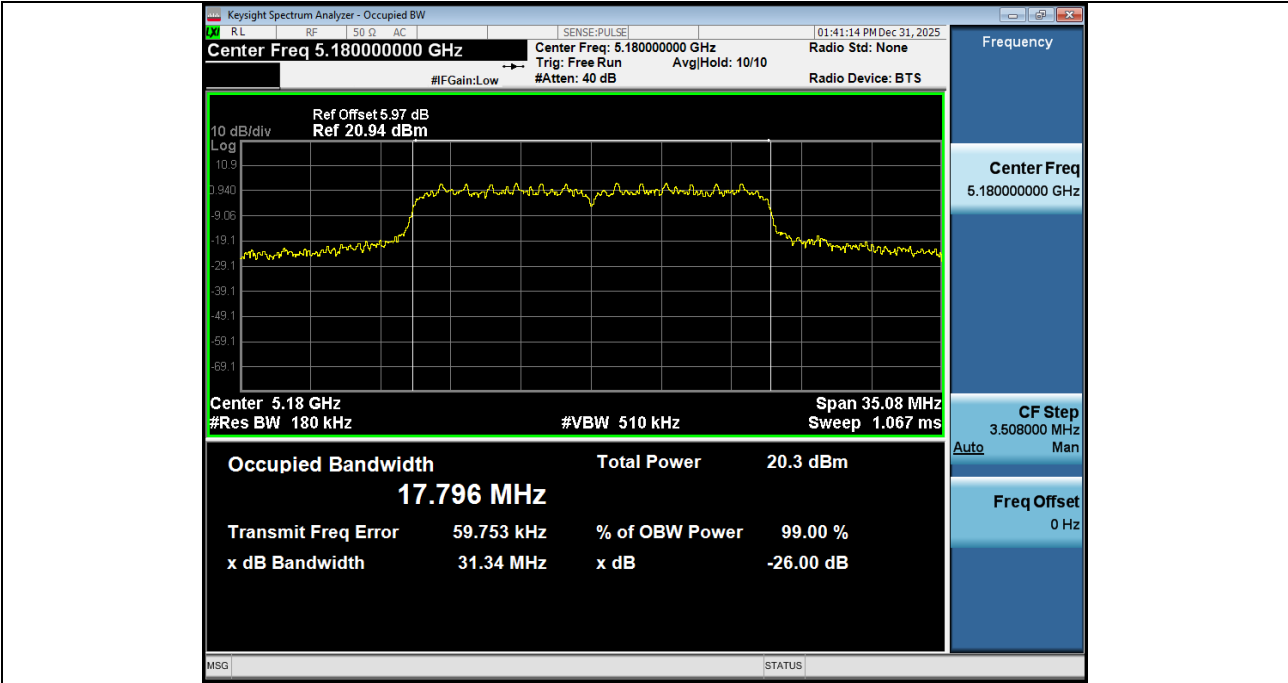


-26BW_NVNT_ANT1_802_11n(HT20)_5180

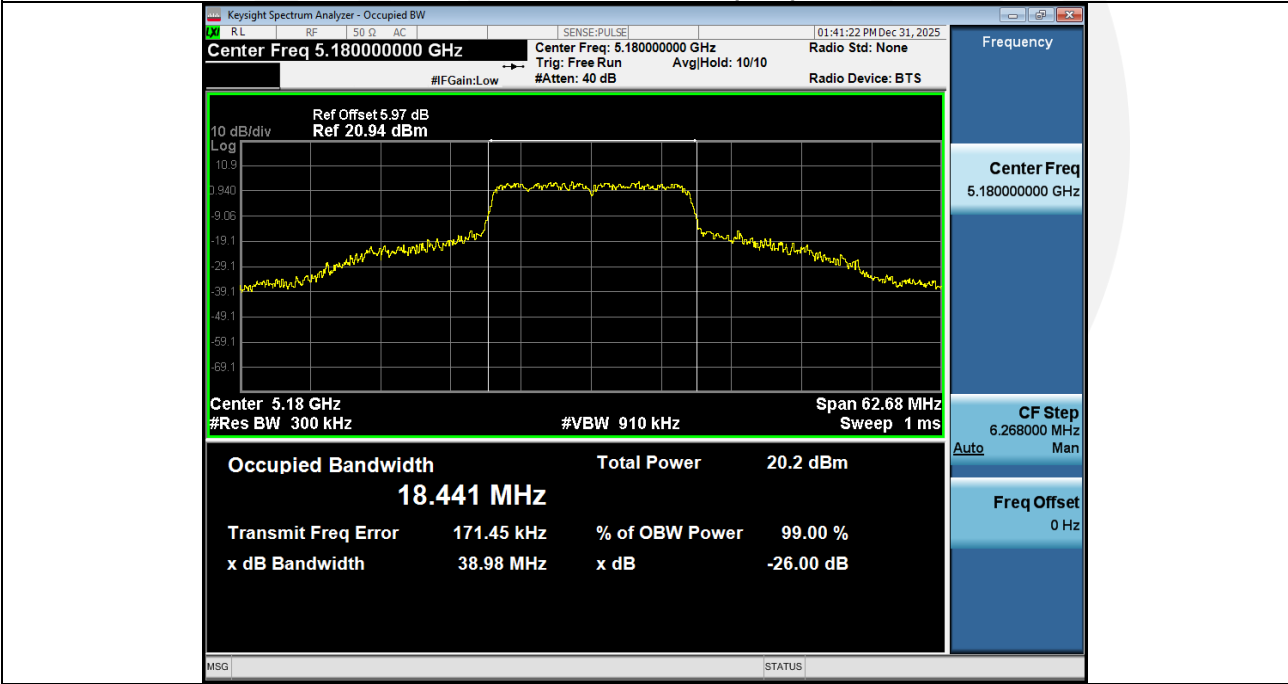


99%_OCB_NVNT_ANT1_802_11n(HT20)_5200

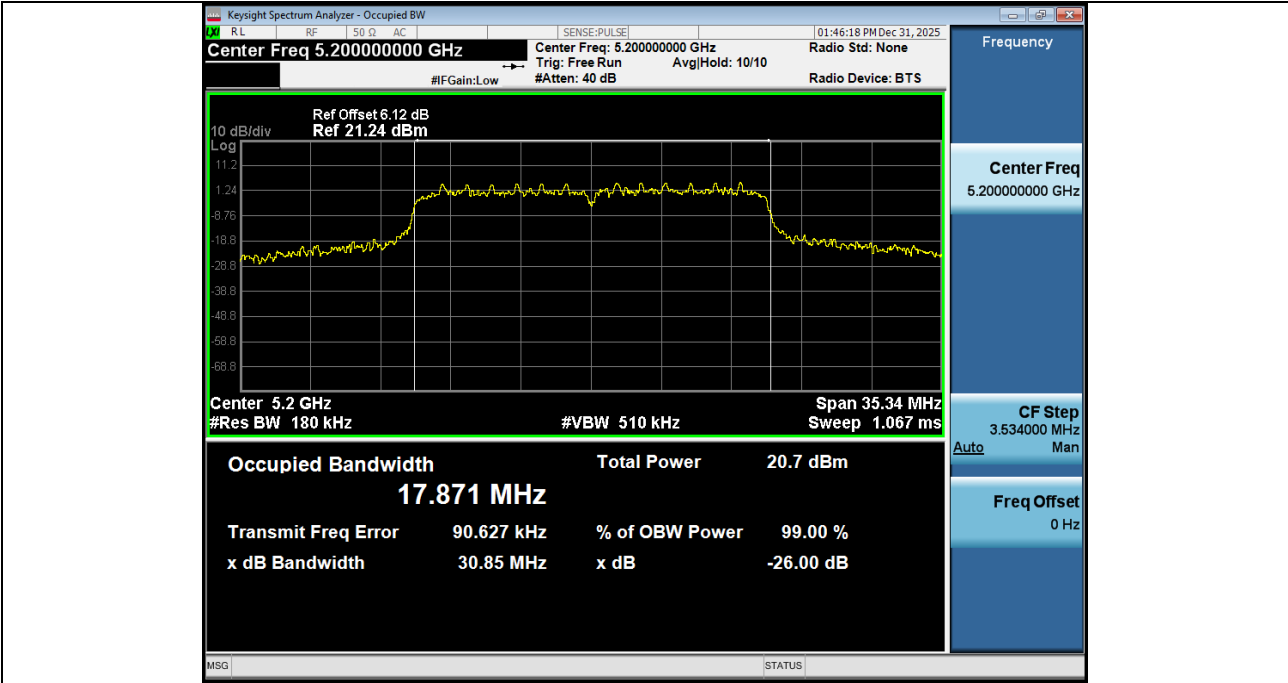


-26BW_NVNT_ANT1_802_11n(HT20)_5200

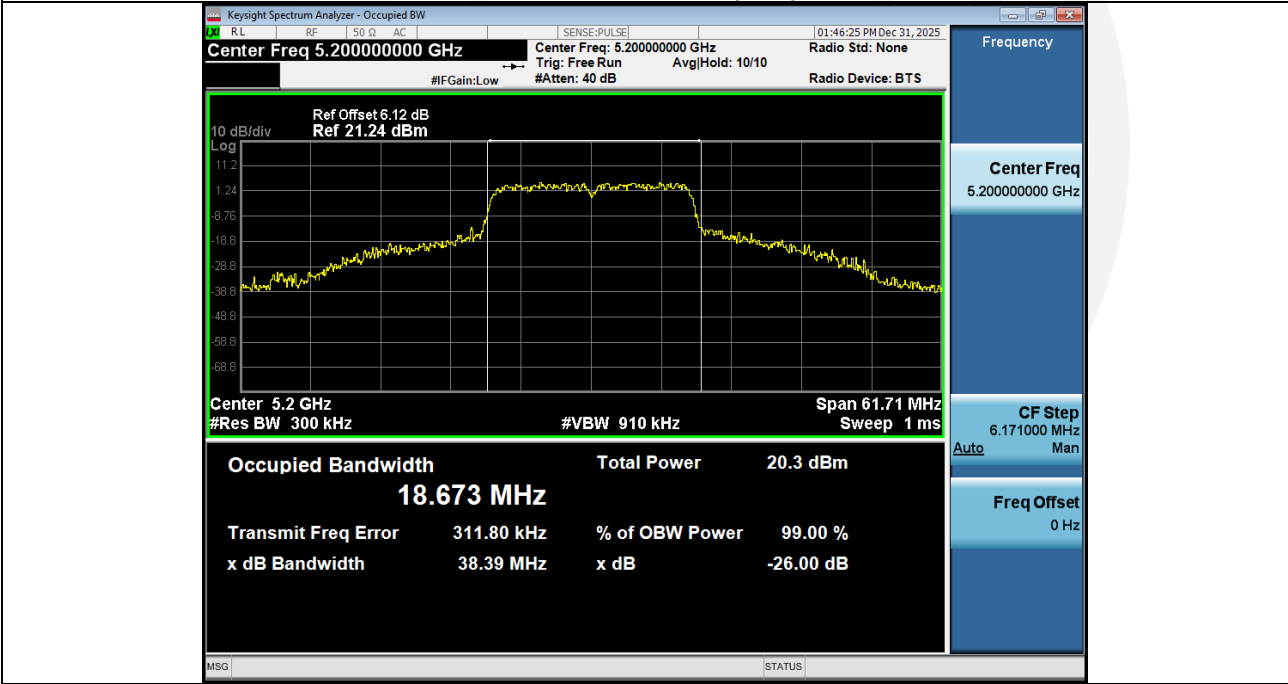


99%_OCB_NVNT_ANT1_802_11n(HT20)_5240

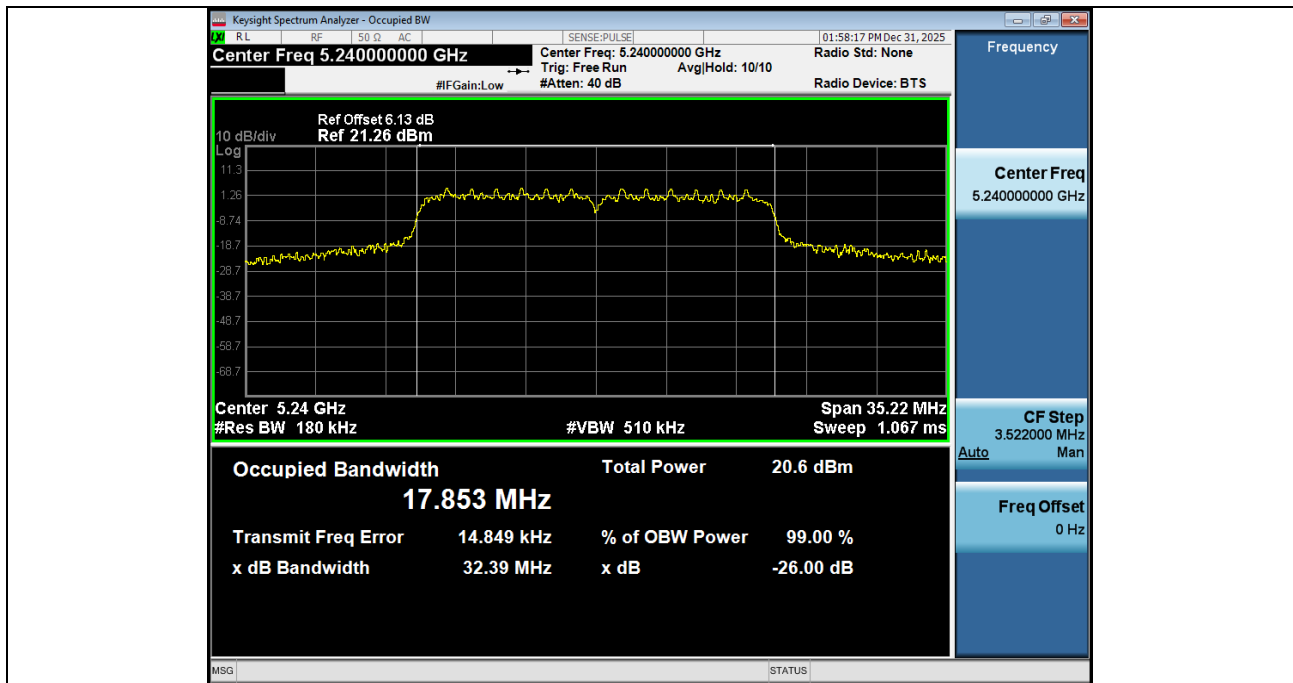


-26BW_NVNT_ANT1_802_11n(HT20)_5240

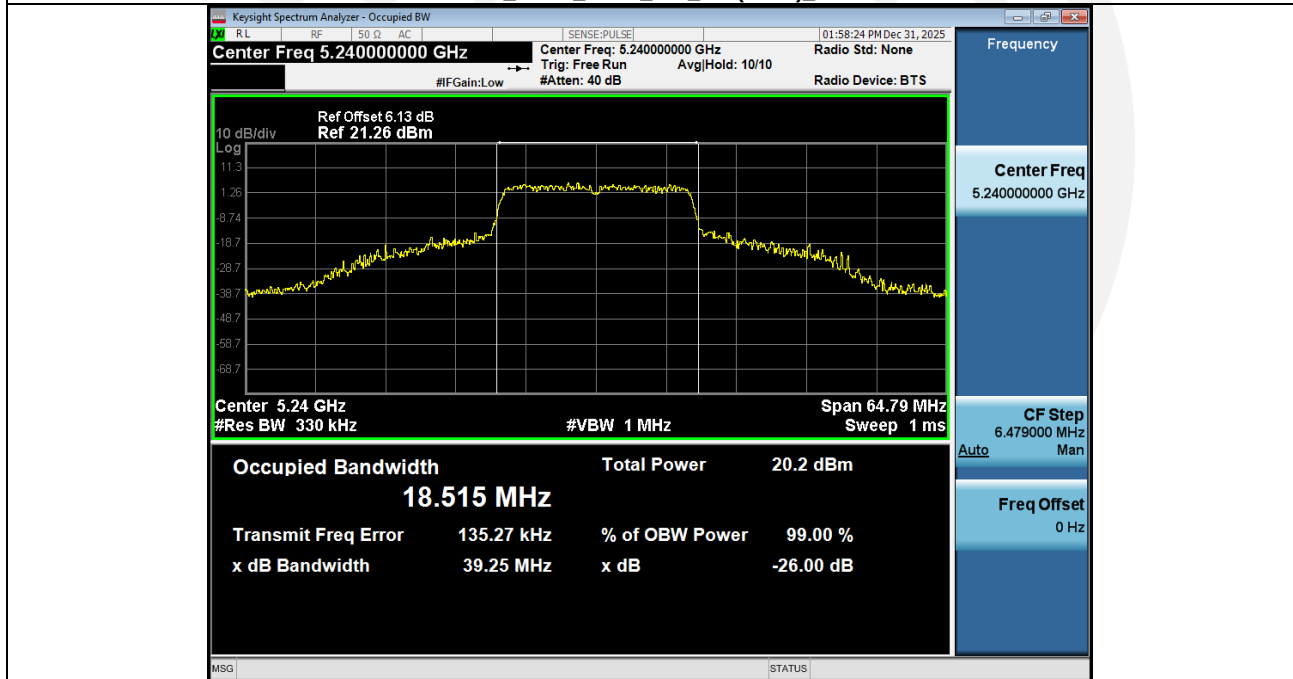


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5180

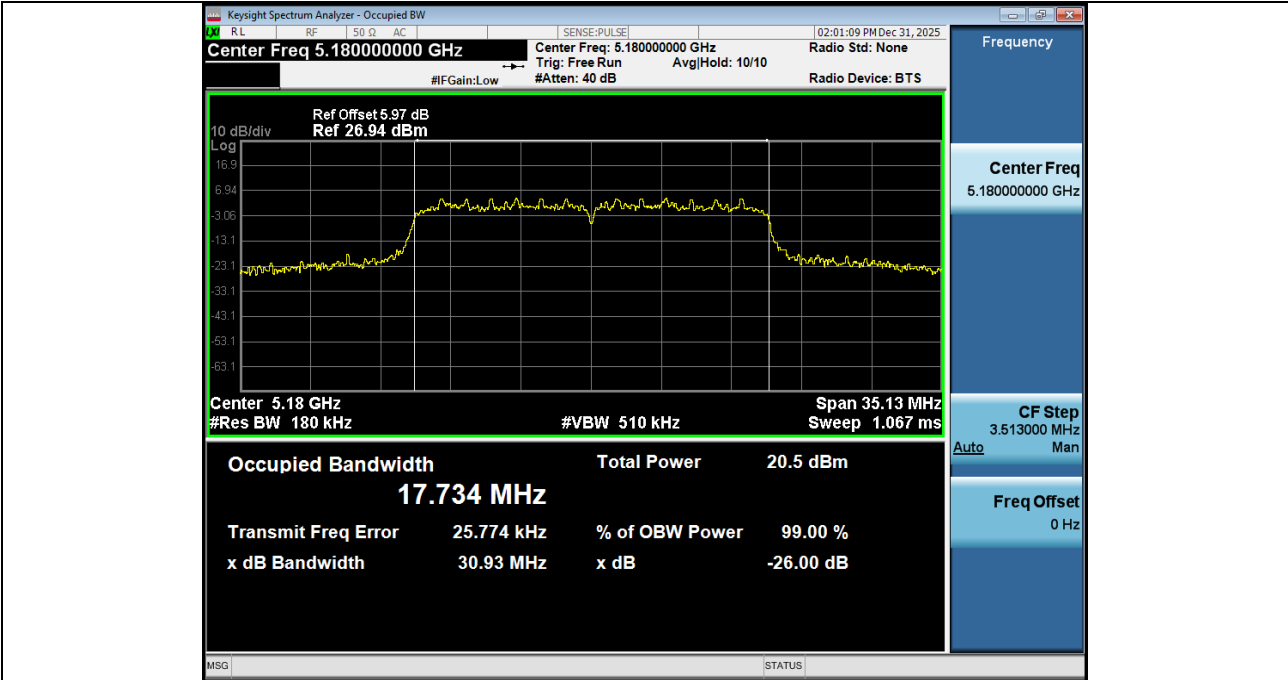


-26BW_NVNT_ANT1_802_11ac(VHT20)_5180

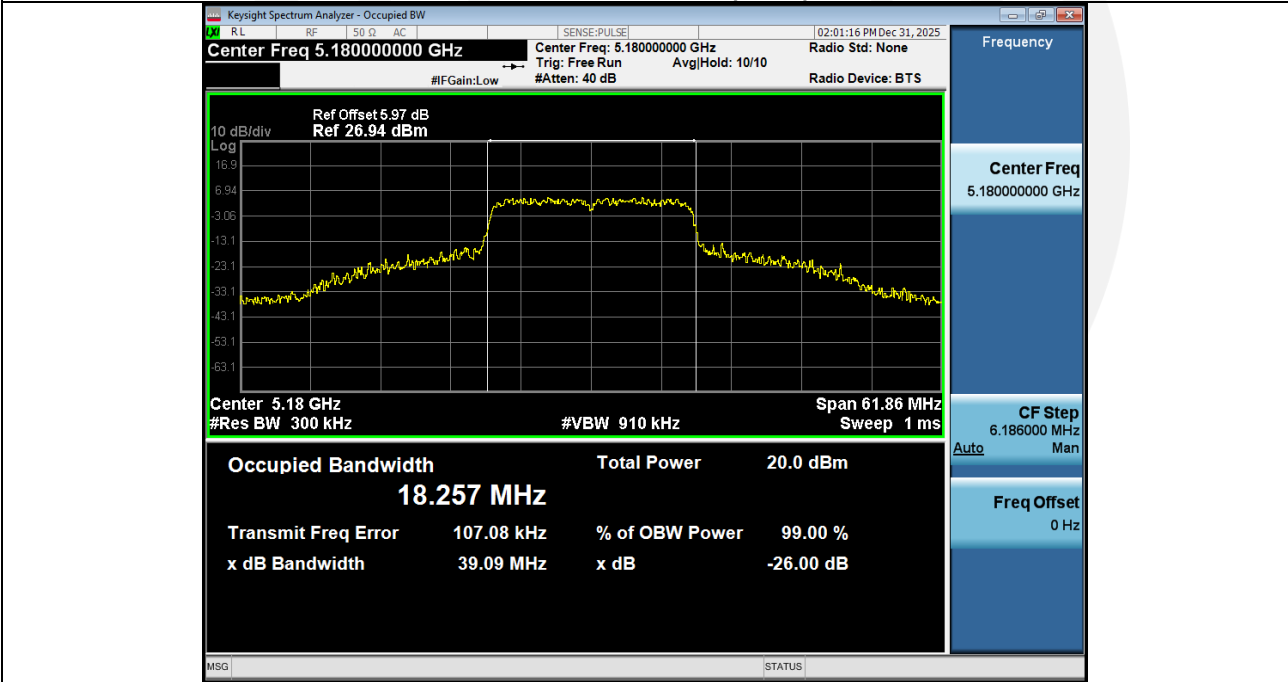



99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5200

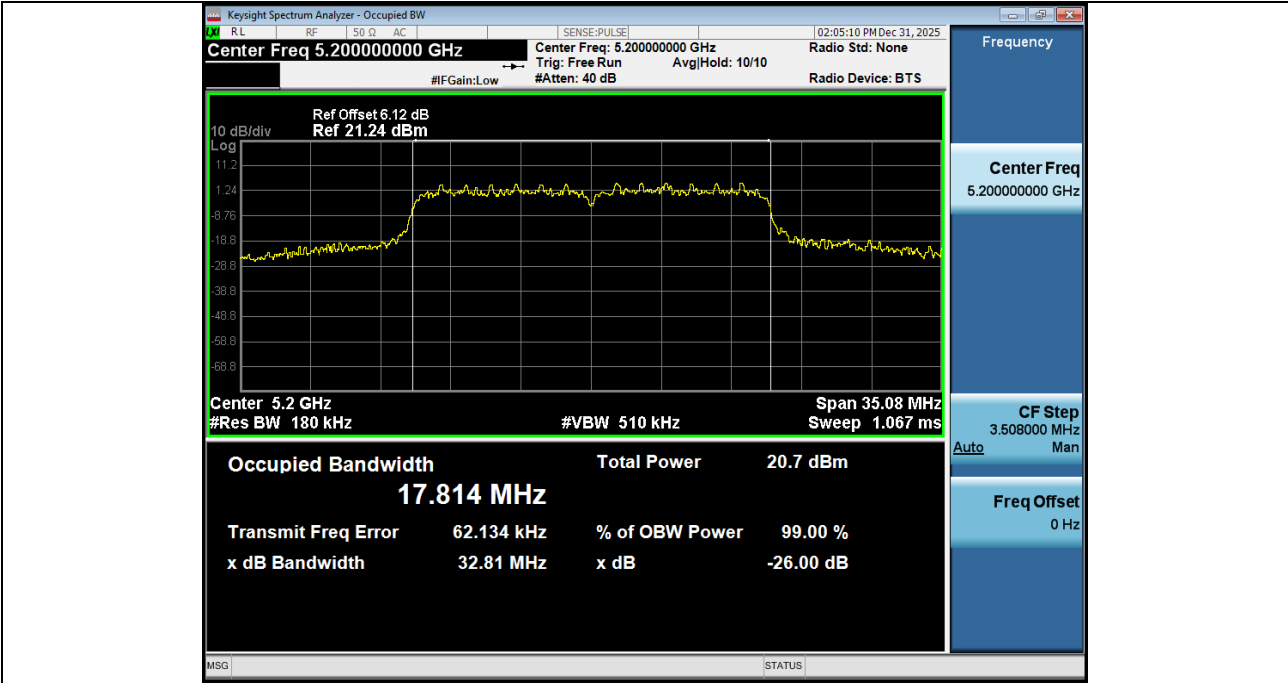

-26BW_NVNT_ANT1_802_11ac(VHT20)_5200

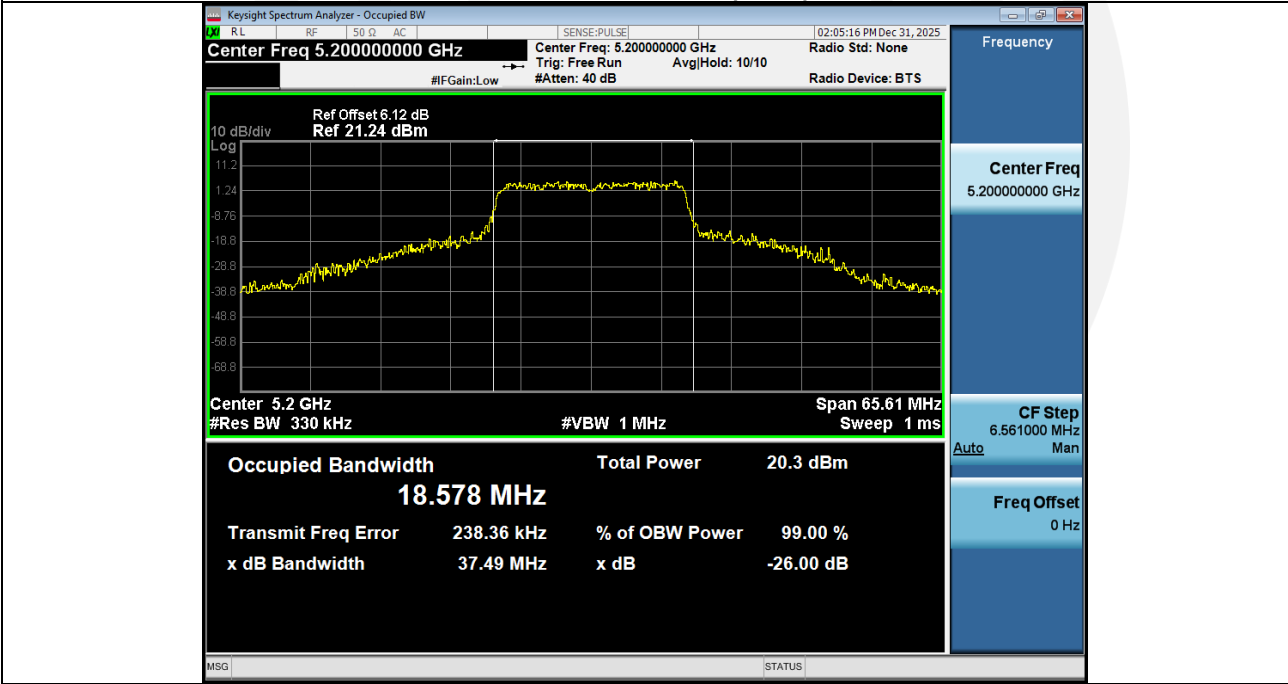



99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5240

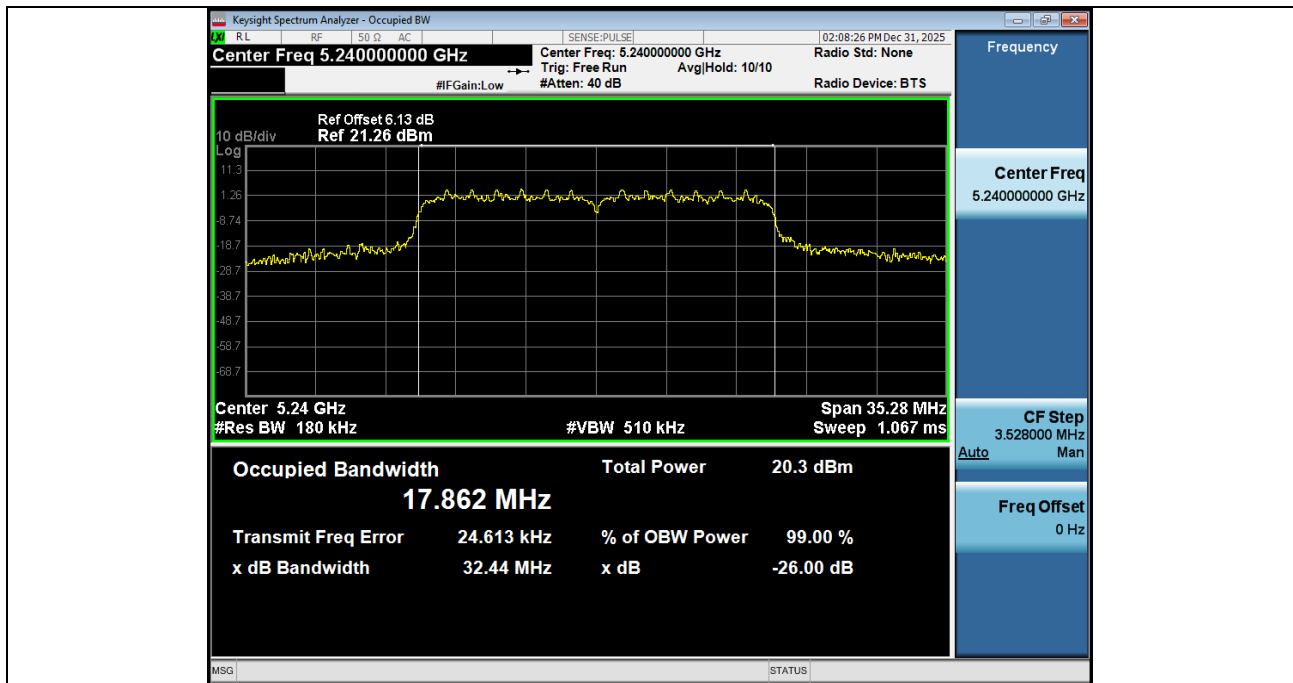
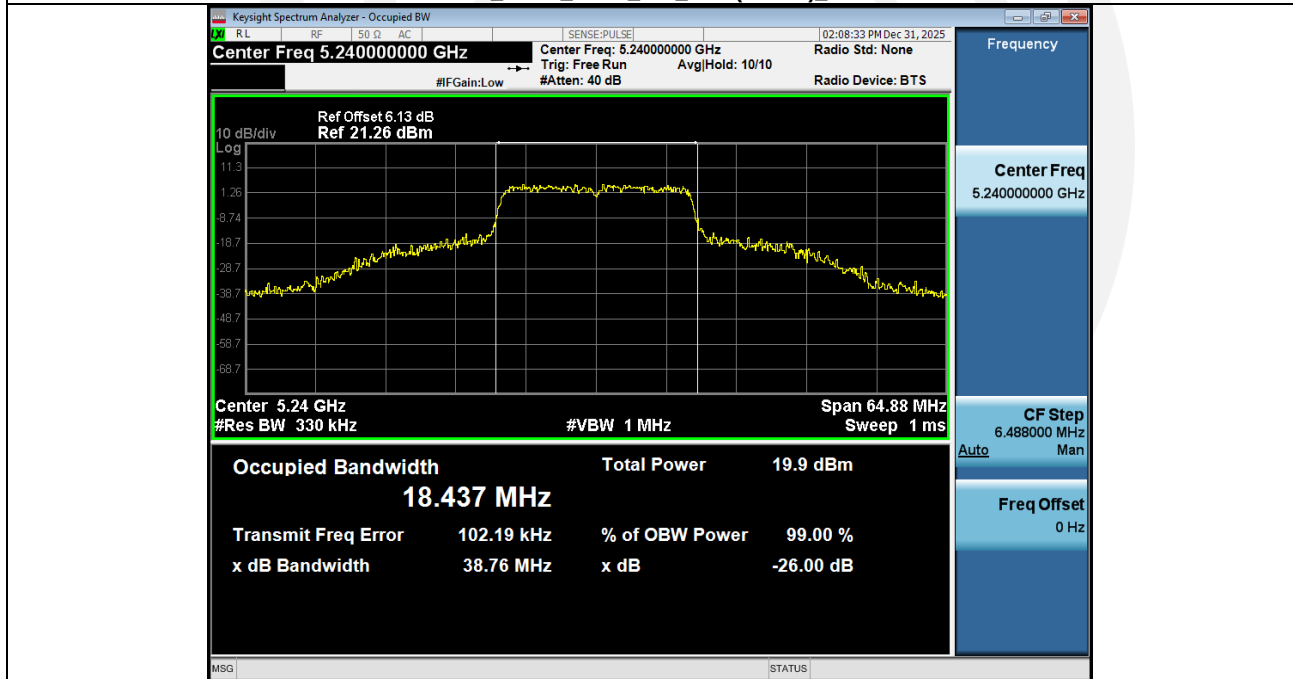
**-26BW_NVNT_ANT1_802_11ac(VHT20)_5240**


Band 4 (5725-5850 MHz):

Condition	Antenna	Mode	Frequency(MHz)	6dB_Emission_Bandwidth(MHz)	Limit(MHz)	Result
NVNT	ANT1	802.11a	5745.00	16.341	0.500	Pass
NVNT	ANT1	802.11a	5785.00	16.349	0.500	Pass
NVNT	ANT1	802.11a	5825.00	16.357	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	17.249	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	16.977	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	17.178	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	17.112	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	17.118	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	17.146	0.500	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	35.246	0.500	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	35.254	0.500	Pass

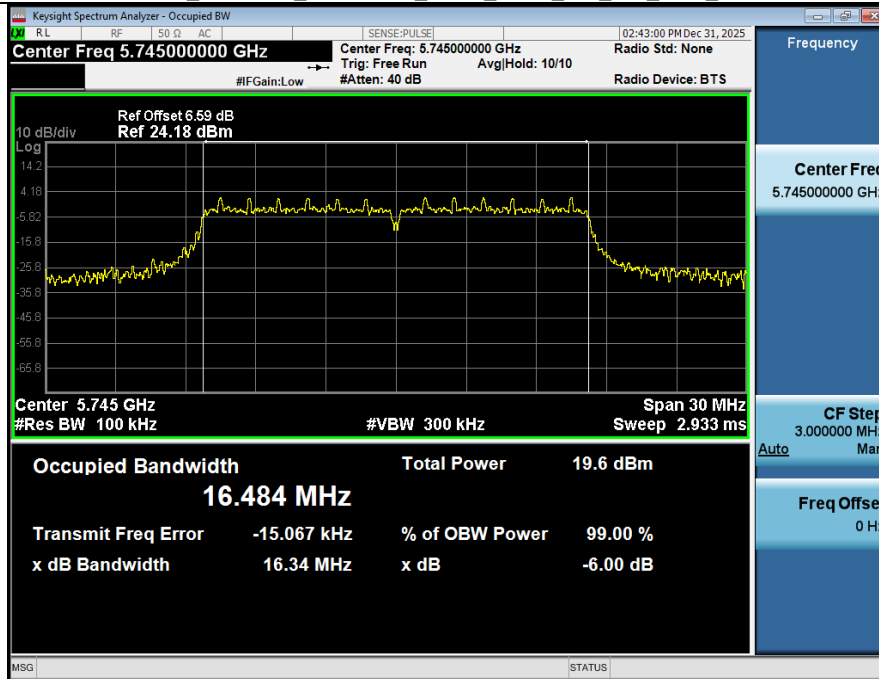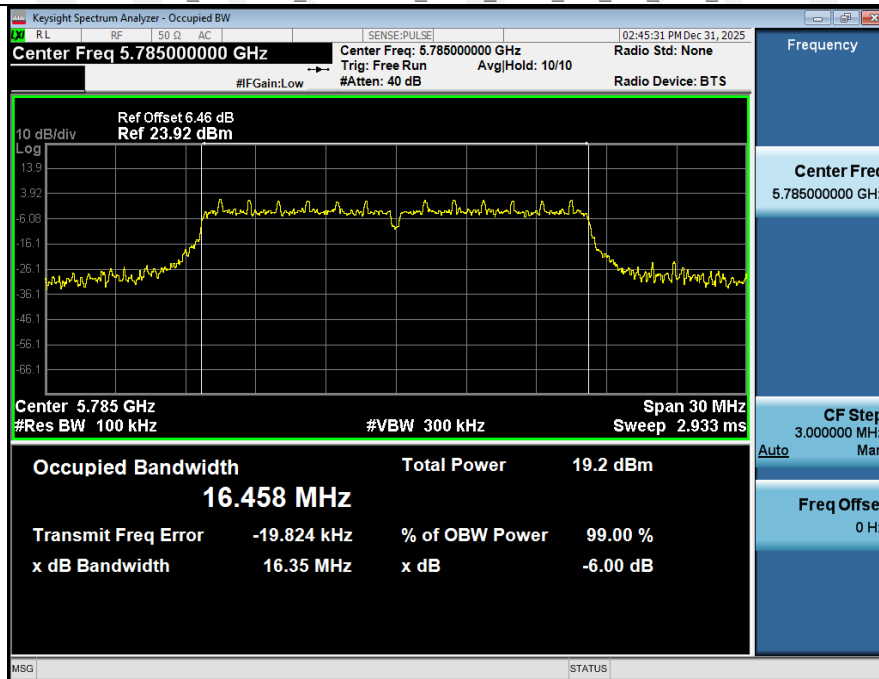


-6dB Emission Bandwidth NVNT ANT1 802 11a 5745 20M**-6dB Emission Bandwidth NVNT ANT1 802 11a 5785 20M****-6dB Emission Bandwidth NVNT ANT1 802 11a 5825 20M**

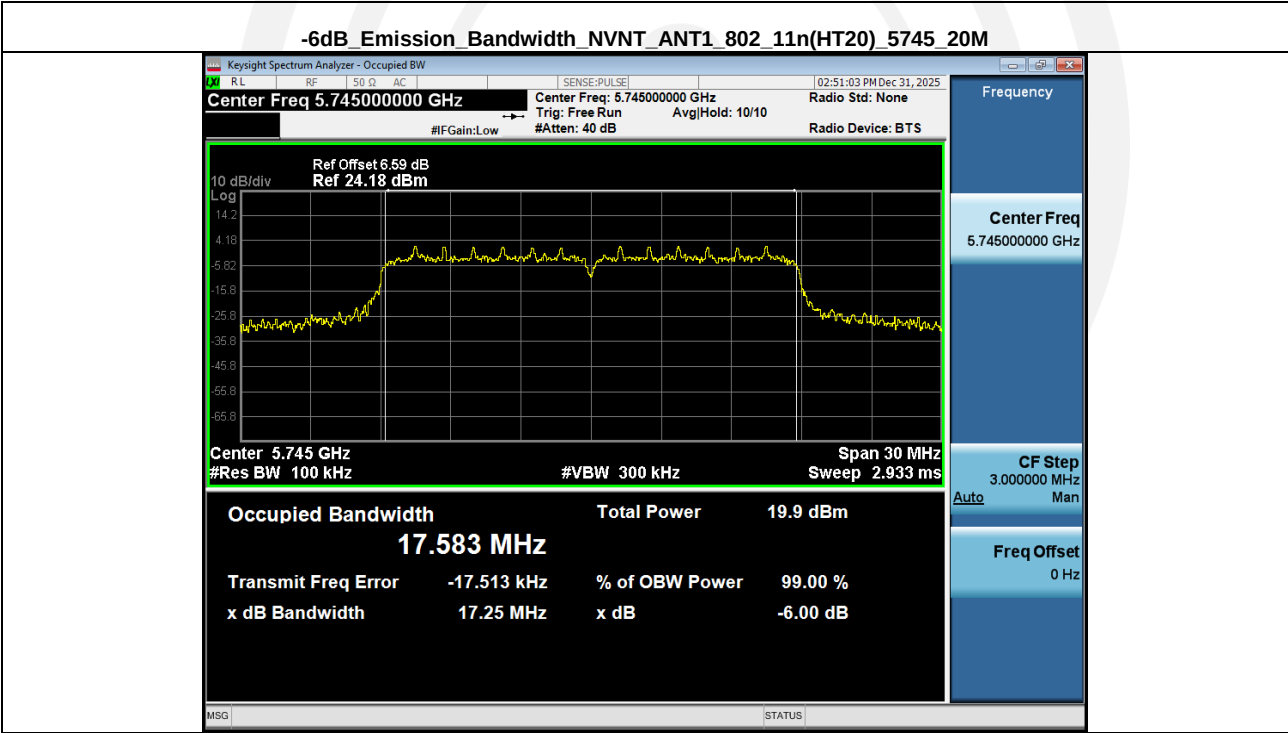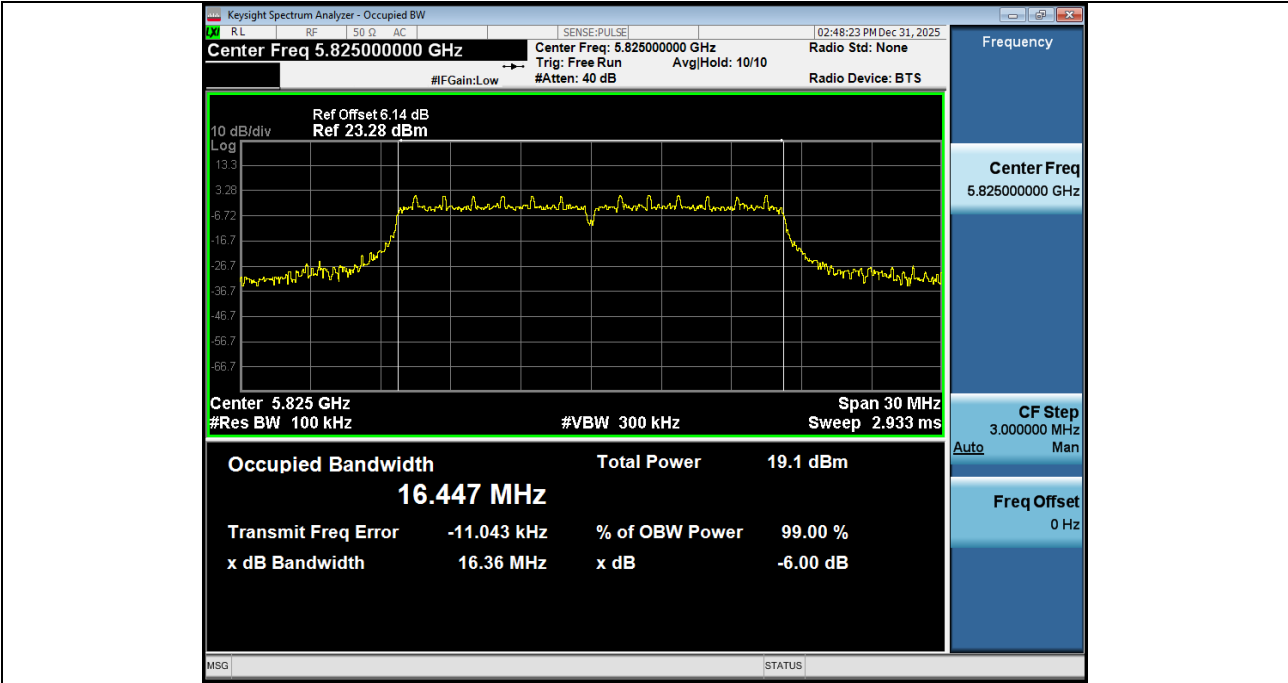


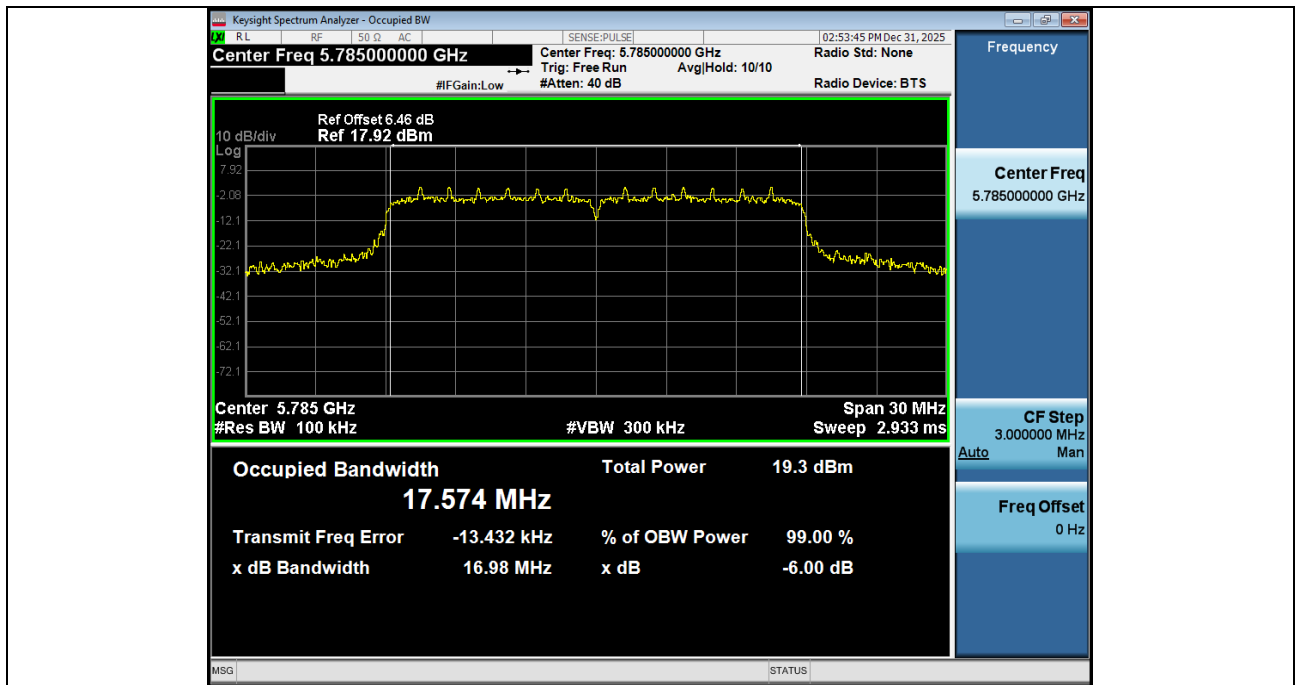


-6dB Emission Bandwidth NVNT ANT1_802_11n(HT20)_5825_20M

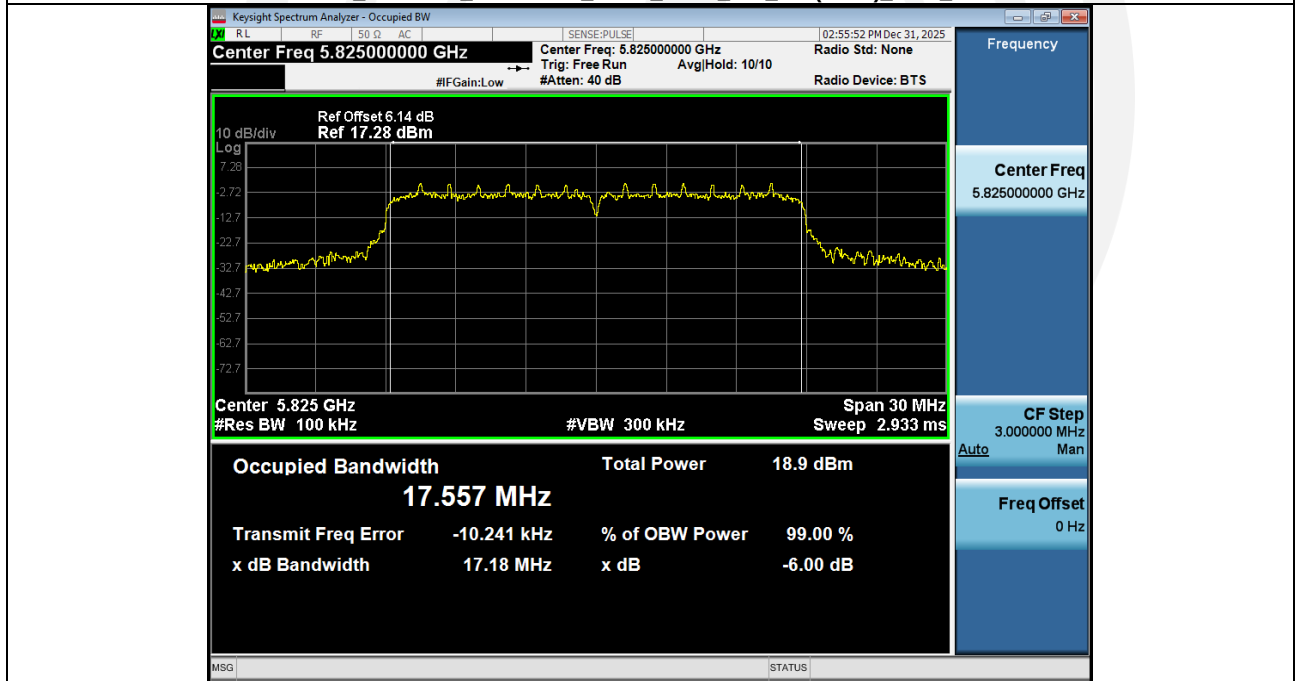



-6dB Emission Bandwidth NVNT ANT1_802_11ac(VHT20)_5745_20M

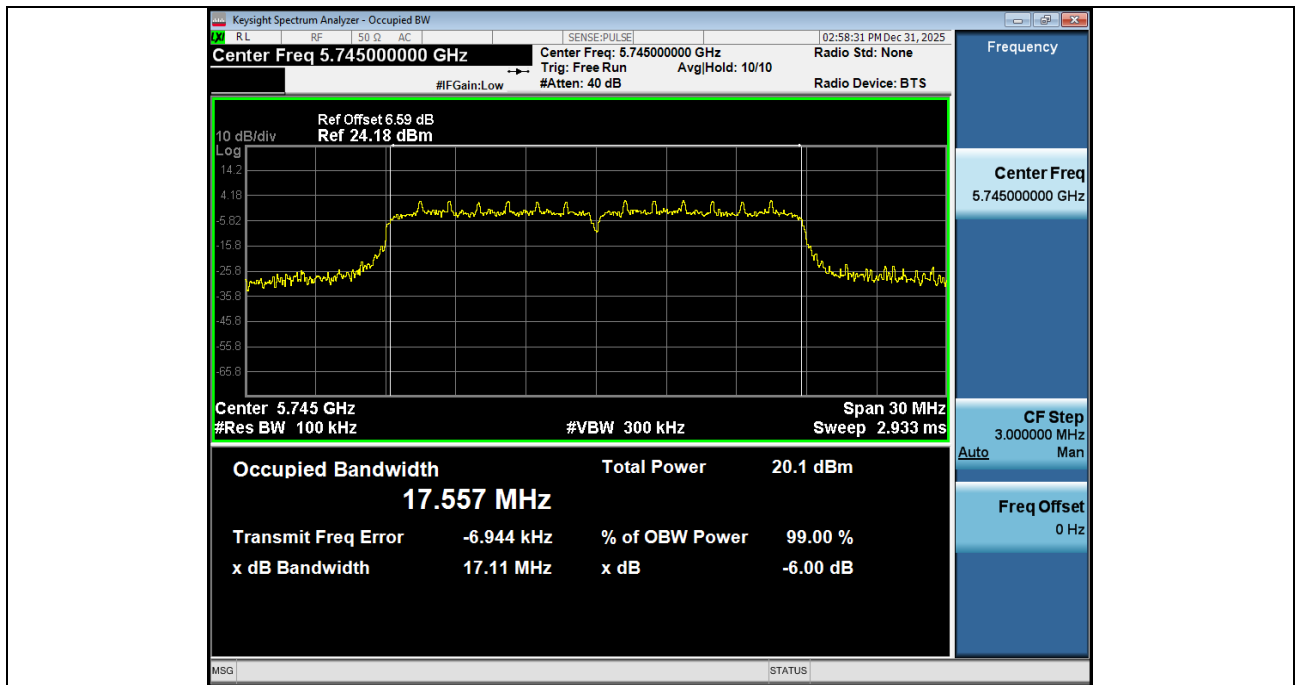


-6dB Emission Bandwidth NVNT_ANT1_802_11ac(VHT20)_5785_20M

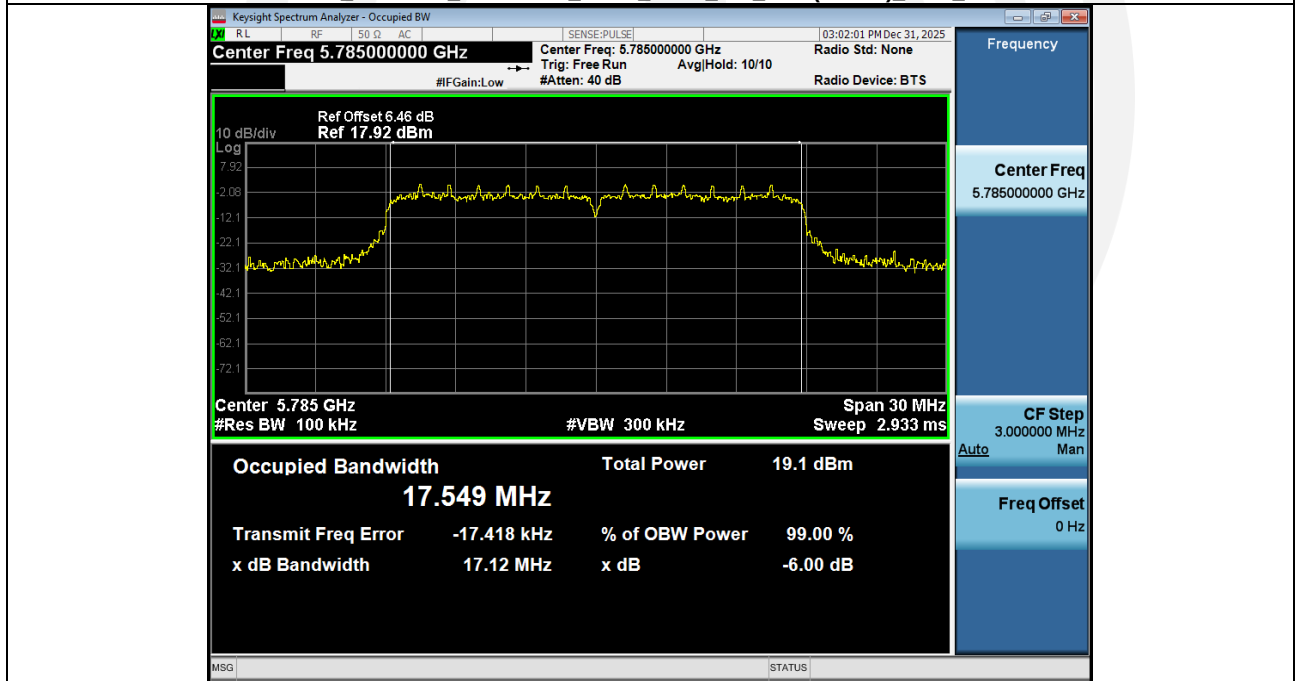


-6dB Emission Bandwidth NVNT_ANT1_802_11ac(VHT20)_5825_20M

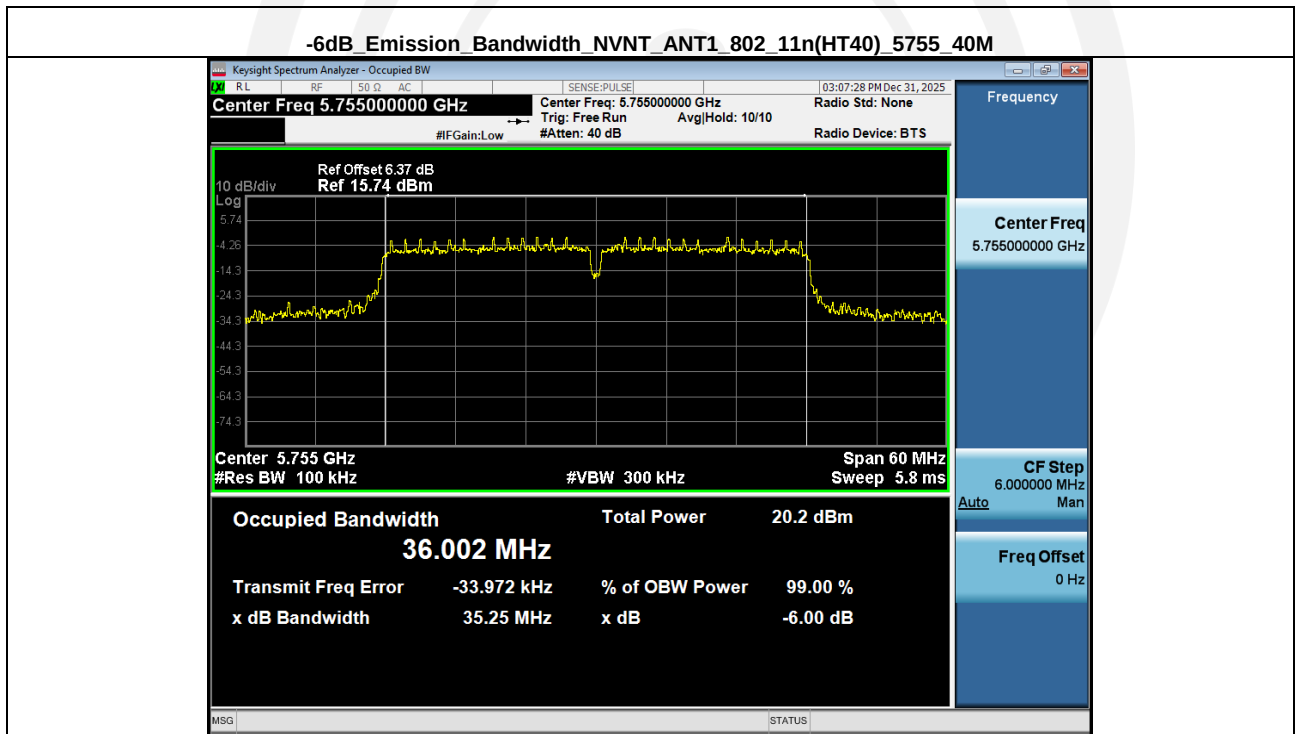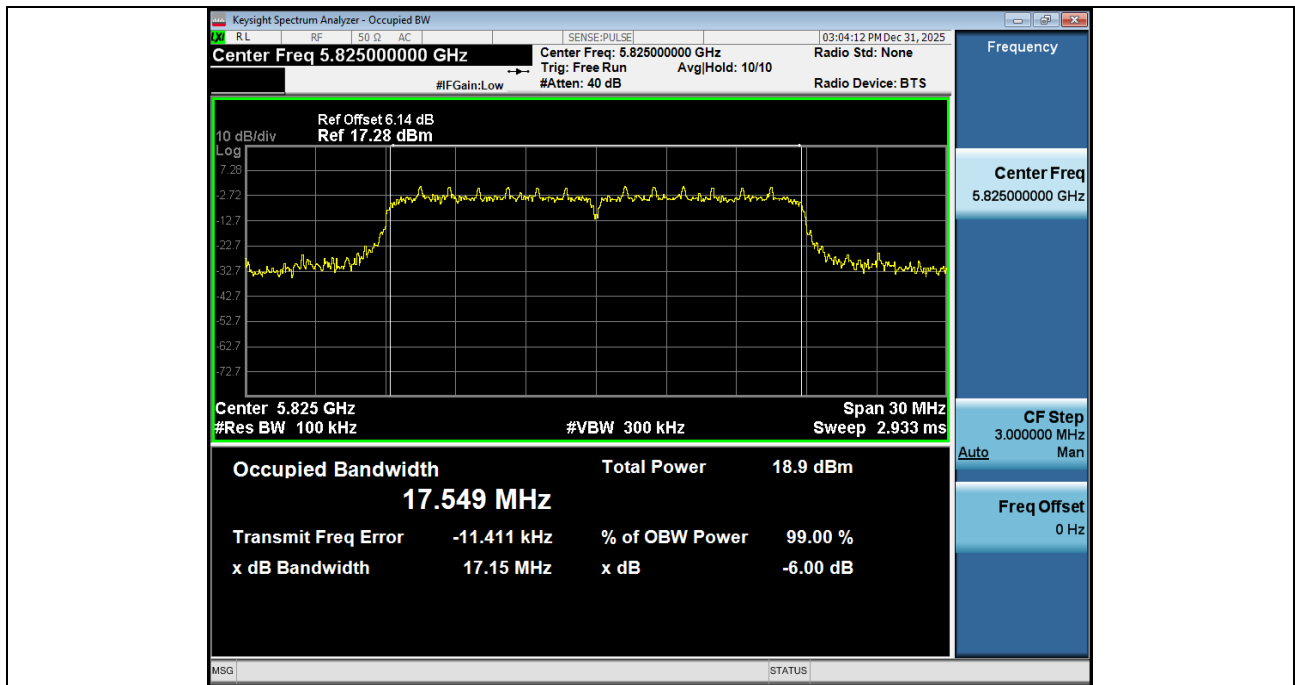

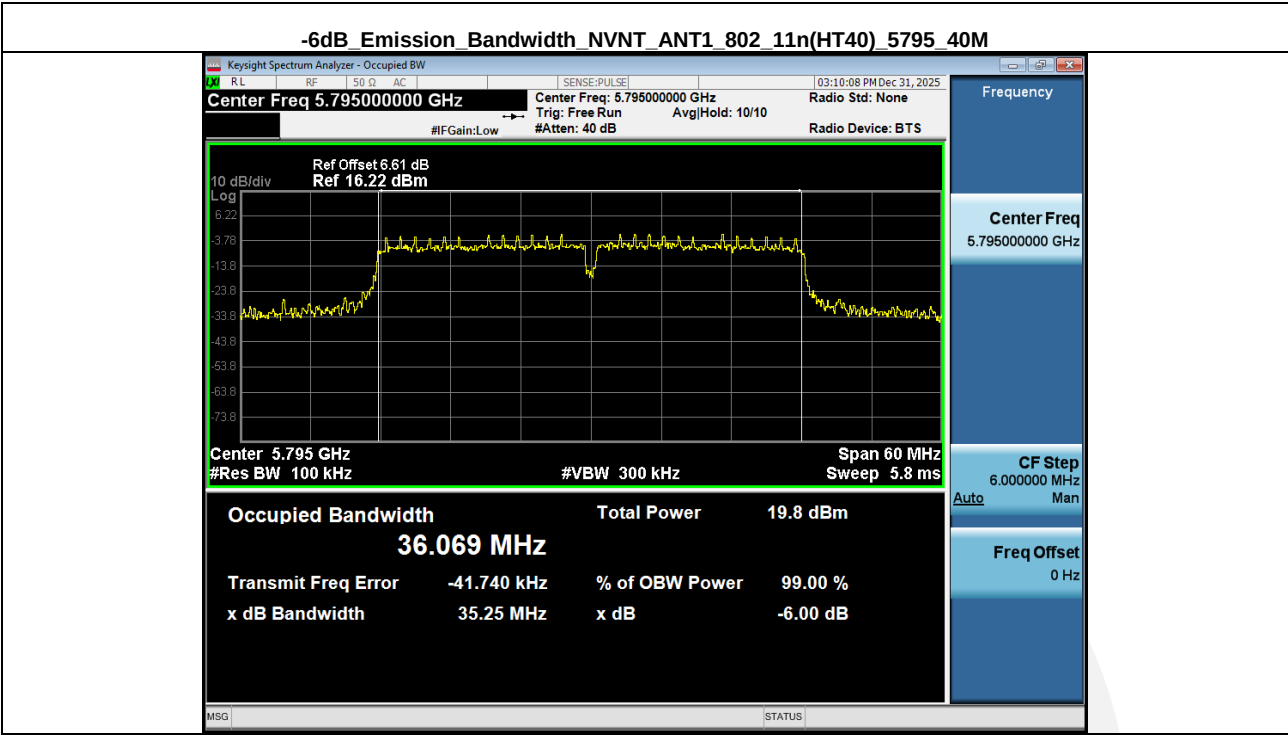


Condition	Antenna	Modulation	Frequency(MHz)	- 26dB Emission Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT1	802.11a	5745.00	28.51	16.97
NVNT	ANT1	802.11a	5785.00	31.29	16.94
NVNT	ANT1	802.11a	5825.00	24.67	16.85
NVNT	ANT1	802.11n(HT20)	5745.00	30.65	17.98
NVNT	ANT1	802.11n(HT20)	5785.00	30.61	17.99
NVNT	ANT1	802.11n(HT20)	5825.00	28.90	18.02
NVNT	ANT1	802.11ac(VHT20)	5745.00	27.16	17.83
NVNT	ANT1	802.11ac(VHT20)	5785.00	26.71	17.84
NVNT	ANT1	802.11ac(VHT20)	5825.00	27.85	17.83
NVNT	ANT1	802.11n(HT40)	5755.00	58.65	36.54
NVNT	ANT1	802.11n(HT40)	5795.00	57.00	36.64




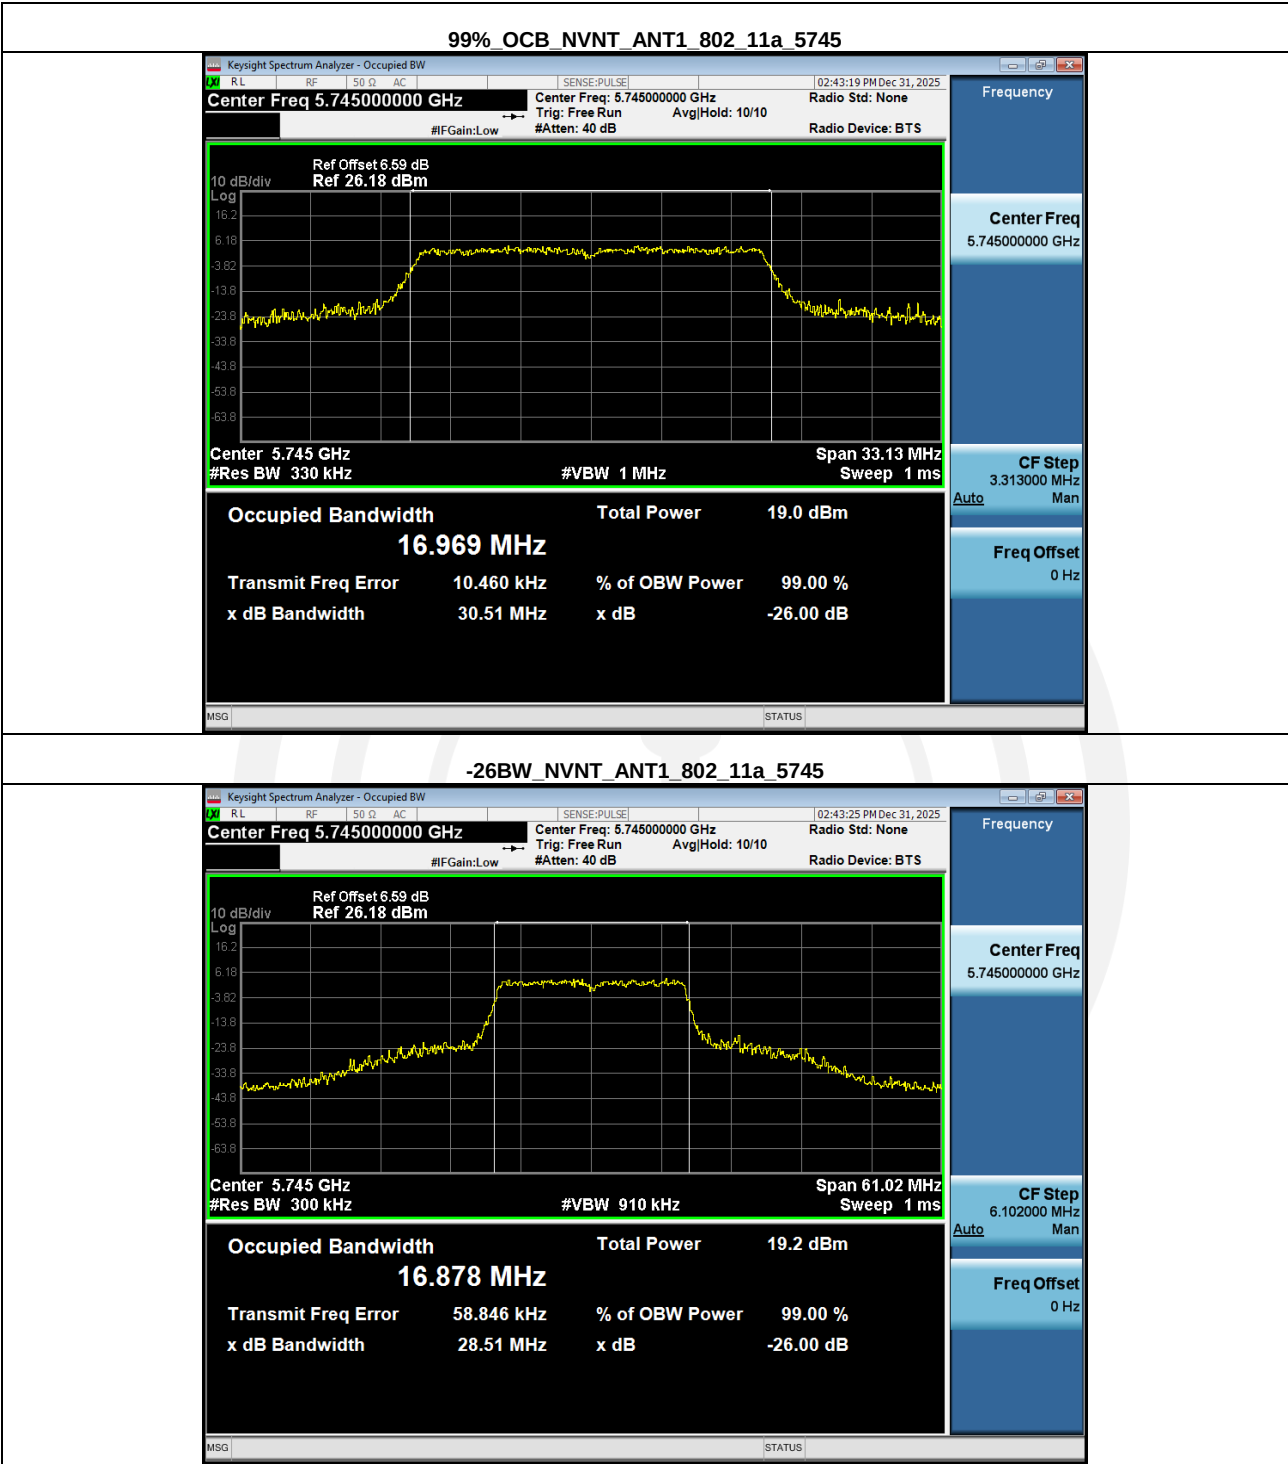


99%_OCB_NVNT_ANT1_802_11a_5785

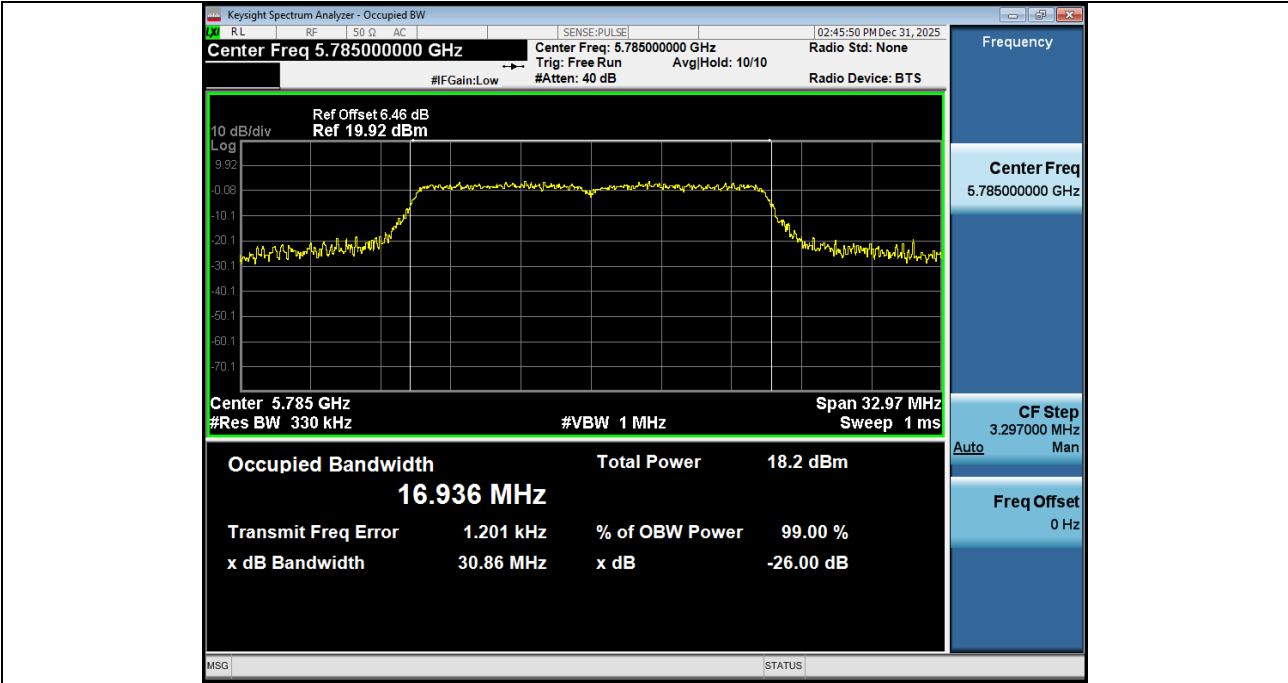


-26BW_NVNT_ANT1_802_11a_5785

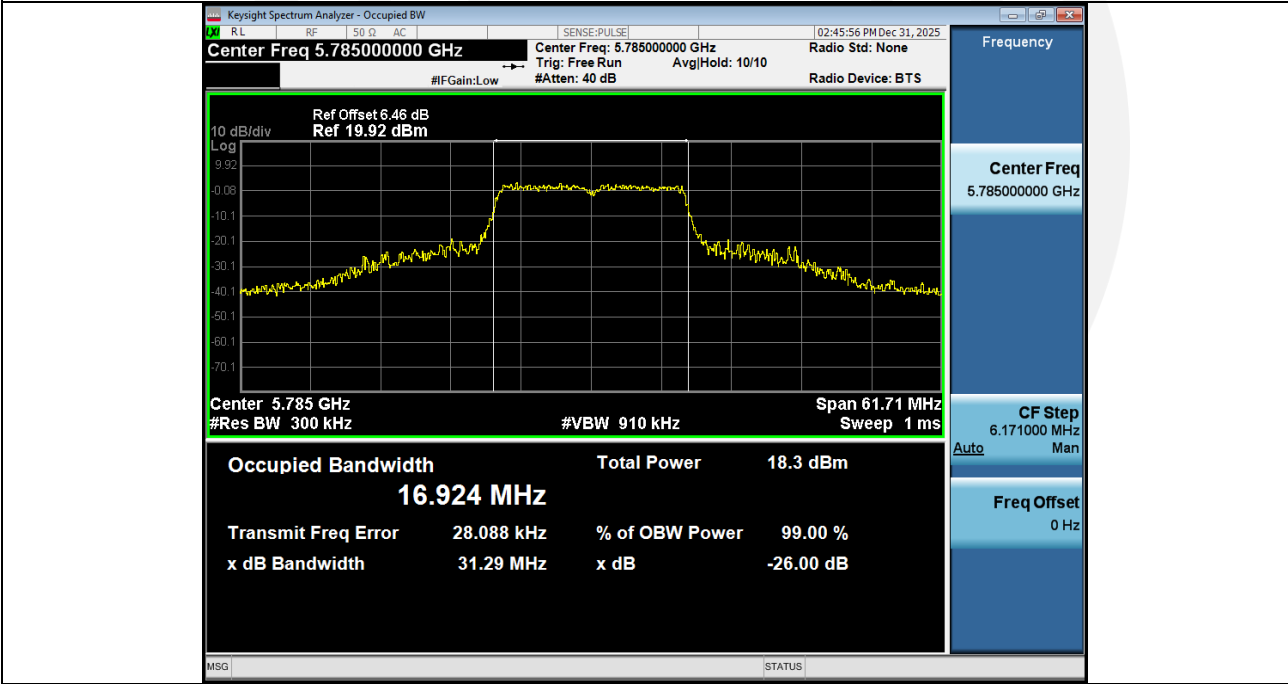


99%_OCB_NVNT_ANT1_802_11a_5825

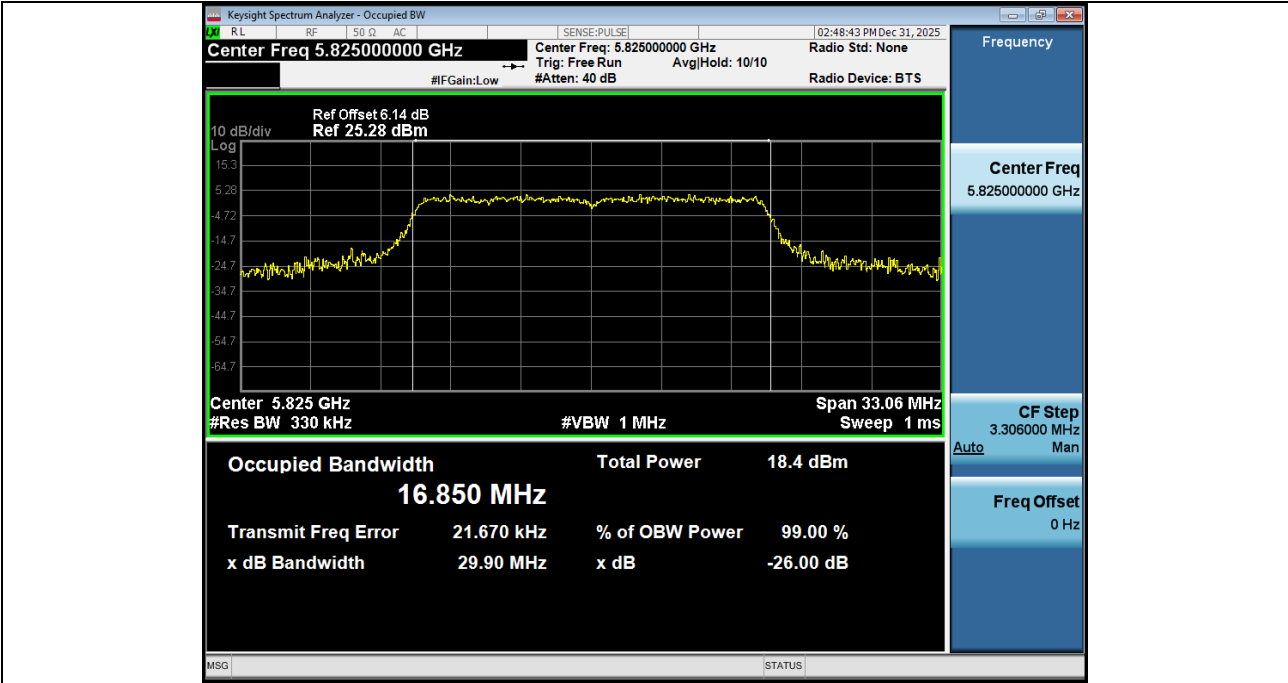


-26BW_NVNT_ANT1_802_11a_5825

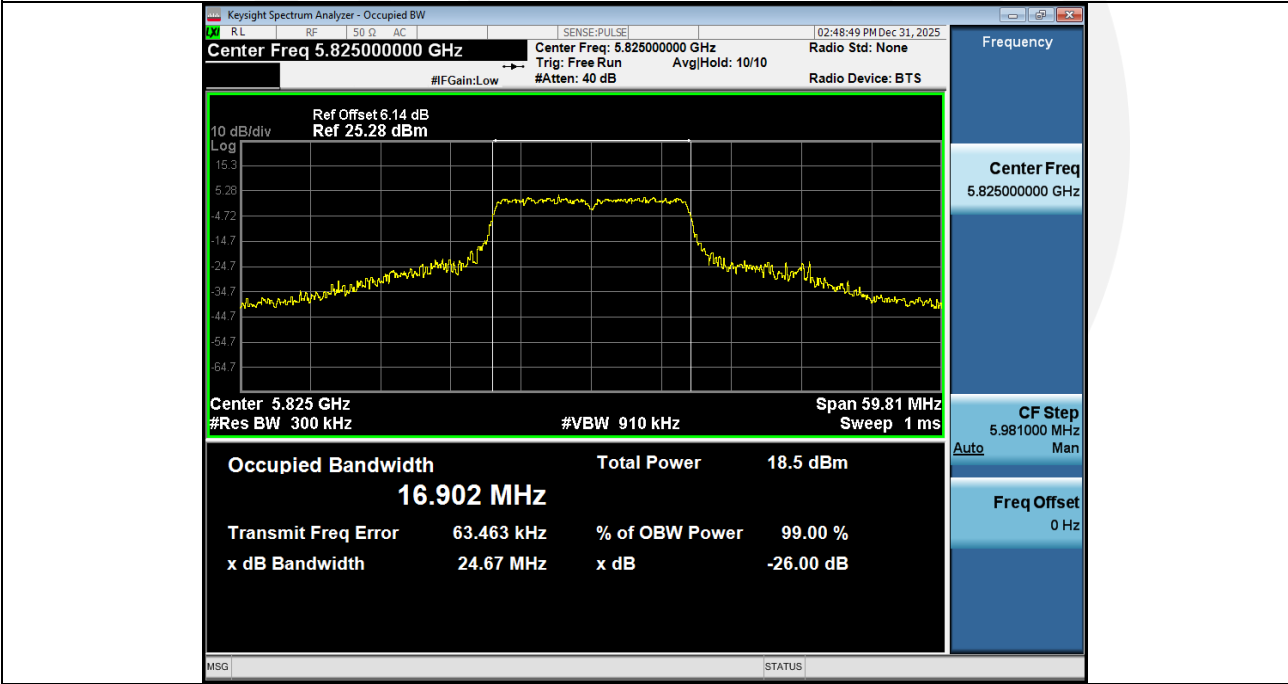


99%_OCB_NVNT_ANT1_802_11n(HT20)_5745

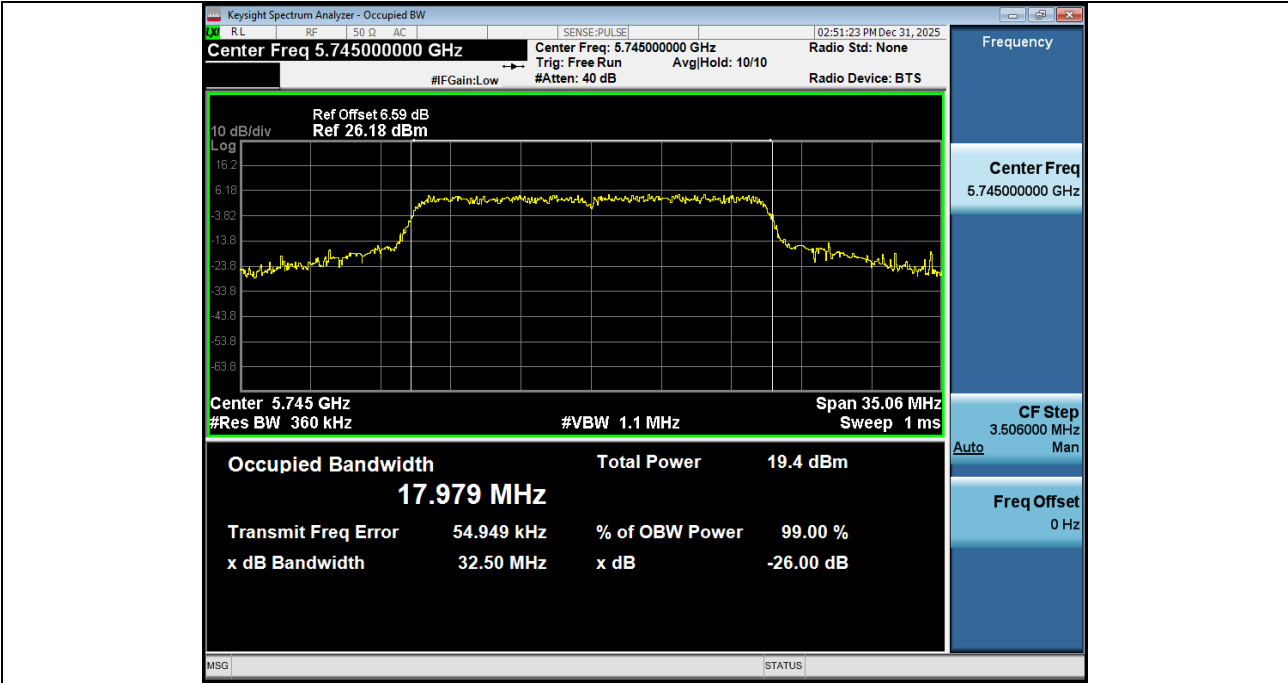


-26BW_NVNT_ANT1_802_11n(HT20)_5745

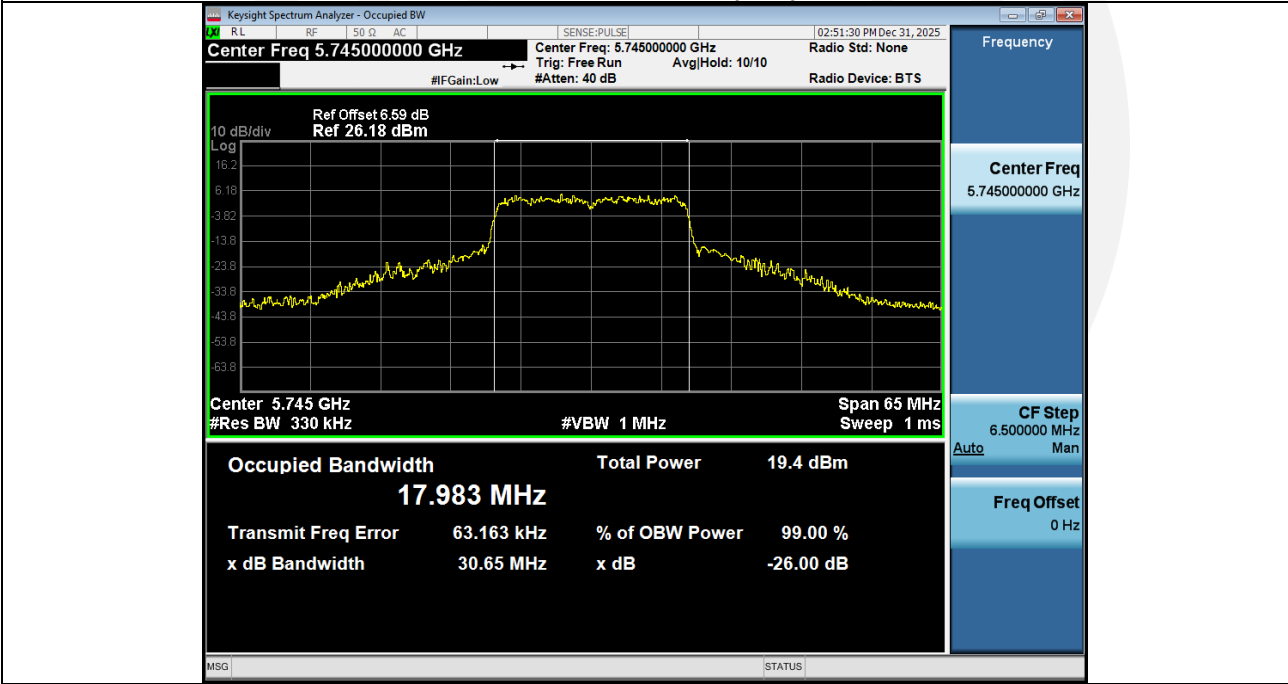


99%_OCB_NVNT_ANT1_802_11n(HT20)_5785

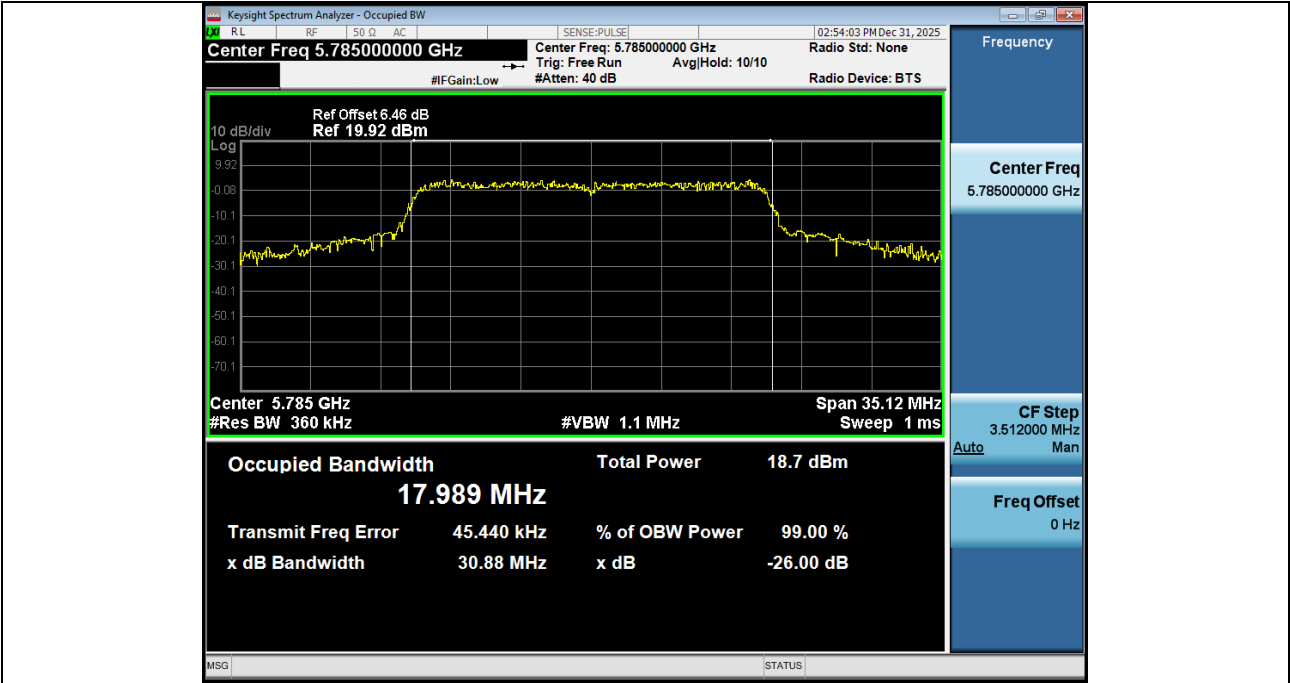

-26BW_NVNT_ANT1_802_11n(HT20)_5785

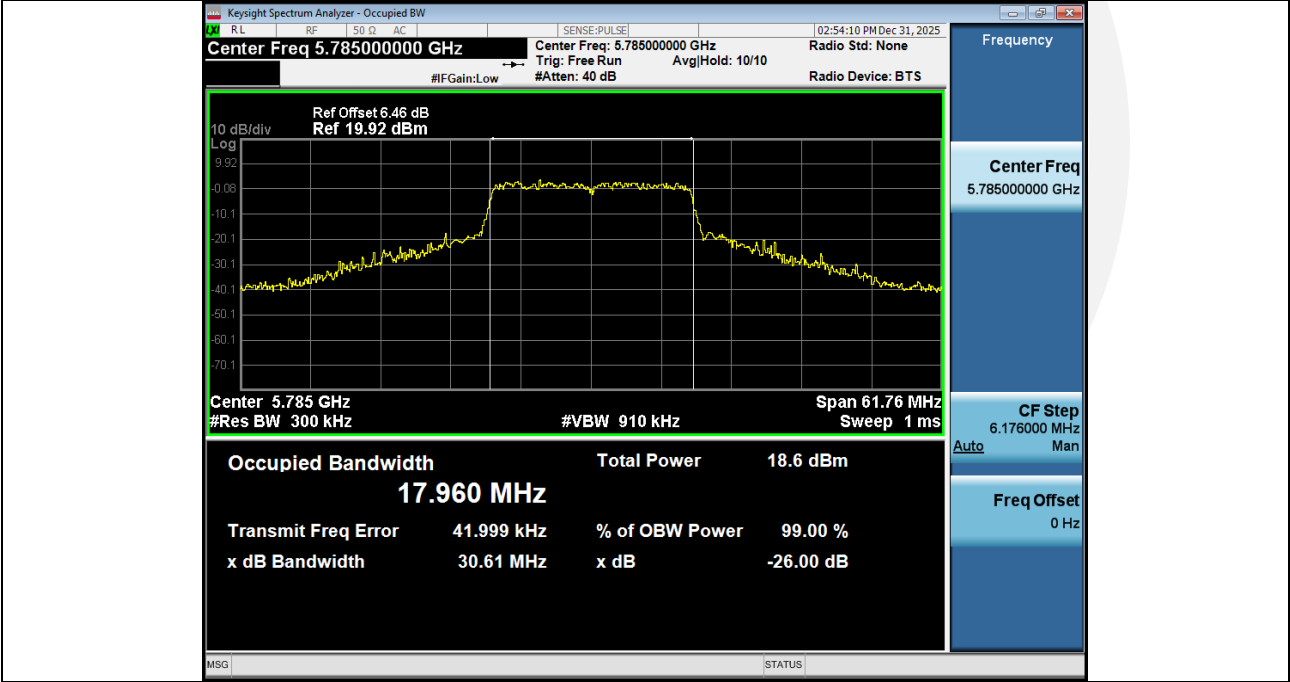


99%_OCB_NVNT_ANT1_802_11n(HT20)_5825

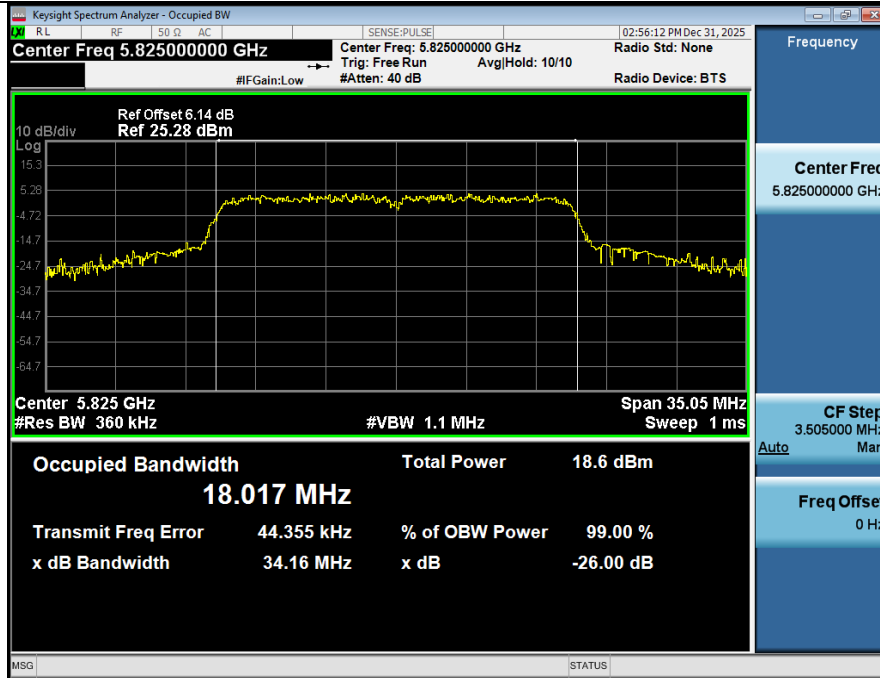


-26BW_NVNT_ANT1_802_11n(HT20)_5825




99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5745

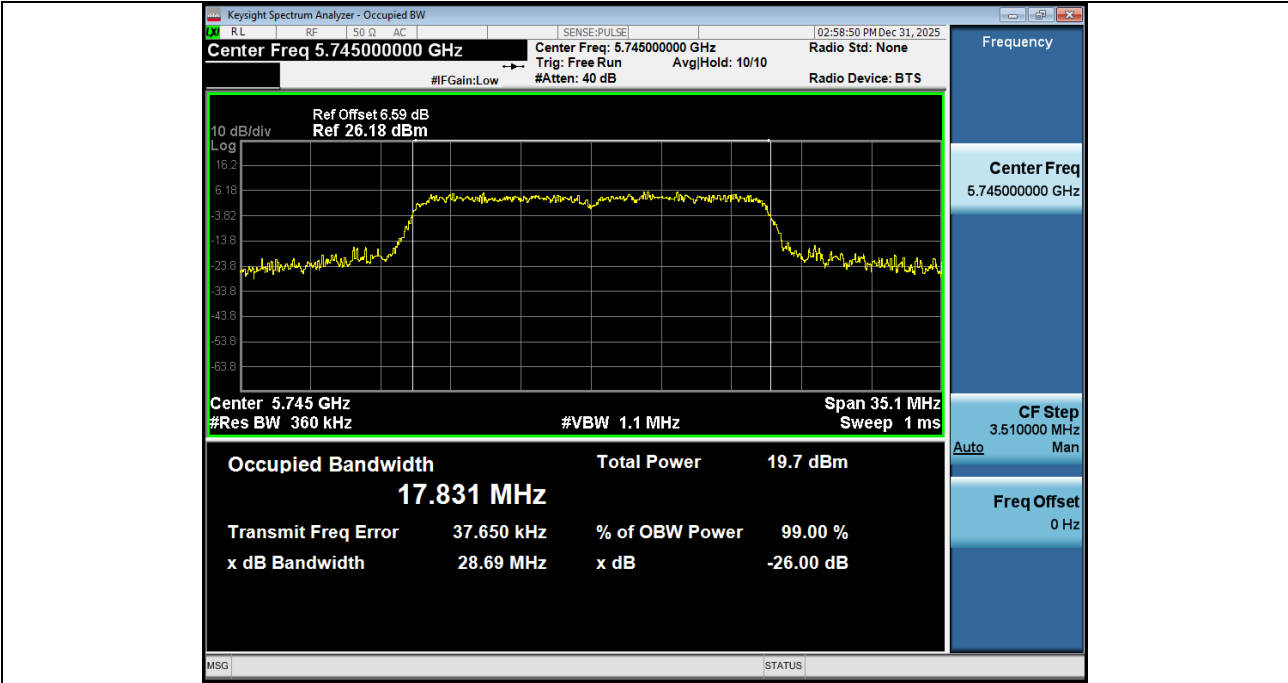


-26BW_NVNT_ANT1_802_11ac(VHT20)_5745

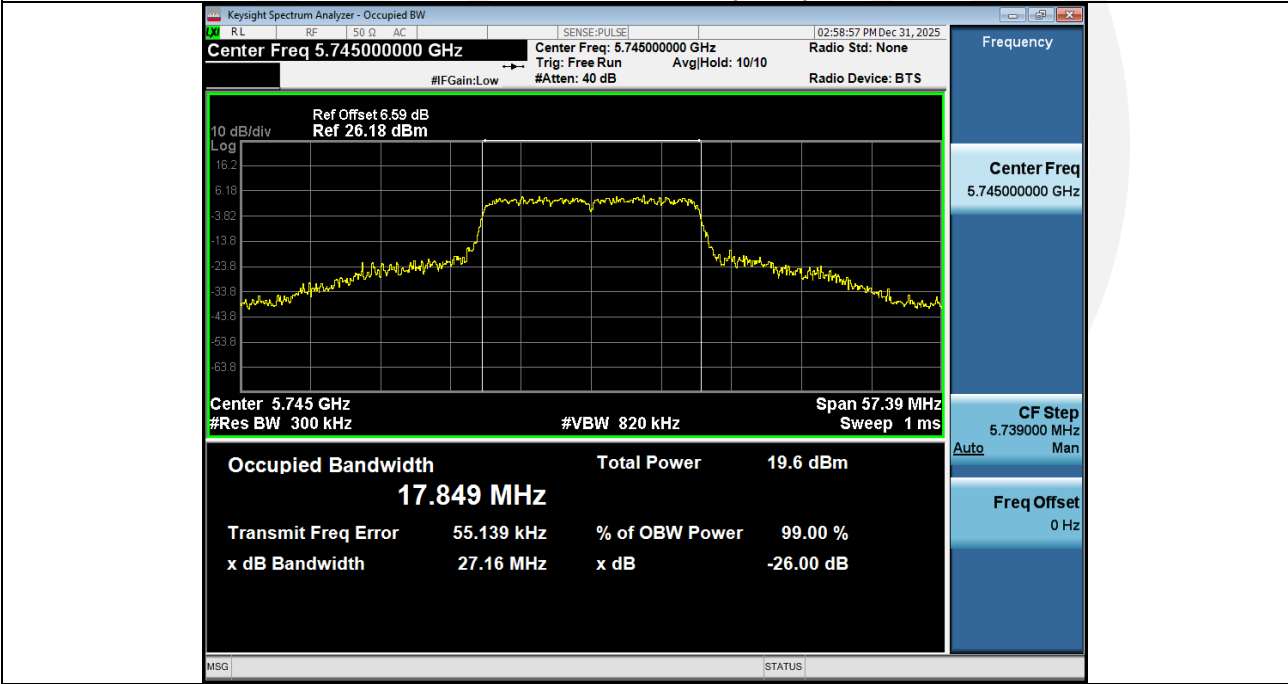



99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5785

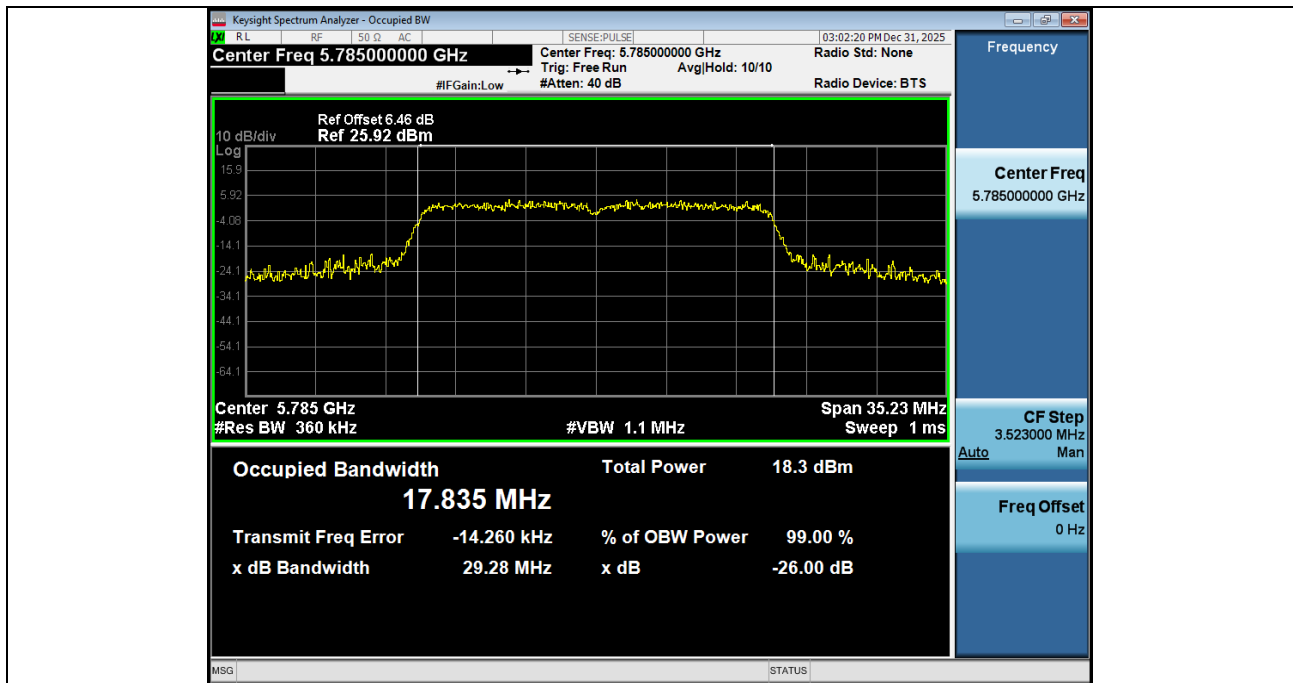


-26BW_NVNT_ANT1_802_11ac(VHT20)_5785

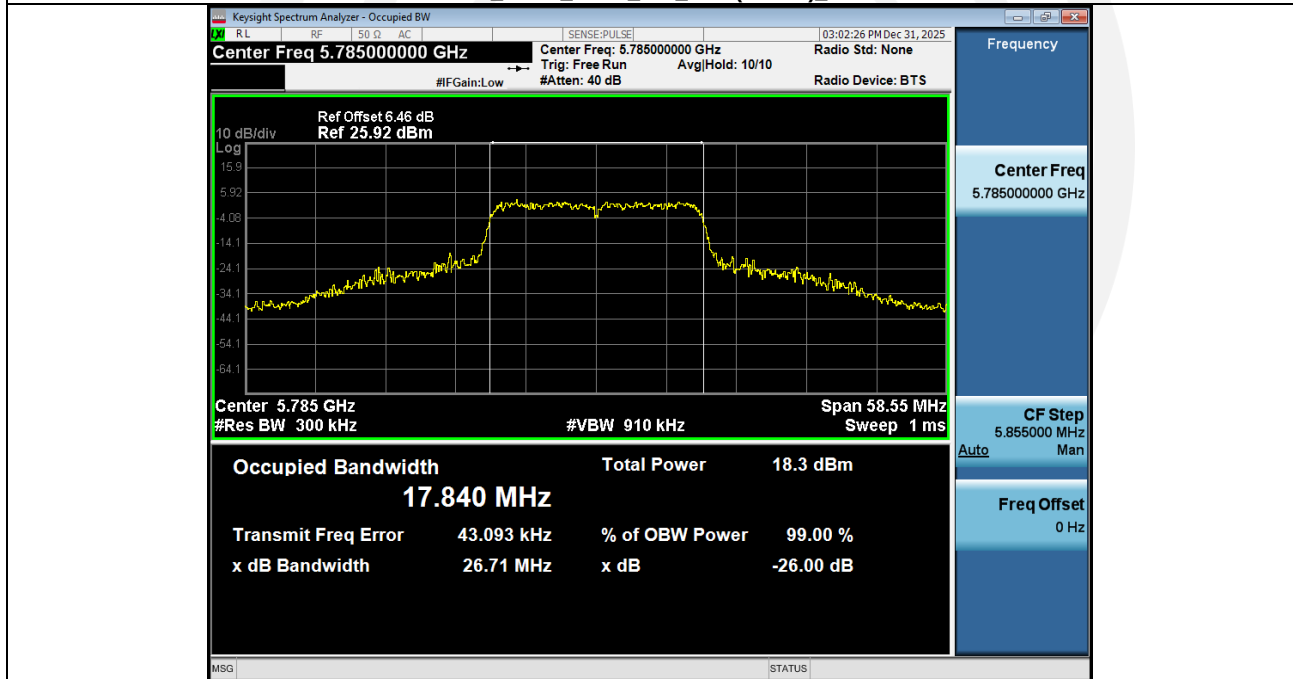


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5825

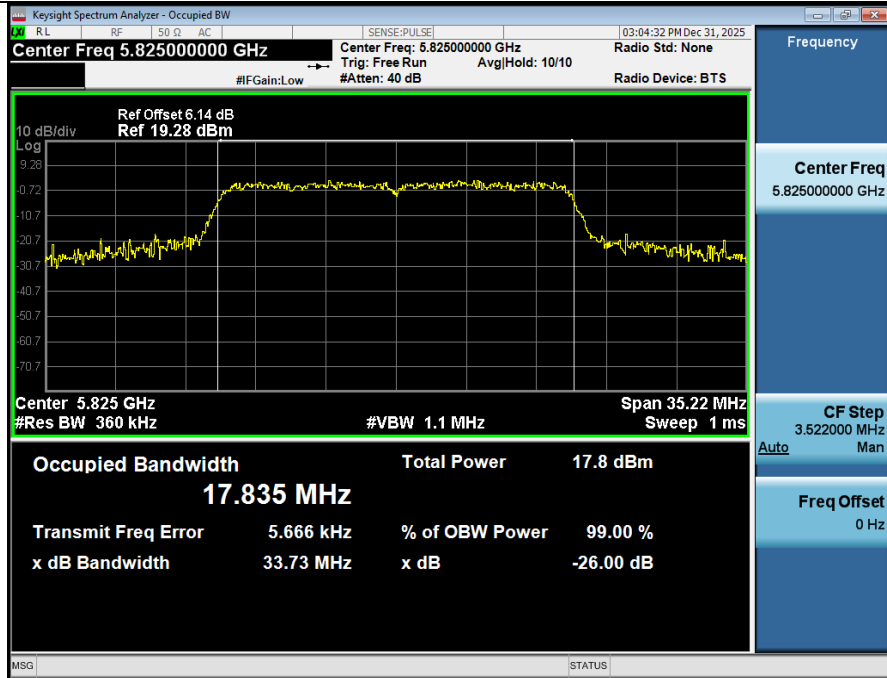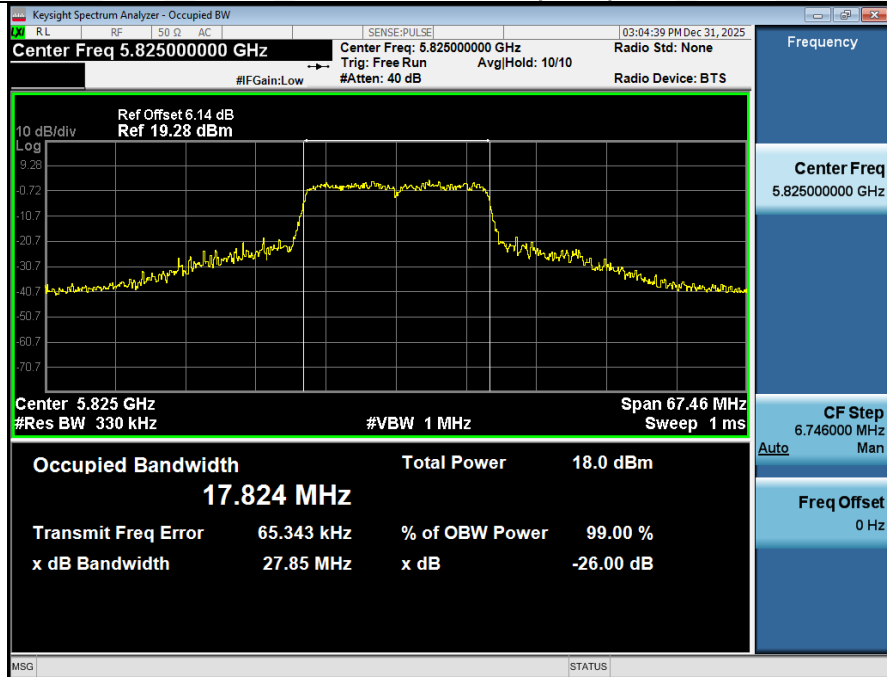
**-26BW_NVNT_ANT1_802_11ac(VHT20)_5825****99%_OCB_NVNT_ANT1_802_11n(HT40)_5755**

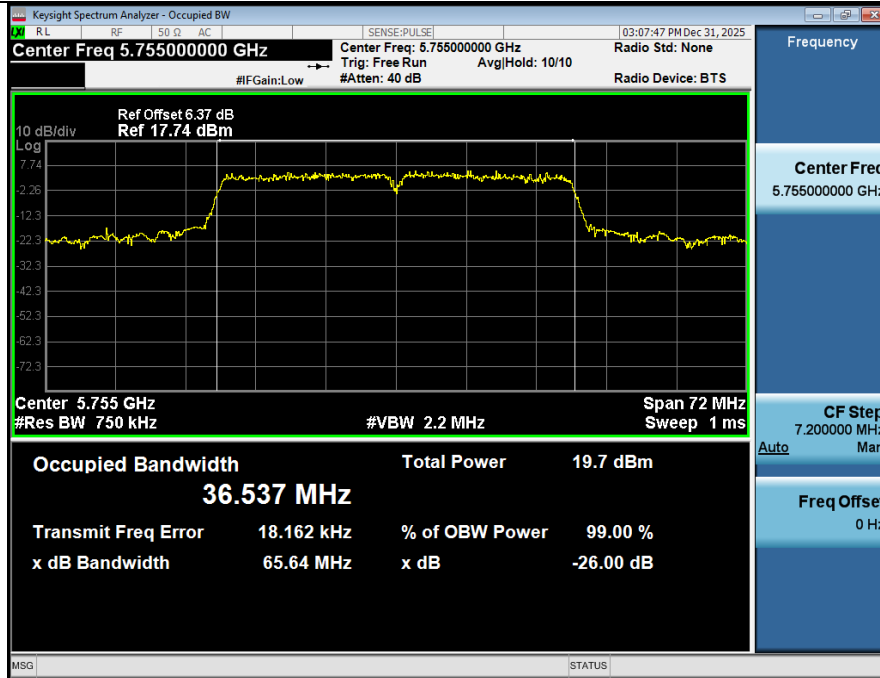


-26BW_NVNT_ANT1_802_11n(HT40)_5755

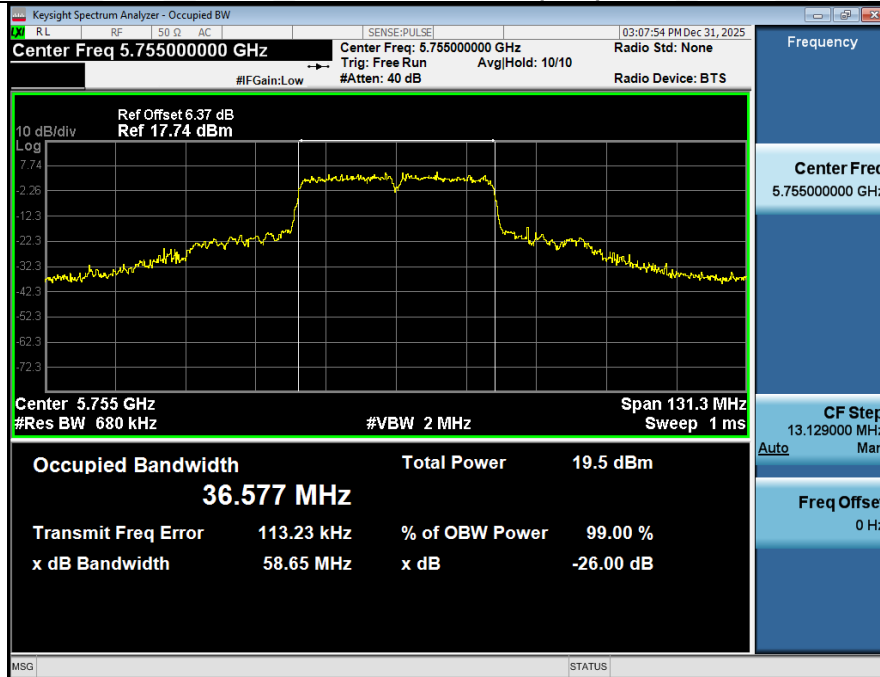

99%_OCB_NVNT_ANT1_802_11n(HT40)_5795

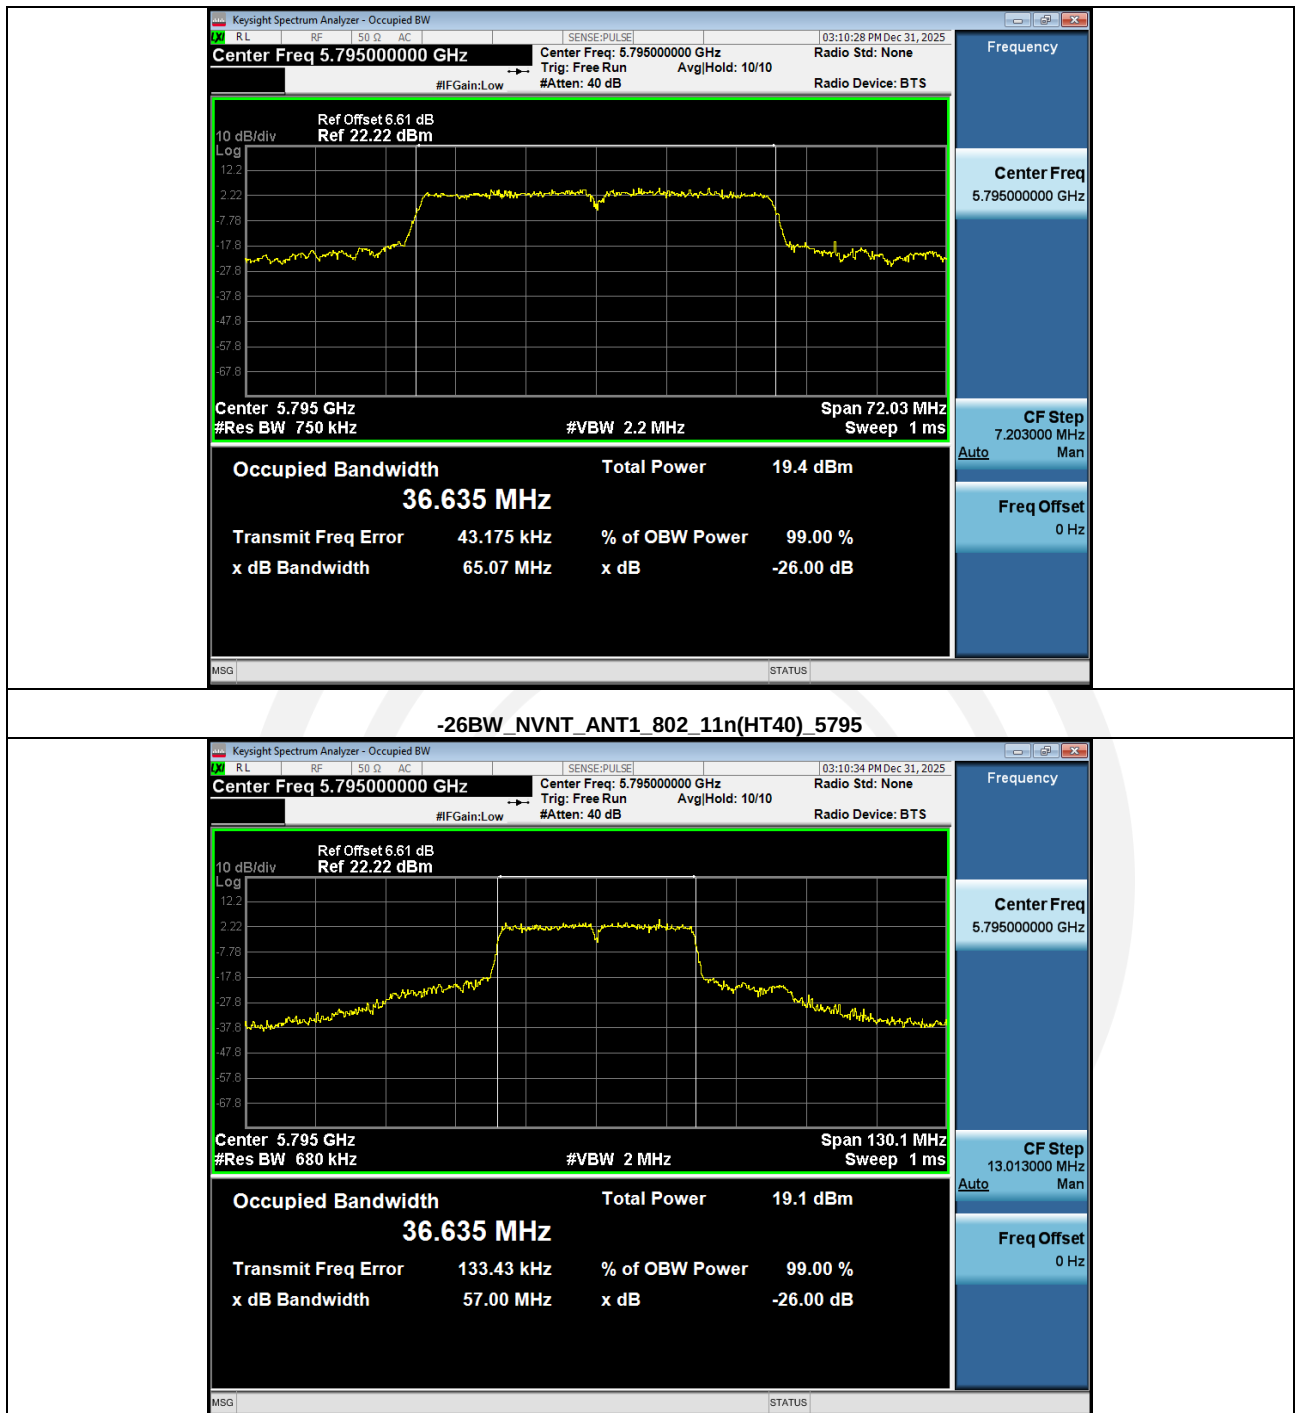

4.4 Maximum Conducted Output Power

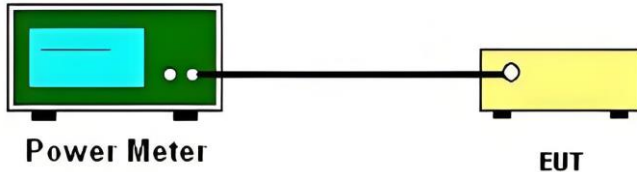Test Requirement:	FCC Part15 E Section 15.407(a)(1)(iv)-(B1), (a)(3)(i)-(B4)
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	For the band 5.15-5.25GHz, 5.25-5.35GHz, 5.47-5.725GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 250mW. For the band 5.725-5.85GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 1W. For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
Test setup:	 The diagram illustrates the test setup. On the left is a green rectangular box labeled 'Power Meter' with a blue screen and two small white circles. A black line representing a cable connects the Power Meter to a yellow rectangular box on the right labeled 'EUT' (Equipment Under Test), which has a single white circle on its left side.
Test procedure:	Measurement using an RF average power meter (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied a) The EUT is configured to transmit continuously or to transmit with a constant duty cycle. b) At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five. (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B). (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter. (iv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data**Band 1 (5150-5250 MHz) SISO:**

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	Duty factor(dB)	Total Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11a	5180.00	11.88	2.55	14.43	24	Pass
NVNT	ANT1	802.11a	5200.00	12.00	2.55	14.55	24	Pass
NVNT	ANT1	802.11a	5240.00	12.03	1.76	13.79	24	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	11.97	0.00	11.97	24	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	12.20	1.76	13.96	24	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	12.10	2.04	14.14	24	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	11.95	1.76	13.71	24	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	11.94	1.76	13.70	24	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	11.80	2.55	14.35	24	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	11.00	0.00	11.00	24	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	11.30	2.43	13.73	24	Pass

Condition	Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty_factor
NVNT	ANT1	802.11a	5180.00	55.56	2.55
NVNT	ANT1	802.11a	5200.00	55.56	2.55
NVNT	ANT1	802.11a	5240.00	66.67	1.76
NVNT	ANT1	802.11n(HT20)	5180.00	66.67	1.76
NVNT	ANT1	802.11n(HT20)	5200.00	66.67	1.76
NVNT	ANT1	802.11n(HT20)	5240.00	62.50	2.04
NVNT	ANT1	802.11ac(VHT20)	5180.00	66.67	1.76
NVNT	ANT1	802.11ac(VHT20)	5200.00	66.67	1.76
NVNT	ANT1	802.11ac(VHT20)	5240.00	55.56	2.55
NVNT	ANT1	802.11n(HT40)	5190.00	50.00	3.01
NVNT	ANT1	802.11n(HT40)	5230.00	57.14	2.43

Band 4 (5725 – 5850 MHz) SISO:

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	Duty factor(dB)	Total Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11a	5745.00	11.76	0.00	11.76	30	Pass
NVNT	ANT1	802.11a	5785.00	10.58	1.76	12.34	30	Pass
NVNT	ANT1	802.11a	5825.00	10.50	1.76	12.26	30	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	11.59	1.76	13.35	30	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	10.14	2.55	12.69	30	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	9.99	1.76	11.75	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	11.05	1.76	12.81	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	10.16	2.22	12.38	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	10.57	1.76	12.33	30	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	10.13	3.01	13.14	30	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	10.88	2.43	13.31	30	Pass

Condition	Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty_factor
NVNT	ANT1	802.11a	5745.00	55.56	2.55
NVNT	ANT1	802.11a	5785.00	66.67	1.76
NVNT	ANT1	802.11a	5825.00	66.67	1.76
NVNT	ANT1	802.11n(HT20)	5745.00	66.67	1.76
NVNT	ANT1	802.11n(HT20)	5785.00	55.56	2.55
NVNT	ANT1	802.11n(HT20)	5825.00	66.67	1.76
NVNT	ANT1	802.11ac(VHT20)	5745.00	66.67	1.76
NVNT	ANT1	802.11ac(VHT20)	5785.00	60.00	2.22
NVNT	ANT1	802.11ac(VHT20)	5825.00	66.67	1.76
NVNT	ANT1	802.11n(HT40)	5755.00	50.00	3.01
NVNT	ANT1	802.11n(HT40)	5795.00	57.14	2.43

4.5 Power Spectral Density


Test Requirement:	FCC Part15 E Section 15.407(a)(1)(iv)-(B1), (a)(3)(i)-(B4)
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	FCC: $1. \leq 11.00 \text{ dBm/MHz}$ for 5150MHz-5250MHz, 5250-5350MHz and 5470-5725 MHz $2. \leq 30.00 \text{ dBm/500KHz}$ for 5725MHz-5850MHz
Test setup:	 Spectrum Analyzer EUT
Test procedure:	1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". 2) Use the peak search function on the instrument to find the peak of the spectrum. 3) Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum. b) If Method SA-3 Alternative was used and the linear mode was used in step E)2)g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. 4) The result is the PSD.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data**Band 1 (5150-5250 MHz) SISO:**


Condition	Antenna	Modulation	Frequency (MHz)	PSD_SA (dBm/RBW)	Duty factor(dB)	RB factor(dB)	PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
NVNT	ANT1	802.11a	5745.00	-18.85	2.55	-0	-16.38	30	Pass
NVNT	ANT1	802.11a	5785.00	-20.66	1.76	-0	-18.99	30	Pass
NVNT	ANT1	802.11a	5825.00	-20.45	1.76	-0	-18.77	30	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	-21.37	1.76	-0	-19.70	30	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	-22.96	2.55	-0	-20.49	30	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	-23.44	1.76	-0	-21.76	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	-18.17	1.76	-0	-16.50	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	-21.04	2.22	-0	-18.91	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	-19.57	1.76	-0	-17.90	30	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	-26.95	3.01	-0	-24.03	30	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	-28.66	2.43	-0	-26.31	30	Pass



Power Spectral Density NVNT ANT1_802_11a_5745

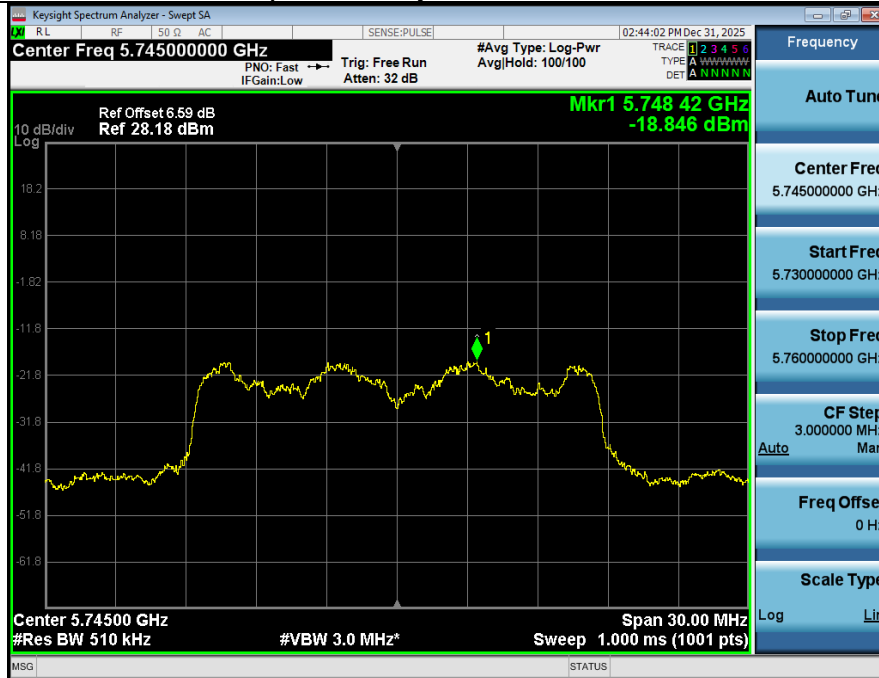

Power Spectral Density NVNT ANT1_802_11a_5785

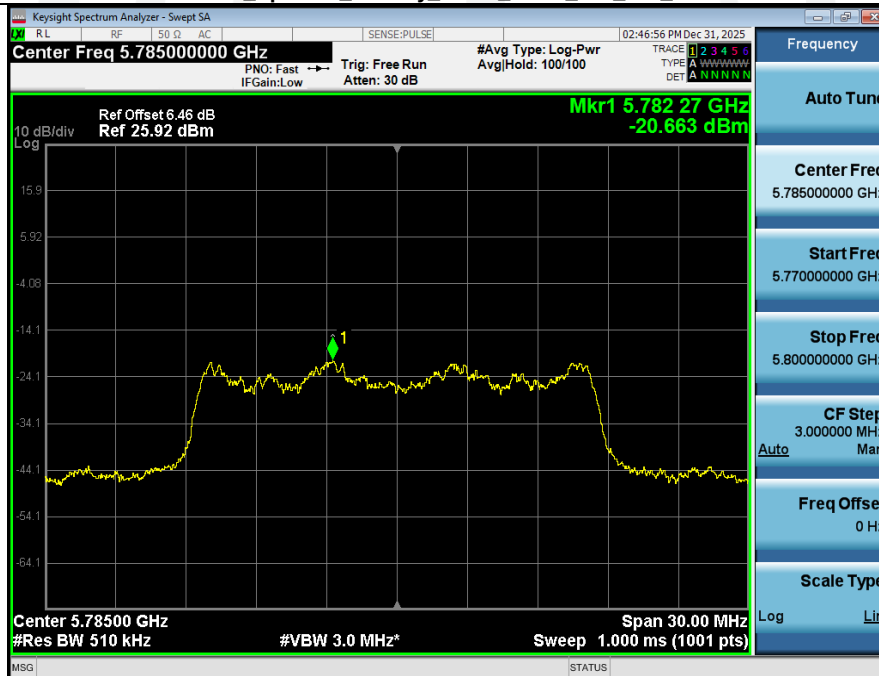

Power Spectral Density NVNT ANT1_802_11a_5825



Power Spectral Density NVNT_ANT1_802_11n(HT20)_5745




Power Spectral Density NVNT_ANT1_802_11n(HT20)_5785



Power Spectral Density NVNT_ANT1_802_11n(HT20)_5825



Power Spectral Density NVNT_ANT1_802_11ac(VHT20)_5745

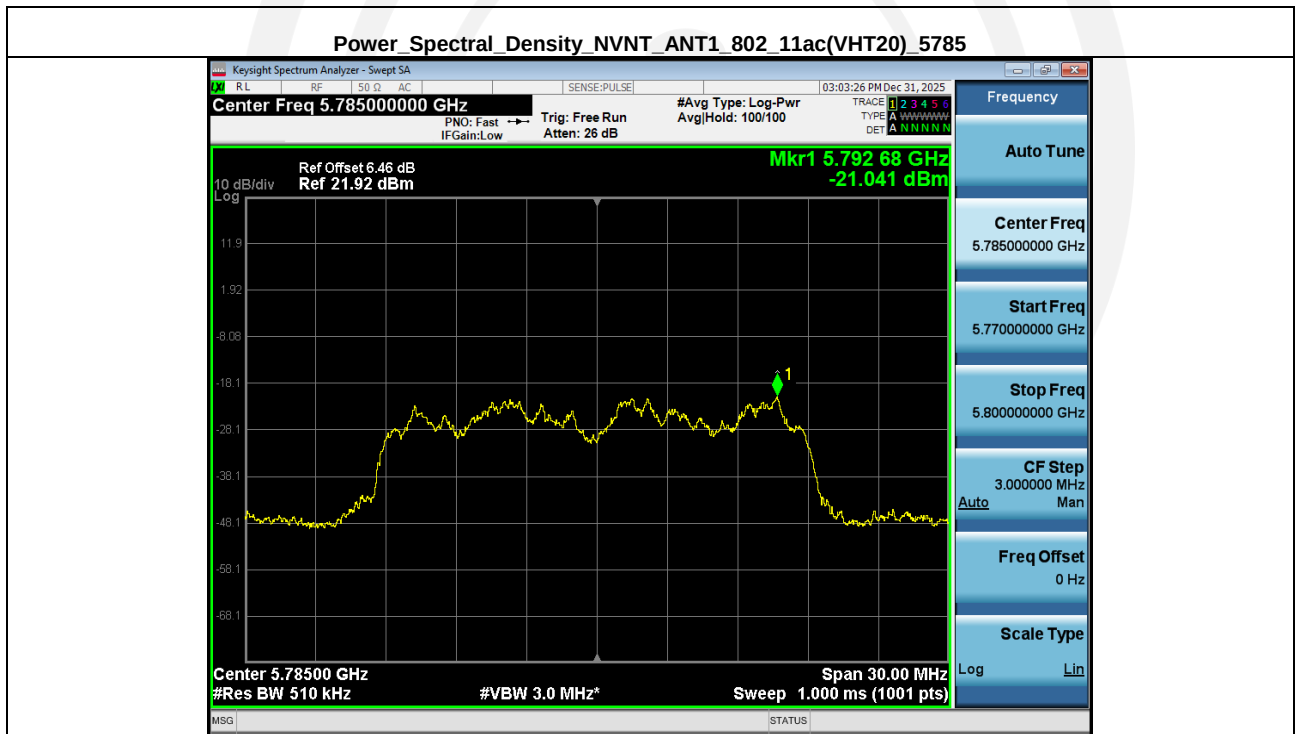

Power Spectral Density_NVNT_ANT1_802_11ac(VHT20)_5825



Power Spectral Density NVNT_ANT1_802_11n(HT40)_5755



Power Spectral Density NVNT_ANT1_802_11n(HT40)_5795




Band 4 (5725 – 5850 MHz) SISO:


Condition	Antenna	Modulation	Frequency (MHz)	PSD(dBm/MHz)	Duty factor(dB)	Total PSD(dBm/MHz)	limit(dBm)	Result
NVNT	ANT1	802.11a	5180.00	-15.41	2.55	-12.86	11	Pass
NVNT	ANT1	802.11a	5200.00	-15.86	2.55	-13.31	11	Pass
NVNT	ANT1	802.11a	5240.00	-16.40	1.76	-14.64	11	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	-16.06	2.04	-14.02	11	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	-15.00	1.76	-13.24	11	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	-16.84	2.04	-14.80	11	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	-13.43	1.76	-11.67	11	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	-15.58	1.76	-13.82	11	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	-15.87	2.55	-13.32	11	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	-23.40	3.01	-20.39	11	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	-25.37	2.43	-22.94	11	Pass



Power Spectral Density NVNT_ANT1_802_11a_5180

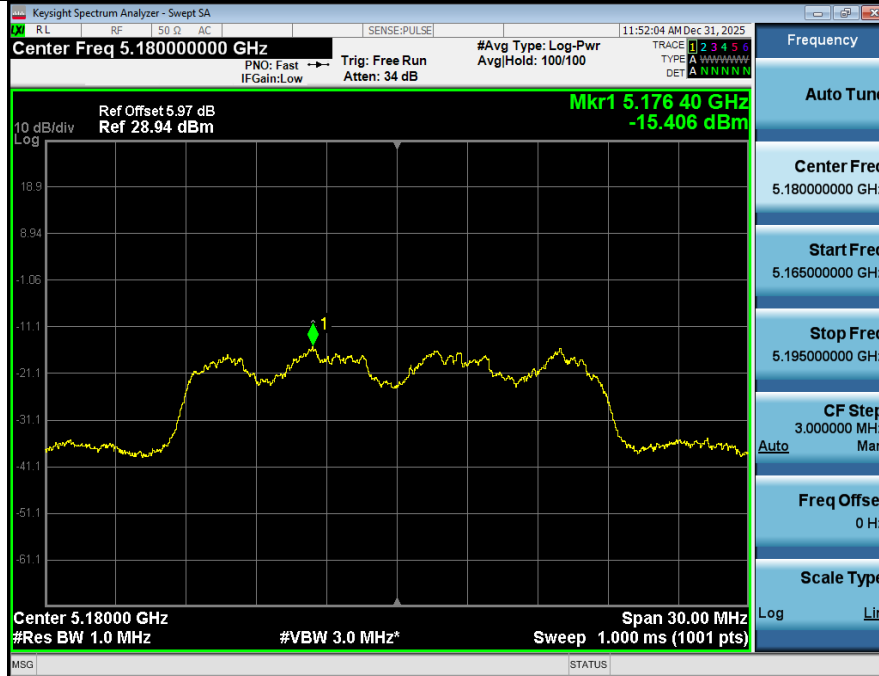

Power Spectral Density NVNT_ANT1_802_11a_5200

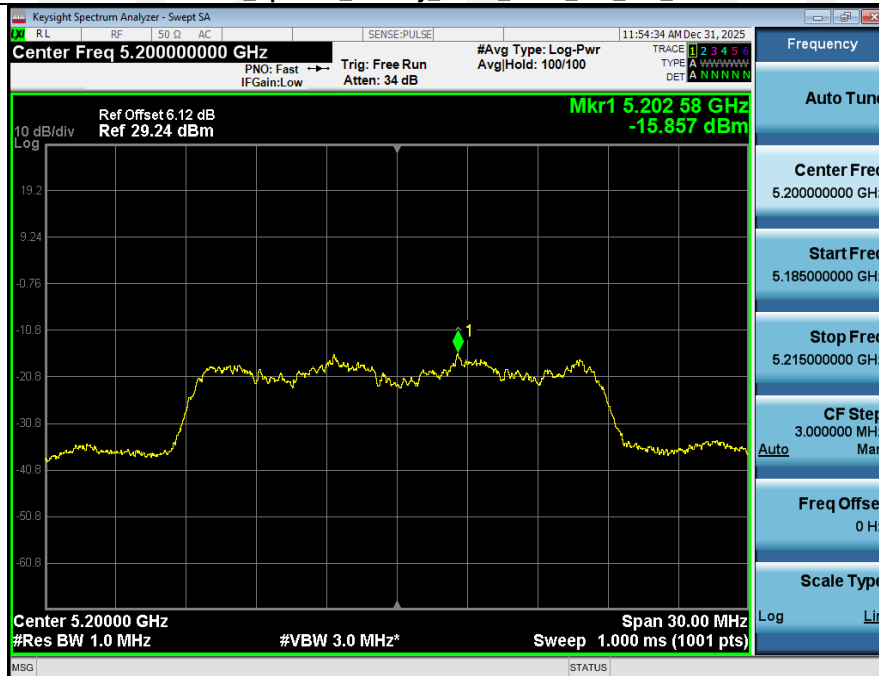

Power Spectral Density NVNT_ANT1_802_11a_5240




Power Spectral Density NVNT_ANT1_802_11n(HT20)_5180




Power Spectral Density NVNT_ANT1_802_11n(HT20)_5200



Power Spectral Density NVNT_ANT1_802_11n(HT20)_5240

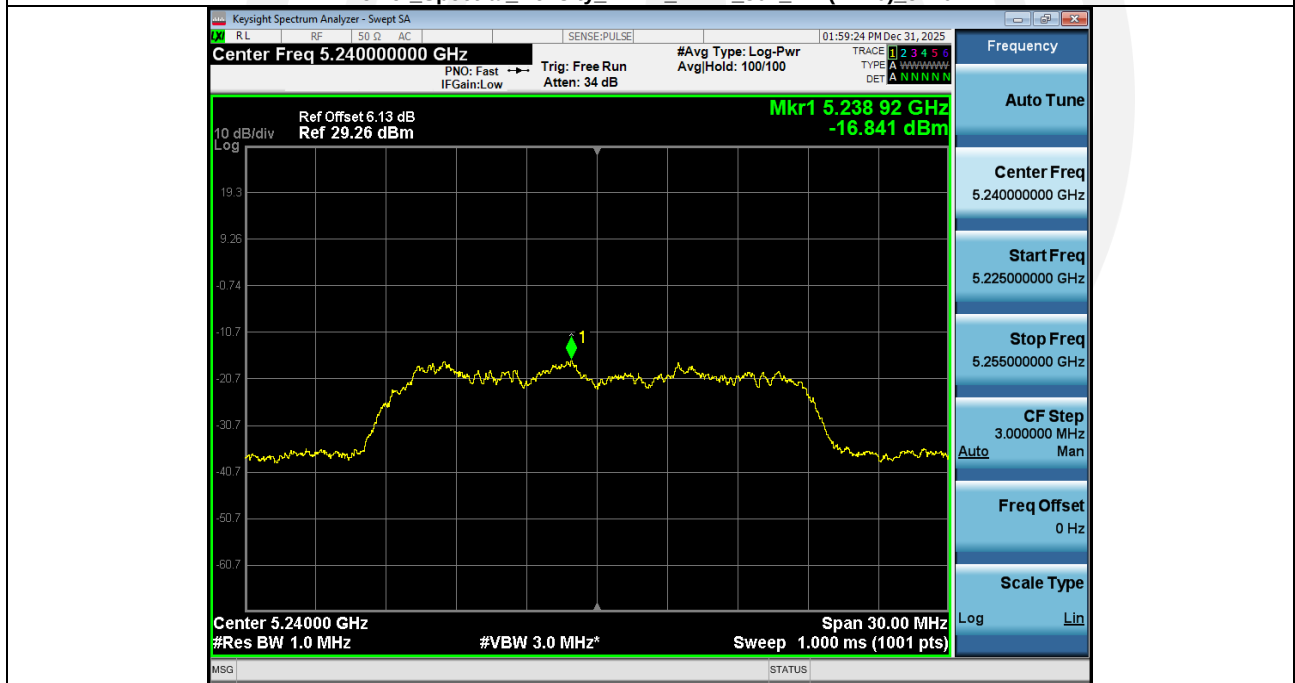

Power Spectral Density NVNT_ANT1_802_11ac(VHT20)_5180

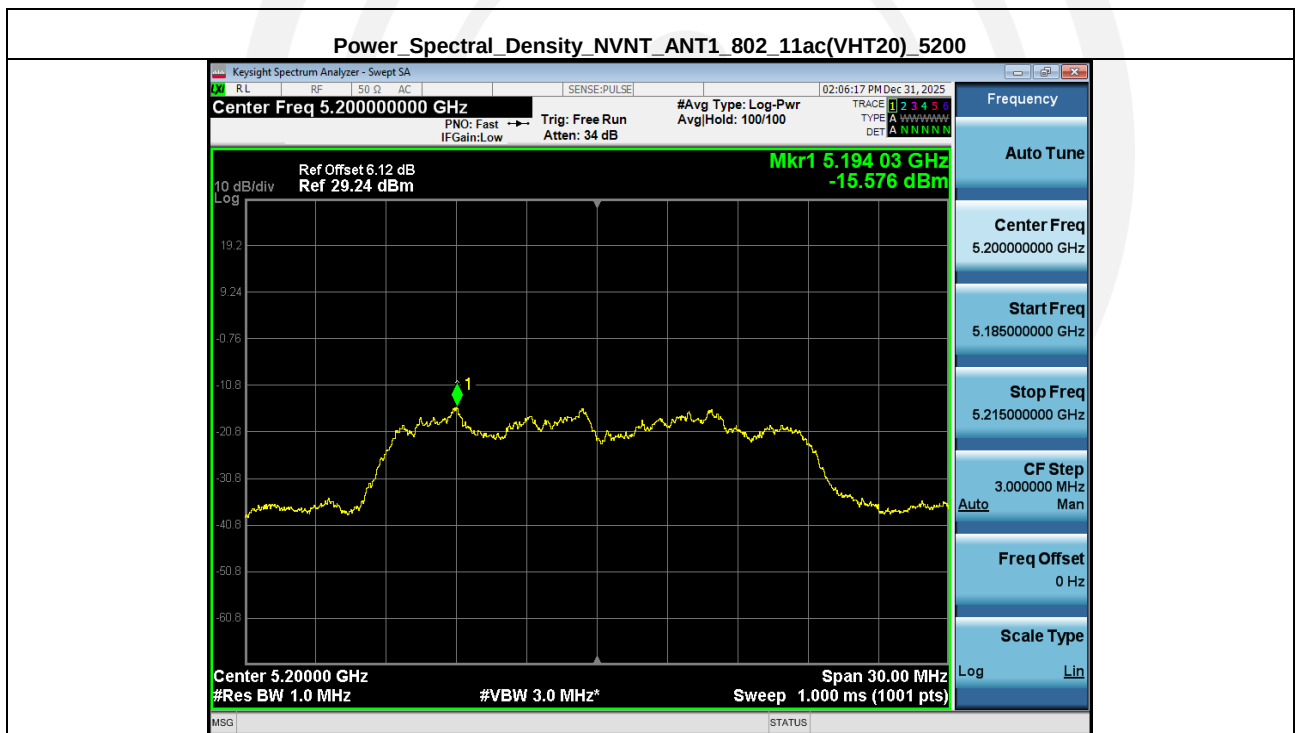

Power Spectral Density_NVNT_ANT1_802_11ac(VHT20)_5240



Power Spectral Density NVNT_ANT1_802_11n(HT40)_5190




Power Spectral Density NVNT_ANT1_802_11n(HT40)_5230



4.6 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 and 15.205, 15.209																								
Test Method:	ANSI C63.10-2020																								
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																								
Receiver setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>100KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>AV</td><td>1MHz</td><td>3MHz</td><td>Average Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	AV	1MHz	3MHz	Average Value	
Frequency	Detector	RBW	VBW	Remark																					
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																					
Above 1GHz	Peak	1MHz	3MHz	Peak Value																					
	AV	1MHz	3MHz	Average Value																					
Limit:	<table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr><tr><td>68.2</td><td>Peak Value</td></tr></table> Undesirable emission limits: (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band. (3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz. (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	68.2	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	68.2	Peak Value																							
Test Procedure:	a. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values																								

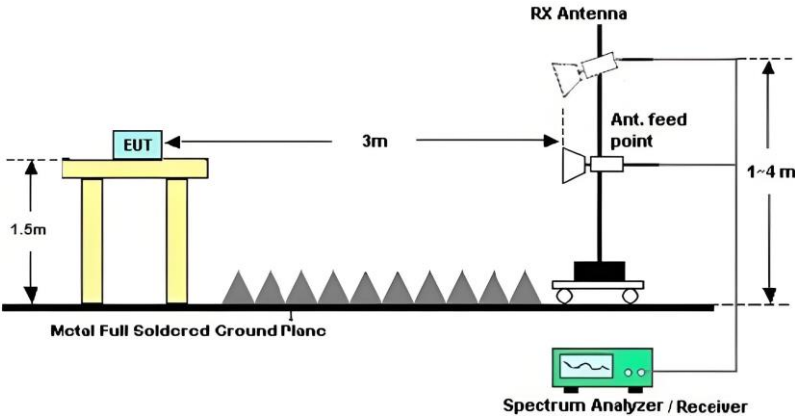	of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test setup:	Above 1GHz 
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Remark:

According to KDB 789033 D02 v02r01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:

$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2,$

For example, if $\text{EIRP} = -27\text{dBm}$

$E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$

Measurement Data:**Band1**

Mode:		802.11a		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	54.48	-13.16	41.32	68.20	-26.88	PK
V	5150.00	55.76	-13.16	42.60	68.20	-25.60	PK
Mode:		802.11a		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	45.73	-13.16	32.57	54.00	-21.43	AV
V	5150.00	47.33	-13.16	34.17	54.00	-19.83	AV
Mode:		802.11a		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	56.66	-12.62	44.04	68.20	-24.16	PK
V	5350.00	58.70	-12.62	46.08	68.20	-22.12	PK
Mode:		802.11a		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	45.28	-12.62	32.66	54.00	-21.34	AV
V	5350.00	48.00	-12.62	35.38	54.00	-18.62	AV

Mode:		802.11n(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	56.96	-13.16	43.80	68.20	-24.40	PK
V	5150.00	55.81	-13.16	42.65	68.20	-25.55	PK
Mode:		802.11n(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	47.32	-13.16	34.16	54.00	-19.84	AV
V	5150.00	45.63	-13.16	32.47	54.00	-21.53	AV
Mode:		802.11n(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	55.62	-12.62	43.00	68.20	-25.20	PK
V	5350.00	57.16	-12.62	44.54	68.20	-23.66	PK
Mode:		802.11n(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	46.50	-12.62	33.88	54.00	-20.12	AV
V	5350.00	47.97	-12.62	35.35	54.00	-18.65	AV


Mode:		802.11ac(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	57.11	-13.16	43.95	68.20	-24.25	PK
V	5150.00	57.18	-13.16	44.02	68.20	-24.18	PK
Mode:		802.11ac(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	45.03	-13.16	31.87	54.00	-22.13	AV
V	5150.00	45.86	-13.16	32.70	54.00	-21.30	AV
Mode:		802.11ac(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	53.74	-12.62	41.12	68.20	-27.08	PK
V	5350.00	57.28	-12.62	44.66	68.20	-23.54	PK
Mode:		802.11ac(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	47.22	-12.62	34.60	54.00	-19.40	AV
V	5350.00	46.90	-12.62	34.28	54.00	-19.72	AV

Mode:		802.11n(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	55.84	-13.16	42.68	68.20	-25.52	PK
V	5150.00	55.83	-13.16	42.67	68.20	-25.53	PK
Mode:		802.11n(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	45.81	-13.16	32.65	54.00	-21.35	AV
V	5150.00	48.53	-13.16	35.37	54.00	-18.63	AV
Mode:		802.11n(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	53.65	-12.62	41.03	68.20	-27.17	PK
V	5350.00	56.82	-12.62	44.20	68.20	-24.00	PK
Mode:		802.11n(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	47.43	-12.62	34.81	54.00	-19.19	AV
V	5350.00	47.27	-12.62	34.65	54.00	-19.35	AV


Band4

Condition	Antenna	Modulation	TX_Frequency (MHz)	Frequency Area(MHz)	Frequency(MHz)	Amplitude(dBm)	Limit(dBm)	Result
NVNT	ANT1	802.11a	LCH	5565-5655	5579.580	-50.03	-27.00	Pass
NVNT	ANT1	802.11a	LCH	5655-5700	5686.185	-48.38	-1.36	Pass
NVNT	ANT1	802.11a	LCH	5700-5720	5719.100	-37.24	15.35	Pass
NVNT	ANT1	802.11a	LCH	5720-5725	5724.460	-27.50	25.77	Pass
NVNT	ANT1	802.11a	HCH	5850-5855	5851.620	-36.60	23.31	Pass
NVNT	ANT1	802.11a	HCH	5855-5875	5859.840	-42.31	14.24	Pass
NVNT	ANT1	802.11a	HCH	5875-5920	5900.560	-49.93	-11.02	Pass
NVNT	ANT1	802.11a	HCH	5920-6005	5935.300	-45.15	-27.00	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5565-5655	5582.820	-50.24	-27.00	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5655-5700	5691.990	-49.23	3.41	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5700-5720	5717.020	-39.03	14.77	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5720-5725	5721.835	-31.02	19.78	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5850-5855	5851.500	-37.67	23.58	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5855-5875	5855.040	-39.73	15.59	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5875-5920	5916.265	-49.98	-23.93	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5920-6005	5948.220	-46.64	-27.00	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5565-5655	5569.590	-50.49	-27.00	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5655-5700	5697.705	-44.77	8.11	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5700-5720	5718.640	-37.55	15.22	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5720-5725	5723.825	-26.91	24.32	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5850-5855	5850.925	-37.03	24.89	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5855-5875	5855.420	-41.67	15.48	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5875-5920	5916.400	-49.99	-24.04	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5920-6005	5947.370	-45.84	-27.00	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5595-5655	5630.640	-49.85	-27.00	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5655-5700	5696.625	-43.35	7.23	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5700-5720	5718.920	-26.63	15.30	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5720-5725	5721.735	-26.26	19.56	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5850-5855	5852.910	-41.11	20.37	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5855-5875	5860.960	-43.68	13.93	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5875-5920	5887.465	-48.34	-0.25	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5920-5955	5938.900	-45.29	-27.00	Pass



Bandedge_NVNT_ANT1_802_11a_5745

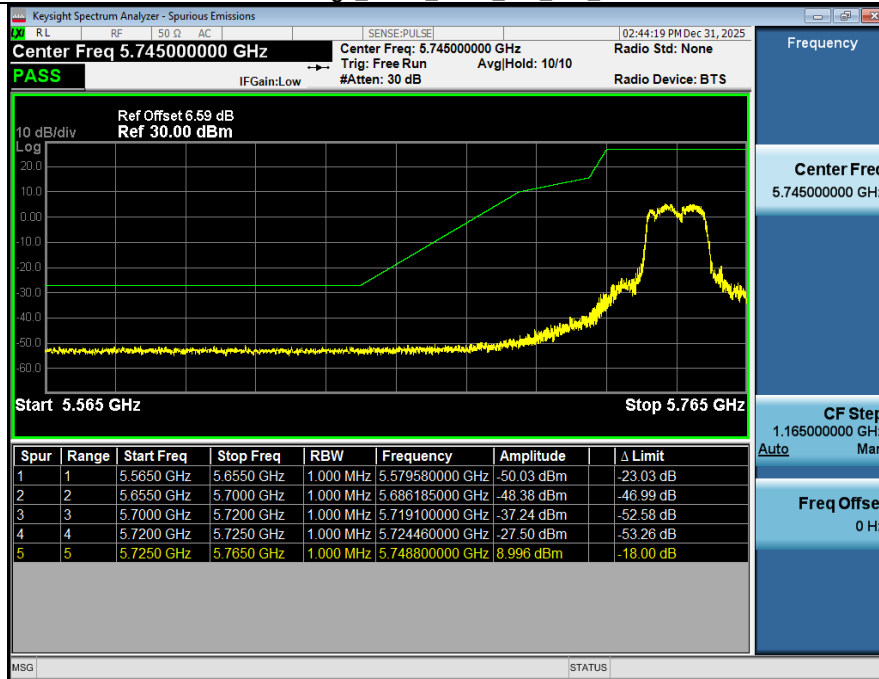


Bandedge_NVNT_ANT1_802_11a_5825

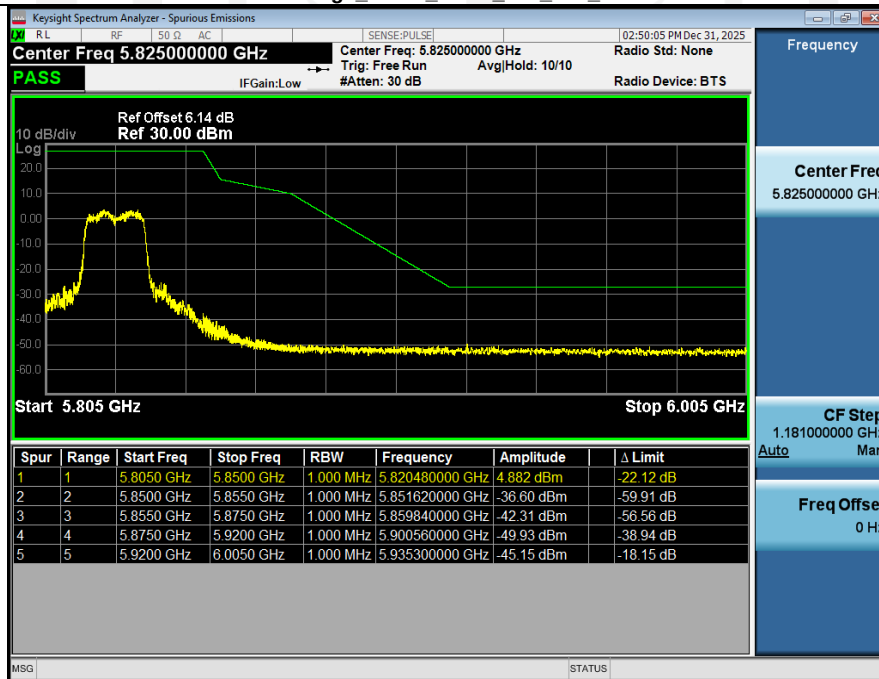


Bandedge_NVNT_ANT1_802_11n(HT20)_5745

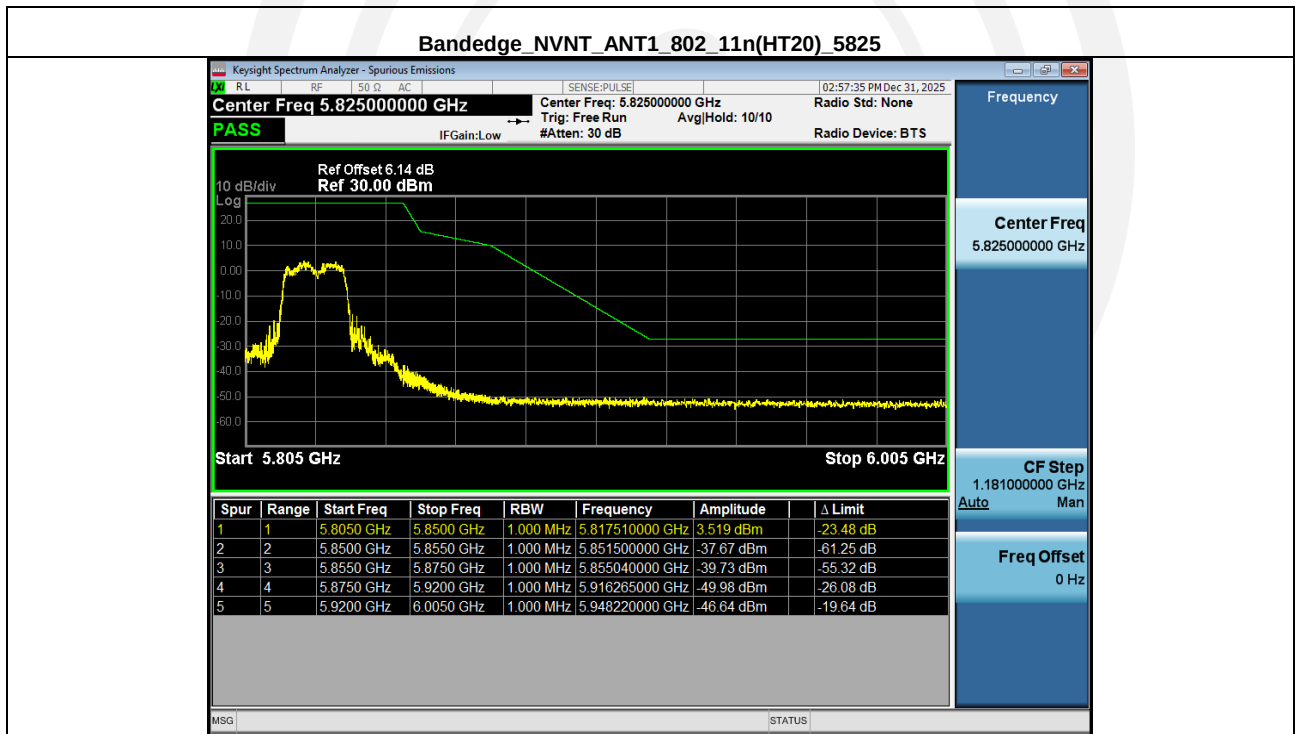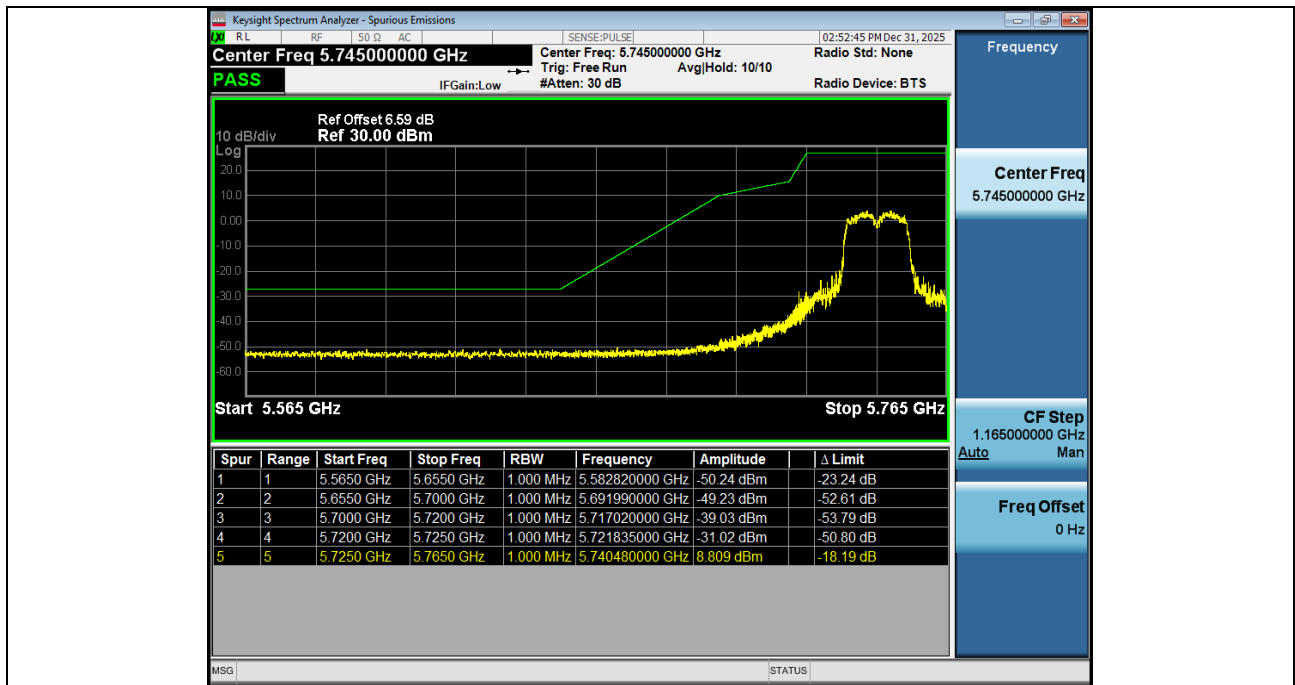



Bandedge_NVNT_ANT1_802_11ac(VHT20)_5745

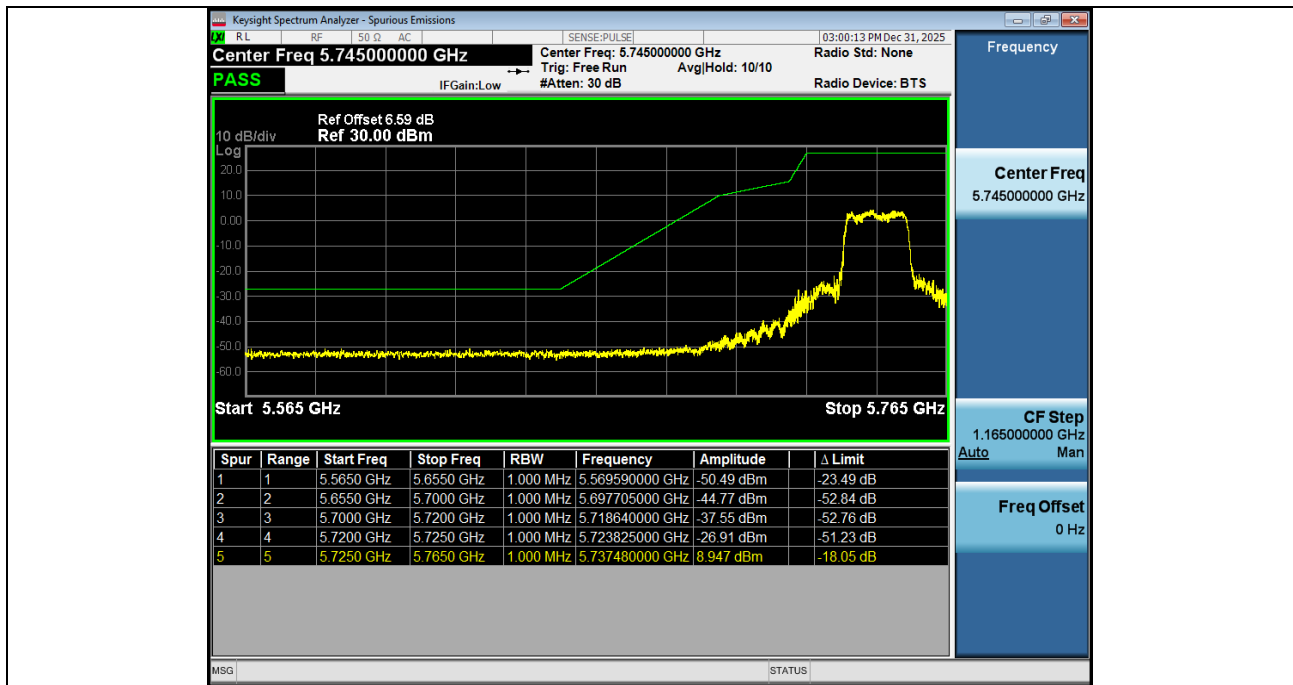

Bandedge_NVNT_ANT1_802_11ac(VHT20)_5825

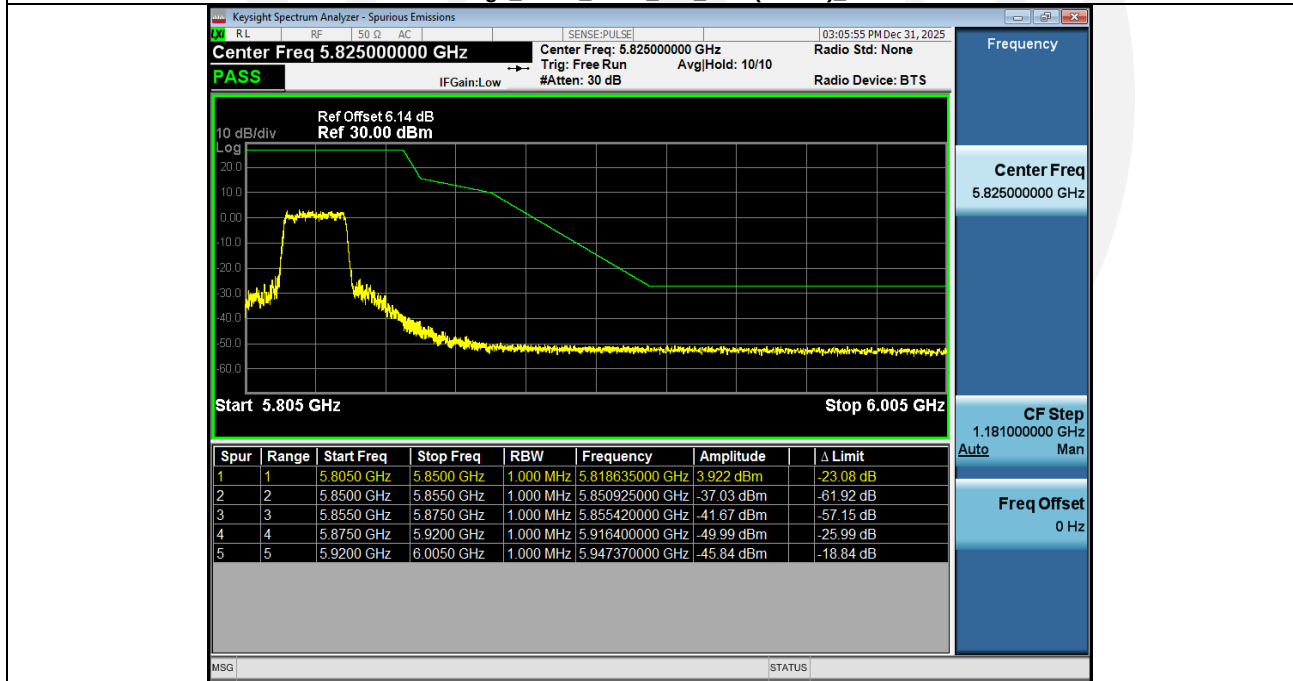



Bandedge_NVNT_ANT1_802_11n(HT40)_5755

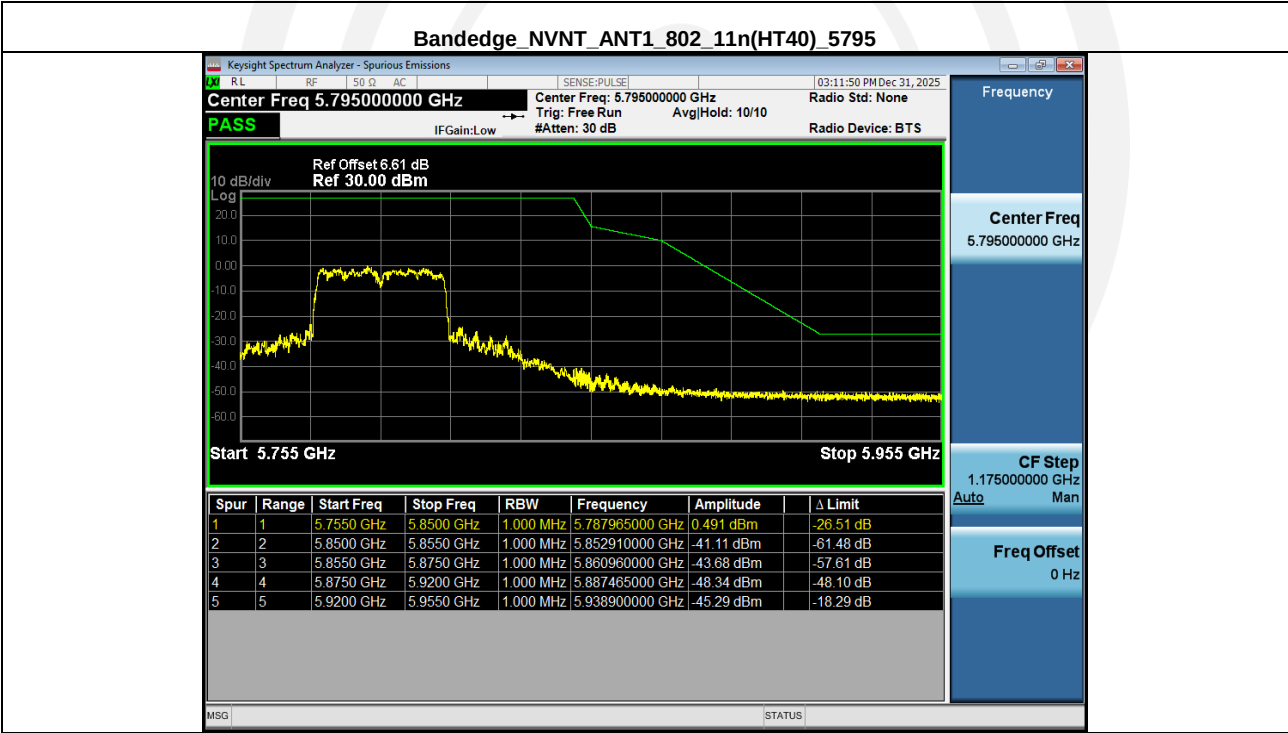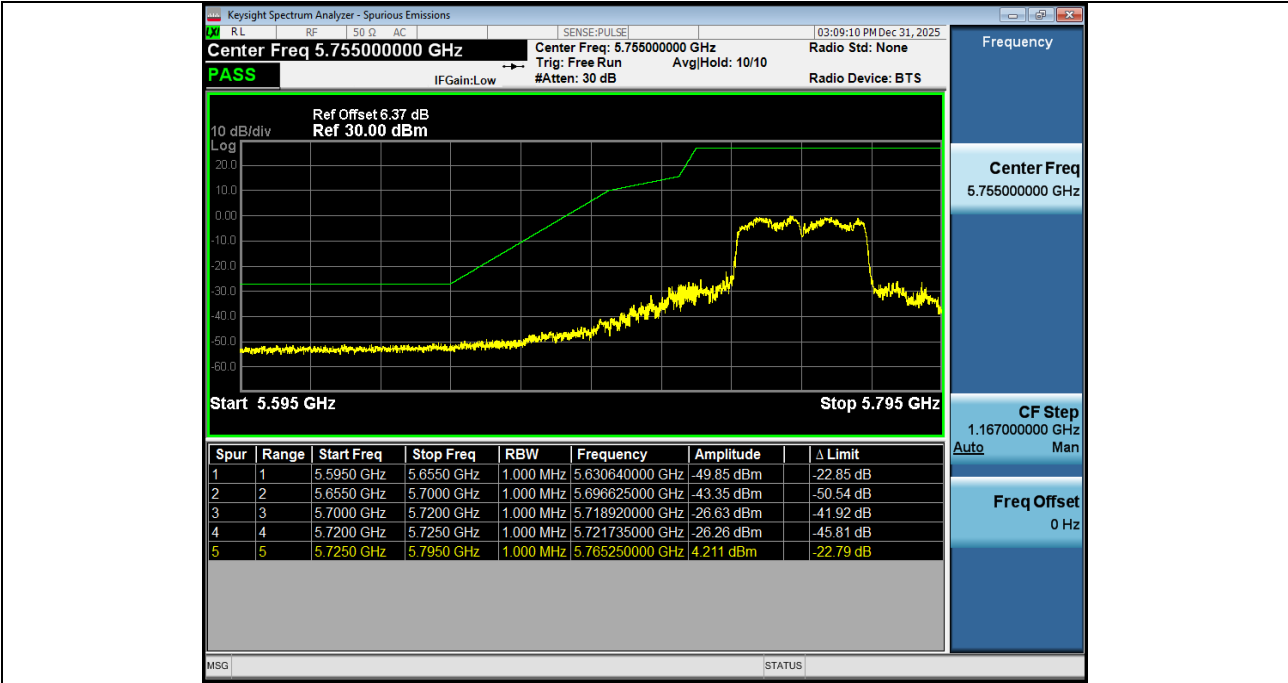

4.7 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10-2020				
Test Frequency Range:	30MHz to 40GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		74.0		Peak Value
54.0			Average Value		
Test Procedure:	Substitution method was performed to determine the actual ERP emission levels of the EUT. The following test procedure as below: 1>.Below 1GHz test procedure: 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 2>.Above 1GHz test procedure: 1. On the test site as test setup graph above,the EUT shall be placed at the 1.5m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the				

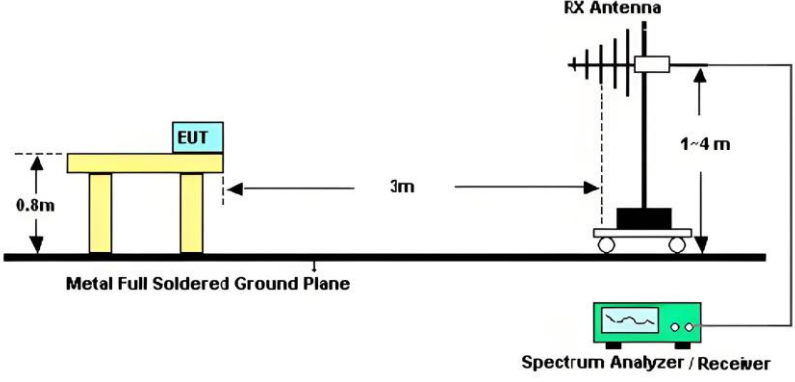	transmitter under test. - The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. - Repeat step 4 for test frequency with the test antenna polarized horizontally. - Remove the transmitter and replace it with a substitution antenna - Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. - Repeat step 7 with both antennas horizontally polarized for each test frequency. - Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ where: Pg is the generator output power into the substitution antenna.
Test setup:	Below 1GHz  Above 1GHz

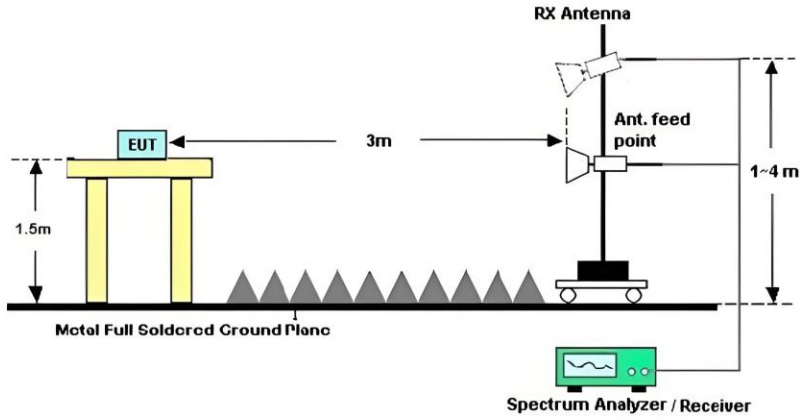
	
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data:

We have scanned from 9kHz to the 10th harmonic of the EUT's highest frequency.
Detailed information please see the following page.

From 9KHz to 30MHz:	
Test Date : 2025.12.24	Temperature : 24℃
Test Engineer : Jensen Wang	Humidity : 56%
Test Mode : IEEE 802.11ac mode	
Test Results : PASS	
Note:	The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz:	
Test Date : 2025.12.24	Temperature : 24℃
Test Engineer : Jensen Wang	Humidity : 56%
Test Mode : IEEE 802.11ac mode	
Test Results : PASS	
Note:	- The test results are listed in next pages. - If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. - All modes and channels have been tested, and only worst data of IEEE 802.11ac(VHT40)_ 5190MHz was listed in this report.

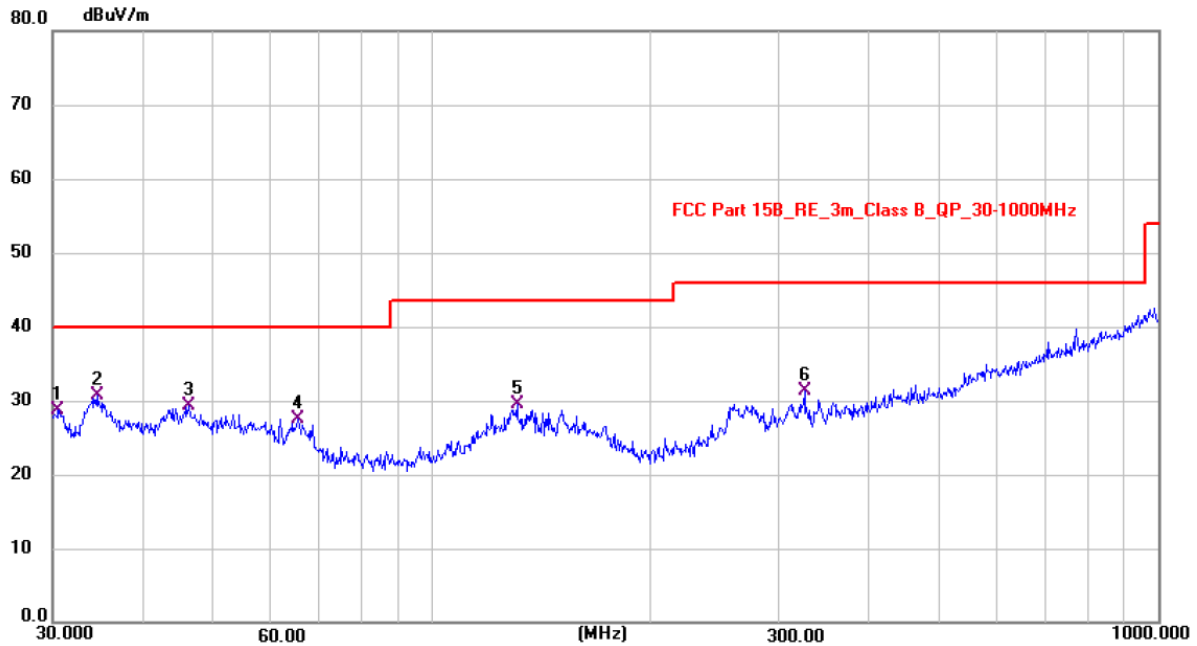
Polarization: Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.5708	14.73	13.95	28.68	40.00	-11.32	QP
2 *	34.5627	16.32	14.30	30.62	40.00	-9.38	QP
3	46.3199	14.84	14.44	29.28	40.00	-10.72	QP
4	65.5727	15.06	12.46	27.52	40.00	-12.48	QP
5	131.2390	15.31	14.14	29.45	43.50	-14.05	QP
6	325.7386	15.68	15.71	31.39	46.00	-14.61	QP

Remark:

Result(dBμV/m) = Reading(dBμV) + Factor(dB/m);

Over Limit(dB) = Result(dBμV/m) - Limit(dBμV/m)

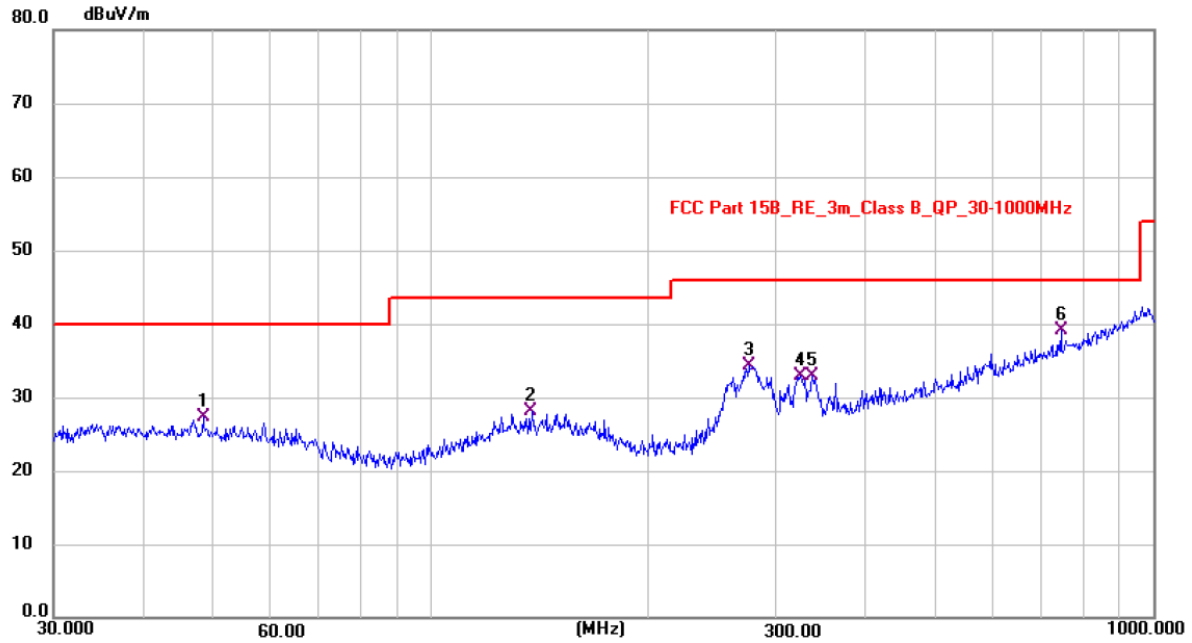Polarization: Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	48.3530	12.95	14.33	27.28	40.00	-12.72	QP
2	137.9028	13.68	14.49	28.17	43.50	-15.33	QP
3	276.1235	20.25	14.02	34.27	46.00	-11.73	QP
4	324.8830	17.10	15.71	32.81	46.00	-13.19	QP
5	337.6593	17.04	15.81	32.85	46.00	-13.15	QP
6 *	746.1732	14.24	24.95	39.19	46.00	-6.81	QP

Remark:

Result(dBμV/m) = Reading(dBμV) + Factor(dB/m);
 Over Limit(dB) = Result(dBμV/m) - Limit(dBμV/m)

Above 1GHz:**802.11a 5180MHz**

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.42	42.11	-5.62	36.49	68.20	-31.71	Vertical
15540.05	32.18	-0.96	31.22	74.00	-42.78	Vertical
10360.69	42.01	-5.66	36.35	68.20	-31.85	Horizontal
15540.24	32.13	-1.01	31.12	74.00	-42.88	Horizontal

802.11a 5200MHz

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.25	42.82	-5.66	37.16	68.20	-31.04	Vertical
15540.39	32.91	-1.02	31.89	74.00	-42.11	Vertical
10360.30	42.58	-5.63	36.95	68.20	-31.25	Horizontal
15540.49	31.95	-0.96	31.00	74.00	-43.00	Horizontal

802.11a 5240MHz

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.86	42.86	-5.60	37.26	68.20	-30.94	Vertical
15540.80	32.40	-1.01	31.39	74.00	-42.61	Vertical
10360.54	43.03	-5.66	37.37	68.20	-30.83	Horizontal
15540.72	32.46	-0.98	31.47	74.00	-42.53	Horizontal

802.11n(HT20) 5180MHz

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.44	42.30	-5.60	36.70	68.20	-31.50	Vertical
15540.20	32.63	-1.03	31.60	74.00	-42.40	Vertical
10360.21	41.98	-5.59	36.38	68.20	-31.82	Horizontal
15540.05	32.62	-0.99	31.64	74.00	-42.36	Horizontal

802.11n(HT20) 5200MHz

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.93	41.92	-5.63	36.29	68.20	-31.91	Vertical
15540.29	33.09	-1.01	32.08	74.00	-41.92	Vertical
10360.69	42.17	-5.62	36.56	68.20	-31.64	Horizontal
15540.01	33.14	-1.01	32.13	74.00	-41.87	Horizontal

802.11n(HT20) 5240MHz

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.41	42.54	-5.61	36.94	68.20	-31.26	Vertical
15540.83	32.25	-0.97	31.28	74.00	-42.72	Vertical
10360.04	42.10	-5.62	36.48	68.20	-31.72	Horizontal
15540.52	32.77	-0.98	31.79	74.00	-42.21	Horizontal

802.11ac(HT20) 5180MHz

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.49	42.82	-5.62	37.20	68.20	-31.00	Vertical
15540.90	32.20	-1.03	31.17	74.00	-42.83	Vertical
10360.44	42.85	-5.61	37.24	68.20	-30.96	Horizontal
15540.21	32.43	-0.99	31.44	74.00	-42.56	Horizontal

802.11ac(HT20) 5200MHz

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.91	42.87	-5.65	37.22	68.20	-30.98	Vertical
15540.40	32.63	-1.03	31.60	74.00	-42.40	Vertical
10360.70	43.16	-5.60	37.56	68.20	-30.64	Horizontal
15540.89	32.98	-1.01	31.98	74.00	-42.02	Horizontal

802.11ac(HT20) 5240MHz

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.16	42.38	-5.61	36.76	68.20	-31.44	Vertical
15540.03	31.92	-1.01	30.92	74.00	-43.08	Vertical
10360.55	42.10	-5.62	36.48	68.20	-31.72	Horizontal
15540.49	32.72	-0.98	31.75	74.00	-42.25	Horizontal

802.11n(HT40) 5190MHz

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.99	42.60	-5.65	36.95	68.20	-31.25	Vertical
15540.13	32.61	-0.98	31.63	74.00	-42.37	Vertical
10360.24	42.03	-5.63	36.40	68.20	-31.80	Horizontal
15540.44	32.81	-1.01	31.80	74.00	-42.20	Horizontal

802.11n(HT40) 5230MHz

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.77	42.91	-5.60	37.31	68.20	-30.89	Vertical
15540.98	32.32	-1.01	31.31	74.00	-42.69	Vertical
10360.34	42.04	-5.62	36.42	68.20	-31.78	Horizontal
15540.59	31.97	-0.98	30.98	74.00	-43.02	Horizontal

Note:

1. Level = Read Level + Factor. (Factor=Antenna Factor+ Cable loss- Preamplifier Factor)
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. This Report only show the test plots of the worst case (U-NII-1).

4.8 Frequency stability

Test Standard	15.407(g)
Test limit	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
Test results:	Pass

Measurement Data:

Mode	Voltage (V)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
Band 1 (5150-5250 MHz)	DC 4.5V	5179.994	6	5239.993	7
	DC 5V	5179.995	5	5239.992	8
	DC 5.5V	5179.996	4	5239.996	4
Mode	Voltage (V)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
Band 4 (5725-5850 MHz)	DC 4.5V	5744.993	7	5824.995	5
	DC 5V	5744.992	8	5824.997	3
	DC 5.5V	5744.996	4	5824.993	7

Mode	Temperature (°C)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
Band 1 (5150-5250 MHz)	-10°C	5179.995	4	5239.997	3
	0°C	5179.992	8	5239.996	4
	+10°C	5179.993	7	5239.993	7
	+20°C	5179.995	5	5239.993	7
	+30°C	5179.996	4	5239.995	5
	+40°C	5179.997	3	5239.992	8
	+50°C	5179.993	7	5239.995	5
Mode	Temperature (°C)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
Band 4 (5725-5850 MHz)	-10°C	5744.993	7	5824.997	3
	0°C	5744.997	3	5824.998	2
	+10°C	5744.999	1	5824.996	4
	+20°C	5744.991	9	5824.994	6
	+30°C	5744.998	2	5824.995	5
	+40°C	5744.995	5	5824.998	2
	+50°C	5744.994	6	5824.992	8

5 Photos Of Test Setup

Reference to the **appendix I Test Setup Photo** for details.

6 Photos Of EUT

Reference to the **appendix II external photos** and **appendix III internal photos** for details.

-----END OF REPORT-----

