

Appendix B

RF Test Data for BT LE (Conducted Measurement)

Product Name: Wireless Carplay

Test Model: Q1S

Environmental Conditions


Temperature:	23.7°C
Relative Humidity:	54.2%
ATM Pressure:	100.0 kPa
Test Engineer:	Zhang hai
Supervised by:	Fengliu Tang


B.1 DTS Bandwidth


Test Result

TestMode	Antenna	Freq (MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	0.660	2401.664	2402.324	0.5	PASS
		2440	0.660	2439.664	2440.324	0.5	PASS
		2480	0.660	2479.664	2480.324	0.5	PASS
BLE_2M	Ant1	2402	1.156	2401.400	2402.556	0.5	PASS
		2440	1.148	2439.404	2440.552	0.5	PASS
		2480	1.152	2479.400	2480.552	0.5	PASS

Test Graphs

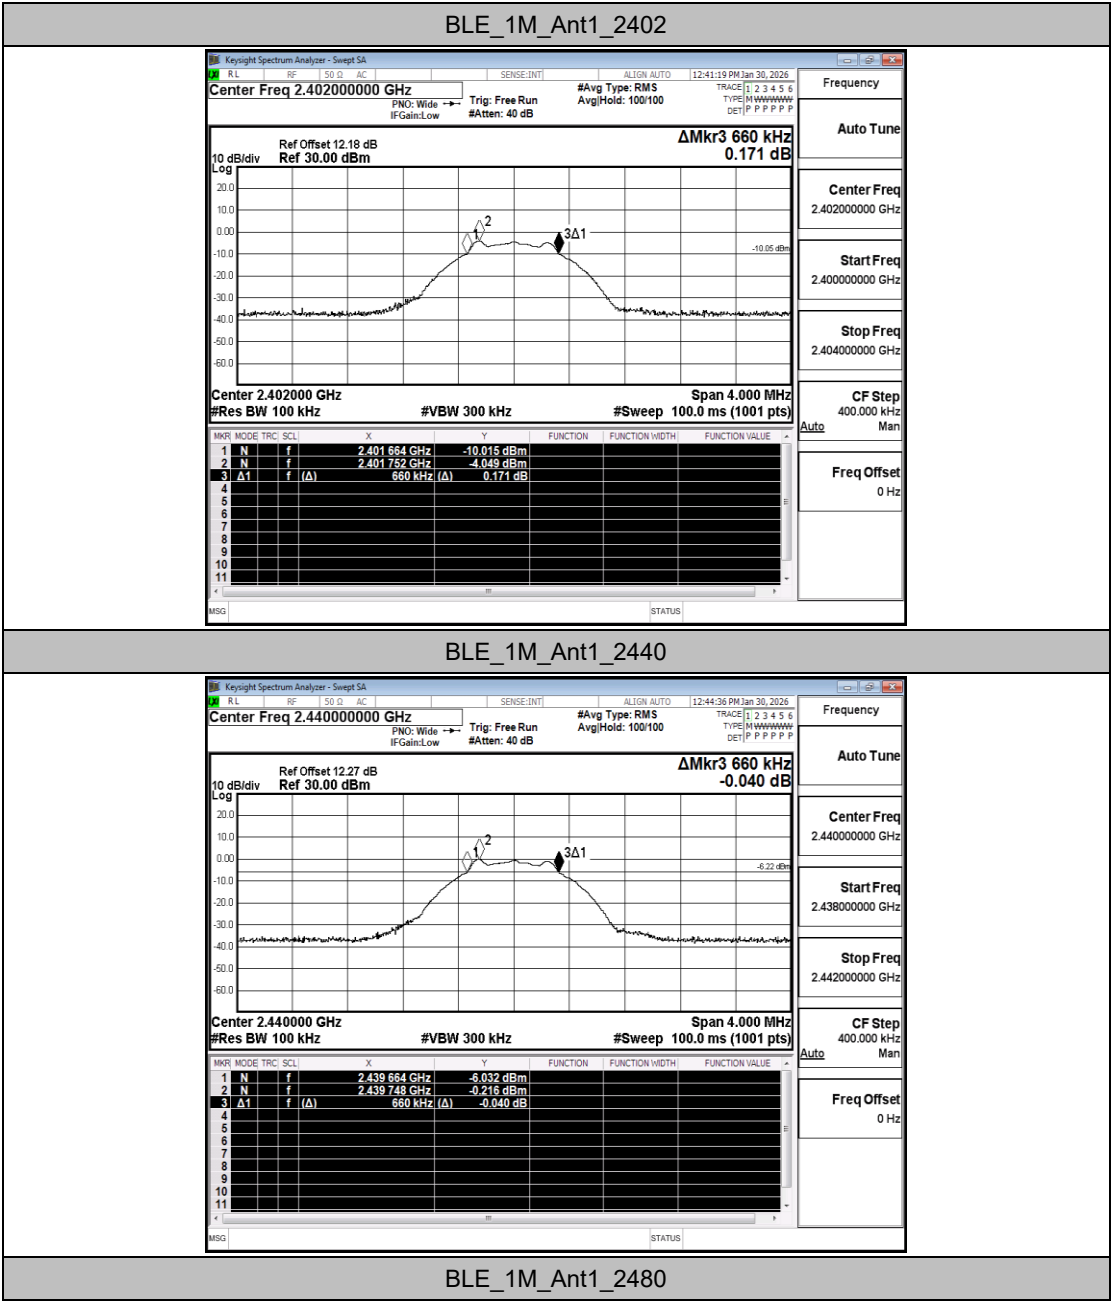

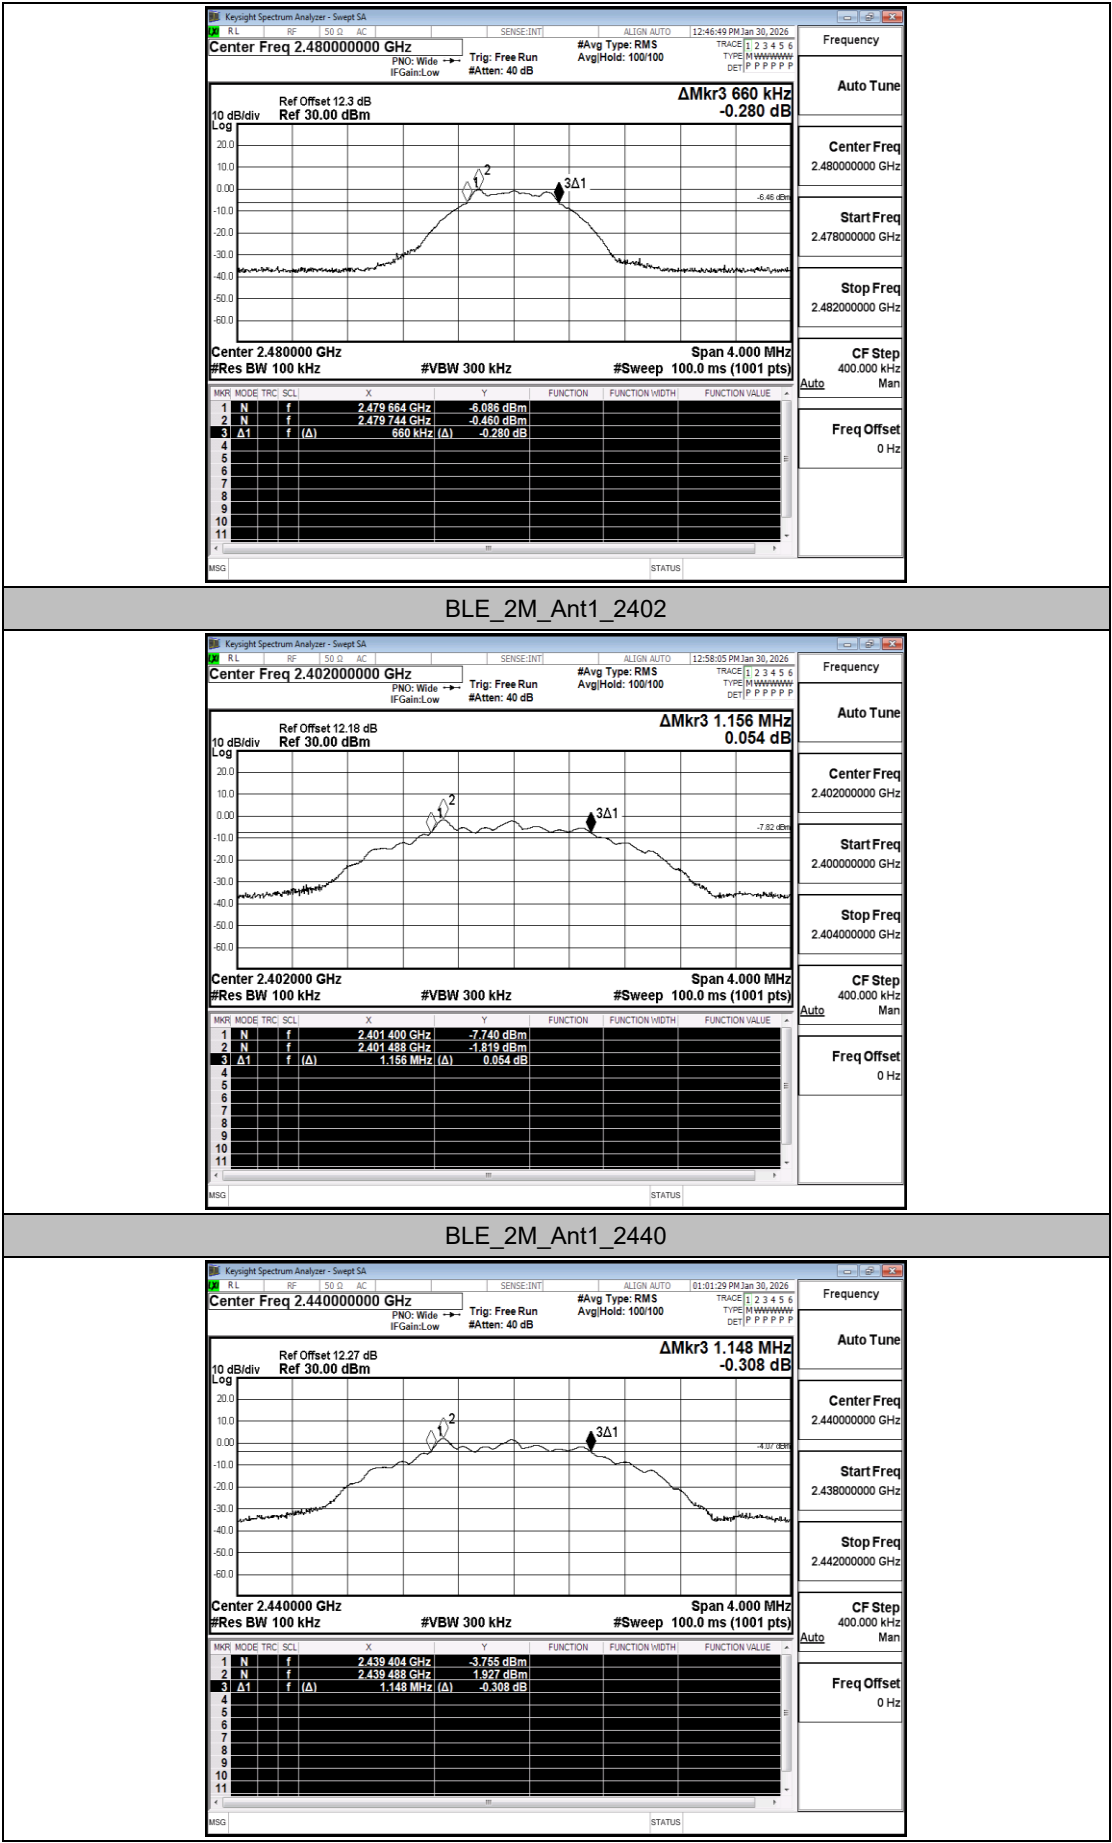

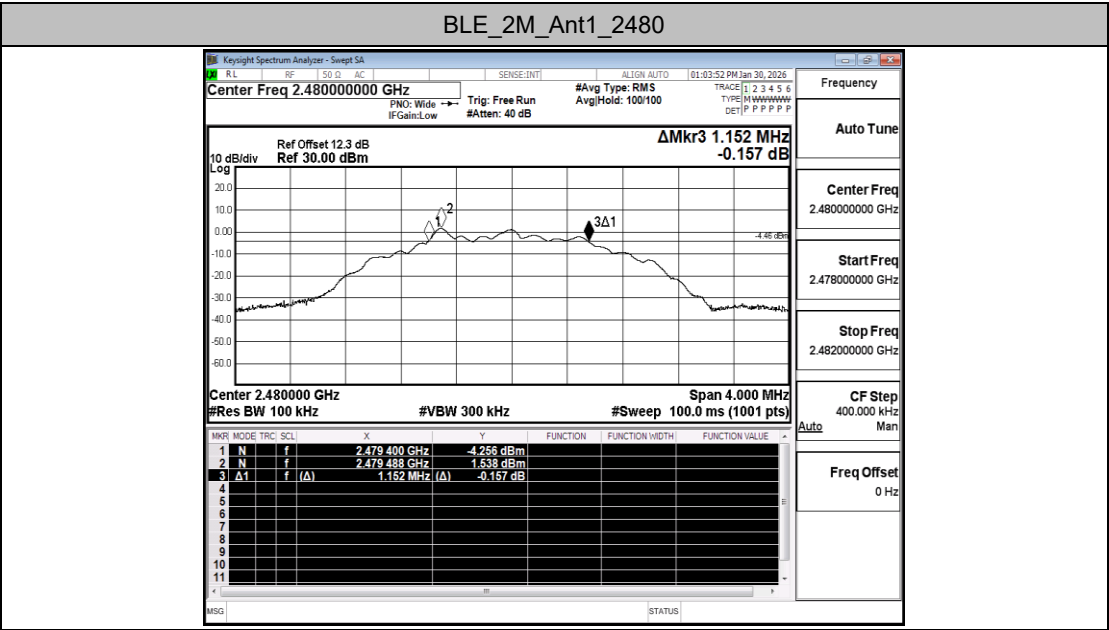



B.2 Maximum Peak conducted output power


Test Result Peak

TestMode	Antenna	Freq (MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE_1M	Ant1	2402	-3.15	≤30	PASS
		2440	0.33	≤30	PASS
		2480	0.24	≤30	PASS
BLE_2M	Ant1	2402	-1.03	≤30	PASS
		2440	2.56	≤30	PASS
		2480	2.16	≤30	PASS

Test Graphs Peak

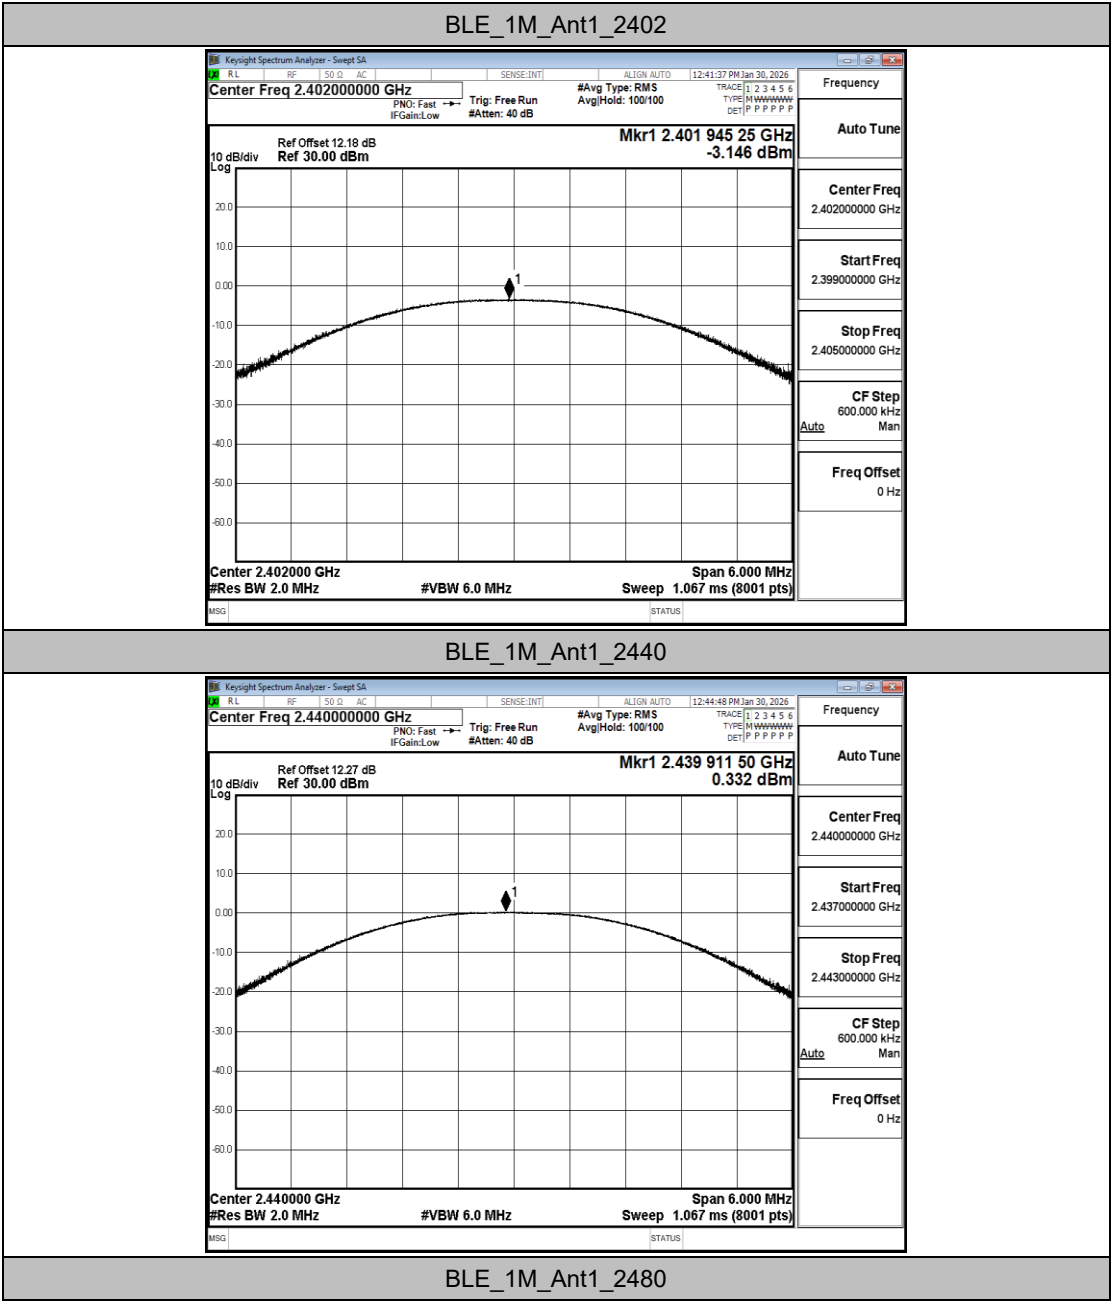

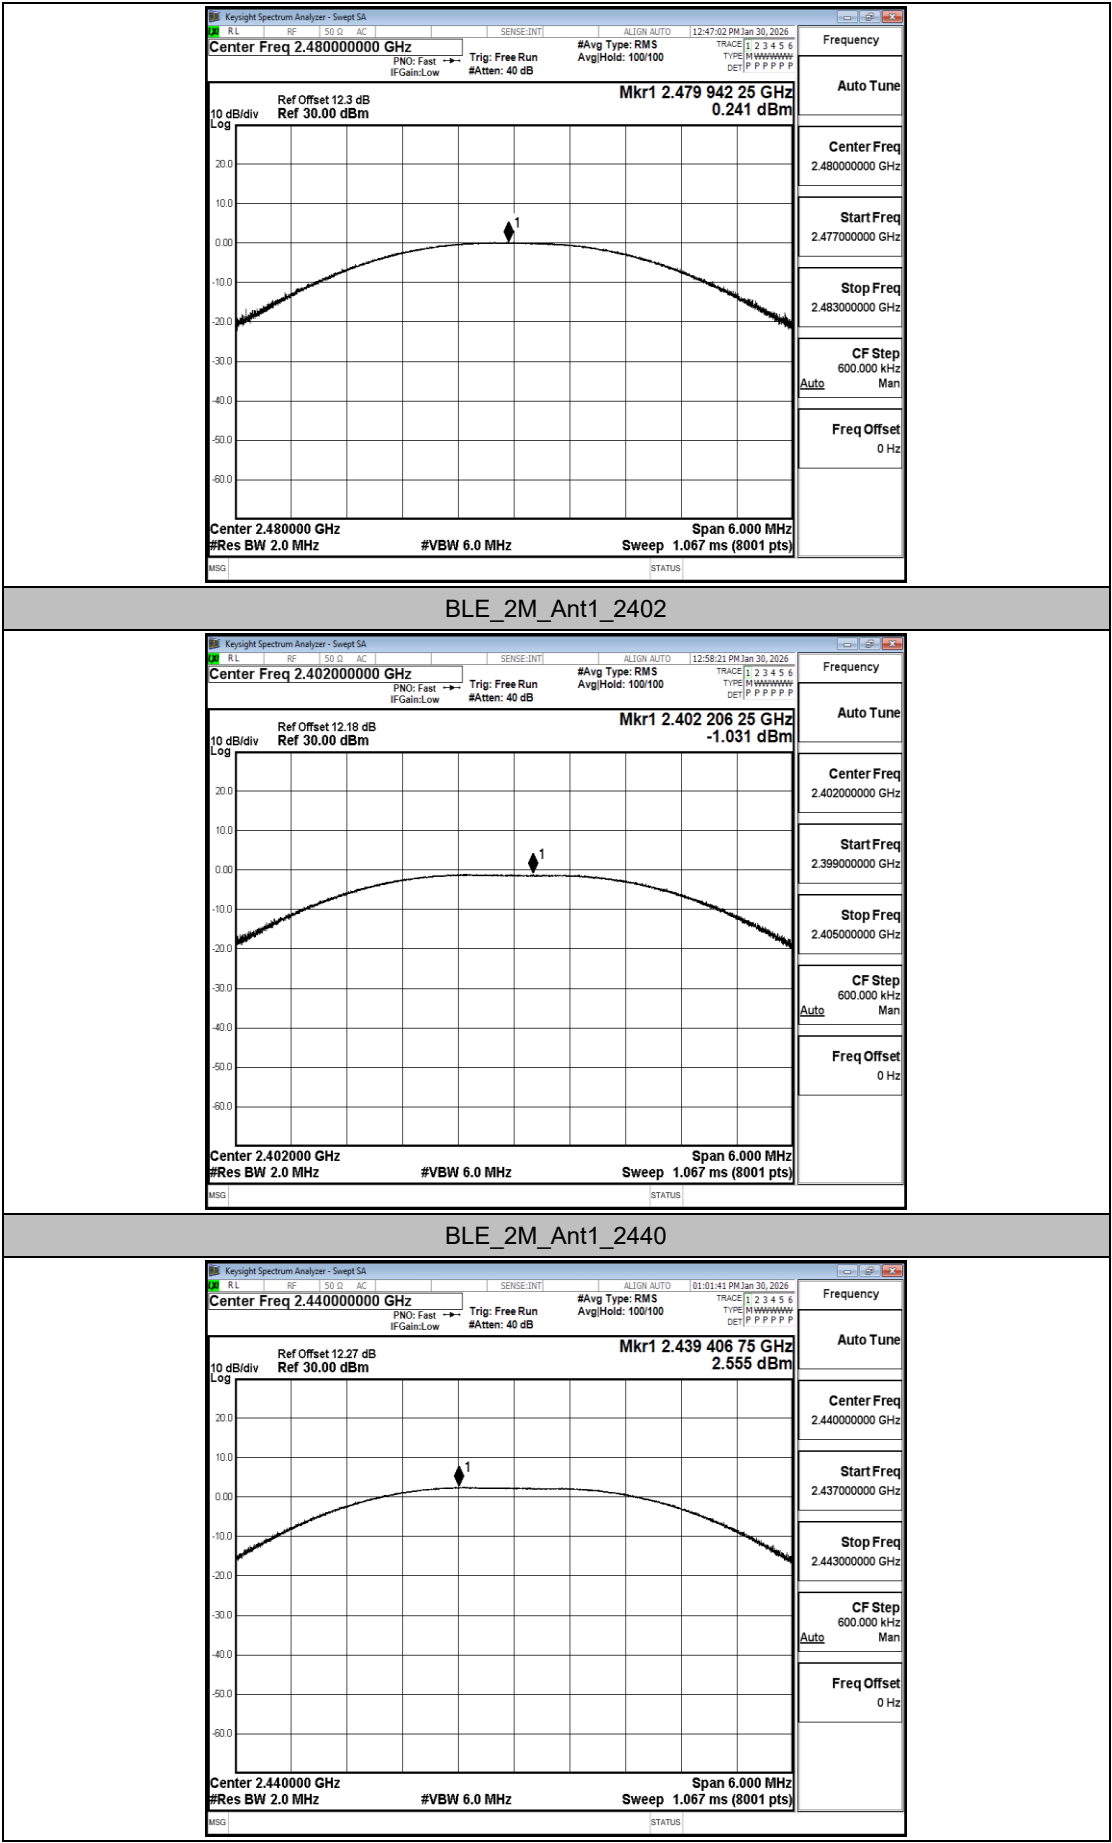

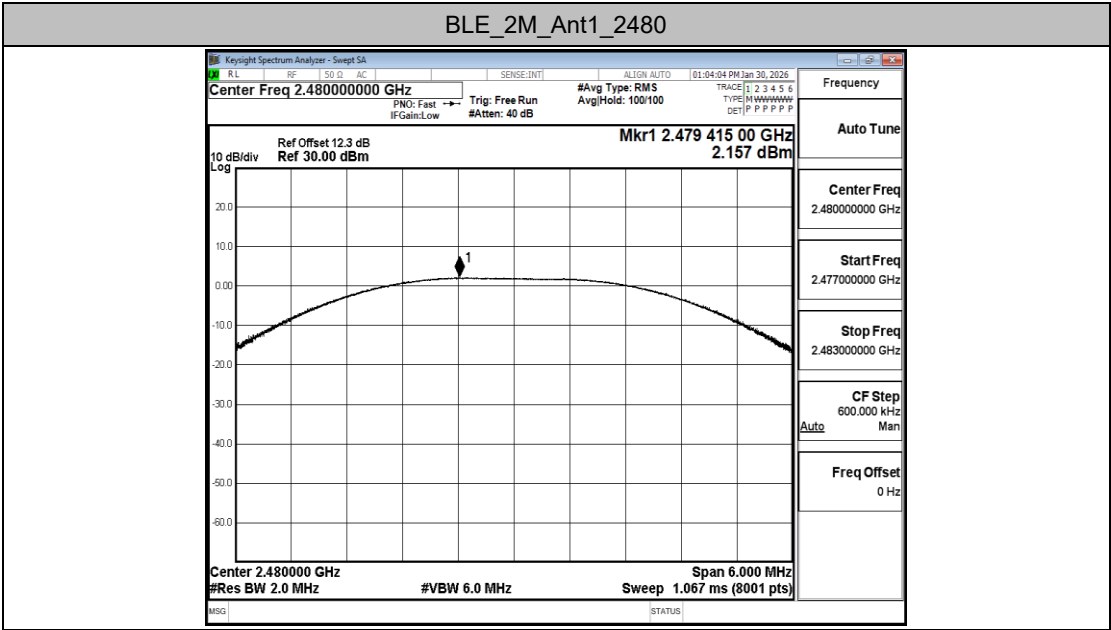



B.3 Maximum power spectral density


Test Result

TestMode	Antenna	Freq (MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-20.33	≤8.00	PASS
		2440	-16.45	≤8.00	PASS
		2480	-16.54	≤8.00	PASS
BLE_2M	Ant1	2402	-21.06	≤8.00	PASS
		2440	-17.21	≤8.00	PASS
		2480	-17.59	≤8.00	PASS

Test Graphs

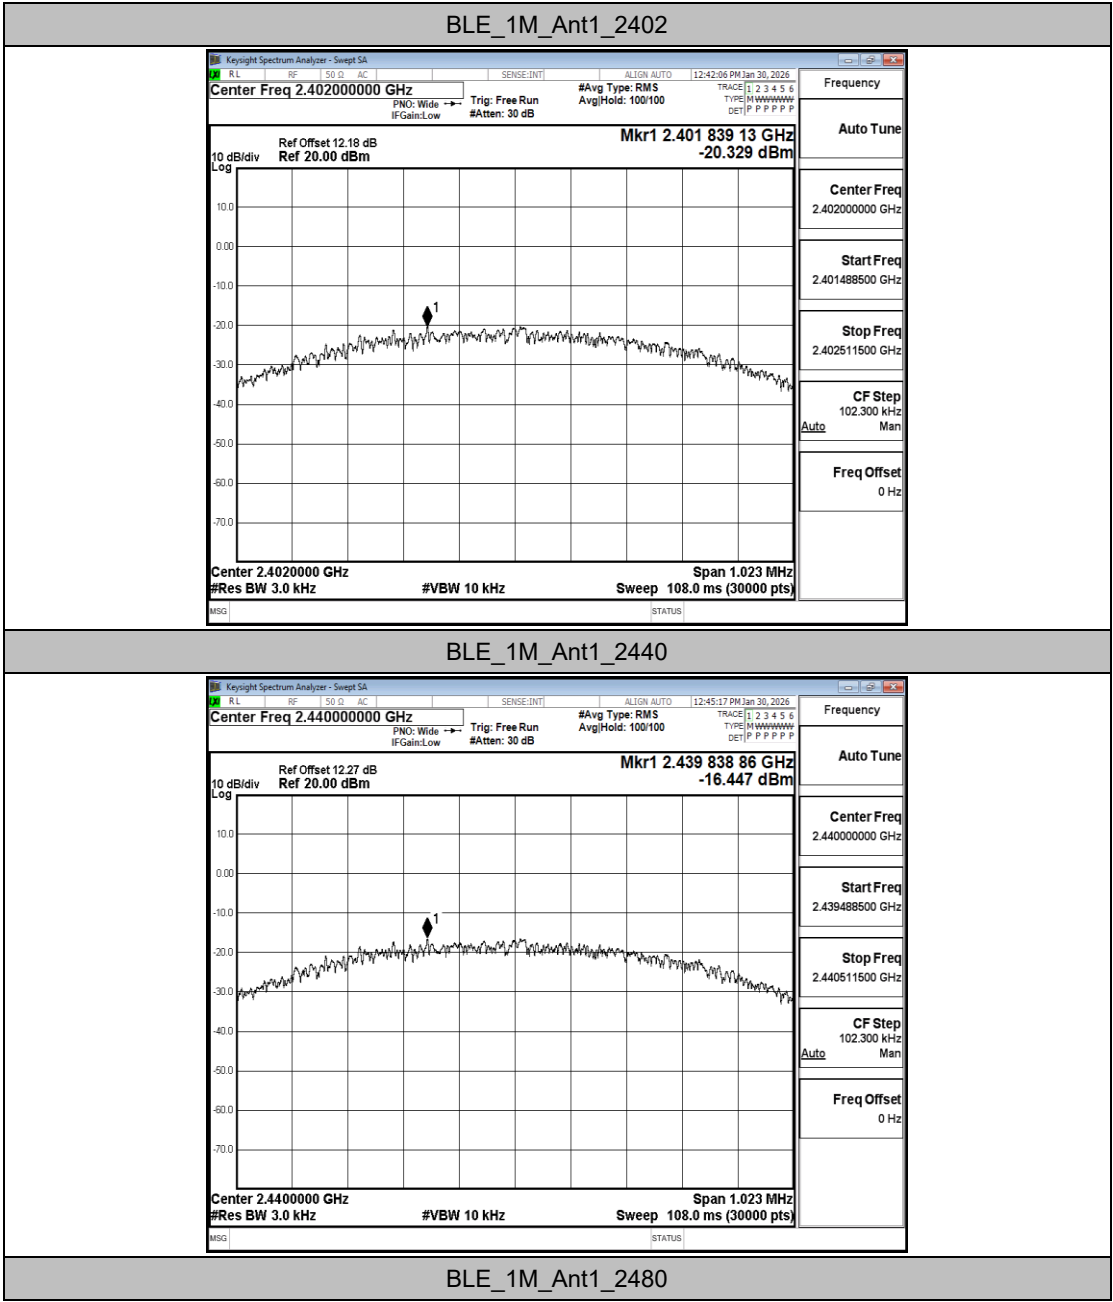

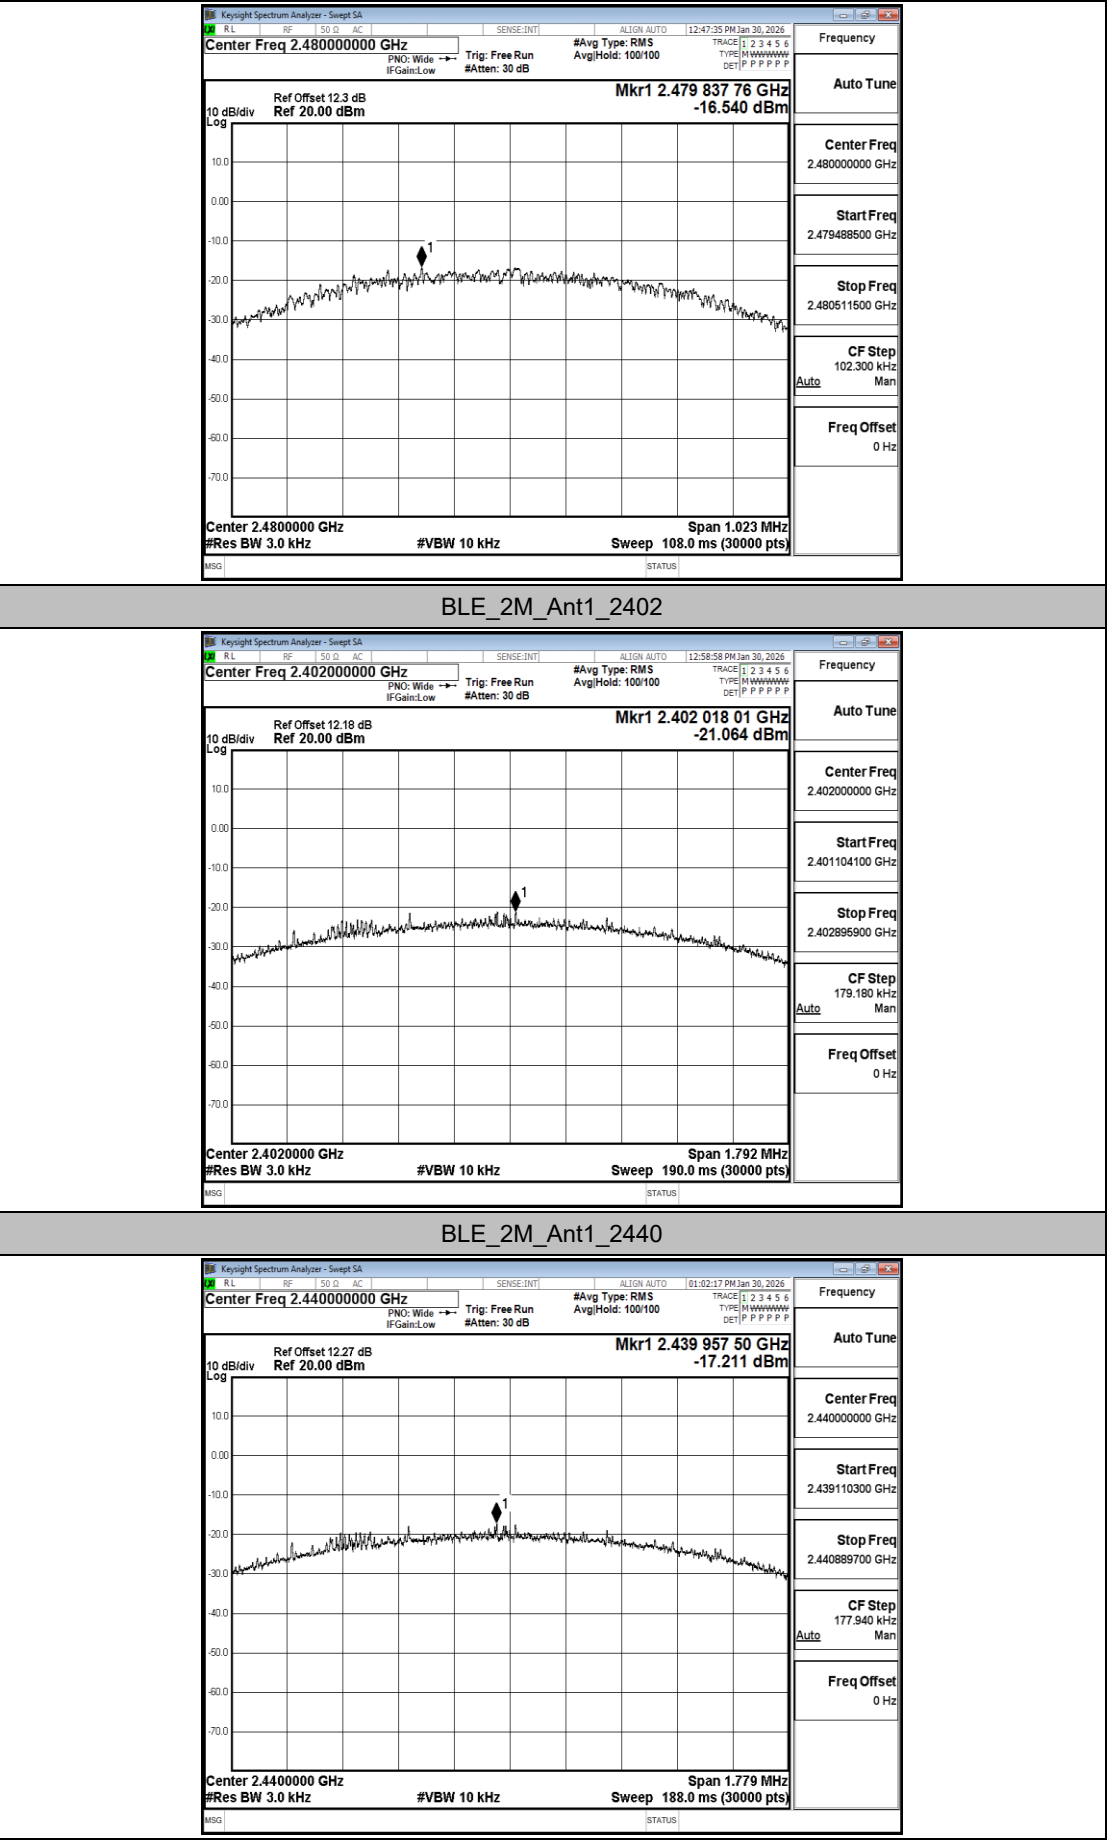

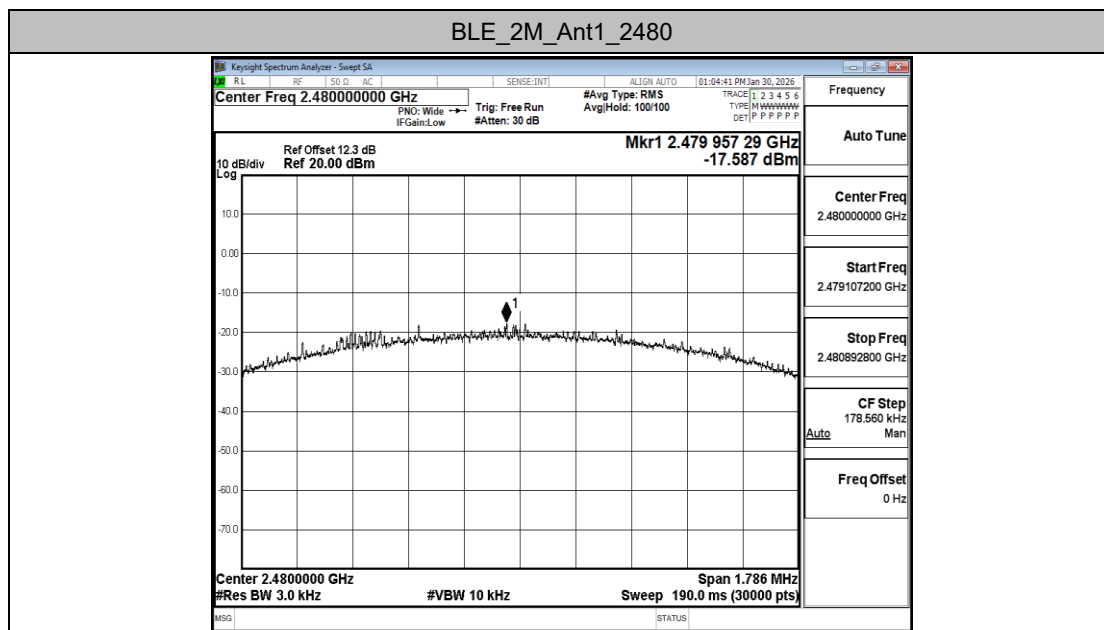



B.4 Band edge measurements

Test Result

TestMode	Antenna	ChName	Freq (MHz)	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	-4.17	-45.49	≤-24.17	PASS
		High	2480	-0.50	-44.77	≤-20.5	PASS
BLE_2M	Ant1	Low	2402	-1.84	-45.46	≤-21.84	PASS
		High	2480	0.18	-45.1	≤-19.82	PASS

Test Graphs

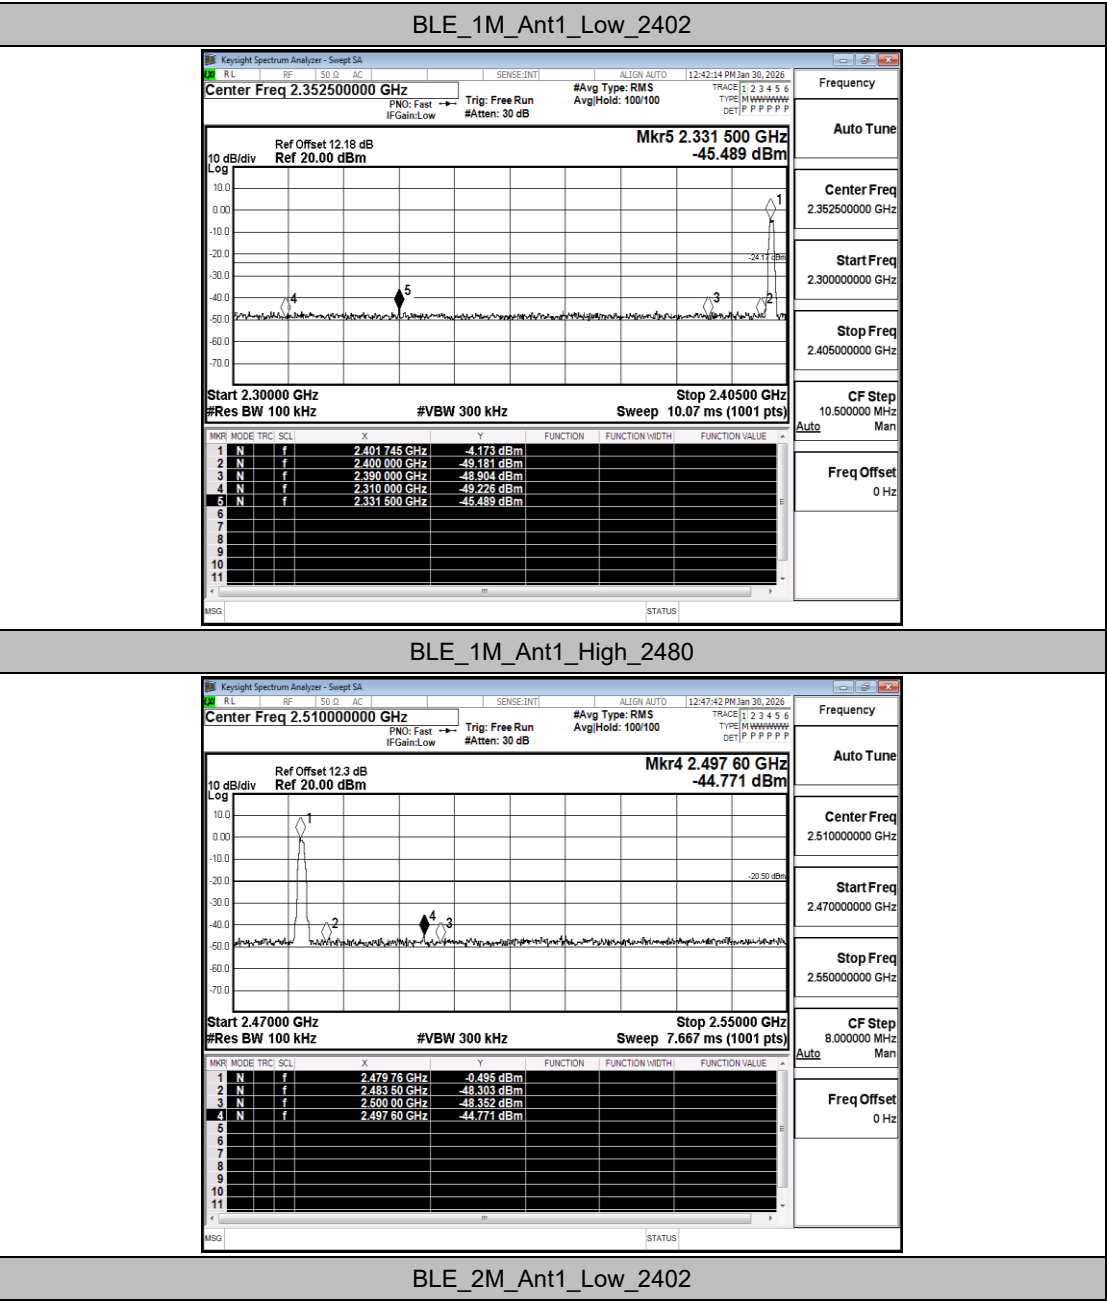

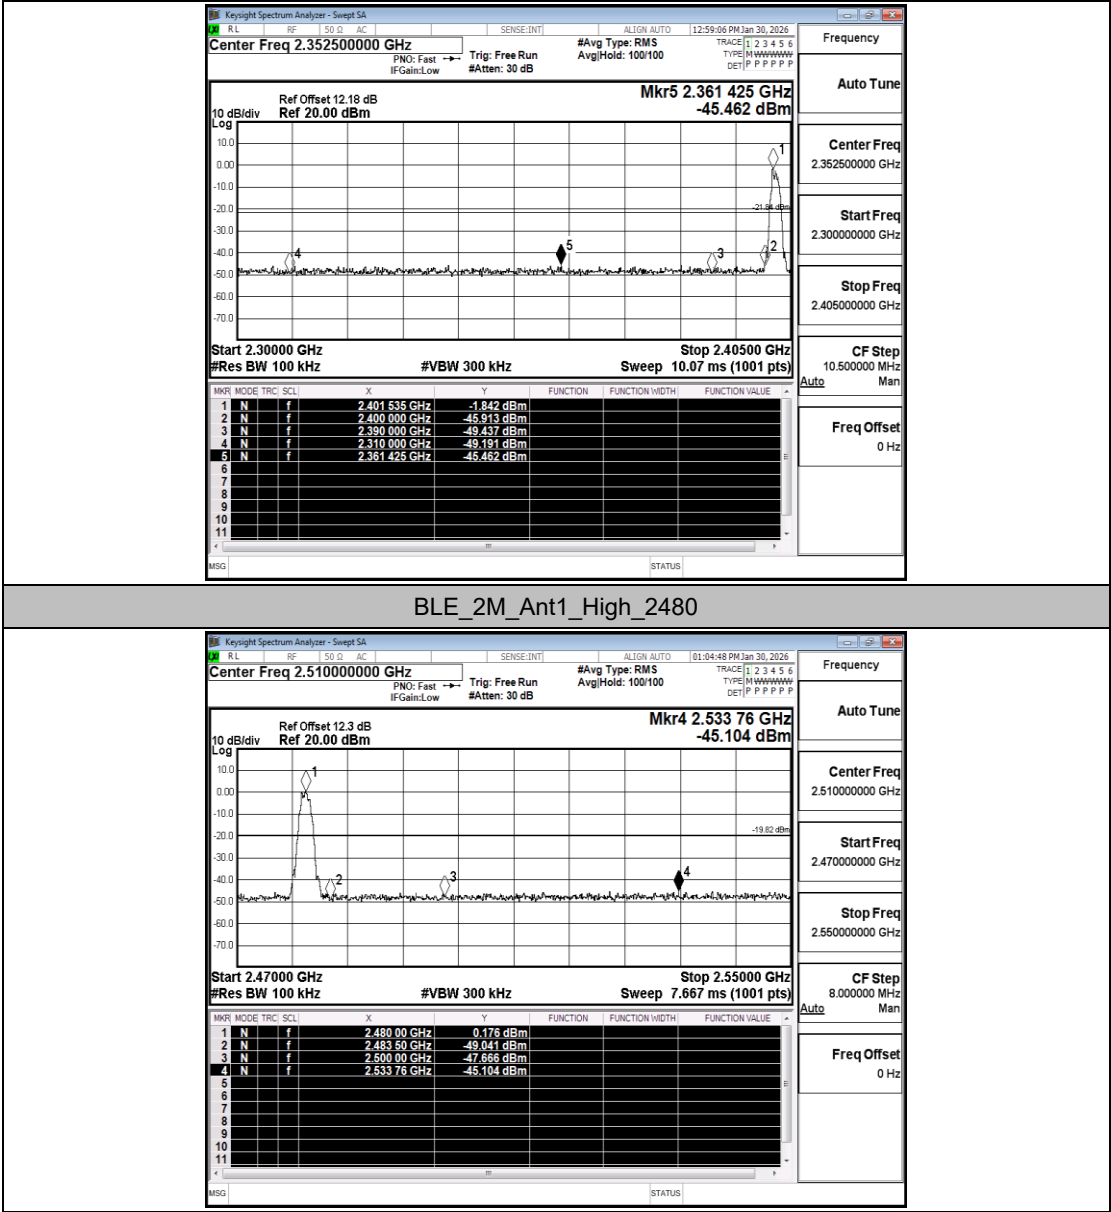



B.5 Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq (MHz)	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	-4.20	-4.20	---	PASS
			30~1000	-4.20	-62.42	≤-24.2	PASS
			1000~26500	-4.20	-42.43	≤-24.2	PASS
		2440	Reference	-0.37	-0.37	---	PASS
			30~1000	-0.37	-59.46	≤-20.37	PASS
			1000~26500	-0.37	-43.29	≤-20.37	PASS
		2480	Reference	-0.54	-0.54	---	PASS
			30~1000	-0.54	-57.75	≤-20.54	PASS
			1000~26500	-0.54	-43.19	≤-20.54	PASS
BLE_2M	Ant1	2402	Reference	-1.93	-1.93	---	PASS
			30~1000	-1.93	-61.47	≤-21.93	PASS
			1000~26500	-1.93	-43.43	≤-21.93	PASS
		2440	Reference	1.78	1.78	---	PASS
			30~1000	1.78	-60.31	≤-18.22	PASS
			1000~26500	1.78	-43	≤-18.22	PASS
		2480	Reference	1.50	1.50	---	PASS
			30~1000	1.50	-60.05	≤-18.5	PASS
			1000~26500	1.50	-42.68	≤-18.5	PASS

Test Graphs

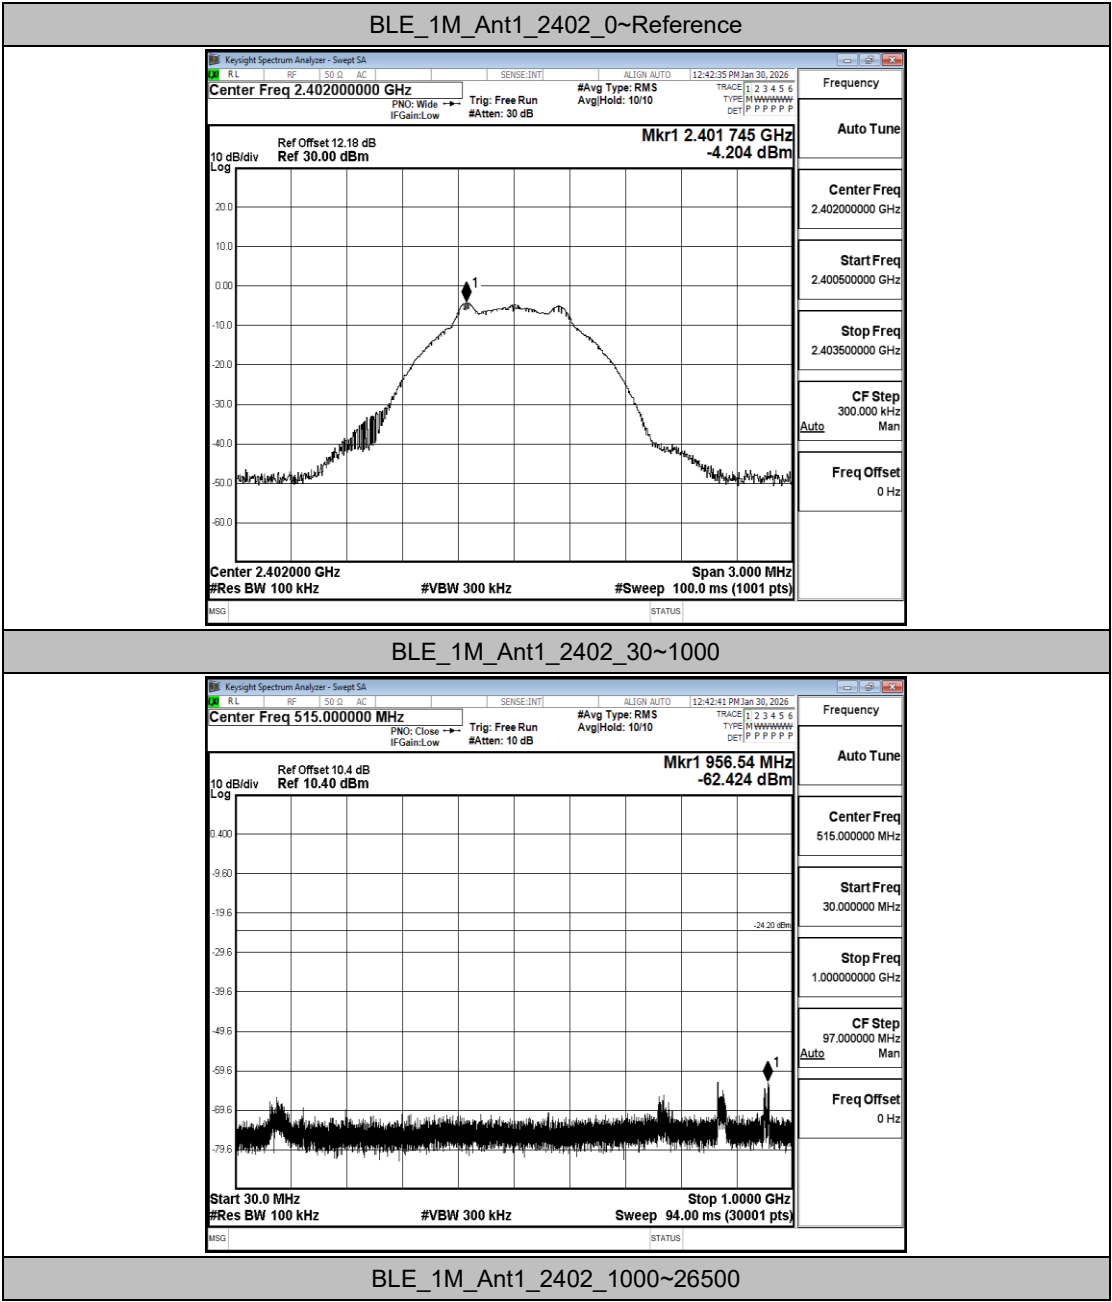


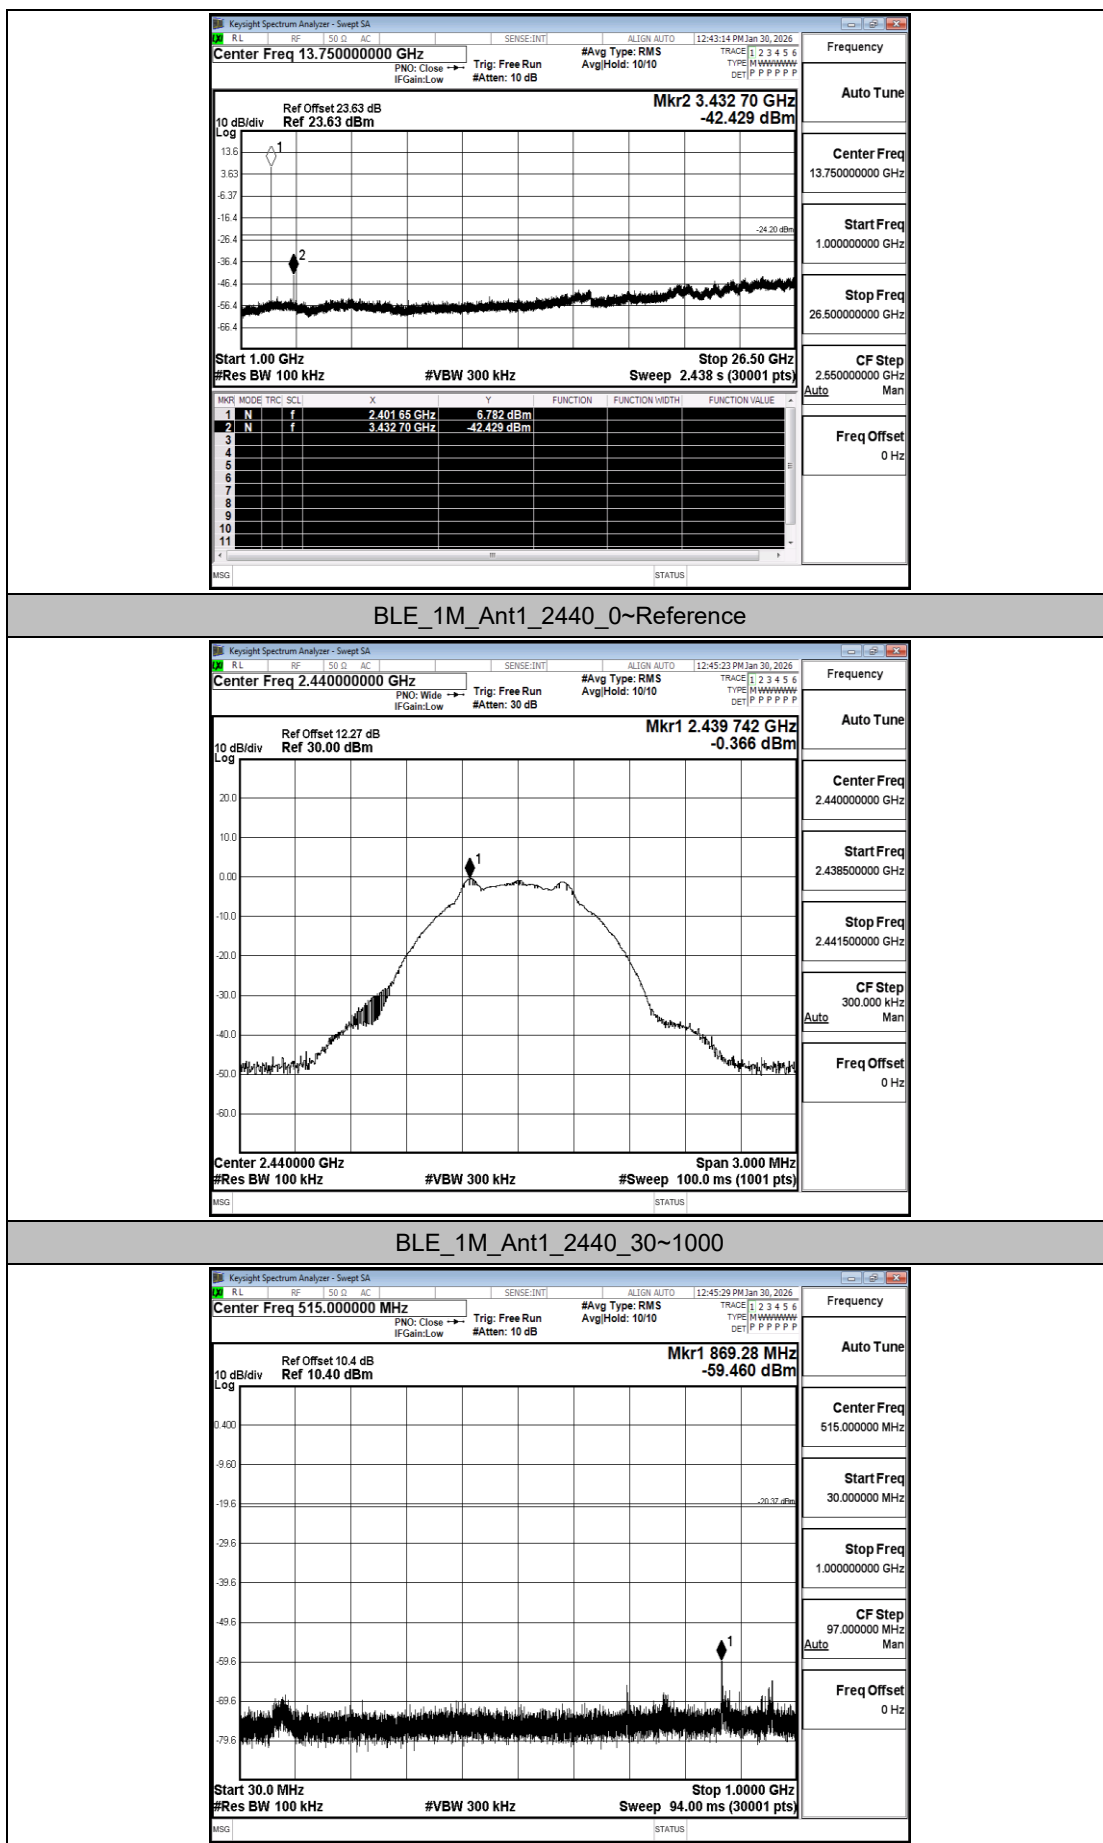



Guangzhou LCS Compliance Testing Laboratory Ltd.


Add: No.44-1, Qianfeng North Road, Shiqi, Panyu District, Guangzhou, Guangdong, China


Tel: +(86) 020-39166689 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

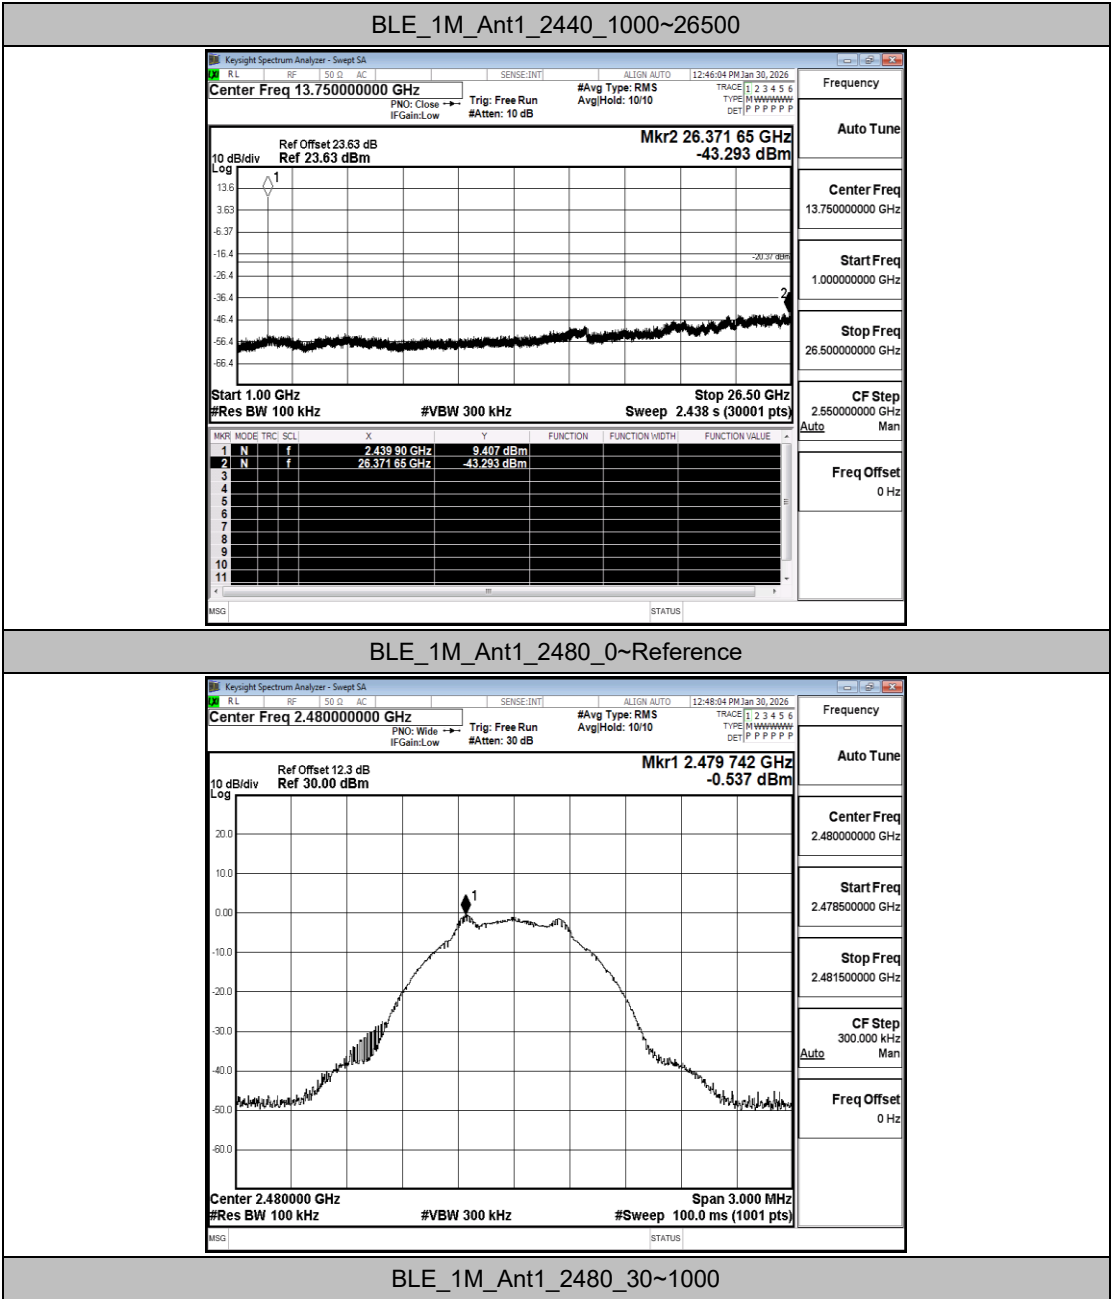


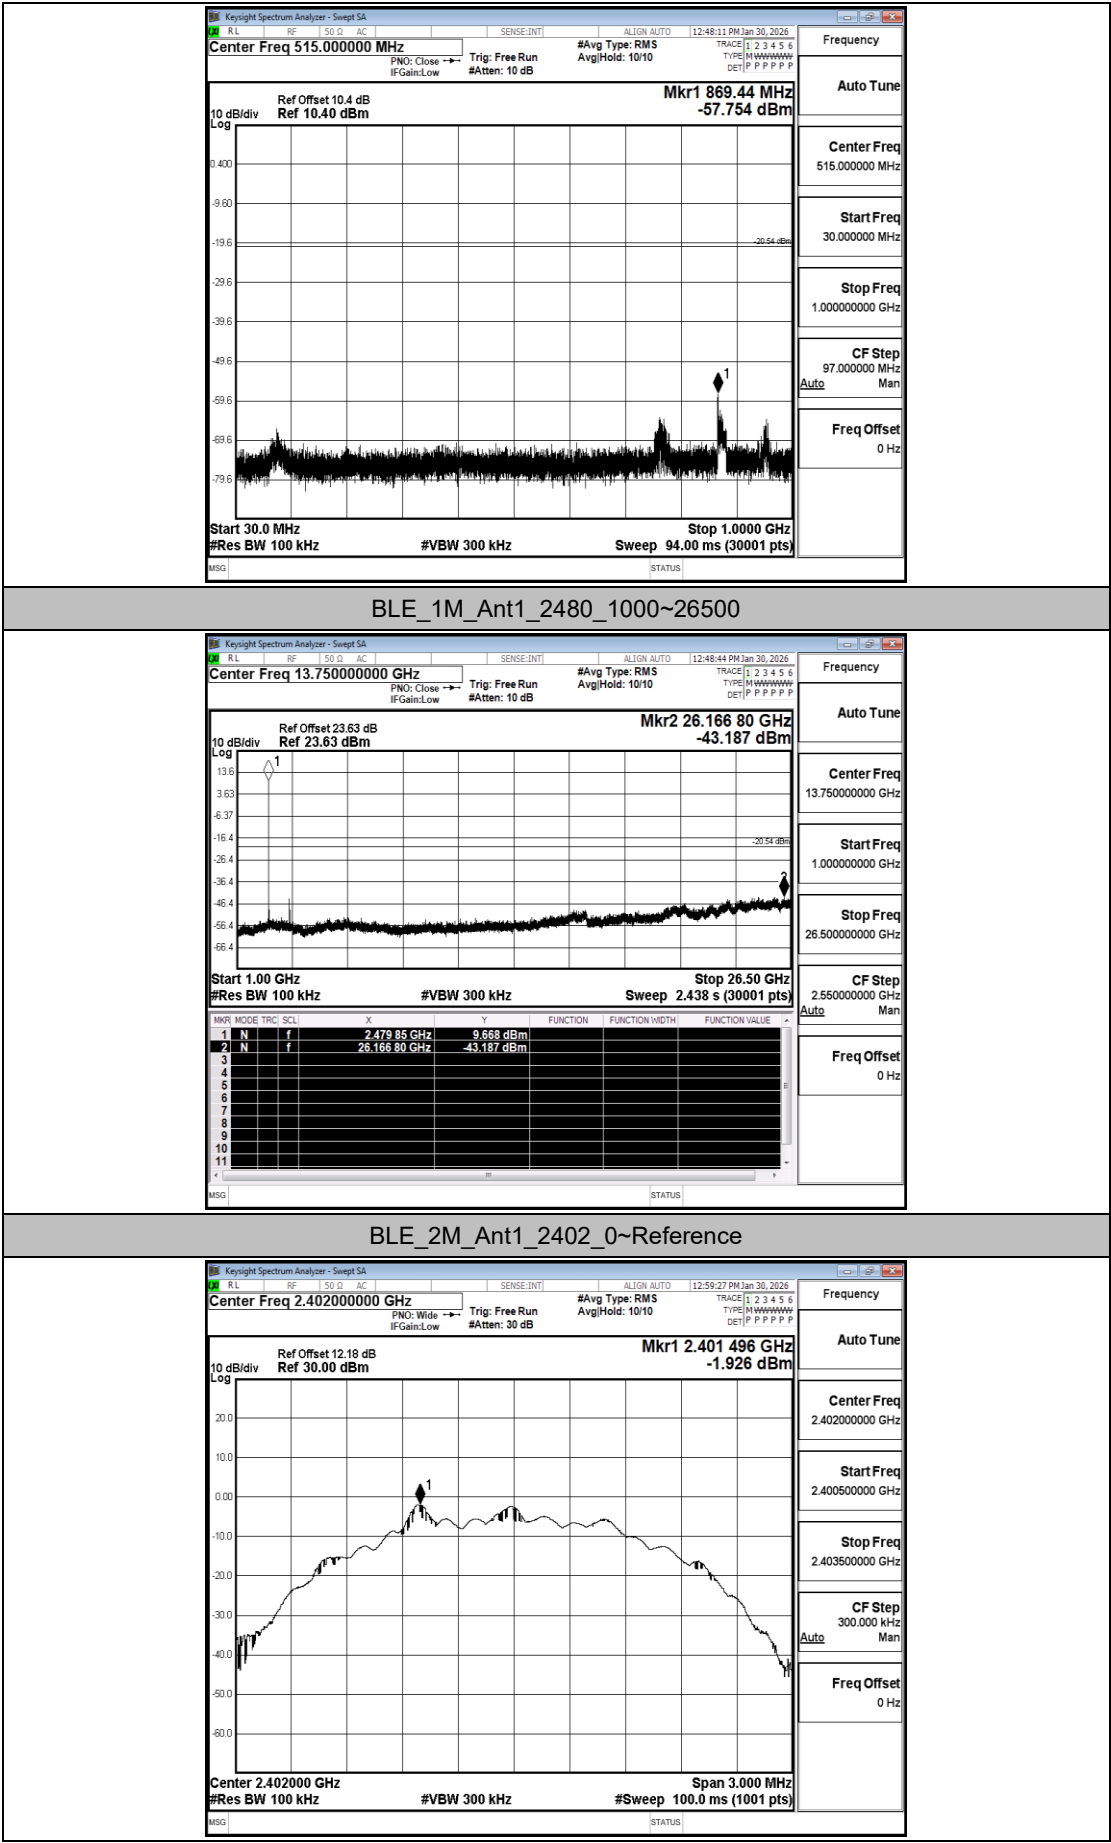

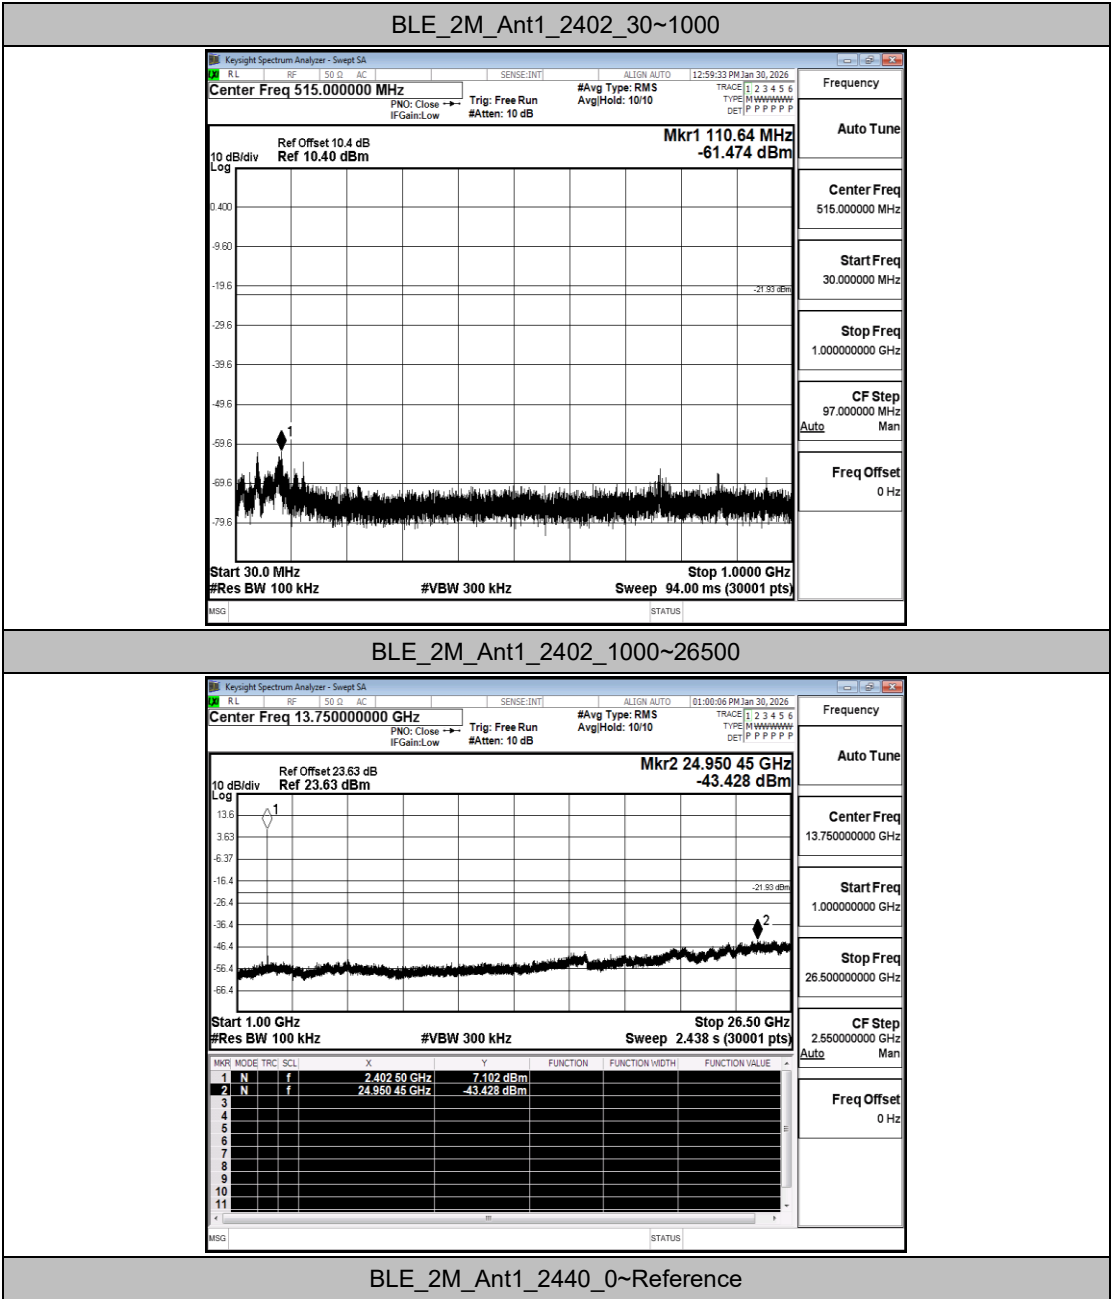

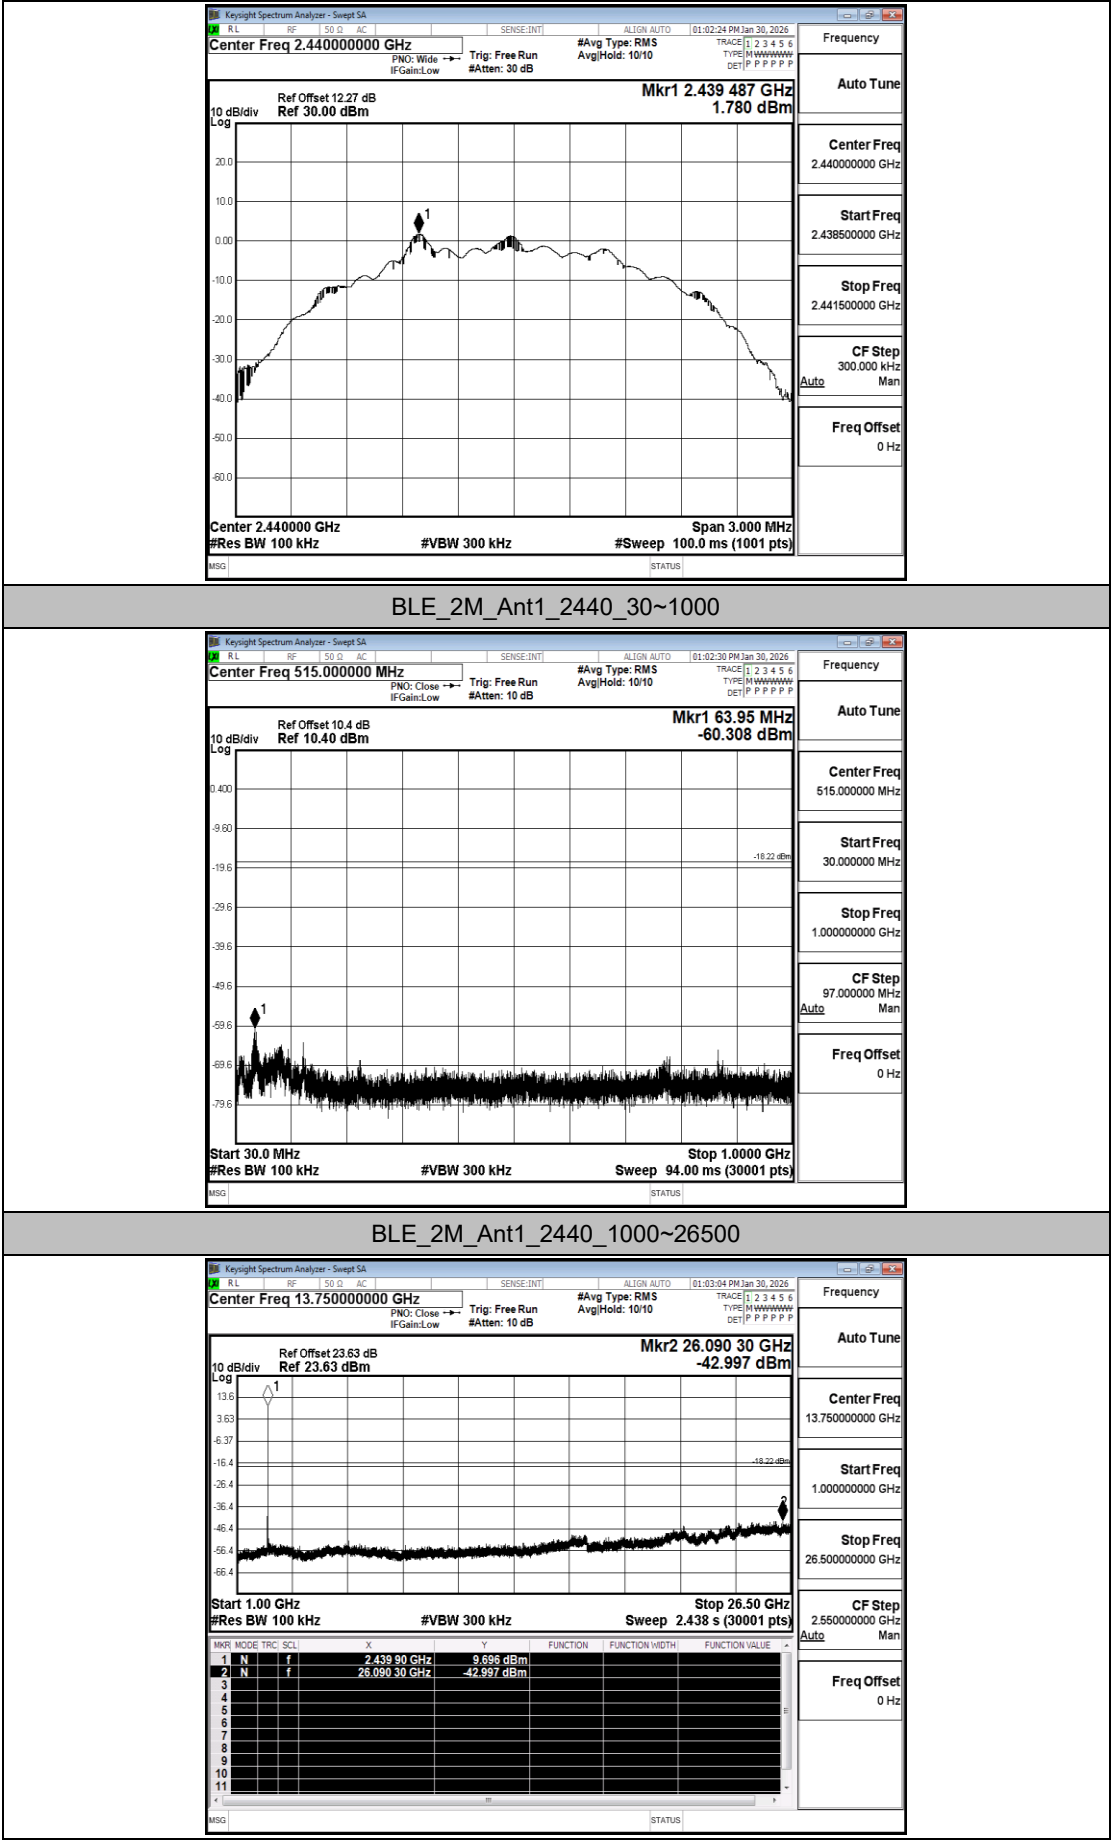

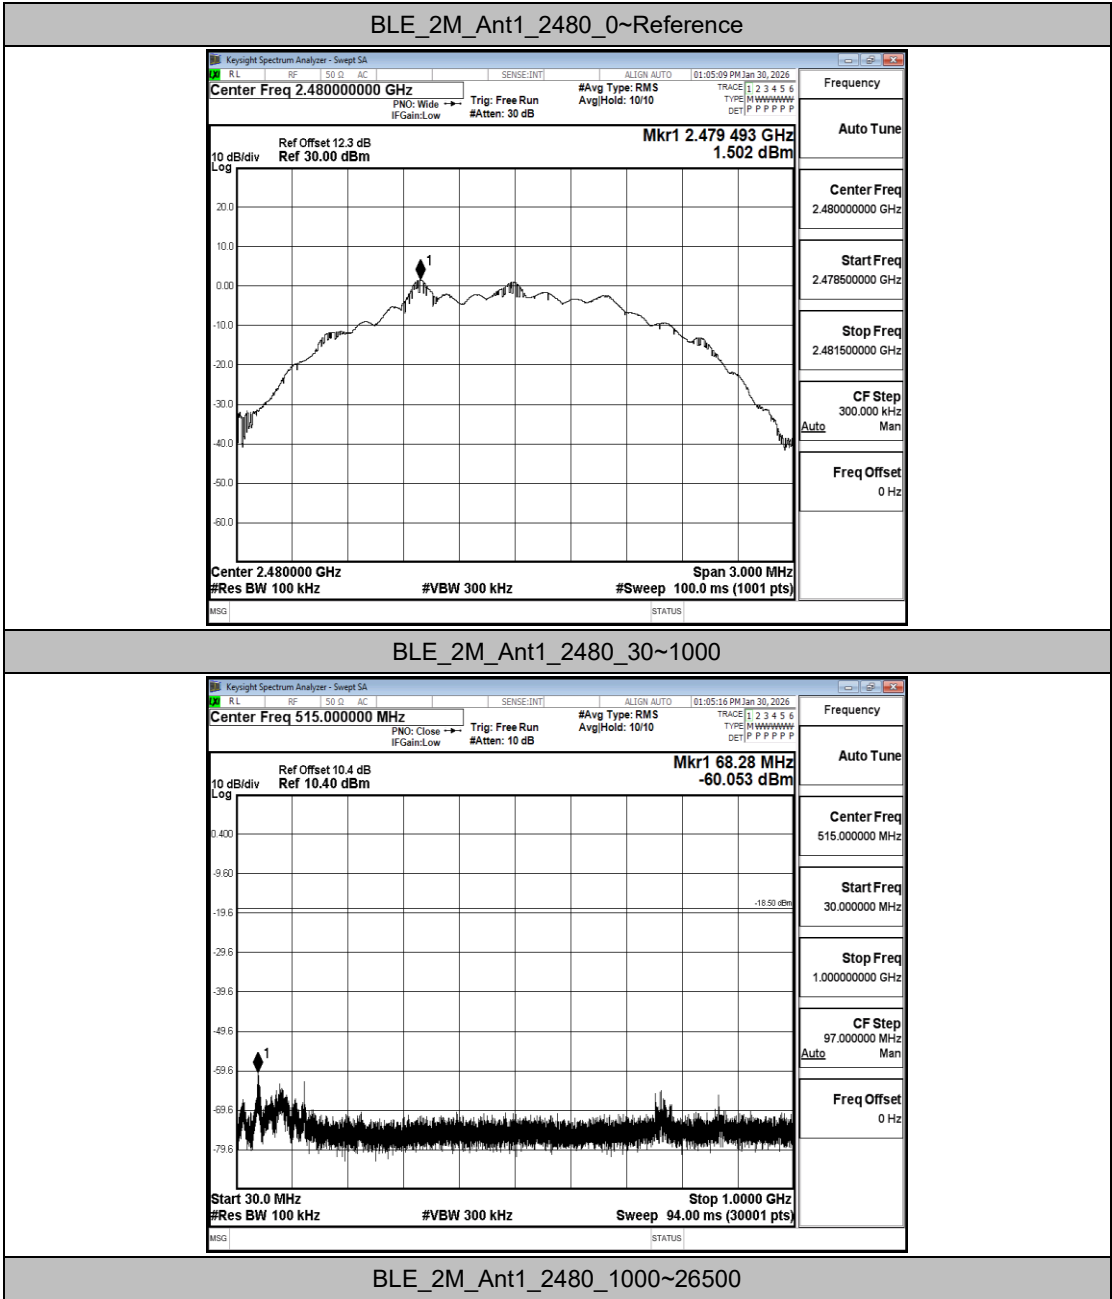

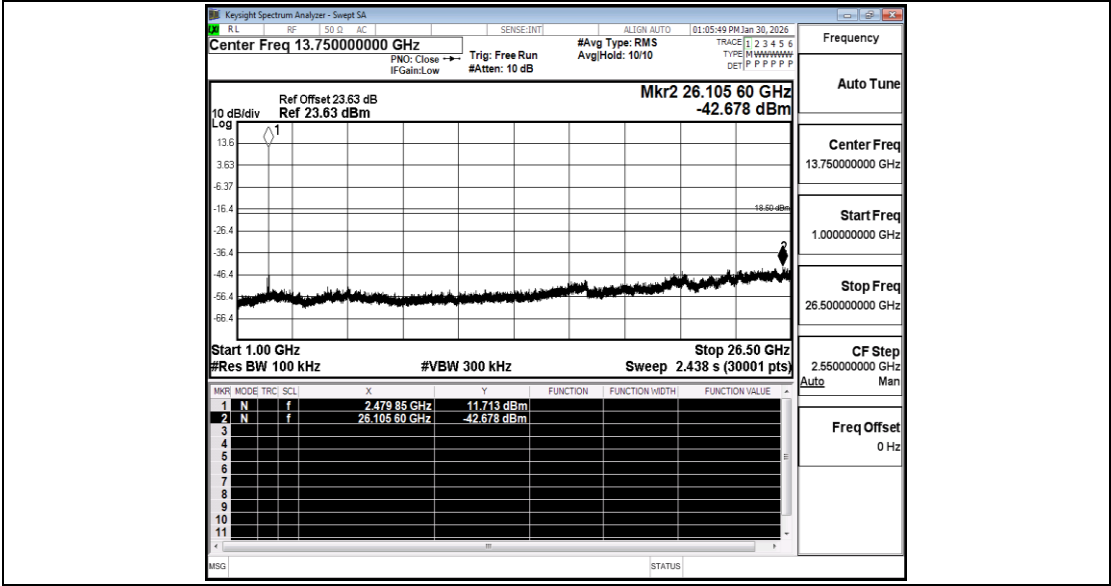



B.6 Duty Cycle


Test Result

TestMode	Antenna	Freq (MHz)	ON Time [ms]	Period [ms]	X	DC [%]	xFactor	Limit	Verdict
BLE_1M	Ant1	2402	1.64	1.88	0.8723	87.23	0.59	---	---
		2440	1.64	1.88	0.8723	87.23	0.59	---	---
		2480	1.64	1.88	0.8723	87.23	0.59	---	---
BLE_2M	Ant1	2402	0.82	1.25	0.6560	65.60	1.83	---	---
		2440	0.81	1.24	0.6532	65.32	1.85	---	---
		2480	0.82	1.25	0.6560	65.60	1.83	---	---

Test Graphs

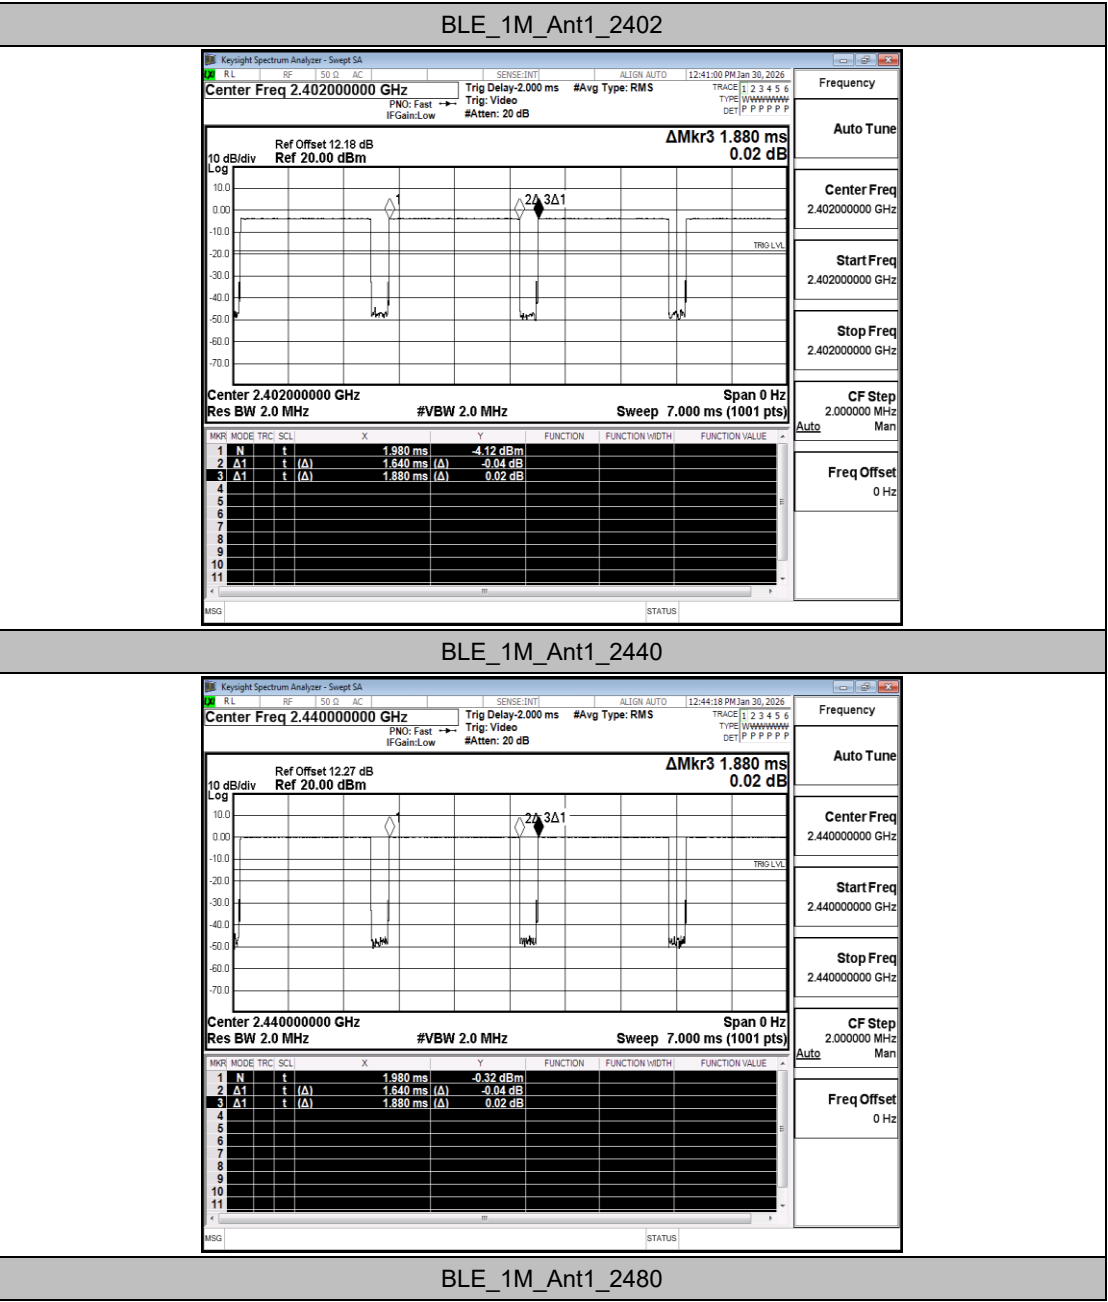

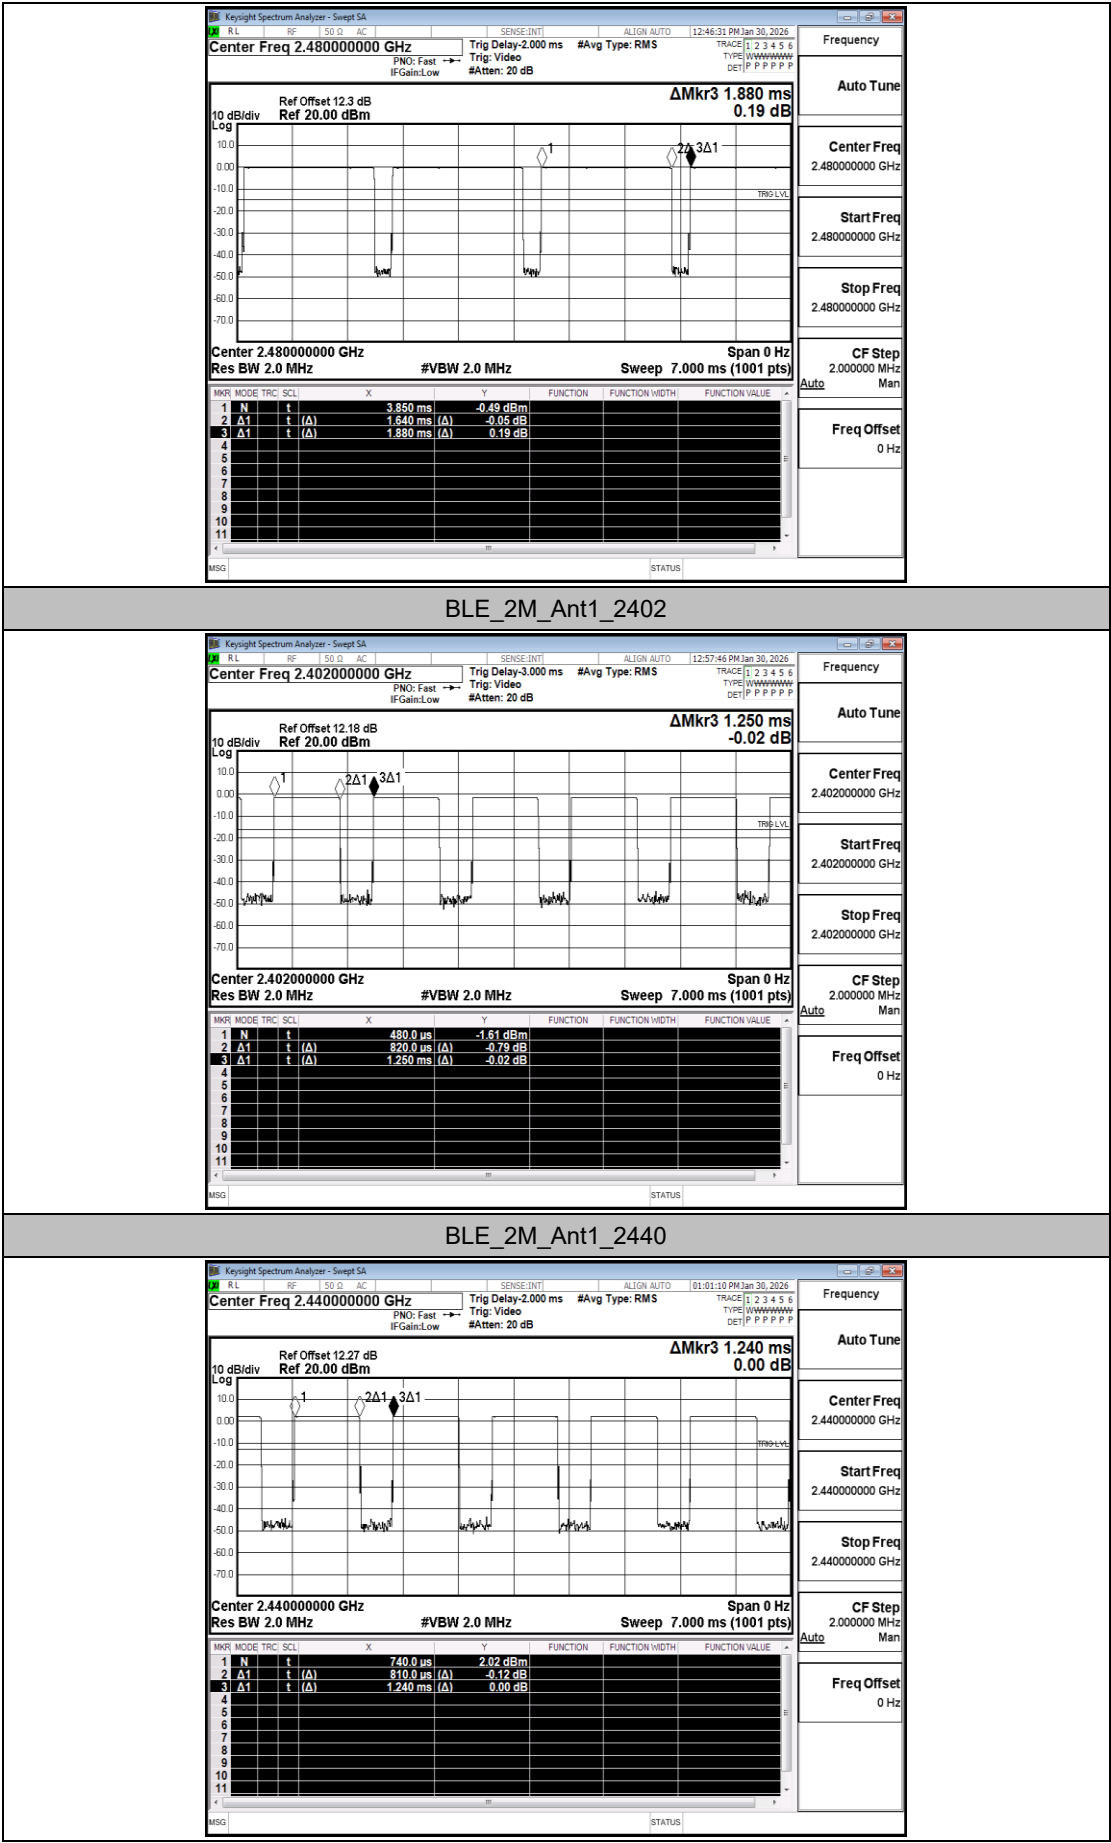

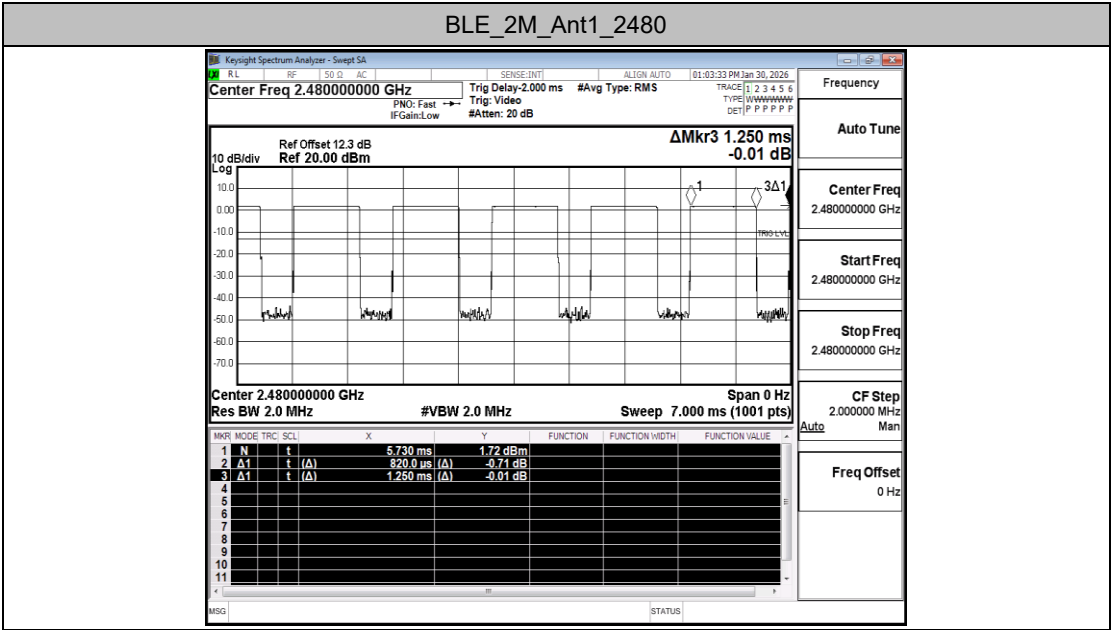

B.7 Emissions in Restricted Bands


Test Result


Test Mode	Antenna	ChName	Freq (MHz)	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Gain [dBi]	DC Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
BLE_1M	Ant1	Low	2402	AV	2310.000	-56.58	≤-43.79	4.29	0.59	43.50	≤54	PASS
				AV	2348.825	-56.21	≤-43.79	4.29	0.59	43.87	≤54	PASS
				AV	2390.000	-56.23	≤-43.79	4.29	0.59	43.85	≤54	PASS
				Peak	2310.000	-49.54	≤-23.20	4.29	0.00	49.95	≤74	PASS
				Peak	2361.530	-45.82	≤-23.20	4.29	0.00	53.67	≤74	PASS
				Peak	2390.000	-48.19	≤-23.20	4.29	0.00	51.30	≤74	PASS
		High	2480	AV	2483.500	-56.18	≤-43.79	4.29	0.59	43.90	≤54	PASS
				AV	2484.720	-55.27	≤-43.79	4.29	0.59	44.81	≤54	PASS
				AV	2500.000	-56.98	≤-43.79	4.29	0.59	43.10	≤54	PASS
				Peak	2483.500	-49.11	≤-23.20	4.29	0.00	50.38	≤74	PASS
				Peak	2483.920	-37.95	≤-23.20	4.29	0.00	61.54	≤74	PASS
				Peak	2500.000	-48.32	≤-23.20	4.29	0.00	51.17	≤74	PASS
BLE_2M	Ant1	Low	2402	AV	2310.000	-57.39	≤-45.03	4.29	1.83	43.93	≤54	PASS
				AV	2379.380	-56.02	≤-45.03	4.29	1.83	45.30	≤54	PASS
				AV	2390.000	-57.45	≤-45.03	4.29	1.83	43.87	≤54	PASS
				Peak	2310.000	-49.53	≤-23.20	4.29	0.00	49.96	≤74	PASS
				Peak	2369.825	-45.76	≤-23.20	4.29	0.00	53.73	≤74	PASS
				Peak	2390.000	-48.26	≤-23.20	4.29	0.00	51.23	≤74	PASS
		High	2480	AV	2483.500	-59.58	≤-45.03	4.29	1.83	41.74	≤54	PASS
				AV	2483.920	-56.46	≤-45.03	4.29	1.83	44.86	≤54	PASS
				AV	2500.000	-61.02	≤-45.03	4.29	1.83	40.30	≤54	PASS
				Peak	2483.500	-51.78	≤-23.20	4.29	0.00	47.71	≤74	PASS
				Peak	2484.000	-35.93	≤-23.20	4.29	0.00	63.56	≤74	PASS
				Peak	2500.000	-52.83	≤-23.20	4.29	0.00	46.66	≤74	PASS

Note:

1. The Antenna Gain is compensated in the graph.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

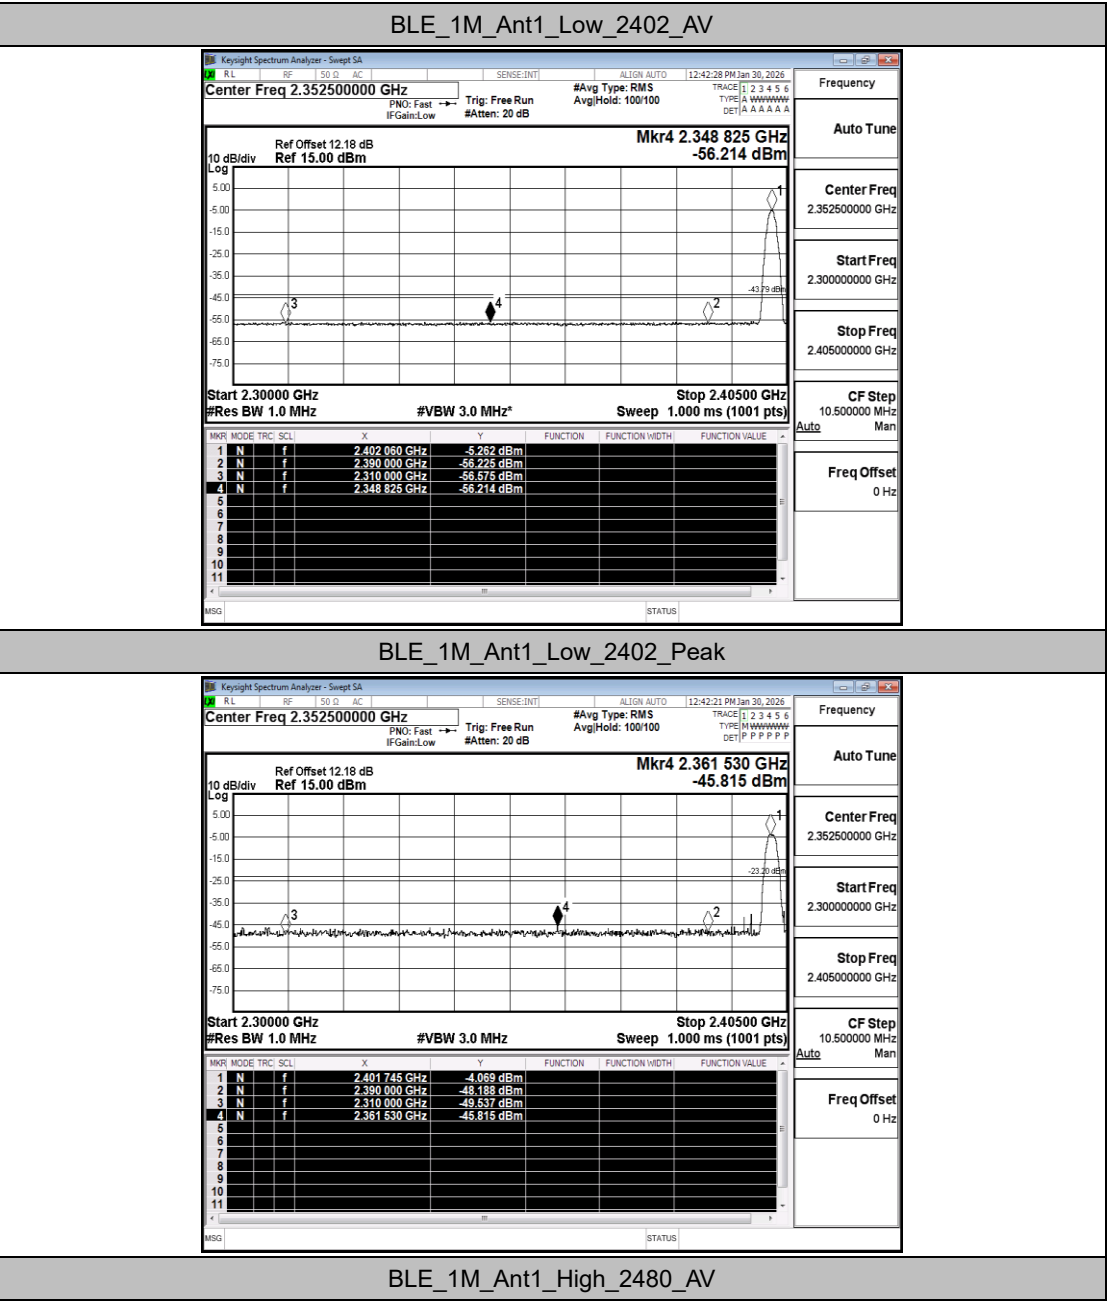

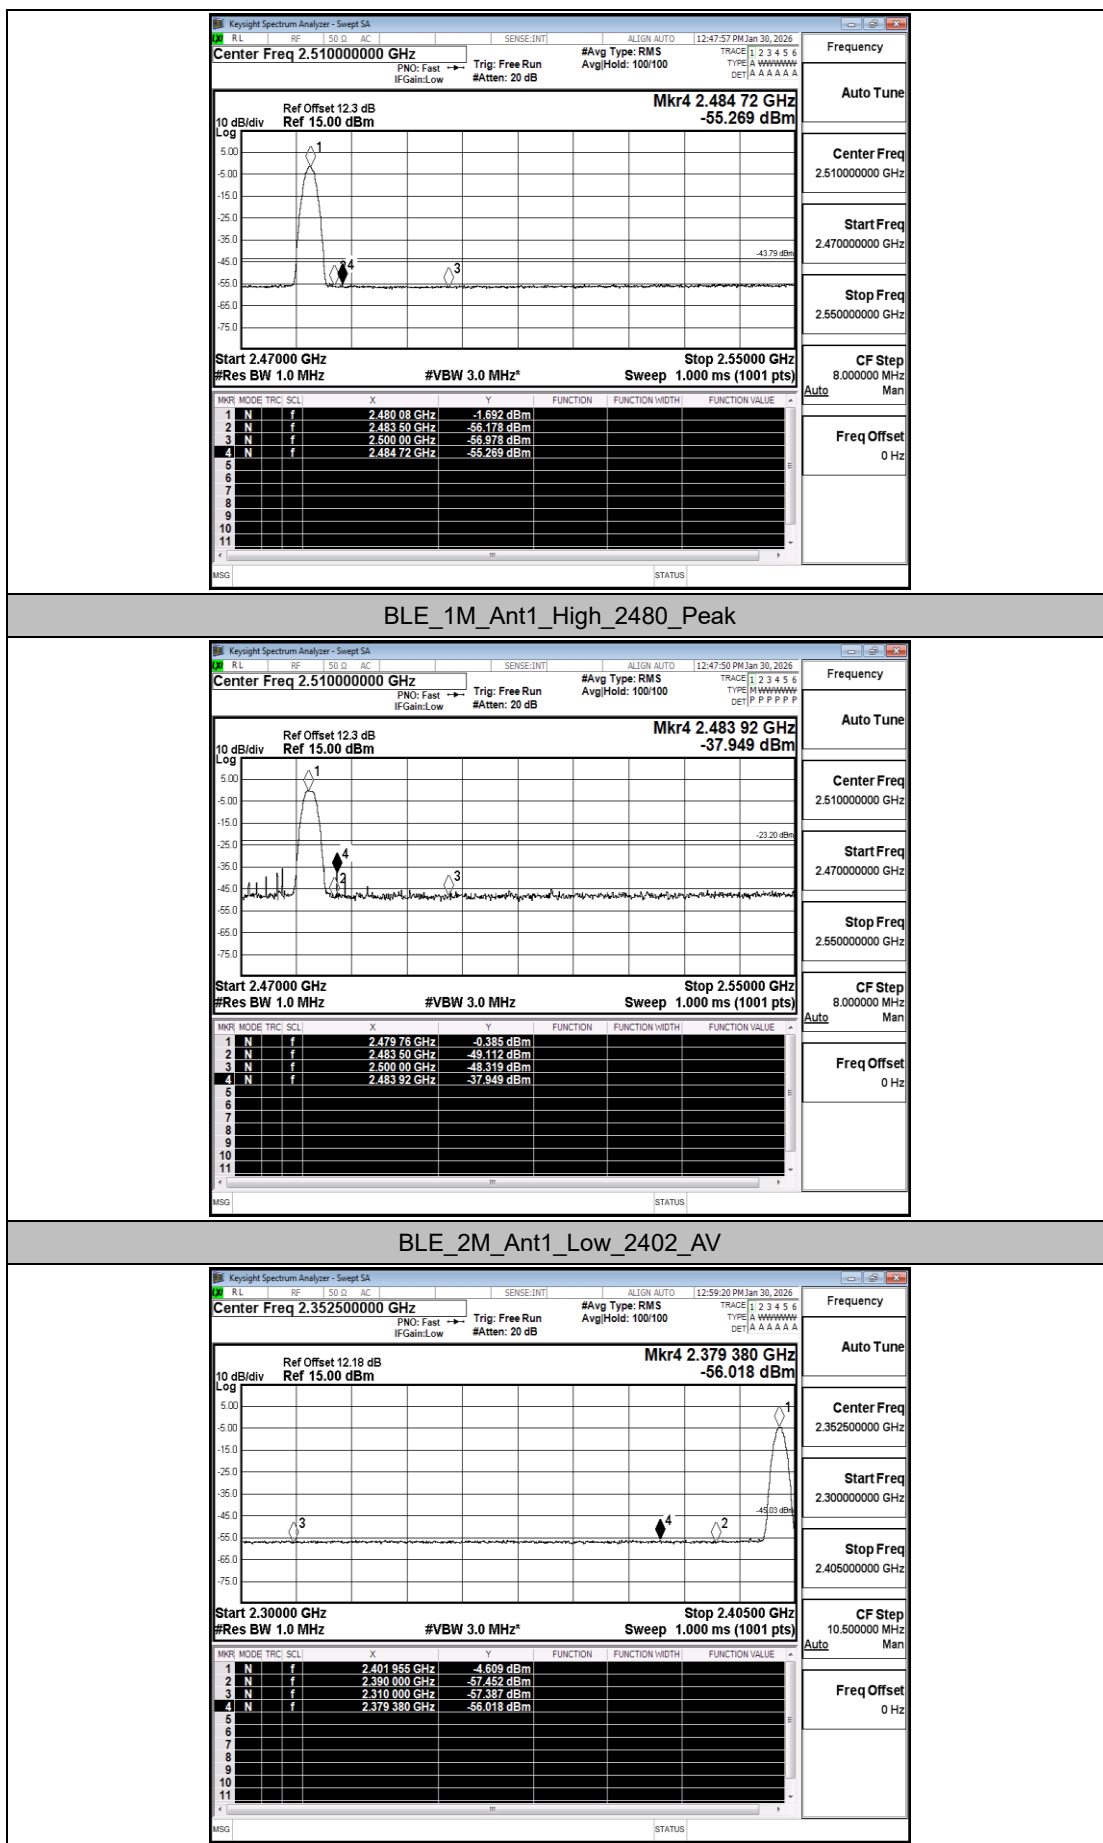

Guangzhou LCS Compliance Testing Laboratory Ltd.

Add: No.44-1, Qianfeng North Road, Shiqi, Panyu District, Guangzhou, Guangdong, China

Tel: +(86) 020-39166689 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

