



Appendix B

Detailed Test Results

1. GSM
GSM850 for Head& Body
GSM1900 for Head& Body
2. WCDMA
WCDMA Band V for Head& Body
3. LTE
LTE Band 2 for Head& Body
LTE Band 5 for Head& Body
LTE Band 12 for Head& Body
LTE Band 13 for Head& Body
LTE Band 66 for Head& Body
4. WIFI&BT
WIFI 2.4GHz for Head& Body
WIFI 5.2GHz for Head& Body
WIFI 5.3GHz for Head& Body
WIFI 5.5GHz for Head& Body
WIFI 5.8GHz for Head& Body



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date:2026/1/11

Test Laboratory: LCS-SAR Lab
GSM 850 190CH Left Cheek

DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz;Duty Cycle: 1: 1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 40.933$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.467 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.635 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.538 W/kg

SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.439 W/kg

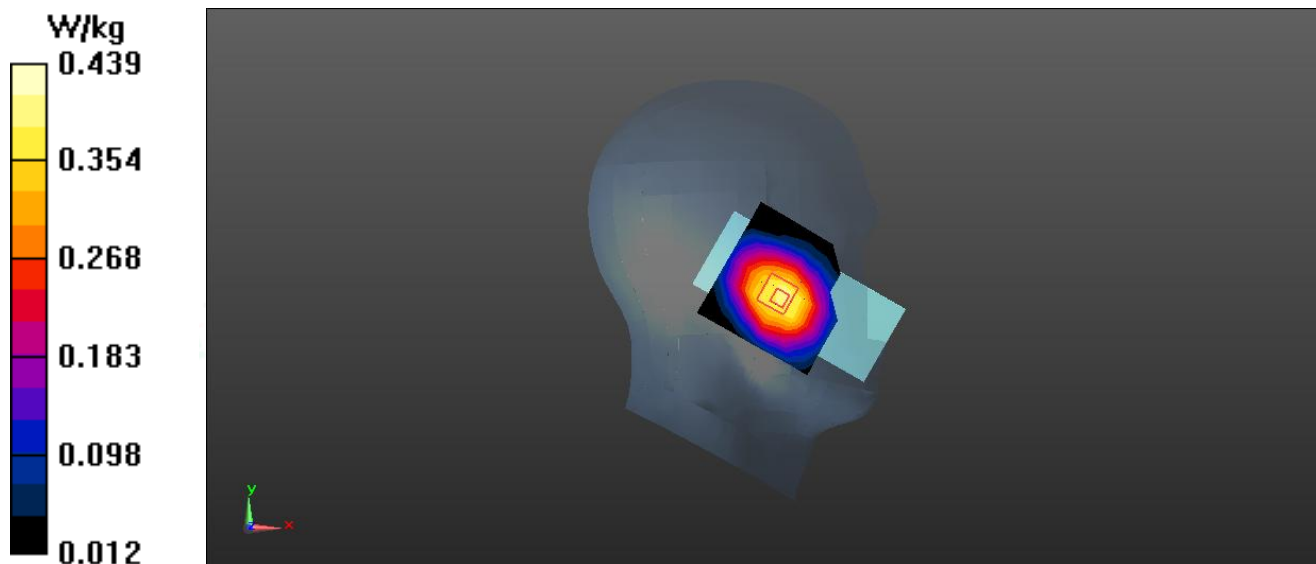

Date: 2026/1/11

Test Laboratory: LCS-SAR Lab
GSM 850 GPRS 3TX 251CH Rear side 10mm

DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1

Communication System: UID 0, GSM (0); Frequency: 848.8 MHz; Duty Cycle: 1: 2.77
Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.902 \text{ S/m}$; $\epsilon_r = 40.975$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.865 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.39 V/m ; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.574 W/kg ; SAR(10 g) = 0.246 W/kg

Maximum value of SAR (measured) = 0.844 W/kg

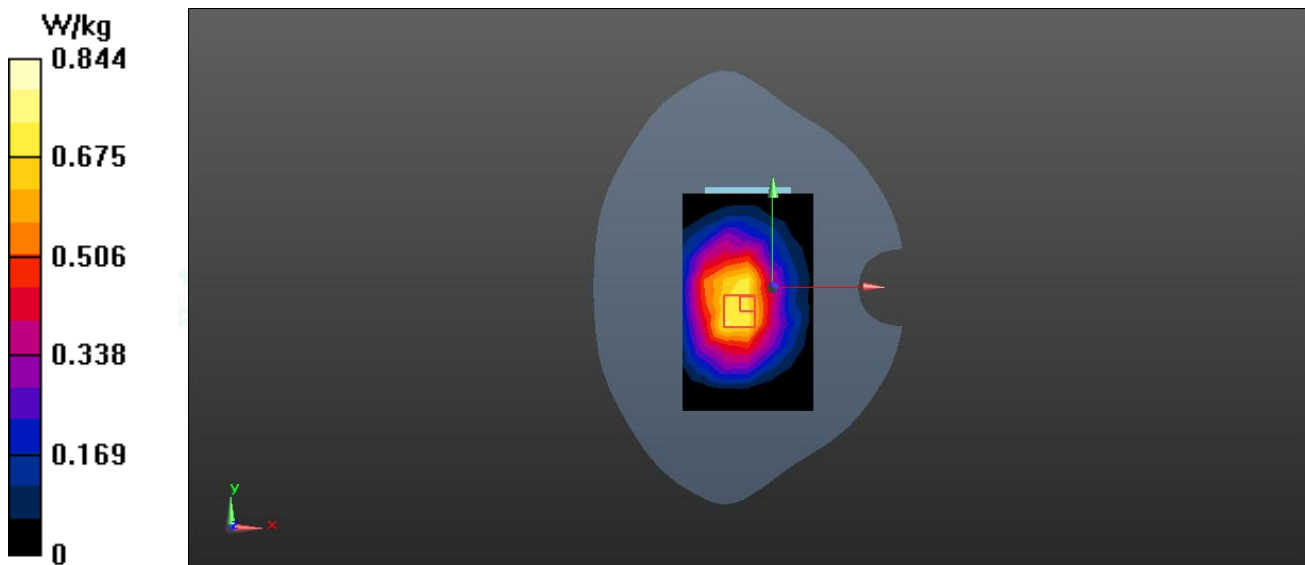

Date: 2026/1/13

Test Laboratory: LCS-SAR Lab
GSM 1900 810CH Left Cheek

DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1

Communication System: UID 0, GSM (0); Frequency: 1909.8 MHz; Duty Cycle: 1: 1
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.376$ S/m; $\epsilon_r = 39.467$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.376 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.569 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.426 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.349 W/kg

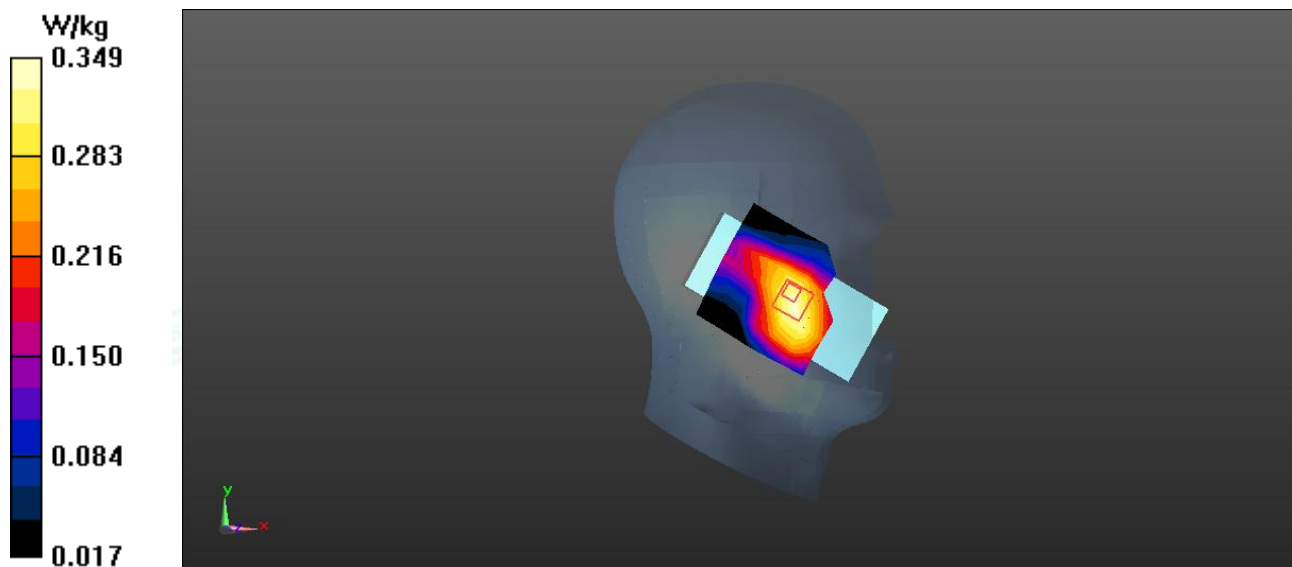

Date: 2026/1/13

Test Laboratory: LCS-SAR Lab

GSM 1900 GPRS 3TX 661CH Rear side 10mm**DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1**

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1: 2.77

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.352 \text{ S/m}$; $\epsilon_r = 39.316$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.851 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.862 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.493 W/kg; SAR(10 g) = 0.258 W/kg

Maximum value of SAR (measured) = 0.832 W/kg

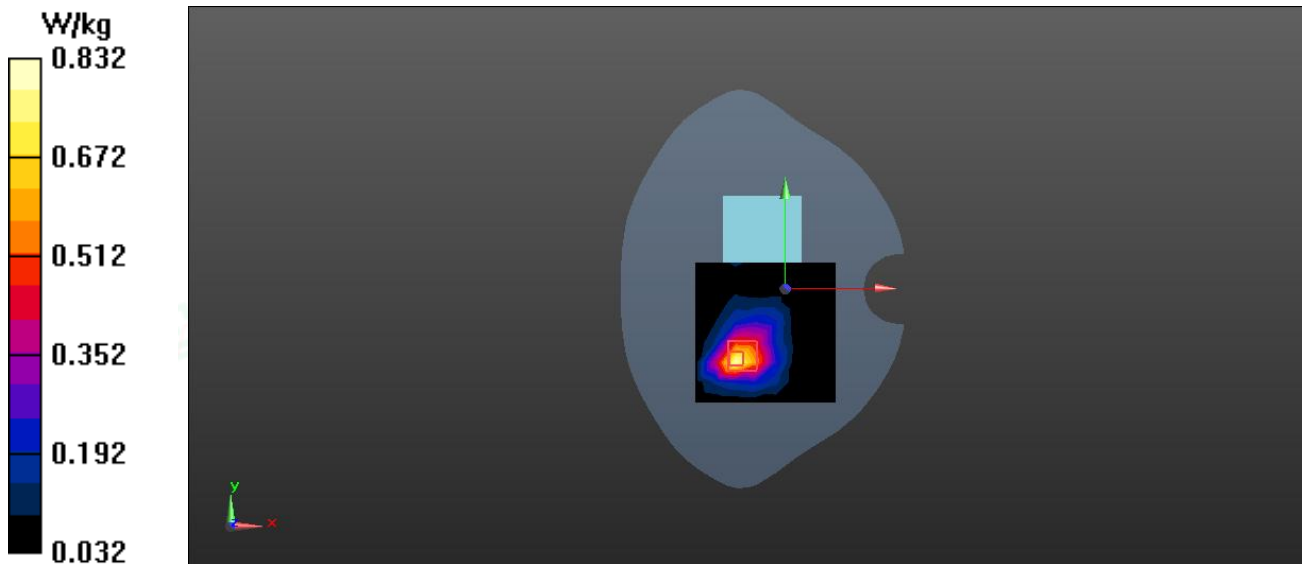

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2026/1/11

Test Laboratory: LCS-SAR Lab

WCDMA V RMC 4132CH Left Cheek**DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1**

Communication System: UID 0, WCDMA (0); Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 40.889$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.501 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.286 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.685 W/kg

SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.525 W/kg

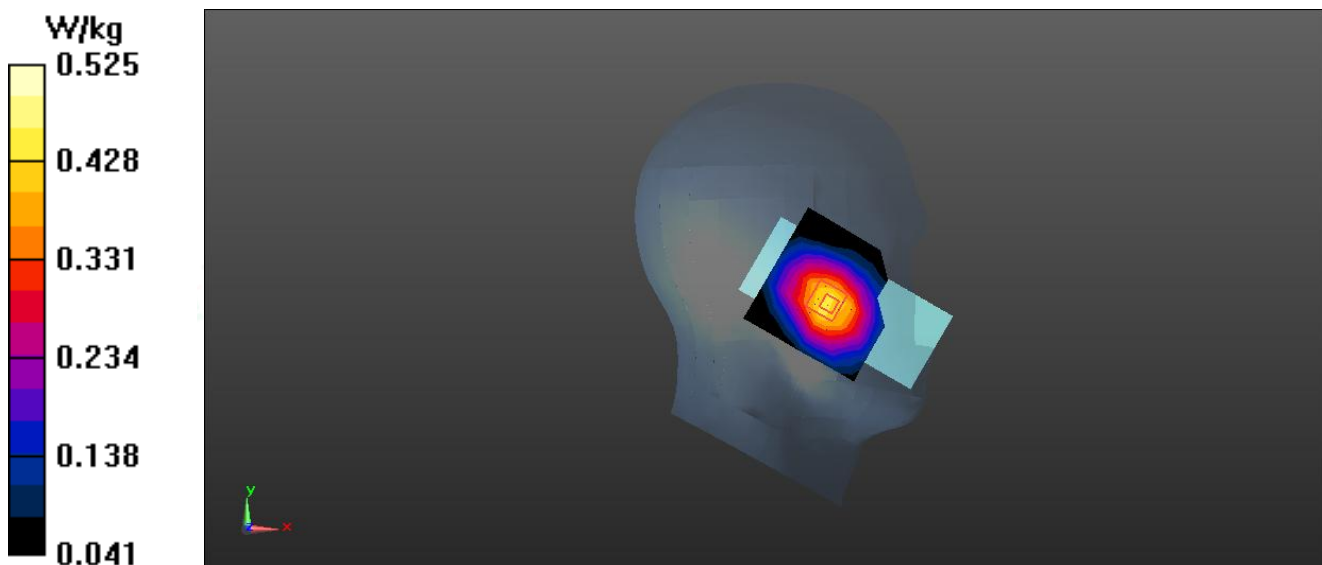

Date: 2026/1/11

Test Laboratory: LCS-SAR Lab

WCDMA V RMC 4132CH Rear side 10mm**DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1**

Communication System: UID 0, WCDMA (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 826.4 \text{ MHz}$; $\sigma = 0.886 \text{ S/m}$; $\epsilon_r = 40.889$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.946 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.29 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.614 W/kg; SAR(10 g) = 0.317 W/kg

Maximum value of SAR (measured) = 0.989 W/kg

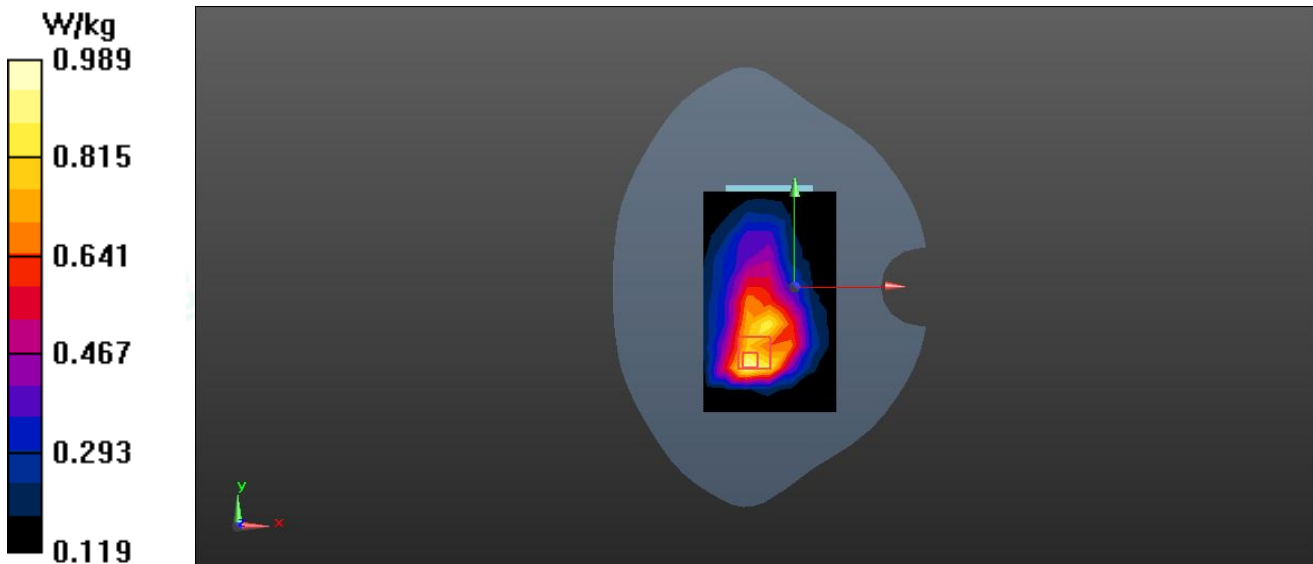

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2026/1/13

Test Laboratory: LCS-SAR Lab

LTE B2 20M QPSK 19100CH 1RB49 Left Cheek

DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 39.365$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.366 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.564 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.573 W/kg

SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.332 W/kg

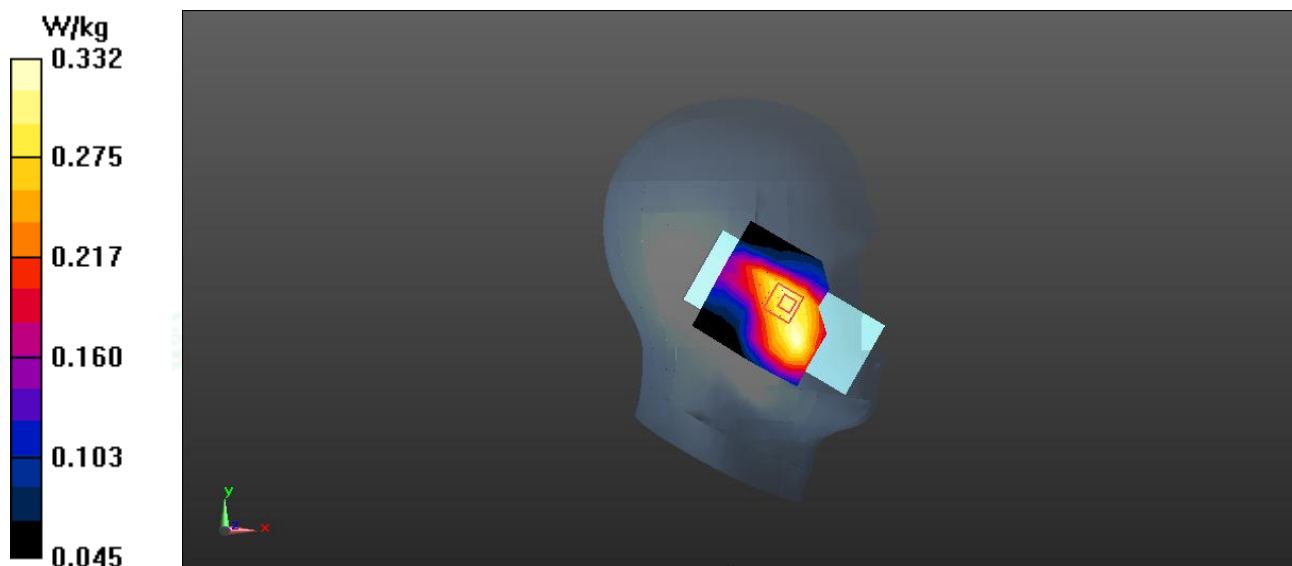

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2029/1/13

Test Laboratory: LCS-SAR Lab

LTE B2 20M QPSK 19100CH 1RB49 Rear side 10mm

DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 39.365$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.80, 7.80, 7.80); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.857 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.39 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.483 W/kg; SAR(10 g) = 0.257 W/kg

Maximum value of SAR (measured) = 0.811 W/kg

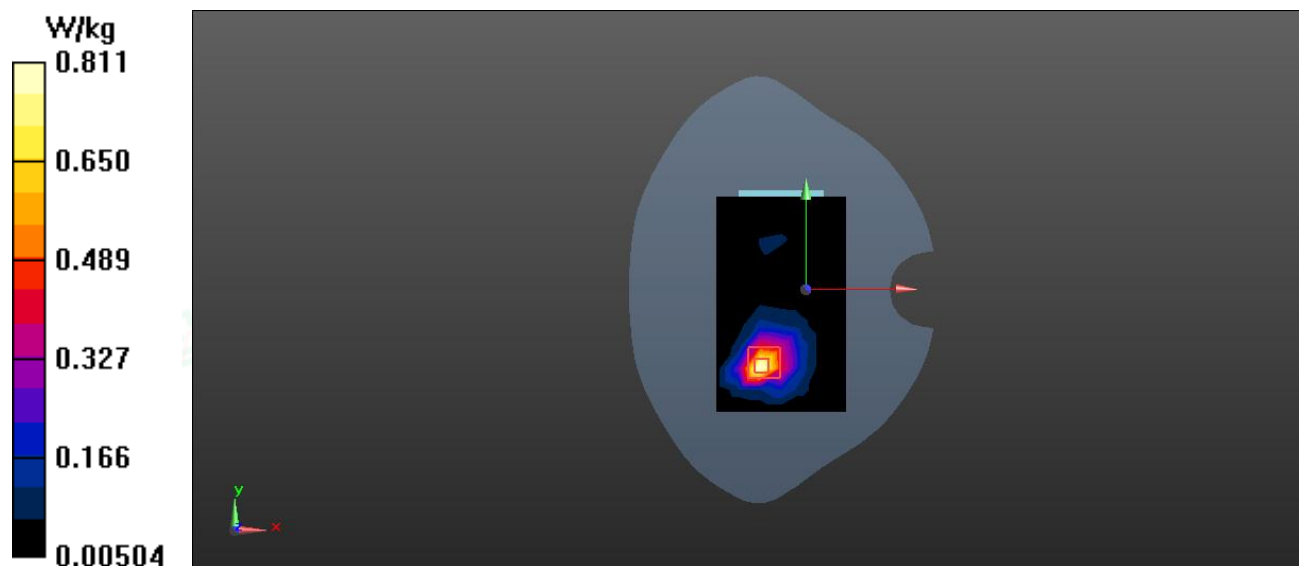

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2026/1/11

Test Laboratory: LCS-SAR Lab

LTE B5 10M QPSK 20525CH 1RB24 Left Cheek**DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1**

Communication System: UID 0, LTE-TDD (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 40.933$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.624 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.536 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.733 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.156 W/kg

Maximum value of SAR (measured) = 0.589 W/kg

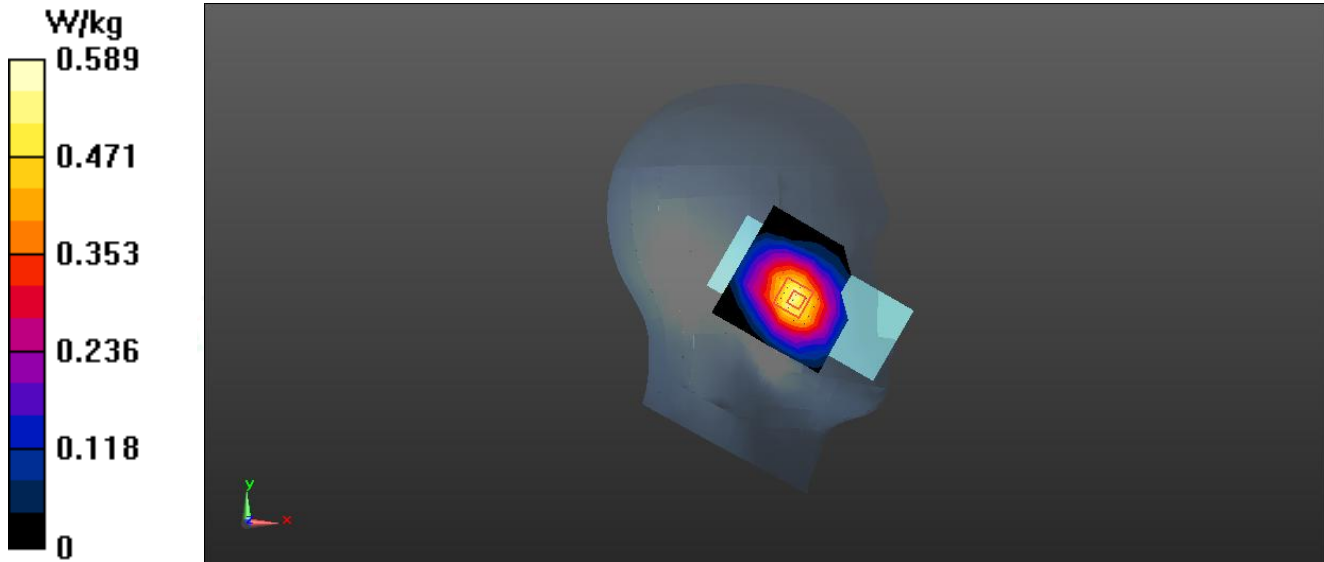

Date: 2026/1/11

Test Laboratory: LCS-SAR Lab

LTE B5 10M QPSK 20525CH 1RB24 Rear side 10mm**DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1**

Communication System: UID 0, LTE-TDD (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 40.933$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.16 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.36 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.633 W/kg; SAR(10 g) = 0.328 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

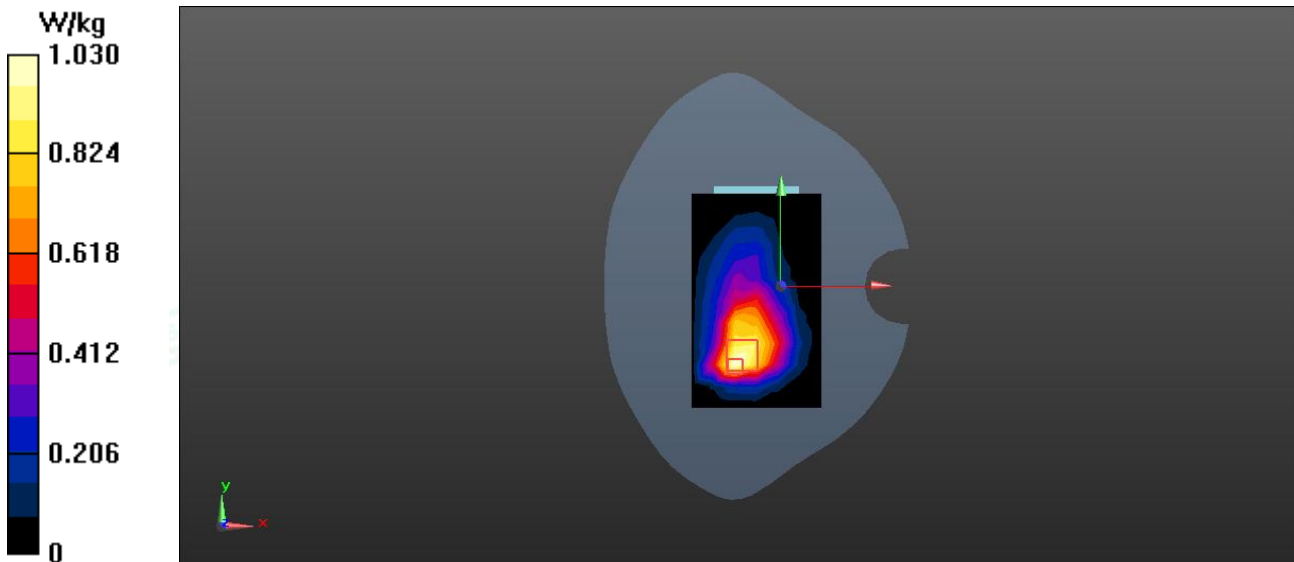

Date: 2026/1/10

Test Laboratory: LCS-SAR Lab

LTE B12 10M QPSK 23095CH 1RB24 Left Cheek

DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1


Communication System: UID 0, LTE-FDD (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5 \text{ MHz}$; $\sigma = 0.869 \text{ S/m}$; $\epsilon_r = 40.684$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

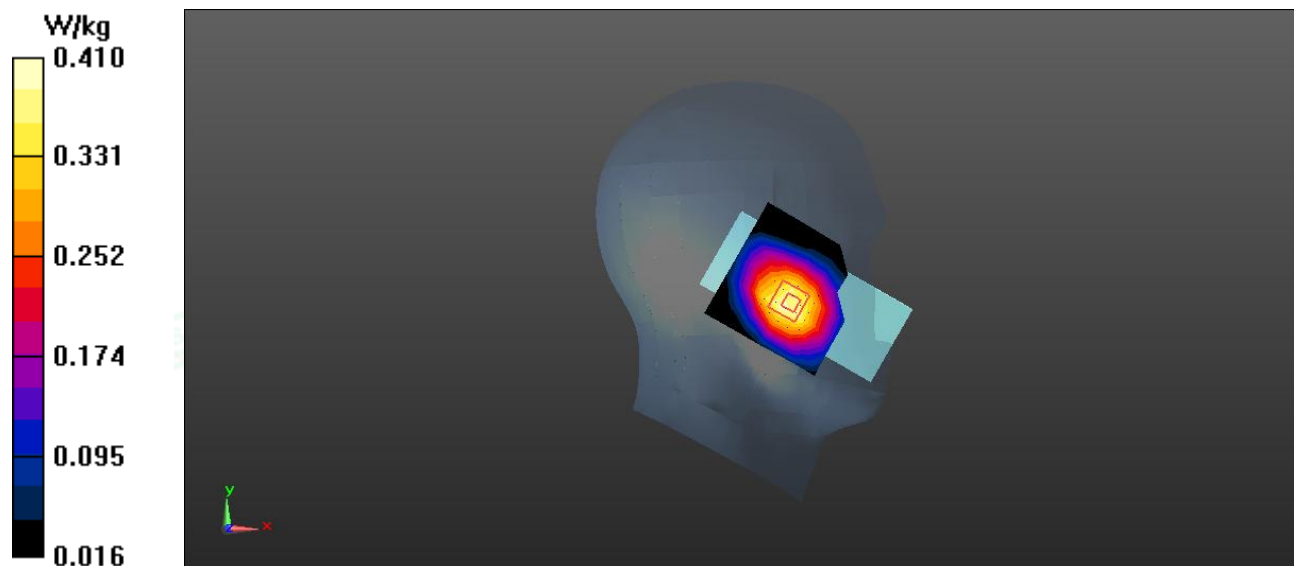Configuration/Head /Area Scan (7x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.435 W/kg **Configuration/Head /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 6.294 V/m ; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.604 W/kg **SAR(1 g) = 0.282 W/kg ; SAR(10 g) = 0.147 W/kg** Maximum value of SAR (measured) = 0.410 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2026/1/10

Test Laboratory: LCS-SAR Lab

LTE B12 10M QPSK 23095CH 1RB24 Rear side 10mm**DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 40.684$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.936 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.53 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.599 W/kg; SAR(10 g) = 0.312 W/kg

Maximum value of SAR (measured) = 0.978 W/kg

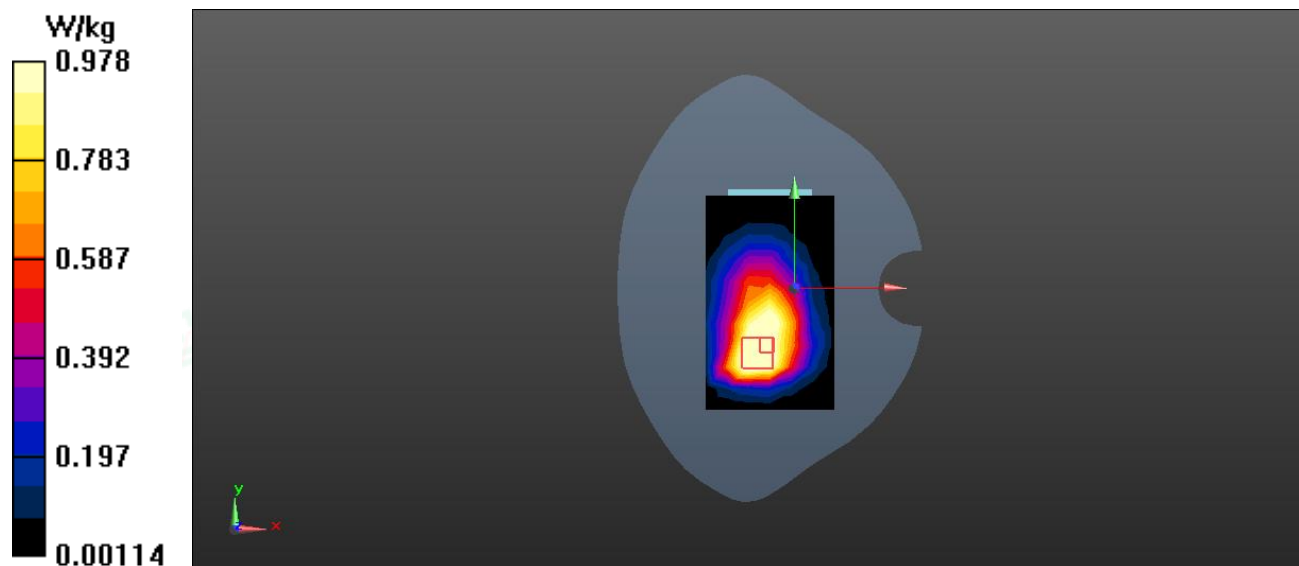

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2026/1/10

Test Laboratory: LCS-SAR Lab

LTE B13 10M QPSK 23230CH 1RB24 Left Cheek

DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1


Communication System: UID 0, LTE-FDD (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.899 \text{ S/m}$; $\epsilon_r = 40.914$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

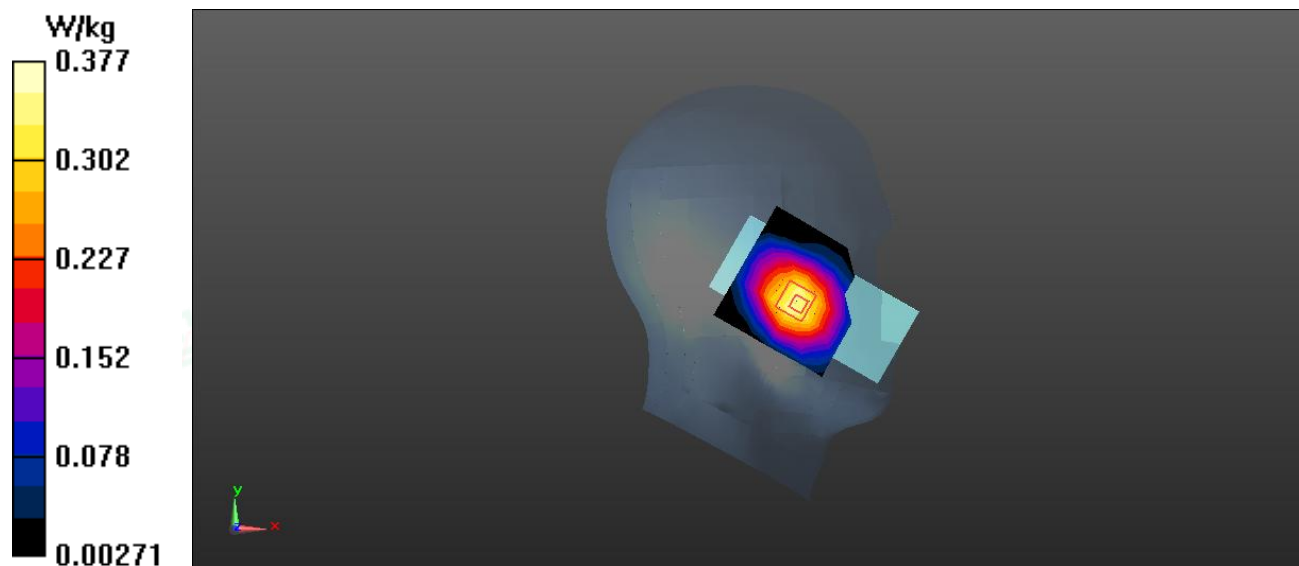Configuration/Head /Area Scan (7x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.394 W/kg **Configuration/Head /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.857 V/m ; Power Drift = 0.14 dB Peak SAR (extrapolated) = 0.508 W/kg **SAR(1 g) = 0.225 W/kg ; SAR(10 g) = 0.133 W/kg** Maximum value of SAR (measured) = 0.377 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2026/1/10

Test Laboratory: LCS-SAR Lab

LTE B13 10M QPSK 23230CH 1RB24 Rear side 10mm**DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1**


Communication System: UID 0, LTE-FDD (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.899 \text{ S/m}$; $\epsilon_r = 40.914$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

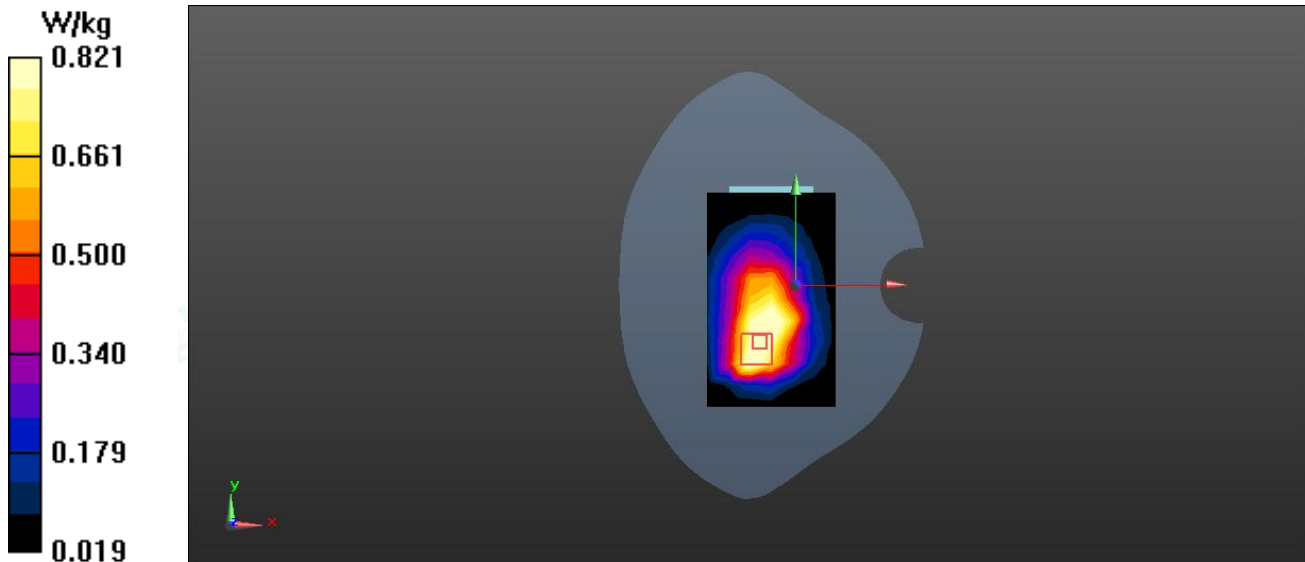Configuration/ Body /Area Scan (8x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.849 W/kg **Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 10.88 V/m ; Power Drift = -0.02 dB Peak SAR (extrapolated) = 1.08 W/kg **SAR(1 g) = 0.493 W/kg ; SAR(10 g) = 0.269 W/kg** Maximum value of SAR (measured) = 0.821 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2026/1/12

Test Laboratory: LCS-SAR Lab

LTE B66 20M QPSK 132322CH 1RB49 Left Cheek**DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.348 \text{ S/m}$; $\epsilon_r = 40.989$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.14, 8.14, 8.14); Calibrated: 2025/2/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.294 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.296 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.269 W/kg

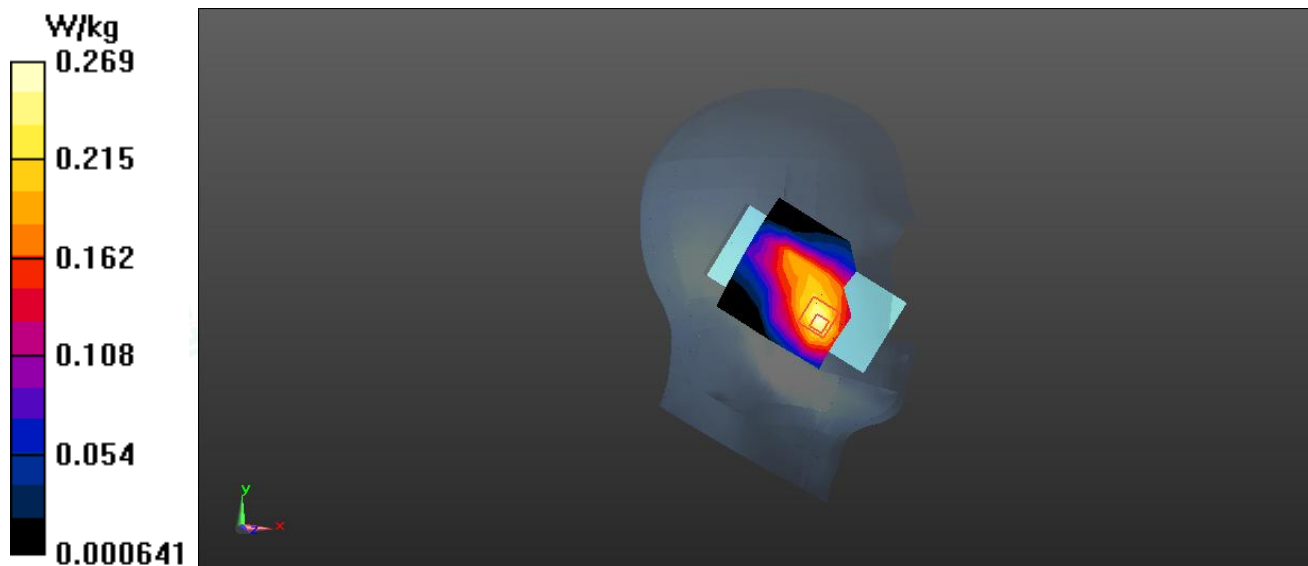

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2026/1/12

Test Laboratory: LCS-SAR Lab

LTE B66 20M QPSK 132322CH 1RB49 Rear Side 10mm

DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.348 \text{ S/m}$; $\epsilon_r = 40.989$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.14, 8.14, 8.14); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.713 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.363 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.946 W/kg

SAR(1 g) = 0.424 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 0.725 W/kg

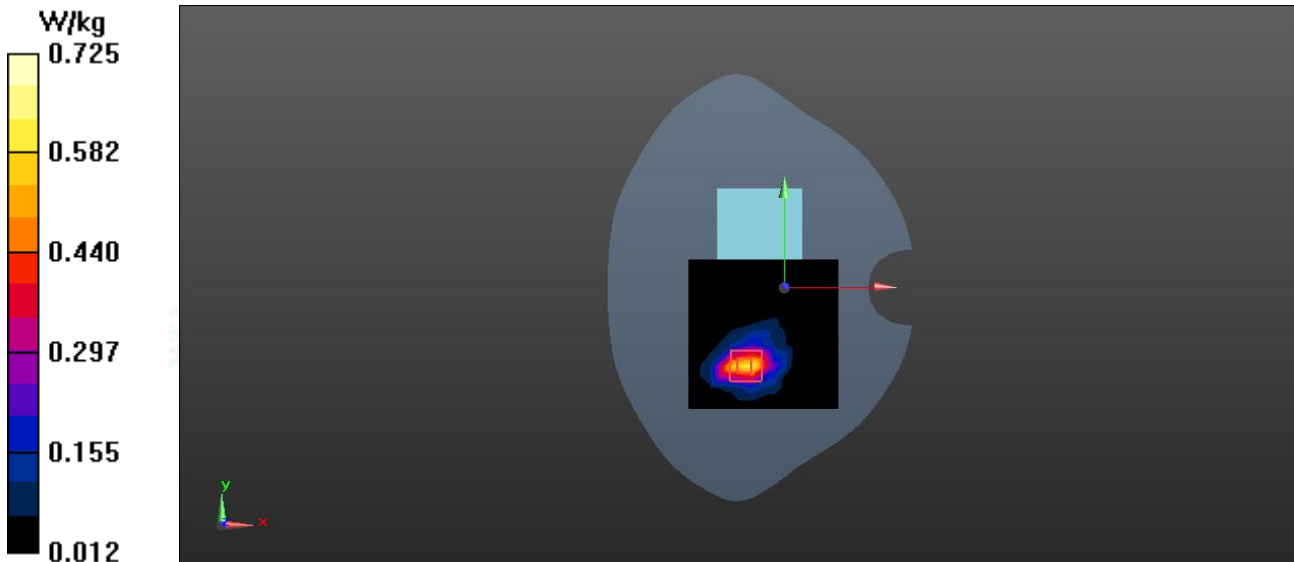

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date:2026/1/14

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 1CH Left Cheek**DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1**


Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.763 \text{ S/m}$; $\epsilon_r = 38.893$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.43, 7.43, 7.43); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

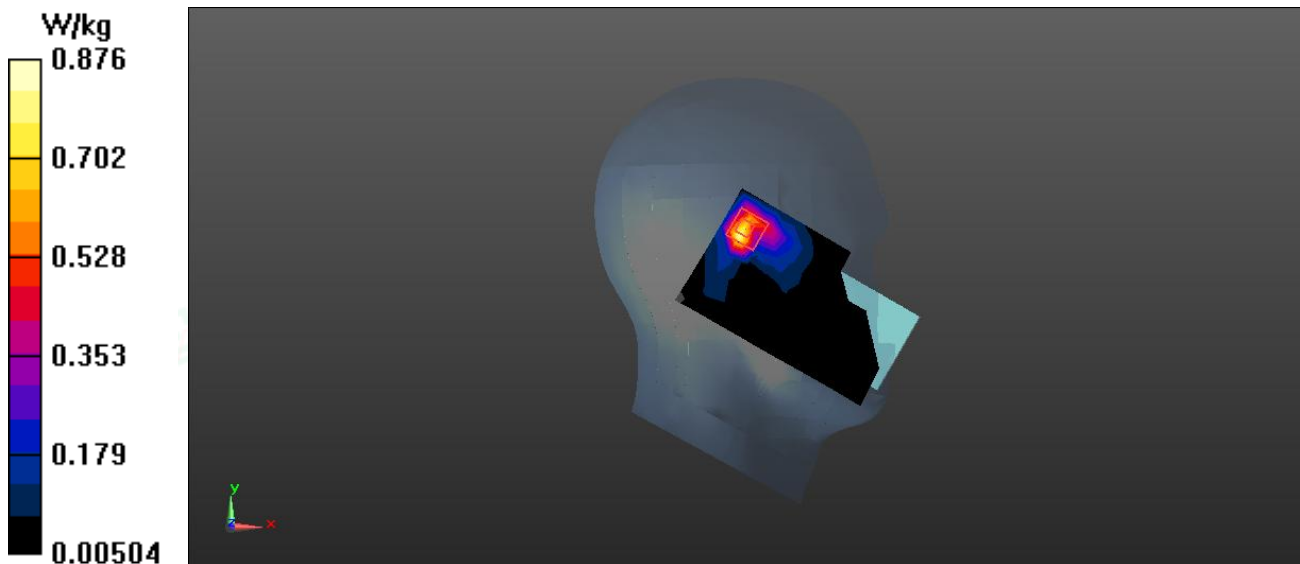Configuration/Head /Area Scan (8x14x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.824 W/kg **Configuration/Head /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 9.486 V/m ; Power Drift = -0.14 dB Peak SAR (extrapolated) = 0.975 W/kg **SAR(1 g) = 0.446 W/kg ; SAR(10 g) = 0.231 W/kg** Maximum value of SAR (measured) = 0.876 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2026/1/14

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 1CH Rear side 10mm**DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1**

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.763 \text{ S/m}$; $\epsilon_r = 38.893$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.43, 7.43, 7.43); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (13x19x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.836 W/kg


Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.55 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.451 W/kg; SAR(10 g) = 0.249 W/kg

Maximum value of SAR (measured) = 0.817 W/kg

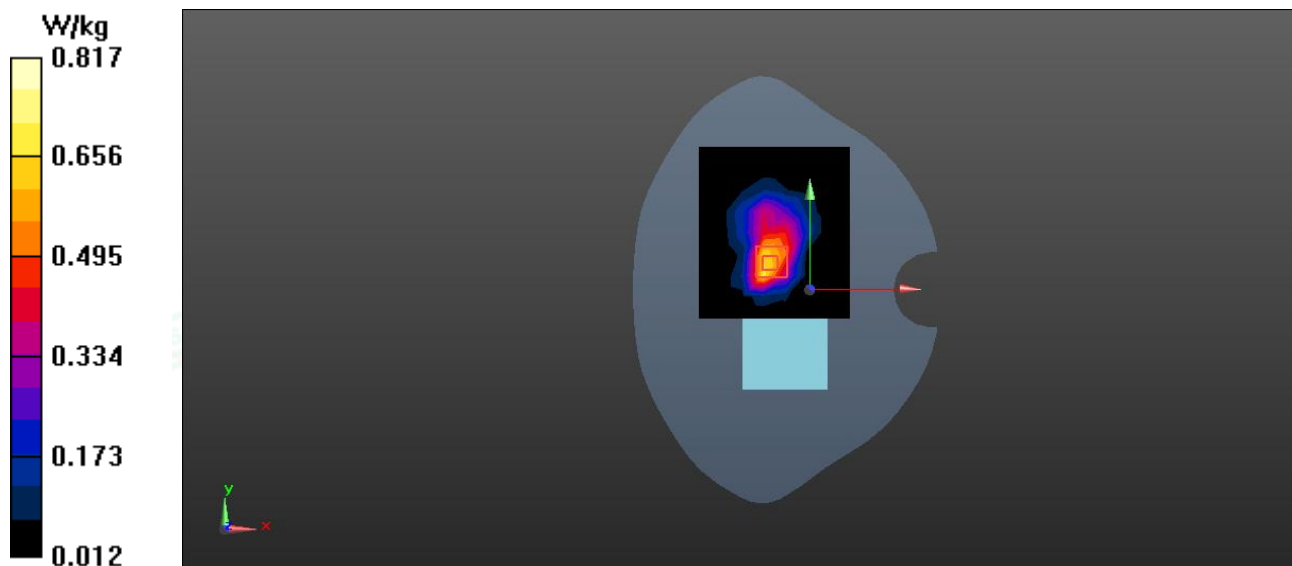

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2026/1/15

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 48CH Left Cheek**DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.608 \text{ S/m}$; $\epsilon_r = 35.912$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x17x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.347 W/kg


Configuration/Head /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.369 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.544 W/kg

SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 0.325 W/kg

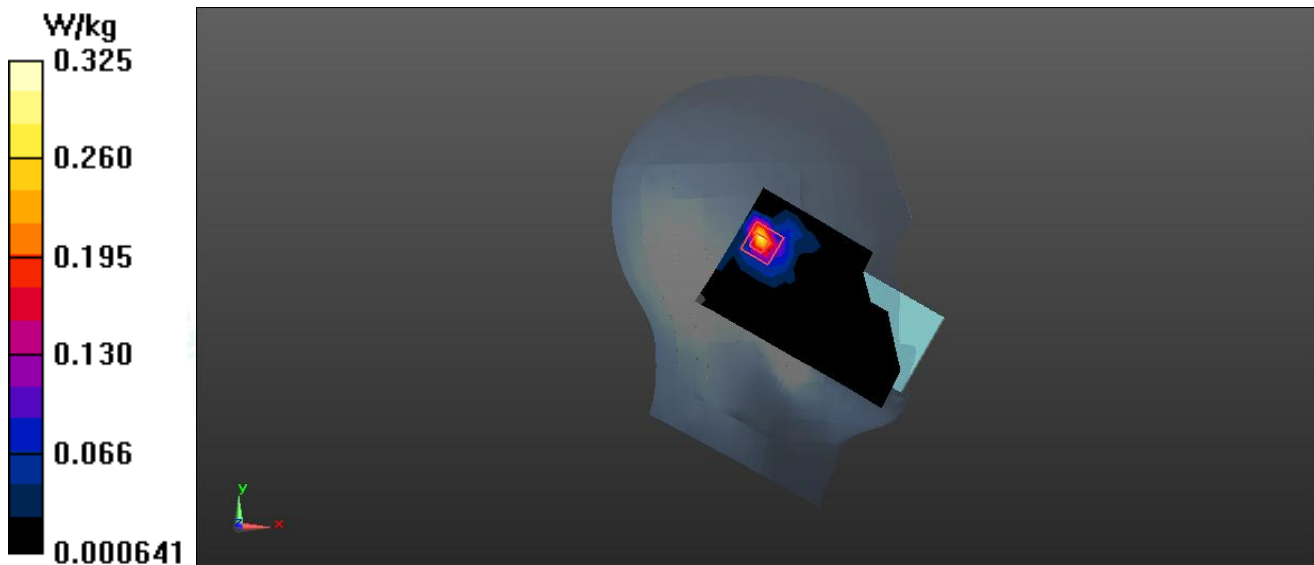

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2026/1/15

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 48CH Rear side 10mm**DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.608 \text{ S/m}$; $\epsilon_r = 35.912$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.517 W/kg


Configuration/ Body /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.753 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.613 W/kg

SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.149 W/kg

Maximum value of SAR (measured) = 0.492 W/kg

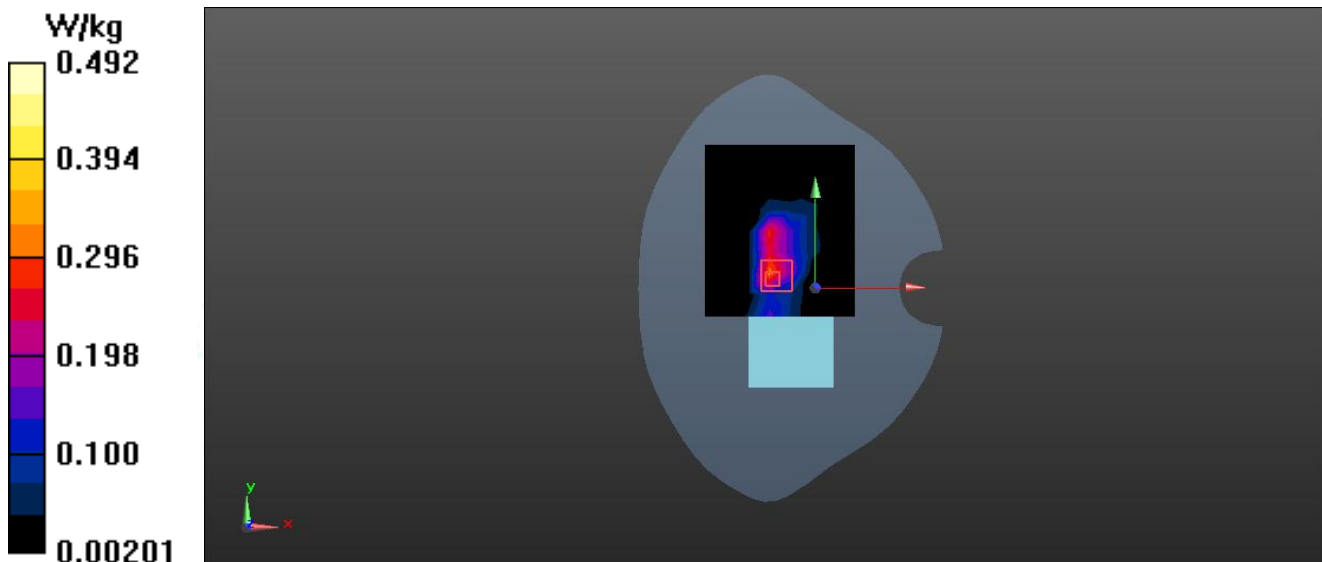

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2026/1/16

Test Laboratory: LCS-SAR Lab

WIFI 5.3G 802.11a 54CH Left Cheek**DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5280 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5280$ MHz; $\sigma = 4.642$ S/m; $\epsilon_r = 35.987$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.372 W/kg


Configuration/Head /Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.489 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.577 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.340 W/kg

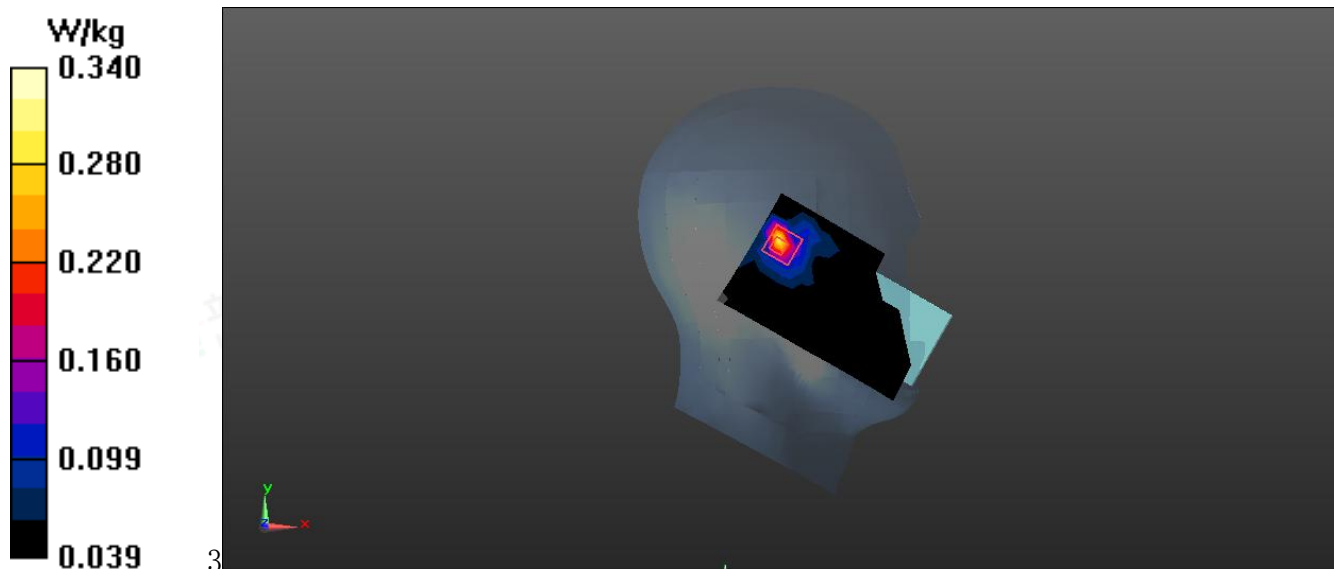

Date: 2026/1/16

Test Laboratory: LCS-SAR Lab

WIFI 5.3G 802.11a 54CH Rear side 10mm**DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5280 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5280 \text{ MHz}$; $\sigma = 4.642 \text{ S/m}$; $\epsilon_r = 35.987$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.321 W/kg


Configuration/ Body /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.225 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.497 W/kg

SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.309 W/kg

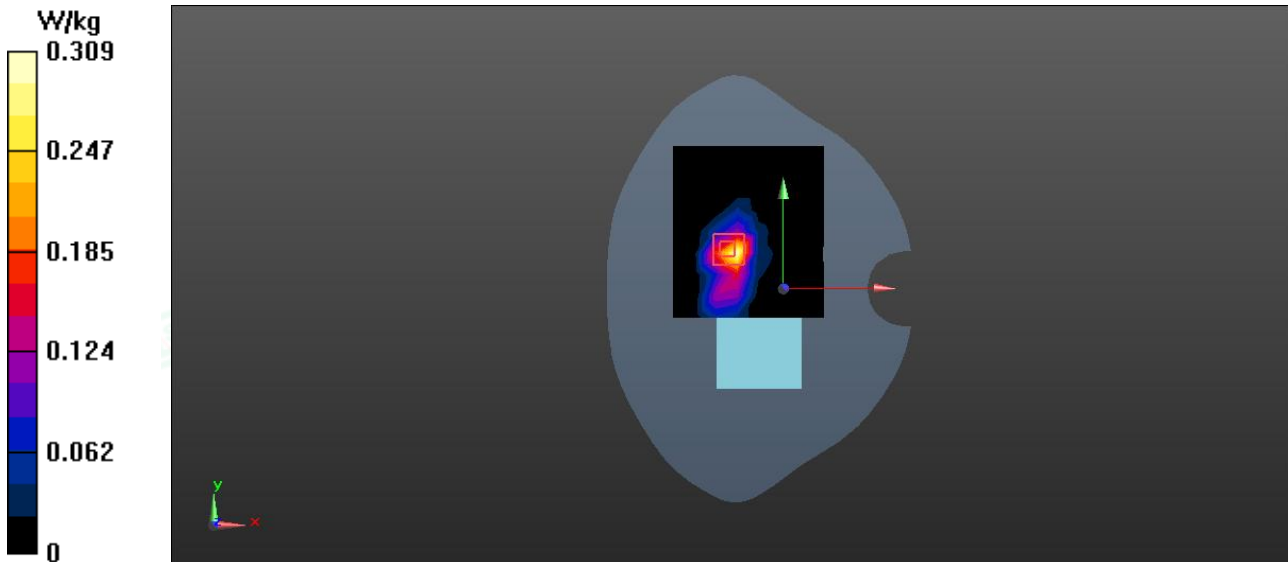

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2026/1/16

Test Laboratory: LCS-SAR Lab

WIFI 5.5G 802.11a 118CH Left Cheek**DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5580 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.157 \text{ S/m}$; $\epsilon_r = 35.463$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.74, 4.74, 4.74); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Head /Area Scan (10x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.296 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.385 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.463 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.269 W/kg

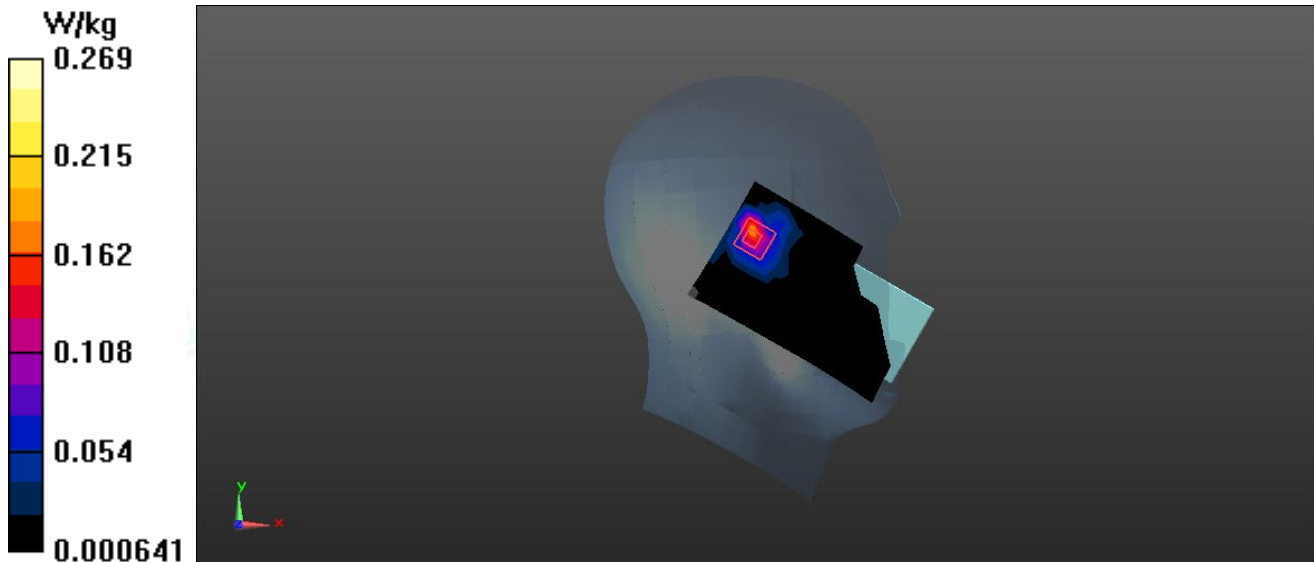

Date: 2026/1/16

Test Laboratory: LCS-SAR Lab

WIFI 5.5G 802.11a 118CH Rear side 10mm**DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5580 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.157 \text{ S/m}$; $\epsilon_r = 35.463$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.74, 4.74, 4.74); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.307 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.419 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.412 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.295 W/kg

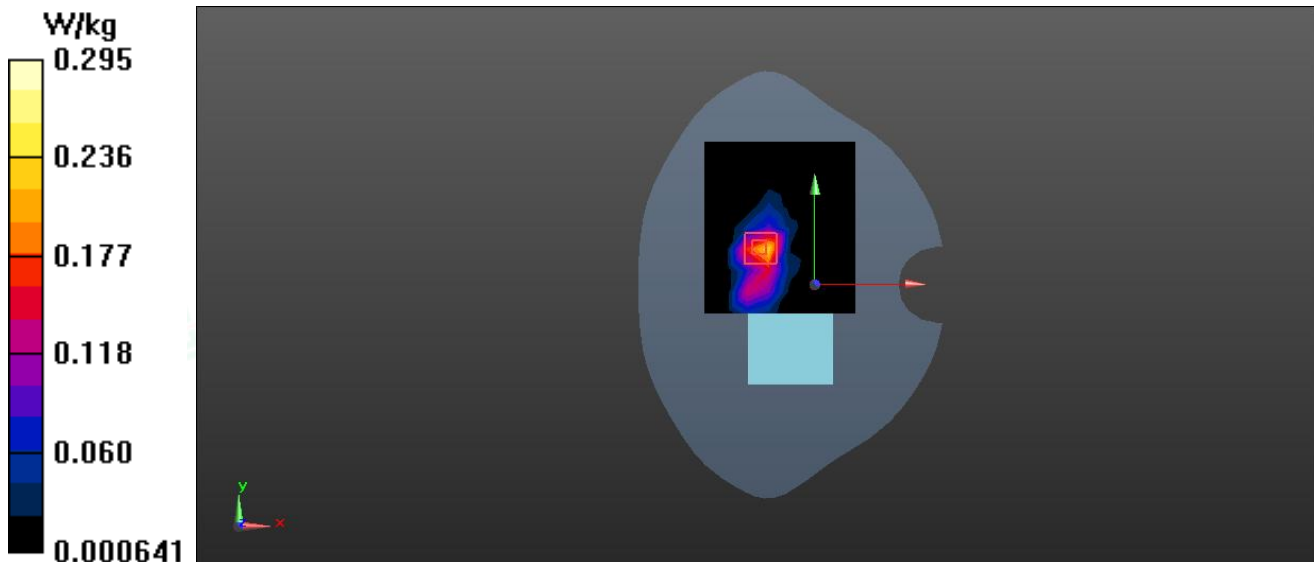

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2026/1/16


Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11n20 165CH Left Cheek**DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5825 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.178 \text{ S/m}$; $\epsilon_r = 34.496$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.86, 4.86, 4.86); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

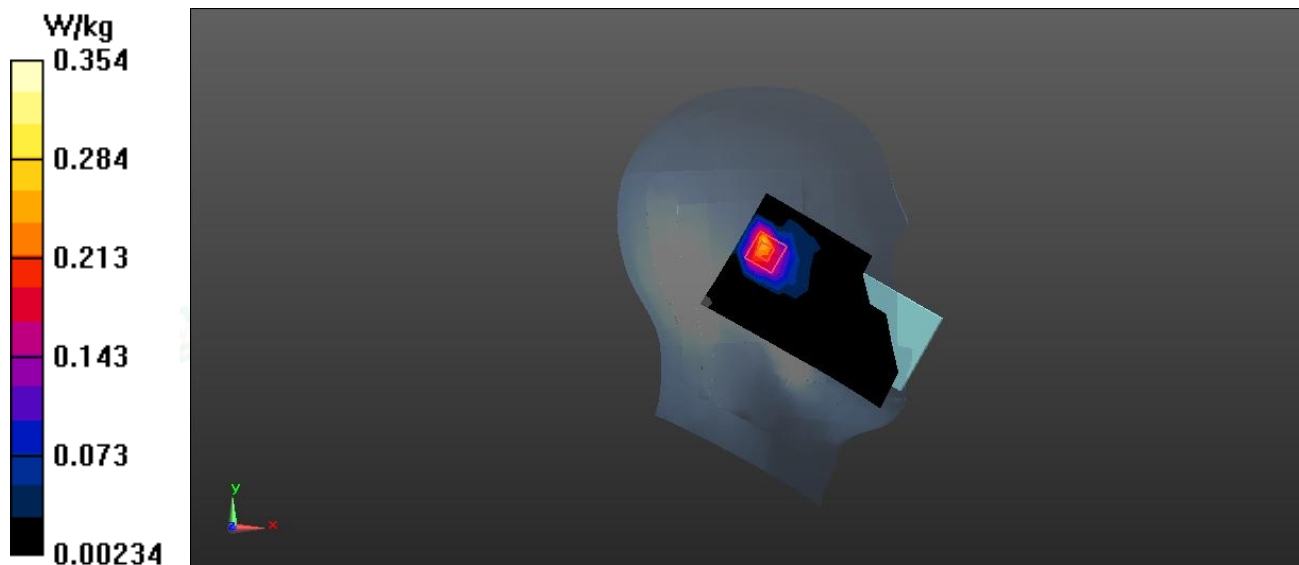Configuration/ Head /Area Scan (10x17x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.378 W/kg **Configuration/Head/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 5.538 V/m ; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.426 W/kg **SAR(1 g) = 0.192 W/kg ; SAR(10 g) = 0.081 W/kg** Maximum value of SAR (measured) = 0.354 W/kg 

Date: 2026/1/16

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11n20 165CH Rear side 10mm**DUT: Smart Feature Phone ; Type: E3 Pro ; Serial: A260107027-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5825 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.178 \text{ S/m}$; $\epsilon_r = 34.496$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.86, 4.86, 4.86); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.267 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.279 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.202 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.283 W/kg

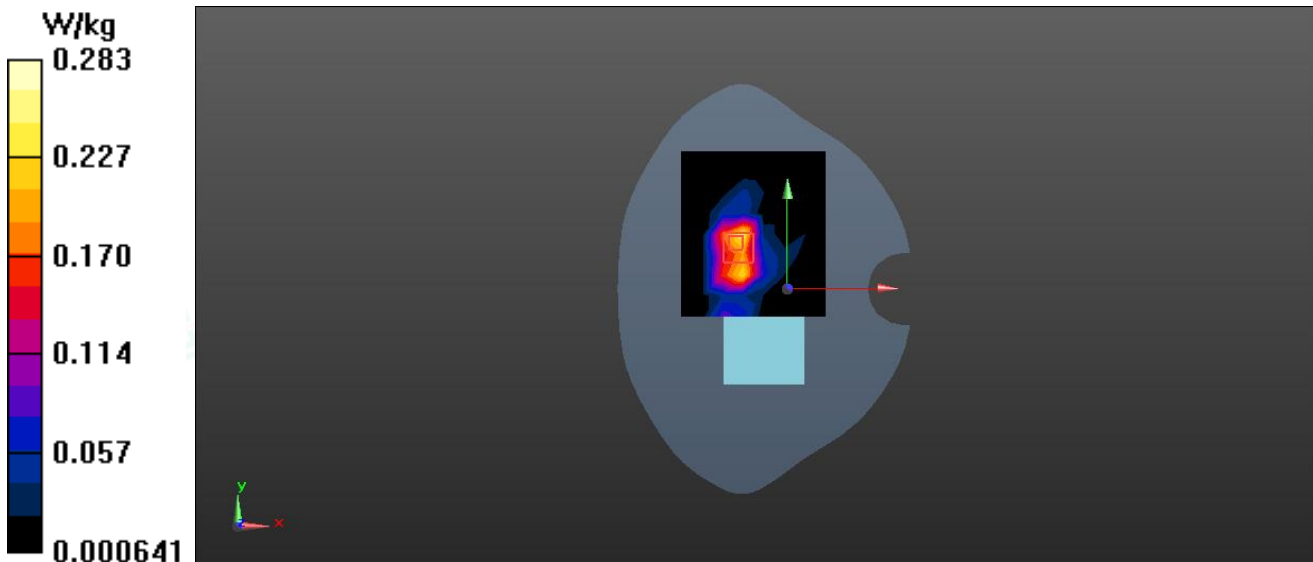

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity