



惠州市创华实业有限公司

HUIZHOU SHI CHUANGHUA INDUSTRIAL CO., LTD.

承认书

PRODUCT SPECIFICATION FOR APPROVAL

客户/CUSTOMER NO : 锦弘霖/Jin Honglin

客户料号/CUSTOMER P/N: R. I. 14. BHZ80010-0100

客户型号/ PAX Description : BHZ800NFC 天线

产品描述/DESCRIPTION : PVC mounting copper wire + adhesive, with 2mm soldering at the end

版本/version : A0

产品编号/PART NUMBER : 191640800001

客户确认签章/CUSTOMER APPROVED SIGNATURE

检 查 (TESTER)	审 核 (CHD. BY)	批 准 (APPD. BY)

请确认后七天内回签, 如不回签则视贵司默认接收, 且在发生品质异议时按此份标准执行.

Please confirm and send it back with signature within 7days. If no sign back, we will assume your acceptance. And if there is any quality dissent, two parties will execute according to this agreement.

日 期 DATE	制 作 MADE. BY	审 核 CHD. BY	批 准 APPD. BY	版 本 REV	页 码 PAGE
2025-11-13				A0	1/6

惠州市创华实业有限公司/ HUIZHOU SHI CHUANGHUA INDUSTRIAL CO., LTD. Address: Building B, No. 62, Jinye Street, Xiaojingkou Sub-district Office, Huizhou City, Huizhou District

 惠州市创华实业有限公司 HUIZHOU SHI CHUANGHUA INDUSTRIAL CO., LTD.				客户料号 CUSTOMER PART NO	R. 1. 14. BHZ80010-0100
				产品类型 PRODUCT TYPE	BHZ800NFC 天线
				日 期 DATE	2025-11-13
产品编号 PART NUMBER	191640800001	版 本 version	A0	页 码 PAGE	2/6

变更申请记录

CHANGE REQUEST RECORD

版 本 version	变 更 内 容 CHANGE THE CONTENT	日 期 DATE	制 作 PRODUCER
A0	FIRST ISSUE	2025-11-13	鲁红阳
制 作/MADE. BY			





惠州市创华实业有限公司
HUIZHOU SHI CHUANGHUA INDUSTRIAL
CO., LTD.

客户料号 CUSTOMER PART NO	R. 1. 14. BHZ80010-0100
产品类型 PRODUCT TYPE	BHZ800NFC 天线
日期 DATE	2025-11-13
页 码 PAGE	3/6

产品编号 PART NUMBER	191640800001	版 本 version	A0
---------------------	--------------	----------------	----

一、外观图/EXTERNAL VIEW

unit : mm

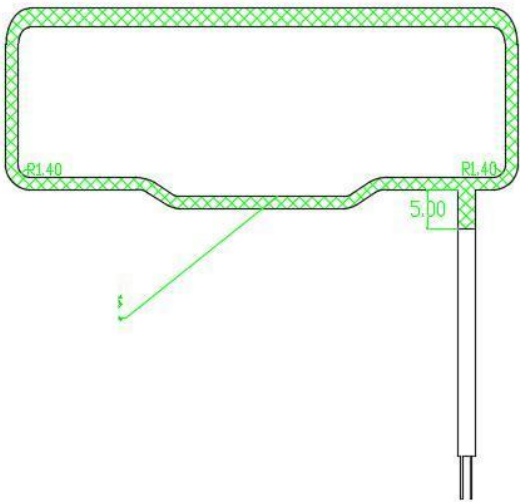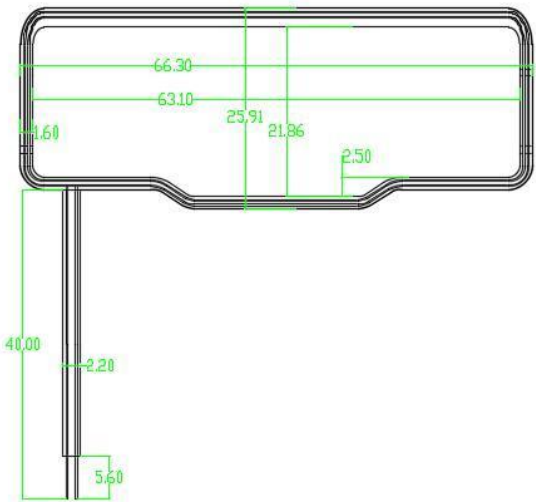

制 作/MADE. BY




惠州市创华实业有限公司
HUIZHOU SHI CHUANGHUA INDUSTRIAL
CO., LTD.

客户料号 CUSTOMER PART NO	R. 1. 14. BHZ8001 0-0100
产品类型 PRODUCT TYPE	BHZ800NFC 天线
日 期 DATE	2025-11-13

产品编号 PART NUMBER	191640800001	版 本 version	A0	页 码 PAGE	4/6
---------------------	--------------	----------------	----	-------------	-----

二、原理图/ SCHEMATIC DIAGRAM:



● PHASE POINT

三、绕线结构/WINDING STRUCTURE

绕组 WIND	起--始 Start-Finish	绕规 WIRE GUAGSE	圈数 TURN	胶带 Tape	挡墙	铁氟龙套管 TFL TUBE		REMARKING 备注
						START	FINI SH	
N1	S--F	2UEW-B ϕ 0.15*1P	2TS		/			按资料

IV. Main Functions, Performance, Structure, Technical Parameters

Main function: Utilization of current range: 10 - 100 mA
Operating voltage range: 1 - 12V
Operating frequency range: 3 MHz - 30 MHz

- 直流电阻: 3 Ω MAX 25 $^{\circ}$ C
- Operating environment temperature: -20 $^{\circ}$ C -- 40 $^{\circ}$ C
 - Terminal connection point:
 - Cooling condition: Natural cooling
 - Temperature rise: No requirements
 - Voltage withstand: 300VAC
 - Insulation method: Class B insulation
 - Air pressure: No requirements
 - Vibration: No requirements
 - Salt spray: No requirements
 - Installation method: Contact conduction
 - Product weight:
 - Marking: No requirements

制 作/MADE. BY

 惠州市创华实业有限公司 HUIZHOU SHI CHUANGHUA INDUSTRIAL CO., LTD.				客户料号 CUSTOMER PART NO	R. 1. 14. BHZ80010-0100
				产品类型 PRODUCT TYPE	BHZ800NFC 天线
				日期 DATE	2025-11-13
产品编号 PART NUMBER	191640800001	版本 version	A0	页 码 PAGE	5/6

五、材料表/MATERIAL LIST

一、外观图/EXTERNAL VIEW							
序号 NO	名称 ITEM	材料 (MATERIAL)					
		制造商 MANUFACTURER	材料描述 MATERIAL DESCRIPTION	型号TYPE	TEMP. RATING FLAME CLASS	UL NO	USE
1	WIRE	BOLUO FENGCHING MAGNET WIRE CO., LTD	Φ0.15mm	2UEW	130℃	E172395	WIRE
2	INSULATION SLICES	Heyuan poly plastic technology co. LTD	0.15mm matte white PVC		80℃		INSULATION SLICES
制 作/MADE. BY							



惠州市创华实业有限公司
HUIZHOU SHI CHUANGHUA INDUSTRIAL
CO., LTD.

客户料号
CUSTOMER PART NO

R. 1. 14. BHZ80010-01
00

产品类型
PRODUCT TYPE

BHZ800NFC 天线

日期
DATE

2025-11-13

产品编号
PART NUMBER

191640800001

版本
version

A0

页	码
PAGE	

6/6

test record

temperature		humidity			Instrument type						型号
project	DCR				Inductance testing instrument						CH1062
winding	S-F	N1			Leakage current testing instrument						
					Resistance testing instrument						502BC
test condition	AT25 ℃				Pressure resistance testing instrument						19053
Serial number, test value, specification range	小于3 Ω				appearance	size					number of turns
						25.91 ±0.3	66.30 ±0.3	20.00 ±0.3	2±1		2TS
1	OK	OK	OK	OK		OK	OK	OK	OK		2TS
2	OK	OK	OK	OK		OK	OK	OK	OK		2TS
3	OK	OK	OK	OK		OK	OK	OK	OK		2TS
4	OK	OK	OK	OK		OK	OK	OK	OK		2TS
5	OK	OK	OK	OK		OK	OK	OK	OK		2TS
6	OK	OK	OK	OK		OK	OK	OK	OK		2TS
7	OK	OK	OK	OK		OK	OK	OK	OK		2TS
8	OK	OK	OK	OK		OK	OK	OK	OK		2TS
9	OK	OK	OK	OK		OK	OK	OK	OK		2TS
10	OK	OK	OK	OK		OK	OK	OK	OK		2TS
remark											
制 作/MADE. BY											