

Prüfbericht-Nr.: <i>Test report no.:</i>	CN26K4C5 001	Auftrags-Nr.: <i>Order no.:</i>	168554771	Seite 1 von 14 Page 1 of 14
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2026-02-01	
Auftraggeber: <i>Client:</i>	FF AI-ROBOTICS INC. 1990 E. Grand Ave, El Segundo, CA 90245, United States			
Prüfgegenstand: <i>Test item:</i>	Humanoid Robot			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	Master Ultra			
Auftrags-Inhalt: <i>Order content:</i>	Test Report			
Prüfgrundlage: <i>Test specification:</i>	CFR Title 47 FCC Part 15, Subpart B ICES-003 Issue 7 October 2020			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2026-01-22	Refer to the photo documents		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A004118556-001			
Prüfzeitraum: <i>Testing period:</i>	2026-01-24 - 2026-02-04			
Ort der Prüfung: <i>Place of testing:</i>	Refer to section 2.1			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>			genehmigt von: <i>authorized by:</i>	
Datum: <i>Date:</i>	2026-04-12	Ausstellungsdatum: <i>Issue date:</i>		2026-04-12
Signed by: Bell Hu		Signed by: Jonathan Li		
Stellung / Position:	Sachverständige(r)/Expert	Stellung / Position:	Sachverständige(r)/Expert	
Sonstiges / <i>Other:</i>	FCC ID: 2BULI-26AGHMAULF			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN26K4C5 001
Test report no.:

Seite 2 von 14
Page 2 of 14

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN26K4C5 001
Test Report No.:

Seite 3 von 14
Page 3 of 14

Test Summary

5.1.1 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

5.1.2 RADIATED EMISSIONS

RESULT: Pass

Table of Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS.....	5
2	TEST SITES.....	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	TRACEABILITY	6
2.4	CALIBRATION.....	7
2.5	MEASUREMENT UNCERTAINTY	7
2.6	LOCATION OF ORIGINAL DATA	7
2.7	STATUS OF FACILITY USED FOR TESTING	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE	8
3.2	RATINGS AND SYSTEM DETAILS.....	8
3.3	INDEPENDENT OPERATION MODES.....	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES.....	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS	12
5.1.1	<i>Conducted Emission on AC Mains.....</i>	<i>12</i>
5.1.2	<i>Radiated Emissions.....</i>	<i>13</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	14
7	LIST OF TABLES.....	14

Prüfbericht - Nr.: CN26K4C5 001
Test Report No.:

Seite 5 von 14
Page 5 of 14

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of FCC 15B

Appendix B: Photographs of the Test Set-up

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street,
Longhua District, Shenzhen 518000, People's Republic of China

A2LA Cert. No.: 5162.01

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Conducted Emission on AC Mains				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102680	2026-02-09
Artificial Mains Network	R&S	ENV216	102333	2026-07-18
EMC32 Test Software	R&S	EMC32(Ver.10.60.20)	N/A	N/A
Radiated Emission (3m chamber)				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
3m SAC	ETS-Lindgren	SAC3	CT001632-Q1362	2027-09-11
EMI Test Receiver	R&S	ESR7	102111	2026-07-18
Active Magnetic Loop Antenna	Schwarzbeck	FMZB1519B	00080	2026-07-30
Trilog-Broadband Antenna	Schwarzbeck	VULB9168	0945	2026-07-18
Spectrum Analyzer	R&S	FSV40-N	102030	2026-10-29
Horn Antenna	R&S	HF907	102706	2027-07-31
SHF-EHF Horn	Schwarzbeck	BBHA 9170	01384	2026-10-29
Preamplifier(1-18GHz)	Schwarzbeck	BBV 9721	00140	2026-10-29
Preamplifier (9KHz-18GHz)	R&S	SCU-18F	180076	2026-07-17
2400-2500mhz Notch Filter/SMA	WARISON	WFIL-N2400-2500F-05	WRN2BNW2B1	2026-02-09
EMC32 Test Software	R&S	EMC32(Ver.10.60.20)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Table 2: Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (10m SAC), 30MHz to 1000MHz	± 4.66 dB
Radiated Emission (10m SAC), above 1000MHz	± 4.35 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

Prüfbericht - Nr.: CN26K4C5 001
Test Report No.:

Seite 8 von 14
 Page 8 of 14

3 General Product Information

3.1 Product Function and Intended Use

The product is Humanoid Robot.

For details refer to the User Manual.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	Humanoid Robot
Trade Mark:	
Type Designation:	Master Ultra
FCC ID:	2BULI-26AGHMAULF
Operating Voltage:	Charging: 100-240VAC, 50/60Hz via the adapter Normal Operating: 48V DC Battery Powered.
Testing Voltage:	Charging: 120VAC, 60Hz via the adapter Normal Operating: 48V DC Battery Powered.
AC/DC adapter:	Input: 100-240VAC, 50/60Hz OUTPUT: 54.6V/10.0 A Model: FY600546100000 Manufacturer: Zhejiang Fudian Intelligent Technology Co.,Ltd.
Interface Port:	1* power port for charging

3.3 Independent Operation Modes

The basic operation modes are:

A. On, Normal Operating with all wireless connecting

The Humanoid Robot utilizes a program that gives the equipment a kind of artificial intelligence be able to operate the intended functions while stationary, under the special software setting by the manufacturer, the motors in operating. The LTE/NR in communicating with Tester + Wi-Fi/BT connecting+ GNSS in receive + Lora link between the Robot and the Wireless Emergency-stop.

B. On, Charging via the AC/DC Adapter

Note: The normal functions of the robot will be off during the charging.

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|------------------------------|-------------------------|
| - Application Form | - User Manual |
| - ID Label and Location Info | - Operation Description |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.4: 2014.

4.3 Special Accessories and Auxiliary Equipment

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	Remark
Portable Laptop	Lenovo	ThinkPad T480	SN:10Q67059

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

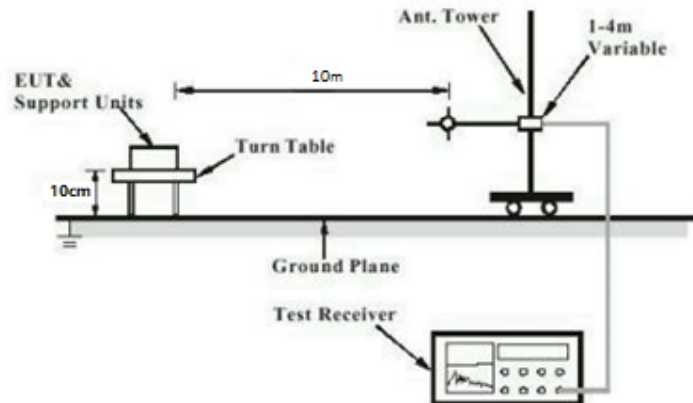


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)


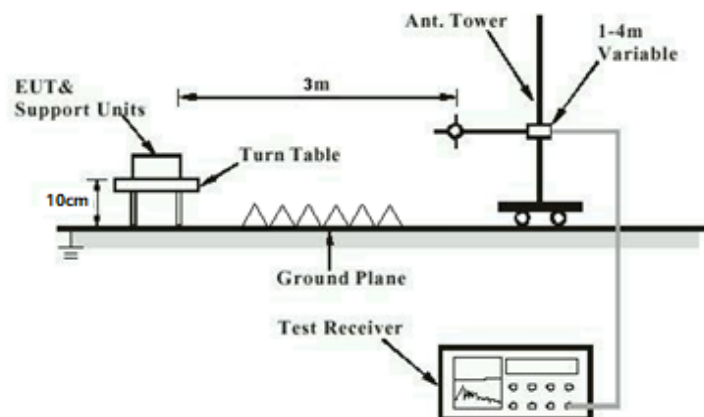


Diagram of Measurement Configuration for Mains Conduction Measurement

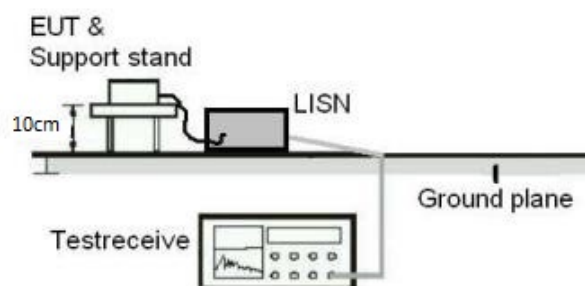

Prüfbericht - Nr.: **CN26K4C5 001**
Test Report No.:Seite 12 von 14
Page 12 of 14

5 Test Results

5.1.1 Conducted Emission on AC Mains

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.107(a) ICES-003 Section 3.2.1
Basic standard	: ANSI C63.4:2014
Frequency range	: 0.15 - 30MHz
Classification	: Class A
Limits	: FCC Part 15.107(a) ICES-003 Table 1
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2026-01-25 - 2026-02-02
Input voltage	: AC 120V, 60Hz
Operation mode	: B
Ambient temperature	: 23.2 °C
Relative humidity	: 49.1 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: **CN26K4C5 001**
Test Report No.:Seite 13 von 14
Page 13 of 14

5.1.2 Radiated Emissions

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.109(a) ICES-003 Section 3.2.2
Basic standard	: ANSI C63.4:2014
Frequency range	: 30MHz to 5 th harmonic of the highest frequency
Classification	: Class A
Limits	: FCC Part 15.109(a) ICES-003 Table 2 & 4
Kind of test site	: 10m Semi-Anechoic Chamber

Test Setup

Date of testing	: 2026-01-25 - 2026-02-02
Input voltage	: Charging: AC 120V, 60Hz Normal Operating: 48V Battery Powered (Robot)
Operation mode	: A, B
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty	7
Table 3: Technical Specification of EUT.....	8
Table 4: List of Accessories and Auxiliary Equipment.....	10


Appendix A: Test Results of FCC 15B & ICES-003

APPENDIX A: TEST RESULTS OF FCC 15B & ICES-003	1
APPENDIX A.1: TEST PLOTS OF CONDUCTED EMISSION ON AC MAINS	2
APPENDIX A.2: TEST PLOTS OF RADIATED EMISSION, BELOW 1GHz	5
APPENDIX A.3: TEST PLOTS OF RADIATED EMISSION, ABOVE 1GHz	7

Appendix A.1: Test Plots of Conducted Emission on AC Mains

EUT Information

EUT Name: Humanoid Robot
 Order Number: 168582452
 Model: Master Ultra
 Test Mode: Charging
 Test Voltage: AC 120V/60Hz
 Test Standard: FCC Part 15B
 Test By./Review By: Soloman Wu / Murphy Chen
 Tem./Hum./Pressure: 24.3°C/51.0%/101kPa
 Remark: SR2

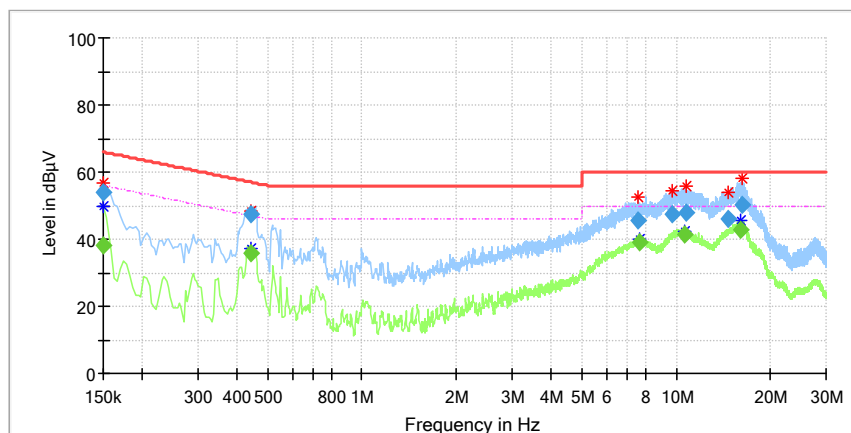

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.15	56.62	---	66.00	9.38	L1	10.23
0.15	---	49.80	56.00	6.20	L1	10.23
0.44	---	37.41	46.80	9.39	L1	10.26
0.44	48.57	---	56.80	8.23	L1	10.26
7.58	52.56	---	60.00	7.44	L1	10.55
7.68	---	40.11	50.00	9.89	L1	10.55
9.67	54.24	---	60.00	5.76	L1	10.64
10.69	---	42.26	50.00	7.74	L1	10.68
10.79	55.82	---	60.00	4.18	L1	10.68
14.61	53.99	---	60.00	6.01	L1	10.76
16.05	---	45.62	50.00	4.38	L1	10.85
16.28	58.16	---	60.00	1.84	L1	10.86

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.15	---	38.34	56.00	17.66	1000.00	9.00	L1	10.23
0.15	53.93	---	66.00	12.07	1000.00	9.00	L1	10.23
0.44	---	35.99	47.05	11.07	1000.00	9.00	L1	10.25
0.44	47.31	---	56.98	9.67	1000.00	9.00	L1	10.26
7.58	45.78	---	60.00	14.22	1000.00	9.00	L1	10.55
7.68	---	38.96	50.00	11.04	1000.00	9.00	L1	10.55
9.67	47.62	---	60.00	12.38	1000.00	9.00	L1	10.64
10.69	---	41.62	50.00	8.38	1000.00	9.00	L1	10.67
10.79	48.02	---	60.00	11.98	1000.00	9.00	L1	10.68
14.61	46.05	---	60.00	13.95	1000.00	9.00	L1	10.76
16.05	---	42.63	50.00	7.37	1000.00	9.00	L1	10.85
16.28	50.00	---	60.00	10.00	1000.00	9.00	L1	10.86

EUT Information

EUT Name: Humanoid Robot
 Order Number: 168582452
 Model: Master Ultra
 Test Mode: Charging
 Test Voltage: AC 120V/60Hz
 Test Standard: FCC Part 15B
 Test By./Review By: Solomon Wu / Murphy Chen
 Tem./Hum./Pressure: 24.3°C/51.0%/101kPa
 Remark: SR2

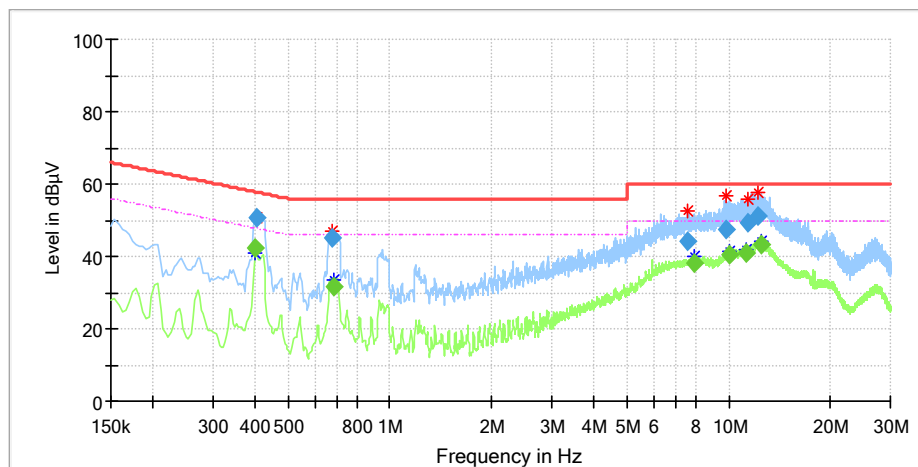

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.40	---	41.15	47.81	6.66	N	10.26
0.40	50.90	---	57.73	6.83	N	10.26
0.67	47.21	---	56.00	8.79	N	10.28
0.68	---	33.49	46.00	12.51	N	10.29
7.52	52.38	---	60.00	7.62	N	10.55
7.88	---	39.87	50.00	10.13	N	10.56
9.83	56.72	---	60.00	3.28	N	10.65
10.00	---	41.54	50.00	8.46	N	10.65
11.26	---	41.97	50.00	8.03	N	10.68
11.41	55.88	---	60.00	4.12	N	10.68
12.20	57.68	---	60.00	2.32	N	10.69
12.46	---	44.29	50.00	5.71	N	10.70


Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.40	---	42.20	47.84	5.64	1000.00	9.00	N	10.26
0.40	50.49	---	57.76	7.27	1000.00	9.00	N	10.26
0.67	45.22	---	56.00	10.78	1000.00	9.00	N	10.28
0.68	---	31.83	46.00	14.17	1000.00	9.00	N	10.28
7.52	44.32	---	60.00	15.68	1000.00	9.00	N	10.55
7.88	---	38.24	50.00	11.76	1000.00	9.00	N	10.56
9.83	47.40	---	60.00	12.60	1000.00	9.00	N	10.65
10.00	---	40.35	50.00	9.65	1000.00	9.00	N	10.65
11.26	---	40.89	50.00	9.11	1000.00	9.00	N	10.68
11.41	49.26	---	60.00	10.74	1000.00	9.00	N	10.68
12.20	51.05	---	60.00	8.95	1000.00	9.00	N	10.69
12.46	---	43.06	50.00	6.94	1000.00	9.00	N	10.70

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Humanoid Robot
Order Number:	168582452
Model:	Master Ultra
Test Mode:	A
Test Voltage:	Battery
Test Standard:	FCC Part 15B
Test By:/Review By:	Soloman Wu / Murphy Chen
Tem./Hum./Pressure:	24.5°C/50.6%/101kPa
Remark:	3M Chamber

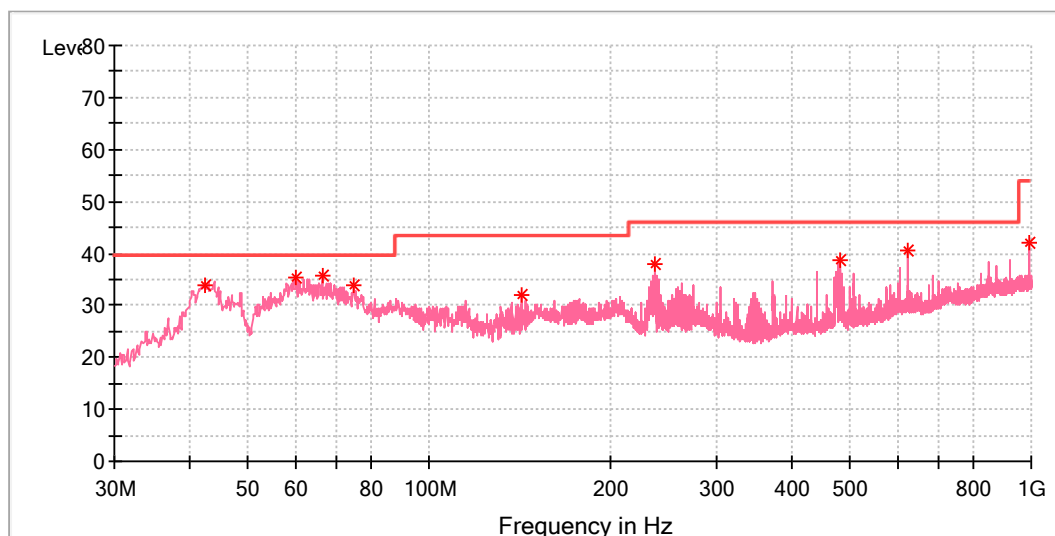

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
42.488750	34.00	40.00	6.00	100.0	V	134.0	20.4
60.070000	35.37	40.00	4.63	100.0	V	152.0	20.0
66.496250	35.82	40.00	4.18	100.0	V	169.0	19.1
74.862500	33.93	40.00	6.07	100.0	V	146.0	17.4
142.277500	31.88	43.50	11.62	100.0	V	281.0	20.4
236.610000	37.93	46.00	8.07	200.0	V	209.0	18.9
479.958750	38.59	46.00	7.41	100.0	V	169.0	26.1
622.548750	40.45	46.00	5.55	100.0	V	134.0	29.4
990.057500	41.91	54.00	12.09	100.0	V	176.0	33.9

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---		---	---

Appendix A.3: Test Plots of Radiated Emission, Above 1GHz

Note: Testing was carried out within frequency range 30MHz to the 5th harmonics. The measurement results above 6GHz were greater than 20dB below the limit, so only record the test result within the 30MHz to 6GHz.

EUT Information

EUT Name:	Humanoid Robot
Order Number:	168582452
Model:	Master Ultra
Test Mode:	A
Test Voltage:	Battery
Test Standard:	FCC Part 15B
Test By:/Review By:	Soloman Wu / Murphy Chen
Tem./Hum./Pressure:	23.4°C/50.3%/101kPa
Remark:	3M Chamber

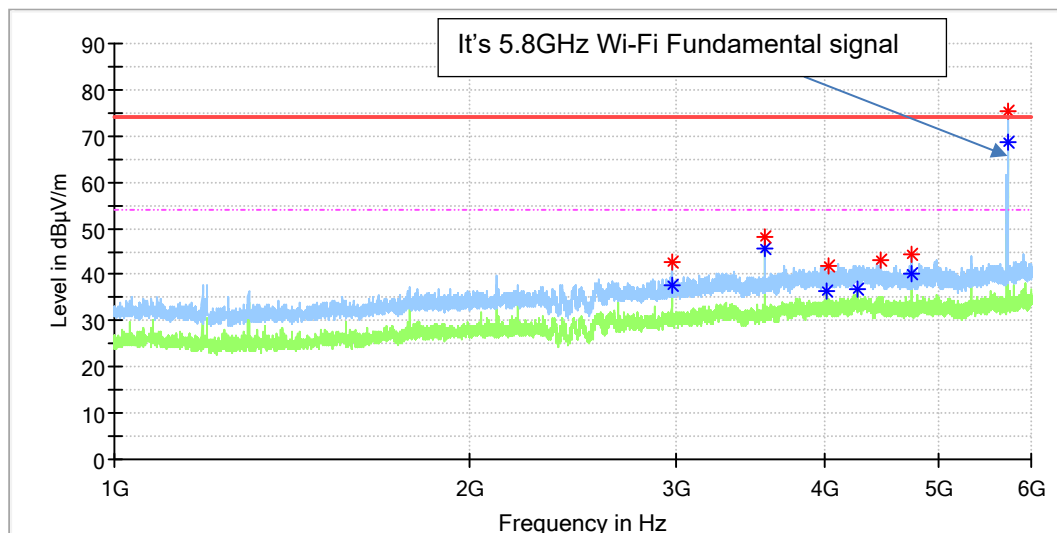

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2970.000000	---	37.67	54.00	16.33	100.0	H	20.0	-2.1
2970.000000	42.55	---	74.00	31.45	100.0	H	20.0	-2.1
3564.062500	---	45.70	54.00	8.30	100.0	H	20.0	0.0
3564.062500	48.03	---	74.00	25.97	100.0	H	20.0	0.0
4023.125000	---	36.24	54.00	17.76	100.0	H	248.0	1.9
4044.687500	42.02	---	74.00	31.98	100.0	H	10.0	1.8
4269.687500	---	36.66	54.00	17.34	100.0	H	0.0	2.8
4471.250000	43.24	---	74.00	30.76	100.0	H	29.0	2.3
4752.187500	---	40.07	54.00	13.93	100.0	H	344.0	2.2
4752.187500	44.19	---	74.00	29.81	100.0	H	344.0	2.2
5731.562500	75.18	---	74.00	-1.18	100.0	H	76.0	4.8
5731.562500	---	68.69	54.00	-14.69	100.0	H	76.0	4.8

Final Result

[illegible]

EUT Information

EUT Name: Humanoid Robot
 Order Number: 168582452
 Model: Master Ultra
 Test Mode: A
 Test Voltage: Battery
 Test Standard: FCC Part 15B
 Test By./Review By: Soloman Wu / Murphy Chen
 Tem./Hum./Pressure: 23.4°C/50.3%/101kPa
 Remark: 3M Chamber

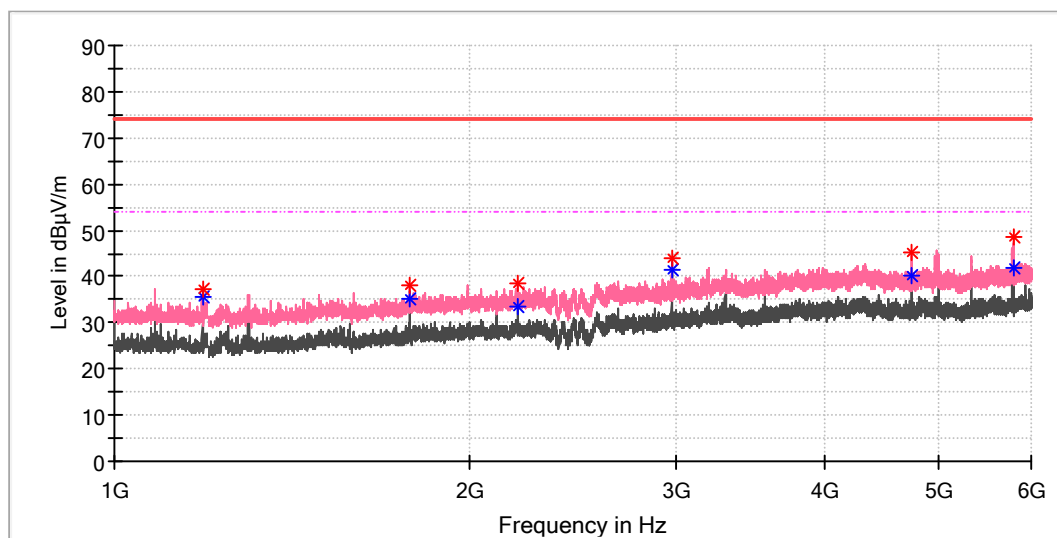

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1187.812500	37.15	---	74.00	36.85	100.0	V	39.0	-9.9
1187.812500	---	35.63	54.00	18.37	100.0	V	39.0	-9.9
1781.875000	37.92	---	74.00	36.08	100.0	V	39.0	-7.0
1782.187500	---	34.96	54.00	19.04	100.0	V	52.0	-7.0
2199.687500	38.60	---	74.00	35.40	100.0	V	233.0	-5.5
2200.000000	---	33.68	54.00	20.32	100.0	V	109.0	-5.5
2969.687500	43.84	---	74.00	30.16	100.0	V	330.0	-2.1
2970.000000	---	41.58	54.00	12.42	100.0	V	330.0	-2.1
4751.875000	---	40.13	54.00	13.87	100.0	V	12.0	2.2
4752.187500	45.24	---	74.00	28.76	100.0	V	2.0	2.2
5791.250000	---	41.90	54.00	12.10	100.0	V	29.0	4.8
5791.875000	48.50	---	74.00	25.50	100.0	V	29.0	4.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
-----------------	------------------	------------------	----------------	-------------	-----------------	-----------------	-------------	-----	---------------	--------------