

TEST REPORT

Reference No...... : WTF26D01004507W003
FCC ID : 2BUMV-RANGERIA250
Applicant..... : Vera-Fi Audio, LLC.
Address..... : 9025 CRESTVIEW DR, DENTON TX 76207, USA
Manufacturer : Dongguan HiFine Electronics Co., Ltd.
Address : 3rd Floor, Building 7, Zhongke Industrial Park, No. 88, Wenming Street, Baidi Community, Zhangmutou Town, Dongguan City,
Product..... : Amplifier
Model(s) : Ranger I/A 250, Ranger I/A 80.2
Standards..... : FCC 47CFR Part 15.247
Date of Receipt Sample : 2026-01-09
Date of Test : 2026-01-14 to 2026-07-02
Date of Issue..... : 2026-07-03
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

Frank Yin

Frank Yin / Project Engineer

Approved by:



Deval qin

Deval qin / Designated Reviewer

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS.....	2
3 REVISION HISTORY.....	4
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST.....	5
4.4 TEST FACILITY	6
4.5 SUBCONTRACTED.....	6
4.6 ABNORMALITIES FROM STANDARD CONDITIONS	6
4.7 TEST MODE	7
5 TEST SUMMARY.....	8
6 EQUIPMENT USED DURING TEST.....	9
6.1 EQUIPMENTS LIST	9
6.2 DESCRIPTION OF SUPPORT UNITS	10
6.3 MEASUREMENT UNCERTAINTY	10
6.4 TEST EQUIPMENT CALIBRATION	10
7 DUTY CYCLE.....	11
8 CONDUCTED EMISSION.....	13
8.1 E.U.T. OPERATION.....	13
8.2 EUT SETUP	13
8.3 MEASUREMENT DESCRIPTION	13
8.4 CONDUCTED EMISSION TEST RESULT	14
9 RADIATED EMISSIONS.....	16
9.1 EUT OPERATION.....	16
9.2 TEST SETUP	17
9.3 SPECTRUM ANALYZER SETUP	18
9.4 TEST PROCEDURE.....	19
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	19
9.6 SUMMARY OF TEST RESULTS.....	20
10 CONDUCTED SPURIOUS EMISSIONS.....	37
10.1 TEST PROCEDURE	37
10.2 TEST RESULT	38
11 BAND EDGE MEASUREMENT.....	50
11.1 TEST PRODUCE	50
11.2 TEST RESULT	51
12 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT.....	53
12.1 TEST PROCEDURE	53
12.2 TEST RESULT	53
13 MAXIMUM CONDUCTED OUTPUT POWER.....	60
13.1 TEST PROCEDURE	60
13.2 TEST RESULT	61
14 POWER SPECTRAL DENSITY.....	66

14.1 TEST PROCEDURE66

14.2 TEST RESULT67

15 ANTENNA REQUIREMENT72

16 RF EXPOSURE72

17 PHOTOGRAPHS OF TEST SETUP AND EUT.....72

3 Revision History

Test Report No.	Date of Receipt Sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTF26D01004507W003	2026-01-09	2026-01-14 to 2026-07-02	2026-07-03	Original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	Amplifier
Model(s):	Ranger I/A 250, Ranger I/A 80.2
Model Description:	Ranger I/A 250 and Ranger I/A 80.2 differ in both model names and internal hardware, utilizing different power amplifier chipsets to deliver varying power output levels.
Remark:	Model Ranger I/A 250 was tested in the report.
Test Sample No.:	1-1/1
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40
Hardware Version:	XD1_IN V1
Software Version:	1142

4.2 Details of E.U.T.

Operation Frequency:	802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz
----------------------	--

Max. RF output power: 19.27dBm

Type of Modulation: DSSS, OFDM

Antenna installation: Rubber Duck Antenna

Antenna Gain: 3.99dBi

Note:

#: The antenna gain is provided by the applicant, and the applicant should be responsible for its authenticity, WALTERK lab has not verified the authenticity of its information.

Ratings: Input: 100-120V~, 60Hz; 220-240V~, 50Hz
Input power: 200W(Ranger I/A 80.2), 300W(Ranger I/A 250)

4.3 Channel List

Wi-Fi

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	-	-

4.4 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

4.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test Lab: N/A

Lab address: N/A

Test items: N/A

4.6 Abnormalities from Standard Conditions

None.

4.7 Test Mode

Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Conducted Output Power	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Power Spectral Density	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
6dB Bandwidth and 99% Bandwidth	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Band Edge	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Transmitter Spurious Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX

Note: Parameters set by test software during channel & power tests, the software provided by the applicant was used to set the operating channels as well as the maximum output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product.

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth and 99% Bandwidth	15.247(a)(2)	PASS
Maximum Conducted Output Power	15.247(b)(3), (4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

6 Equipment Used during Test

6.1 Equipments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Calibration Due Date
Conducted Emissions 1#						
1	EMI Test Receiver	R&S	ESCI	100947	2025-07-04	2026-07-03
2	LISN	R&S	ENV216	100115	2025-06-03 2026-06-02	2026-06-02 2027-06-01
3	Cable	Top	TYPE16(3.5M)	-	2025-06-03 2026-06-02	2026-06-02 2027-06-01
3m Semi-anechoic Chamber for Radiation Emissions 1#						
1	Spectrum Analyzer	R&S	FSP30	100091	2025-04-19 2026-04-07	2026-04-18 2027-04-06
2	Amplifier	Agilent	8447D	2944A10178	2025-07-04	2026-07-03
3	Tri-log Broadband Antenna	SCHWARZBECK	VULB9163	336	2025-07-20	2026-07-19
4	Coaxial Cable	Top	TYPE16(13M)	-	2025-04-19 2026-04-07	2026-04-18 2027-04-06
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1314	2025-08-09	2026-08-08
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2025-07-04	2026-07-03
7	Broadband Preamplifier	COMPLIANCE	PAP-1G18	2004	2025-07-04	2026-07-03
8	Coaxial Cable	Top	ZT26-NJ-NJ-8M/FA	-	2025-04-19 2026-04-07	2026-04-18 2027-04-06
9	Microwave Amplifier	SCHWARZBECK	BBV 9721	100472	2025-07-04	2026-07-03
10	Coaxial Cable	Top	ZT40-2.92J-2.92J-2.0M	17100919	2025-04-19 2026-04-07	2026-04-18 2027-04-06
3m Semi-anechoic Chamber for Radiation Emissions 2#						
1	Test Receiver	R&S	ESCI	101296	2025-04-19 2026-04-07	2026-04-18 2027-04-06
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2025-07-05	2026-07-04
3	Active Loop Antenna	Com-Power	AL-130R	10160007	2025-04-21 2026-04-19	2026-04-20 2027-04-18
4	Amplifier	ANRITSU	MH648A	M43381	2025-04-19 2026-04-07	2026-04-18 2027-04-06
5	Cable	HUBER+SUHNER	CBL2	525178	2025-04-19 2026-04-07	2026-04-18 2027-04-06
RF Conducted Testing						
1	Spectrum Analyzer	R&S	FSP40	100501	2025-04-19 2026-04-07	2026-04-18 2027-04-06
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2025-07-05	2026-07-04
3	Power Sensor	TST	TSCB562R2	-	2025-12-05	2026-12-04

Test Software:

Test Item	Software name	Software version
Conduction disturbance Radiated Emission(3m)	EZ-EMC	EZ-EMC(RA-03A1-1)
RF Conducted Testing	TST-301	V2.0

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64dB (AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 ⁻⁷ Hz
RF Power	± 0.42 dB
RF Power Density	± 0.7dB
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor: k=2	

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R. China.

7 Duty Cycle

Type of Modulation	On time ms	Period ms	Duty Cycle linear	Duty Cycle %	Duty Cycle Factor(dB)	Average Factor(dB)
802.11b	8.350	8.550	0.98	97.66	0.10	-0.21
802.11g	1.390	1.450	0.96	95.86	0.18	-0.37
802.11n-HT20	1.300	1.380	0.94	94.20	0.26	-0.52
802.11n-HT40	0.648	0.750	0.86	86.40	0.63	-1.27


Remark:

Duty cycle=On Time/period;

Duty cycle factor= $10 \cdot \log(1/\text{Duty cycle})$;


Average factor= $20 \log_{10} \text{Duty cycle}$

Wi-Fi 802.11b

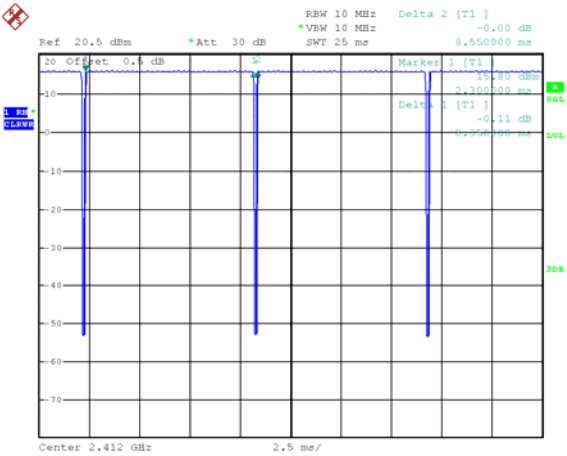


Date: 19.MAR.2026 09:06:46

Wi-Fi 802.11g

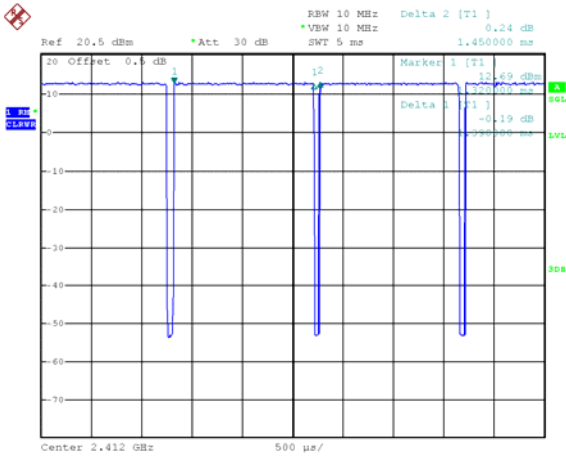


Date: 19.MAR.2026 09:12:00

Wi-Fi 802.11n-HT20

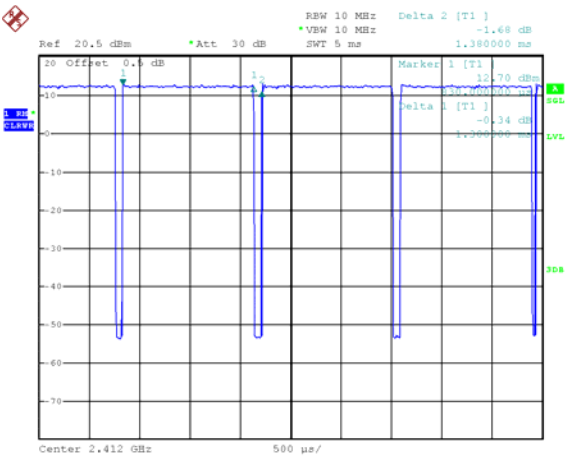

Date: 19.MAR.2026 09:17:06

Wi-Fi 802.11n-HT40

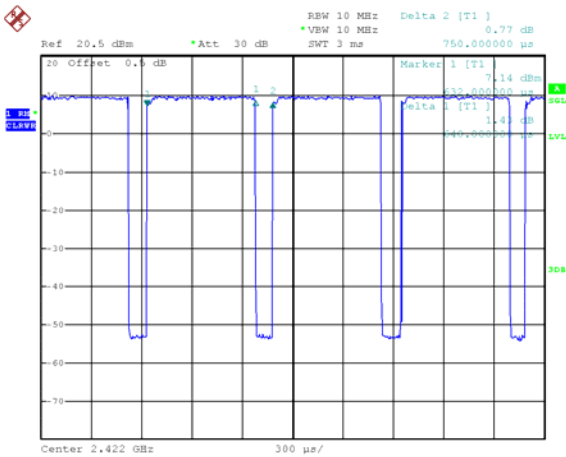

Date: 19.MAR.2026 09:20:50

8 Conducted Emission

Test Requirement: 47CFR FCC Part15 Subpart C §15.207

Test Method: ANSI C63.10-2020

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Limit:

Frequency (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	0	50

*Decreases with the logarithm of the frequency.

8.1 E.U.T. Operation

Operating Environment:

Temperature: 21.5°C

Humidity: 49.4% RH


Atmospheric Pressure: 101.6kPa

EUT Operation:

The test was performed in Transmitting mode, the worst test data were shown in the report.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10-2020.

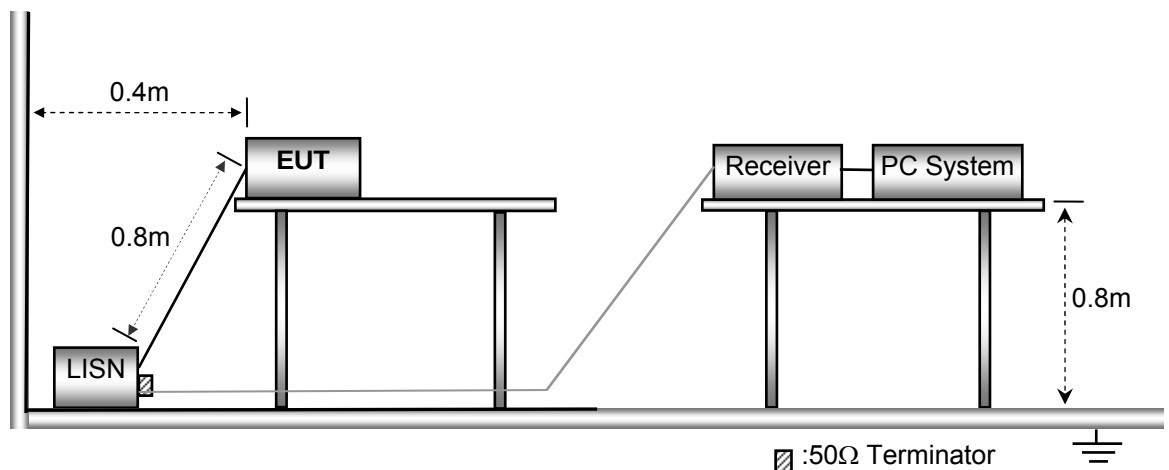

8.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


Waltek Testing Group Co., Ltd.

<http://www.waltek.com.cn>


8.4 Conducted Emission Test Result

Remark: only the worst data (TX 11b mode High channel mode) were reported

Live line:

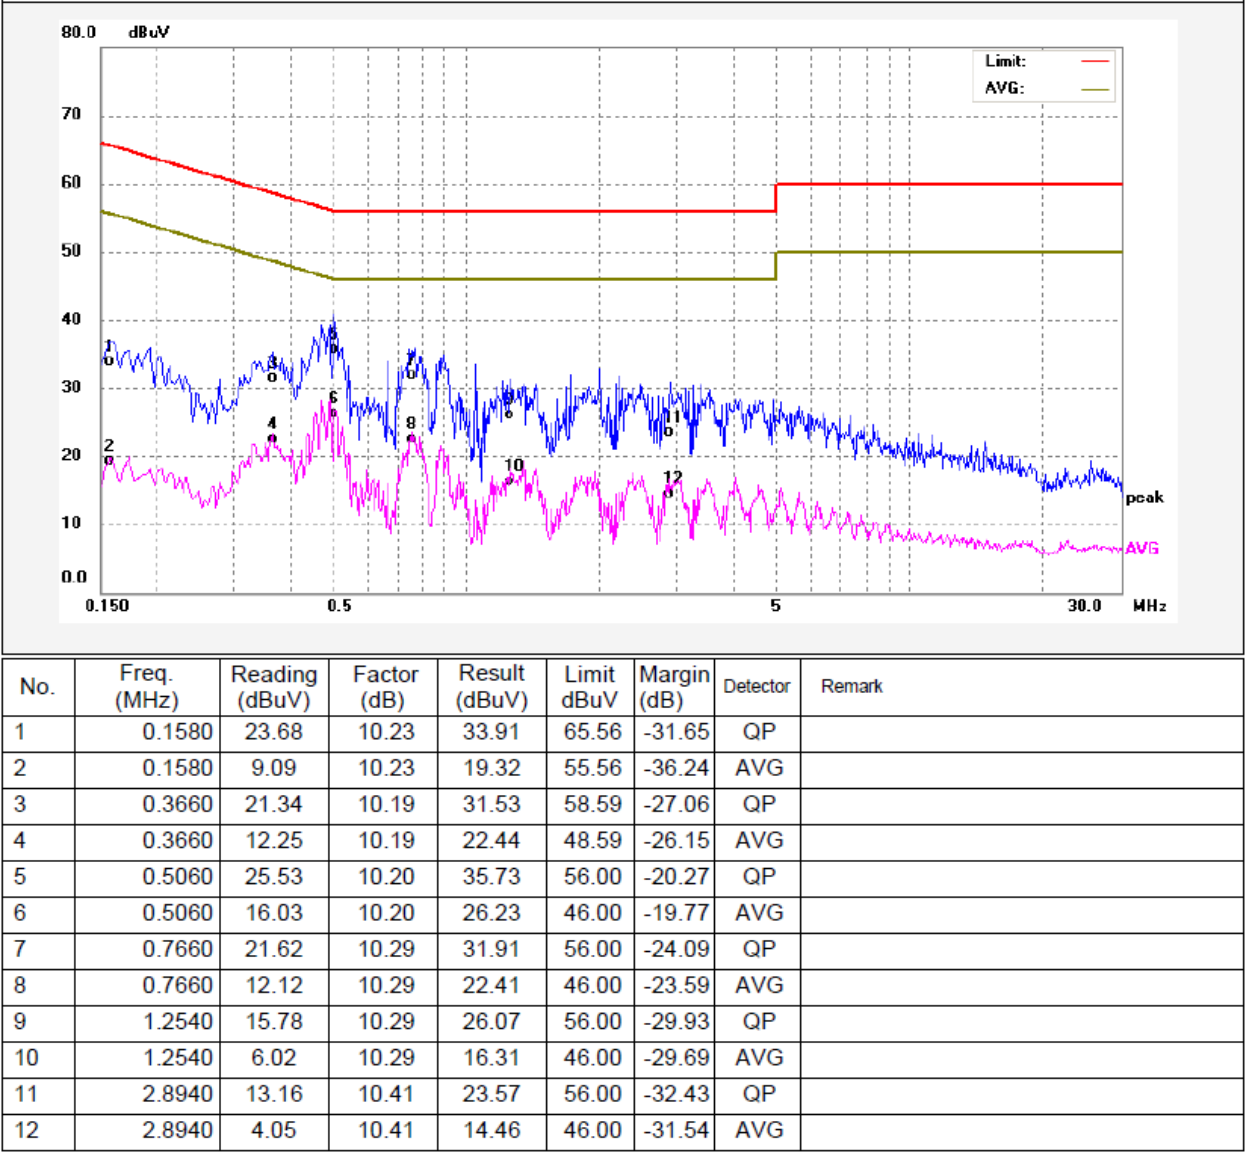

Neutral line:

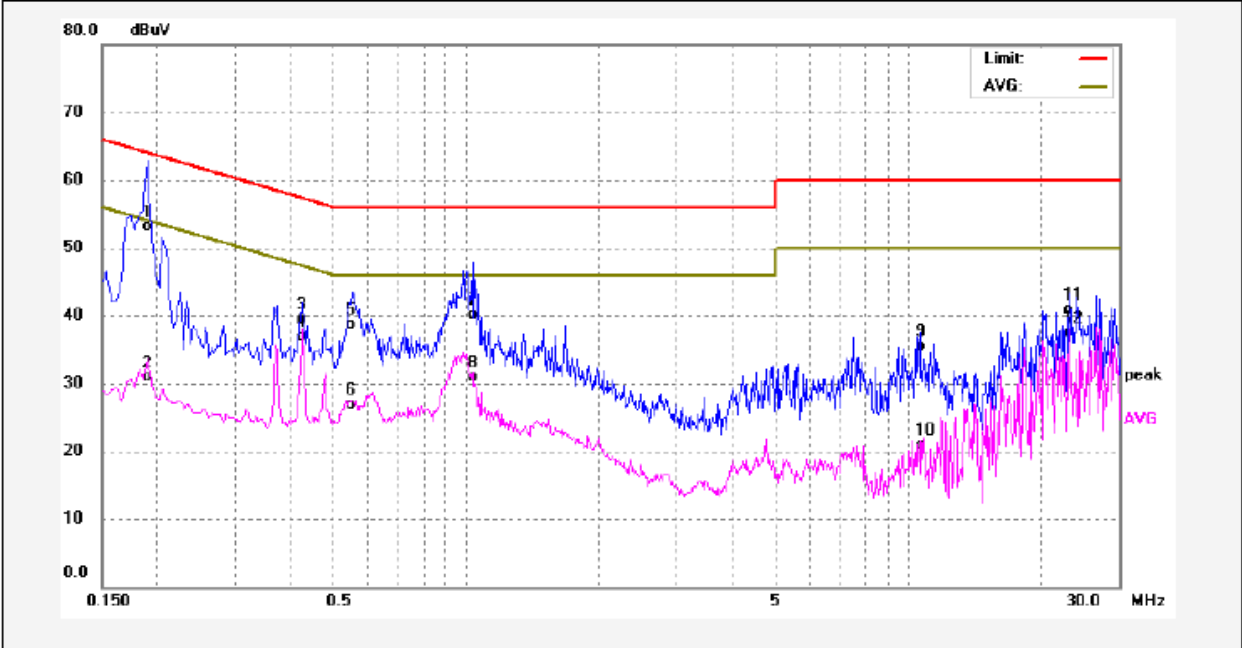

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1900	42.95	10.08	53.03	64.03	-11.00	QP	
2	0.1900	20.75	10.08	30.83	54.03	-23.20	AVG	
3	0.4260	29.61	9.83	39.44	57.33	-17.89	QP	
4	0.4260	27.02	9.83	36.85	47.33	-10.48	AVG	
5	0.5540	28.66	10.01	38.67	56.00	-17.33	QP	
6	0.5540	16.91	10.01	26.92	46.00	-19.08	AVG	
7	1.0339	30.25	9.92	40.17	56.00	-15.83	QP	
8	1.0339	20.91	9.92	30.83	46.00	-15.17	AVG	
9	10.6500	24.52	10.97	35.49	60.00	-24.51	QP	
10	10.6500	9.95	10.97	20.92	50.00	-29.08	AVG	
11	23.1299	29.07	11.77	40.84	60.00	-19.16	QP	
12	23.1299	25.72	11.77	37.49	50.00	-12.51	AVG	

9 Radiated Emissions

Test Requirement: 47CFR FCC Part15 Subpart C §15.209&15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019;
ANSI C63.10-2020

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

9.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation:

The test was performed in Transmitting mode, the worst test data were shown in the report.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

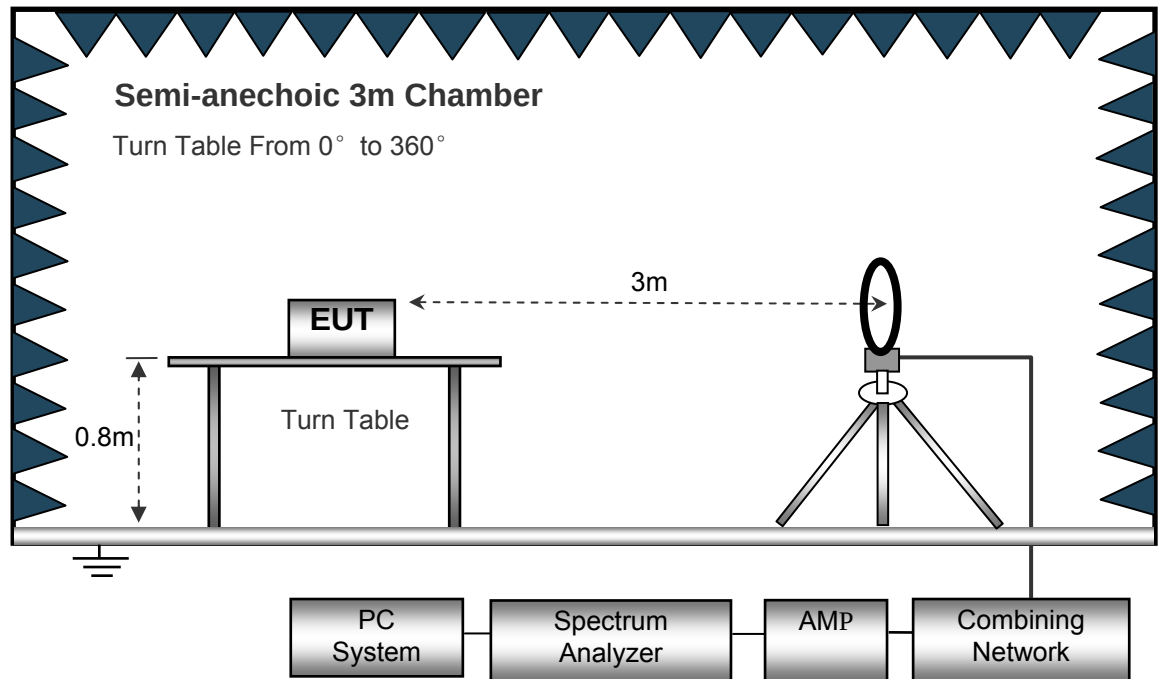

The test setup for emission measurement from 30 MHz to 1 GHz.

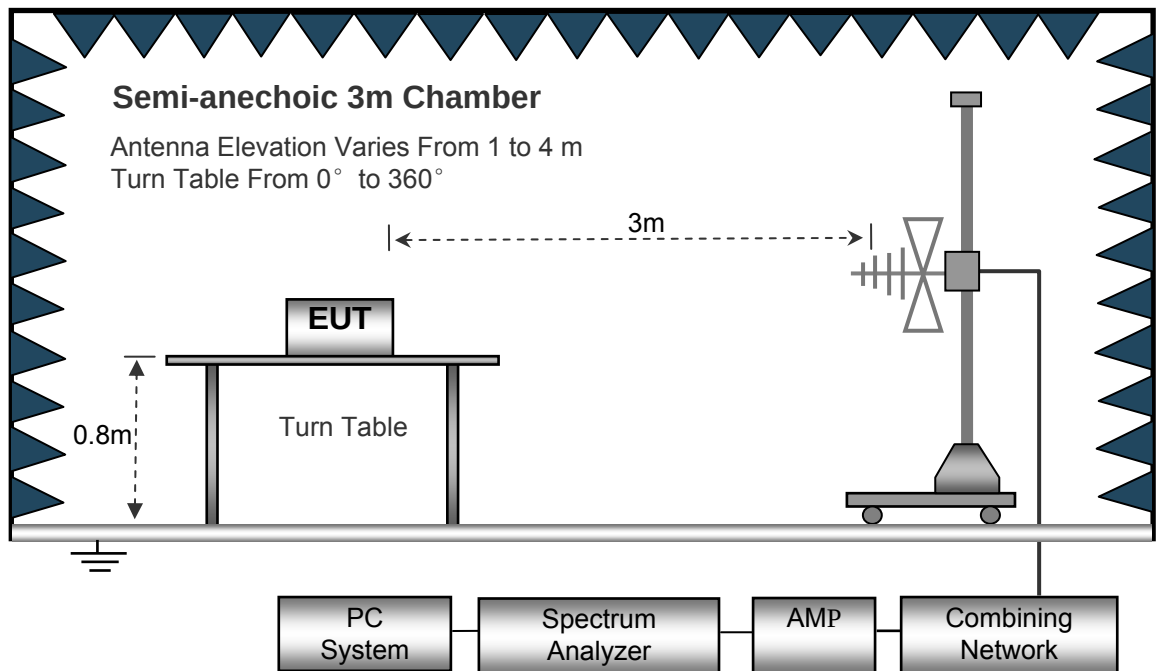

The test setup for emission measurement above 1 GHz.

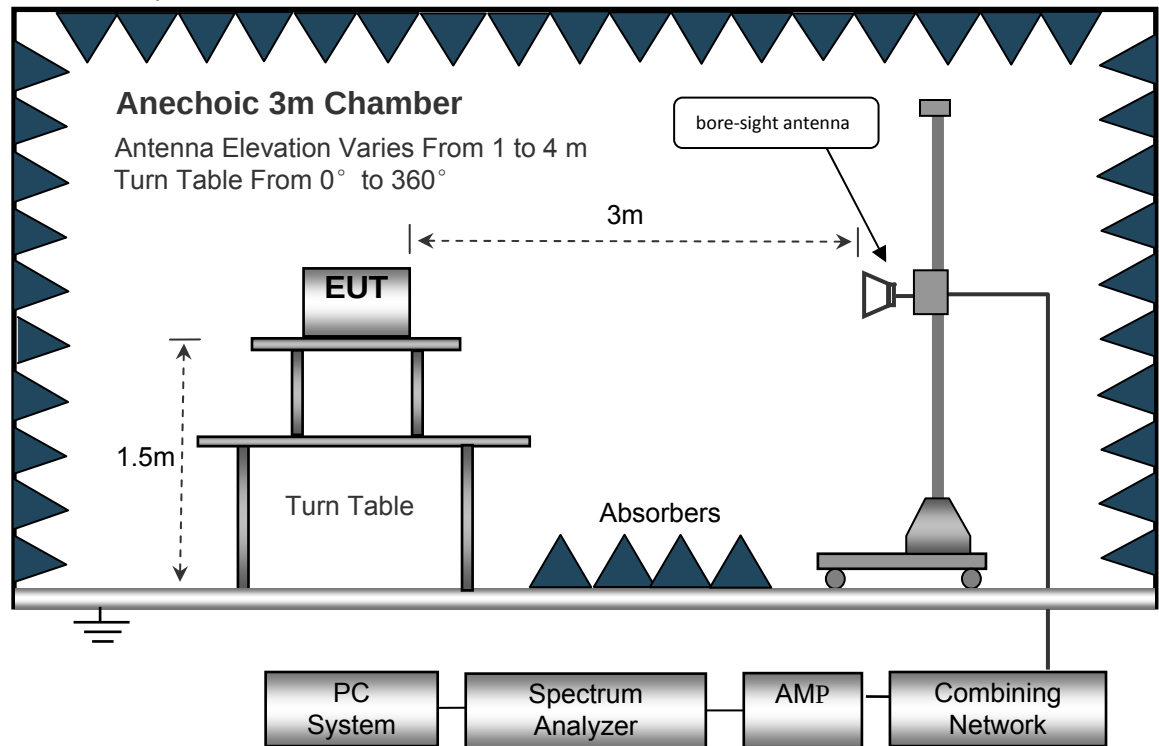

9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth..... 10kHz
Video Bandwidth..... 10kHz
Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth..... 100kHz
Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth..... 1MHz
Video Bandwidth..... 3MHz
Detector Ave.
Resolution Bandwidth..... 1MHz
Video Bandwidth..... 10Hz

9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

9.6 Summary of Test Results


Test Frequency: 9kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.


Test Frequency: 30MHz ~ 1000MHz

Remark: only the worst data (802.11b Low channel mode) were reported

Antenna Polarization: Horizontal

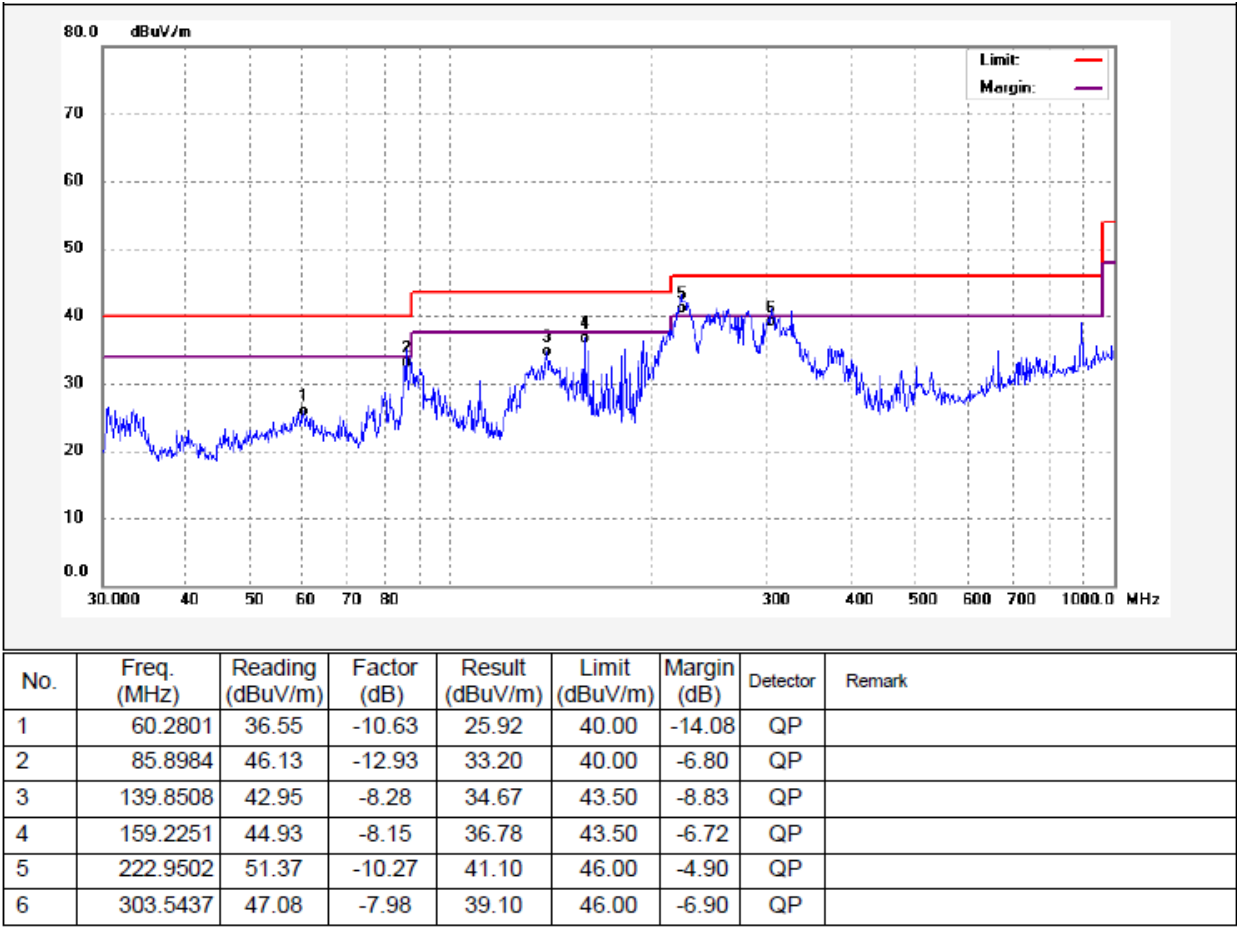

Antenna Polarization: Vertical

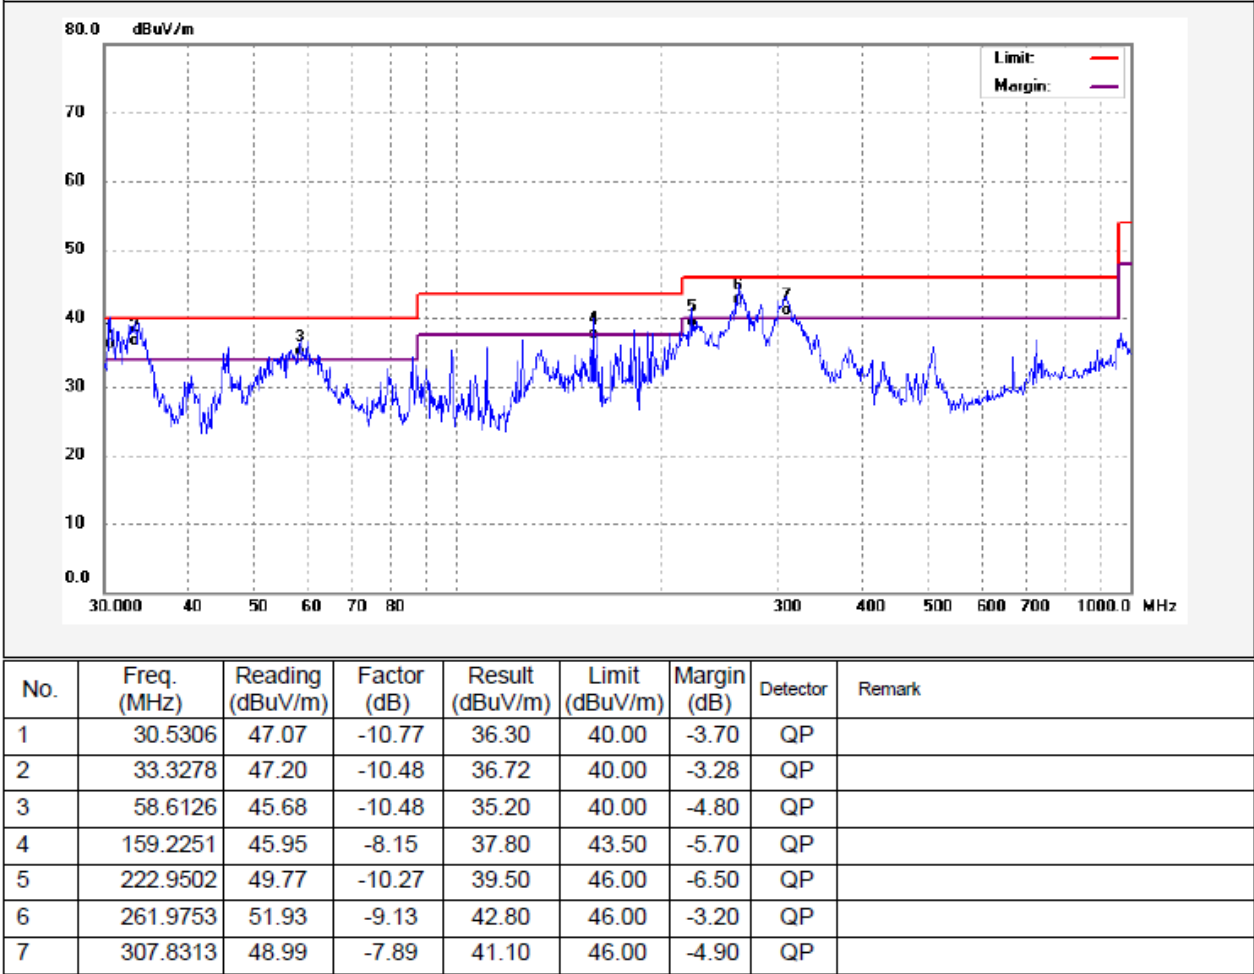


Test Frequency: Above 1G

Remark: only the worst data (802.11b) were reported


Low:

Antenna Polarization: Horizontal

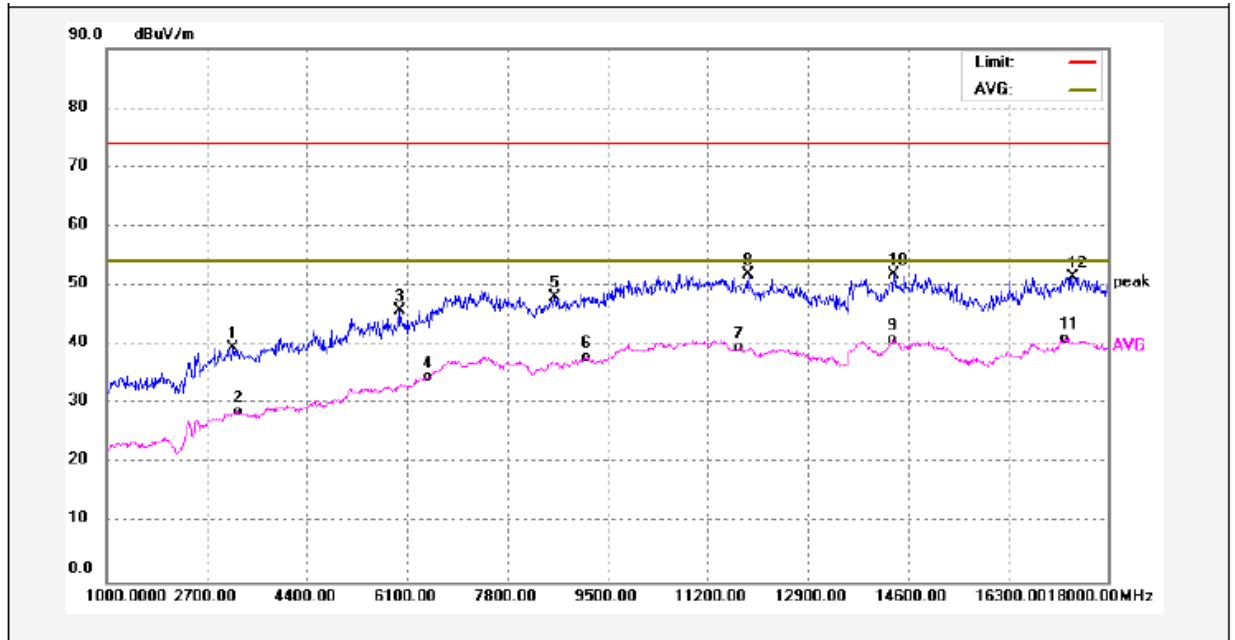

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	3142.000	48.45	-8.96	39.49	74.00	-34.51	peak	
2	3227.000	37.58	-8.78	28.80	54.00	-25.20	AVG	
3	5981.000	49.51	-3.64	45.87	74.00	-28.13	peak	
4	6457.000	36.44	-1.81	34.63	54.00	-19.37	AVG	
5	8599.000	46.74	1.27	48.01	74.00	-25.99	peak	
6	9143.000	35.86	2.01	37.87	54.00	-16.13	AVG	
7	11727.000	35.02	4.42	39.44	54.00	-14.56	AVG	
8	11880.000	47.89	4.07	51.96	74.00	-22.04	peak	
9	14345.000	31.32	9.47	40.79	54.00	-13.21	AVG	
10	14362.000	42.47	9.50	51.97	74.00	-22.03	peak	
11	17269.000	29.43	11.72	41.15	54.00	-12.85	AVG	
12	17405.000	39.48	12.02	51.50	74.00	-22.50	peak	


Antenna Polarization: Vertical

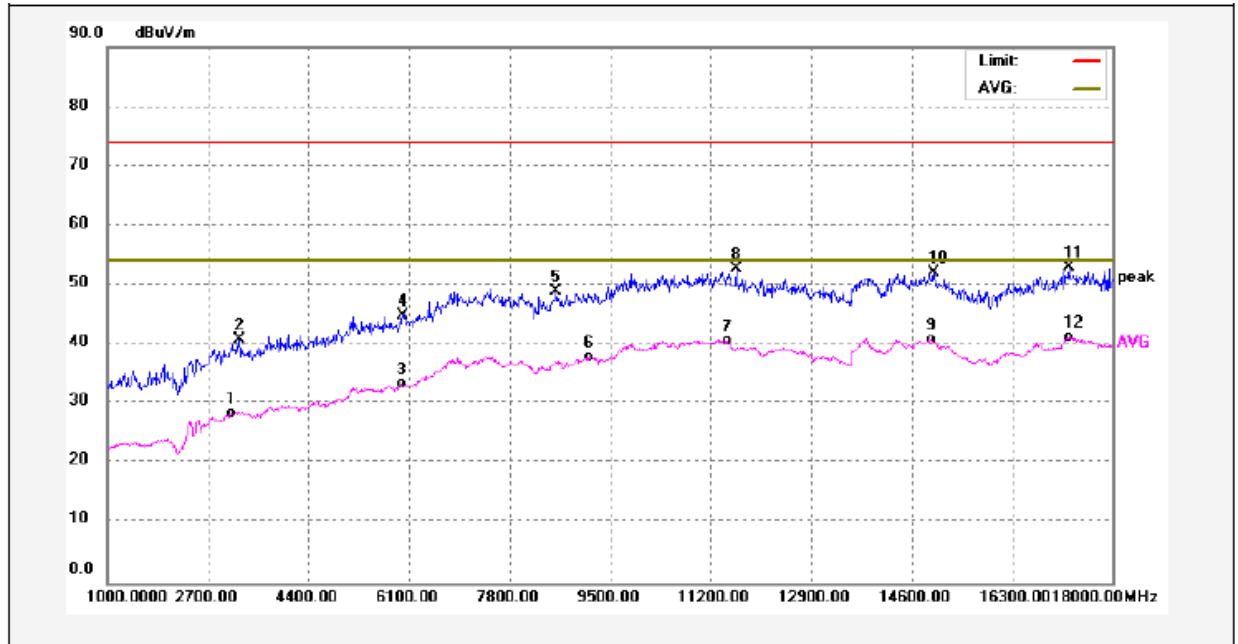

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	3074.000	37.60	-9.22	28.38	54.00	-25.62	AVG	
2	3227.000	49.71	-8.78	40.93	74.00	-33.07	peak	
3	5964.000	37.05	-3.67	33.38	54.00	-20.62	AVG	
4	5998.000	48.56	-3.61	44.95	74.00	-29.05	peak	
5	8582.000	47.62	1.23	48.85	74.00	-25.15	peak	
6	9143.000	35.92	2.01	37.93	54.00	-16.07	AVG	
7	11472.000	35.58	4.96	40.54	54.00	-13.46	AVG	
8	11642.000	48.14	4.62	52.76	74.00	-21.24	peak	
9	14923.000	31.70	9.07	40.77	54.00	-13.23	AVG	
10	14974.000	43.20	8.99	52.19	74.00	-21.81	peak	
11	17252.000	41.29	11.67	52.96	74.00	-21.04	peak	
12	17252.000	29.63	11.67	41.30	54.00	-12.70	AVG	


Middle:

Antenna Polarization: Horizontal

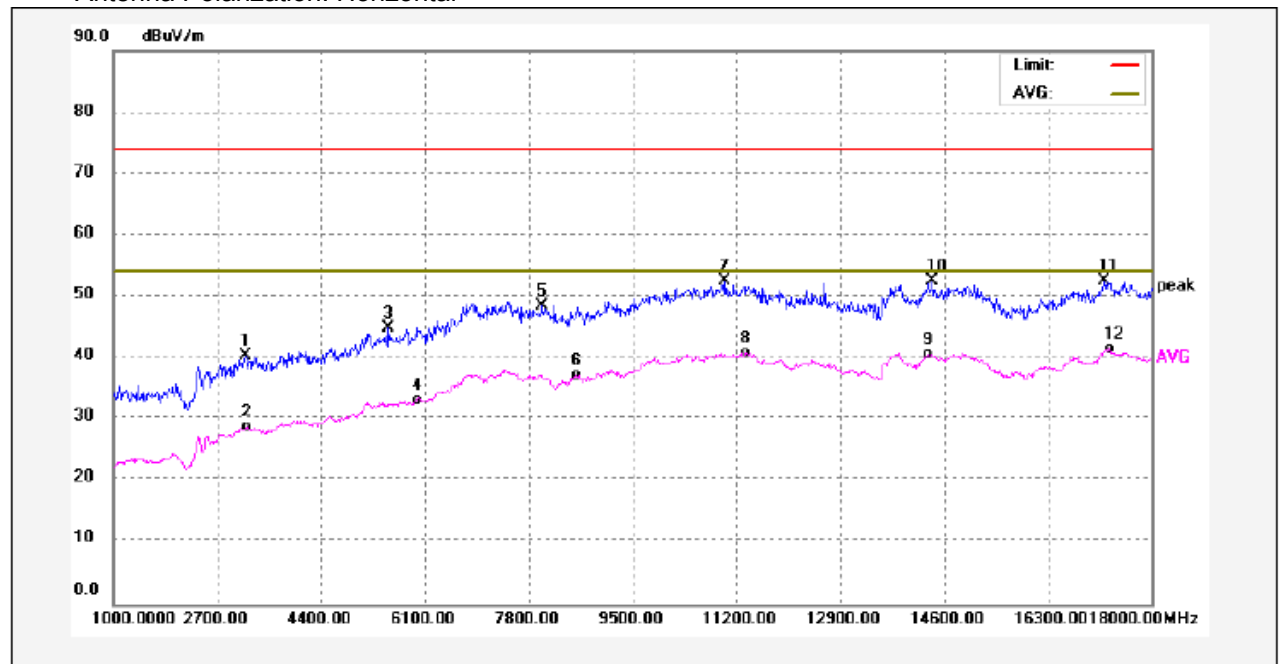

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	3159.000	49.26	-8.90	40.36	74.00	-33.64	peak	
2	3193.000	37.62	-8.78	28.84	54.00	-25.16	AVG	
3	5505.000	49.25	-4.45	44.80	74.00	-29.20	peak	
4	5947.000	36.97	-3.70	33.27	54.00	-20.73	AVG	
5	8021.000	47.73	0.76	48.49	74.00	-25.51	peak	
6	8582.000	36.09	1.23	37.32	54.00	-16.68	AVG	
7	11013.000	47.56	5.02	52.58	74.00	-21.42	peak	
8	11353.000	35.91	4.98	40.89	54.00	-13.11	AVG	
9	14345.000	31.25	9.47	40.72	54.00	-13.28	AVG	
10	14413.000	42.91	9.59	52.50	74.00	-21.50	peak	
11	17218.000	40.88	11.61	52.49	74.00	-21.51	peak	
12	17303.000	29.71	11.80	41.51	54.00	-12.49	AVG	


Antenna Polarization: Vertical

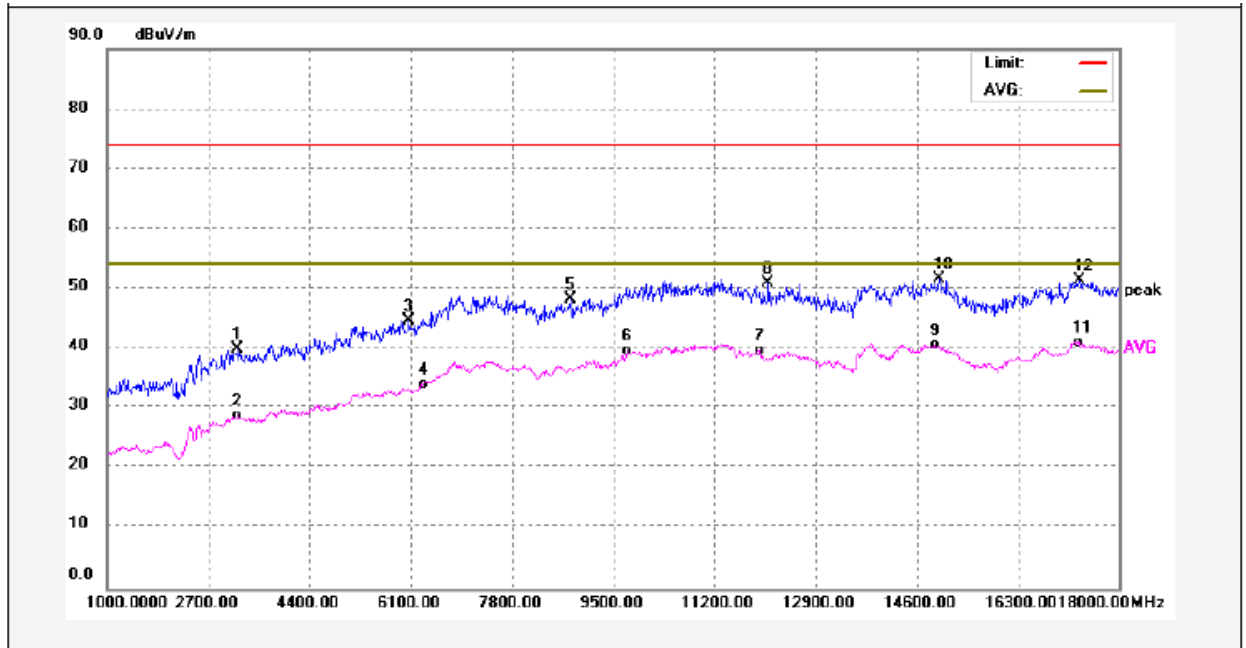

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	3193.000	48.66	-8.78	39.88	74.00	-34.12	peak	
2	3193.000	37.74	-8.78	28.96	54.00	-25.04	AVG	
3	6066.000	48.17	-3.48	44.69	74.00	-29.31	peak	
4	6270.000	36.92	-2.85	34.07	54.00	-19.93	AVG	
5	8786.000	46.50	1.78	48.28	74.00	-25.72	peak	
6	9738.000	36.86	2.88	39.74	54.00	-14.26	AVG	
7	11948.000	35.73	3.90	39.63	54.00	-14.37	AVG	
8	12101.000	46.96	3.96	50.92	74.00	-23.08	peak	
9	14906.000	31.43	9.09	40.52	54.00	-13.48	AVG	
10	14974.000	42.72	8.99	51.71	74.00	-22.29	peak	
11	17303.000	29.35	11.80	41.15	54.00	-12.85	AVG	
12	17337.000	39.46	11.86	51.32	74.00	-22.68	peak	


High:

Antenna Polarization: Horizontal

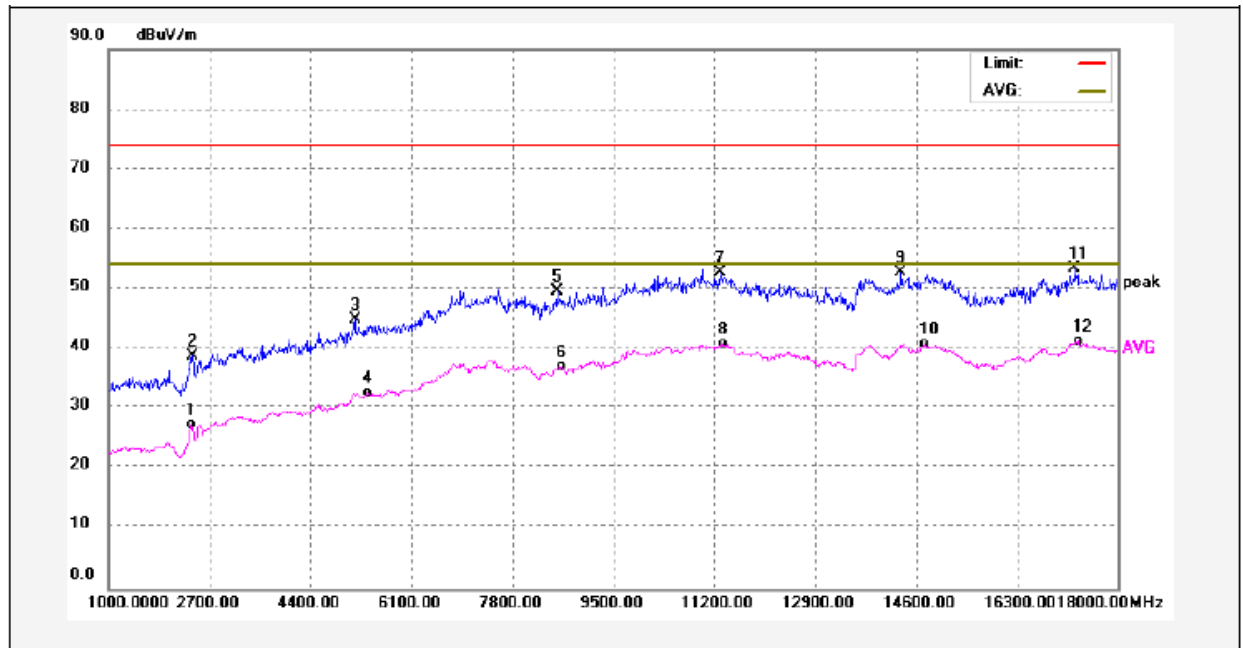

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2394.000	38.04	-10.75	27.29	54.00	-26.71	AVG	
2	2411.000	49.63	-10.74	38.89	74.00	-35.11	peak	
3	5148.000	49.79	-4.94	44.85	74.00	-29.15	peak	
4	5369.000	37.08	-4.39	32.69	54.00	-21.31	AVG	
5	8548.000	48.47	1.13	49.60	74.00	-24.40	peak	
6	8633.000	35.66	1.36	37.02	54.00	-16.98	AVG	
7	11302.000	47.79	4.98	52.77	74.00	-21.23	peak	
8	11353.000	35.91	4.98	40.89	54.00	-13.11	AVG	
9	14345.000	43.38	9.47	52.85	74.00	-21.15	peak	
10	14736.000	31.47	9.36	40.83	54.00	-13.17	AVG	
11	17269.000	41.71	11.72	53.43	74.00	-20.57	peak	
12	17320.000	29.42	11.82	41.24	54.00	-12.76	AVG	

Antenna Polarization: Vertical

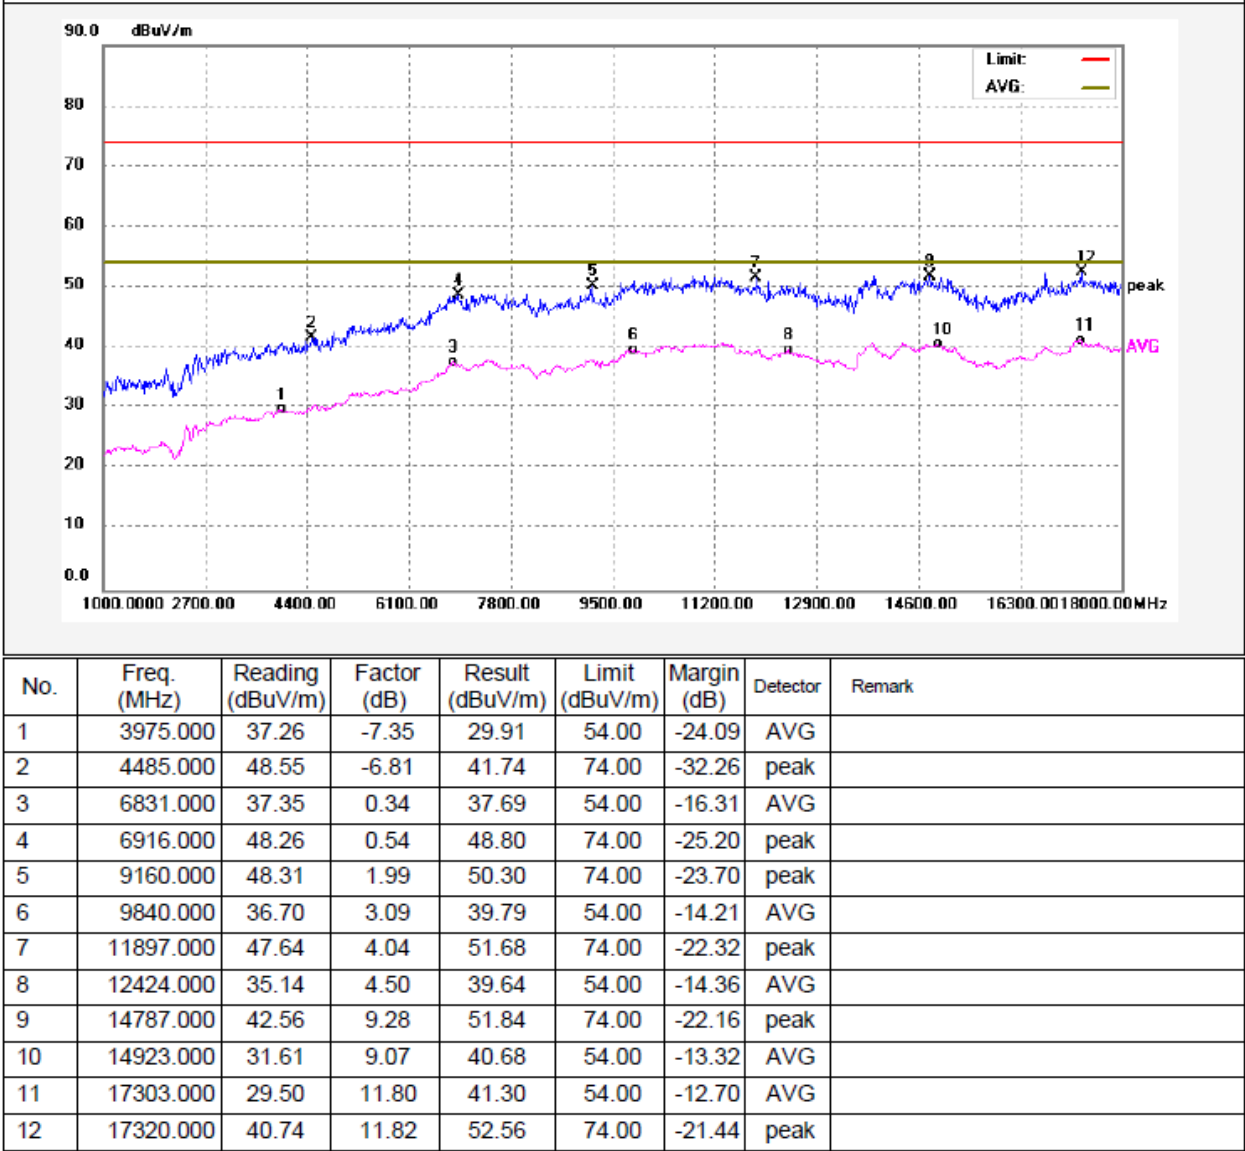


Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.


Radiated Restricted Band Emission

Remark: only the worst data (802.11b Low channel mode) were reported

Antenna Polarization: Horizontal

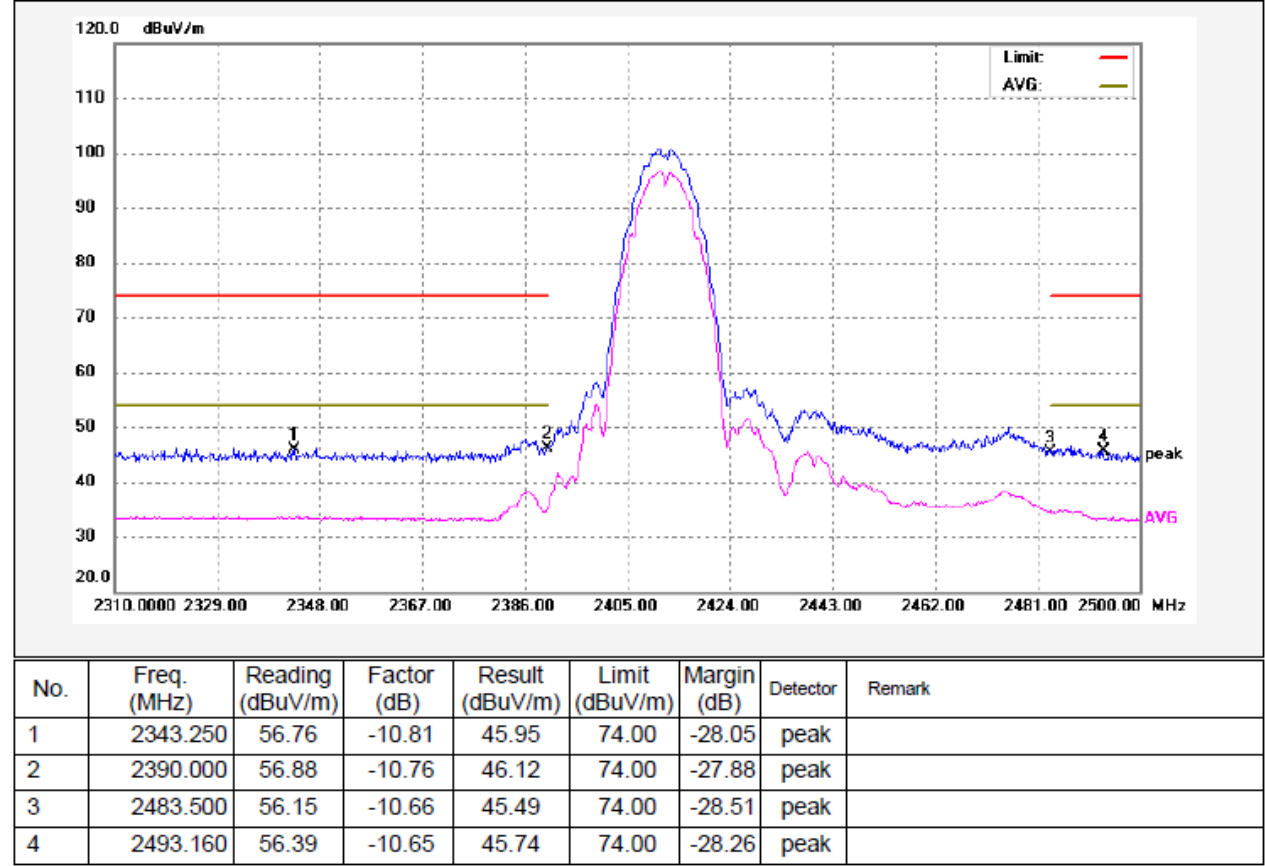


Antenna Polarization: Vertical

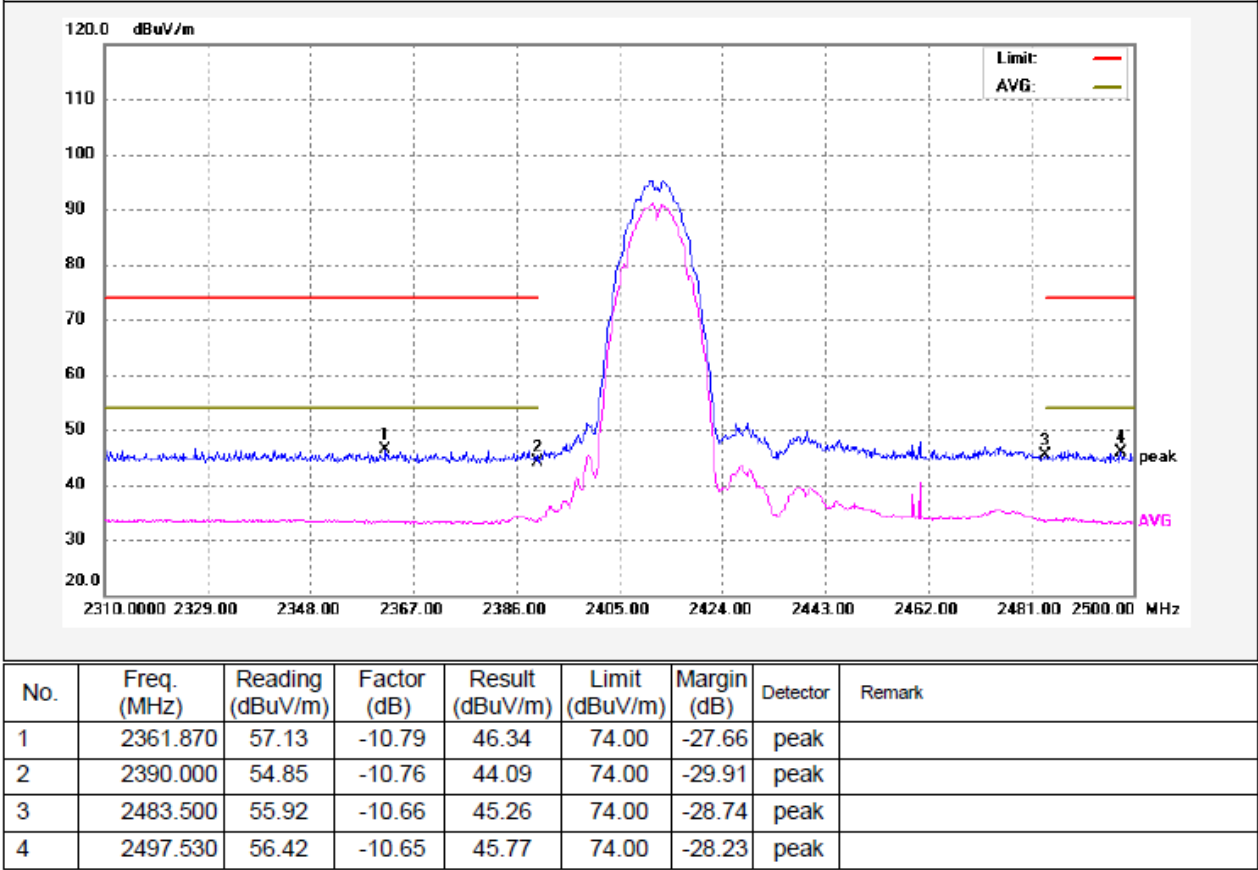


11b-High


Antenna Polarization: Horizontal

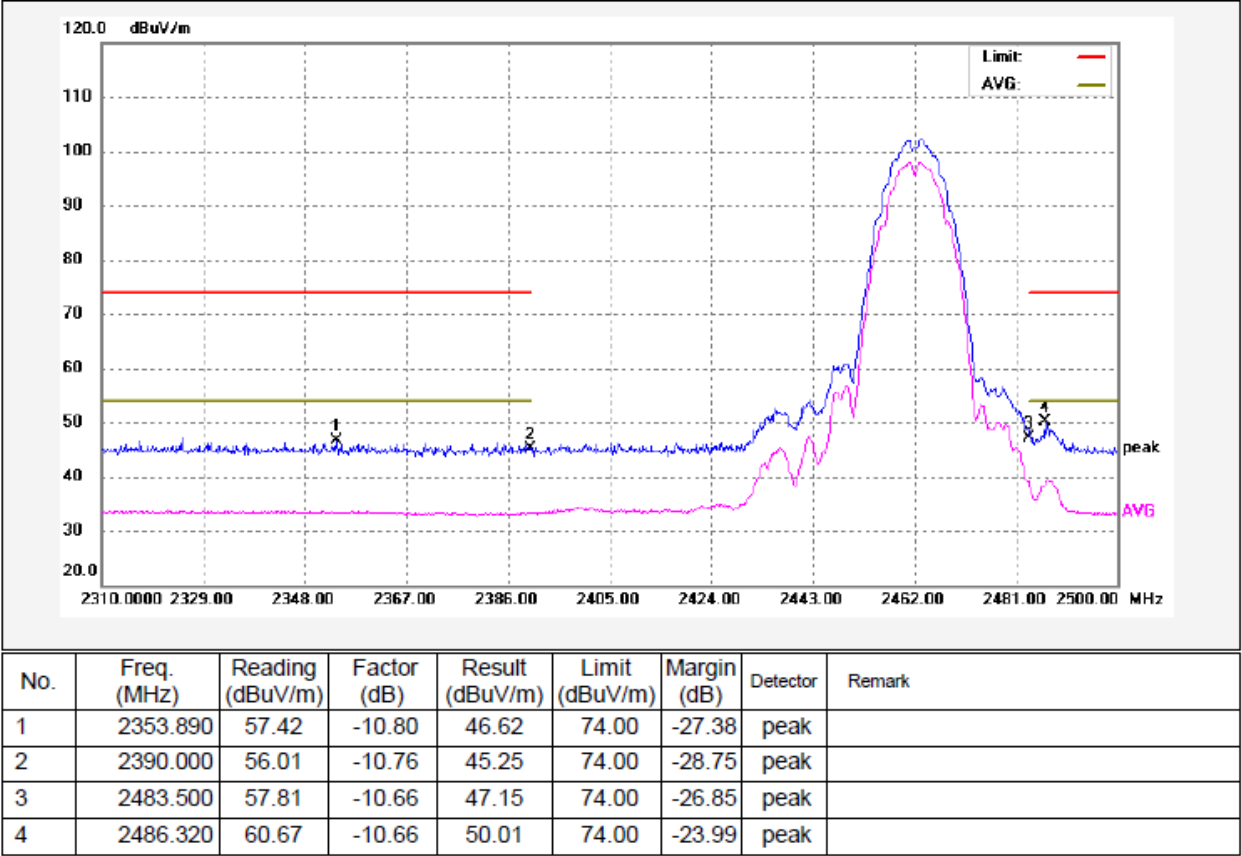

Antenna Polarization: Vertical

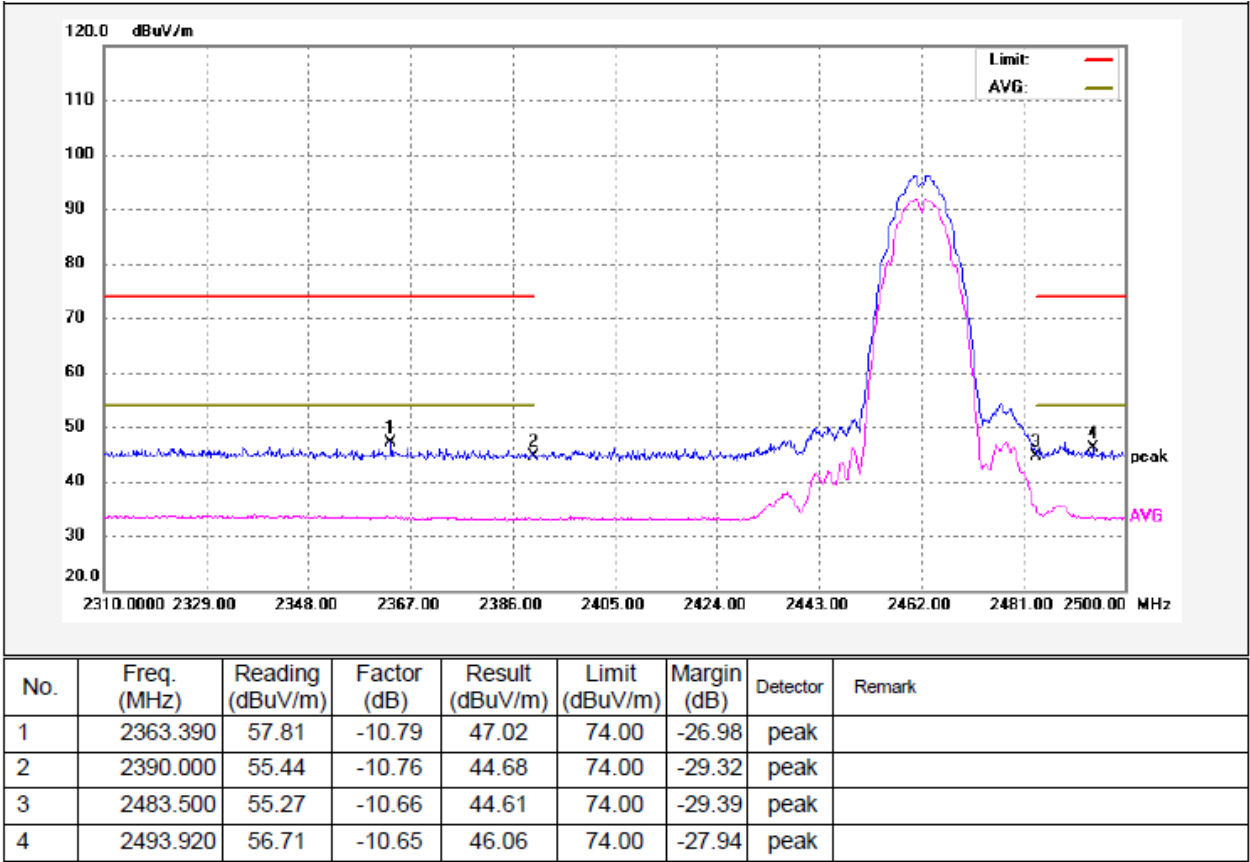


Antenna Polarization: Vertical

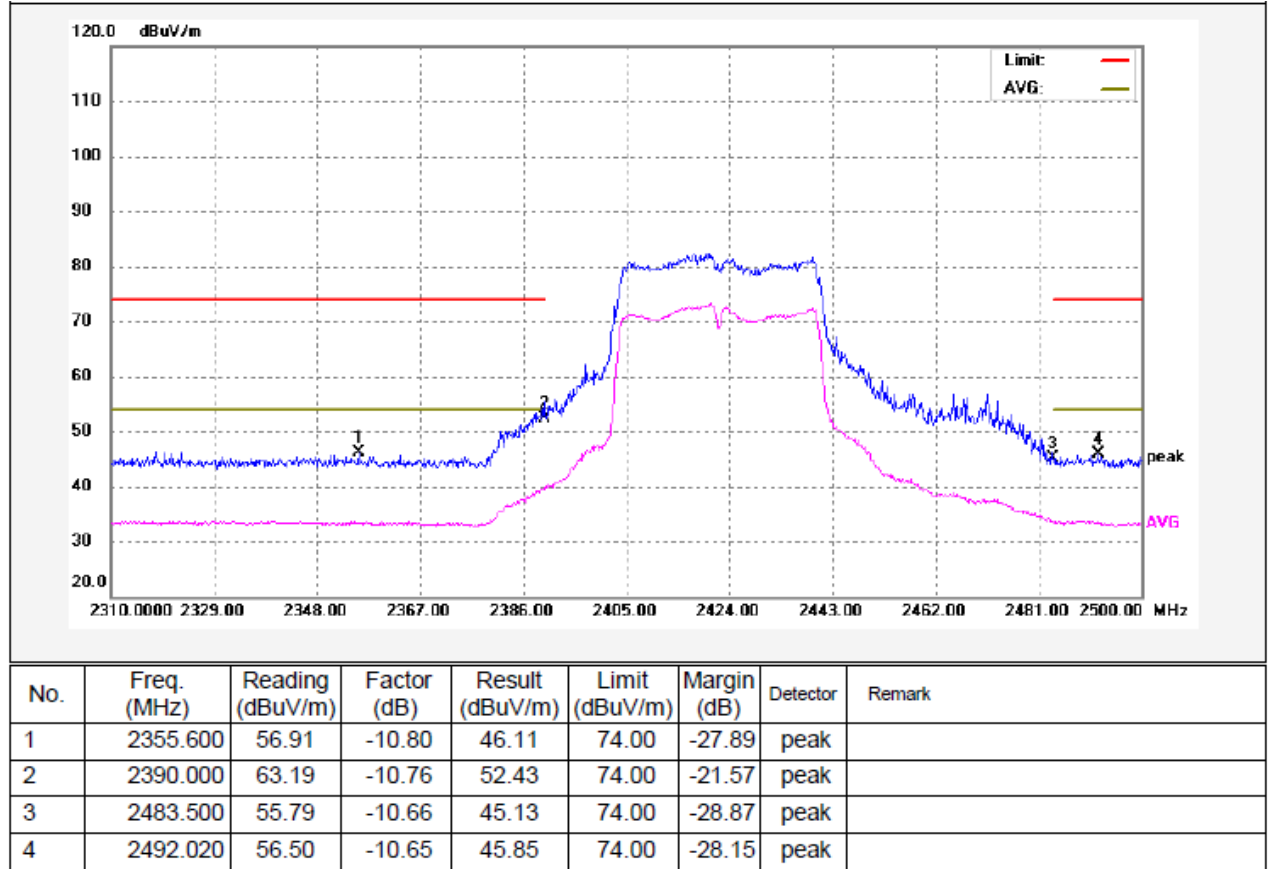


n HT40-High

Antenna Polarization: Horizontal

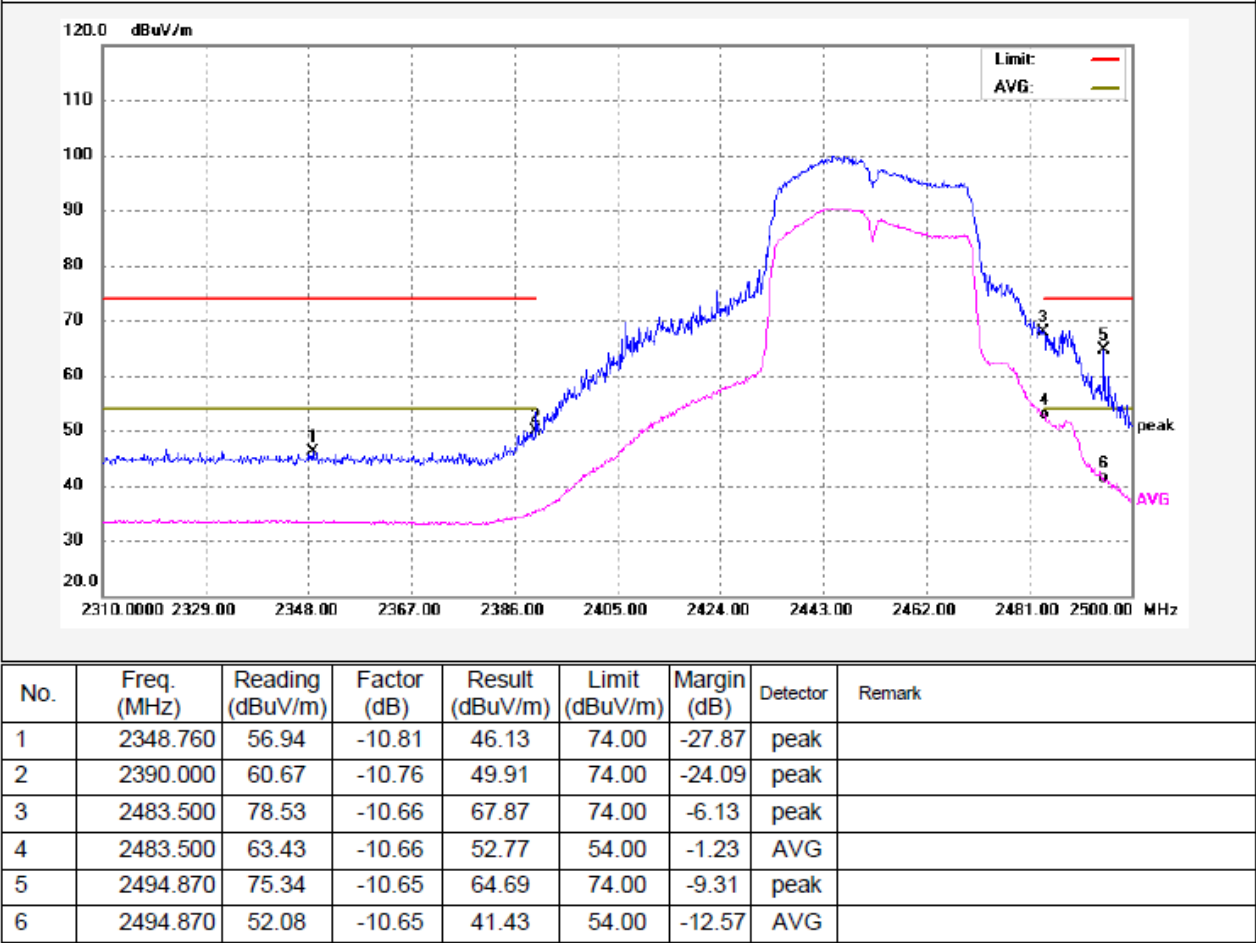

Antenna Polarization: Vertical

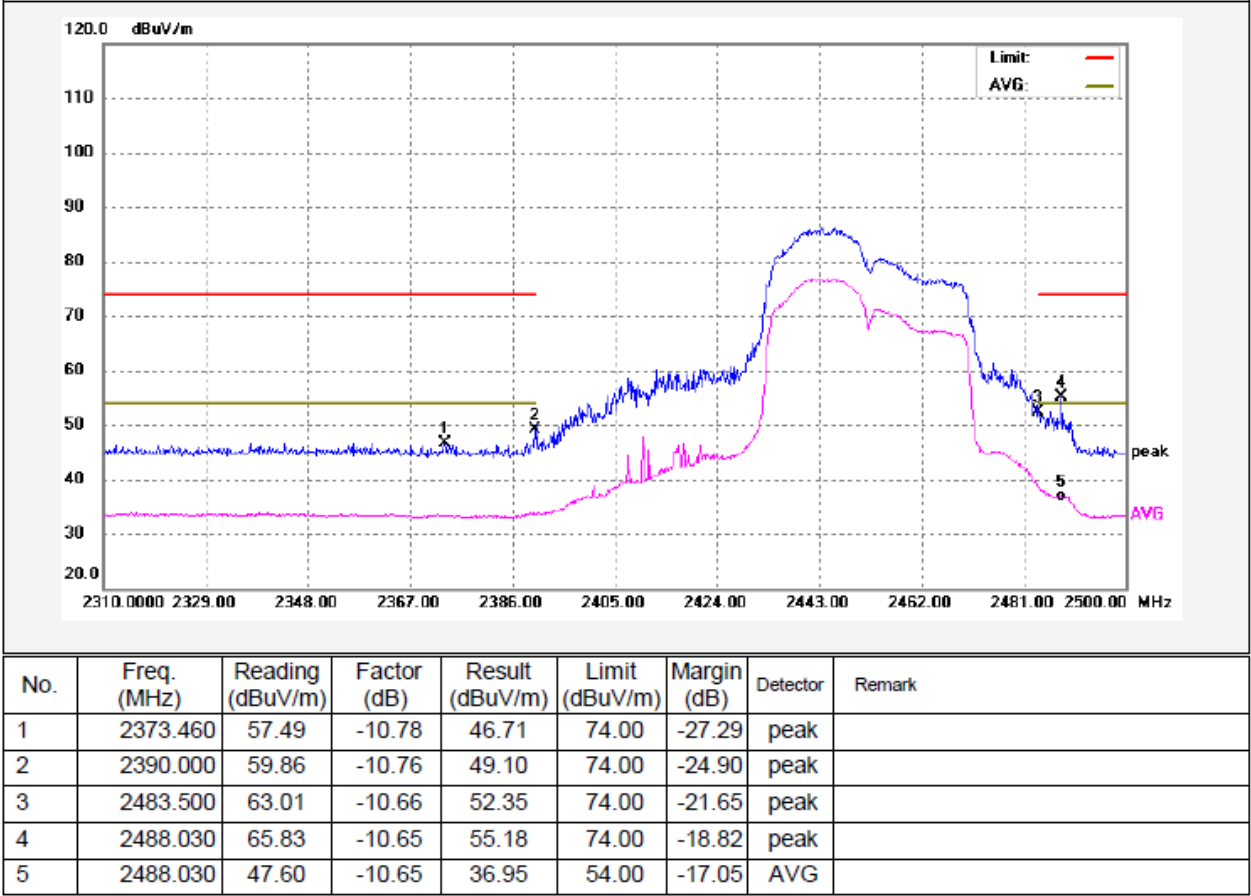

10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
ANSI C63.10-2020

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 30MHz:


RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

10.2 Test Result


9kHz – 150kHz

Mode: TX 11b channel 1

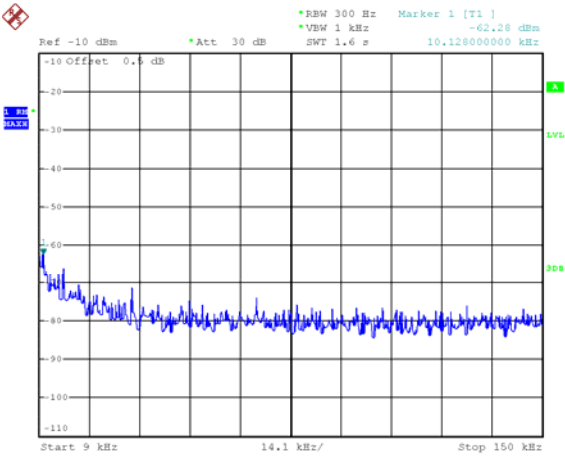


Date: 19.MAR.2026 08:26:44

Mode: TX 11b channel 6

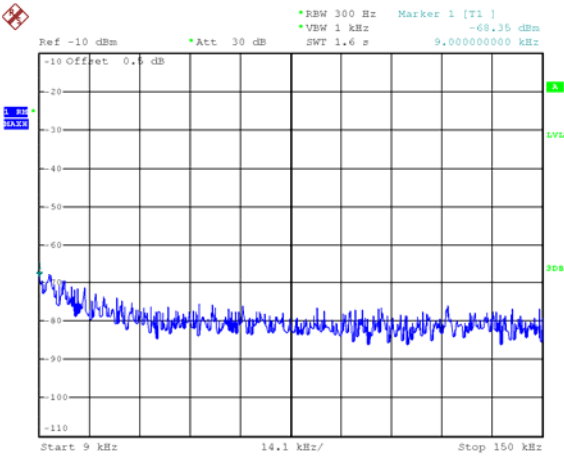


Date: 19.MAR.2026 08:26:58

Mode: TX 11b channel 11

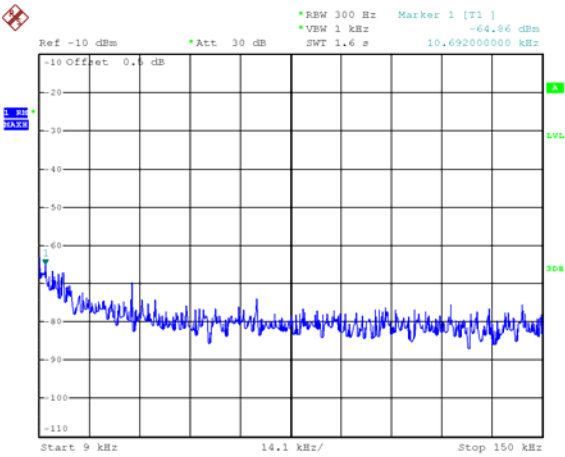


Date: 19.MAR.2026 08:26:25

Mode: TX 11g channel 1

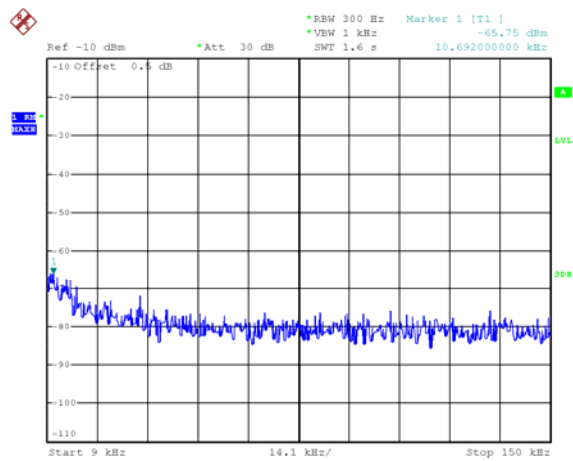


Date: 19.MAR.2026 08:27:25

Mode: TX 11g channel 6

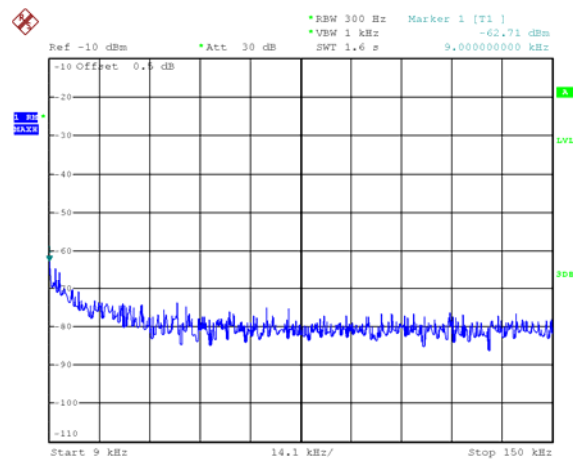


Date: 19.MAR.2026 08:27:39

Mode: TX 11g channel 11

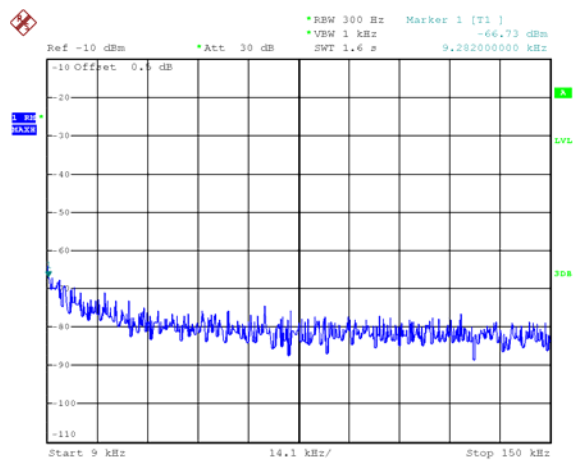


Date: 19.MAR.2026 08:27:10

Mode: TX 11n HT20 channel 1

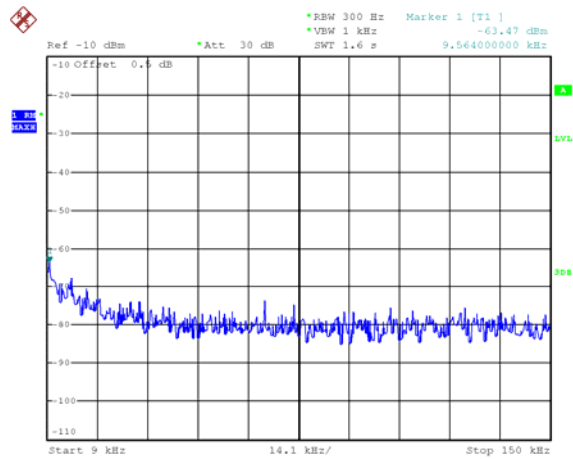


Date: 19.MAR.2026 08:28:38

Mode: TX 11 n HT20 channel 6

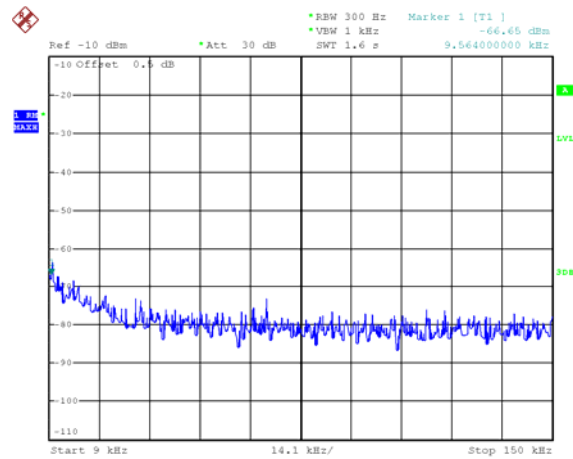


Date: 19.MAR.2026 08:29:05

Mode: TX 11 n HT20 channel 11

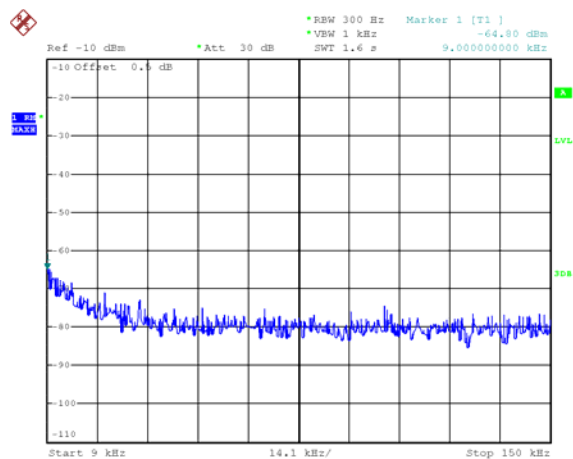


Date: 19.MAR.2026 08:28:08

Mode: TX 11n HT40 channel 3

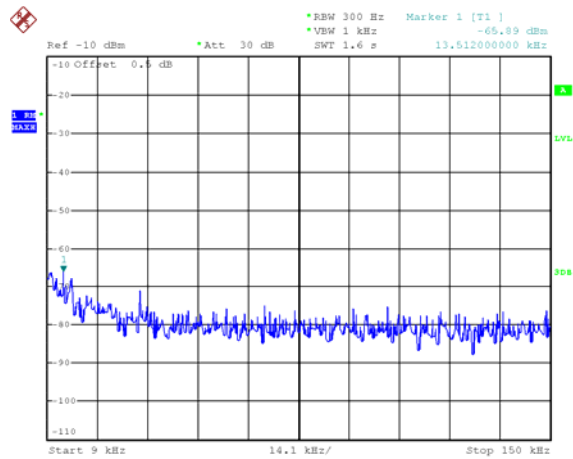


Date: 19.MAR.2026 08:29:19

Mode: TX 11 n HT40 channel 6

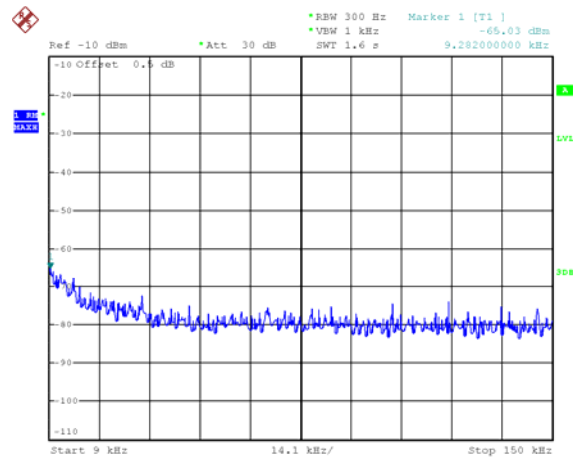

Date: 19.MAR.2026 08:29:40


Mode: TX 11 n HT40 channel 9

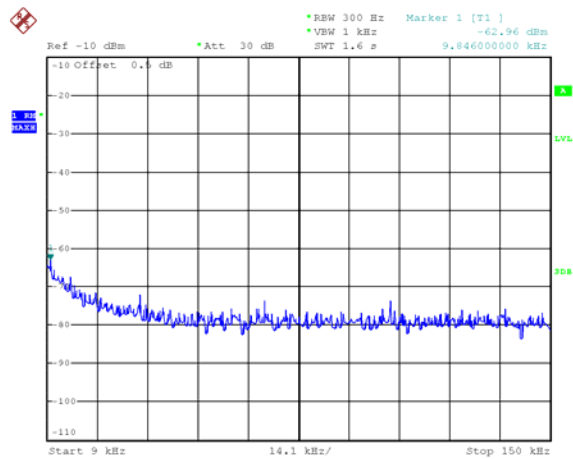

Date: 19.MAR.2026 08:30:23


150kHz – 30MHz

Mode: TX 11b channel 1

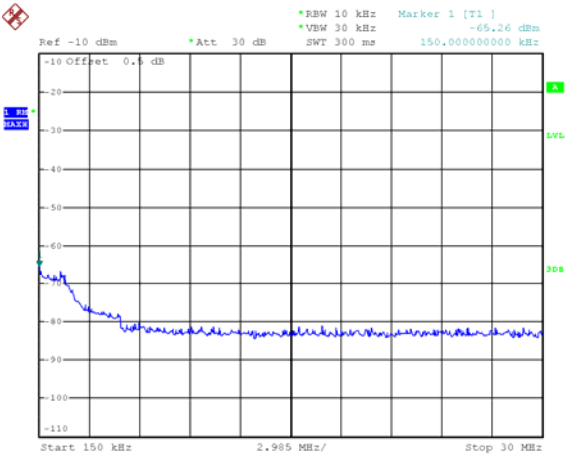


Date: 19.MAR.2026 08:35:22

Mode: TX 11b channel 6

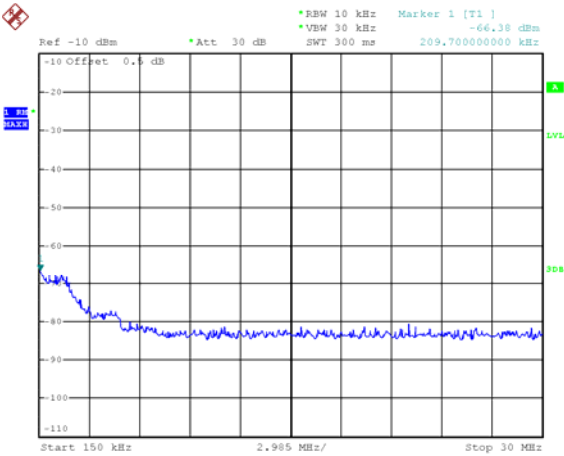


Date: 19.MAR.2026 08:35:38

Mode: TX 11b channel 11

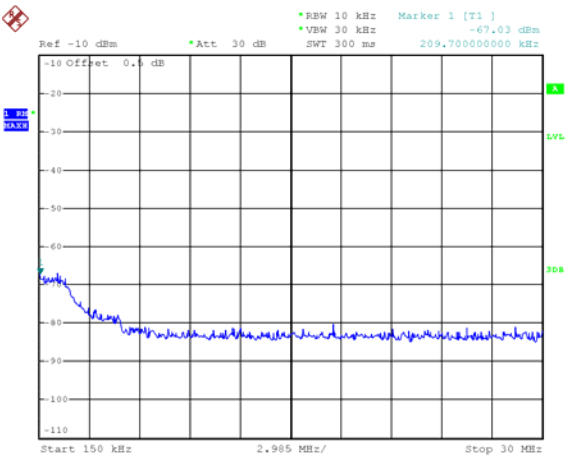


Date: 19.MAR.2026 08:36:38

Mode: TX 11g channel 1

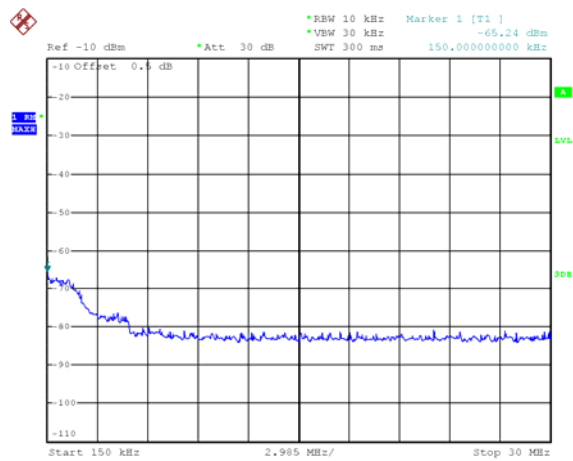


Date: 19.MAR.2026 08:37:05

Mode: TX 11g channel 6

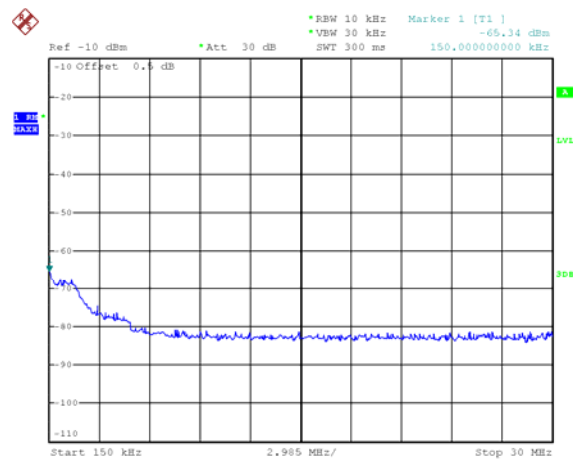


Date: 19.MAR.2026 08:37:42

Mode: TX 11g channel 11

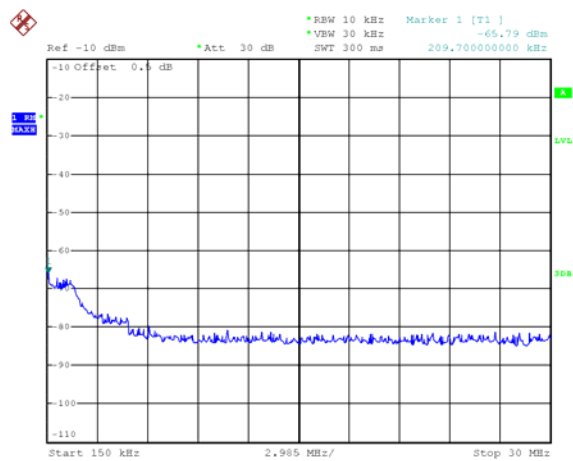


Date: 19.MAR.2026 08:37:55

Mode: TX 11n HT20 channel 1

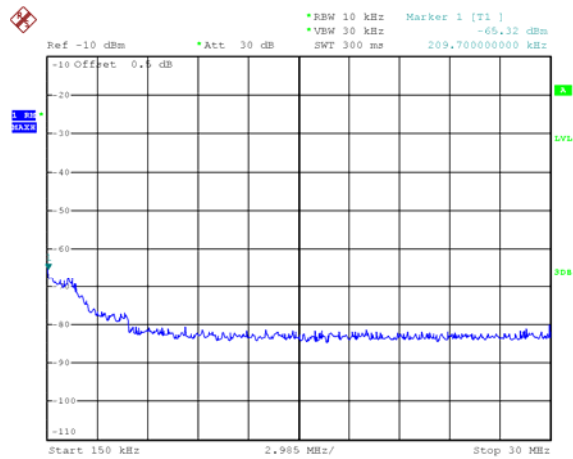


Date: 19.MAR.2026 08:38:16

Mode: TX 11 n HT20 channel 6

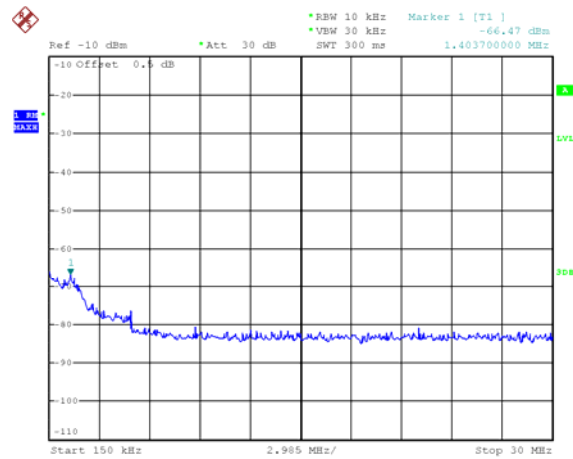


Date: 19.MAR.2026 08:38:33

Mode: TX 11 n HT20 channel 11

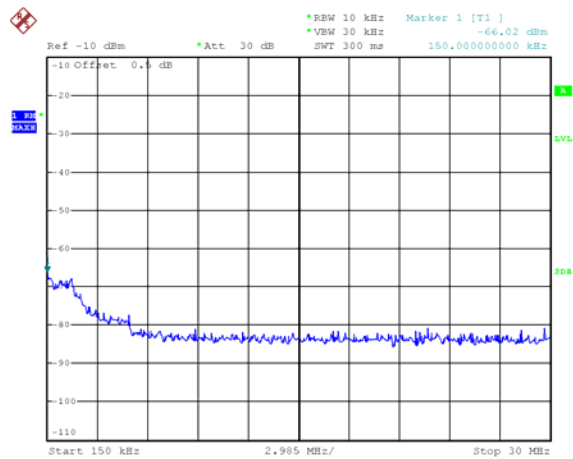


Date: 19.MAR.2026 08:38:46

Mode: TX 11n HT40 channel 3

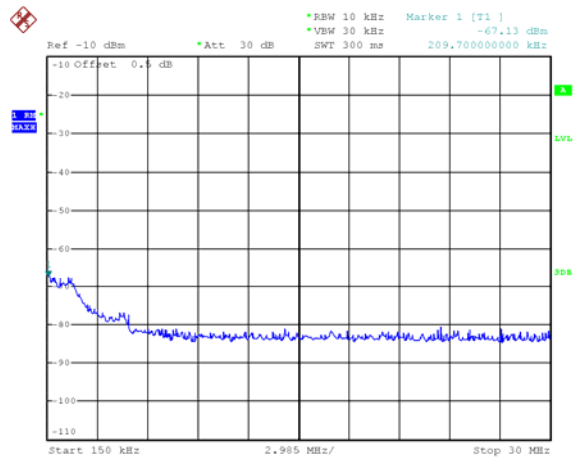


Date: 19.MAR.2026 08:39:03

Mode: TX 11 n HT40 channel 6

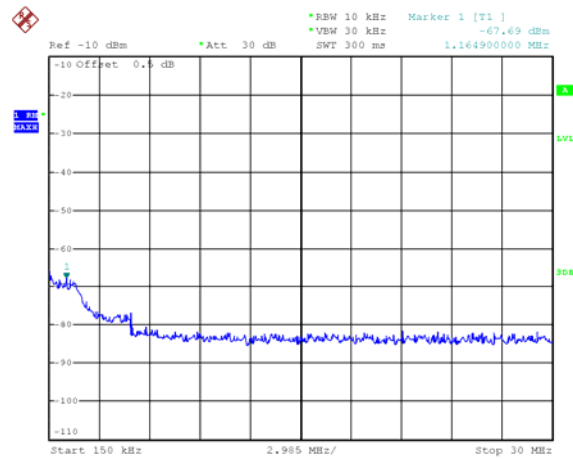

Date: 19.MAR.2026 08:39:15

Mode: TX 11 n HT40 channel 9

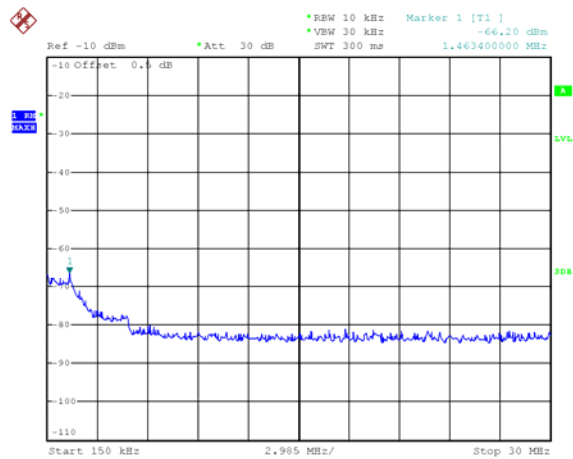


Date: 19.MAR.2026 08:39:30

Above 30MHz


Mode: TX 11b channel 1

Mode: TX 11b channel 6

Fundamental

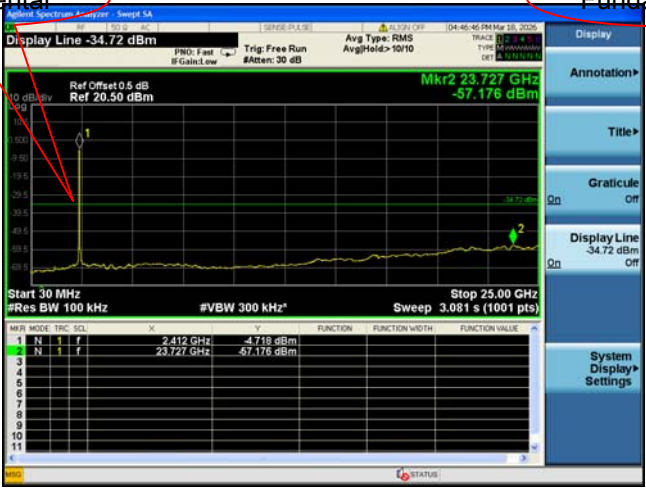


Fundamental

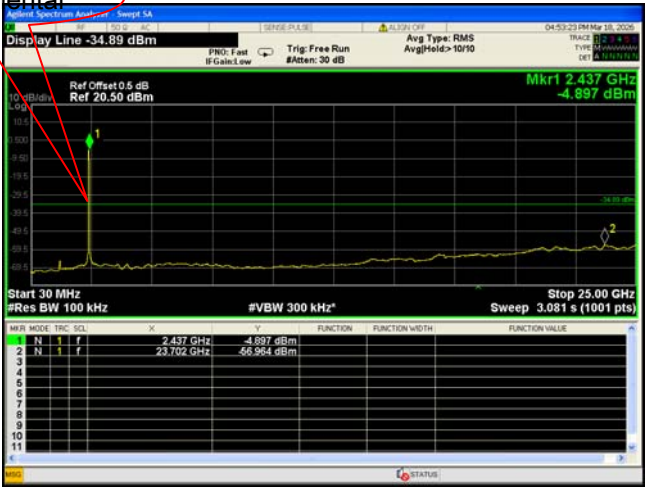



Mode: TX 11b channel 11

Fundamental

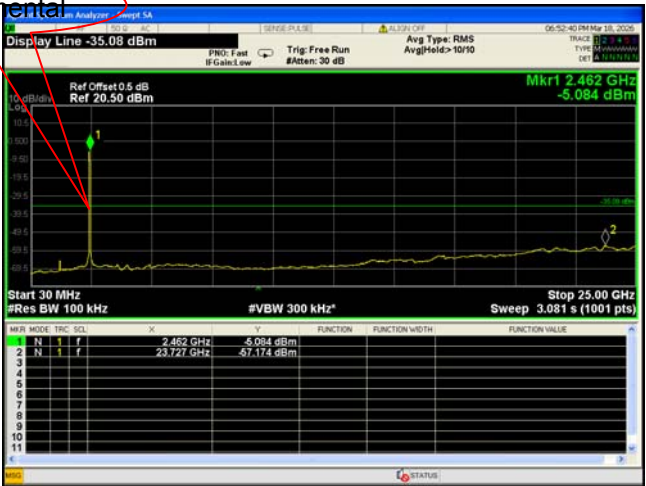

Mode: TX 11g channel 1


Mode: TX 11g channel 6

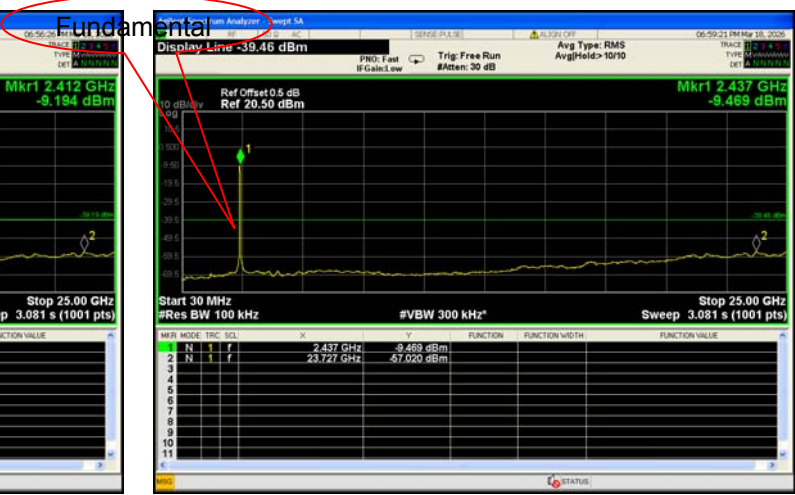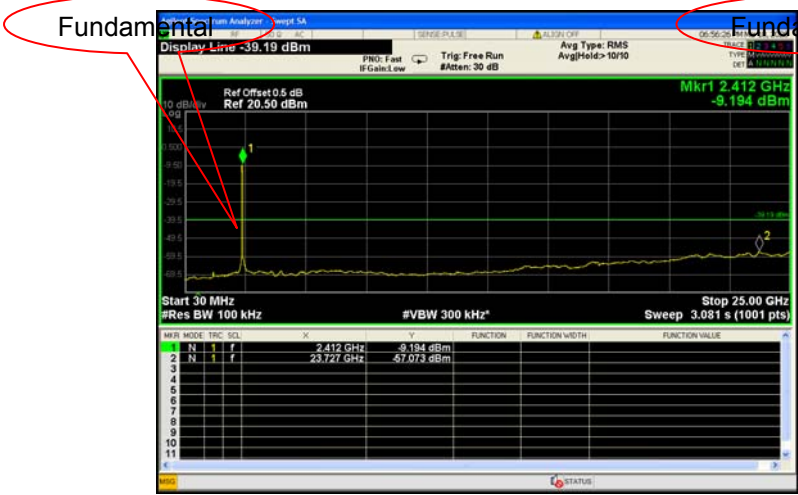


Mode: TX 11g channel 11



Mode: TX 11n HT20 channel 1

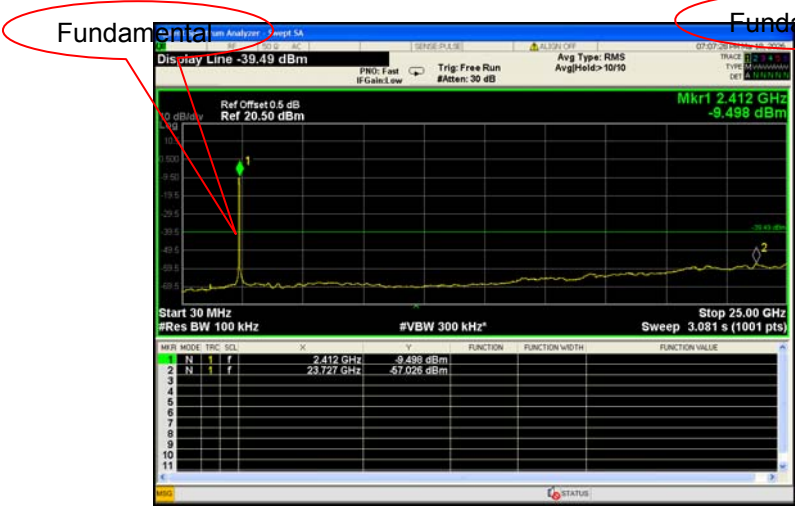

Mode: TX 11 n HT20 channel 6

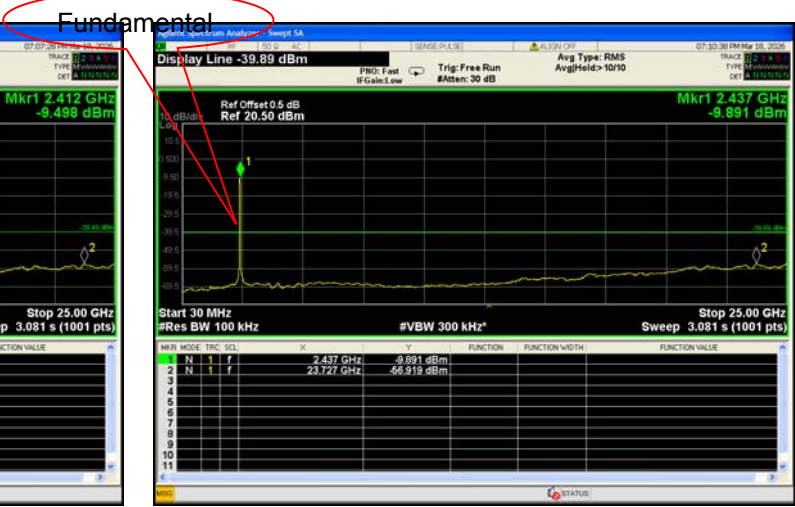


Mode: TX 11 n HT20 channel 11




Mode: TX 11n HT40 channel 3

Fundamental

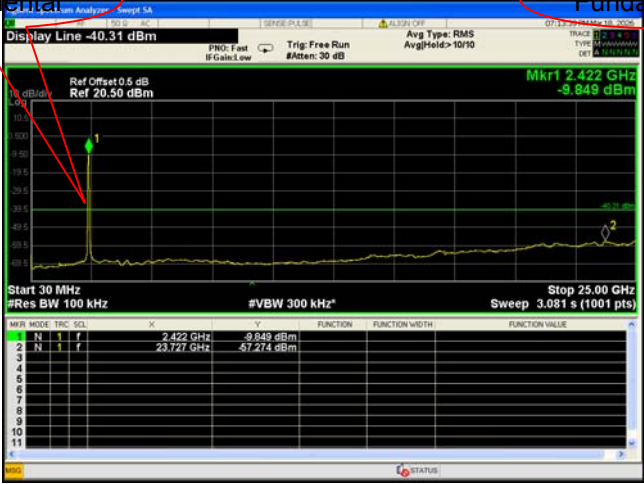


Mode: TX 11 n HT40 channel 6

Fundamental

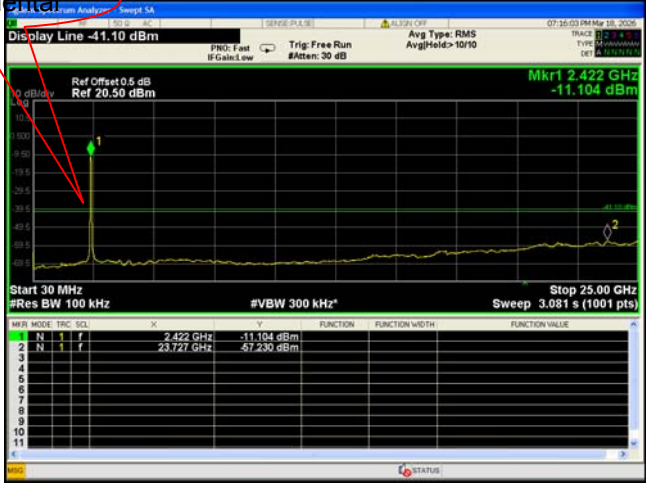

Mode: TX 11 n HT40 channel 9

Fundamental

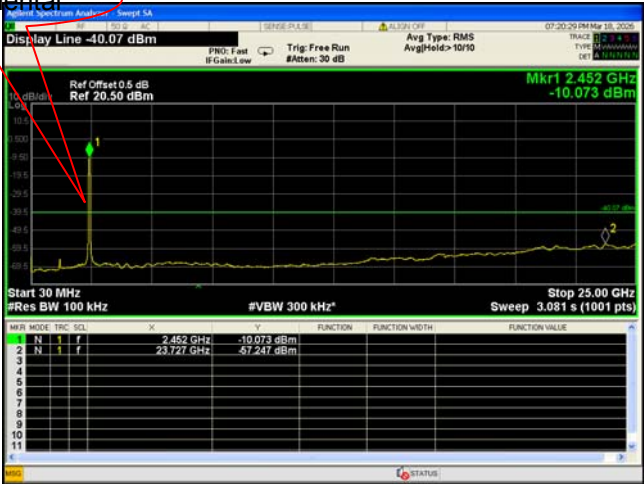

11 Band Edge Measurement

Test Requirement: 47CFR FCC Part15 Subpart C §15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Regulation 15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Mode: Transmitting


11.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.2 Test Result


Test result plots shown as follows:

TX 11b: Band edge-left side

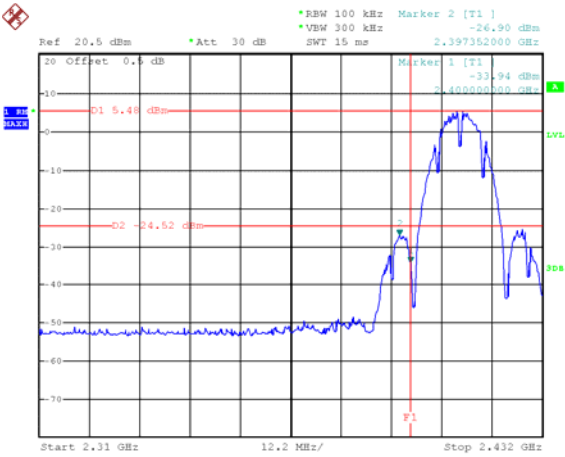


Date: 16.MAR.2026 14:30:12

TX 11b: Band edge-right side

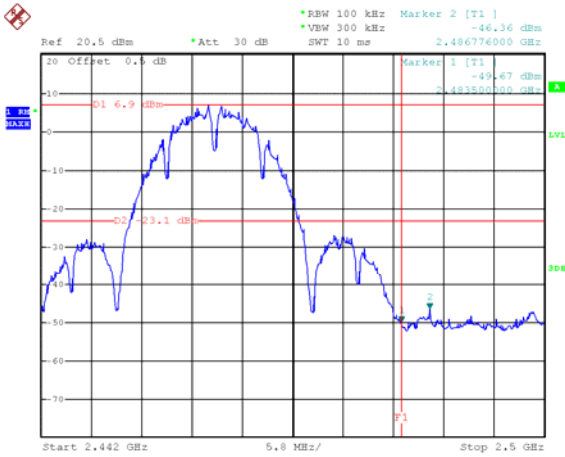


Date: 16.MAR.2026 14:59:37

TX 11g: Band edge-left side

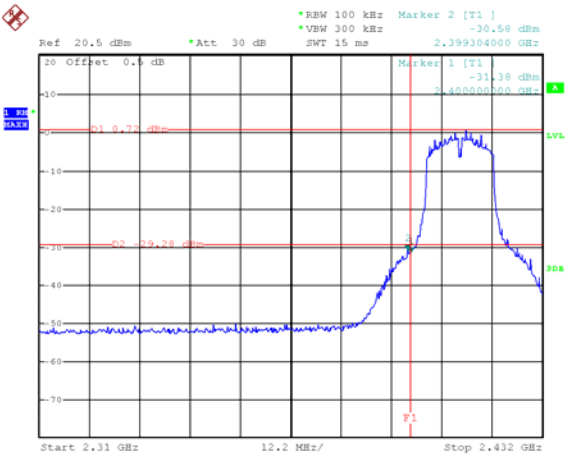


Date: 16.MAR.2026 14:43:41

TX 11g: Band edge-right side

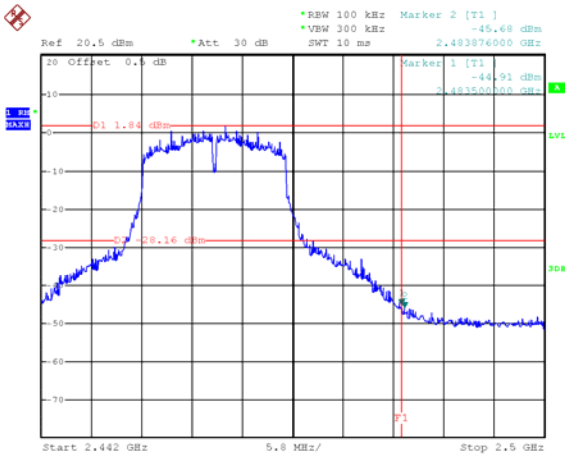


Date: 16.MAR.2026 15:01:06

TX 11n HT20: Band edge-left side

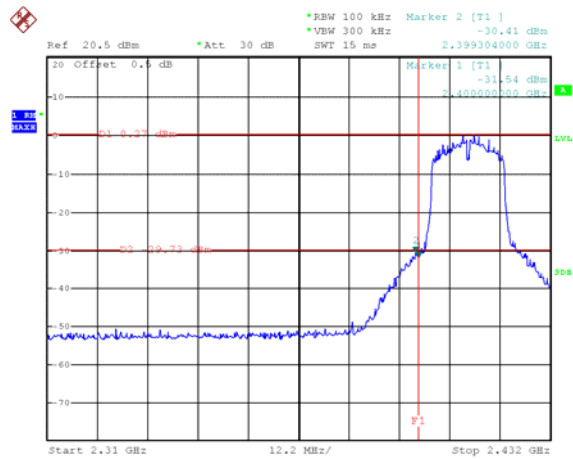


Date: 16.MAR.2026 14:46:18

TX 11n HT20: Band edge-right side

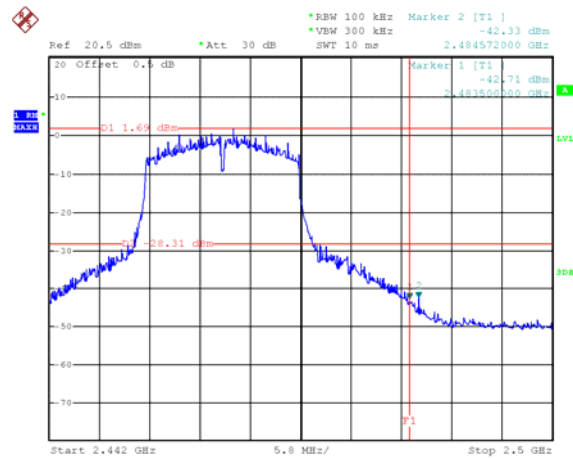


Date: 16.MAR.2026 15:04:05

TX 11n HT40: Band edge-left side

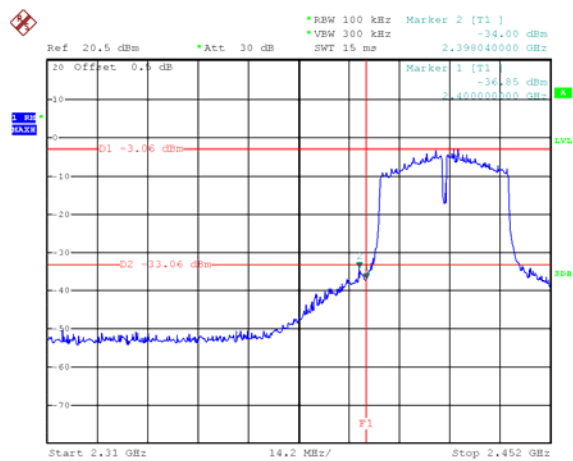

Date: 16.MAR.2026 14:56:48

TX 11n HT40: Band edge-right side

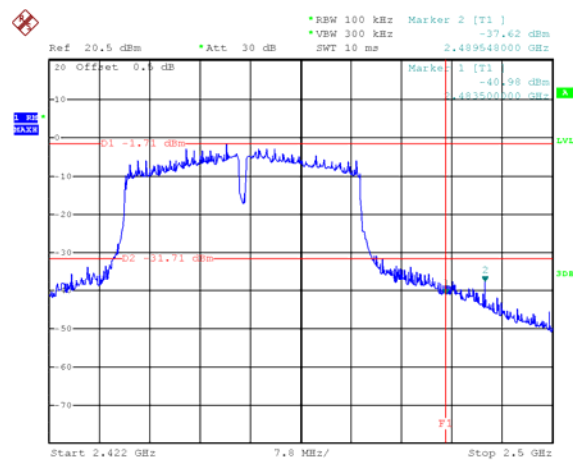

Date: 16.MAR.2026 15:05:32

12 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: 47CFR FCC Part15 Subpart C §15.247
 Test Method: ANSI C63.10-2020
 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
 Test Limit: §15.247(a)(2)
 Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
 Test Mode: Transmitting

12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. 6dB Bandwidth Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz
 99% Bandwidth Set the spectrum analyzer: 1~5% of the OBW, VBW = 3 times the RBW

12.2 Test Result


Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX 11b	Channel 1	9.600	15.060
	Channel 6	9.600	14.940
	Channel 11	10.160	14.940
TX 11g	Channel 1	15.280	16.800
	Channel 6	15.280	16.800
	Channel 11	15.280	16.800
TX 11n HT20	Channel 1	15.360	17.820
	Channel 6	15.240	17.820
	Channel 11	15.280	17.760
TX 11n HT40	Channel 3	35.240	36.240
	Channel 6	35.120	36.240
	Channel 9	35.120	36.240

Test result plot:


6 dB Bandwidth

99% Bandwidth

Mode: TX 11b channel 1

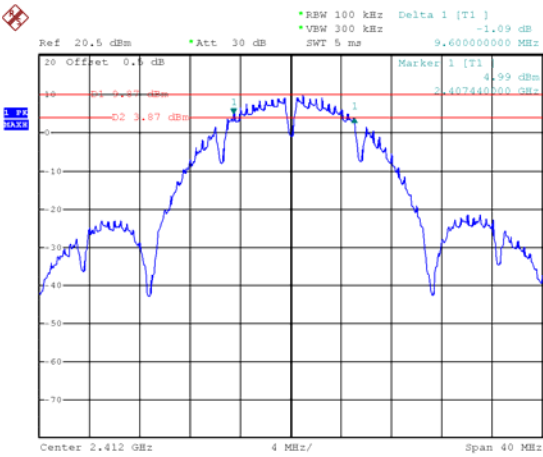


Date: 19.MAR.2026 14:05:51

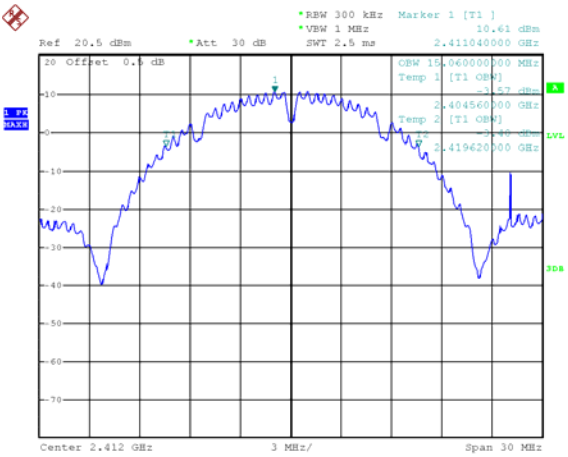


Date: 18.MAR.2026 07:13:42

Mode: TX 11b channel 6

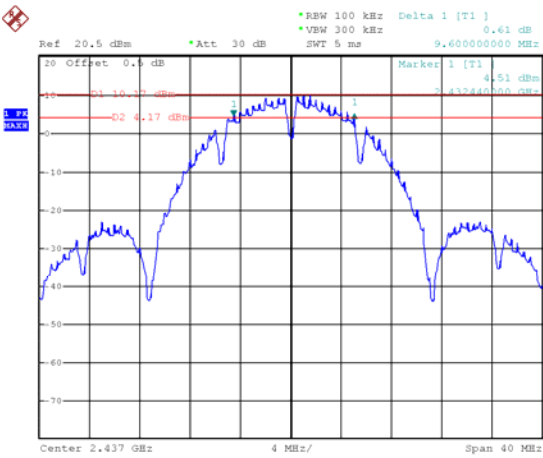

Date: 19.MAR.2026 10:01:17

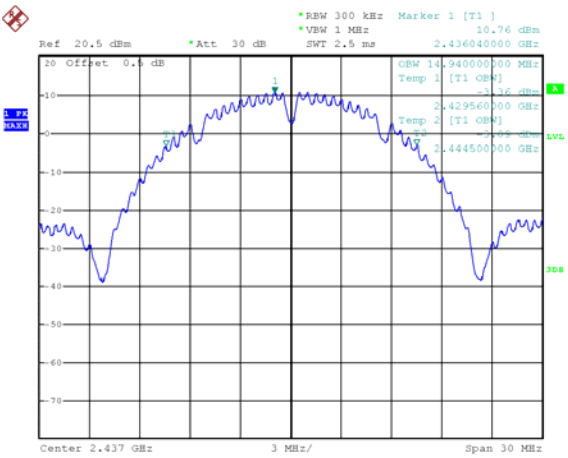


Date: 18.MAR.2026 07:14:43


6 dB Bandwidth

99% Bandwidth

Mode: TX 11b channel 11

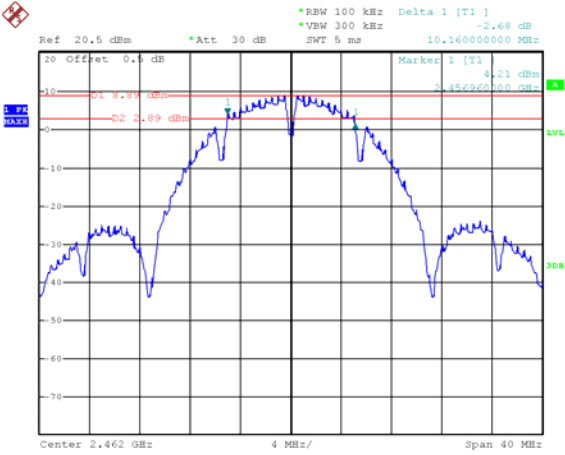


Date: 19.MAR.2026 10:02:53

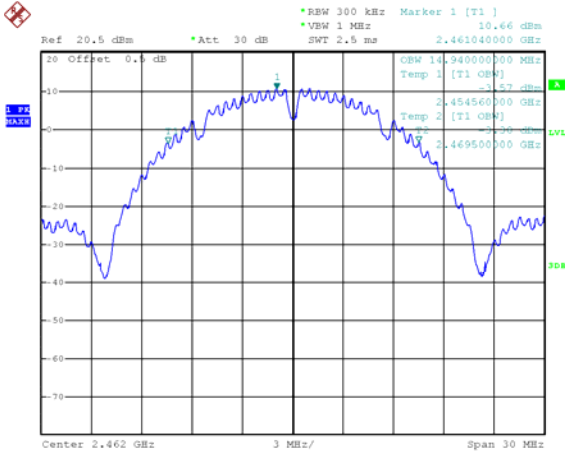


Date: 18.MAR.2026 07:15:45

Mode: TX 11g channel 1

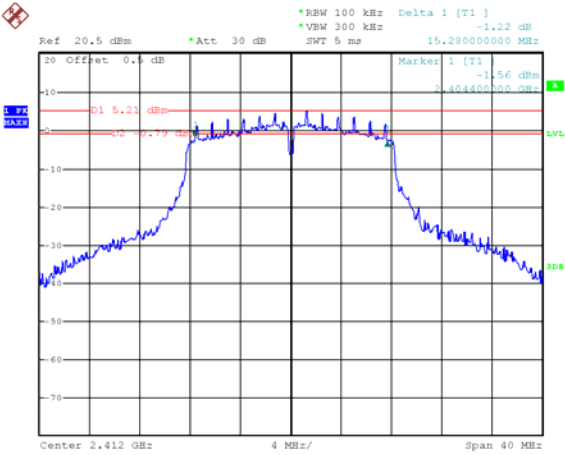

Date: 19.MAR.2026 12:01:17


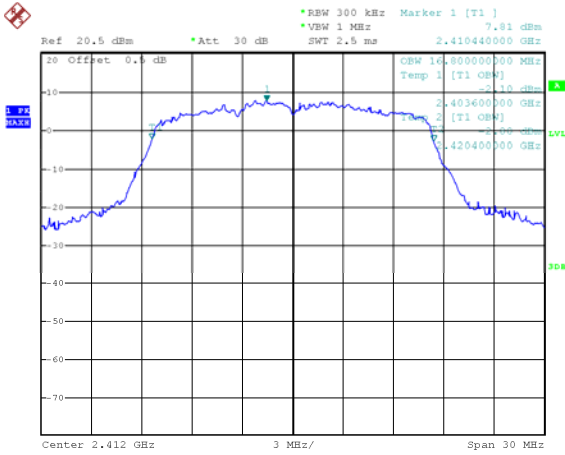


Date: 18.MAR.2026 07:17:04

6 dB Bandwidth

99% Bandwidth



Mode: TX 11g channel 6

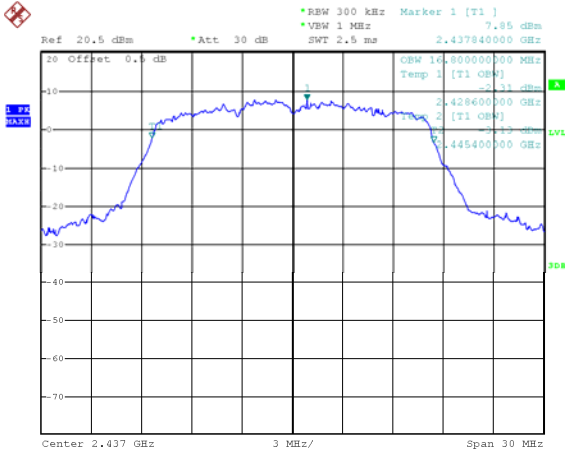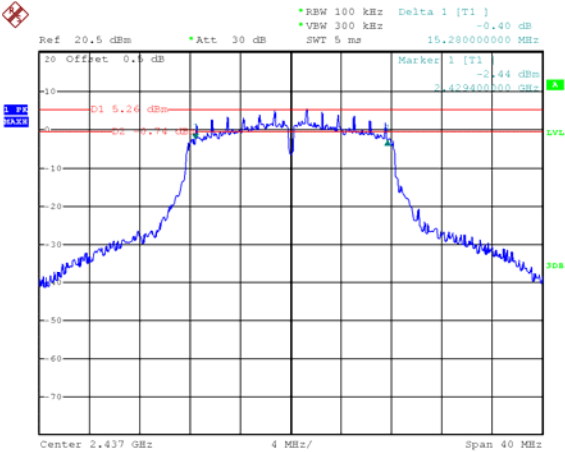

Date: 19.MAR.2026 12:02:54

Date: 18.MAR.2026 07:17:37

Mode: TX 11g channel 11

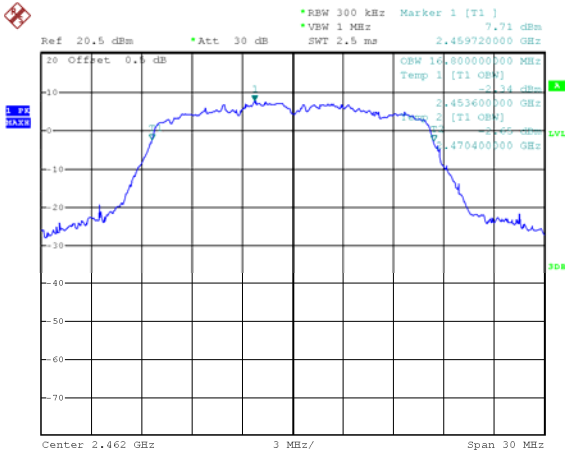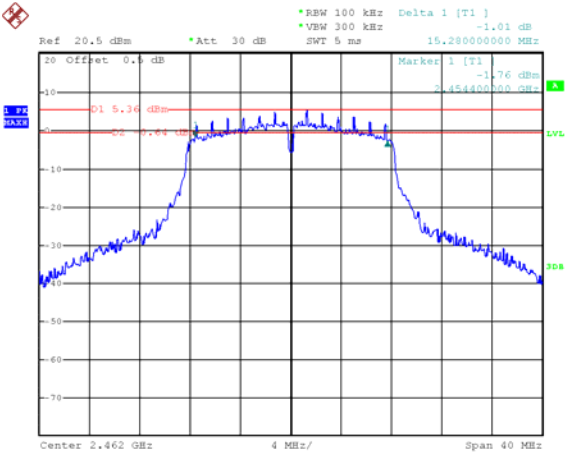



Date: 19.MAR.2026 12:09:01

Date: 18.MAR.2026 07:18:08

6 dB Bandwidth

99% Bandwidth



Mode: TX 11n HT20 channel 1

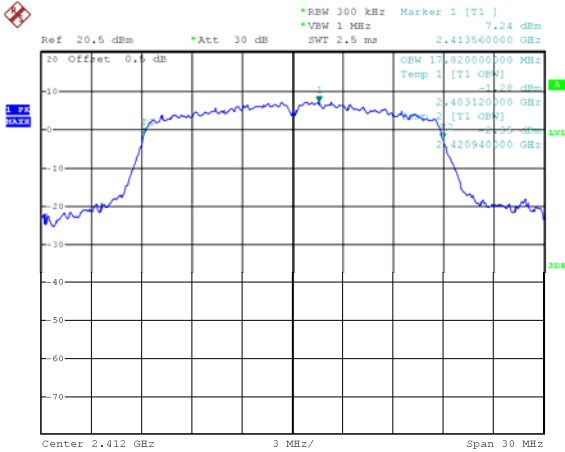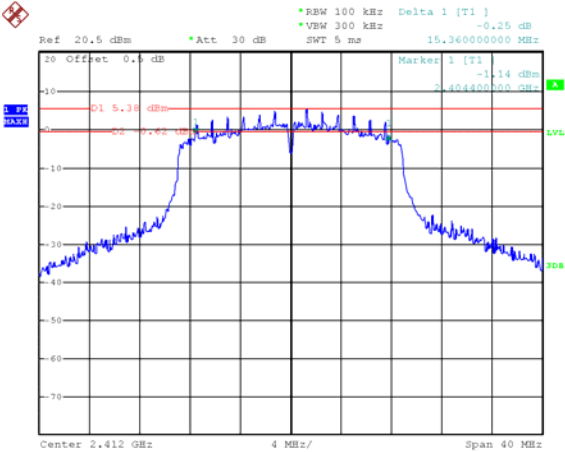

Date: 19.MAR.2026 12:11:40

Date: 19.MAR.2026 12:33:18

Mode: TX 11n HT20 channel 6

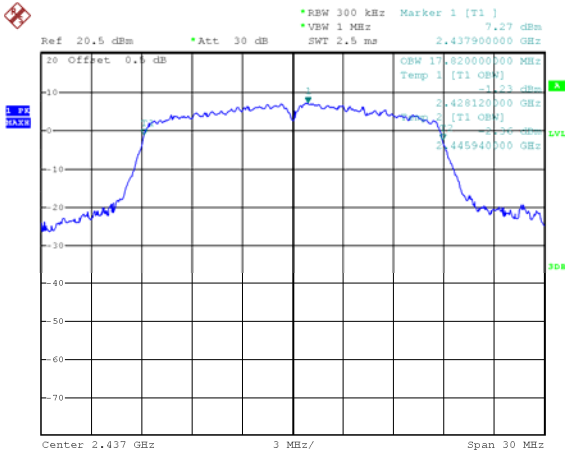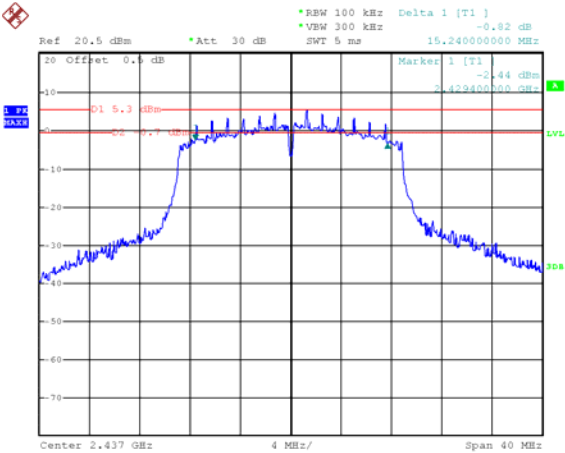



Date: 19.MAR.2026 12:12:46

Date: 19.MAR.2026 12:34:10

6 dB Bandwidth

99% Bandwidth



Mode: TX 11n HT20 channel 11

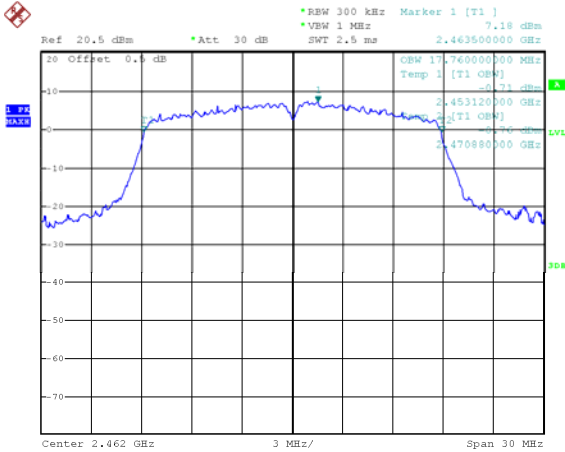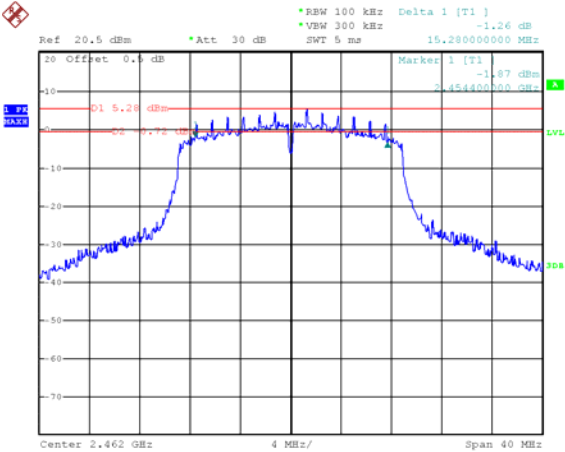

Date: 19.MAR.2026 12:17:36

Date: 19.MAR.2026 12:35:03

Mode: TX 11n HT40 channel 3

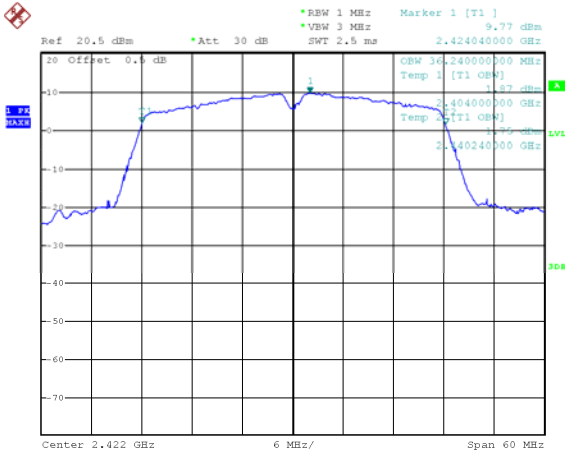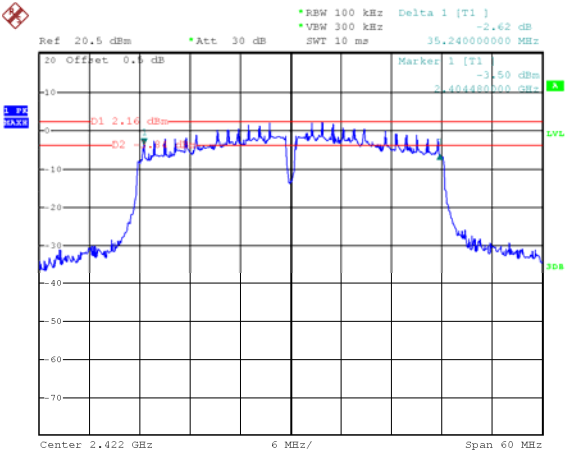


Date: 19.MAR.2026 12:21:58

Date: 19.MAR.2026 12:37:23


6 dB Bandwidth

99% Bandwidth

Mode: TX 11n HT40 channel 6

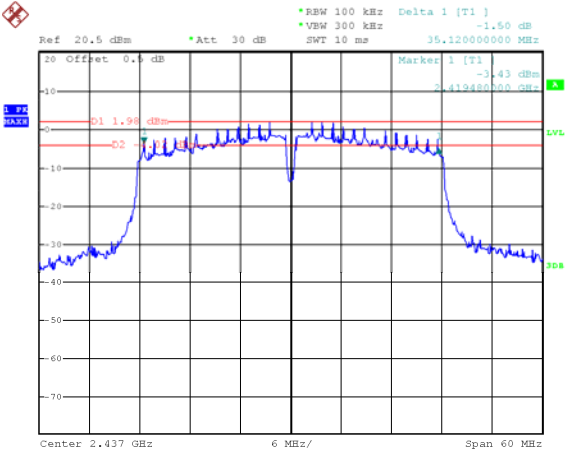


Date: 19.MAR.2026 12:25:27

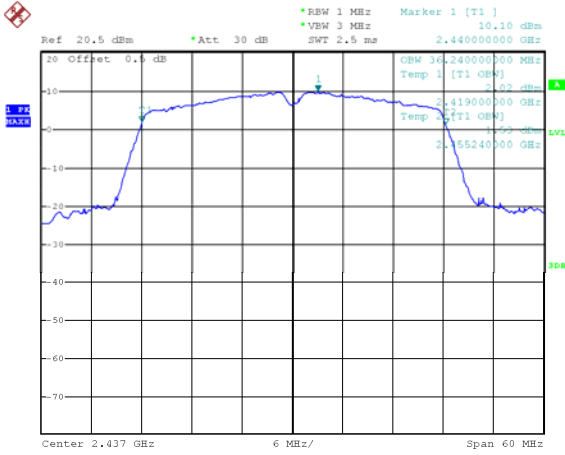


Date: 19.MAR.2026 12:39:11

Mode: TX 11n HT40 channel 9

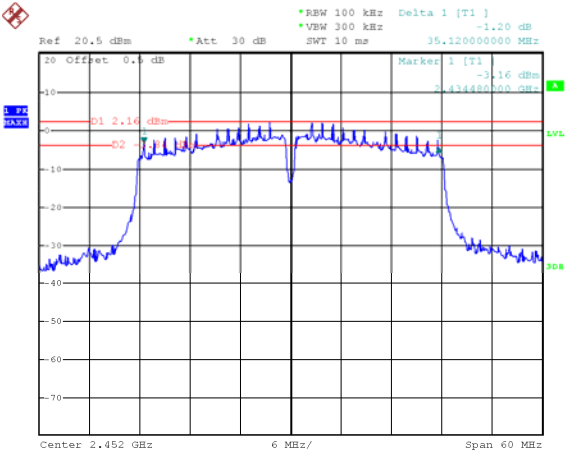

Date: 19.MAR.2026 12:29:18

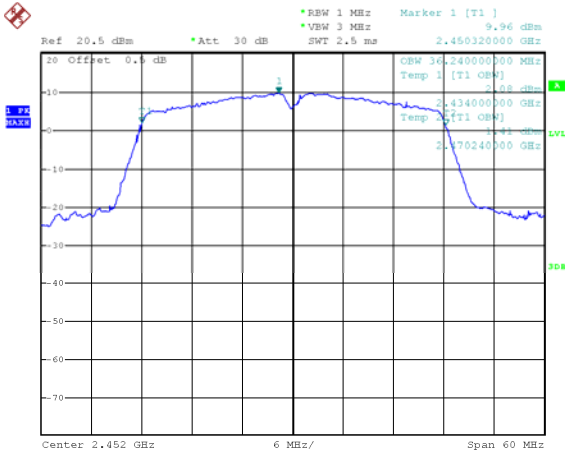

Date: 19.MAR.2026 12:41:38

13 Maximum Conducted Output Power

Test Requirement:	47CFR FCC Part15 Subpart C §15.247
Test Method:	ANSI C63.10-2020 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Test Limit:	§15.247(b) The maximum peak conducted output power of the intentional radiator shall not exceed 1W.
Test Mode:	Transmitting

13.1 Test Procedure

According to KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Subclause 11.9.2.2.2: Method AVGSA-1 of ANSI C63.10 is applicable.

Method AVGSA-1 uses trace averaging with the EUT transmitting at full power throughout each sweep.

The procedure for this method is as follows:


- a) Set span to >1.5 times the OBW.
- b) Set RBW=1% to 5% of the OBW, but do not exceed 1 MHz.
- c) Set VBW $\geq [3 \times \text{RBW}]$.
- d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time=auto.
- f) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98%, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at the maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
- h) Trace average at least 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band-edges. If the instrument does not have a band-power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

13.2 Test Result


Operation mode	Channel Frequency (MHz)	Conducted Output Power (dBm)	Limit
TX 11b	Low-2412	19.27	1W/30dBm
	Middle-2437	19.09	1W/30dBm
	High-2462	18.79	1W/30dBm
TX 11g	Low-2412	14.90	1W/30dBm
	Middle-2437	14.85	1W/30dBm
	High-2462	14.61	1W/30dBm
TX 11n HT20	Low-2412	13.54	1W/30dBm
	Middle-2437	13.06	1W/30dBm
	High-2462	13.00	1W/30dBm
TX 11n HT40	Low-2422	14.93	1W/30dBm
	Middle-2437	14.76	1W/30dBm
	High-2452	14.68	1W/30dBm

Test Plot:


Mode: TX 11b channel 1

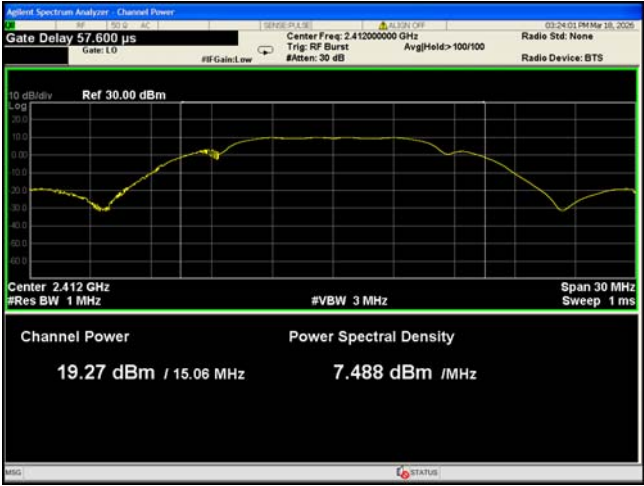


Mode: TX 11b channel 6

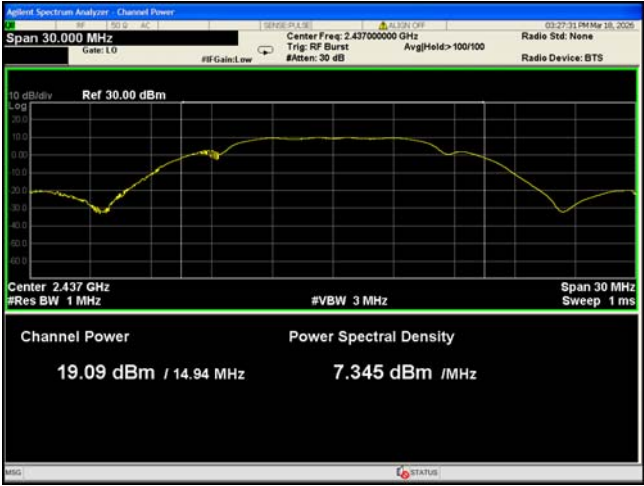


Mode: TX 11b channel 11

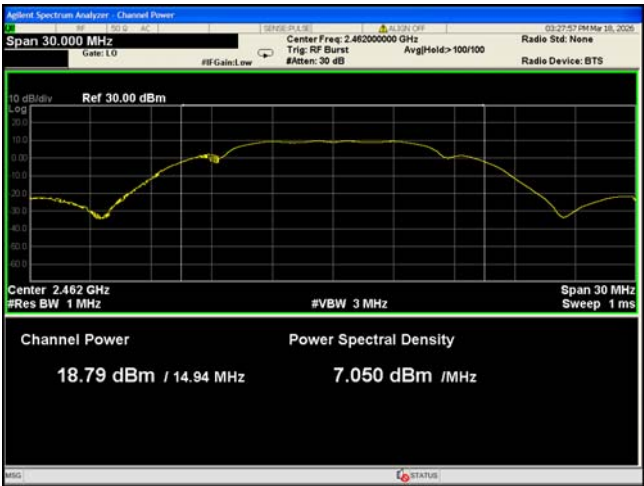


Mode: TX 11g channel 1

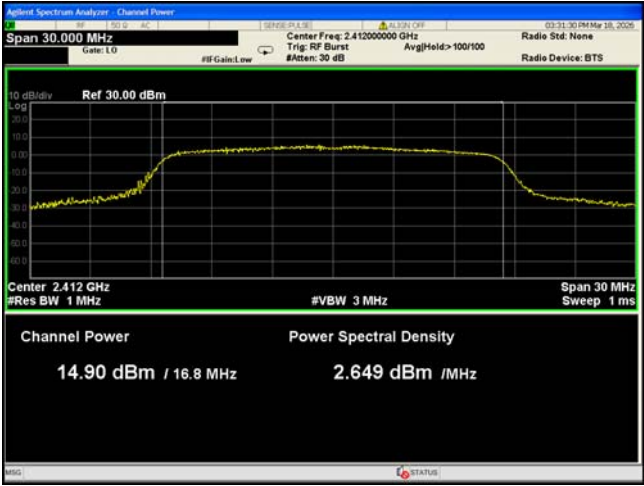


Mode: TX 11g channel 6

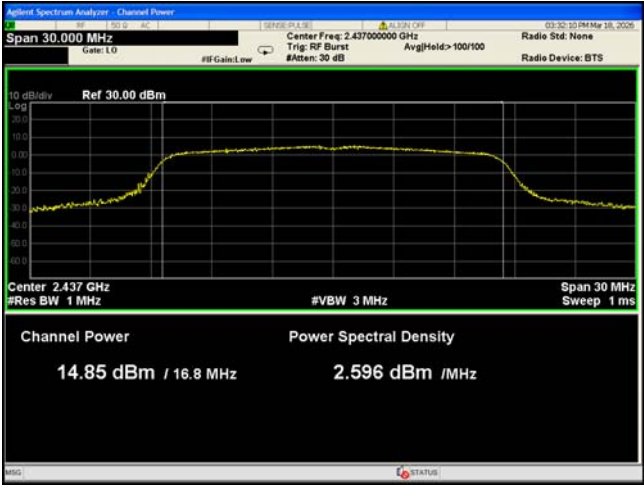


Mode: TX 11g channel 11

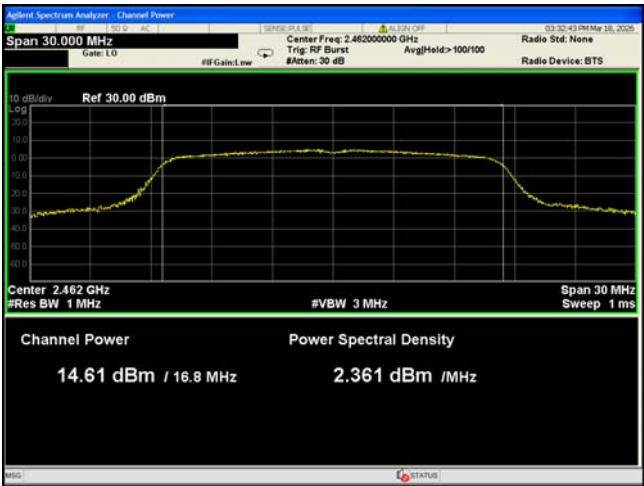


Mode: TX 11n HT20 channel 1

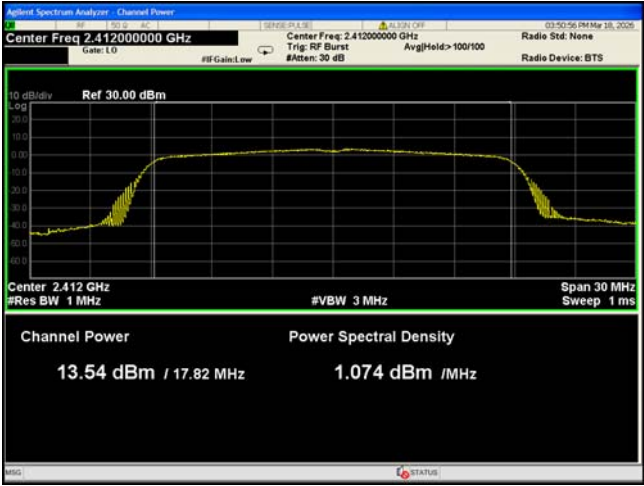


Mode: TX 11n HT20 channel 6

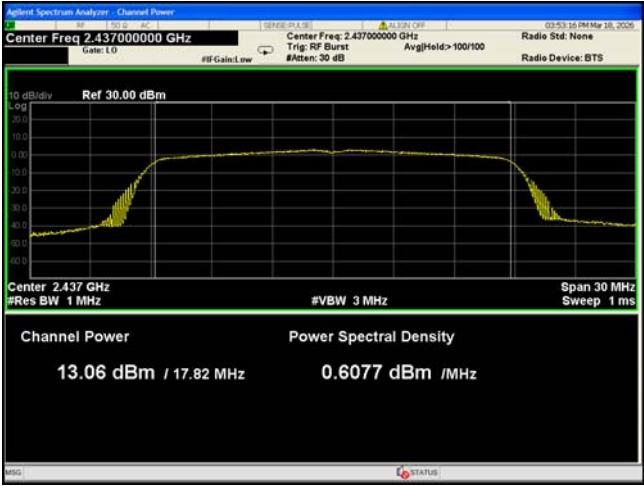


Mode: TX 11n HT20 channel 11

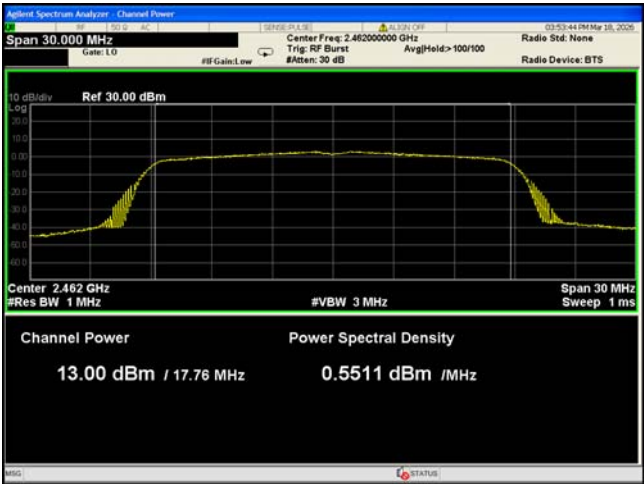


Mode: TX 11n HT40 channel 3

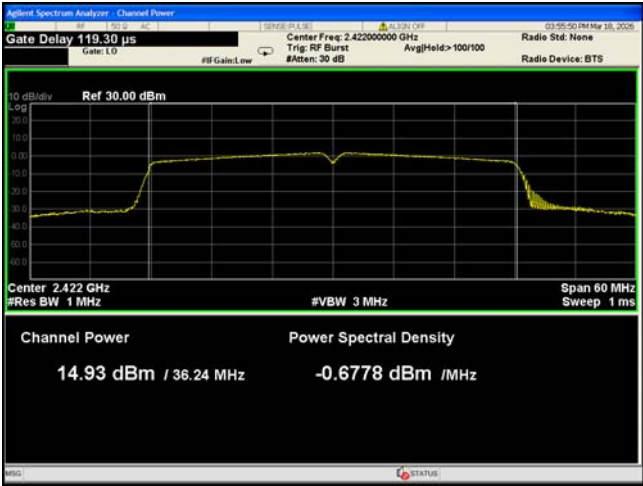

Mode: TX 11n HT40 channel 6

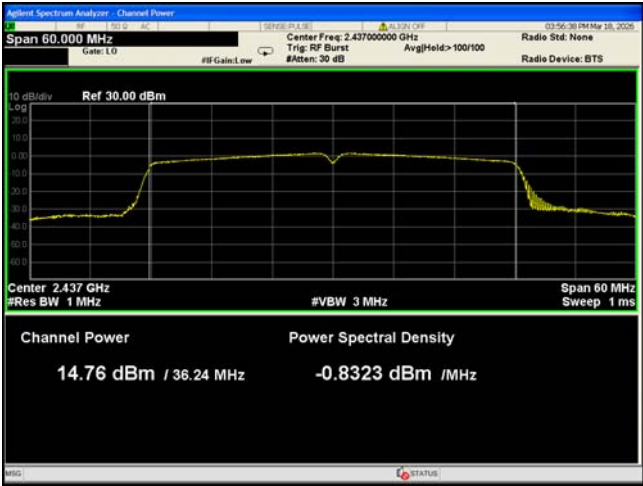

Mode: TX 11n HT40 channel 9

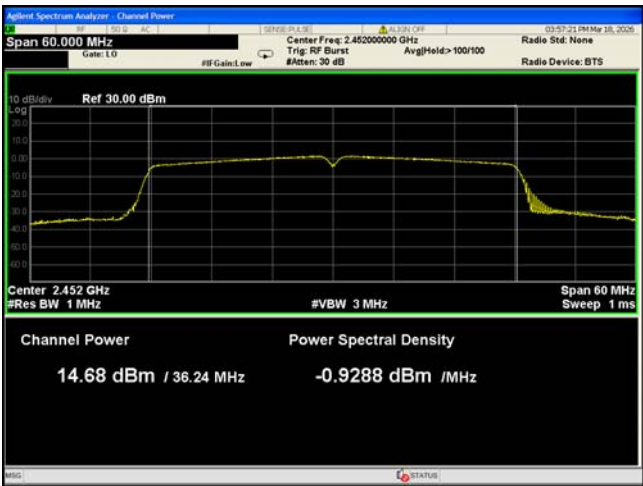

14 Power Spectral Density

Test Requirement:	47CFR FCC Part15 Subpart C §15.247
Test Method:	ANSI C63.10-2020 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Test Limit:	§15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
Test Mode:	Transmitting

14.1 Test Procedure

According to KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019 section 8.4

Subclause 11.10.3: Method AVGPS-1 of ANSI C63.10 is applicable.

Method AVGPS-1 uses trace averaging with EUT transmitting at full power throughout each sweep. The following procedure may be used when the maximum (average) conducted output power was used to determine compliance to the fundamental output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has a power averaging (rms) detector, then it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously ($D \geq 98\%$), or else sweep triggering/signal gating must be implemented to help ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter OFF time to be considered):

- Set instrument center frequency to DTS channel center frequency.
- Set span to > 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Detector = power averaging (rms) or sample detector (when rms not available).
- Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span}/\text{RBW}]$.
- Sweep time=auto couple.
- Employ trace averaging (rms) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this might require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

14.2 Test Result


Operation mode	Channel Frequency (MHz)	Power Spectral density (dBm per 3kHz)	Limit
TX 11b	Low-2412	1.783	8dBm per 3kHz
	Middle-2437	1.733	8dBm per 3kHz
	High-2462	1.671	8dBm per 3kHz
TX 11g	Low-2412	-3.041	8dBm per 3kHz
	Middle-2437	-3.451	8dBm per 3kHz
	High-2462	-3.345	8dBm per 3kHz
TX 11n HT20	Low-2412	-3.899	8dBm per 3kHz
	Middle-2437	-4.084	8dBm per 3kHz
	High-2462	-4.278	8dBm per 3kHz
TX 11n HT40	Low-2422	-5.395	8dBm per 3kHz
	Middle-2437	-5.491	8dBm per 3kHz
	High-2452	-5.606	8dBm per 3kHz

Test Plot:

Mode: TX 11b channel 1




Mode: TX 11b channel 6

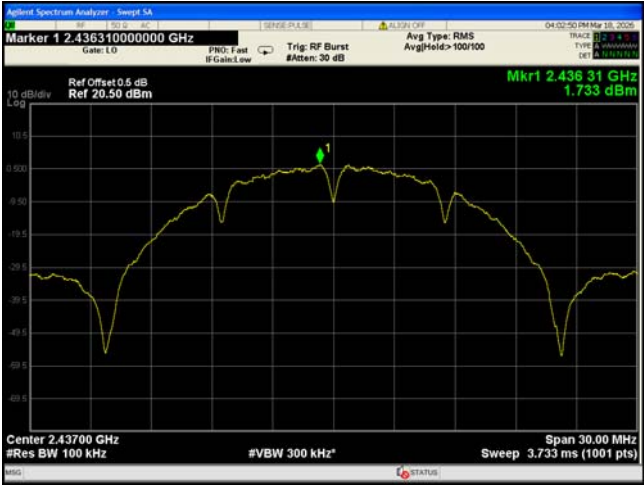

Mode: TX 11b channel 11



Mode: TX 11g channel 1

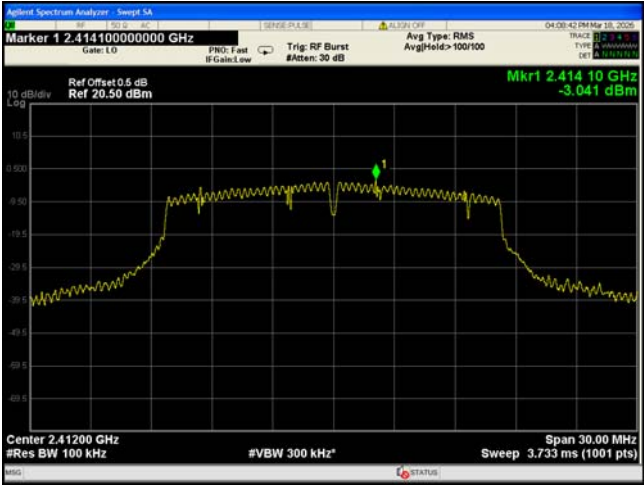


Mode: TX 11g channel 6



Mode: TX 11g channel 11



Mode: TX 11n HT20 channel 1

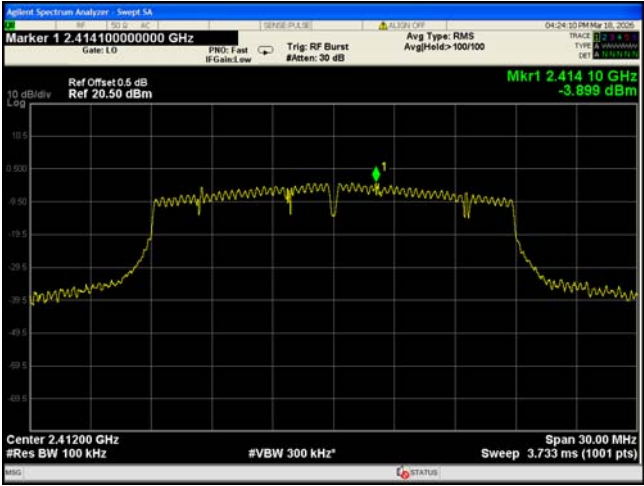

Mode: TX 11n HT20 channel 6



Mode: TX 11n HT20 channel 11



Mode: TX 11n HT40 channel 3



Mode: TX 11n HT40 channel 6



Mode: TX 11n HT40 channel 9



15 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an Rubber Duck Antenna fulfil the requirement of this section.

Note: Please refer to EUT photos for more details.

16 RF Exposure

Remark: refer to MPE test report: WTF26D01004507W004.

17 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix- Ranger I/A 250-Photos.

=====End of Report=====