

Shenzhen Guanjiixin Technology Co., Ltd.

Product Specification Approval Certificate

SPECIFICATON APPROVAL

customer name :

CUSTOMER_____

Customer Product Name:

Product Name ofCustomer Watch coil module

Our product name (material):

product Mame ofOurs(Maternal) Watch coil module

admit :

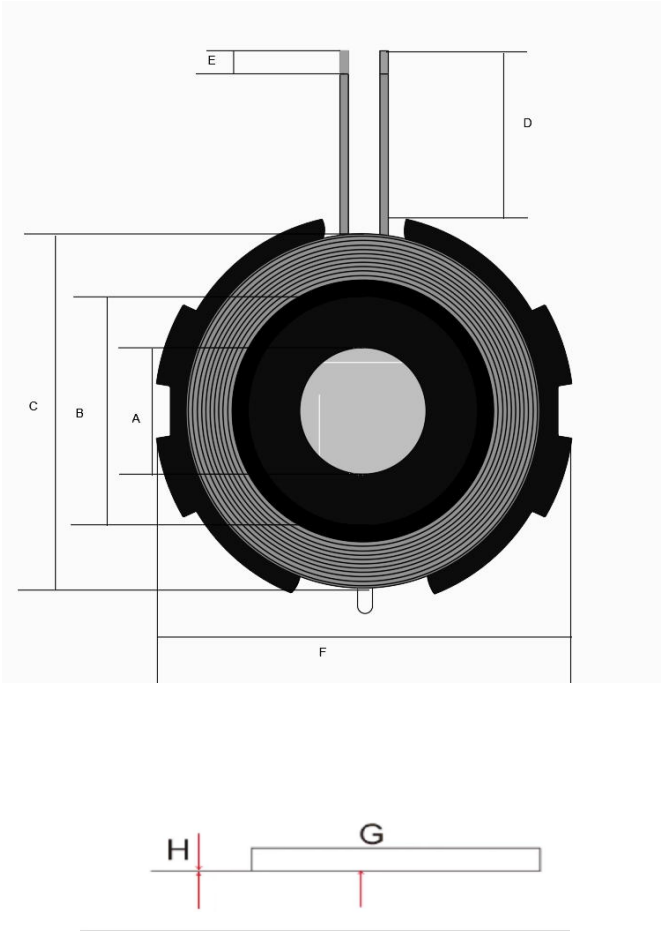
APPROVED_____

approval :

tabulation :

date :

APPROVED_____DRAWN_____ DATE 2024-12-04

Specification/Specification Details		CISTOME P/N: Customer Product Name	Watch coil module	
		PART NUMBER: Manufacturer part number		
1.Dimensions (external dimensions): mm 			A	7.8±0.1
			B	14.5±1
			C	21MXA
			D	20±1.5
			E	3±1.5
			F	25±0.5
			G	Total thickness: 2.9MAX
			H	The release paper thickness is 0.15MAX
			I	
			J	
			k	
			L	
			M	
			N	
			O	
			R	
			Q	
P				
Approved by: Recognition	Checked by: Review	PREPARED BY Fabrication	DATE date	PACE page number
			2024-12-04	2 of 4

Specification Specification Content					CUSTOMER P/N: Customer Product Name		Watch coil module	
					PART NUMBER: Manufacturer part number			
5. Winding Details:								
Wdy. NO. Rao Group	Start Start	End End	Turns circle number	Wire Dia Wire Diam- eter	Wdg.TyepeSprad/lose Winding method/Dense winding	Wdg.Direction Direction of winding	Turns/Layer Nu- mber of layers/Num- ber of circles per layer	
	S	F	11TS	0.08*24P	Strict encryption	Anticlockwise	1 layer /11TS	
6.Electrical Characteristics:								
PARAMETERS				UNIN		LIMITI		
Inductance Is@100KHz/1v				UH		6.8UH ± 10 %		
Q @100KHz/1v						25MIN		
DCR @100KHz/1v				m Ω		200MAX		
Approved by: Recog- nition		Checked by: Rev- iew		Prepared by: Product- ion		DATE date		PAGE page number
						2024-1-15		3 of 4

MATERIAL LIST Material List			CUSTOMER P/N: Customer Product Name		Watch coil module
			PART NUMBER: Manufacturer part number		
NO.	Material name	Description: Product Name Description	Manufacturer: The manufacturer		Material
1	Hot-air stranded wire	0.08*24P			99.95% purple copper
2	Lead-free tin strip	High temperature			
3	Glue	Resin Glue			
4	Hard magnetic disk	G25*7.8*2.6H			
5	Double faced adhesive tape	19*0.15H (holeless but with ears)			
Approved by: Recognition		Checked by: Review	Prepared by: Preparation	DATE date	PAGE page number
				2024-12-04	4 of 4