

FCC PART 15 SUBPART C

Power bank

MODEL No.: D2-20000

FCC ID: 2BUNJ-D2-20000

REPORT NO.: SZNTT26019572E1-1

ISSUE DATE: May. 29, 2026

Prepared for

Shenzhen Xianyang Innovation Technology Co., Ltd.

Rm 302, Bldg. 8, Yunli intelligent park, No. 7, Changfa Middle Rd,
Bantian st., Longgang Dist., Shenzhen, China

Prepared by

Shenzhen NTT Testing Technology Co., Ltd.

1B, Building 2, Factory Building & 103, Building 3, Factory Building, Dayang
Industrial Park No.4, Industrial Avenue, Tangwei Community, Fuhai Sub-district,
Bao 'an District, Shenzhen City, China

TEL: 0755-27889935



TABLE OF CONTENT

Test Report Description	Page
1. SUMMARY OF TEST RESULTS.....	5
2. GENERAL INFORMATION	6
2.1. Description of Device (EUT)	6
2.2. Description of Support Units	6
2.3. Independent Operation Modes	7
2.4. Test Mode.....	8
2.5. Description of Test Facility	8
2.6. Measurement Uncertainty.....	9
3. MEASURING DEVICE AND TEST EQUIPMENT	10
4. 20DB BANDWIDTH	12
4.1. Test Procedure	12
4.2. Test Setup	12
4.3. Test Results.....	12
5. POWER LINE CONDUCTED EMISSION MEASUREMENT	13
5.1. Block Diagram of Test Setup.....	13
5.2. Limits.....	13
5.3. Test Procedure	13
5.4. Measuring Results	14
6. RADIATED EMISSION TEST.....	17
6.1. Measurement Procedure	17
6.2. Test SET-UP (Block Diagram of Configuration)	17
6.3. Radiated Emission Limit	18
6.4. Measurement Result.....	20
7. TEST PHOTOGRAPHS AND EUT PHOTOGRAPHS	26



TEST REPORT DESCRIPTION

Applicant : Shenzhen Xianyang Innovation Technology Co., Ltd.

Address : Rm 302, Bldg. 8, Yunli intelligent park, No. 7, Changfa Middle Rd,
Bantian st., Longgang Dist., Shenzhen, China

Manufacturer : Shenzhen Xianyang Innovation Technology Co., Ltd.

Address : Rm 302, Bldg. 8, Yunli intelligent park, No. 7, Changfa Middle Rd,
Bantian st., Longgang Dist., Shenzhen, China

EUT : Power bank

Model Name : D2-20000

Trademark : RORRY

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15, Subpart C	PASS

The above equipment was tested by Shenzhen NTT Testing Technology Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2020 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15C

The test results of this report relate only to the tested sample identified in this report.

Prepared by (Test Engineer):
Cindy Qin

Cindy Qin

Reviewer (Supervisor):
Ken Wu

Ken Wu

Approved (Manager):
Abel Yu

Abel Yu



Modified Information

Version	Report No.	Revision Data	Summary
Ver.1.0	SZNTT26019572E1-1	May. 29, 2026	Original Version



1. SUMMARY OF TEST RESULTS

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Spurious Emission	15.209(a)(f)	Pass
20dB Bandwidth	15.215	Pass



2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : Power bank

Model Number : D2-20000
Model different : /

Power Rating : Total Cell Capacity: 20000mAh
Battery Capacity: 10000mAh, 7.7V/77Wh (Two cell in Series)
Rated Capacity: 12000mAh(5V=3A)
USB-C/USB-C Cable Input:
5V=3A, 9V=3A, 12V=2.5A, 15V=2A(30W Max)
USB-C/USB-C Cable Output:
5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A(30W Max)
USB-A Output:
5V=3A, 9V=2.22A, 10V=2.25A, 12V=1.67A (22.5W Max)
L Cable Output: 5V=2.4A, 9V=2.22A (20W Max)
Output for iWatch: 5W Max Total Output: 5V=3A (Max)

Operation : 300-350kHz
Frequency for WPT

Modulation : MSK

Antenna Type: : Coil Antenna

Date of Received : May. 08, 2026

Date of Test : May. 11, 2026 to May. 28, 2026

2.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Power bank	N/A	D2-20000	N/A	EUT
E-2	iWatch	N/A	iWatch 5	N/A	Auxiliary
E-3	Adapter	N/A	X2903	N/A	Auxiliary

Note: (1)The support equipment was authorized by Declaration of Confirmation.
(2)For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.3. Independent Operation Modes

Mode	Description	Remark
1	EUT + iWatch (5W)	5%
2		50%
3		95%
Remark:		
1 All the modes have tested and recorded the worst mode in the report.		
2.5% indicates that iWatch battery capacity < 5%;		
3.50% indicates that iWatch battery capacity is 50%;		
4.95% indicates that iWatch battery capacity is 95%		



2.4. Test Mode

Test Items	Test Voltage	Operation Modes
RE	DC 7.7V	Mode 1
CE	AC 120V/60Hz	Mode 1

2.5. Description of Test Facility

Site
Description

Designation Number: CN3446

EMC Lab. :

Test Firm Registration Number: 129414

Accredited by ANAB, Dec. 19, 2025

The Certificate Registration Number is AT-3446

Name of
Firm :

Shenzhen NTT Testing Technology Co., Ltd.

Site
Location :

1B, Building 2, Factory Building & 103, Building 3, Factory Building,
Dayang Industrial Park No.4, Industrial Avenue, Tangwei Community,
Fuhai Sub-district, Bao 'an District, Shenzhen City, China



2.6. Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(9KHz~30MHz)	$\pm 4.51\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$
Remark:When making a conformity declaration based on test results for regulations/standards or specifications,the default is to use Clause 4.2.1of ILAC-G8:09/2019 and the guidelines on decision rules and conformity declaration in IEC Guide 115:2023.	



3. MEASURING DEVICE AND TEST EQUIPMENT

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2025/1/17	2028/1/16
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2025/6/10	2026/6/09
Amplifier (30MHz-1GHz)	BBV 9743 B	00374	SCHWARZBECK	2025/6/10	2026/6/09
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHWARZBECK	2025/6/10	2026/6/09
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHWARZBECK	2025/3/08	2026/3/07
Preamplifier (1GHz-18GHz)	BBV 9718D	0024	SCHWARZBECK	2025/3/10	2026/3/09
Spectrum Analyzer (10Hz-40GHz)	FSV 40	100952	Rohde & Schwarz	2025/6/10	2026/6/09
Preamplifier (18GHz-40GHz)	BBV 9721	0056	SCHWARZBECK	2025/6/10	2026/6/09
Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2025/3/10	2026/3/09
Loop Antenna (9KHz-30MHz)	FMZB 1513-60	00115	SCHWARZBECK	2025/3/10	2026/3/09
Amplifier (9KHz-30MHz)	BBV 9745	00109	SCHWARZBECK	2025/6/13	2026/6/12
MXG Signal Analyzer	N9020A	MY50510202	Agilent	2025/6/10	2026/6/09
MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2025/6/10	2026/6/09
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2025/6/10	2026/6/09
Power Meter	Anritsu	ML2495A	MAX540	2025/6/10	2026/6/09
Power Sensor	TR1029-2	512364	Techoy	2025/6/10	2026/6/09
RF Switch	TR1029-1	512364	Techoy	2025/6/10	2026/6/09
Cable	DA800- 4000MM	NA	DA	2025/6/10	2026/6/09
Cable	DA800- 11000MM	NA	DA	2025/6/10	2026/6/09
Oven	GX-3020-M150	NA	GAOXN	2025/3/09	2026/3/08



Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2025/1/17	2028/1/16
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2025/6/10	2026/6/09
LISN	ENV 216	102796	Rohde & Schwarz	2025/6/10	2026/6/09
LISN	VN1-13S	004023	CRANAGE	2025/6/10	2026/6/09
Cable	RG223-1500MM	NA	RG	2025/6/10	2026/6/09

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ-EMC	Ver.EMC-CON 3A1.1+
2	EMC radiation test system	FALA	EZ-EMC	Ver.FA-03A2 RE+
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0



4. 20DB BANDWIDTH

4.1. Test Procedure


Set to the maximum power setting and enable the EUT transmit continuously
Set RBW = 1-5%OBW.
Set the video bandwidth (VBW) =3RBW.
Set Span= 1KHz
Set Detector = Peak.
Set Trace mode = Max hold.
Set Sweep = auto couple.
Measure and record the results in the test report.

4.2. Test Setup




4.3. Test Results

Frequency (KHz)	20dB bandwidth (Hz)	99% bandwidth (Hz)	Result
326.3	725	740	Pass

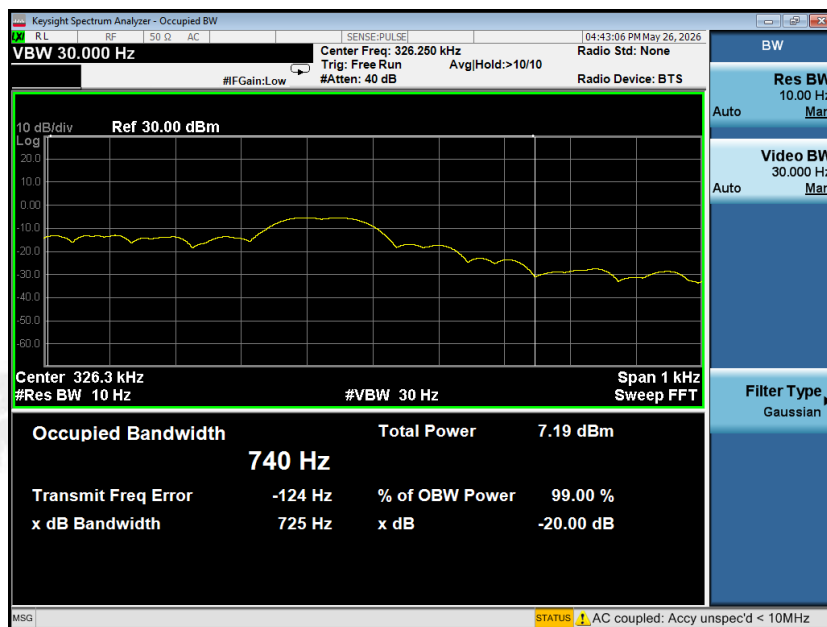

5. POWER LINE CONDUCTED EMISSION MEASUREMENT

5.1. Block Diagram of Test Setup

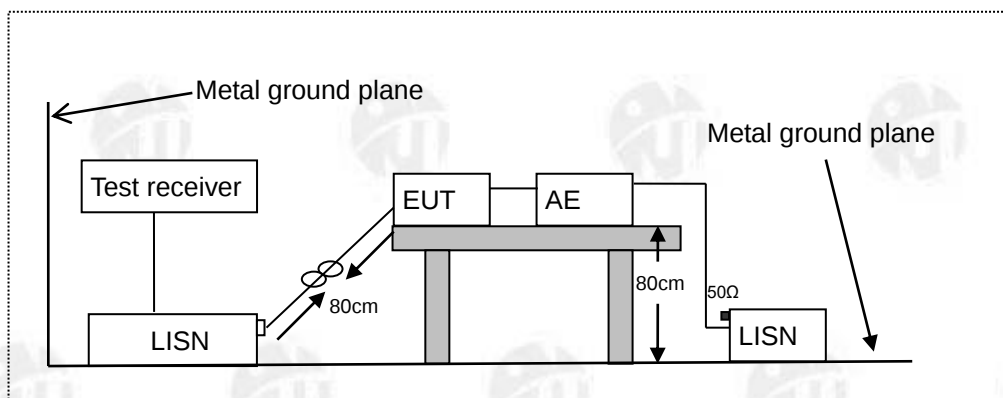

LISN: Line Impedance Stabilization Network

AE: Associated equipment

EUT: Equipment under test

5.2. Limits

FCC Part 15.207

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.
NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

5.3. Test Procedure

The EUT was placed on a desk 0.8 m height from the metal ground plane and 0.4 m from the conducting wall of the shielding room and it was kept at least 0.8 m from any other grounded conducting surface. The size of the table will nominally be 1.5 m x1.0 m.

The rear of the arrangement shall be flush with the back of the supporting tabletop unless that would not be possible or typical of normal use.

All units of equipment forming the system under test (includes the EUT as well as connected peripherals and associated equipment or devices) shall be arranged such that a nominal 0.1 m separation is achieved between the neighboring units.

Connect EUT to the power mains through a line impedance stabilization network (LISN). Where the mains cable supplied by the manufacturer is longer than 1 m, the excess should be folded at the centre into a bundle no longer than 0.4 m, so that its length is shortened to 1 m.



All the support units are connecting to the other LISN.

The LISN provides 50 ohm coupling impedance for the measuring instrument.

Both sides of AC line were checked for maximum conducted interference.

The frequency range from 150 kHz to 30 MHz was sweep.

Set the test-receiver system to quasi peak detect function and average detect function, and to measure the conducted emissions values.

Test results were obtained from the following equation:

Emission Level (dBμV) = LISN Factor (dB) + Cable Loss (dB) + Reading (dBμV)


Margin (dB) = Emission Level (dBμV) - Limit (dBμV)

5.4. Measuring Results

PASS.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Mode:	Mode 1

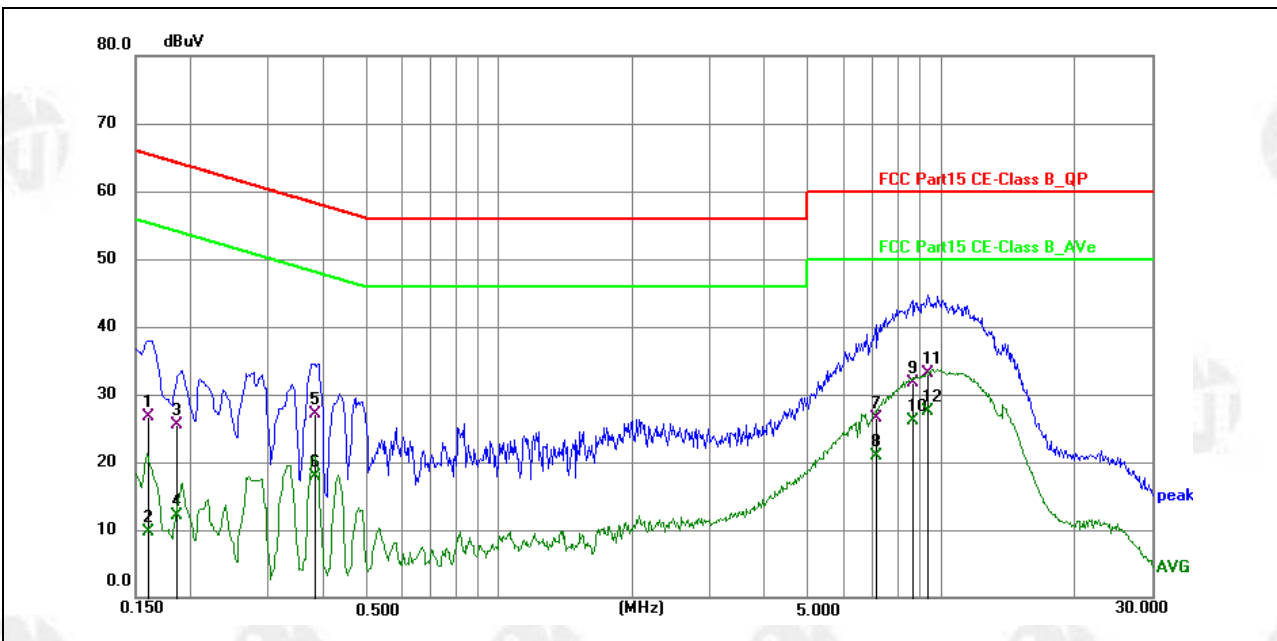


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1613	26.43	0.23	26.66	65.40	-38.74	QP
2	0.1613	9.38	0.23	9.61	55.40	-45.79	AVG
3	0.1872	25.26	0.22	25.48	64.16	-38.68	QP
4	0.1872	11.91	0.22	12.13	54.16	-42.03	AVG
5	0.3819	27.02	0.17	27.19	58.24	-31.05	QP
6	0.3819	17.74	0.17	17.91	48.24	-30.33	AVG
7	7.1423	26.25	0.29	26.54	60.00	-33.46	QP
8	7.1423	20.52	0.29	20.81	50.00	-29.19	AVG
9	8.6446	31.32	0.34	31.66	60.00	-28.34	QP
10	8.6446	25.67	0.34	26.01	50.00	-23.99	AVG
11	9.3567	32.73	0.35	33.08	60.00	-26.92	QP
12 *	9.3567	27.10	0.35	27.45	50.00	-22.55	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Mode:	Mode 1

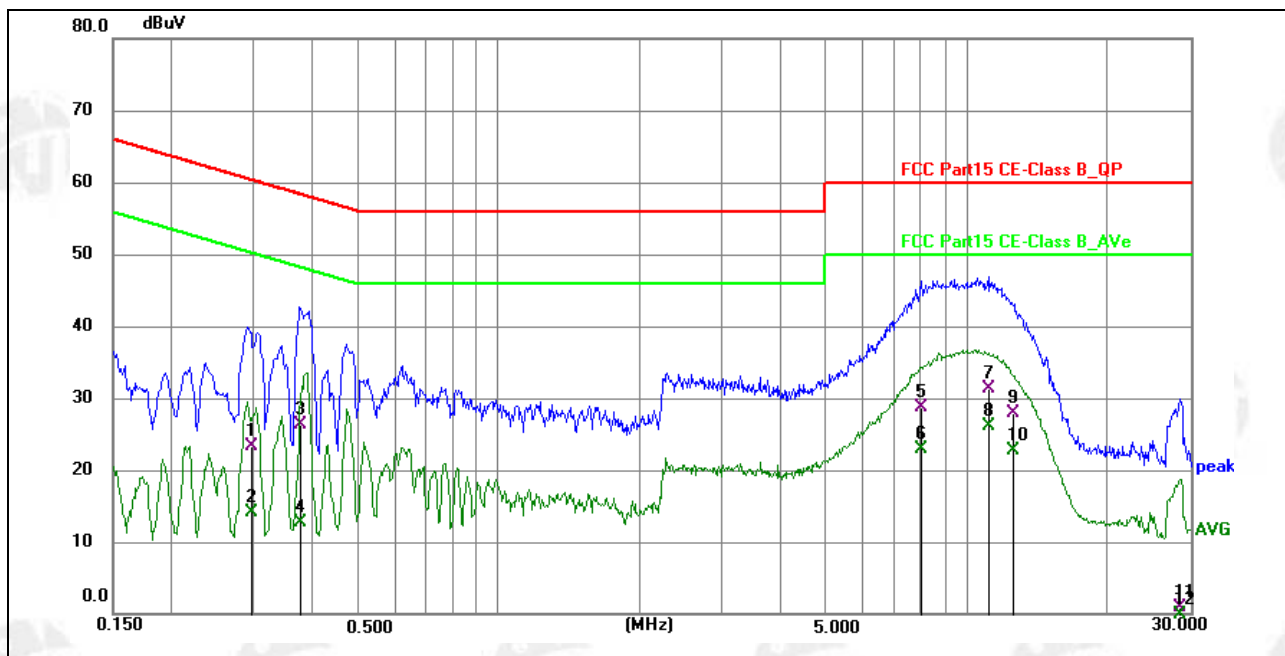

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2968	23.18	0.17	23.35	60.33	-36.98	QP
2	0.2968	13.96	0.17	14.13	50.33	-36.20	AVG
3	0.3789	26.17	0.16	26.33	58.30	-31.97	QP
4	0.3789	12.45	0.16	12.61	48.30	-35.69	AVG
5	8.0282	28.29	0.32	28.61	60.00	-31.39	QP
6	8.0282	22.64	0.32	22.96	50.00	-27.04	AVG
7	11.1014	30.96	0.42	31.38	60.00	-28.62	QP
8 *	11.1014	25.75	0.42	26.17	50.00	-23.83	AVG
9	12.5768	27.48	0.48	27.96	60.00	-32.04	QP
10	12.5768	22.26	0.48	22.74	50.00	-27.26	AVG
11	28.4928	-0.01	0.93	0.92	60.00	-59.08	QP
12	28.4928	-4.67	0.93	-3.74	50.00	-53.74	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor


6. RADIATED EMISSION TEST

6.1. Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.
5. Use the following receiver/spectrum analyzer settings:
Span = wide enough to fully capture the emission being measured
RBW=200Hz for 9KHz to 150KHz,
RBW=9kHz for 150KHz to 30MHz,
RBW=120KHz for 30MHz to 1GHz
VBW $\geq 3 \times$ RBW
Sweep = auto
Detector function = QP
Trace = max hold

6.2. Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

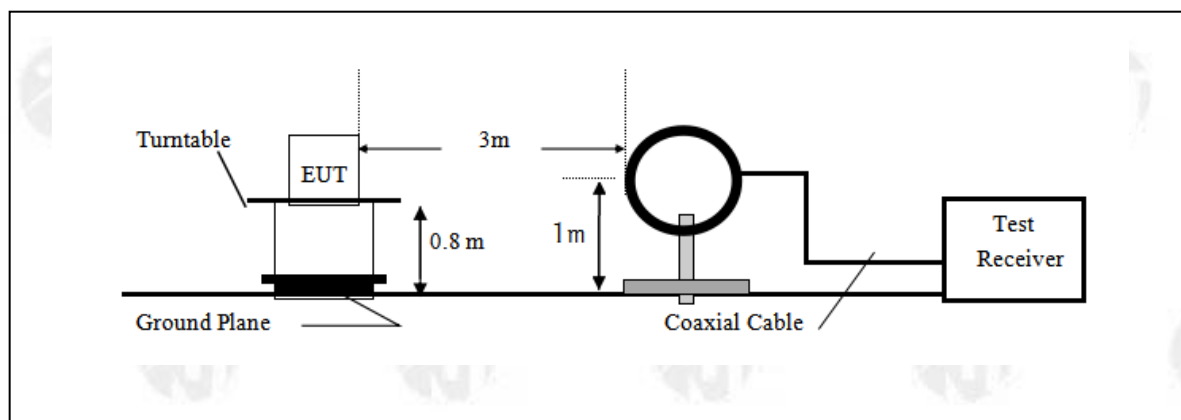

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

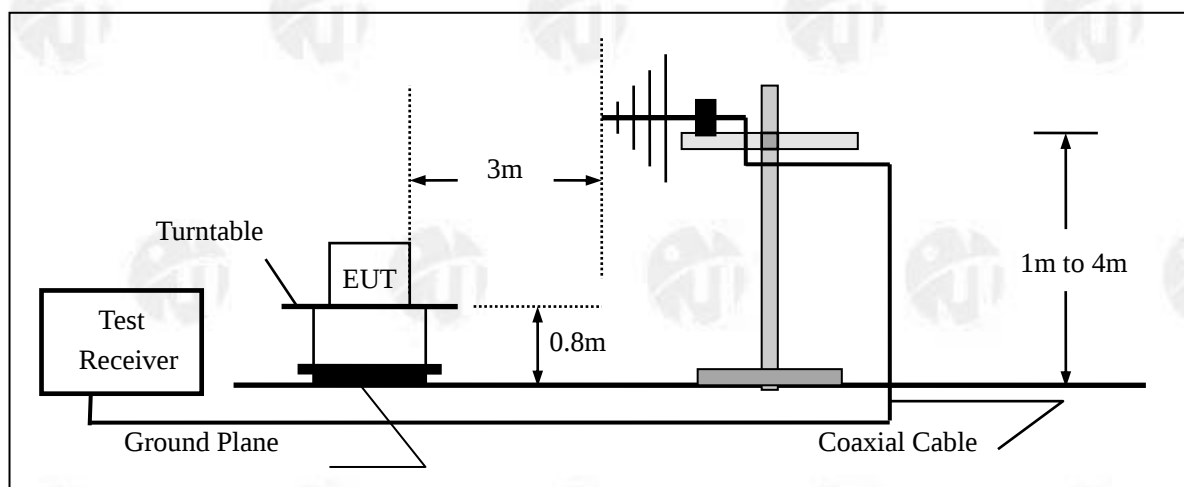

6.3. Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

FCC Part 15.209				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation Frequency tion at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	$2400 / F(\text{KHz})$	300m	$10000 * 2400/F(\text{KHz})$	$20\log 2400/F(\text{KHz}) + 80$
0.490 – 1.705	$24000 / F(\text{KHz})$	30m	$100 * 24000/F(\text{KHz})$	$20\log 24000/F(\text{KHz}) + 40$
1.705 – 30.00	30	30m	$100 * 30$	$20\log 30 + 40$
30.0 – 88.0	100	3m	100	$20\log 100$
88.0 – 216.0	150	3m	150	$20\log 150$
216.0 – 960.0	200	3m	200	$20\log 200$
Above 960.0	500	3m	500	$20\log 500$



15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

Remark: 1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.



6.4.Measurement Result


Measurement data:

Note: Limit dBuV/m @3m = Limit dBuV/m @300m+ 80


Limit dBuV/m @3m = Limit dBuV/m @30m + 40

9 kHz~30 MHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Pol.	Coplanar
Test Voltage :	DC 7.2V	Mode:	Mode 1

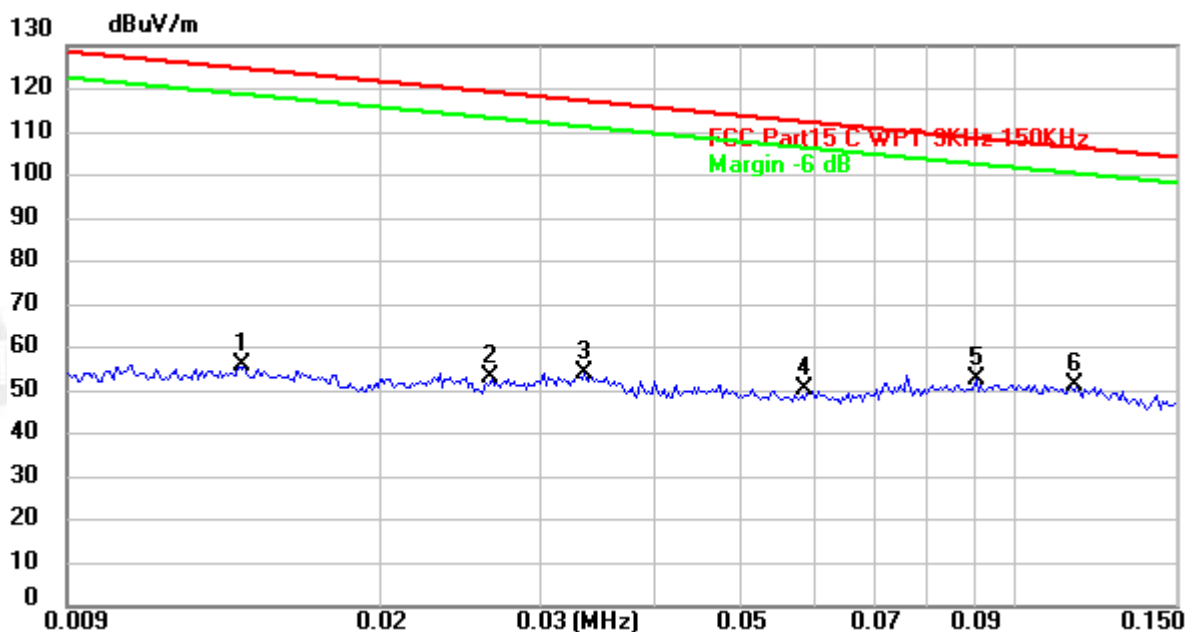

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0141	43.37	12.62	55.99	124.62	-68.63	peak
2	0.0265	40.64	12.49	53.13	119.14	-66.01	peak
3	0.0334	41.63	12.41	54.04	117.13	-63.09	peak
4	0.0589	38.27	12.23	50.50	112.20	-61.70	peak
5	0.0904	40.22	12.28	52.50	108.48	-55.98	peak
6 *	0.1164	39.23	12.28	51.51	106.28	-54.77	peak

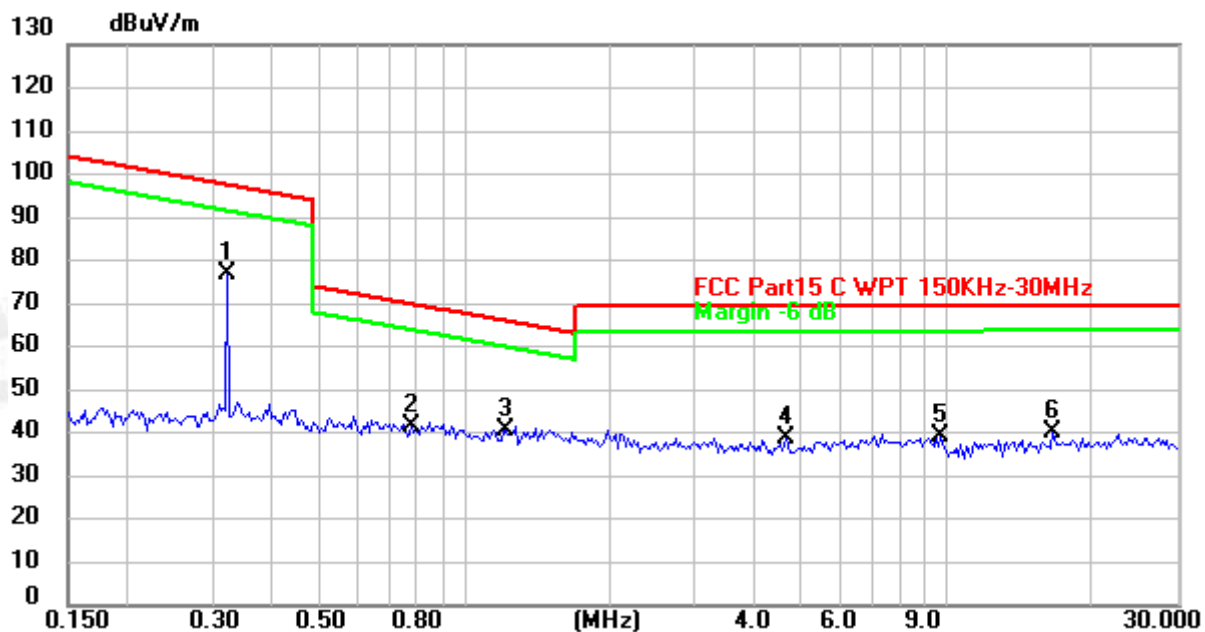


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	0.3217	64.71	12.16	76.87	97.45	-20.58	peak
2	0.7752	29.31	12.13	41.44	69.82	-28.38	peak
3	1.2098	28.47	12.23	40.70	65.95	-25.25	peak
4	4.6469	26.03	12.52	38.55	69.57	-31.02	peak
5	9.6539	26.10	12.99	39.09	69.60	-30.51	peak
6	16.5732	26.91	13.26	40.17	69.62	-29.45	peak


Note:
Pre-scan in the all of mode, the worst case in of was recorded.
Factor = antenna factor + cable loss – pre-amplifier.
Margin = Emission Level- Limit.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Pol.	Coaxial
Test Voltage :	DC 7.2V	Mode:	Mode 1

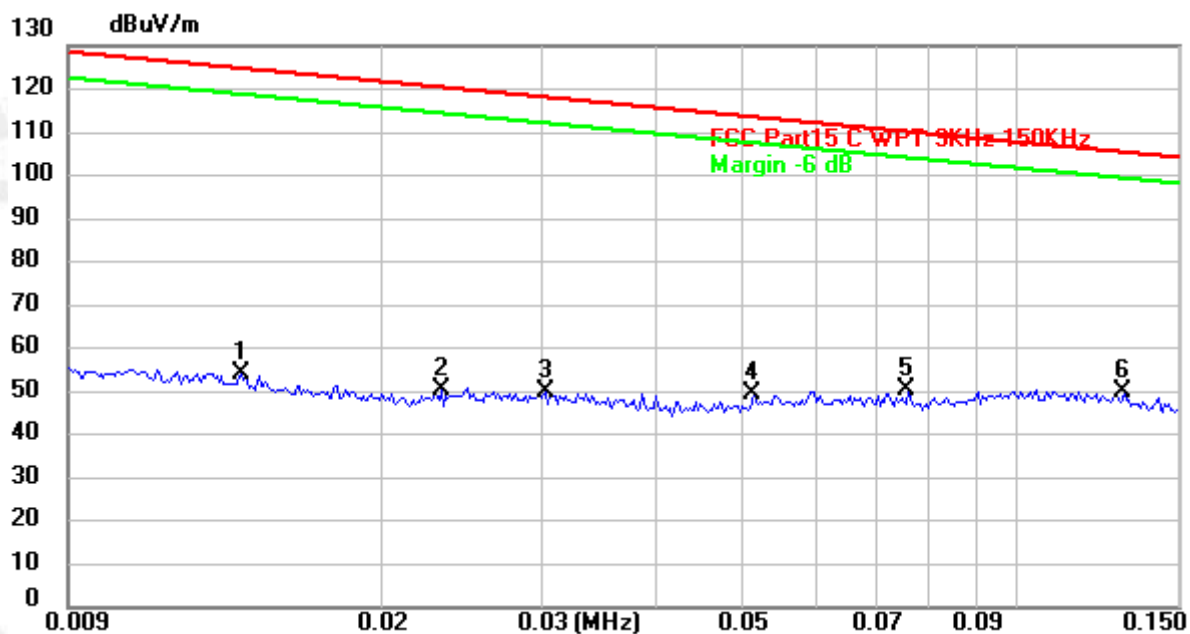

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0140	41.29	12.62	53.91	124.68	-70.77	peak
2	0.0232	37.72	12.51	50.23	120.29	-70.06	peak
3	0.0302	37.43	12.44	49.87	118.00	-68.13	peak
4	0.0512	37.18	12.23	49.41	113.42	-64.01	peak
5	0.0759	38.27	12.26	50.53	110.00	-59.47	peak
6 *	0.1310	37.72	12.27	49.99	105.26	-55.27	peak

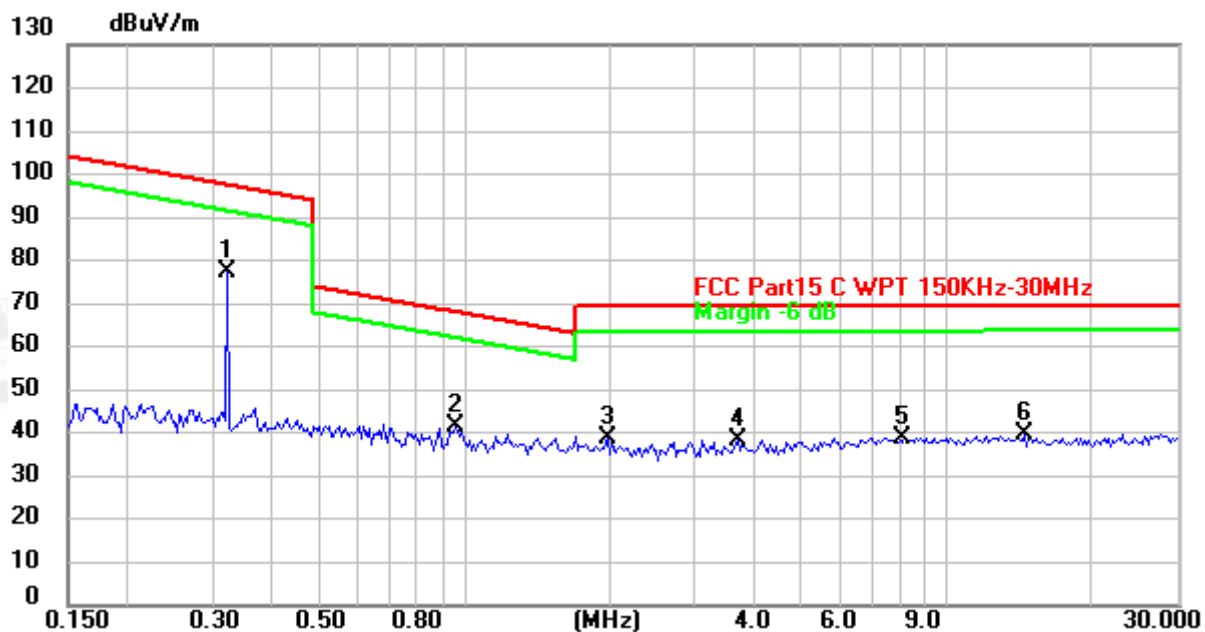

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	0.3217	64.96	12.16	77.12	97.45	-20.33	peak
2	0.9582	29.21	12.19	41.40	67.97	-26.57	peak
3	1.9697	26.29	12.35	38.64	69.55	-30.91	peak
4	3.6806	25.88	12.51	38.39	69.57	-31.18	peak
5	8.1483	25.97	12.84	38.81	69.59	-30.78	peak
6	14.4404	26.74	13.18	39.92	69.61	-29.69	peak

Note:

Pre-scan in the all of mode, the worst case in of was recorded.


Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level- Limit.



30MHz-1GHz:


Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 7.2V	Mode:	Model 1

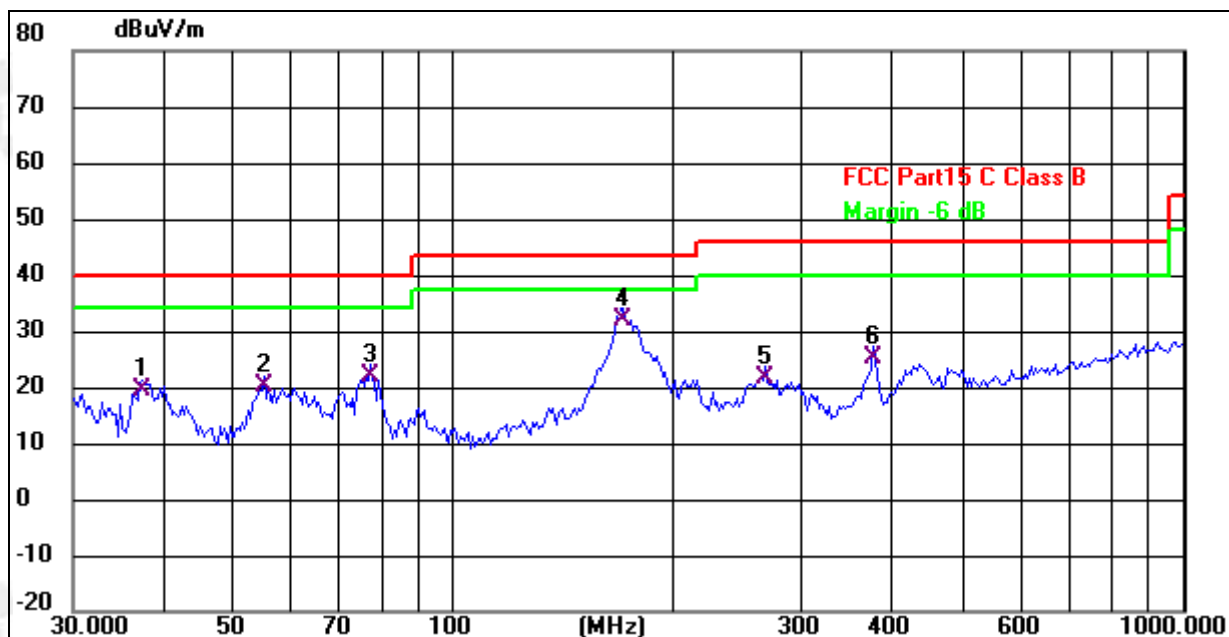

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.2855	33.15	-13.65	19.50	40.00	-20.50	QP
2	54.8348	33.95	-13.85	20.10	40.00	-19.90	QP
3	76.7808	39.06	-16.96	22.10	40.00	-17.90	QP
4 *	170.7926	45.53	-13.43	32.10	43.50	-11.40	QP
5	267.5455	35.18	-13.48	21.70	46.00	-24.30	QP
6	377.2591	35.81	-10.51	25.30	46.00	-20.70	QP



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 7.2V	Mode:	Model 1

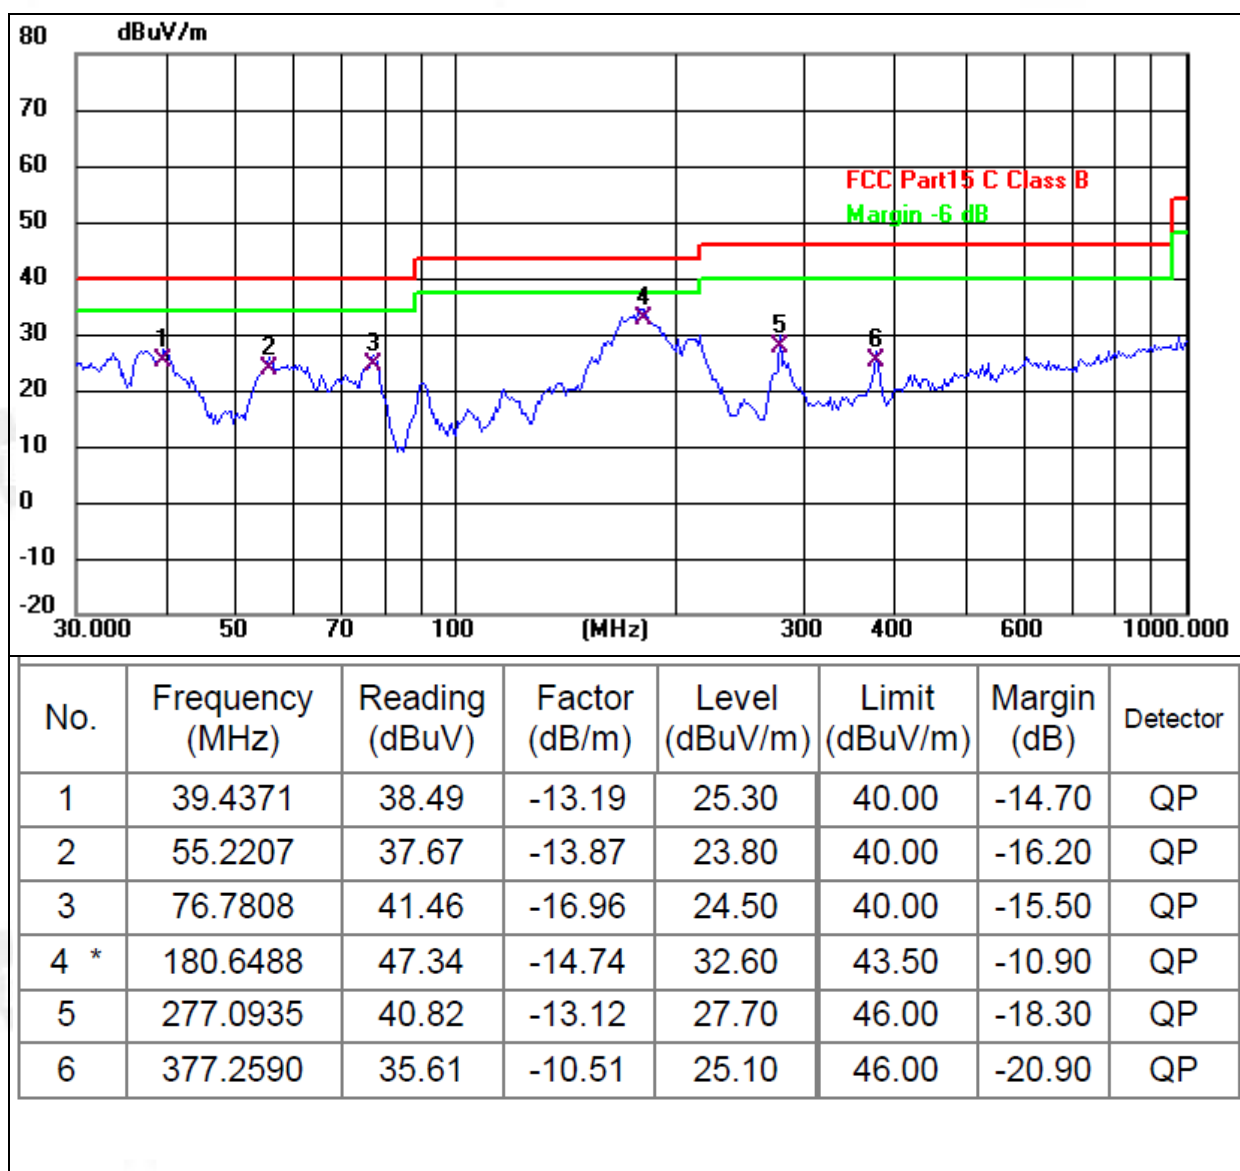

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.



7. TEST PHOTOGRAPHS AND EUT PHOTOGRAPHS

Please see the attachment for details.

-----End of Report-----