



Shenzhen Lejin radio frequency technology Co., LTD

SPECIFICATIONS FOR APPROVAL

Customer Name: _____

Product Name: WIFI/BT Antenna

Product Model: _____

Part Number: LJF02-24041808-R1A

Write By : 付 强

Issued Date: 2024-04-18

CUSTOMER

ENGINEER R&D DEPT	BUSSINESS DEPT	APPROVAL

LEJIN

R&D DEPT	ENGINEER DEPT	APPROVAL

REV	MODIFIED DESCRIPTION	DATE	REMARK
V1.0	Initial Draft Release	2024/04/18	



Index

1. Cover	1
2. Index	2
3. Product Specification	3
4. Test Equipment & Conditions	3
5. Test Report	4
6. Reliability Test	5
7. Assemble type	6
8. Product Drawing	8

3.Product Specification

A. Electrical Characteristics	
Frequency	2400MHz ~2500 MHz 5150MHz ~5850 MHz
VSWR	<2.0
Efficiency	≥40%
Impedance	50Ohm
Polarization	Linear
Gain(2.4GHz)	≤2.24dBi
Gain(5.8GHz)	≤3.44dBi
B. Material & Mechanical Characteristics	
Material of Radiator	FPC(greem)
Cable Type	Φ1.13mm,L150mm,Black
Connector Type	IPX1
Dimension	48.2mm*8.25mm
C. Environmental	
Operation Temperature	- 20 °C ~ + 70 °C
Storage Temperature	- 30 °C ~ + 85 °C
Humidity	40%~95%

4.Test Equipment & Conditions

- | | |
|----------------------------------|---------------------|
| 1.Network Analyzers | Agilent 8753D/5071C |
| 2.HSPA and LTE protocol test set | R&S CMW500 -PT |
| 3.Communications Test Set | Agilent 8960 |
| 4.3D Chamber Test System | |

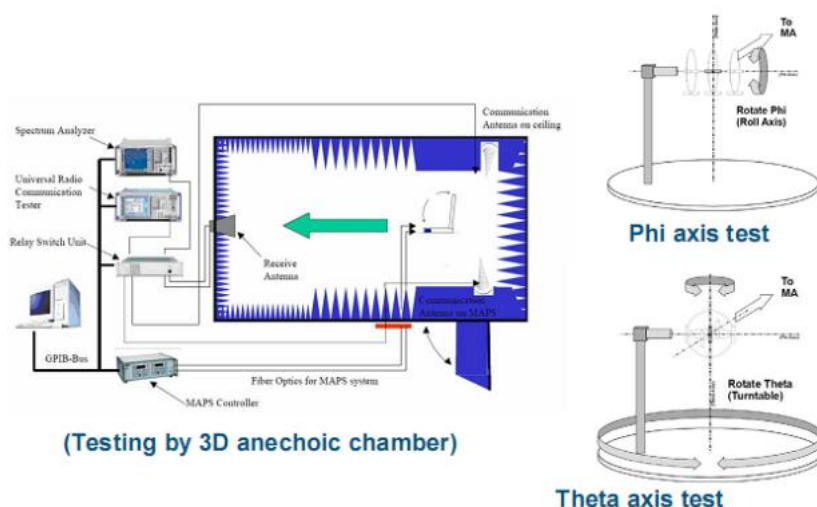


Chart 1 Test topology

5.Test Report

5.1 Voltage Standing Wave Ratio(VSWR).

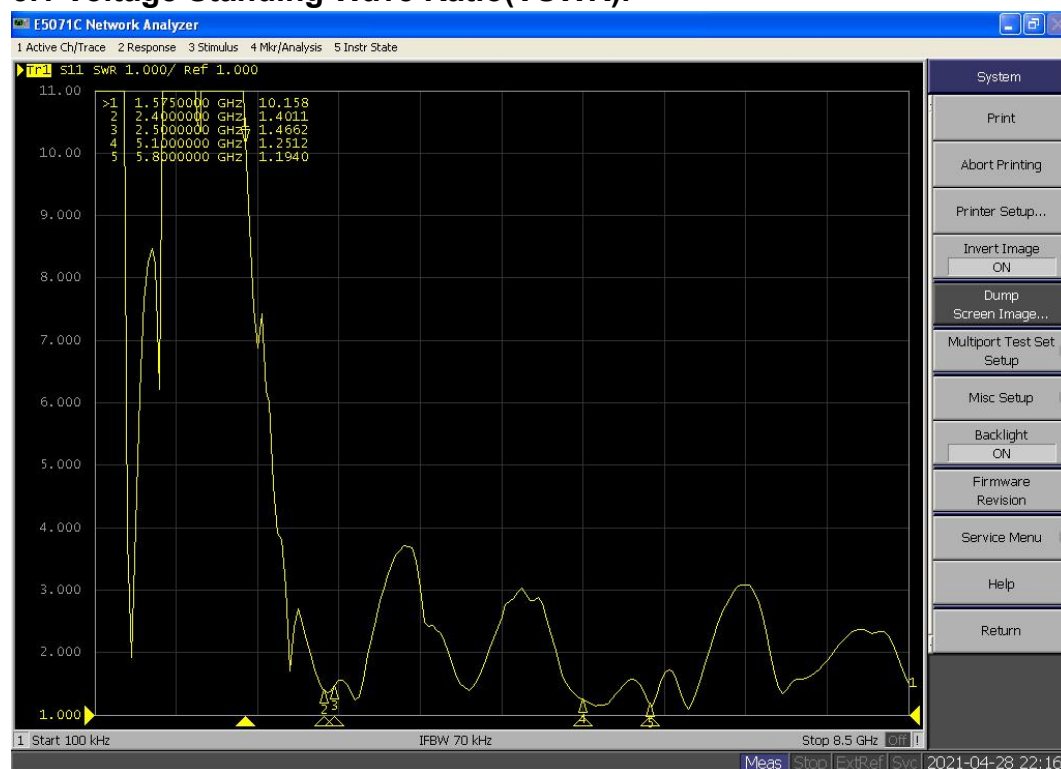



Chart 2 VSWR


5.2 Efficient and gain.

Passive	Freq(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Test For	Effi(%)	58.62	51.84	56.47	55.07	54.54	53.06	51.80	52.38	53.21	52.77	50.64
WIFI 2.4G	Gain(dBi)	2.24	2.04	2.06	2.05	1.94	1.99	2.02	2.19	1.90	1.77	1.36

Passive	Freq(MHz)	5100	5200	5300	5400	5500	5600	5700	5800	5900	6000
Test For	Effi(%)	52.8	64.9	67.99	50.82	61.64	66.8	64.38	60.63	55.61	57.48
WIFI 5G	Gain(dBi)	3.02	3.21	3.44	2.87	2.97	2.83	2.93	2.53	2.45	2.65

5.3 Radiation pattern.

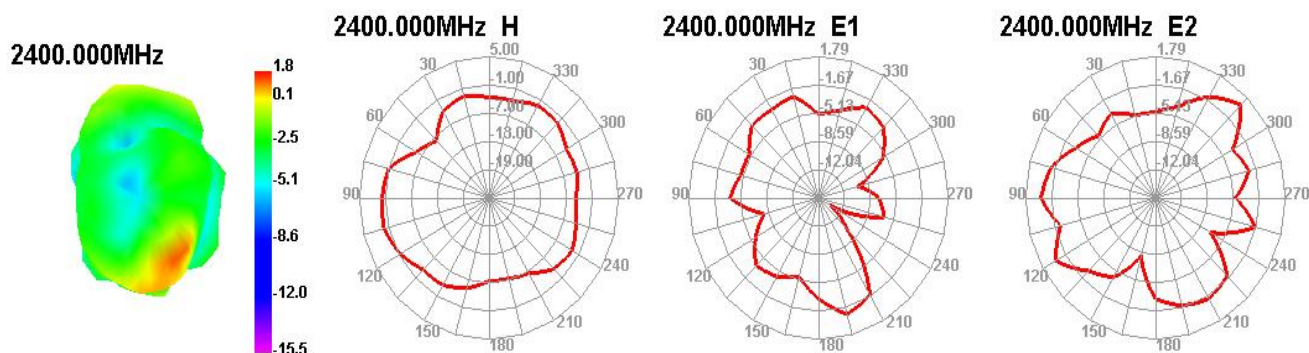

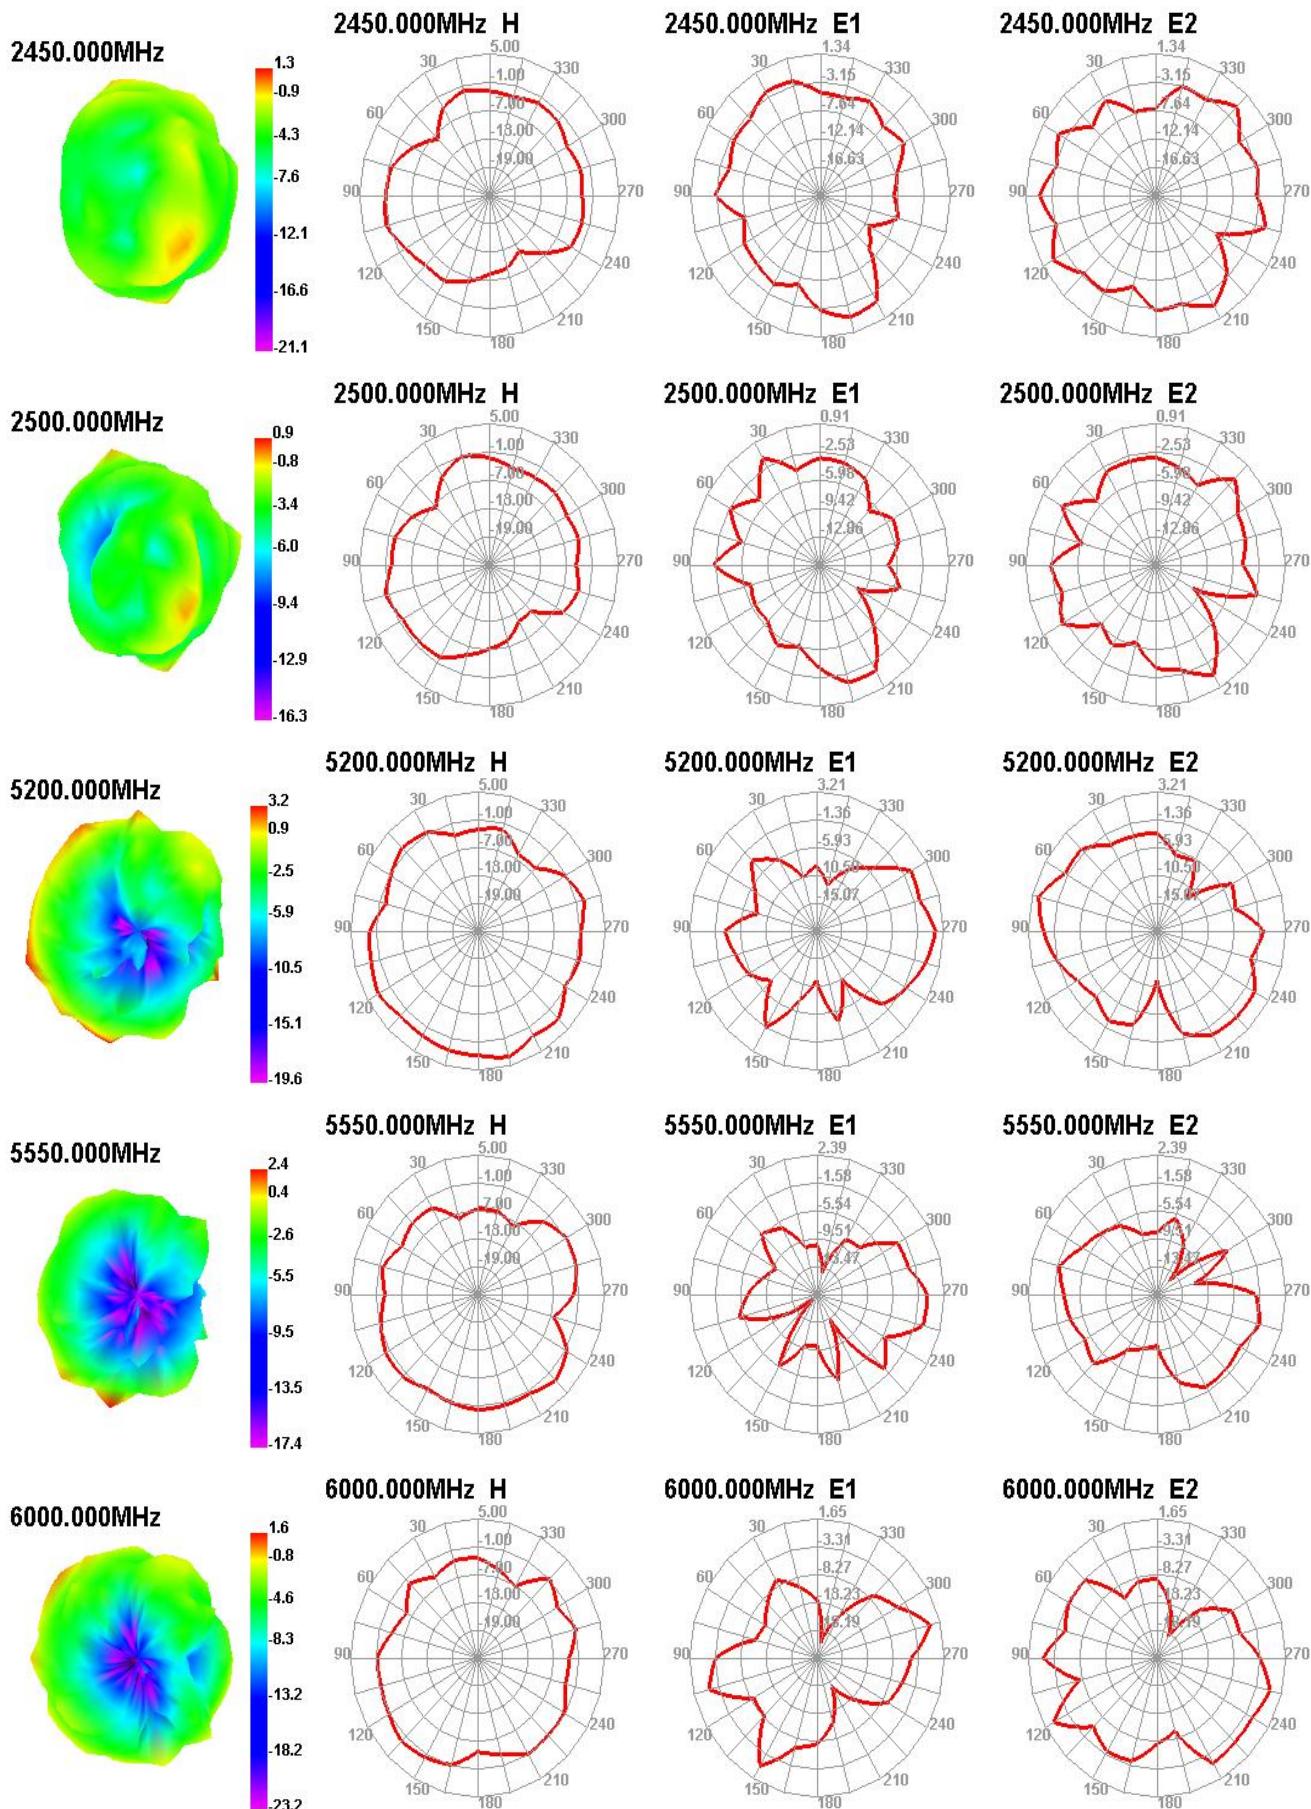



6. Reliability Test

Test Item		Test condition	Equipment	Specification	Result
1	Low Temp. Storage Test	Temperature: -30℃, Time: 48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-down the temp. to -30℃ in one hour, store antenna for 44 hours; step-up temp to 25℃, test antenna after 2 hours.	Temp. & Humi. Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
2	High Temp./High Humid Storage Test	Temperature: 85℃ Humidity: 85% RH Time: 48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-up the temp. to 80℃ and the humidity up to 85% in one hour, store antenna for 44 hours; step-down temp to 25℃, test antenna after 2 hours.	Temp. & Humi. Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
3	Salt-Spray 6 pray Test	Placing antenna in the Salt-Spray Tester, set the test condition, Temp: $35 \pm 2^\circ\text{C}$ Humidity: 85% NaCl salt spray: $5 \pm 1\%$. PH value: 6.5~7.2 Testtime: 24 hours	Salt-Spray Tester	No color change No appearance rusting	PASS

7. Assemble type(omit)

8. Product Drawing

