

TEST REPORT



Report Reference Number: QA-8292-1_Orca_Pod
Total Number of Pages: 45
Date of Issue: August 25, 2026
EMC Test Laboratory: QAI Laboratories Ltd.
Address: 3980 North Fraser Way, Burnaby, BC, V5J 5K5 Canada
Phone: (604) 527-8378
Fax: (604) 527-8368

Laboratory Accreditations (per ISO/IEC 17025:2017)



This report has been completed in accordance with the requirements of ISO/IEC 17025.
Test results contained in this report are within QAI Laboratories ISO/IEC 17025 accreditations.
QAI Laboratories authorizes the applicant to reproduce this report, provided it is reproduced in its entirety and for the use by the company's employees only.

Manufacturer: Orca Water Solutions
Address: Suite 107 - 4288 Lozells Ave
Burnaby, British Columbia, V5A 0C7
Equipment Tested: Orca Pod
Model Number(s): RCA-POD-ULTBLV1
FCC ID: 2BUOSPOD-ULTBLV1
ISED ID: 34745-POD-ULTBLV1
FVIN: RCA-POD-ULTBLV1

orca
Water is life.

This report is the confidential property of the client addressed. The report may only be reproduced in full. Publication of extracts from this report is not permitted without written approval from QAI. Any liability attached thereto is limited to the fee charged for the individual project file referenced. The results of this report pertain only to the specific sample(s) evaluated. Unless specifically stated or identified otherwise, QAI has utilized a Simple Acceptance rule per ILAC-G8 Section 4.2.1 to make conformity decisions on testing results contained in this report, as applicable



REVISION HISTORY

Date	Report Number	Details	Author's Initials
August 25, 2026	QA-8292-1	Final	JS
All previous versions of this report have been superseded by the latest dated revision as listed in the above table. Please dispose of all previous electronic and paper printed revisions accordingly.			

REPORT AUTHORIZATION

The data documented in this report is for the test equipment provided by the manufacturer and the results relate only to the item tested. The tests were conducted on the sample equipment as requested by the manufacturer for the purpose of demonstrating compliance with the standards outlined in Section I of this report as agreed upon by the Manufacturer under the quote QAI-1716.

The Manufacturer is responsible for the tested product configurations, continued product compliance, and for the appropriate auditing of subsequent products as required.

This report may comprise a partial list of tests that are required for FCC and ISED. A Declaration of Conformity can only be produced by the manufacturer. This is to certify that the following report is true and correct to the best of our knowledge.

This report is the confidential property of the client addressed. The report may only be reproduced in full. Publication of extracts from this report is not permitted without written approval from QAI. Any liability attached thereto is limited to the fee charged for the individual project file referenced. The results of this report pertain only to the specific items tested, calibrated, or sampled. Unless specifically stated or identified otherwise, QAI has utilized a simple acceptance rule to make conformity decisions on testing results contained in this report as applicable.

Testing Performed and
Report Prepared by
Jeffrey Simon P.Eng
RF/EMC Project specialist II

Report Reviewed by
Parminder Singh
Vice President, EMC Department

QAI FACILITIES

British Columbia

QAI Laboratories Inc.
Main Laboratory/Headquarters
3980 North Fraser Way,
Burnaby, BC V5J Canada

Ontario

QAI Laboratories Inc.
25 Royal Group Crescent #3,
Vaughan,
ON L4H 1X9 Canada

Virginia

QAI Laboratories Ltd.
1047 Zachary Taylor Hwy,
Suite A Huntly,
VA 22640 USA

China

QAI Laboratories Ltd
Room 408, No. 228, Jiangchang
3rd Road Jing'An District,
Shanghai, China 200436

California

QAI Laboratories Ltd.
8385 White Oak Avenue Rancho
Cucamonga, CA 91730 USA

Oklahoma

QAI Laboratories Ltd.
5110 North Mingo Road
Tulsa, OK 74117, USA

Miami

QAI Laboratories Ltd.
8148 NW 74th Ave,
Medley, FL 33166 USA

South Korea

QAI Laboratories Ltd
#502, 8, Sanbon-ro 324beon-gil
Gunpo-si, Gyeonggi-do, 15829,
South Korea

QAI EMC ACCREDITATION

QAI EMC is your one-stop regulatory compliance partner for electromagnetic compatibility (EMC) and electromagnetic interference (EMI). Products are tested to the latest and applicable EMC/EMI requirements for domestic and international markets. QAI EMC goes above and beyond being a testing facility—we are your regulatory compliance partner. QAI EMC has the capability to perform RF Emissions and Immunity for all types of electronics manufacturing including Industrial, Scientific, Medical, Information Technology, Telecom, Wireless, Automotive, Marine and Avionics.

EMC Laboratory Location	FCC Designation (3m SAC)	IC Registration (3m SAC)	A2LA Certificate
Burnaby, BC, Canada	CA9543 Lab Reg# 669742	9543A	3657.02

EMC Facility Burnaby BC, Canada



This report is the confidential property of the client addressed. The report may only be reproduced in full. Publication of extracts from this report is not permitted without written approval from QAI. Any liability attached thereto is limited to the fee charged for the individual project file referenced. The results of this report pertain only to the specific sample(s) evaluated. Unless specifically stated or identified otherwise, QAI has utilized a Simple Acceptance rule per ILAC-G8 Section 4.2.1 to make conformity decisions on testing results contained in this report, as applicable



TABLE OF CONTENTS

REVISION HISTORY	2
REPORT AUTHORIZATION	2
QAI FACILITIES	3
QAI EMC ACCREDITATION	3
EXECUTIVE SUMMARY	5
1.1 Purpose	5
1.2 Scope	5
1.3 Summary of Results	6
GENERAL INFORMATION	8
2.1 Product Description	8
2.2 Environmental Conditions	10
2.3 Measurement Uncertainty	10
2.4 Worst Test Case	10
2.5 Sample Calculations of Emissions Data	10
DATA & TEST RESULTS	12
3.1 6 dB Bandwidth	12
3.2 99% dB Bandwidth	15
3.3 RF Maximum Peak Output Power	18
3.4 Peak Power Spectral Density	21
3.5 Out-Of-Band Emissions (Band Edge)	24
3.6 Frequency Stability	26
3.7 Radiated Emissions – Out of Band 30MHz to 18GHz	32
Appendix A: ABBREVIATIONS	45



EXECUTIVE SUMMARY

1.1 Purpose

The purpose of this report is to demonstrate and document the compliance of Orca Pod as per Sections 1.2 and 1.3.

1.2 Scope

The information documented in this report is based on the test methods and levels as per Quote QAI-1649:

CFR Title 47 FCC Part 15.247 – Radio Frequency Devices, Subpart C – Intentional Radiators Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

ISED RSS-247 Issue 4: Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

RSS-Gen Issue 5 – General Requirements and Information for the Certification of Radio Apparatus

RSS-102 Issue 6 – Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus

ICES-003 Issue 7 – Information Technology Equipment (Including Digital Apparatus)

ICES-Gen Issue 2 – General Requirements for Compliance of Interference-Causing Equipment

FCC KDB 558074 D01 V05R02 - 15.247 Meas Guidance

ANSI C63.10-2020 - Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.3 Summary of Results

The following testing was performed pursuant to FCC Title 47 Part 15 and Industry Canada ICES-003 to demonstrate the testimony to “FCC, IC, & CE” mark Electromagnetic Compatibility testing for the product.

No.	Test	Applicable Standard	Requirement	Result
1	Antenna Requirement	FCC 47 CFR Part C 15.203 RSS-Gen	No user access to antenna after professional installation.	Complies
2	6 dB Bandwidth	FCC 47 CFR Part C 15.247(a)(2) RSS-247 (6.3.1) (a)	Maximum allowed 6 dB bandwidth of the hopping channel is 500 kHz.	Complies
3	99% Occupied Bandwidth	RSS-Gen	The 99% emission bandwidth is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained.	Complies
4	Peak Output Power (Conducted & Radiated)	FCC 47 CFR Part C 15.247(b)(3) RSS-247 (6.3.2)	Maximum peak conducted output power shall not exceed 1 W	Complies
5	Peak Power Spectral Density	FCC 47 CFR Part 15.247 (e) RSS-247 (6.3.1) (b) RSS-Gen (6.7)	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	Complies
5	Band Edge	FCC 47 CFR Part C 15.247 (d) RSS-247 (6.6)	In any 100 kHz bandwidth outside the frequency band in which the device is operating, the RF power shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	Complies
6	Frequency Stability	FCC 47 CFR Part C 15.215 (c) RSS Gen (8.11)	The requirement to contain the designated bandwidth of the emission within the specified frequency band and to have frequency stability of the transmitter over expected variations in temperature and supply voltage.	Complies
6	Intentional Radiated Emissions	FCC 47 CFR Part A 15.33 FCC 47 CFR Part B 15.109 FCC 47 CFR Part C 15.209 ICES-003 RSS-247	Radiated emissions requirements as stated in the standards.	Complies
7	Radiated Spurious Emissions	FCC 47 CFR Part A 15.33 FCC 47 CFR Part C 15.205 FCC 47 CFR Part C 15.209 FCC 47 CFR Part C 15.247 RSS-Gen RSS-247	Radiated emissions requirements as stated in the standards.	Complies
8	RF Exposure	FCC 47 CFR 1.1310 RSS-102	RF exposure measurements	Complies

Table 1: Applicable test standards and descriptions

This report is the confidential property of the client addressed. The report may only be reproduced in full. Publication of extracts from this report is not permitted without written approval from QAI. Any liability attached thereto is limited to the fee charged for the individual project file referenced. The results of this report pertain only to the specific sample(s) evaluated. Unless specifically stated or identified otherwise, QAI has utilized a Simple Acceptance rule per ILAC-G8 Section 4.2.1 to make conformity decisions on testing results contained in this report, as applicable



Test Equipment List

The tables below contain all the equipment used by QAI Laboratories in conducting all tests on the Equipment Under Test (EUT) as per Section I.

Emissions Test Equipment

	Manufacturer	Model	Description	Serial No.	S/W Version	Calibration Due Date
1	Com-Power Corporation	LI-220C	Line Impedance Stabilization Network (9kHz-30MHz)	20070020	N/A	2028-Dec-5
2	Sunol Sciences	SC 104V	Turntable Controller	042506-1	N/A	Indication Only
3	Sunol Sciences	SM46C	Turntable	071705-2	N/A	Indication Only
4	Maturo GmbH	BAM 4.0-P	Boresight Antenna Mast	365	3382.01	Indication Only
5	ETS Lindgren	S201	7-meter Semi-Anechoic Chamber	1030	N/A	Indication Only
6	Hewlett Packard	8447F	Amplifier (0.1-1300MHz)	1726A00566	N/A	Indication Only
7	Hewlett Packard	8449B	Preamplifier (1-26.5 GHz)	3008A00982	N/A	Indication Only
8	Microwave Lab	USMC10180	Low Noise Amplifier (0.1-18GHz)	001303JR0802A2729	N/A	Indication Only
9	Keysight Technologies	N9038B	MXE EMI Receiver, Multi-touch	MY60180014	N/A	2026-Aug-22
10	ETS-Lindgren	3117	Horn, Double-Ridge Guide Ant, 1.0 - 18 GHz	75944	N/A	2029-Mar-11
11	Sunol Sciences	JB3	Biconilog Antenna (30MHz – 3GHz)	A042004	N/A	2028-Mar-18
12	California Instruments	PACS-1	Test System - H&F	72569	N/A	2028-Apr-2
13	California Instruments	OMNI 1-18i	CDN - H&F	7127	N/A	2028-Apr-2
14	California Instruments	3001i	Power Supply - H&F	52117	CTS3.0 v3.2.0.35	2028-Apr-2
15	TESEQ	ISN T800	Impedance Stabilization Network (150kHz – 30MHz)	27133	N/A	2029-Mar-10
16	Rohde & Schwarz	FSU 67	EMI Receiver	101388	N/A	Indication only

Measurement Software List

	Manufacturer	Model	Version	Description
1	Rohde & Schwarz	EMC 32	10.35.10	Emissions Test Software

GENERAL INFORMATION

2.1 Product Description

The information provided in this section is for the Equipment Under Test (EUT) and the corresponding Auxiliary Equipment needed to perform the tests as a complete system.



Figure 1: Orca Pod

Equipment Under Test (EUT)

Equipment	Orca Pod
Description	Wireless Ultrasonic Water Submeter
Manufacturer	Altimus Design Inc. dba Orca Water Solutions
Model No.	RCA-POD-ULTBLV1
Serial No.	POD26072700001
Clock frequencies tuned upon within the EUT:	2.4 GHz (Thread)
Highest frequency generated within the EUT:	2.48 GHz



Equipment Under Test (EUT) – RF Information

RF device type	2.4 GHz IEEE 802.15.4 / Thread DTS
Model No. (HVIN)	RCA-POD-ULTBLV1
Operating frequency	2405 MHz – 2480 MHz
Number of available channels/Transmitter	15 Channels
Channel separation	5MHz
Channel bandwidth	1.2 MHz
Output Power/Transmitter (conducted)	7.6 dBm
Modulation type	O-QPSK DSSS, IEEE 802.15.4 / Thread
Test Channels (L, M, H)	2405 MHz, 2445 MHz, 2480 MHz
Data Rate	250 kbps
Adaptive	No
Geo-location-capable	No
Number of antennas	1
Antenna type	PCB antenna with U.FL connector
Antenna gain	3.2dBi (estimated Reference design)

Equipment Under Test (EUT) – General Information

Tested as	Tabletop
Dimensions	50mm (W) x 920mm (L) x 60mm (H), excluding external antenna
Declared operating temperature range:	0 – 40C
Input power	5 VDC USB power
Grounded	No
Device use	Fixed Location – Physically secured & not easily moved.

Test Modes

Test	Transmitter State	Power
1	2.4 GHz Thread Radio ON – Continuous Transmit Test Mode	5 VDC via USB-C

Auxiliary Manufacturer Supplied Equipment

Equipment	Manufacturer	Product Description	Model No.
Cell Signal Booster	Wilson Electronics	Cell Booster	460020
LoRaWAN Gateway	RAK	LoRaWAN Gateway	RAK7268CV2
Orca Ocean	Orca Ocean	HUB	RCA-OCN-BLSV001
Laptop	Microsoft	Laptop with Tera Term Software	Model: 1769

This report is the confidential property of the client addressed. The report may only be reproduced in full. Publication of extracts from this report is not permitted without written approval from QAI. Any liability attached thereto is limited to the fee charged for the individual project file referenced. The results of this report pertain only to the specific sample(s) evaluated. Unless specifically stated or identified otherwise, QAI has utilized a Simple Acceptance rule per ILAC-G8 Section 4.2.1 to make conformity decisions on testing results contained in this report, as applicable

2.2 Environmental Conditions

The equipment under test was operated and tested under the following environmental conditions:

Parameter	Conditions
Location	QAI – Burnaby
Temperature	26.0 C
Relative Humidity	55.7 %

2.3 Measurement Uncertainty

Parameter	Uncertainty
Radiated Emissions, 30MHz-1GHz	± 2.40 dB
Radiated Emissions, 1GHz-40GHz	± 2.48 dB
Radio Frequency	±1.5 x 10 ⁻⁵ MHz
Total RF Power Conducted	±1.36 dB
Spurious Emissions, Conducted	±1.36 dB
RF Power Density, Conducted	±1.36 dB
Temperature	±1°C
Humidity	±5 %
DC and low frequency voltages	±3 %

2.4 Worst Test Case

Worst-case orientation was determined during the preliminary testing. The final radiated emissions were performed in the worst-case orientation.

2.5 Sample Calculations of Emissions Data

Radiated and conducted emissions were performed using EMC32 software developed by Rohde & Schwarz. Transducer factors such as antenna factors, cable losses and amplifier gains were stored in the test templates which are used to perform the emissions measurements. After the test is finished, data is generated from the EMC32 consisting of product details, emission plots and final data tables as shown below.

Frequency (MHz)	Q-Peak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Ant. Ht. (cm)	Pol	Turntable Position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
42.663900	33.0	1000.000	120.000	100.0	H	70.0	13.2	7.5	40.5

Table 2: Sample Quasi-Peak Correction Data – Radiated

Quasi-Peak reading shown in the table above is already corrected by the software using the correction factor shown in column “Corr.” The correction factor listed under “Corr.” table calculated as:

$$\text{Corr. (dB)} = \text{Antenna factor} + \text{Cable loss}$$

Or

$$\text{Corr. (dB)} = \text{Antenna factor} + \text{Cable Loss} - \text{Amp gain (if pre-amplifier was used)}$$

The final Quasi peak reading shown in the data is calculated by the software using following equation:

$$\text{Corrected Quasi-Peak (dB}\mu\text{V/m)} = \text{Raw Quasi-Peak Reading} + \text{Antenna factor} + \text{Cable loss}$$

To obtain the final Quasi-Peak or Average reading during power line conducted emissions, transducer factors are included in the final measurement as shown below.

Frequency (MHz)	Q-Peak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	PE	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150	44.3	1000.000	9.000	GND	0.6	21.7	66.0

Table 3: Sample Quasi-Peak Correction Data - Conducted Emissions

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	PE	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150	27.2	1000.000	9.000	GND	0.6	28.8	56.0

Table 4: Sample Average Correction Data- Conducted Emissions

Quasi Peak or Average reading shown in the preceding table is already corrected by the software using the correction factor shown in column "Corr." The correction factor listed under "Corr." table calculated as:

$$\text{Corr. (dB)} = \text{Antenna factor} + \text{Cable loss}$$

The final Quasi-peak or Average reading shown in the data is calculated by the software using following equation:

$$\text{Corr. Quasi-Peak/Average Reading (dB}\mu\text{V)} = \text{Raw Quasi-Peak/Average Reading} + \text{Antenna factor} + \text{Cable loss}$$

The allowable margin from the limits, as per the standards, were calculated for both radiated and conducted emissions:

$$\text{Margin (dB)} = \text{Limit} - \text{Quasi-Peak or Average reading}$$

DATA & TEST RESULTS

3.1 6 dB Bandwidth

Date Performed:	August 19, 2026
Test Standard:	FCC 47 CFR Part 15.247 (a)(2) RSS-247 Issue 4 (6.3.1)(a)
Test Method:	FCC KDB 558074 D01 ANSI C63.10 Relative Measurement Procedure
Modifications:	None
Final Result:	Complies

Applicable Regulations:

FCC 47 CFR Part 15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

RSS-247 Issue 4 (6.3.1)(a)

The minimum 6 dB bandwidth shall be 500 kHz.

Test Setup:

The EUT was tested inside the SAC via output radiated measurements per ANSI C63.10: 2013, 7.4.


A spectrum analyzer or other instrument providing a spectral display is recommended for these measurements. When using a spectrum analyzer or other instrument providing a spectral display, the video bandwidth shall be set to a value at least three times greater than the IF bandwidth of the measuring instrument to avoid the introduction of unwanted amplitude smoothing. Video filtering is not used during occupied bandwidth tests.

Spectrum Analyzer method performing OBW measurements per ANSI C63.10 11.8 and FCC KDB 558074 D01
Spectrum Analyzer settings: Span = 3MHz, RBW = 100kHz, VBW = 300 kHz Trace stabilization time: 10 minutes.

Measurement Data and Plots:


Channels	Carrier Frequency (MHz)	6dB Bandwidth (kHz)	Limit minimum (kHz)	Result
Low	2405	1230	500	Complies
Middle	2440	1230	500	Complies
High	2480	1240	500	Complies

Table 5: 6 dB Bandwidth Results

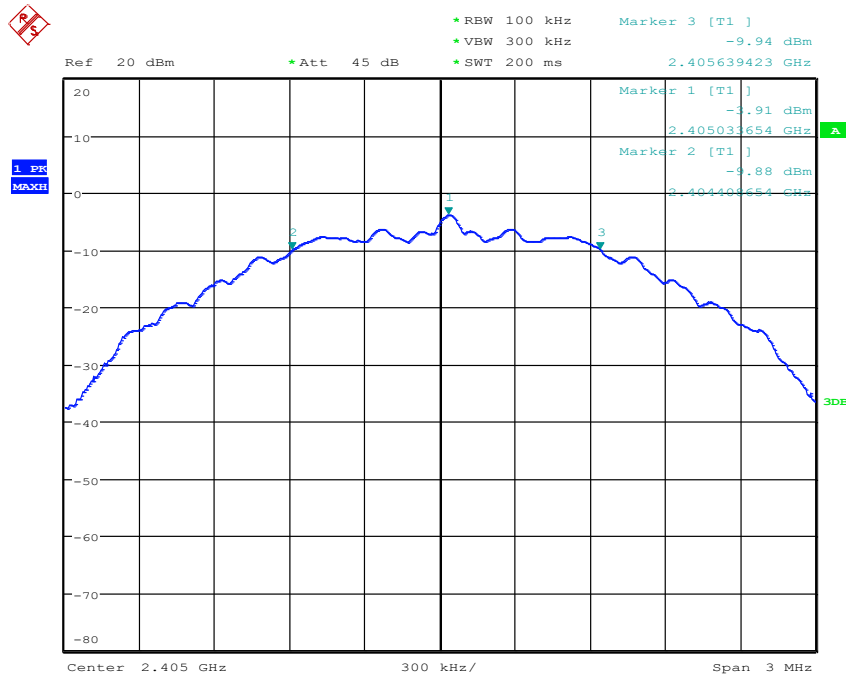

Date: 19.AUG.2026 14:59:59


Figure 3: 6 dB Bandwidth – Low Channel

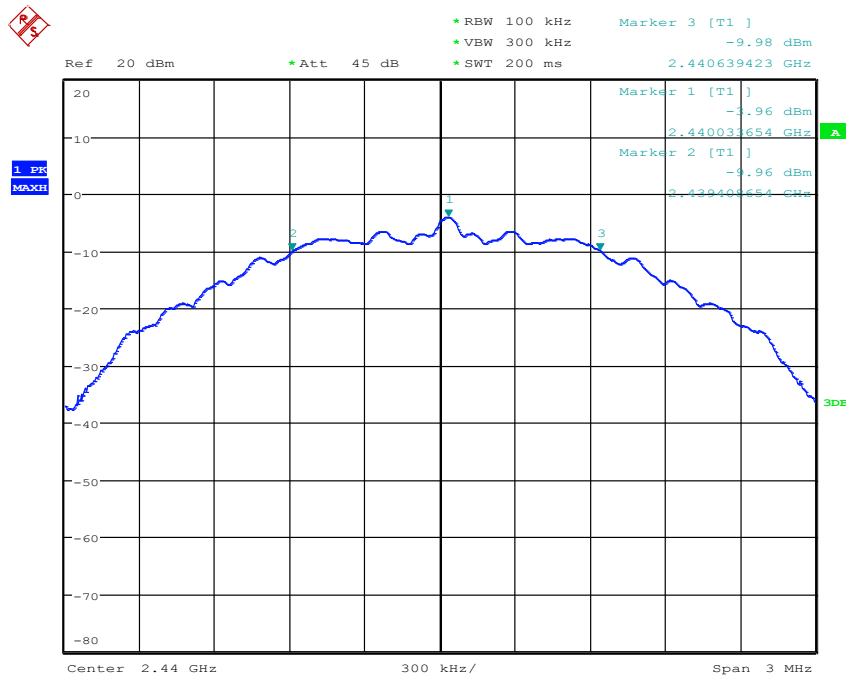

Date: 19.AUG.2026 15:14:53

Figure 4: 6 dB Bandwidth - Middle Channel

This report is the confidential property of the client addressed. The report may only be reproduced in full. Publication of extracts from this report is not permitted without written approval from QAI. Any liability attached thereto is limited to the fee charged for the individual project file referenced. The results of this report pertain only to the specific sample(s) evaluated. Unless specifically stated or identified otherwise, QAI has utilized a Simple Acceptance rule per ILAC-G8 Section 4.2.1 to make conformity decisions on testing results contained in this report, as applicable

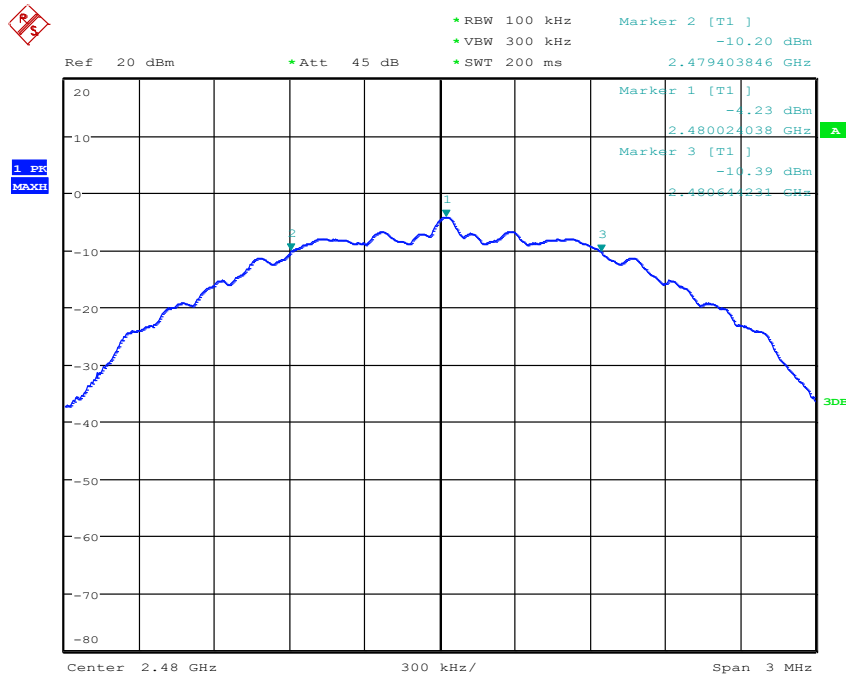

Date: 19.AUG.2026 15:28:57

Figure 5: 6 dB Bandwidth - High Channel



3.2 99% dB Bandwidth

Date Performed: August 19, 2026

Test Standard: FCC 47 CFR Part 15.247 (a)(2)
RSS-247 (6.3.1)(a)
RSS-Gen (6.7)

Test Method: FCC KDB 558074 D01
ANSI C63.10
Relative Measurement Procedure

Modifications: None

Final Result: Complies

Applicable Regulations:

The “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained.

Test Setup:

The EUT was tested outside the SAC via output conducted measurements per ANSI C63.10


A spectrum analyzer or other instrument providing a spectral display is recommended for these measurements. When using a spectrum analyzer or other instrument providing a spectral display, the video bandwidth shall be set to a value at least three times greater than the IF bandwidth of the measuring instrument to avoid the introduction of unwanted amplitude smoothing. Video filtering is not used during occupied bandwidth tests.

Spectrum Analyzer method performing OBW measurements per ANSI c63.10 and FCC KDB 558074 D01
Spectrum Analyzer settings: (Automatic Setting) Span = 3MHz, RBW = 100kHz, VBW = 300kHz Trace stabilization time: 10 minutes.

Measurement Data and Plots:


Channels	Carrier Frequency (MHz)	99% Bandwidth (kHz)	Limit minimum (kHz)	Result
Low	2405	2177	500	Complies
Middle	2440	2187	500	Complies
High	2480	2192	500	Complies

Table 6: 99% Bandwidth Results

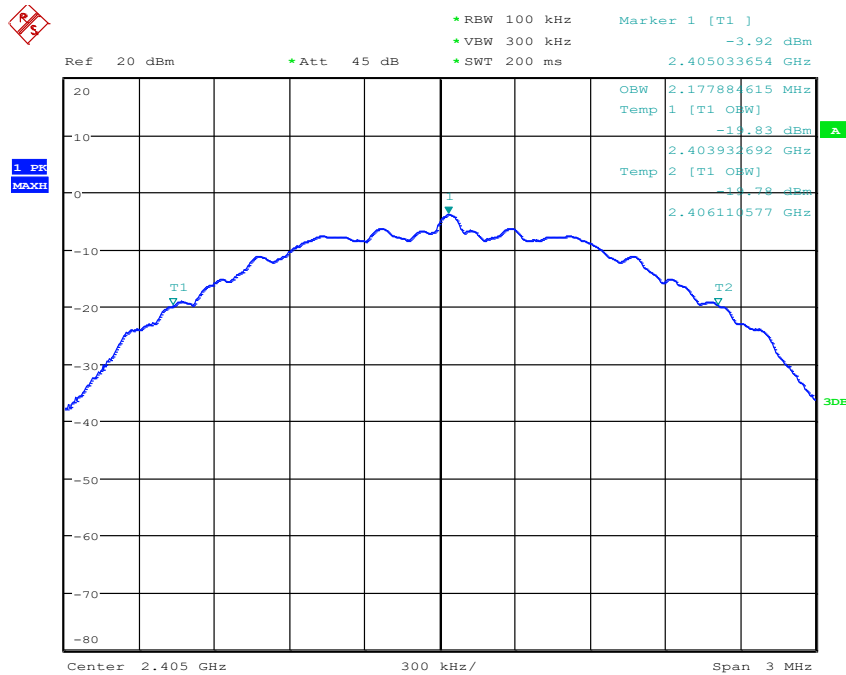

Date: 19.AUG.2026 15:07:12


Figure 6: 99% Bandwidth – Low Channel

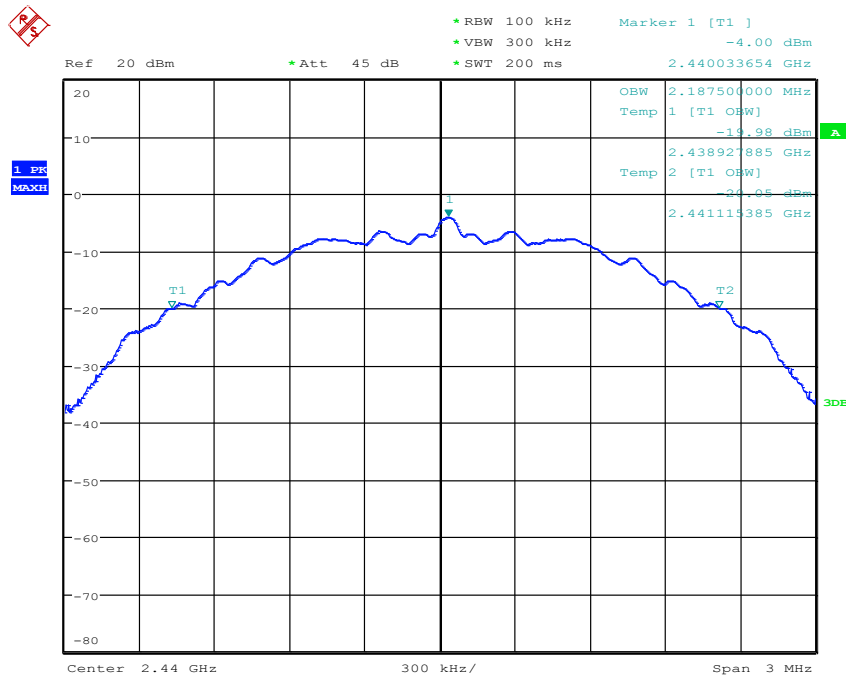

Date: 19.AUG.2026 15:18:54

Figure 7: 99% Bandwidth - Middle Channel

This report is the confidential property of the client addressed. The report may only be reproduced in full. Publication of extracts from this report is not permitted without written approval from QAI. Any liability attached thereto is limited to the fee charged for the individual project file referenced. The results of this report pertain only to the specific sample(s) evaluated. Unless specifically stated or identified otherwise, QAI has utilized a Simple Acceptance rule per ILAC-G8 Section 4.2.1 to make conformity decisions on testing results contained in this report, as applicable

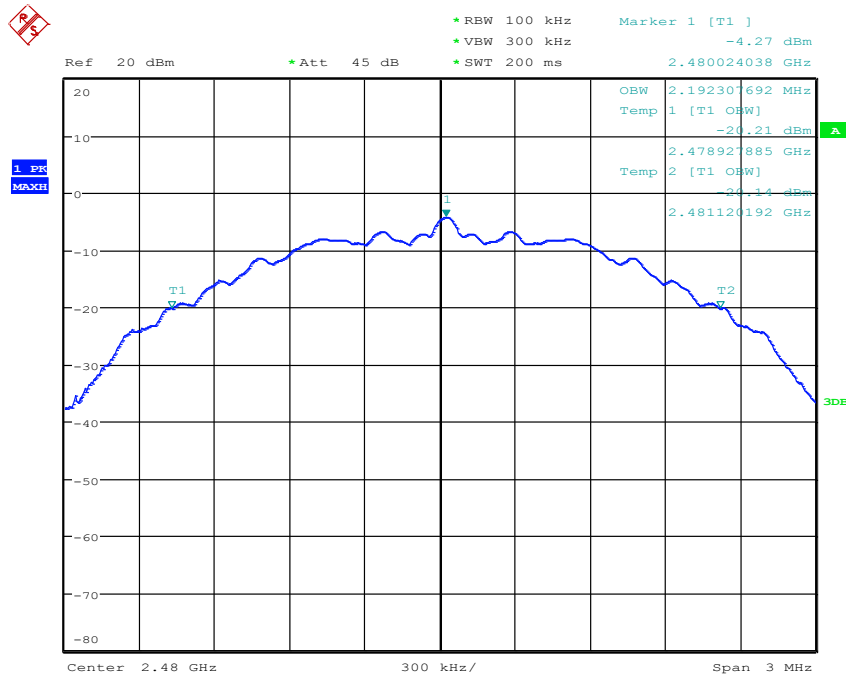

Date: 19.AUG.2026 15:35:05

Figure 8: 99% Bandwidth - High Channel



3.3 RF Maximum Peak Output Power

Date Performed: August 19, 2026

Test Standard: FCC CFR 47 Part 15.247 (b)(3)
IC RSS-247 Issue 2 (6.3.2)

Test Method: FCC KDB 558074 D01
ANSI C63.10

Modifications: None.

Final Result: Complies

Applicable Regulation:

FCC CFR 47 Part 15.247 (b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

IC RSS-247 Issue 2 (6.3.2)

For DTS operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W, and the e.i.r.p. shall not exceed 4 W, except as provided in section 6.5 a) and b).

Test Setup:


The EUT was tested on a test bench with fundamental Modulated and continuous transmission
Spectrum Analyzer method performing conducted measurements per ANSI C63.10 11.9.1.1 and FCC KDB 558074 D01
Spectrum Analyzer settings: Span = 100 MHz, RBW = 1MHz, VBW = 3MHz Trace stabilization time: 10 minutes.
Receiver RBW, VBW & Span adjusted to obtain worst case radiated power.

Measurement Data:

Carrier Frequency (MHz)	Raw Peak (dBm)	Correction Factor ¹ (dBm)	Conducted Output Power (dBm)	Limit (dBm)	Margin (dB)	Results
2405	-3.48	11.08	7.6	30.0	22.40	Complies
2440	-3.39	11.11	7.72	30.0	22.28	Complies
2480	-3.70	11.09	7.39	30.0	22.61	Complies

Note: Correction factor includes 0.3dB adaptor loss which is provided by manufacturer, as per this Low channel has 11.08db attenuation, of which 0.3dB comes from Adaptor


Table 7: RF Peak Output Power

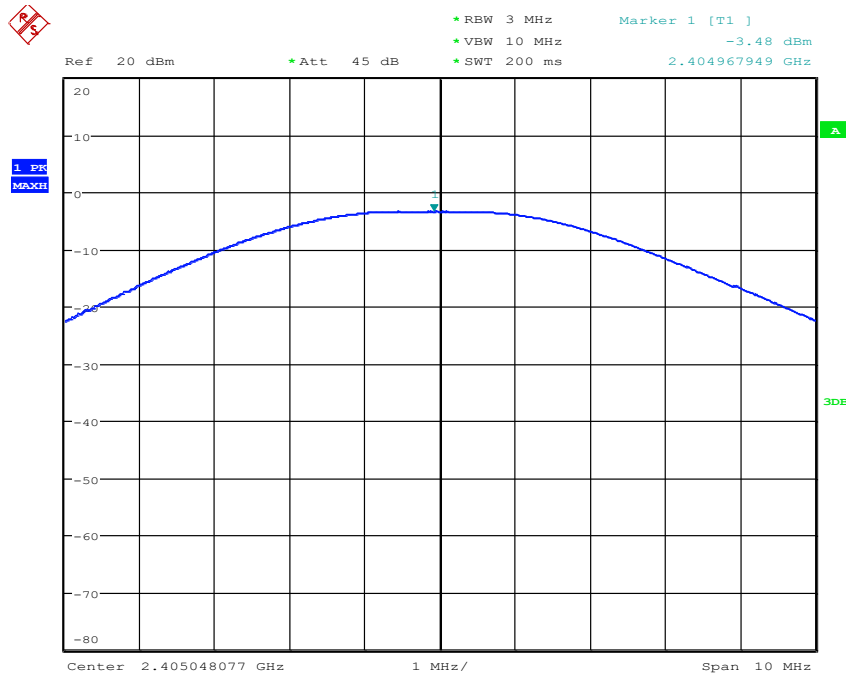

Date: 19.AUG.2026 14:30:18

Note: Radiated Peak output power measured is -44.76 dBm, upon converting it is 62.28 dBuV


Figure 9: Peak Output Power – Low Channel

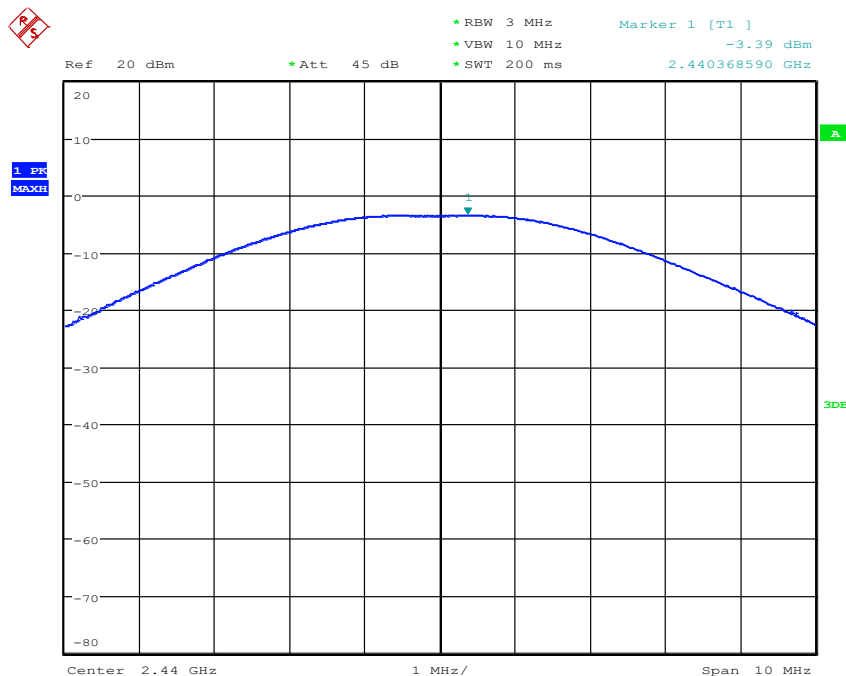

Date: 19.AUG.2026 14:33:11

Figure 10: Peak Output Power - Middle Channel

This report is the confidential property of the client addressed. The report may only be reproduced in full. Publication of extracts from this report is not permitted without written approval from QAI. Any liability attached thereto is limited to the fee charged for the individual project file referenced. The results of this report pertain only to the specific sample(s) evaluated. Unless specifically stated or identified otherwise, QAI has utilized a Simple Acceptance rule per ILAC-G8 Section 4.2.1 to make conformity decisions on testing results contained in this report, as applicable

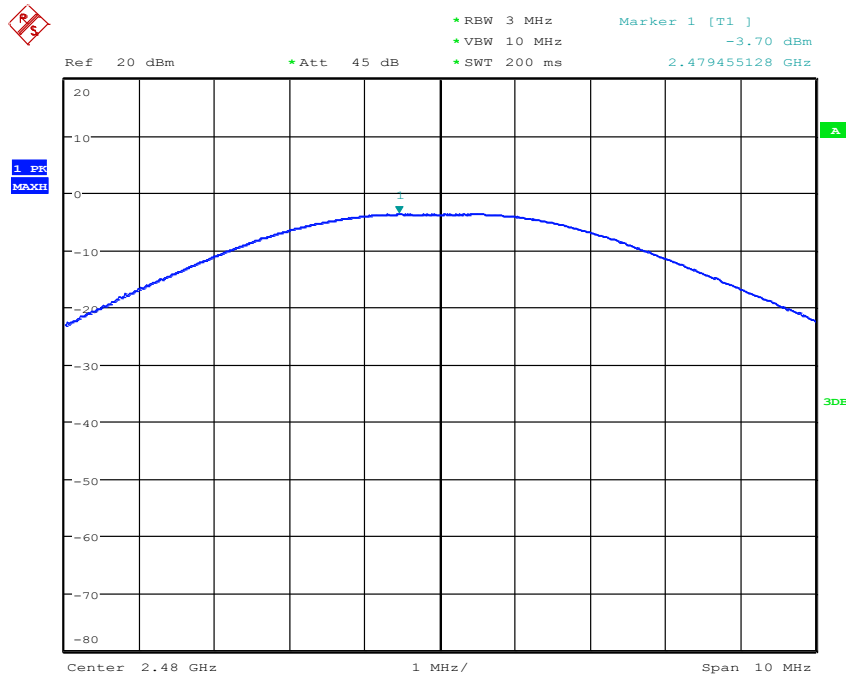

Date: 19.AUG.2026 14:35:53

Figure 11: Peak Output Power - High Channel



3.4 Peak Power Spectral Density

Date Performed:	August 19, 2026
Test Standard:	FCC 47 CFR Part 15.247 (e) RSS-247 (6.3.1)(b) RSS-Gen (6.7)
Test Method:	FCC KDB 558074 D01 ANSI C63.10 (11.10.2)
Modifications:	None
Final Result:	Complies

Applicable Regulations:

FCC 47 CFR Part 15.247 (e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

RSS-247 (6.3.1)(b)

The transmitter power spectral density conducted from the transmitter to the antenna(s) shall not be greater than 8 dBm/3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 6.3.2 The power spectral density shall be determined using the same method as is used to determine the maximum conducted output power.

Test Setup:

The EUT was tested inside the SAC via Radiated peak output measurements per ANSI C63.10

A spectrum analyzer or other instrument providing a spectral display is recommended for these measurements. When using a spectrum analyzer or other instrument providing a spectral display, the video bandwidth shall be set to a value at least three times greater than the IF bandwidth of the measuring instrument to avoid the introduction of unwanted amplitude smoothing. Video filtering is not used during occupied bandwidth tests.


Spectrum Analyzer method performing OBW measurements per ANSI C63.10 and FCC KDB 558074 D01

Spectrum Analyzer settings: Automatic Setting Span = 3MHz, RBW = 10kHz, VBW = 30kHz Trace stabilization time: 10 minutes.

Measurement Data and Plots:


Channels	Carrier Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit Maximum (dBm/3kHz)	Result
Low	2405	-1.85	8	Complies
Middle	2440	-2.00	8	Complies
High	2480	-2.47	8	Complies

Table 8: 99% Bandwidth Results

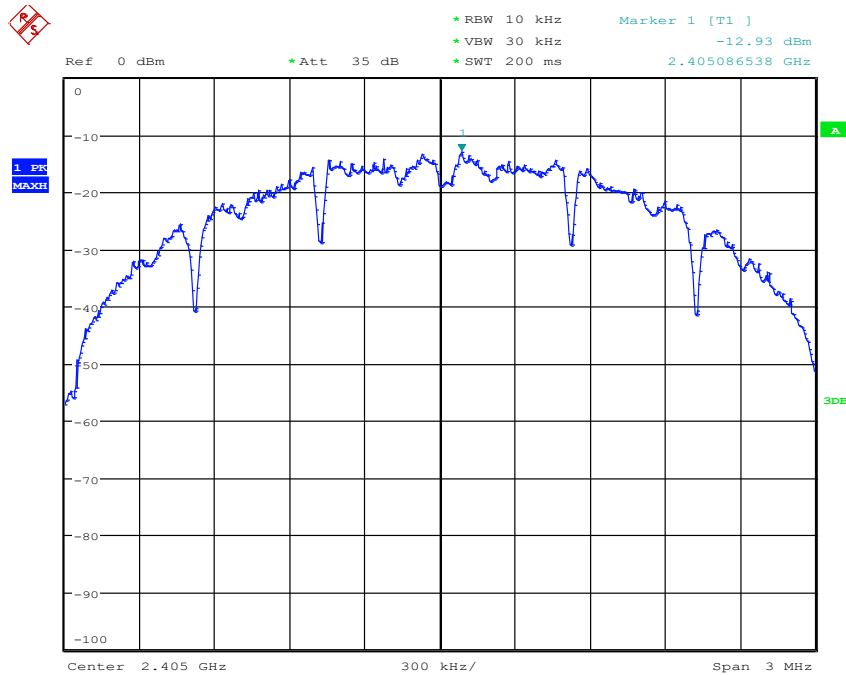

Date: 19.AUG.2026 16:49:15


Figure 12: Power spectral Density – Low Channel

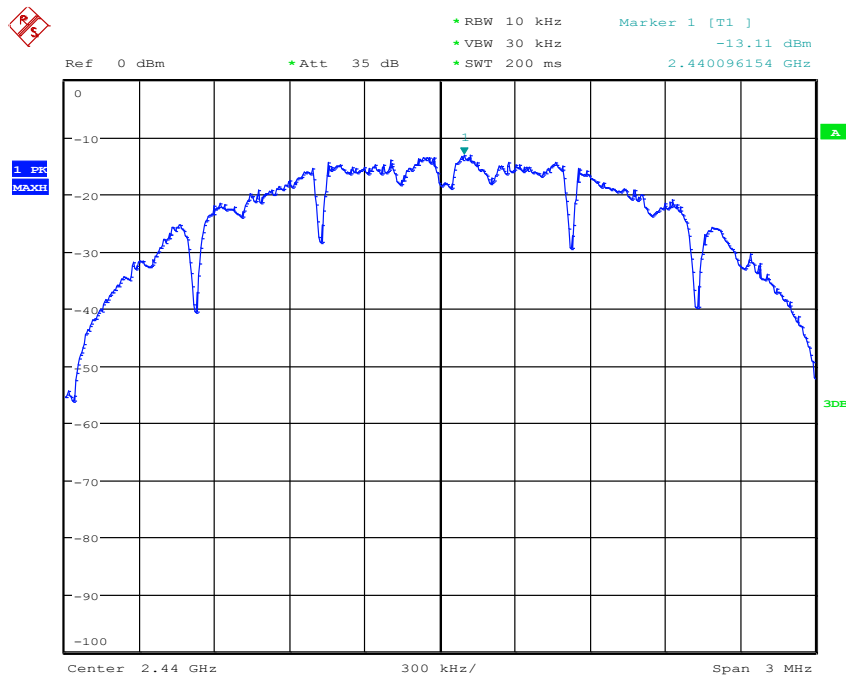

Date: 19.AUG.2026 17:00:14

Figure 13: Power spectral Density - Middle Channel

This report is the confidential property of the client addressed. The report may only be reproduced in full. Publication of extracts from this report is not permitted without written approval from QAI. Any liability attached thereto is limited to the fee charged for the individual project file referenced. The results of this report pertain only to the specific sample(s) evaluated. Unless specifically stated or identified otherwise, QAI has utilized a Simple Acceptance rule per ILAC-G8 Section 4.2.1 to make conformity decisions on testing results contained in this report, as applicable

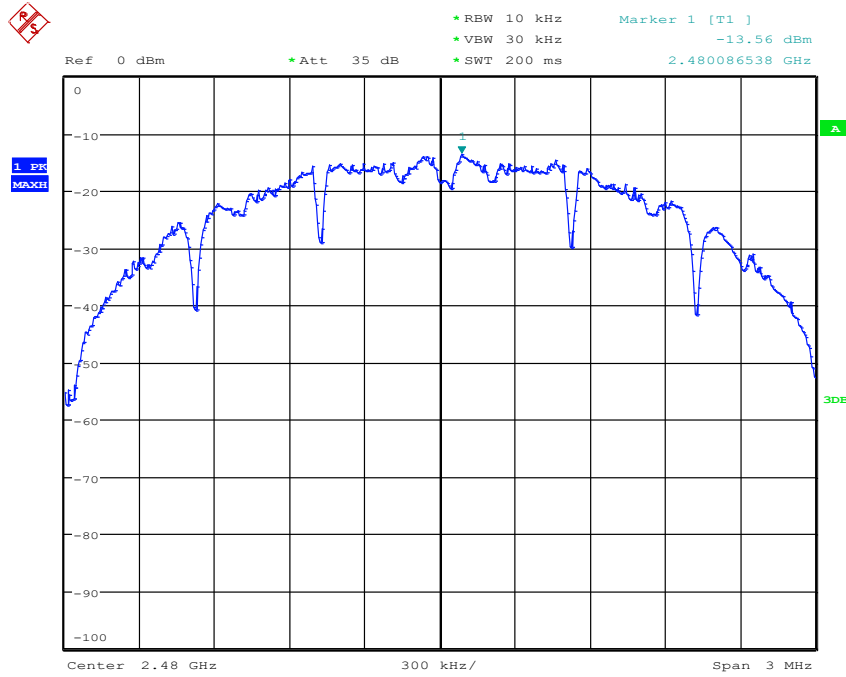

Date: 19.AUG.2026 17:07:53

Figure 14: 99% Bandwidth - High Channel

3.5 Out-Of-Band Emissions (Band Edge)

Date Performed:	August 19, 2026
Test Standard:	FCC 47 CFR Part 15.247 (d) RSS-247 (6.6)
Test Method:	FCC KDB 558074 D01 ANSI C63.10:2013 Relative Method Span = Wide enough to capture the peak level of the emission closest to the band edge, as well as any modulation products that fall outside of the band. Ref Level = High enough to keep the signal from overdriving the input mixer RBW = 100 kHz, VBW = 300 kHz Trace Detector: Peak, Trace: Max Hold
Modifications:	None
Final Result:	Complies

Applicable Regulation:

FCC 47 CFR Part 15.247 (d)

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, shall be at least 20 dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, the attenuation required shall be 30 dB instead of 20dB.

RSS-247 (6.6)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum device, digitally modulated device, or hybrid system is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power – based on either an RF conducted or a radiated measurement – provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 6.3.2, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Setup:


The EUT was tested inside the SAC via Radiated Emissions measurements per ANSI C63.10:2013.

Measurement Data and Plots:

Band Edge	Highest Out of Band Emission	Limit	Result
Low	-34.52	-12.4 dB	Complies
High	-30.57	-12.4 dB	Complies


Note: Highest conducted output power is 7.6 dB, 20 dB lower will result in -12.4 dB

Table 9: Band Edge Results

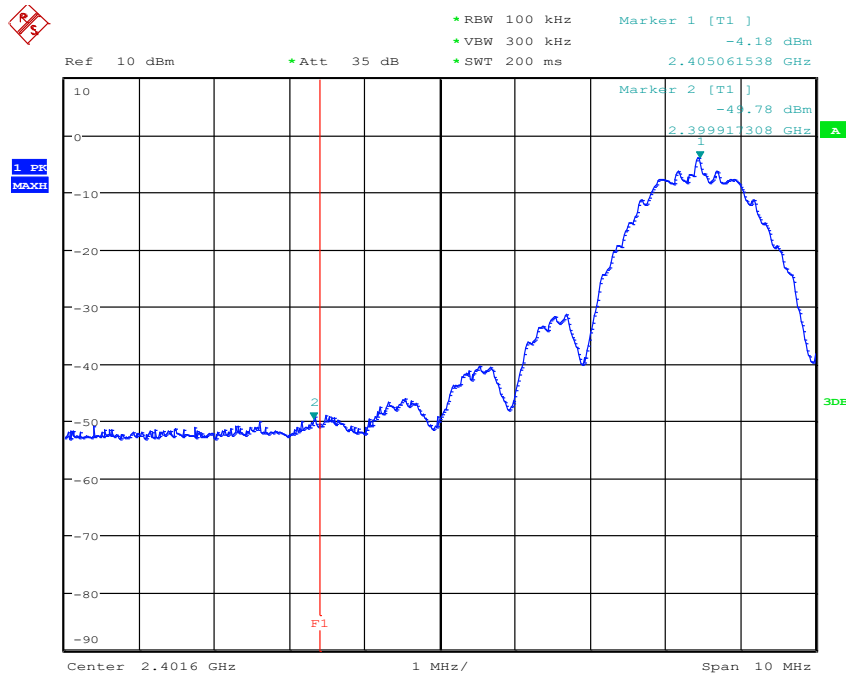

Date: 19.AUG.2026 17:22:57

Figure 15: Band Edge - Low Channel

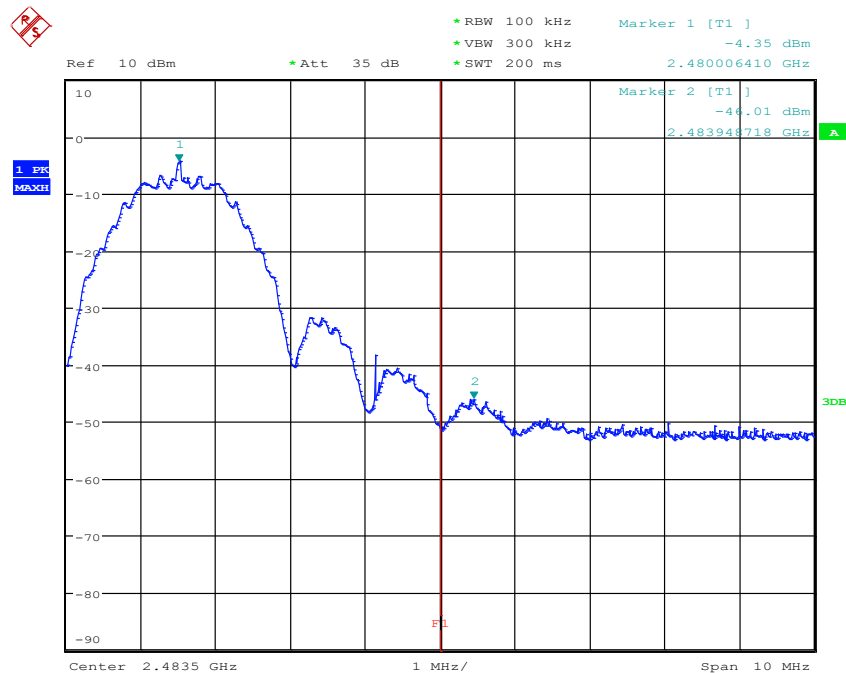

Date: 19.AUG.2026 17:18:17

Figure 16: Band Edge - High Channel

This report is the confidential property of the client addressed. The report may only be reproduced in full. Publication of extracts from this report is not permitted without written approval from QAI. Any liability attached thereto is limited to the fee charged for the individual project file referenced. The results of this report pertain only to the specific sample(s) evaluated. Unless specifically stated or identified otherwise, QAI has utilized a Simple Acceptance rule per ILAC-G8 Section 4.2.1 to make conformity decisions on testing results contained in this report, as applicable

3.6 Frequency Stability

Date Performed:	August 20, 2026
Test Standard:	FCC CFR 47 Part 15.215 (C): RSS-Gen Issue 5 (8.11)
Test Method:	ANSI C63.10:2013 RSS-Gen Issue 5
Final Result:	Complies

Applicable Regulation:

FCC CFR 47 Part 15.215 (C):

The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.


RSS-Gen Issue 05 (8.11):

If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation.

Test Setup:


The EUT was tested in an environmental chamber per RSS-Gen and ANSI C63.26:2015.

Measurement Data and Plots:

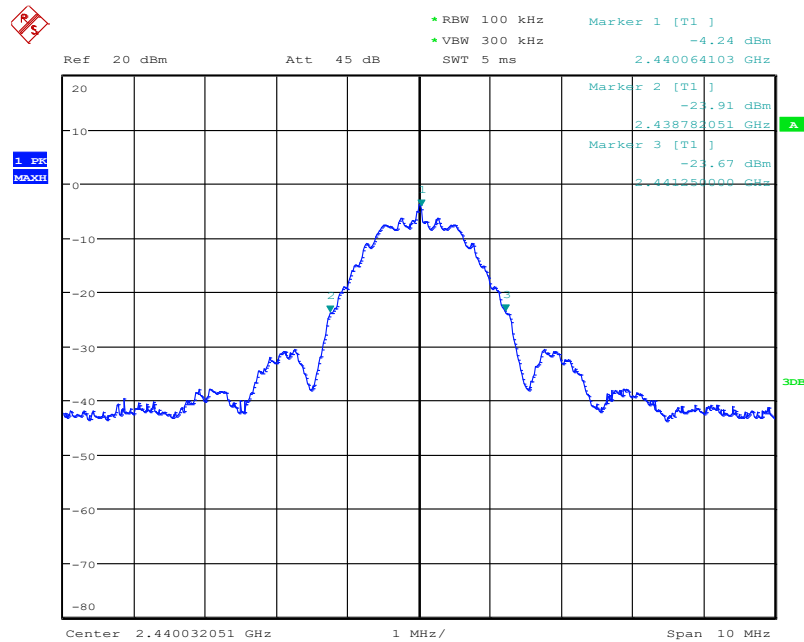

Date: 20.AUG.2026 12:06:29


Figure 17: Frequency stability - Low Channel at 0°C

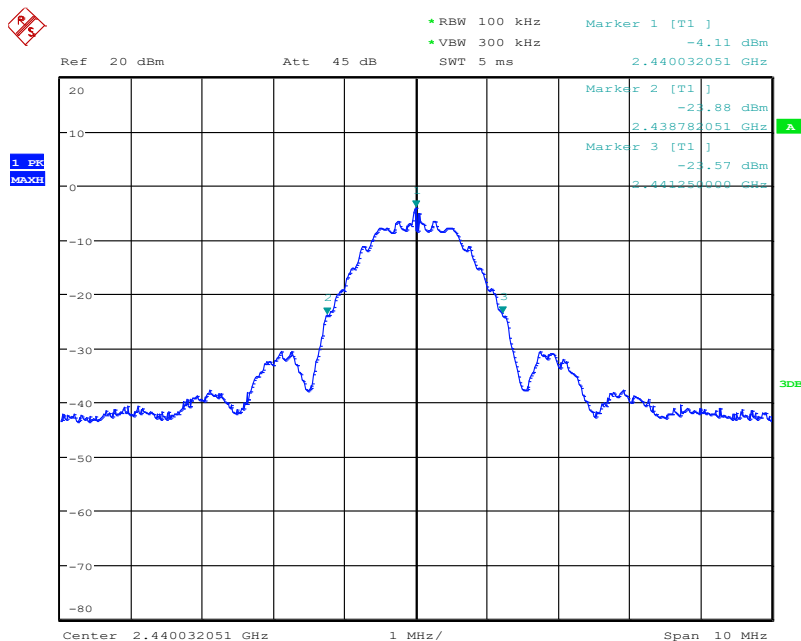

Date: 20.AUG.2026 12:15:03


Figure 18: Frequency stability - Low Channel at 10°C

This report is the confidential property of the client addressed. The report may only be reproduced in full. Publication of extracts from this report is not permitted without written approval from QAI. Any liability attached thereto is limited to the fee charged for the individual project file referenced. The results of this report pertain only to the specific sample(s) evaluated. Unless specifically stated or identified otherwise, QAI has utilized a Simple Acceptance rule per ILAC-G8 Section 4.2.1 to make conformity decisions on testing results contained in this report, as applicable

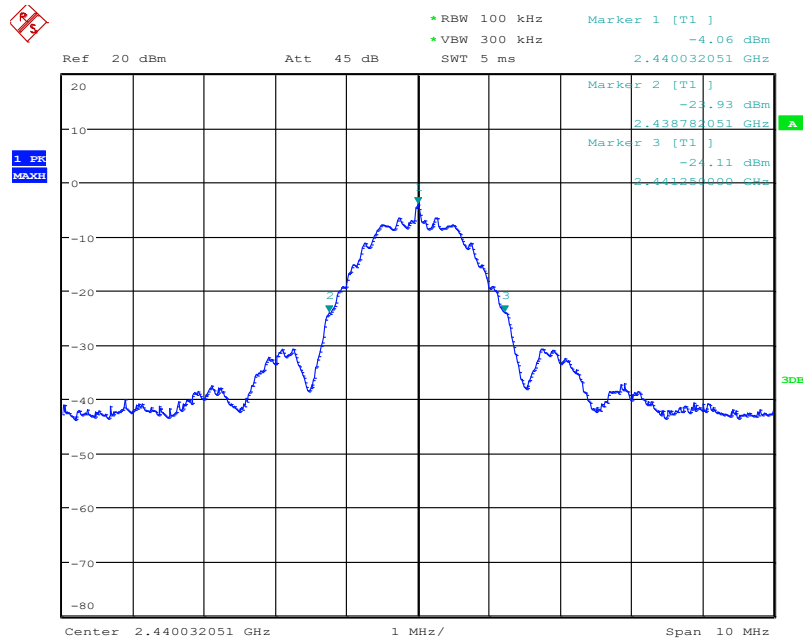


Date: 20.AUG.2026 12:23:25

Figure 19: Frequency stability - Low Channel at 20°C

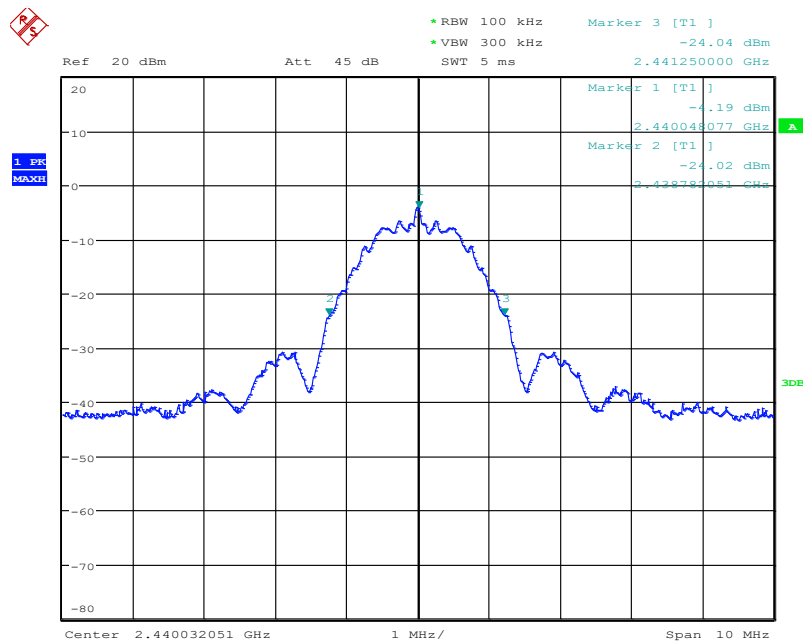


Date: 20.AUG.2026 11:52:47

Figure 20: Frequency stability - Low Channel at 25°C

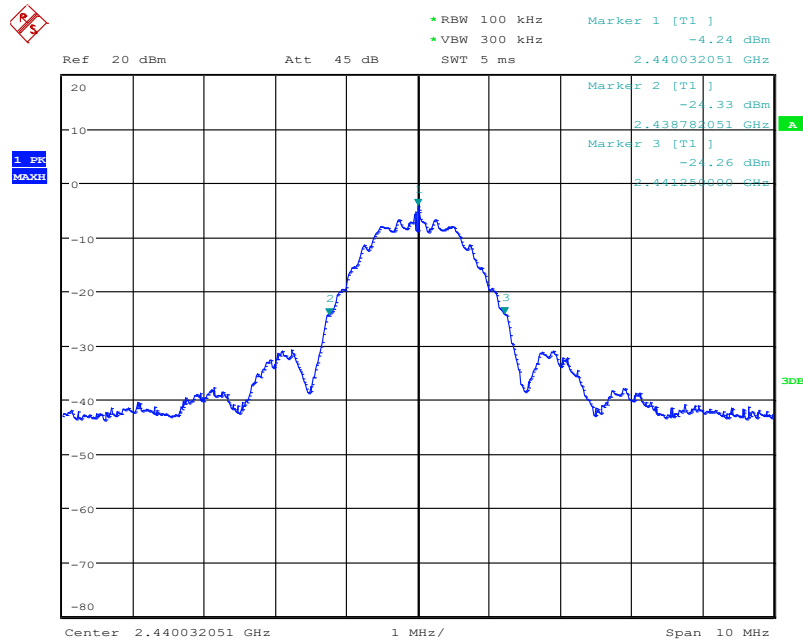


Date: 20.AUG.2026 12:30:51

Figure 21: Frequency stability - Low Channel at 30°C

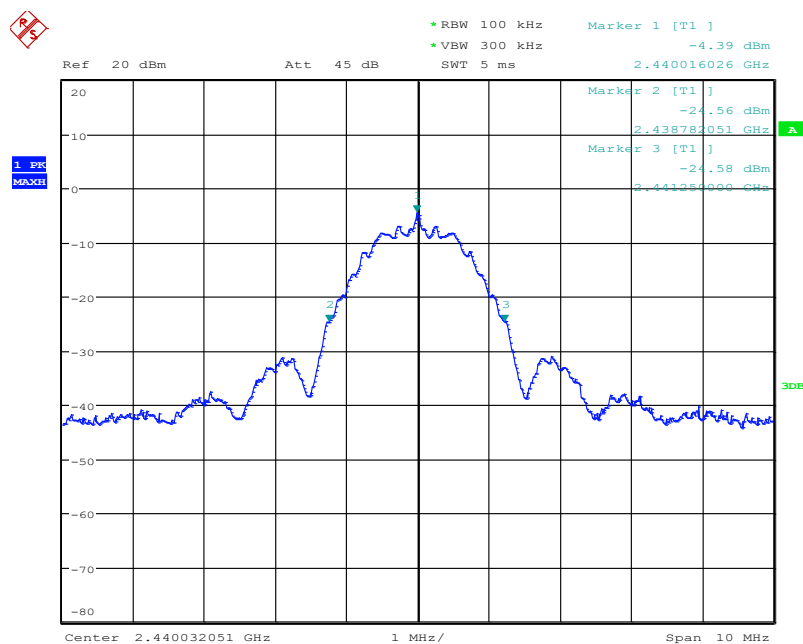


Date: 20.AUG.2026 12:43:00

Figure 22: Frequency stability - Low Channel at 40°C

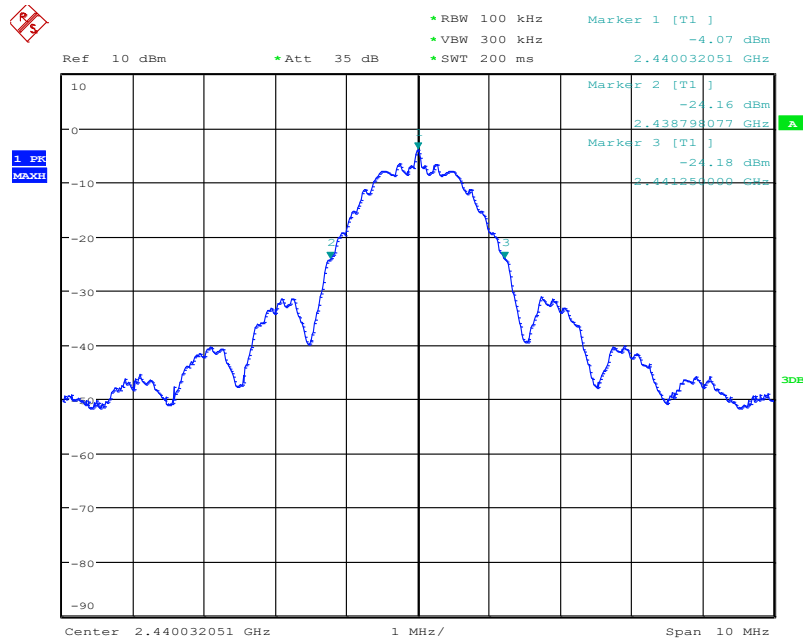

Date: 20.AUG.2026 11:11:12


Figure 23: Frequency stability - Low Channel at 102V

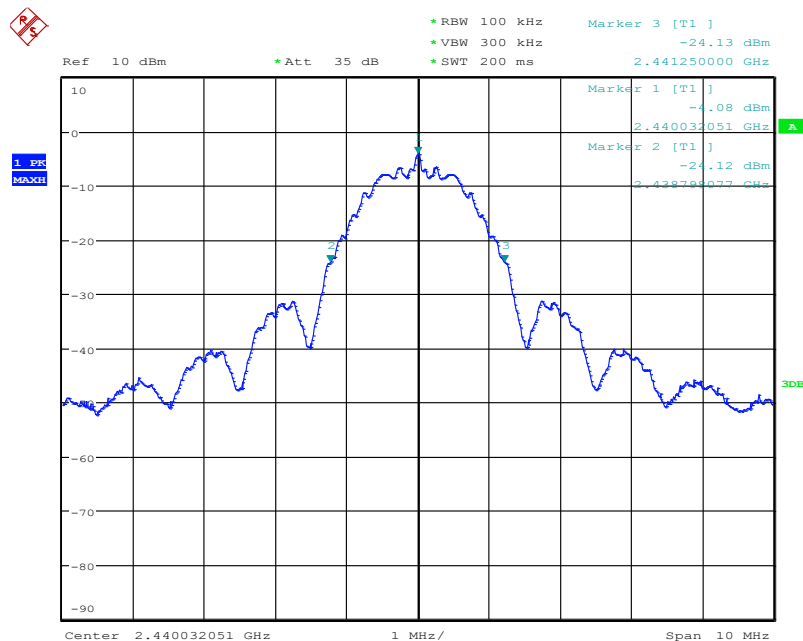

Date: 20.AUG.2026 10:56:15

Figure 24: Frequency stability - Low Channel at 120V

This report is the confidential property of the client addressed. The report may only be reproduced in full. Publication of extracts from this report is not permitted without written approval from QAI. Any liability attached thereto is limited to the fee charged for the individual project file referenced. The results of this report pertain only to the specific sample(s) evaluated. Unless specifically stated or identified otherwise, QAI has utilized a Simple Acceptance rule per ILAC-G8 Section 4.2.1 to make conformity decisions on testing results contained in this report, as applicable

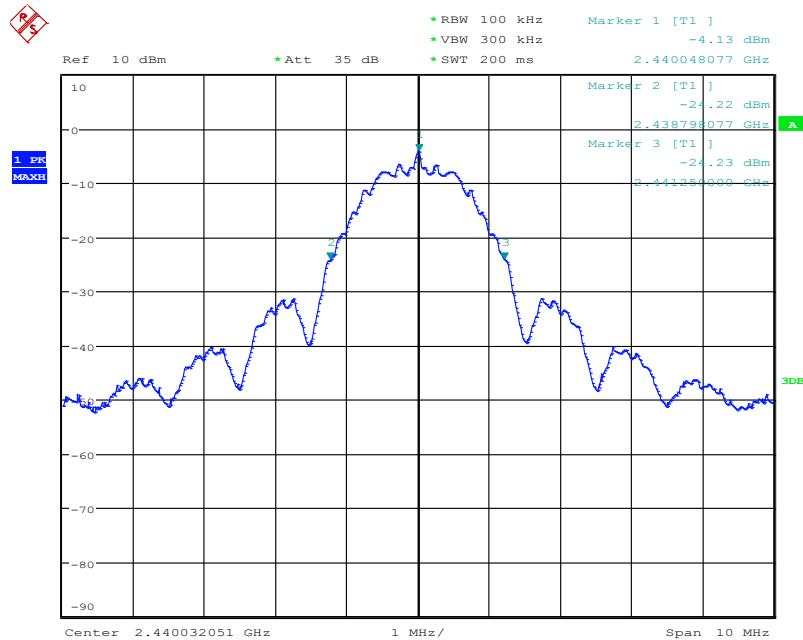

Date: 20.AUG.2026 11:17:54

Figure 25: Frequency stability - Low Channel at 138V

3.7 Radiated Emissions – Out of Band 30MHz to 18GHz

Date Performed: July 23rd, 30th, August 10th and 18th 2026

Test Standard: FCC 47 CFR Part 15.33 (a)(1), (5)
FCC 47 CFR Part 15.109
FCC 47 CFR Part 15.205 (a), (b)
FCC 47 CFR Part 15.209 (a)
FCC 47 CFR Part 15.247 (d)
ICES-003 Issue 7
RSS-247

Test Method: ANSI C63.4:2014

Modifications: None

Final Result: Complies

Applicable Standard:

FCC 47 CFR Part 15.33 (a)(1), (5): Frequency range of radiated measurements

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.075	30
1.075 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower.

FCC 47 CFR Part 15.109: Radiated emission limits

- a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of emission (MHz)	Field strength (microvolts/meter)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

- e) Carrier current systems used as unintentional radiator or other unintentional radiators that are designed to conduct their radio frequency emissions via connecting wires or cables and that operate in the frequency range of 9 kHz to 30 MHz, including devices that deliver the radio frequency energy to transducers, such as ultrasonic devices not covered under

This report is the confidential property of the client addressed. The report may only be reproduced in full. Publication of extracts from this report is not permitted without written approval from QAI. Any liability attached thereto is limited to the fee charged for the individual project file referenced. The results of this report pertain only to the specific sample(s) evaluated. Unless specifically stated or identified otherwise, QAI has utilized a Simple Acceptance rule per ILAC-G8 Section 4.2.1 to make conformity decisions on testing results contained in this report, as applicable

Part 18, shall comply with the radiated emission limits for intentional radiators provided in 15.209 for the frequency range of 9 kHz to 30 MHz.

FCC 47 CFR Part 15.205 (a), (b): Restricted bands of operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	
13.36-13.41			

The field strength of emissions appearing within these frequency bands shall not exceed the limits show in § 15.209

FCC 47 CFR Part 15.209 (a): Radiated emission limits; general requirements

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency, <i>f</i> (MHz)	Maximum Field strength Quasi-peak (dBμV/m at 3 m)
0.009 – 0.490	$20 \cdot \log(2400/F(\text{kHz})) + 40 \text{ dB}$
0.490 – 1.705	$20 \cdot \log(24000/F(\text{kHz})) + 20 \text{ dB}$
1.705 – 30.0	49.5
30 – 88	40.0
88 – 216	43.5
216 – 960	46.0
above 960	54.0

Note 1: The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

Note 2: The emissions limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz., 110-490 kHz. and above 1000 MHz.
Radiated emission limits in these three bands are based on measurements employing an average detector

FCC 47 CFR Part 15.247 (d): Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

ICES-003 3.2.2 Radiated emission limits

The quasi-peak limits for the electric component of the radiated field strength emitted from ITE or digital apparatus, within 30 MHz to 1 GHz, for a measurement distance of 3 m or 10 m, are:

Frequency Range (MHz)	Class A (3 m) Quasi-peak (dBμV/m)	Class A (10 m) Quasi-peak (dBμV/m)	Class B (3 m) Quasi-peak (dBμV/m)	Class B (10 m) Quasi-peak (dBμV/m)
30 – 88	50.0	40.0	40.0	30.0
88 – 216	54.0	43.5	43.5	33.1
216 – 230	56.9	46.4	46.0	35.6
230 – 960	57.0	47.0	47.0	37.0
960 - 1000	60.0	49.5	54.0	43.5

At and above 1 GHz, except for outdoor units of home satellite receiving systems, the ITE or digital apparatus shall comply with:

Frequency Range (MHz)	Class A Average (dBμV/m)	Class A Peak (dBμV/m)	Class B Average (dBμV/m)	Class B Peak (dBμV/m)
1 - F_M	60	80	54	74

F_M is determined by:

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108$ MHz	1 GHz
$108 \text{ MHz} \leq F_X \leq 500$ MHz	2 GHz
$500 \text{ MHz} \leq F_X \leq 1$ GHz	5 GHz
$F_X > 1$ GHz	$5 \times F_X$ up to a maximum of 40 GHz

Test Setup:

The EUT was tested in a 3 m SAC and was positioned on the front of the turntable and the radiated output of the device was measured for all emissions up to 18 GHz.

Measurement Data and Plots:

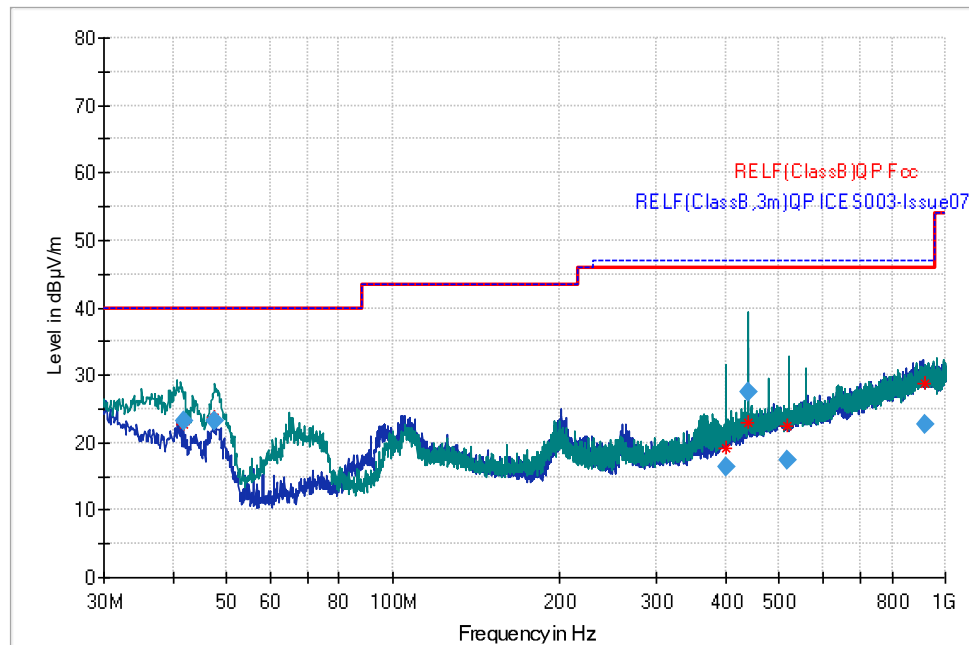


Figure 26: Radiated Emissions, Factory mode from 30MHz to 1GHz

Measurement Data and Plots:

Frequency MHz	Quasi Peak (dBuV/m)	Height (cm)	Pol	Azimuth (°)	Corr. (dB/m)	Limit (dBuV/m)	Margin (dB)	Result
41.8566	23.19	210.0	V	194	-17.9	40.00	16.81	Complies
47.4793	23.18	112.0	V	238	-21.4	40.00	16.82	Complies
399.5985	16.46	135.0	V	105	-12.5	46.00	29.54	Complies
440.1692	27.58	105.0	V	113	-10.9	46.00	18.42	Complies
518.6074	17.36	148.0	V	69	-9.8	46.00	28.64	Complies
916.3282	22.63	138.0	H	187	-2.4	46.00	23.37	Complies

Table 10: Radiated Emissions, Factory mode from 30MHz to 1GHz

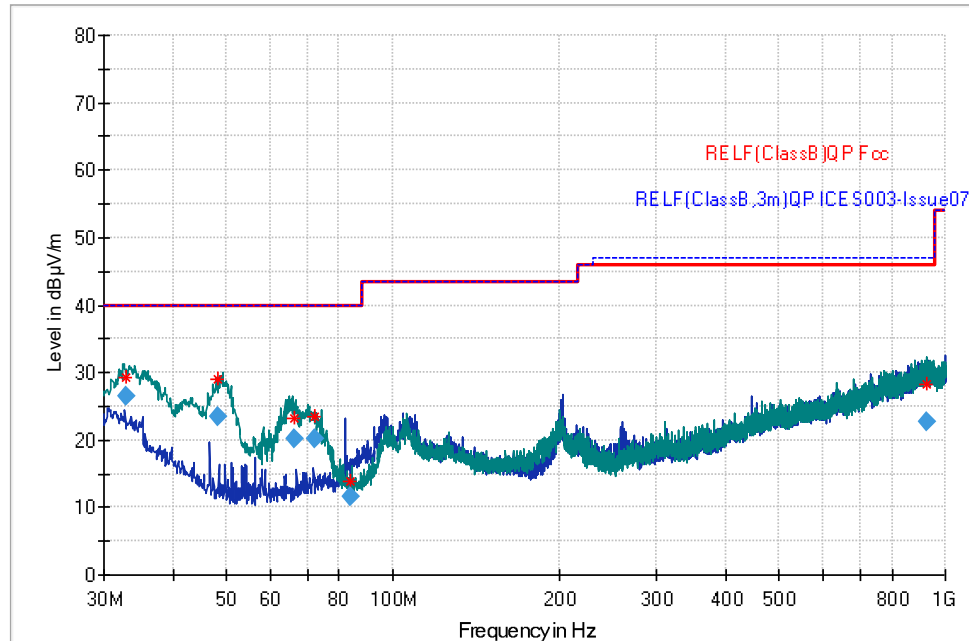


Figure 27: Radiated Emissions, Low Channel from 30MHz to 1GHz

Measurement Data and Plots:

Frequency MHz	QuasiPeak (dBuV/m)	Height (cm)	Pol	Azimuth (°)	Corr. (dB/m)	Limit (dBuV/m)	Margin (dB)	Result
32.9944	26.46	141.0	V	87	-11.3	40.00	13.54	Complies
48.2585	23.49	151.0	V	17	-21.8	40.00	16.51	Complies
66.1354	20.11	115.0	V	104	-22.0	40.00	19.89	Complies
72.1934	20.21	128.0	V	14	-21.8	40.00	19.79	Complies
83.9150	11.57	400.0	H	310	-22.6	40.00	28.43	Complies
926.8519	22.68	366.0	V	168	-2.0	46.00	23.32	Complies

Note: This scan is done in worst case mode with both transmitter on with highest possible power, Notch filter is used

Table 11: Radiated Emissions, Low Channel from 30MHz to 1GHz

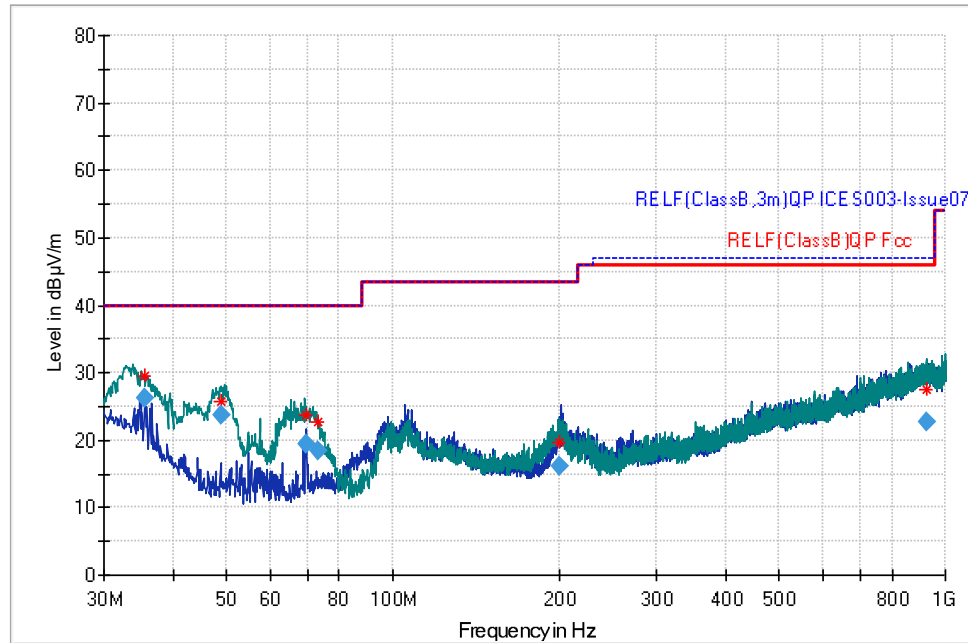


Figure 28: Radiated Emissions, Mid Channel from 30MHz to 1GHz

Measurement Data and Plots:

Frequency MHz	QuasiPeak (dBuV/m)	Height (cm)	Pol	Azimuth (°)	Corr. (dB/m)	Limit (dBuV/m)	Margin (dB)	Result
35.5542	26.29	100.0	V	165	-13.2	40.00	13.71	Complies
49.0160	23.68	105.0	V	0	-22.0	40.00	16.32	Complies
69.5188	19.51	132.0	V	111	-21.8	40.00	20.50	Complies
73.0120	18.33	114.0	V	110	-21.8	40.00	21.67	Complies
199.8930	16.17	305.0	H	0	-16.6	43.50	27.33	Complies
927.0162	22.71	188.0	V	155	-1.9	46.00	23.29	Complies

Note: This scan is done in worst case mode with both transmitter on with highest possible power, Notch filter is used

Table 12: Radiated Emissions, Mid Channel from 30MHz to 1GHz

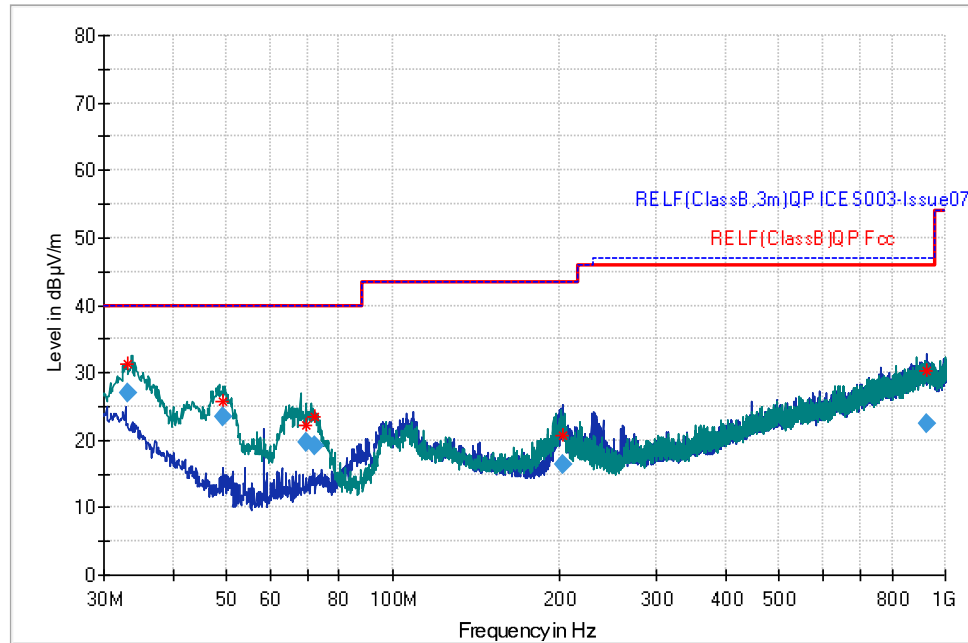


Figure 29: Radiated Emissions, High Channel from 30MHz to 1GHz

Measurement Data and Plots:

Frequency MHz	QuasiPeak (dBuV/m)	Height (cm)	Pol	Azimuth (°)	Corr. (dB/m)	Limit (dBuV/m)	Margin (dB)	Result
33.0179	26.89	161.0	V	251	-11.3	40.00	13.11	Complies
49.3406	23.36	128.0	V	29	-22.1	40.00	16.64	Complies
69.8302	19.57	146.0	V	25	-21.8	40.00	20.43	Complies
72.1161	19.13	112.0	V	114	-21.8	40.00	20.87	Complies
203.8206	16.44	300.0	H	262	-17.7	43.50	27.06	Complies
924.3049	22.54	315.0	H	249	-2.1	46.00	23.46	Complies

Note: This scan is done in worst case mode with both transmitter on with highest possible power, Notch filter is used

Table 13: Radiated Emissions, High Channel from 30MHz to 1GHz

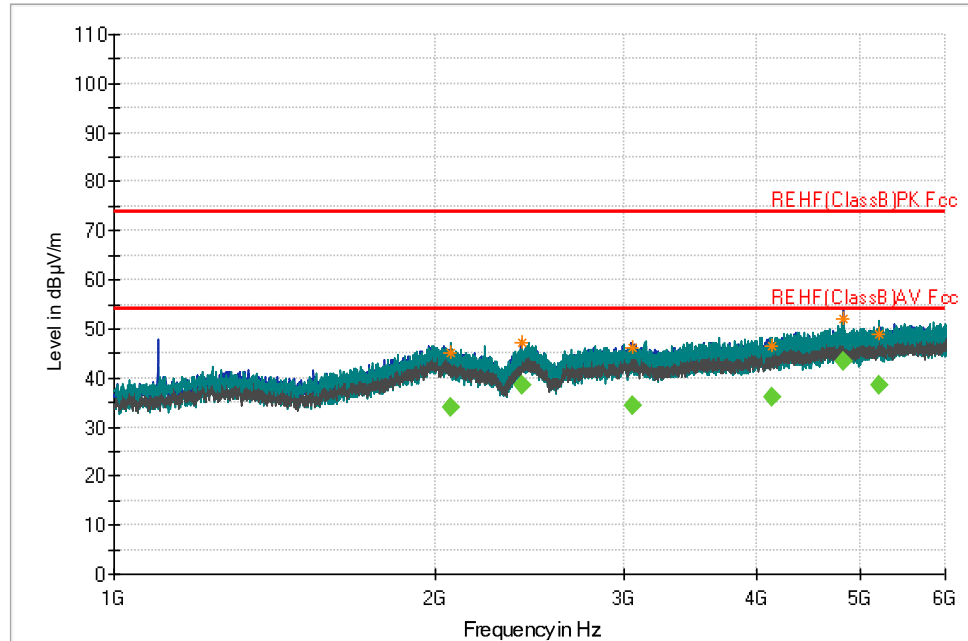


Figure 30: Radiated Emissions, Low Channel from 1GHz – 6GHz

Measurement Data and Plots:

Frequency MHz	QuasiPeak (dBuV/m)	Average (dBuV/m)	Height (cm)	Pol	Azimuth (°)	Corr. (dB/m)	Limit (dBuV/m)	Margin (dB)	Result
2067.6860	---	34.13	175.0	V	179	1.5	54.00	19.87	Complies
2405.5520	---	38.52	231.0	H	33	0.7	54.00	15.48	Complies
3053.6980	---	34.35	317.0	H	233	2.3	54.00	19.65	Complies
4126.2280	---	36.00	151.0	V	71	5.9	54.00	18.00	Complies
4810.2440	---	43.36	103.0	H	60	7.9	54.00	10.64	Complies
5206.5340	---	38.53	156.0	V	233	9.3	54.00	15.47	Complies

Note: This scan is done in worst case mode with both transmitter on with highest possible power, Notch filter is used

Table 14: Radiated Emissions, Low Channel from 1 GHz – 6GHz

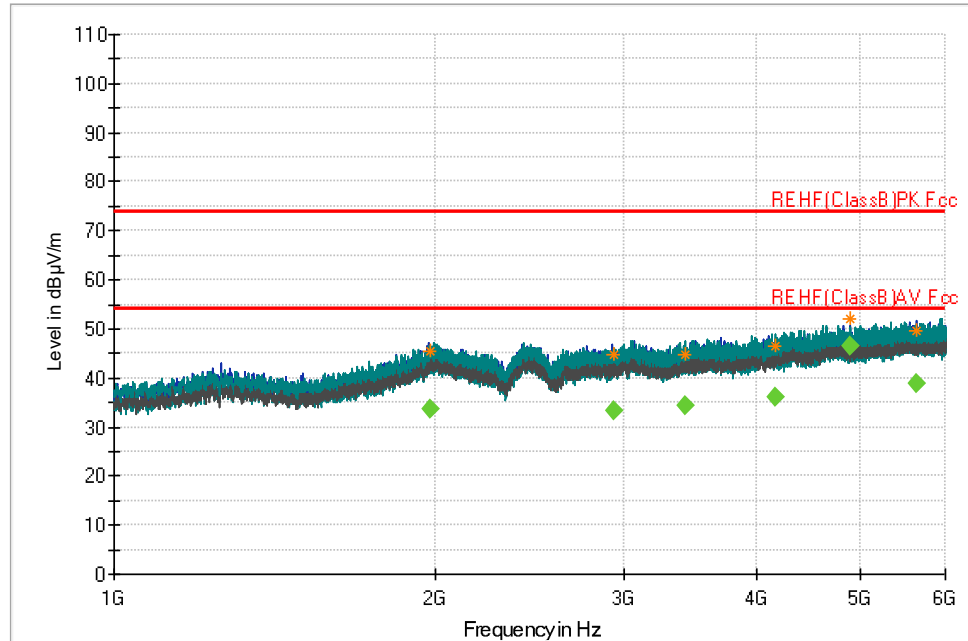


Figure 31: Radiated Emissions, Mid Channel from 1GHz – 6GHz

Measurement Data and Plots:

Frequency MHz	QuasiPeak (dBuV/m)	Average (dBuV/m)	Height (cm)	Pol	Azimuth (°)	Corr. (dB/m)	Limit (dBuV/m)	Margin (dB)	Result
1976.8320	---	33.82	368.0	H	260	1.4	54.00	20.18	Complies
2934.0160	---	33.25	383.0	H	223	1.9	54.00	20.75	Complies
3422.3040	---	34.27	145.0	V	339	3.6	54.00	19.73	Complies
4160.5280	---	36.26	269.0	V	224	6.1	54.00	17.74	Complies
4878.9640	---	46.43	100.0	H	336	8.0	54.00	7.57	Complies
5635.6860	---	38.79	278.0	H	135	9.4	54.00	15.21	Complies

Note: This scan is done in worst case mode with both transmitter on with highest possible power, Notch filter is used

Table 15: Radiated Emissions, Mid Channel from 1 GHz – 6GHz

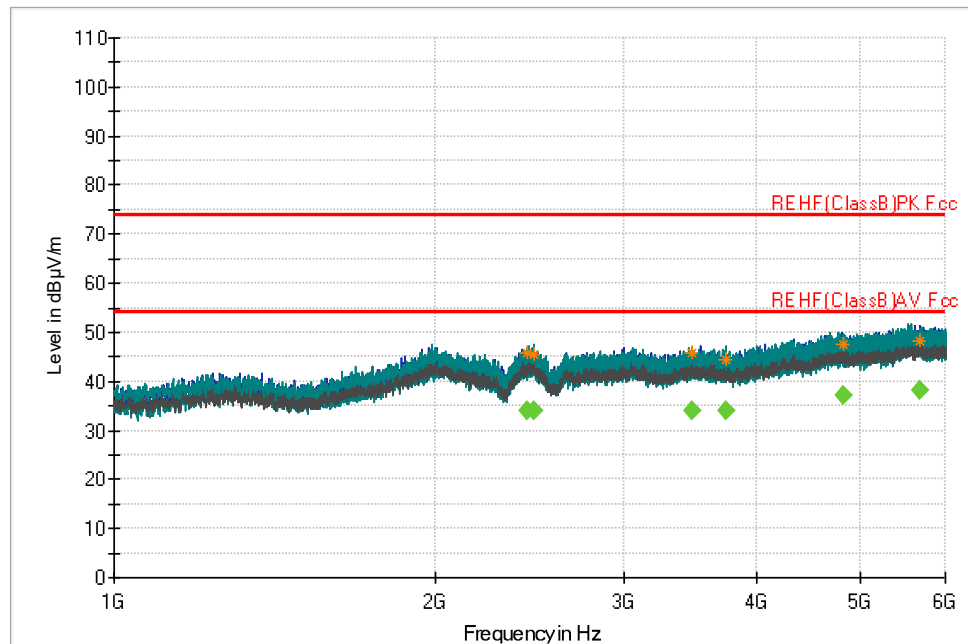


Figure 32: Radiated Emissions, High Channel from 1GHz – 6GHz

Measurement Data and Plots:

Frequency MHz	QuasiPeak (dBuV/m)	Average (dBuV/m)	Height (cm)	Pol	Azimuth (°)	Corr. (dB/m)	Limit (dBuV/m)	Margin (dB)	Result
2432.9060	---	34.09	332.0	H	0	0.8	54.00	19.91	Complies
2475.9080	---	34.02	233.0	V	334	1.4	54.00	19.98	Complies
3480.8180	---	33.88	265.0	V	163	3.7	54.00	20.12	Complies
3734.9680	---	33.92	135.0	V	218	5.0	54.00	20.08	Complies
4808.5240	---	36.98	349.0	H	172	7.9	54.00	17.02	Complies
5688.2600	---	38.06	207.0	H	0	9.2	54.00	15.94	Complies

Note: This scan is done in worst case mode with both transmitter on with highest possible power, Notch filter is used

Table 16: Radiated Emissions, High Channel from 1 GHz – 6GHz

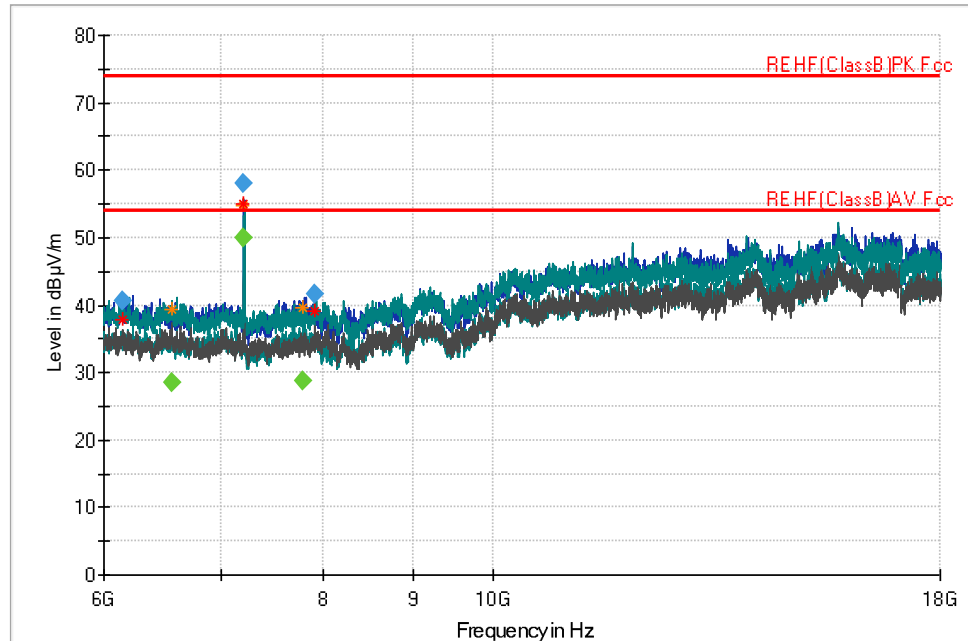


Figure 33: Radiated Emissions, Low Channel from 6GHz – 18GHz

Measurement Data and Plots:

Frequency MHz	QuasiPeak (dBuV/m)	Average (dBuV/m)	Height (cm)	Pol	Azimuth (°)	Corr. (dB/m)	Limit (dBuV/m)	Margin (dB)	Result
6154.6740	40.55	---	259.0	H	145	-6.3	74.00	33.45	Complies
6562.2360	---	28.43	135.0	V	143	-5.0	54.00	25.57	Complies
7213.5040	---	49.86	211.0	H	78	-3.2	54.00	4.14	Complies
7213.5940	58.14	---	223.0	H	76	-3.2	74.00	15.86	Complies
7792.4340	---	28.87	137.0	H	0	-0.9	54.00	25.13	Complies
7918.4340	41.58	---	217.0	V	29	-0.6	74.00	32.42	Complies

Note: This scan is done in worst case mode with both transmitter on with highest possible power

Table 17: Radiated Emissions, Low Channel from 6GHz – 18GHz

Note: Manual Verification completed at 7318.6380 MHz, Peak obtained is 57.12dBuV - 3.4 = 53.72 dBuV
Margin 0.28dB, height 218Cm, Azimuth 120.37 Horizontal orientation

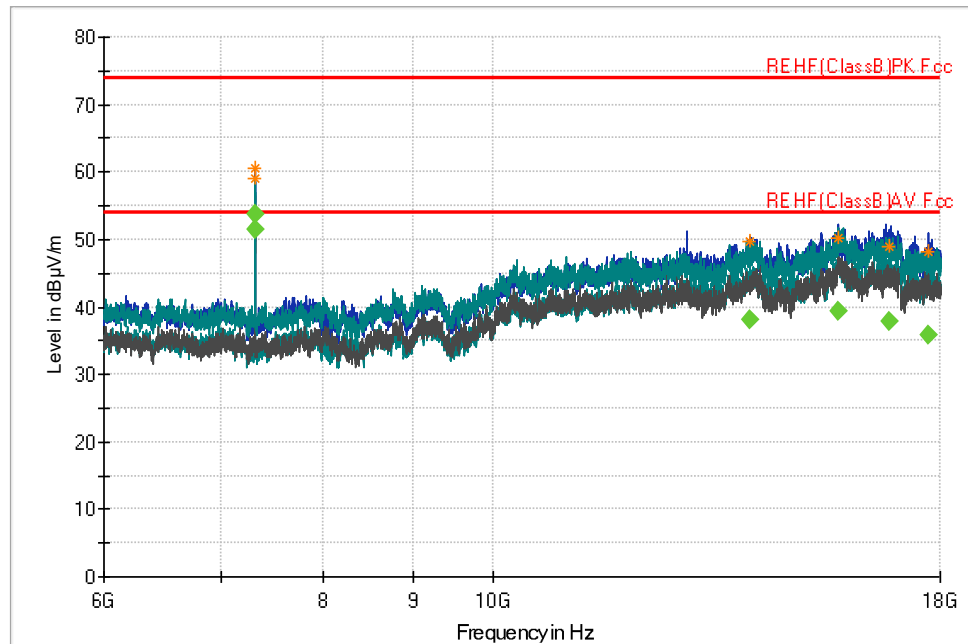


Figure 34: Radiated Emissions, Mid Channel from 6GHz – 18GHz

Measurement Data and Plots:

Frequency MHz	QuasiPeak (dBuV/m)	Average (dBuV/m)	Height (cm)	Pol	Azimuth (°)	Corr. (dB/m)	Limit (dBuV/m)	Margin (dB)	Result
7318.6140	---	53.84	230.0	H	113	-3.4	54.00	0.16	Complies
7318.6580	---	51.41	164.0	V	37	-2.4	54.00	2.59	Complies
14023.3080	---	38.05	222.0	H	0	12.7	54.00	15.95	Complies
15744.1840	---	39.33	150.0	H	0	16.6	54.00	14.67	Complies
16826.7120	---	37.86	275.0	H	0	15.2	54.00	16.14	Complies
17720.5960	---	35.79	226.0	H	0	18.2	54.00	18.21	Complies

Note: This scan is done in worst case mode with both transmitter on with highest possible power

Table 18: Radiated Emissions, Mid Channel from 6GHz – 18GHz

Note: Manual Verification completed at 7318.6380 MHz, Peak obtained is 57.12dBuV - 3.4 = 53.72 dBuV, Margin 0.28dB, height 218Cm, Azimuth 120.37 Horizontal orientation

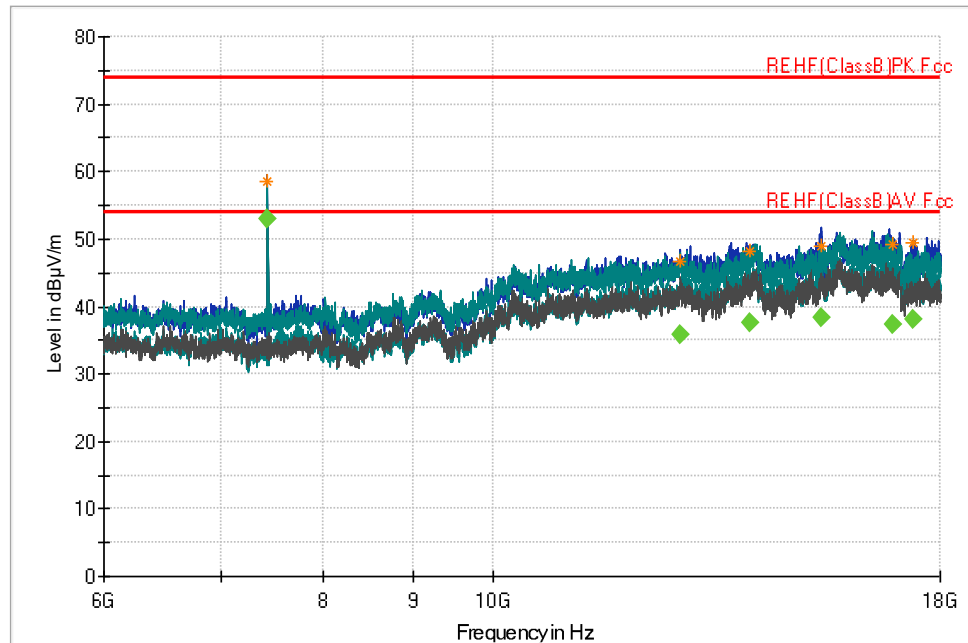


Figure 35: Radiated Emissions, High Channel from 6GHz – 18GHz

Measurement Data and Plots:

Frequency MHz	QuasiPeak (dBuV/m)	Average (dBuV/m)	Height (cm)	Pol	Azimuth (°)	Corr. (dB/m)	Limit (dBuV/m)	Margin (dB)	Result
7438.6220	---	53.05	179.0	V	17	-2.4	54.00	0.95	Complies
12797.7240	---	35.72	202.0	V	273	10.2	54.00	18.28	Complies
14024.7580	---	37.56	197.0	H	348	12.7	54.00	16.44	Complies
15397.4680	---	38.25	150.0	H	0	14.5	54.00	15.75	Complies
16902.6820	---	37.41	184.0	H	0	15.8	54.00	16.59	Complies
17384.7420	---	37.98	164.0	H	0	17.7	54.00	16.02	Complies

Note: This scan is done in worst case mode with both transmitter on with highest possible power, Notch filter is used. This table only shows the worst-case points alone, not the full set.

Table 19: Radiated Emissions, High Channel from 6GHz – 18GHz

Note: Manual Verification completed at 7438.6220 MHz, Peak obtained is 55.69dBuV - 2.4 = 53.29 dBuV
Margin 0.71dB, height 179Cm, Azimuth 16.93 Horizontal orientation

Appendix A: ABBREVIATIONS

Abbreviation	Definition
AC	Alternating Current
AM	Amplitude Modulation
ASW	Anti-Submarine Warfare
BIT	Built-in-Test
CE	European Conformity
CISPR	Comité International Spécial des Perturbations Radioélectriques (International Special Committee on Radio Interference)
DC	Direct Current
EFT	Electrical Fast Transient
EMC	Electro Magnetic Compatibility
EMI	Electro Magnetic Interference
ERP	Effective Radiated Power
ESD	Electrostatic Discharge
EUT	Equipment Under Test
FCC	Federal Communications Commission
FVIN	Firmware Version Identification Number FVIN
GFE	Government Furnished Equipment
IC	Industry Canada
ICES	Interference Causing Equipment Standard
IEC	International Electrotechnical Commission
LISN	Line Impedance Stabilizing Network
OATS	Open Area Test Site
RF	Radio Frequency
RMS	Root-Mean-Square
SAC	Semi-Anechoic Chamber
TEM	Transverse Electromagnetic
TPD	Terminal Protection Device

END OF REPORT

This report is the confidential property of the client addressed. The report may only be reproduced in full. Publication of extracts from this report is not permitted without written approval from QAI. Any liability attached thereto is limited to the fee charged for the individual project file referenced. The results of this report pertain only to the specific sample(s) evaluated. Unless specifically stated or identified otherwise, QAI has utilized a Simple Acceptance rule per ILAC-G8 Section 4.2.1 to make conformity decisions on testing results contained in this report, as applicable