

2.4G-2.48G 频段板载 PIFA 天线测试报告

2.4G-2.48G Inverted F Antenna Specification

SPECIFICATIONS	
Frequency (MHz)	2400-2480
Peak Gain (dBi)	2.499
Average Gain (dBi)	>-4
VSWR	<3.2
Impedance (Ω)	50 Ω
Antenna Type	Plannar Inverted F Antenna on board
Polarization	Linear
Manufacture	ZHUHAI JIELI TECHNOLOGY CO.,LTD
Address:	No.333 Kexing Road, Nanping Science Park, Xiangzhou District, Zhuhai
Test equipment	HWA-TECH

Antenna Photo & Length (mm)

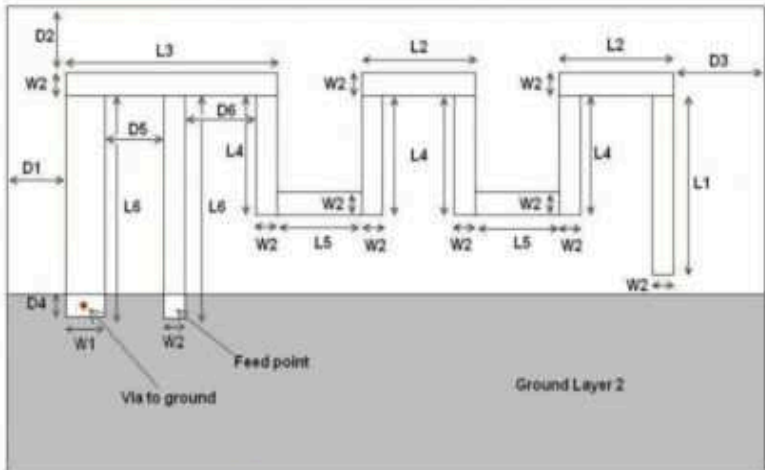


Figure 3: Antenna Dimensions


L1	3.94 mm
L2	2.70 mm
L3	5.00 mm
L4	2.64 mm
L5	2.00 mm
L6	4.90 mm
W1	0.90 mm
W2	0.50 mm
D1	0.50 mm
D2	0.30 mm
D3	0.30 mm
D4	0.50 mm
D5	1.40mm
D6	1.70 mm

Table 1: Antenna Dimensions

天线无源 S 参数:

Antenna passive S-parameters:

驻波比 (VSWR)、回波损耗 (Return Loss) 及史密斯圆图 (Smith)

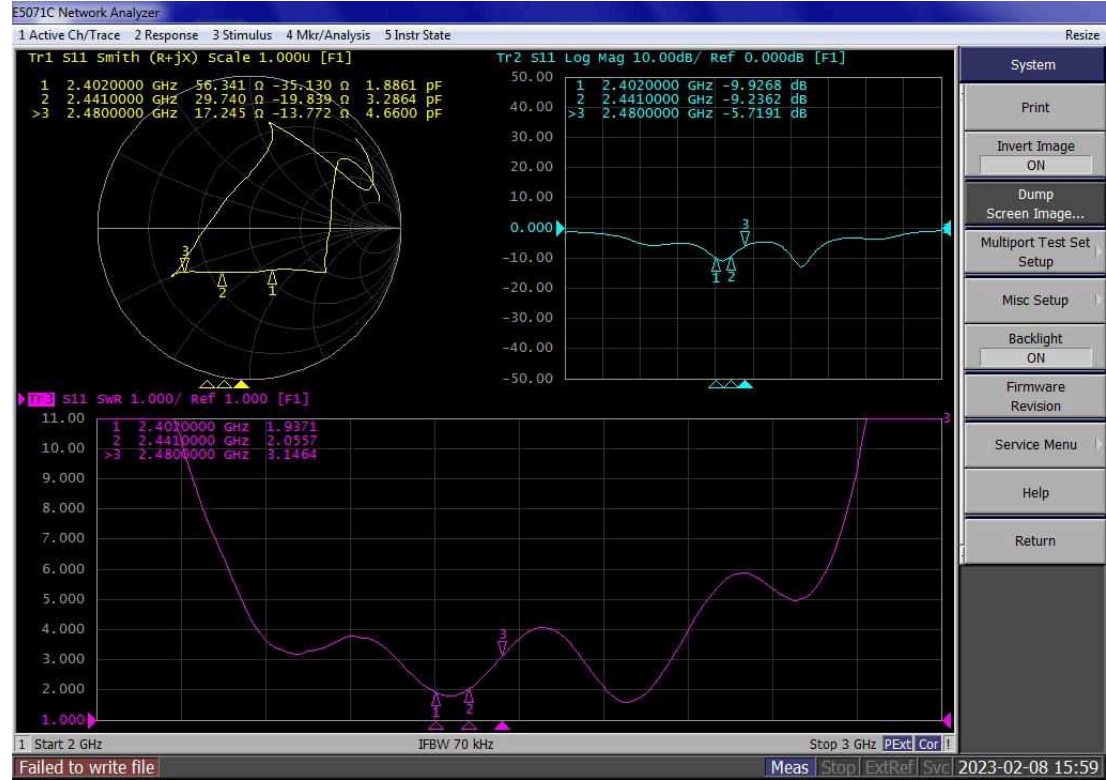


天线效率及增益:


Antenna efficiency and gain:

Frequency (MHz)	Gain (dBi)	Effciency (%)	AverageGain (dBi)	Efficiency (dB)
2400	1.433	59.329%	-2.717	-2.267
2410	0.927	51.861%	-3.416	-2.852
2420	0.829	52.112%	-3.166	-2.831
2430	0.881	49.299%	-3.258	-3.072
2440	1.192	50.672%	-3.144	-2.952
2450	1.688	53.067%	-2.735	-2.752
2460	2.194	59.423%	-2.276	-2.260
2470	2.118	56.680%	-2.438	-2.466
2480	2.499	61.727%	-2.112	-2.095
Average	1.529	54.908%	-2.806	-2.616
Peak	2.499	61.727%	-2.112	-2.095


天线 2440MHz 2D-Theta Pattern

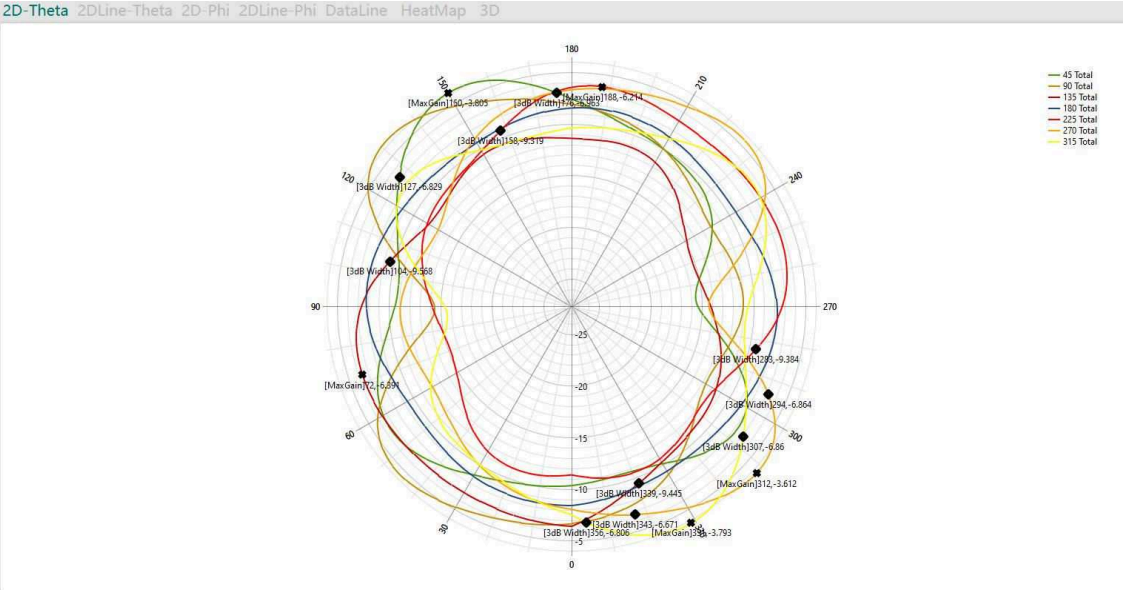


天线 2440MHz 2D-Phi Pattern

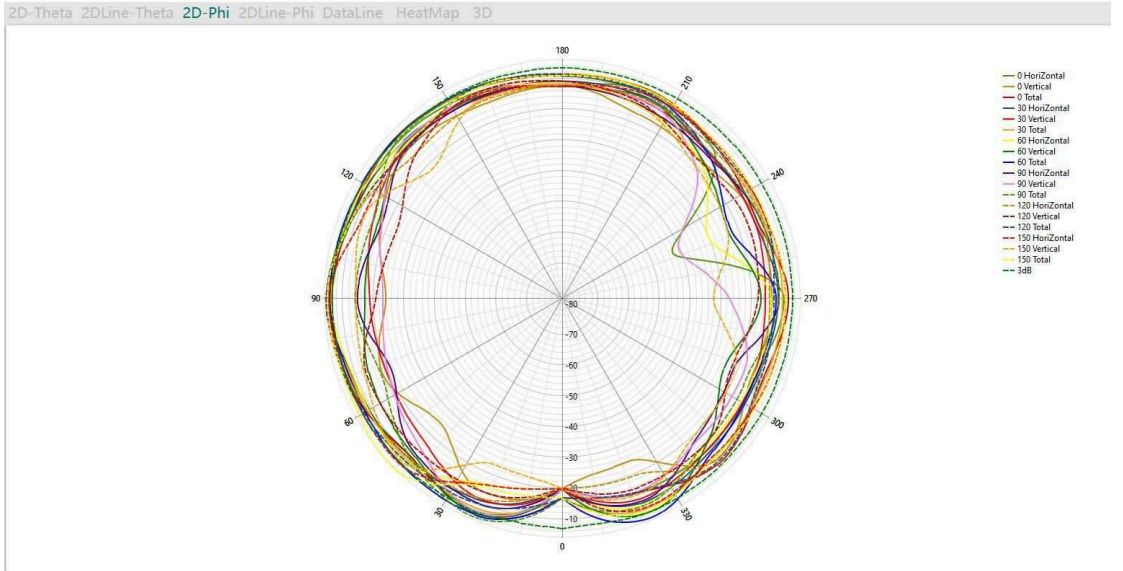

天线 2440MHz 3D-Horizontal Pattern

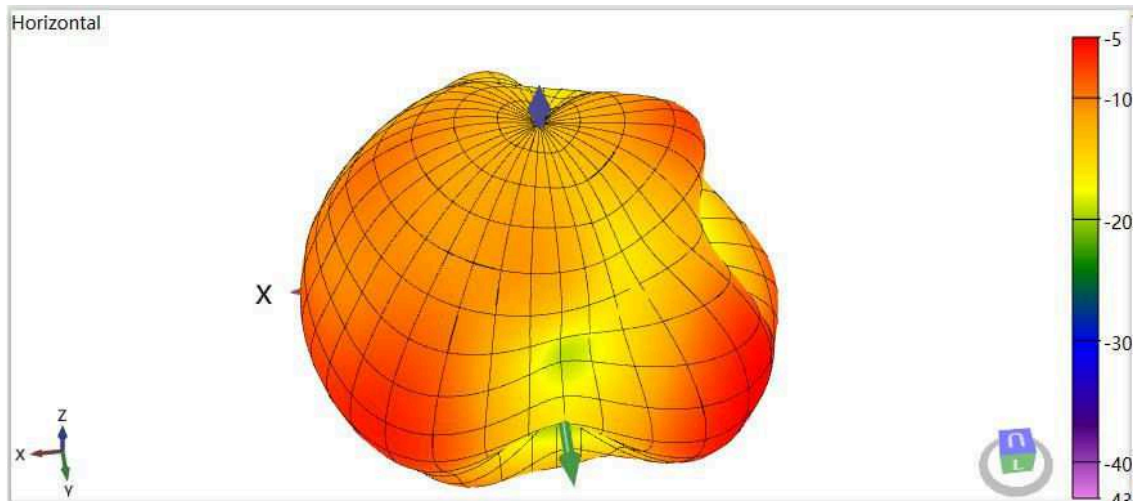

天线 2440MHz 3D-Vertical Pattern

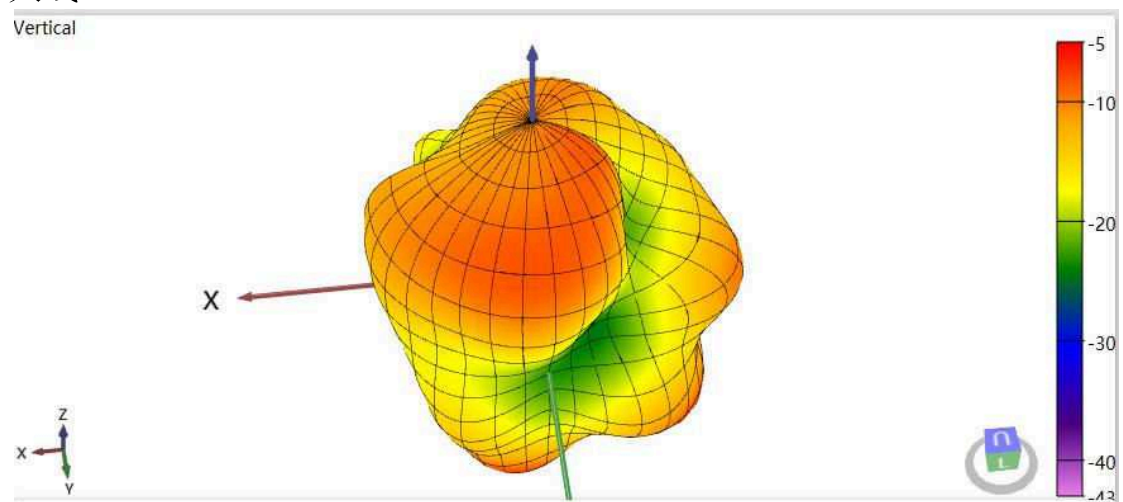

2440MHz 3D-Total Pattern

