

TEST REPORT



TL-964



2/F., Garment Centre,
576 Castle Peak Road, Kowloon,
Hong Kong SAR, China.

Telephone: (852) 2173 8888
Facsimile: (852) 2785 5487
www.intertek.com

Report No.: 26020369HKG-002

Dyson Operations Pte Ltd.

Application For Original Grant of 47 CFR Part 15 Certification

2.4GHz and 13.56MHz Transceiver

FCC ID: 2BUQBOC01001

This report contains the data of Bluetooth BLE (1Mbps) only

Prepared and Checked by:

Approved by:

Signed on File

Leung Chun Ning, Peter
Engineer

Digitally signed
by Herbert Wong
Location: Intertek
Testing Services
Hong Kong
Limited

Wong Cheuk Ho, Herbert
Assistant Manager
Date: March 18, 2026

Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.

The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

© 2017 Intertek

TEST REPORT

GENERAL INFORMATION

Grantee:	Dyson Operations Pte Ltd.
Grantee Address:	3 Sentosa Gateway, 098544, Singapore.
FCC Specification Standard:	FCC Part 15, October 1, 2024 Edition
FCC ID:	2BUQBOC01001
Serial Number:	4WZ-US-FKN0147X (Conducted sample) 4WZ-US-FKN0143X (Radiated sample) 4WZ-US-FKN0074X (Normal sample)
Type of EUT:	Spread Spectrum Transmitter
Description of EUT:	2.4GHz and 13.56MHz Transceiver
Brand Name:	dyson
Sample Receipt Date:	January 13, 2026
Date of Test:	January 13, 2026 to January 28, 2026
Report Date:	March 18, 2026
Environmental Conditions:	Temperature: +10 to 40°C Relative Humidity: 10 to 90%
Conclusion:	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 Certification. This report contains the data of Bluetooth BLE (1Mbps) only

SUMMARY OF TEST RESULT

Test Items	FCC Part 15 Section	Results
Antenna Requirement	15.203	Complied
Max. Conducted Output Power (Peak)	15.247(b)(3)&(4)	Complied
Min. 6dB RF Bandwidth	15.247(a)(2)	Complied
Max. Power Density (Average)	15.247(e)	Complied
Out of Band Antenna Conducted Emission	15.247(d)	Complied
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d), 15.209 & 15.109	Complied
AC Power Line Conducted Emission	15.207 & 15.107	Complied

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2024 Edition

TABLE OF CONTENTS

EXHIBIT 1	GENERAL DESCRIPTION	5
1.1	Product Description	5
1.2	Test Methodology	5
1.3	Test Facility	5
1.4	Related Submittal(s) Grants	5
EXHIBIT 2	SYSTEM TEST CONFIGURATION	6
2.1	Justification	6
2.2	EUT Exercising Software	7
2.3	Details of EUT and Description of Accessories	7
2.4	Measurement Uncertainty	7
EXHIBIT 3	TEST RESULTS	8
3.1	Maximum Conducted (Peak) Output Power at Antenna Terminals	8
3.2	Minimum 6dB RF Bandwidth	9
3.3	Minimum Power Spectral Density	10
3.4	Out of Band Conducted Emissions	11
3.5	Field Strength Calculation	12
3.6	Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions	13
3.7	Transmitter Duty Cycle Calculation	21
EXHIBIT 4	EQUIPMENT LIST	25

EXHIBIT 1 GENERAL DESCRIPTION

1.1 Product Description

The Equipment Under Test (EUT) is a 2.4GHz Wi-Fi, Bluetooth BLE (1Mbps) Transceiver and a 13.56MHz RFID device. The Wi-Fi function is disabled during charging. For the BLE mode, the sample supplied operated on 40 channels, normally at 2402 – 2480MHz. The channels are separated with 2MHz spacing. The EUT is powered by 1 x 3.7V Lithium-ion Battery during operation and 120VAC during charging.

The antenna(s) used in the EUT is integral, and the test sample is a prototype.
Peak Antenna Gain: 1.78dBi

The circuit description is saved with filename: descri.pdf.

1.2 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024. Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

Antenna port conducted measurements were performed according to ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024 and KDB Publication No. 558074 D01 v05r02 (April 02, 2019) All other measurements were made in accordance with the procedures in 47 CFR Part 2 and RSS-Gen Issue 5 Amendment 2, February 2021.

1.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been fully placed on file with the FCC and Industry Canada No.: 2042H, CABID is "HKAP01".

1.4 Related Submittal(s) Grants

This is a single application for certification of a transceiver (Bluetooth BLE (1Mbps) Portion).

EXHIBIT 2 SYSTEM TEST CONFIGURATION

2.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by 1 x 3.7V Lithium-ion Battery during operation and 120VAC during charging during test.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable at 0.8m height from the ground plane for emission testing at or below 1GHz and 1.5m for emission measurements above 1GHz. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209 / RSS-247 2.5. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109 / RSS-247 Section 5.5 Limits.

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 3MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC power line-conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

TEST REPORT

TL-964

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

All relevant operation modes have been tested, and the worst-case data is included in this report.

For simultaneous transmission, both Wi-Fi and BLE portions are also switched on when taking radiated emission for determining worst-case spurious emission.

2.2 EUT Exercising Software

The EUT exercise program (RTLBTAPP v5.2.4.27) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

2.3 Details of EUT and Description of Accessories

Description	Remark
Apple USB-C Power Adaptor (Model: A2743; Input: 100-240VAC 50/60Hz 1.8A; Provided by Intertek Output: 20.6V 3.4A, 15.0V 3.0A, 9.0V 3.0A, 5.0V 3.0A)	
Charger with built-in USB-C cable	Provided by Applicant

2.4 Measurement Uncertainty


Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044.

EXHIBIT 3 TEST RESULTS

3.1 Maximum Conducted (Peak) Output Power at Antenna Terminals

RF Conduct Measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.



The antenna port of the EUT was connected to the input of a spectrum analyzer.

- ☒ The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals. The measurement procedure 8.3.2.3 was used.
- ☐ The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

(BLE, 1 Mbps) Peak Antenna Gain = 1.78 dBi

Frequency (MHz)	Output in dBm	Output in mW
Low Channel: 2402	3.40	2.19
Middle Channel: 2440	3.06	2.02
High Channel: 2480	2.58	1.81

Cable loss: 0.8 dB External Attenuation: 0 dB

Cable loss, external attenuation: ☒ included in OFFSET function
☐ added to SA raw reading

(BLE, 1 Mbps)


Max. Conducted (Peak) Output Level = 3.40 dBm

Limits:

1W (30dBm) for antennas with gains of 6dBi or less.

3.2 Minimum 6dB RF Bandwidth

The figure below shows the test setup, which is utilized to make these measurements.



The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

(BLE, 1 Mbps) (Refer to Test Data4.pdf)


Frequency (MHz)	6dB Bandwidth (kHz)
Low Channel: 2402 (P.4)	673.268
Middle Channel: 2440 (P.15)	693.070
High Channel: 2480 (P.23)	693.070

Limits:

6dB bandwidth shall be at least 500kHz.

3.3 Minimum Power Spectral Density

The figure below shows the test setup, which is utilized to make these measurements.



Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.2 PKPSD was used. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

(BLE, 1 Mbps) (Refer to Test Data4.pdf)


Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2402 (P.7)	-6.570
Middle Channel: 2440 (P.18)	-5.403
High Channel: 2480 (P.26)	-10.869

Cable Loss: 0.8dB

Limit: 8dBm in 3kHz

3.4 Out of Band Conducted Emissions

The figure below shows the test setup, which is utilized to make these measurements.



The maximum conducted (peak) output power was used to demonstrate compliance as described in 9.1. Then the display line (in red) shown in the following plots denotes the limit at 20dB below maximum measured in-band peak PSD level in 100 KHz bandwidth.

The measurement procedures under sections 11 of KDB558074 D01 v05r02 (April 2, 2019) were used.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.

Limits:

All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the maximum measured in-band peak PSD level.

(BLE, 1 Mbps) (Refer to Test Data4.pdf)

Frequency (MHz)	Out of Band Conducted Emissions	Band Edge
Low Channel: 2402	P.12	P.8
Middle Channel: 2440	P.20	N/A
High Channel: 2480	P.31	P.27

TEST REPORT

TL-964

3.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where	FS	=	Field Strength in dBμV/m
	RA	=	Receiver Amplitude (including preamplifier) in dBμV
	CF	=	Cable Attenuation Factor in dB
	AF	=	Antenna Factor in dB
	AG	=	Amplifier Gain in dB
	PD	=	Pulse Desensitization in dB
	AV	=	Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example:

Assume a receiver reading of 62.0 dBμV is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dBμV/m. This value in dBμV/m is converted to its corresponding level in μV/m.

$$\begin{aligned}
 RA &= 62.0 \text{ dB}\mu\text{V} \\
 AF &= 7.4 \text{ dB} \\
 CF &= 1.6 \text{ dB} \\
 AG &= 29.0 \text{ dB} \\
 PD &= 0.0 \text{ dB} \\
 AV &= -10.0 \text{ dB} \\
 FS &= 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

TEST REPORT

TL-964

3.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

3.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission at 35.99915 MHz

The worst case radiated emission configuration photographs are saved with filename:
Setup Photos.pdf

3.6.2 Radiated Emission Data


The data in tables 1-6 list the significant emission frequencies, the limit and the margin of compliance.

Judgement:


Passed by 1.4 dB margin

3.6.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

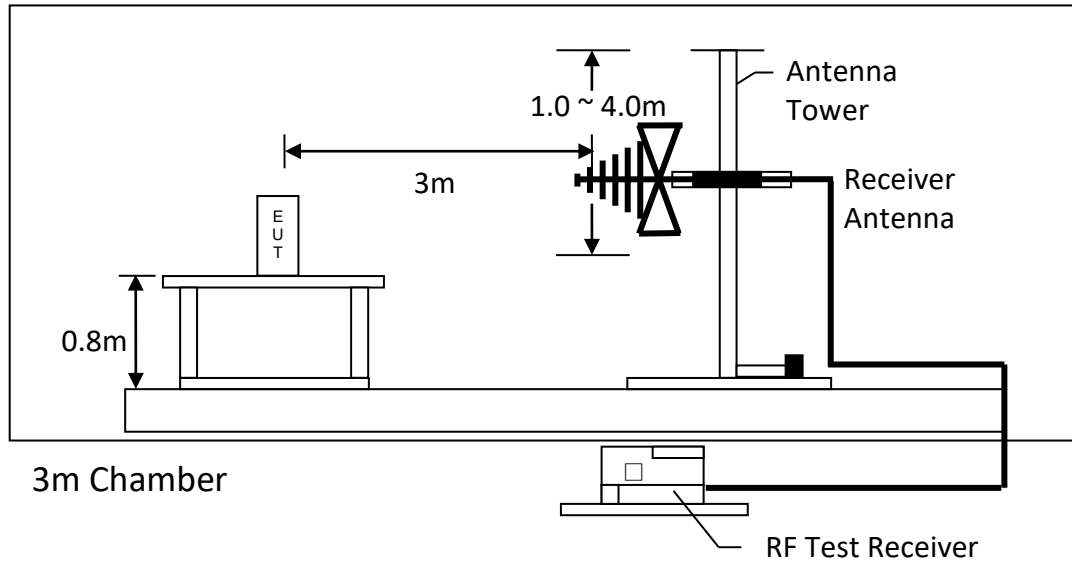

Test setup of radiated emissions up to 1GHz

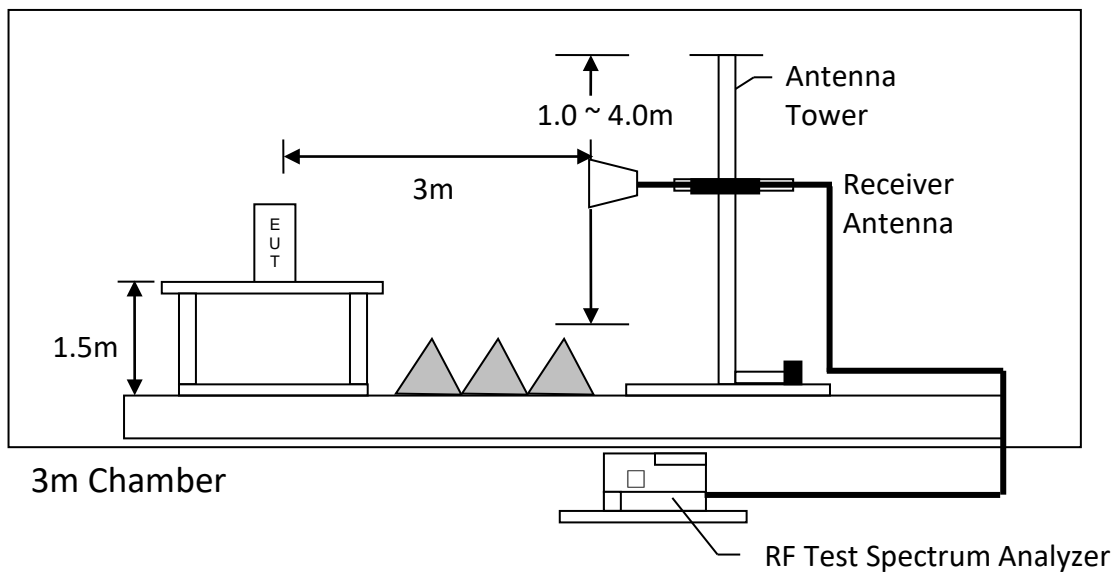

Test setup of radiated emissions above 1GHz

TEST REPORT

RADIATED EMISSION DATA

Mode: TX-Channel 2402

Table 1, BLE 1Mbps

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (average) (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	2390.000	49.1	33	29.4	45.5	54.0	-8.5
V	4804.000	29.7	33	34.9	31.6	54.0	-22.4
H	7206.000	30.8	33	37.9	35.7	54.0	-18.3
H	9608.000	33.2	33	40.4	40.6	54.0	-13.4
V	12010.000	38.1	33	40.5	45.6	54.0	-8.4
H	14412.000	38.8	33	40.0	45.8	54.0	-8.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	2390.000	62.5	33	29.4	58.9	74.0	-15.1
V	4804.000	43.6	33	34.9	45.5	74.0	-28.5
H	7206.000	44.7	33	37.9	49.6	74.0	-24.4
H	9608.000	47.0	33	40.4	54.4	74.0	-19.6
V	12010.000	51.3	33	40.5	58.8	74.0	-15.2
H	14412.000	52.6	33	40.0	59.6	74.0	-14.4

- Notes:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement.
 3. All measurements were made at 3 meters.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

TL-964

RADIATED EMISSION DATA

Mode: TX-Channel 2440

Table 2, BLE 1Mbps

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (average) (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	4880.000	29.8	33	34.9	31.7	54.0	-22.3
V	7320.000	31.0	33	37.9	35.9	54.0	-18.1
H	9760.000	33.6	33	40.4	41.0	54.0	-13.0
H	12200.000	37.8	33	40.5	45.3	54.0	-8.7
H	14640.000	38.5	33	38.4	43.9	54.0	-10.1

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	4880.000	43.0	33	34.9	44.9	74.0	-29.1
V	7320.000	44.9	33	37.9	49.8	74.0	-24.2
H	9760.000	47.7	33	40.4	55.1	74.0	-18.9
H	12200.000	51.3	33	40.5	58.8	74.0	-15.2
H	14640.000	52.1	33	38.4	57.5	74.0	-16.5

- Notes:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement.
 3. All measurements were made at 3 meters.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

TL-964

RADIATED EMISSION DATA

Mode: TX-Channel 2480

Table 3, BLE 1Mbps

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (average) (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	2483.500	49.8	33	29.4	46.2	54.0	-7.8
V	4960.000	30.1	33	34.9	32.0	54.0	-22.0
H	7440.000	31.5	33	37.9	36.4	54.0	-17.6
H	9920.000	33.0	33	40.4	40.4	54.0	-13.6
V	12400.000	39.1	33	40.5	46.6	54.0	-7.4
V	14880.000	38.1	33	38.4	43.5	54.0	-10.5
V	17360.000	40.7	33	37.6	45.3	54.0	-8.7

	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	2483.500	63.6	33	29.4	60.0	74.0	-14.0
V	4960.000	43.3	33	34.9	45.2	74.0	-28.8
H	7440.000	45.1	33	37.9	50.0	74.0	-24.0
H	9920.000	46.5	33	40.4	53.9	74.0	-20.1
V	12400.000	52.5	33	40.5	60.0	74.0	-14.0
V	14880.000	51.1	33	38.4	58.5	74.0	-15.5
V	17360.000	55.3	33	37.6	59.9	74.0	-14.1

- Notes:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement.
 3. All measurements were made at 3 meters.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

TL-964

RADIATED EMISSION DATA

Mode: 2.4GHz Wi-Fi, BLE and RFID Operating

Table 4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	143.733	20.1	16	14.0	18.1	43.5	-25.4
V	252.002	28.3	16	20.0	32.3	46.0	-13.7
V	306.001	31.4	16	23.0	38.4	46.0	-7.6
V	324.003	31.5	16	24.0	39.5	46.0	-6.5
V	395.933	22.7	16	25.0	31.7	46.0	-14.3
V	438.613	18.5	16	26.0	28.5	46.0	-17.5

- Notes:
1. Quasi-Peak detector are used for the emission measurement.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 5. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

TL-964

RADIATED EMISSION DATA

Mode: BLE and RFID Operating with Charging

Table 5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	35.999	44.6	16	10.0	38.6	40.0	-1.4
V	96.566	26.4	16	12.0	22.4	43.5	-21.1
V	158.889	37.3	16	16.0	37.3	43.5	-6.2
V	179.986	26.0	16	20.0	30.0	43.5	-13.5
H	258.799	37.7	16	21.0	42.7	46.0	-3.3
V	395.933	23.8	16	25.0	32.8	46.0	-13.2

- Notes:
1. Quasi-Peak detector are used for the emission measurement.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 5. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

TL-964

RADIATED EMISSION DATA

Mode: BLE 1Mbps TX-Channel 2480 Baseband

Table 6

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	30.364	25.3	16	10.0	19.3	40.0	-20.7
V	116.936	21.1	16	14.0	19.1	43.5	-24.4
V	123.484	26.8	16	14.0	24.8	43.5	-18.7
H	491.478	14.7	16	26.0	24.7	46.0	-21.3
H	686.448	17.8	16	29.0	30.8	46.0	-15.2
H	801.878	17.3	16	31.0	32.3	46.0	-13.7

- Notes:
1. Quasi-Peak detector are used for the emission measurement.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 5. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

3.7 Transmitter Duty Cycle Calculation

Not Applicable – No average factor is required

3.8 AC Power Line Conducted Emission

- ☐ Not Applicable – EUT is only powered by battery for operation.
- ☒ EUT connects to AC power line. Emission Data is listed in following pages.
- ☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

3.8.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration at 13.56 MHz.


The worst-case line conducted configuration photographs are attached in the Appendix and saved with filename: Setup Photos.pdf.

3.8.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 8.07 dB margin

3.8.3 Conducted Emission Test Setup

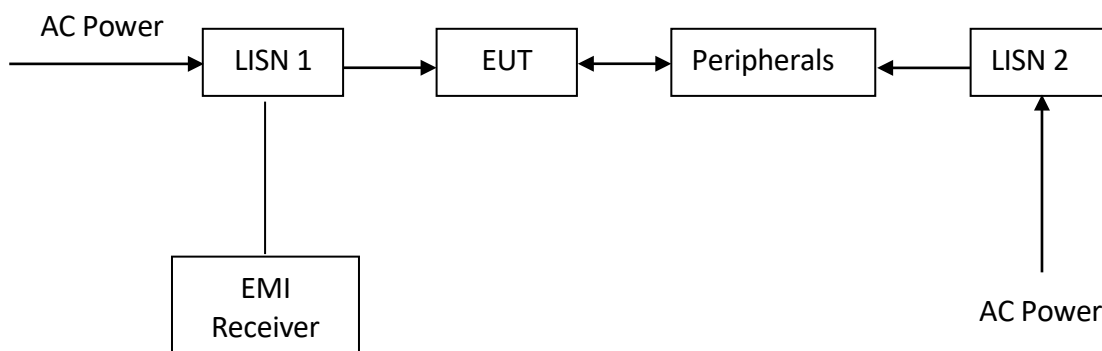


The EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

AC POWER LINE CONDUCTED EMISSION

Worst Case: BLE and RFID Operating with Charging

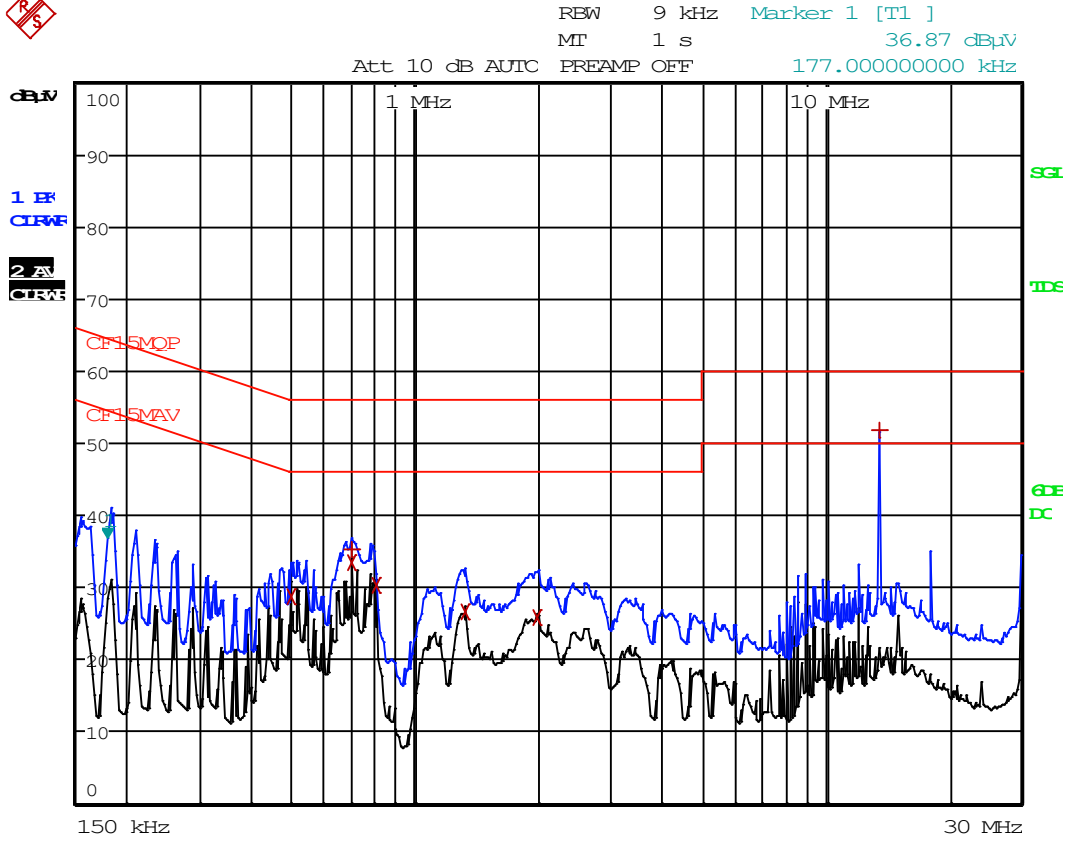

TEST REPORT



TL-964

AC POWER LINE CONDUCTED EMISSION

Worst Case: BLE and RFID Operating with Charging

EDIT PEAK LIST (Final Measurement Results)

Trace1: CF15MQP


Trace2: CF15MAV

Trace3: ---

	TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
2	CISPR Average	496.5 kHz	28.86 N	-17.19
2	CISPR Average	699 kHz	33.44 L1	-12.55
1	Quasi Peak	703.5 kHz	35.32 L1	-20.67
2	CISPR Average	802.5 kHz	30.27 L1	-15.72
2	CISPR Average	1.32 MHz	26.57 L1	-19.42
2	CISPR Average	1.986 MHz	25.92 L1	-20.08
1	Quasi Peak	13.56 MHz	51.92 N	-8.07

OCCUPIED BANDWIDTH

The figure below shows the test setup, which is utilized to make these measurements.

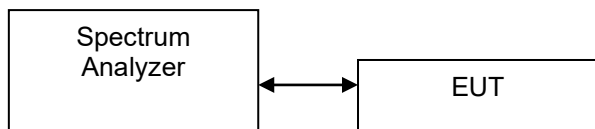

Occupied Bandwidth Results: (BLE 1Mbps) (Refer to Test Data4.pdf)

Frequency (MHz)	Occupied Bandwidth (MHz)
Low Channel: 2402 (P.5)	1.038
Middle Channel: 2440 (P.16)	1.023
High Channel: 2480 (P.24)	1.023

TEST REPORT



TL-964



EXHIBIT 4 EQUIPMENT LIST

1) Radiated Emissions Test

Equipment	EMI Test Receiver (9kHz to 26.5GHz)	Biconical Antenna (30MHz to 300MHz)	Log Periodic Antenna
Registration No.	EW-3156	EW-3242	EW-3243
Manufacturer	ROHDESCHWARZ	EMCO	EMCO
Model No.	ESR26	3110C	3148B
Calibration Date	May 02, 2025	July 30, 2024	July 30, 2024
Calibration Due Date	May 02, 2026	July 30, 2026	July 30, 2026

Equipment	Double Ridged Guide Antenna (1GHz - 18GHz)	Active Loop Antenna (H-field) (9kHz to 30MHz)	Solid State Low Noise Preamplifier Assembly (1 - 18)GHz
Registration No.	EW-1133	EW-2313	EW-3431
Manufacturer	EMCO	ELECTROMETRI	BONN ELEKTRO
Model No.	3115	EM-6876	BLMA 0118-5G
Calibration Date	January 23, 2025	December 19, 2025	December 11, 2025
Calibration Due Date	July 23, 2026	December 19, 2027	December 11, 2026

Equipment	2.4GHz Notch Filter	14m Double Shield RF Cable (9kHz - 6GHz)	RF Cable 14m (1GHz to 26.5GHz)
Registration No.	EW-3435	EW-2376	EW-2781
Manufacturer	MICROWAVE	RADIALL	GREATBILLION
Model No.	N0324413	n m/br56/bnc m 14m	SMA m/SHF5MPU /SMA m ra14m,26G
Calibration Date	October 09, 2024	November 06, 2025	February 18, 2025
Calibration Due Date	April 09, 2026	November 06, 2026	February 18, 2026

Equipment	12 metre RF Cable (1-40)GHz	Pyramidal Horn Antenna
Registration No.	EW-2774	EW-0905
Manufacturer	GREATBILLION	EMCO
Model No.	SMA m-m ra 12m 40G outdoor	3160-09
Calibration Date	February 18, 2025	November 06, 2025
Calibration Due Date	February 18, 2026	May 06, 2027

TEST REPORT



TL-964



Dyson Operations Pte Ltd.
Intertek Report No:
26020369HKG-002

EXHIBIT 4 EQUIPMENT LIST (CONT'D)

2) Conducted Emissions Test

Equipment	RF Cable 240cm (RG142) - (9kHz to 30MHz)	Artificial Mains Network	EMI Test Receiver (9kHz to 3GHz)
Registration No.	EW-2454	EW-3360	EW-3095
Manufacturer	RADIALL	ROHDESCHWARZ	ROHDESCHWARZ
Model No.	bnc m st / 142 /bnc m ra 240cm	ENV-216	ESCI
Calibration Date	June 12, 2025	June 23, 2025	June 19, 2025
Calibration Due Date	June 12, 2026	June 23, 2026	June 19, 2026

3) Conductive Measurement Test

Equipment	RF Power Meter with Power Sensor (N1921A)	Signal and Spectrum Analyzer (10Hz to 40GHz)
Registration No.	EW-3309	EW-3016
Manufacturer	ROHDESCHWARZ	ROHDESCHWARZ
Model No.	NRP-Z81	FSV40
Calibration Date	July 29, 2025	November 17, 2025
Calibration Due Date	July 29, 2026	November 17, 2026

4) Control Software for Radiated Emission

Software Information	
Software Name	EMC32
Manufacturer	ROHDESCHWARZ
Software version	10.50.40

END OF TEST REPORT