



FCC Part 15C Test Report

FCC ID: 2BURK-CD8V545F0

Applicant: Cozyla US Corp.
Address: 2025 Production Drive Apex, Wake County, North Carolina, 27539, US
Manufacturer: Cozyla US Corp.
Address: 2025 Production Drive Apex, Wake County, North Carolina, 27539, US
EUT: Calendar Plus 3
Trade Mark: Cozyla
Model Number: Cozyla CD-8V545F0
Cozyla CD-8V545FX(X=0,1-9), Cozyla CD-8V545PX(X=0,1-9)
Date of Receipt: Apr. 10, 2026
Test Date: Apr. 10, 2026 to May 11, 2026
Date of Report: May 11, 2026
Prepared By: Shenzhen DL Testing Technology Co., Ltd.
Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Roa Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China.
Applicable Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2020+Cor.1-2023
Test Result: Pass
Report Number: DLE-260417010R

Prepared (Test Engineer): Dimon Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents

	Page
1. VERSION	4
2. SUMMARY OF TEST RESULTS	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULT	14
4.2.1 RADIATED EMISSION LIMITS	16
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	18
4.2.6 TEST RESULTS	18
5.1 TEST REQUIREMENT:	29
5.2 TEST PROCEDURE	29
5.3 DEVIATION FROM TEST STANDARD	30
5.4 TEST SETUP	30
5.5 EUT OPERATING CONDITIONS	30
5.6 TEST RESULT	31
6.1 APPLIED PROCEDURES / LIMIT	33
6.2 TEST PROCEDURE	33
6.3 DEVIATION FROM STANDARD	33
6.4 TEST SETUP	33
6.5 EUT OPERATION CONDITIONS	33
6.6 TEST RESULT	34
7. 6DB OCCUPIED BANDWIDTH	37
7.1 APPLIED PROCEDURES / LIMIT	37
7.2 TEST PROCEDURE	37
7.3 DEVIATION FROM STANDARD	37
7.4 TEST SETUP	37
7.5 EUT OPERATION CONDITIONS	37
7.6 TEST RESULT	38
8.PEAK OUTPUT POWER TEST	41
8.1 APPLIED PROCEDURES/LIMIT	41
8.2 TEST PROCEDURE	41
8.3 DEVIATION FROM STANDARD	41



8.4 TEST SETUP	41
8.5 EUT OPERATION CONDITIONS	41
8.6 TEST RESULT	42
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	43
9.1 APPLICABLE STANDARD	43
9.2 TEST PROCEDURE	43
9.3 DEVIATION FROM STANDARD	43
9.4 TEST SETUP	44
9.5 EUT OPERATION CONDITIONS	44
9.6 TEST RESULTS	44
10. DUTY CYCLE	52
10.1 APPLIED PROCEDURES / LIMIT	52
10.2 DEVIATION FROM STANDARD	52
10.3 TEST SETUP	52
11. ANTENNA REQUIREMENT	55
12. TEST SETUP PHOTO	56
13. EUT CONSTRUCTIONAL DETAILS	56

**1. VERSION**

Report No.	Version	Description	Approved
DLE-260417010R	Rev.01	Initial issue of report	May 11, 2026



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (c)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	6dB Occupied Bandwidth	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.205/15.209 FCC part 15.247(d)	Spurious Emission	PASS	
ANSI C63.10:2020+Cor.1-2023	Duty cycle	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add. : 101-201, Building C, Shuanghuan, No.8, Baoqing Roa Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China.

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

CAB identifier: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8MHz
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59℃



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Calendar Plus 3
Model No.:	Cozyla CD-8V545F0
Serial model:	Cozyla CD-8V545FX(X=0,1-9), Cozyla CD-8V545PX(X=0,1-9)
Model Different:	All the model are the same circuit and RF module, Except for the fixed brackets, the Cozyla CD-8V545PX adopts a mobile base bracket, while the Cozyla CD-8V545FX uses a wall-mounted frame.
Hardware Version:	N/A
Software Version:	N/A
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20):11 802.11n(HT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum(DSSS) 802.11g/802.11n(HT20/HT40): Orthogonal Frequency Division Multiplexing(OFDM)
Antenna Type:	FPCB antenna*2
Antenna gain:	ANT A:2.6dBi ANT B:2.6dBi
Power Supply:	DC 19V From Adapter
Adapter Information:	Model: GQ100-1904740-ZU Input: 100-240V~50/60Hz 1.5A Max. Output: DC 19V 4.74A 90.06W



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

Table for antenna

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
1	N/A	Antenna A	FPCB antenna	2.6	N/A
2	N/A	Antenna B	FPCB antenna	2.6	N/A

EUT has 2 FPCB antennas with same gain GANT 2.6 dBi on every antenna, CDD device with one spatial streams, also can operate with one spatial streams according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,
 $\text{Array Gain} = 10\log(\text{NANT}/\text{NSS})\text{dB} = 10\log(2/1) = 3.01\text{dB}$,
So the directional gain for PSD is 5.61 dBi

2) For power measurements,
The Array gain=0 dB for $\text{NANT} \leq 4$,
So the directional gain for Power measurements is 2.6 dBi

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain.



3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and for battery operated equipment, the equipment tests shall be performed using a new battery.	


We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

Test Software	SecureCRT
Power level setup	Default




3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted emissions



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Calendar Plus 3	Cozyla	Cozyla CD-8V545F0	N/A	EUT
E-2	Adapter	N/A	GQ100-1904740-ZU	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Oct. 25, 2025	Oct. 24, 2026
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Oct. 25, 2025	Oct. 24, 2026
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Oct. 25, 2025	Oct. 24, 2026
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Oct. 25, 2025	Oct. 24, 2026
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Oct. 25, 2025	Oct. 24, 2026
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Oct. 25, 2025	Oct. 24, 2026
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Oct. 25, 2025	Oct. 24, 2026
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Oct. 25, 2025	Oct. 24, 2026
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Oct. 25, 2025	Oct. 24, 2026
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Oct. 25, 2025	Oct. 24, 2026
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Oct. 25, 2025	Oct. 24, 2026
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Oct. 25, 2025	Oct. 24, 2026
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Oct. 25, 2025	Oct. 24, 2026
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Oct. 25, 2025	Oct. 24, 2026
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Oct. 25, 2025	Oct. 24, 2026
16	D.C. Power Supply	LongWei	PS-305D	010964729	Oct. 25, 2025	Oct. 24, 2026
17	Power meter	KEYSIGHT	N1912AP	926431	Oct. 25, 2025	Oct. 24, 2026

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Oct. 25, 2025	Oct. 24, 2026
3	LISN	R&S	ENV216	102417	Oct. 25, 2025	Oct. 24, 2026
4	843 Cable 1#	ChengYu	CE Cable	001	Oct. 25, 2025	Oct. 24, 2026

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2020+Cor.1-2023
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

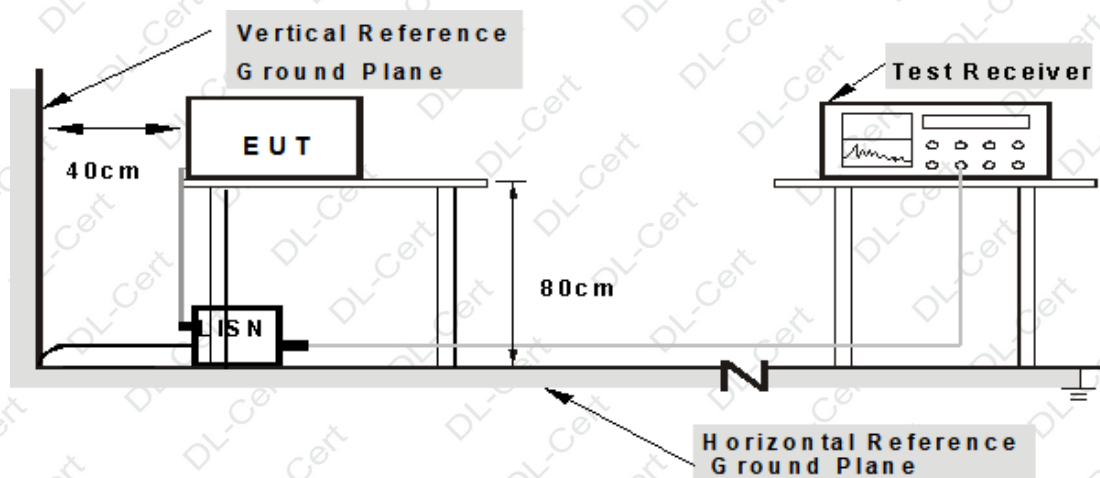

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 TEST RESULT


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	TX 802.11n20 - 2437MHz

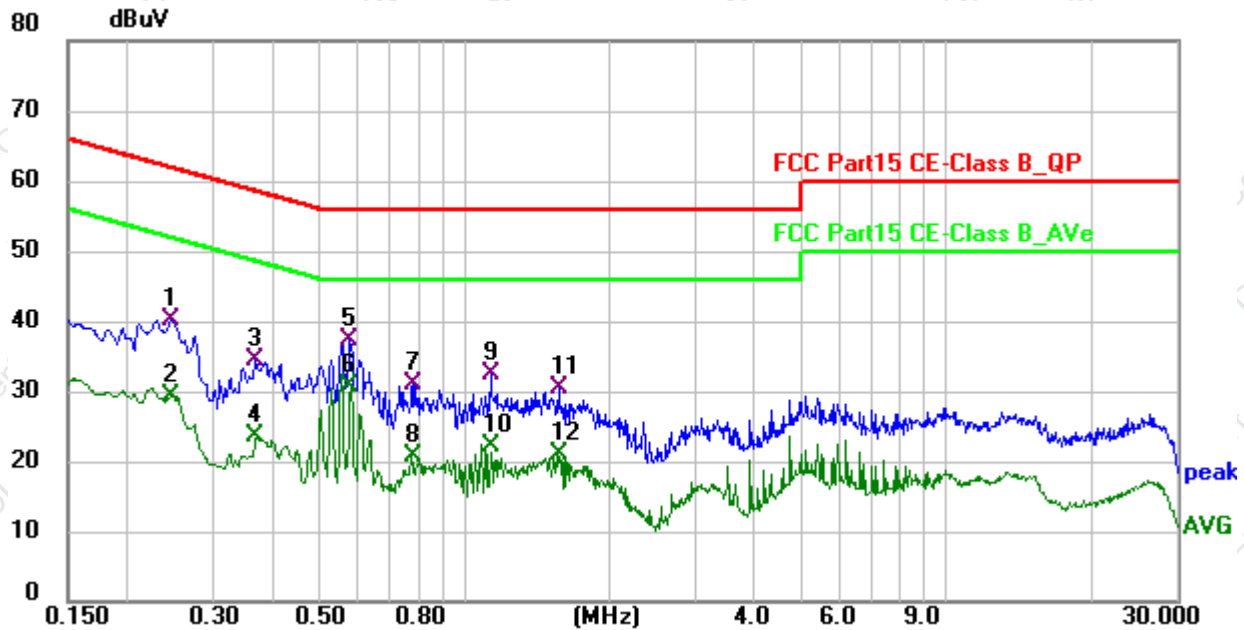

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2460	30.63	9.64	40.27	61.89	-21.62	QP
2	0.2460	19.68	9.64	29.32	51.89	-22.57	AVG
3	0.3660	24.83	9.65	34.48	58.59	-24.11	QP
4	0.3660	13.83	9.65	23.48	48.59	-25.11	AVG
5	0.5780	27.73	9.66	37.39	56.00	-18.61	QP
6 *	0.5780	21.00	9.66	30.66	46.00	-15.34	AVG
7	0.7820	21.40	9.66	31.06	56.00	-24.94	QP
8	0.7820	11.15	9.66	20.81	46.00	-25.19	AVG
9	1.1340	22.79	9.67	32.46	56.00	-23.54	QP
10	1.1340	12.39	9.67	22.06	46.00	-23.94	AVG
11	1.5740	20.89	9.68	30.57	56.00	-25.43	QP
12	1.5740	11.45	9.68	21.13	46.00	-24.87	AVG



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	TX 802.11n20 - 2437MHz

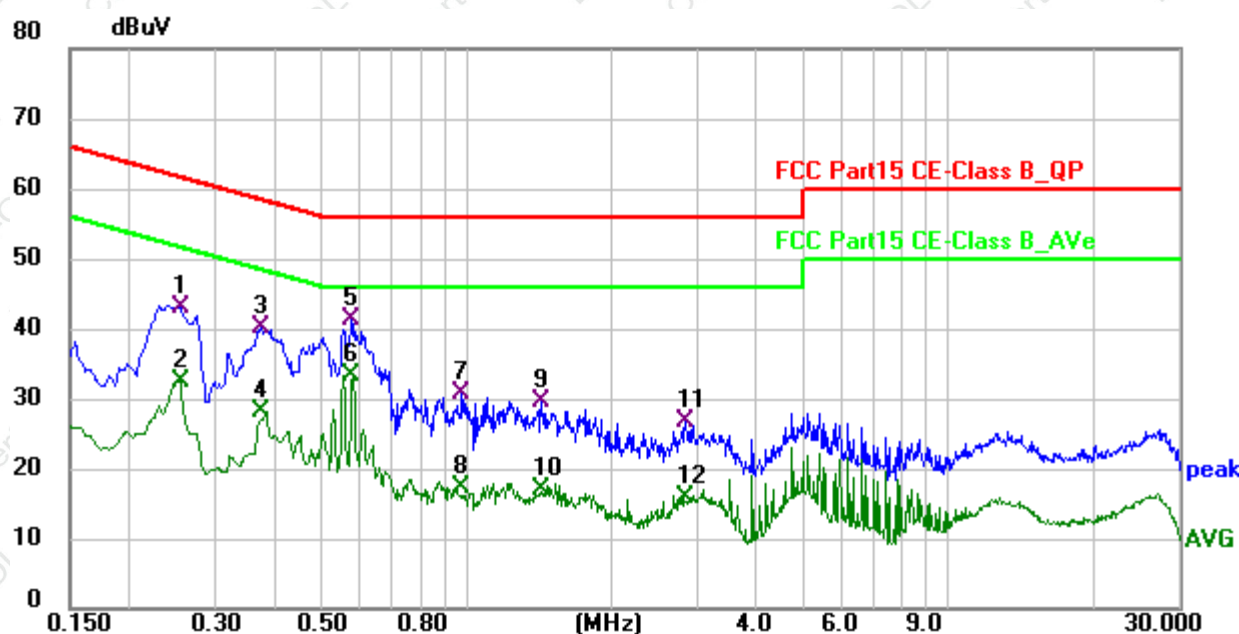

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2540	33.45	9.67	43.12	61.63	-18.51	QP
2	0.2540	22.86	9.67	32.53	51.63	-19.10	AVG
3	0.3740	30.58	9.68	40.26	58.41	-18.15	QP
4	0.3740	18.41	9.68	28.09	48.41	-20.32	AVG
5	0.5780	31.54	9.69	41.23	56.00	-14.77	QP
6 *	0.5780	23.49	9.69	33.18	46.00	-12.82	AVG
7	0.9780	20.93	9.70	30.63	56.00	-25.37	QP
8	0.9780	7.66	9.70	17.36	46.00	-28.64	AVG
9	1.4299	19.88	9.71	29.59	56.00	-26.41	QP
10	1.4299	7.15	9.71	16.86	46.00	-29.14	AVG
11	2.8420	17.00	9.75	26.75	56.00	-29.25	QP
12	2.8420	6.13	9.75	15.88	46.00	-30.12	AVG



4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2020+Cor.1-2023				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	400KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).



4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

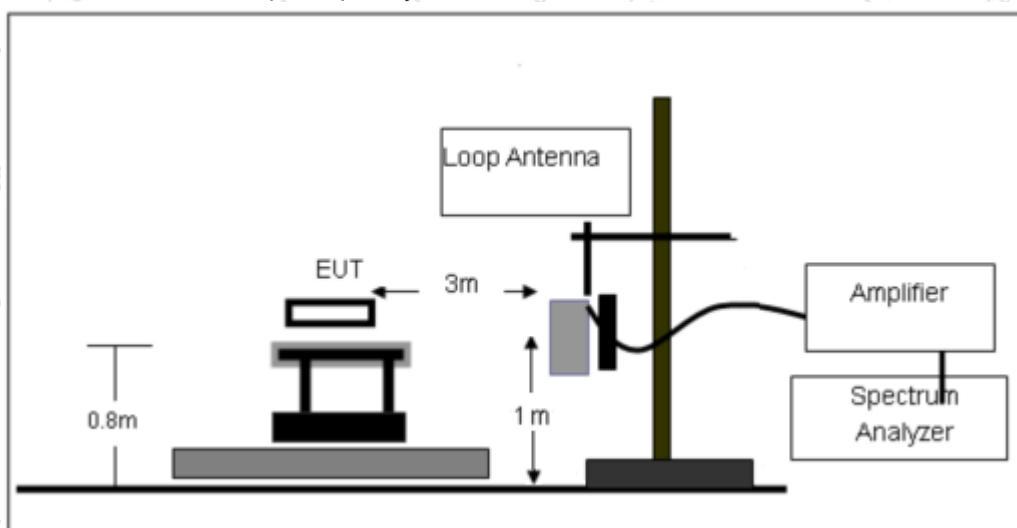




(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

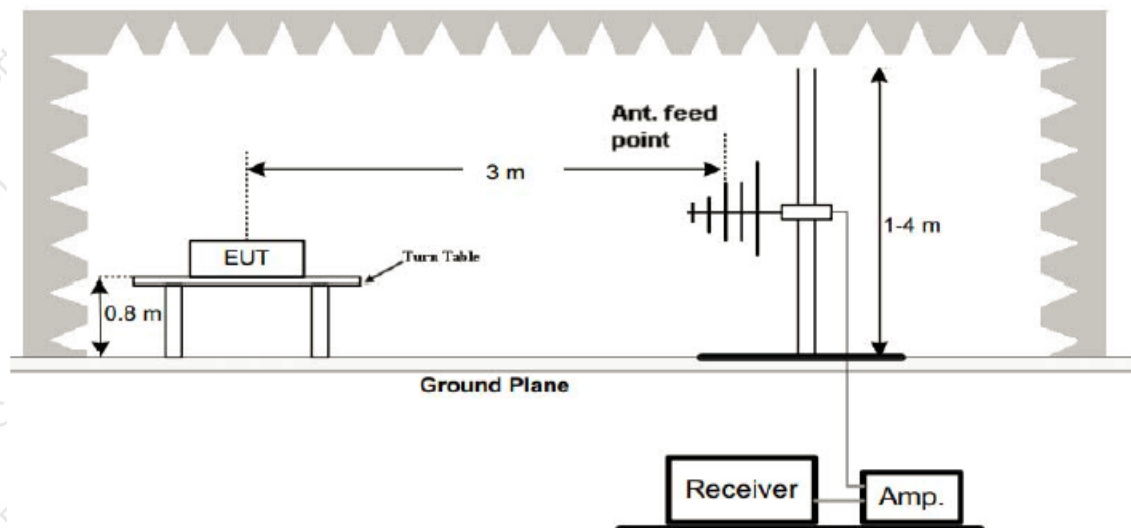

(C) Radiated Emission Test-Up Frequency Above 1GHz

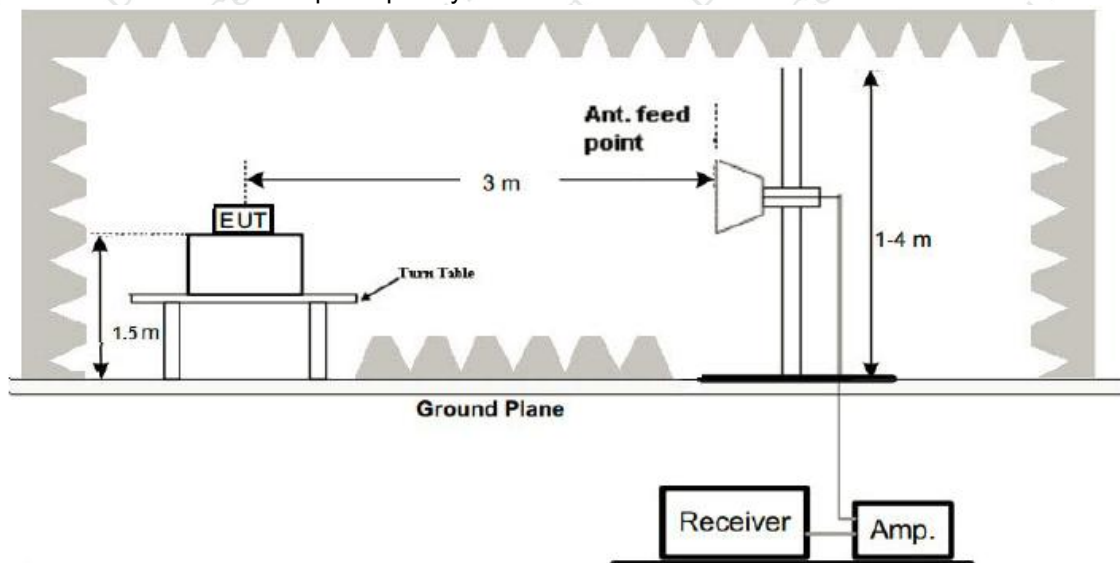

4.2.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V 60Hz	Test Mode :	TX 802.11n20 - 2437MHz

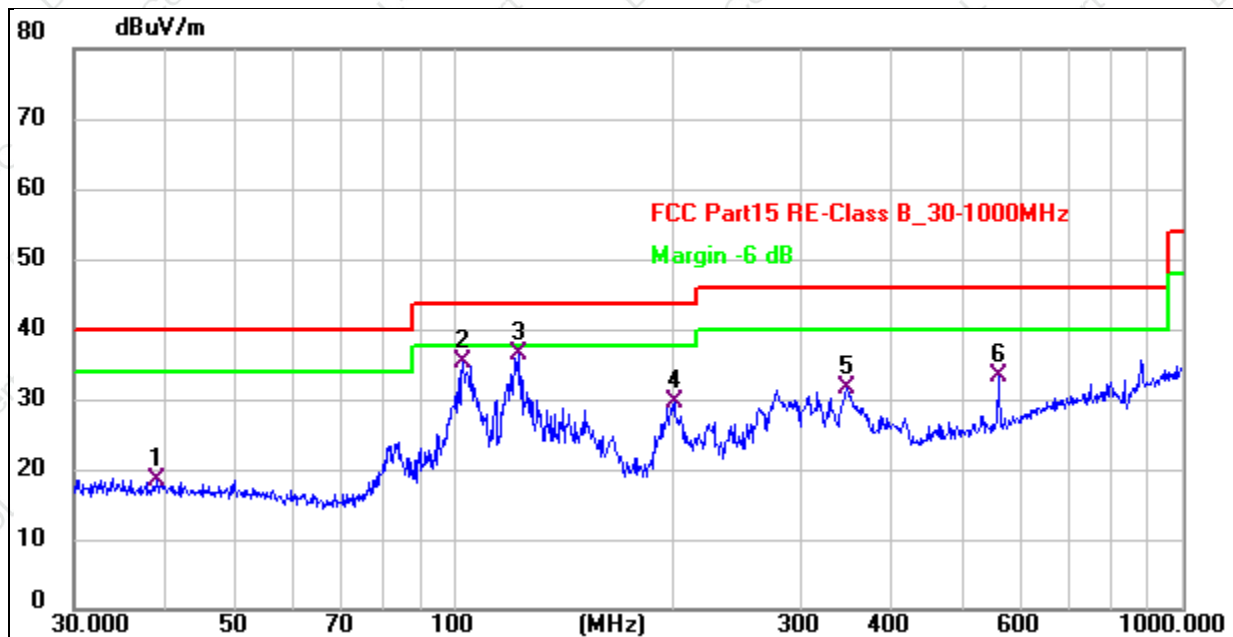

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39.0245	29.35	-10.85	18.50	40.00	-21.50	QP
2	102.7192	48.04	-12.78	35.26	43.50	-8.24	QP
3 *	122.4040	48.29	-11.76	36.53	43.50	-6.97	QP
4	200.6881	40.70	-11.06	29.64	43.50	-13.86	QP
5	345.5952	38.92	-7.29	31.63	46.00	-14.37	QP
6	558.7302	36.08	-2.77	33.31	46.00	-12.69	QP



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V 60Hz	Test Mode :	TX 802.11n20 - 2437MHz

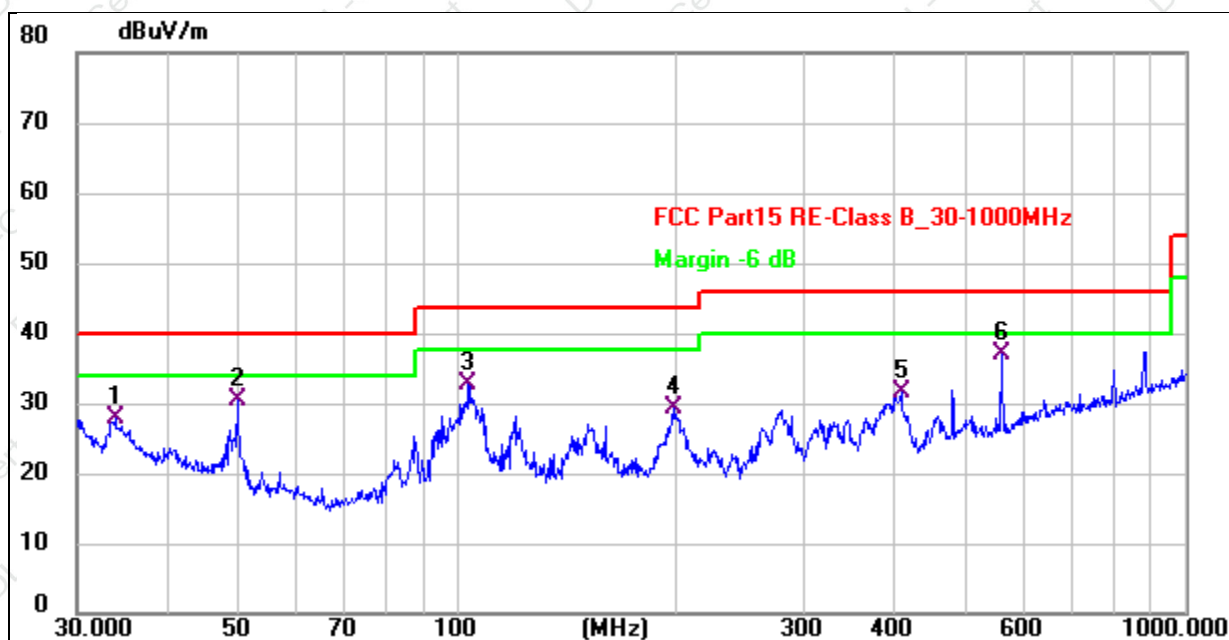

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	33.9174	39.17	-11.19	27.98	40.00	-12.02	QP
2	49.8814	41.83	-11.44	30.39	40.00	-9.61	QP
3	103.4421	45.39	-12.76	32.63	43.50	-10.87	QP
4	197.8928	40.50	-11.33	29.17	43.50	-14.33	QP
5	407.5145	37.97	-6.44	31.53	46.00	-14.47	QP
6 *	558.7302	39.90	-2.77	37.13	46.00	-8.87	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case TX 802.11n20 - 2437MHz.



1GHz~25GHz

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	53.43	30.55	5.77	24.66	53.31	74.00	-20.69	Pk
V	4824.00	43.21	30.55	5.77	24.66	43.09	54.00	-10.91	AV
V	7236.00	51.18	30.33	6.32	24.55	51.72	74.00	-22.28	Pk
V	7236.00	43.04	30.33	6.32	24.55	43.58	54.00	-10.42	AV
V	9648.00	51.91	30.85	7.45	24.69	53.20	74.00	-20.80	Pk
V	9648.00	43.33	30.85	7.45	24.69	44.62	54.00	-9.38	AV
V	12060.00	54.29	31.02	8.99	25.57	57.83	74.00	-16.17	Pk
V	12060.00	43.38	31.02	8.99	25.57	46.92	54.00	-7.08	AV
H	4824.00	50.43	30.55	5.77	24.66	50.31	74.00	-23.69	Pk
H	4824.00	43.03	30.55	5.77	24.66	42.91	54.00	-11.09	AV
H	7236.00	50.01	30.33	6.32	24.55	50.55	74.00	-23.45	Pk
H	7236.00	43.92	30.33	6.32	24.55	44.46	54.00	-9.54	AV
H	9648.00	54.81	30.85	7.45	24.69	56.10	74.00	-17.90	Pk
H	9648.00	43.77	30.85	7.45	24.69	45.06	54.00	-8.94	AV
H	12060.00	51.40	31.02	8.99	25.57	54.94	74.00	-19.06	Pk
H	12060.00	43.71	31.02	8.99	25.57	47.25	54.00	-6.75	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	52.09	30.55	5.77	24.66	51.97	74.00	-22.03	Pk
V	4874.00	43.13	30.55	5.77	24.66	43.01	54.00	-10.99	AV
V	7311.00	50.73	30.33	6.32	24.55	51.27	74.00	-22.73	Pk
V	7311.00	43.97	30.33	6.32	24.55	44.51	54.00	-9.49	AV
V	9748.00	50.18	30.85	7.45	24.69	51.47	74.00	-22.53	Pk
V	9748.00	43.42	30.85	7.45	24.69	44.71	54.00	-9.29	AV
V	12185.00	52.06	31.02	8.99	25.57	55.60	74.00	-18.40	Pk
V	12185.00	43.20	31.02	8.99	25.57	46.74	54.00	-7.26	AV
H	4874.00	52.63	30.55	5.77	24.66	52.51	74.00	-21.49	Pk
H	4874.00	43.76	30.55	5.77	24.66	43.64	54.00	-10.36	AV
H	7311.00	50.72	30.33	6.32	24.55	51.26	74.00	-22.74	Pk
H	7311.00	43.97	30.33	6.32	24.55	44.51	54.00	-9.49	AV
H	9748.00	53.38	30.85	7.45	24.69	54.67	74.00	-19.33	Pk
H	9748.00	43.41	30.85	7.45	24.69	44.70	54.00	-9.30	AV
H	12185.00	53.88	31.02	8.99	25.57	57.42	74.00	-16.58	Pk
H	12185.00	43.83	31.02	8.99	25.57	47.37	54.00	-6.63	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924.00	52.01	30.55	5.77	24.66	51.89	74.00	-22.11	Pk
V	4924.00	43.29	30.55	5.77	24.66	43.17	54.00	-10.83	AV
V	7386.00	53.35	30.33	6.32	24.55	53.89	74.00	-20.11	Pk
V	7386.00	43.92	30.33	6.32	24.55	44.46	54.00	-9.54	AV
V	9848.00	52.06	30.85	7.45	24.69	53.35	74.00	-20.65	Pk
V	9848.00	43.23	30.85	7.45	24.69	44.52	54.00	-9.48	AV
V	12310.00	50.00	31.02	8.99	25.57	53.54	74.00	-20.46	Pk
V	12310.00	43.16	31.02	8.99	25.57	46.70	54.00	-7.30	AV
H	4924.00	53.32	30.55	5.77	24.66	53.20	74.00	-20.80	Pk
H	4924.00	43.38	30.55	5.77	24.66	43.26	54.00	-10.74	AV
H	7386.00	51.04	30.33	6.32	24.55	51.58	74.00	-22.42	Pk
H	7386.00	43.61	30.33	6.32	24.55	44.15	54.00	-9.85	AV
H	9848.00	50.02	30.85	7.45	24.69	51.31	74.00	-22.69	Pk
H	9848.00	43.31	30.85	7.45	24.69	44.60	54.00	-9.40	AV
H	12310.00	54.40	31.02	8.99	25.57	57.94	74.00	-16.06	Pk
H	12310.00	43.78	31.02	8.99	25.57	47.32	54.00	-6.68	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The worst case is Antenna A.



802.11g

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:2412MHz									
V	4824.00	51.48	30.55	5.77	24.66	51.36	74.00	-22.64	Pk
V	4824.00	43.54	30.55	5.77	24.66	43.42	54.00	-10.58	AV
V	7236.00	50.62	30.33	6.32	24.55	51.16	74.00	-22.84	Pk
V	7236.00	43.15	30.33	6.32	24.55	43.69	54.00	-10.31	AV
V	9648.00	51.53	30.85	7.45	24.69	52.82	74.00	-21.18	Pk
V	9648.00	43.44	30.85	7.45	24.69	44.73	54.00	-9.27	AV
V	12060.00	51.44	31.02	8.99	25.57	54.98	74.00	-19.02	Pk
V	12060.00	43.00	31.02	8.99	25.57	46.54	54.00	-7.46	AV
H	4824.00	52.23	30.55	5.77	24.66	52.11	74.00	-21.89	Pk
H	4824.00	43.64	30.55	5.77	24.66	43.52	54.00	-10.48	AV
H	7236.00	54.16	30.33	6.32	24.55	54.70	74.00	-19.30	Pk
H	7236.00	43.20	30.33	6.32	24.55	43.74	54.00	-10.26	AV
H	9648.00	51.94	30.85	7.45	24.69	53.23	74.00	-20.77	Pk
H	9648.00	43.73	30.85	7.45	24.69	45.02	54.00	-8.98	AV
H	12060.00	51.49	31.02	8.99	25.57	55.03	74.00	-18.97	Pk
H	12060.00	43.75	31.02	8.99	25.57	47.29	54.00	-6.71	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874.00	54.92	30.55	5.77	24.66	54.80	74.00	-19.20	Pk
V	4874.00	43.57	30.55	5.77	24.66	43.45	54.00	-10.55	AV
V	7311.00	52.95	30.33	6.32	24.55	53.49	74.00	-20.51	Pk
V	7311.00	43.60	30.33	6.32	24.55	44.14	54.00	-9.86	AV
V	9748.00	51.76	30.85	7.45	24.69	53.05	74.00	-20.95	Pk
V	9748.00	43.84	30.85	7.45	24.69	45.13	54.00	-8.87	AV
V	12185.00	53.55	31.02	8.99	25.57	57.09	74.00	-16.91	Pk
V	12185.00	43.47	31.02	8.99	25.57	47.01	54.00	-6.99	AV
H	4874.00	53.77	30.55	5.77	24.66	53.65	74.00	-20.35	Pk
H	4874.00	43.43	30.55	5.77	24.66	43.31	54.00	-10.69	AV
H	7311.00	53.75	30.33	6.32	24.55	54.29	74.00	-19.71	Pk
H	7311.00	43.33	30.33	6.32	24.55	43.87	54.00	-10.13	AV
H	9748.00	54.26	30.85	7.45	24.69	55.55	74.00	-18.45	Pk
H	9748.00	43.41	30.85	7.45	24.69	44.70	54.00	-9.30	AV
H	12185.00	51.26	31.02	8.99	25.57	54.80	74.00	-19.20	Pk
H	12185.00	43.92	31.02	8.99	25.57	47.46	54.00	-6.54	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924.00	50.59	30.55	5.77	24.66	50.47	74.00	-23.53	Pk
V	4924.00	43.22	30.55	5.77	24.66	43.10	54.00	-10.90	AV
V	7386.00	53.26	30.33	6.32	24.55	53.80	74.00	-20.20	Pk
V	7386.00	43.44	30.33	6.32	24.55	43.98	54.00	-10.02	AV
V	9848.00	51.19	30.85	7.45	24.69	52.48	74.00	-21.52	Pk
V	9848.00	43.75	30.85	7.45	24.69	45.04	54.00	-8.96	AV
V	12310.00	51.97	31.02	8.99	25.57	55.51	74.00	-18.49	Pk
V	12310.00	43.08	31.02	8.99	25.57	46.62	54.00	-7.38	AV
H	4924.00	51.71	30.55	5.77	24.66	51.59	74.00	-22.41	Pk
H	4924.00	43.99	30.55	5.77	24.66	43.87	54.00	-10.13	AV
H	7386.00	50.39	30.33	6.32	24.55	50.93	74.00	-23.07	Pk
H	7386.00	43.47	30.33	6.32	24.55	44.01	54.00	-9.99	AV
H	9848.00	50.49	30.85	7.45	24.69	51.78	74.00	-22.22	Pk
H	9848.00	43.37	30.85	7.45	24.69	44.66	54.00	-9.34	AV
H	12310.00	51.65	31.02	8.99	25.57	55.19	74.00	-18.81	Pk
H	12310.00	43.47	31.02	8.99	25.57	47.01	54.00	-6.99	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The worst case is Antenna A.



802.11n20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:2412MHz									
V	4824.00	51.87	30.55	5.77	24.66	51.75	74.00	-22.25	Pk
V	4824.00	43.10	30.55	5.77	24.66	42.98	54.00	-11.02	AV
V	7236.00	52.03	30.33	6.32	24.55	52.57	74.00	-21.43	Pk
V	7236.00	43.34	30.33	6.32	24.55	43.88	54.00	-10.12	AV
V	9648.00	54.85	30.85	7.45	24.69	56.14	74.00	-17.86	Pk
V	9648.00	43.38	30.85	7.45	24.69	44.67	54.00	-9.33	AV
V	12060.00	52.95	31.02	8.99	25.57	56.49	74.00	-17.51	Pk
V	12060.00	43.33	31.02	8.99	25.57	46.87	54.00	-7.13	AV
H	4824.00	54.99	30.55	5.77	24.66	54.87	74.00	-19.13	Pk
H	4824.00	43.60	30.55	5.77	24.66	43.48	54.00	-10.52	AV
H	7236.00	52.73	30.33	6.32	24.55	53.27	74.00	-20.73	Pk
H	7236.00	43.23	30.33	6.32	24.55	43.77	54.00	-10.23	AV
H	9648.00	53.14	30.85	7.45	24.69	54.43	74.00	-19.57	Pk
H	9648.00	43.20	30.85	7.45	24.69	44.49	54.00	-9.51	AV
H	12060.00	51.42	31.02	8.99	25.57	54.96	74.00	-19.04	Pk
H	12060.00	43.62	31.02	8.99	25.57	47.16	54.00	-6.84	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874.00	54.38	30.55	5.77	24.66	54.26	74.00	-19.74	Pk
V	4874.00	43.28	30.55	5.77	24.66	43.16	54.00	-10.84	AV
V	7311.00	53.68	30.33	6.32	24.55	54.22	74.00	-19.78	Pk
V	7311.00	43.96	30.33	6.32	24.55	44.50	54.00	-9.50	AV
V	9748.00	51.64	30.85	7.45	24.69	52.93	74.00	-21.07	Pk
V	9748.00	43.14	30.85	7.45	24.69	44.43	54.00	-9.57	AV
V	12185.00	54.63	31.02	8.99	25.57	58.17	74.00	-15.83	Pk
V	12185.00	43.58	31.02	8.99	25.57	47.12	54.00	-6.88	AV
H	4874.00	52.89	30.55	5.77	24.66	52.77	74.00	-21.23	Pk
H	4874.00	43.97	30.55	5.77	24.66	43.85	54.00	-10.15	AV
H	7311.00	50.92	30.33	6.32	24.55	51.46	74.00	-22.54	Pk
H	7311.00	43.10	30.33	6.32	24.55	43.64	54.00	-10.36	AV
H	9748.00	54.84	30.85	7.45	24.69	56.13	74.00	-17.87	Pk
H	9748.00	43.26	30.85	7.45	24.69	44.55	54.00	-9.45	AV
H	12185.00	51.14	31.02	8.99	25.57	54.68	74.00	-19.32	Pk
H	12185.00	43.37	31.02	8.99	25.57	46.91	54.00	-7.09	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	54.66	30.55	5.77	24.66	54.54	74.00	-19.46	Pk
V	4924.00	43.02	30.55	5.77	24.66	42.90	54.00	-11.10	AV
V	7386.00	50.66	30.33	6.32	24.55	51.20	74.00	-22.80	Pk
V	7386.00	43.80	30.33	6.32	24.55	44.34	54.00	-9.66	AV
V	9848.00	52.96	30.85	7.45	24.69	54.25	74.00	-19.75	Pk
V	9848.00	43.52	30.85	7.45	24.69	44.81	54.00	-9.19	AV
V	12310.00	51.32	31.02	8.99	25.57	54.86	74.00	-19.14	Pk
V	12310.00	43.74	31.02	8.99	25.57	47.28	54.00	-6.72	AV
H	4924.00	51.30	30.55	5.77	24.66	51.18	74.00	-22.82	Pk
H	4924.00	43.71	30.55	5.77	24.66	43.59	54.00	-10.41	AV
H	7386.00	51.10	30.33	6.32	24.55	51.64	74.00	-22.36	Pk
H	7386.00	43.71	30.33	6.32	24.55	44.25	54.00	-9.75	AV
H	9848.00	54.75	30.85	7.45	24.69	56.04	74.00	-17.96	Pk
H	9848.00	43.68	30.85	7.45	24.69	44.97	54.00	-9.03	AV
H	12310.00	52.63	31.02	8.99	25.57	56.17	74.00	-17.83	Pk
H	12310.00	43.39	31.02	8.99	25.57	46.93	54.00	-7.07	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. Test Mode is MIMO Mode.



802.11n40

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2422MHz									
V	4844.00	52.36	30.55	5.77	24.66	52.24	74.00	-21.76	Pk
V	4844.00	43.09	30.55	5.77	24.66	42.97	54.00	-11.03	AV
V	7266.00	52.39	30.33	6.32	24.55	52.93	74.00	-21.07	Pk
V	7266.00	43.38	30.33	6.32	24.55	43.92	54.00	-10.08	AV
V	9688.00	52.47	30.85	7.45	24.69	53.76	74.00	-20.24	Pk
V	9688.00	43.78	30.85	7.45	24.69	45.07	54.00	-8.93	AV
V	12110.00	52.84	31.02	8.99	25.57	56.38	74.00	-17.62	Pk
V	12110.00	43.98	31.02	8.99	25.57	47.52	54.00	-6.48	AV
H	4844.00	52.82	30.55	5.77	24.66	52.70	74.00	-21.30	Pk
H	4844.00	43.22	30.55	5.77	24.66	43.10	54.00	-10.90	AV
H	7266.00	53.90	30.33	6.32	24.55	54.44	74.00	-19.56	Pk
H	7266.00	43.53	30.33	6.32	24.55	44.07	54.00	-9.93	AV
H	9688.00	54.50	30.85	7.45	24.69	55.79	74.00	-18.21	Pk
H	9688.00	43.02	30.85	7.45	24.69	44.31	54.00	-9.69	AV
H	12110.00	52.05	31.02	8.99	25.57	55.59	74.00	-18.41	Pk
H	12110.00	43.92	31.02	8.99	25.57	47.46	54.00	-6.54	AV

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	54.27	30.55	5.77	24.66	54.15	74.00	-19.85	Pk
V	4874.00	43.52	30.55	5.77	24.66	43.40	54.00	-10.60	AV
V	7311.00	51.19	30.33	6.32	24.55	51.73	74.00	-22.27	Pk
V	7311.00	43.38	30.33	6.32	24.55	43.92	54.00	-10.08	AV
V	9748.00	54.78	30.85	7.45	24.69	56.07	74.00	-17.93	Pk
V	9748.00	43.27	30.85	7.45	24.69	44.56	54.00	-9.44	AV
V	12185.00	54.87	31.02	8.99	25.57	58.41	74.00	-15.59	Pk
V	12185.00	43.57	31.02	8.99	25.57	47.11	54.00	-6.89	AV
H	4874.00	53.48	30.55	5.77	24.66	53.36	74.00	-20.64	Pk
H	4874.00	43.47	30.55	5.77	24.66	43.35	54.00	-10.65	AV
H	7311.00	52.00	30.33	6.32	24.55	52.54	74.00	-21.46	Pk
H	7311.00	43.10	30.33	6.32	24.55	43.64	54.00	-10.36	AV
H	9748.00	50.36	30.85	7.45	24.69	51.65	74.00	-22.35	Pk
H	9748.00	43.48	30.85	7.45	24.69	44.77	54.00	-9.23	AV
H	12185.00	52.23	31.02	8.99	25.57	55.77	74.00	-18.23	Pk
H	12185.00	43.47	31.02	8.99	25.57	47.01	54.00	-6.99	AV



Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2452MHz									
V	4904.00	53.89	30.55	5.77	24.66	53.77	74.00	-20.23	Pk
V	4904.00	43.45	30.55	5.77	24.66	43.33	54.00	-10.67	AV
V	7356.00	50.15	30.33	6.32	24.55	50.69	74.00	-23.31	Pk
V	7356.00	43.80	30.33	6.32	24.55	44.34	54.00	-9.66	AV
V	9808.00	53.15	30.85	7.45	24.69	54.44	74.00	-19.56	Pk
V	9808.00	43.84	30.85	7.45	24.69	45.13	54.00	-8.87	AV
V	12260.00	51.91	31.02	8.99	25.57	55.45	74.00	-18.55	Pk
V	12260.00	43.46	31.02	8.99	25.57	47.00	54.00	-7.00	AV
H	4904.00	52.88	30.55	5.77	24.66	52.76	74.00	-21.24	Pk
H	4904.00	43.74	30.55	5.77	24.66	43.62	54.00	-10.38	AV
H	7356.00	53.30	30.33	6.32	24.55	53.84	74.00	-20.16	Pk
H	7356.00	43.03	30.33	6.32	24.55	43.57	54.00	-10.43	AV
H	9808.00	53.00	30.85	7.45	24.69	54.29	74.00	-19.71	Pk
H	9808.00	43.21	30.85	7.45	24.69	44.50	54.00	-9.50	AV
H	12260.00	51.42	31.02	8.99	25.57	54.96	74.00	-19.04	Pk
H	12260.00	43.09	31.02	8.99	25.57	46.63	54.00	-7.37	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. Test Mode is MIMO Mode.



5. RADIATED Band EMISSION MEASUREMENT

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2020+Cor.1-2023				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2390MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.65 TEST PROCEDURE

Above 1GHz test procedure as below:

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
7. Test the EUT in the lowest channel, the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported




5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

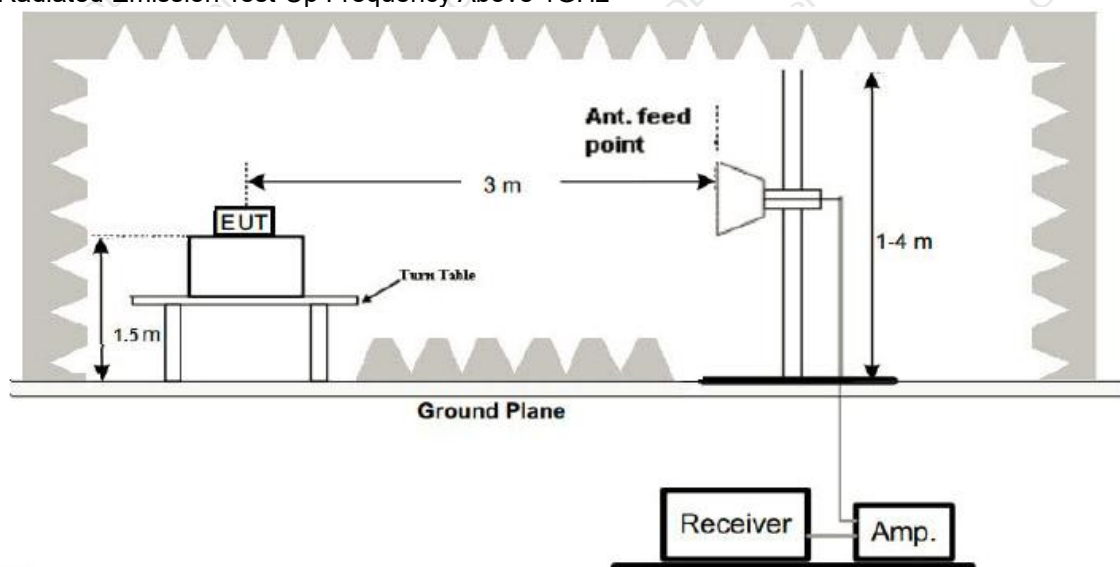

5.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



5.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBu V/m)	Margin (dB)	Detect or Type	Result
802.11 b	Low Channel: 2412MHz										
	H	2390.00	53.45	30.22	4.85	23.98	52.06	74.00	-21.94	PK	PASS
	H	2390.00	44.28	30.22	4.85	23.98	42.89	54.00	-11.11	AV	PASS
	H	2400.00	53.03	30.22	4.85	23.98	51.64	74.00	-22.36	PK	PASS
	H	2400.00	44.46	30.22	4.85	23.98	43.07	54.00	-10.93	AV	PASS
	V	2390.00	53.27	30.22	4.85	23.98	51.88	74.00	-22.12	PK	PASS
	V	2390.00	44.70	30.22	4.85	23.98	43.31	54.00	-10.69	AV	PASS
	V	2400.00	54.16	30.22	4.85	23.98	52.77	74.00	-21.23	PK	PASS
	V	2400.00	44.79	30.22	4.85	23.98	43.40	54.00	-10.60	AV	PASS
	High Channel: 2462MHz										
	H	2483.50	53.67	30.22	4.85	23.98	52.28	74.00	-21.72	PK	PASS
	H	2483.50	44.34	30.22	4.85	23.98	42.95	54.00	-11.05	AV	PASS
	H	2500.00	54.68	30.22	4.85	23.98	53.29	74.00	-20.71	PK	PASS
	H	2500.00	44.09	30.22	4.85	23.98	42.70	54.00	-11.30	AV	PASS
	V	2483.50	53.41	30.22	4.85	23.98	52.02	74.00	-21.98	PK	PASS
	V	2483.50	44.62	30.22	4.85	23.98	43.23	54.00	-10.77	AV	PASS
802.11 g	V	2500.00	53.66	30.22	4.85	23.98	52.27	74.00	-21.73	PK	PASS
	V	2500.00	44.41	30.22	4.85	23.98	43.02	54.00	-10.98	AV	PASS
	Low Channel: 2412MHz										
	H	2390.00	54.94	30.22	4.85	23.98	53.55	74.00	-20.45	PK	PASS
	H	2390.00	44.25	30.22	4.85	23.98	42.86	54.00	-11.14	AV	PASS
	H	2400.00	53.09	30.22	4.85	23.98	51.70	74.00	-22.30	PK	PASS
	H	2400.00	44.35	30.22	4.85	23.98	42.96	54.00	-11.04	AV	PASS
	V	2390.00	53.48	30.22	4.85	23.98	52.09	74.00	-21.91	PK	PASS
	V	2390.00	44.50	30.22	4.85	23.98	43.11	54.00	-10.89	AV	PASS
	V	2400.00	53.06	30.22	4.85	23.98	51.67	74.00	-22.33	PK	PASS
	V	2400.00	44.74	30.22	4.85	23.98	43.35	54.00	-10.65	AV	PASS
	High Channel: 2462MHz										
	H	2483.50	53.00	30.22	4.85	23.98	51.61	74.00	-22.39	PK	PASS
	H	2483.50	44.74	30.22	4.85	23.98	43.35	54.00	-10.65	AV	PASS
	H	2500.00	53.26	30.22	4.85	23.98	51.87	74.00	-22.13	PK	PASS
	H	2500.00	44.54	30.22	4.85	23.98	43.15	54.00	-10.85	AV	PASS
	V	2483.50	53.25	30.22	4.85	23.98	51.86	74.00	-22.14	PK	PASS
	V	2483.50	44.39	30.22	4.85	23.98	43.00	54.00	-11.00	AV	PASS
	V	2500.00	53.32	30.22	4.85	23.98	51.93	74.00	-22.07	PK	PASS
	V	2500.00	44.29	30.22	4.85	23.98	42.90	54.00	-11.10	AV	PASS
Remark:											
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											



	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detect or Type	Result
802.11 N20	Low Channel: 2412MHz										
	H	2390.00	53.91	30.22	4.85	23.98	52.52	74.00	-21.48	PK	PASS
	H	2390.00	44.71	30.22	4.85	23.98	43.32	54.00	-10.68	AV	PASS
	H	2400.00	53.93	30.22	4.85	23.98	52.54	74.00	-21.46	PK	PASS
	H	2400.00	44.26	30.22	4.85	23.98	42.87	54.00	-11.13	AV	PASS
	V	2390.00	54.61	30.22	4.85	23.98	53.22	74.00	-20.78	PK	PASS
	V	2390.00	44.84	30.22	4.85	23.98	43.45	54.00	-10.55	AV	PASS
	V	2400.00	54.46	30.22	4.85	23.98	53.07	74.00	-20.93	PK	PASS
	V	2400.00	44.89	30.22	4.85	23.98	43.50	54.00	-10.50	AV	PASS
	High Channel: 2462MHz										
	H	2483.50	53.59	30.22	4.85	23.98	52.20	74.00	-21.80	PK	PASS
	H	2483.50	44.07	30.22	4.85	23.98	42.68	54.00	-11.32	AV	PASS
	H	2500.00	54.22	30.22	4.85	23.98	52.83	74.00	-21.17	PK	PASS
	H	2500.00	44.81	30.22	4.85	23.98	43.42	54.00	-10.58	AV	PASS
	V	2483.50	53.35	30.22	4.85	23.98	51.96	74.00	-22.04	PK	PASS
	V	2483.50	44.90	30.22	4.85	23.98	43.51	54.00	-10.49	AV	PASS
	V	2500.00	54.90	30.22	4.85	23.98	53.51	74.00	-20.49	PK	PASS
	V	2500.00	44.44	30.22	4.85	23.98	43.05	54.00	-10.95	AV	PASS
802.11 N40	Low Channel: 2412MHz										
	H	2390.00	54.14	30.22	4.85	23.98	52.75	74.00	-21.25	PK	PASS
	H	2390.00	44.06	30.22	4.85	23.98	42.67	54.00	-11.33	AV	PASS
	H	2400.00	54.28	30.22	4.85	23.98	52.89	74.00	-21.11	PK	PASS
	H	2400.00	44.59	30.22	4.85	23.98	43.20	54.00	-10.80	AV	PASS
	V	2390.00	53.47	30.22	4.85	23.98	52.08	74.00	-21.92	PK	PASS
	V	2390.00	44.60	30.22	4.85	23.98	43.21	54.00	-10.79	AV	PASS
	V	2400.00	54.12	30.22	4.85	23.98	52.73	74.00	-21.27	PK	PASS
	V	2400.00	44.13	30.22	4.85	23.98	42.74	54.00	-11.26	AV	PASS
	High Channel: 2462MHz										
	H	2483.50	53.97	30.22	4.85	23.98	52.58	74.00	-21.42	PK	PASS
	H	2483.50	44.36	30.22	4.85	23.98	42.97	54.00	-11.03	AV	PASS
	H	2500.00	53.59	30.22	4.85	23.98	52.20	74.00	-21.80	PK	PASS
	H	2500.00	44.43	30.22	4.85	23.98	43.04	54.00	-10.96	AV	PASS
	V	2483.50	53.75	30.22	4.85	23.98	52.36	74.00	-21.64	PK	PASS
	V	2483.50	44.49	30.22	4.85	23.98	43.10	54.00	-10.90	AV	PASS
	V	2500.00	54.54	30.22	4.85	23.98	53.15	74.00	-20.85	PK	PASS
	V	2500.00	44.28	30.22	4.85	23.98	42.89	54.00	-11.11	AV	PASS
Remark:											
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											



6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS


6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

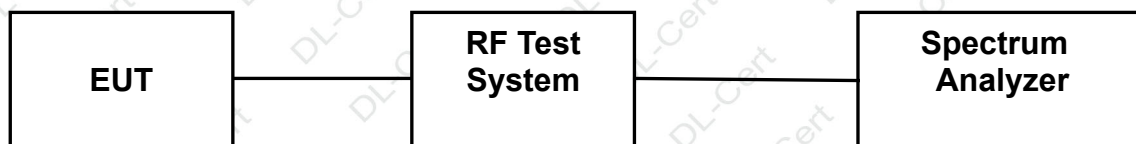

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 6.4 Unless otherwise a special operating condition is specified in the follows during the testing.



6.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V 60Hz

Frequency	Mode	Power Spectral Density (dBm/3kHz)			Limit (dBm/3kHz)	Result
		ANT A	ANT B	Total		
2412 MHz	b	-7.65	-17.47	/	8	PASS
2437 MHz	b	-7.36	-17.48	/	8	PASS
2462 MHz	b	-7.35	-16.29	/	8	PASS
2412 MHz	g	-16.38	-27.89	/	8	PASS
2437 MHz	g	-15.44	-26.7	/	8	PASS
2462 MHz	g	-14.96	-26.71	/	8	PASS
2412 MHz	n20	-17.89	-29.36	-17.59	8	PASS
2437 MHz	n20	-16.79	-27.98	-16.47	8	PASS
2462 MHz	n20	-16.37	-27.86	-16.07	8	PASS
2422 MHz	n40	-18.57	-33.55	-18.43	8	PASS
2437 MHz	n40	-19.33	-33.99	-19.18	8	PASS
2452 MHz	n40	-19.89	-34.8	-19.75	8	PASS

Note: The worst case is Antenna A.





Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.

Test plot as follows:



802.11b

802.11g



Lowest channel

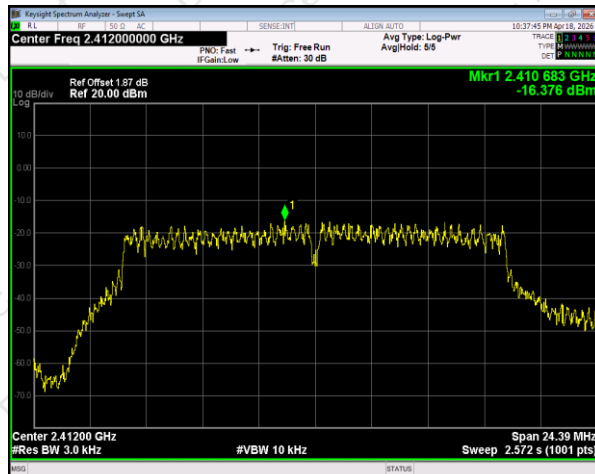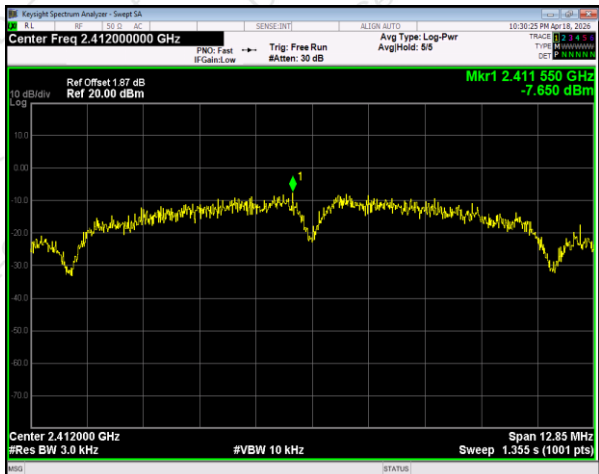

Middle channel

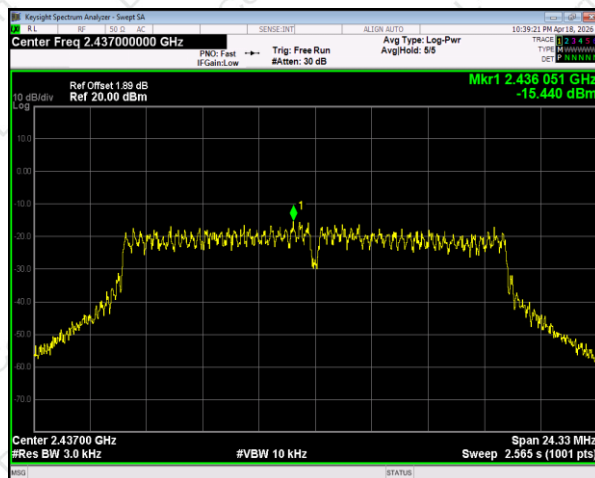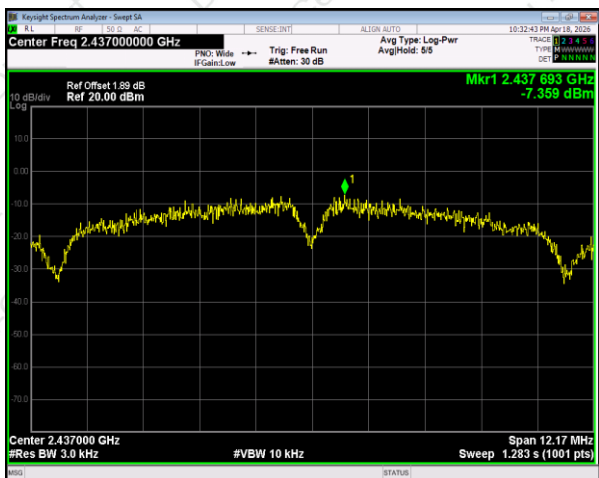

Highest channel

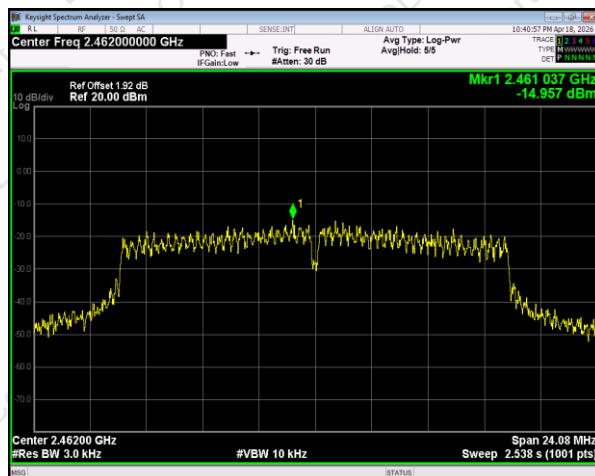
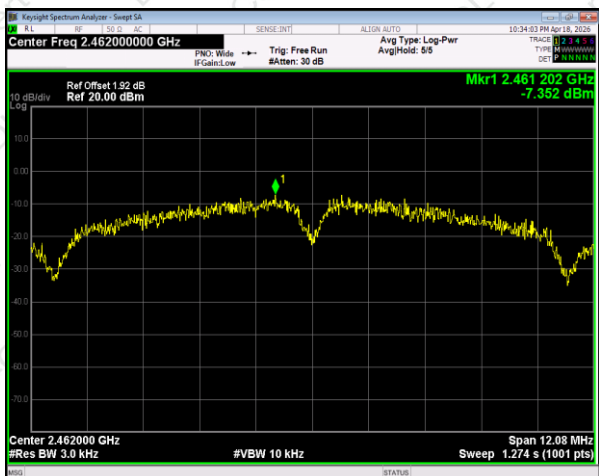






802.11n20

802.11n40



Lowest channel

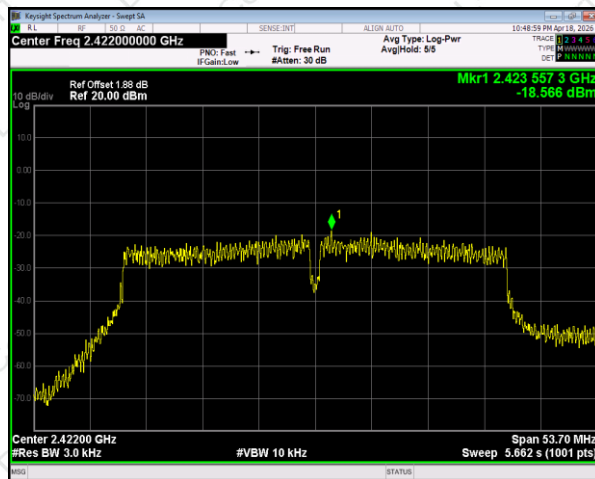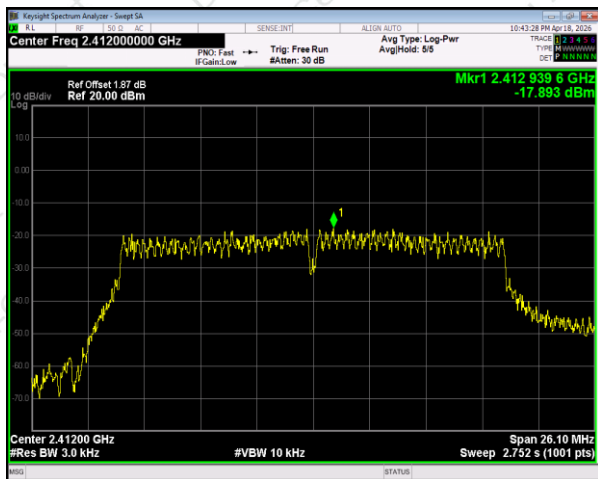

Middle channel

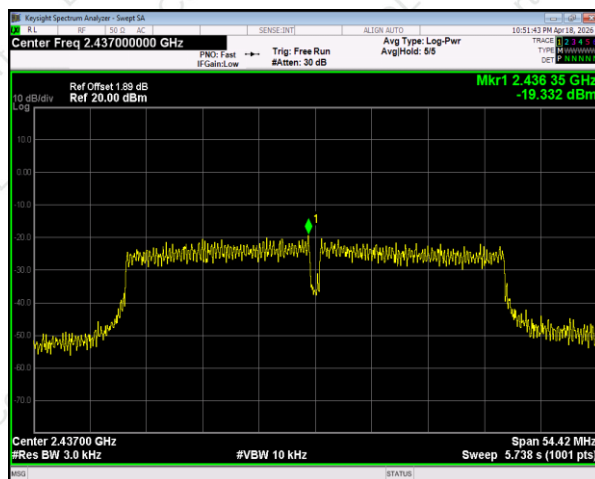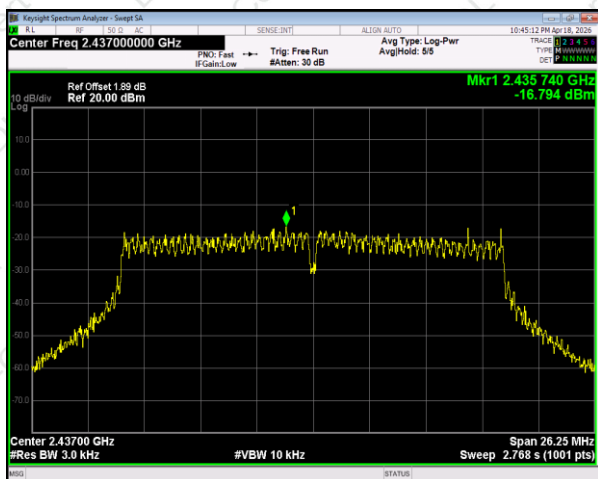

Highest channel

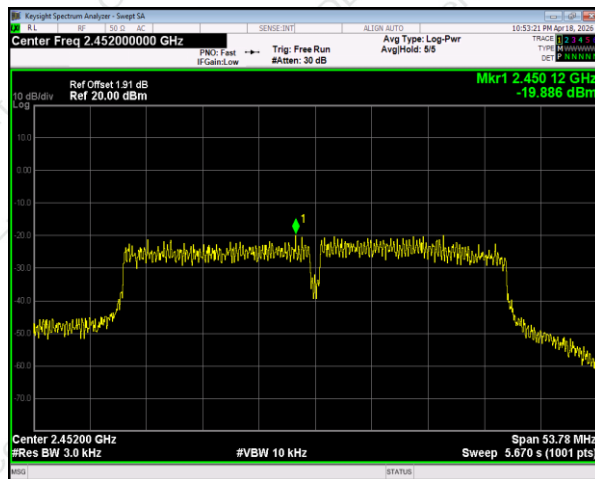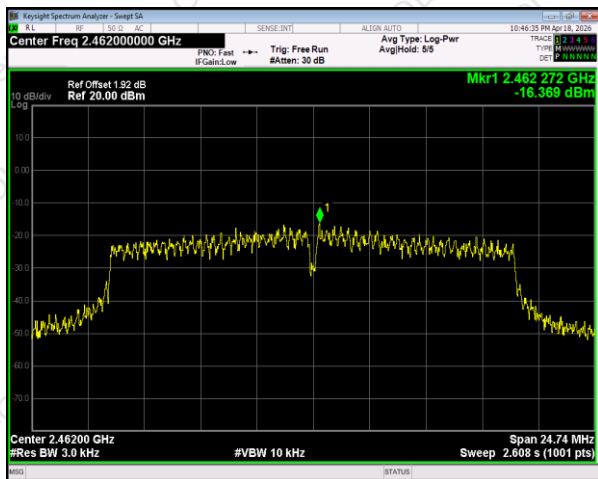



7. 6DB OCCUPIED BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB Occupied Bandwidth)	2400-2483.5	PASS


7.2 TEST PROCEDURE

1. Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
2. Set the VBW $\geq [3 \times \text{RBW}]$.
3. Detector = peak.
4. Trace mode = max-hold.
5. Sweep = No faster than coupled (auto) time.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

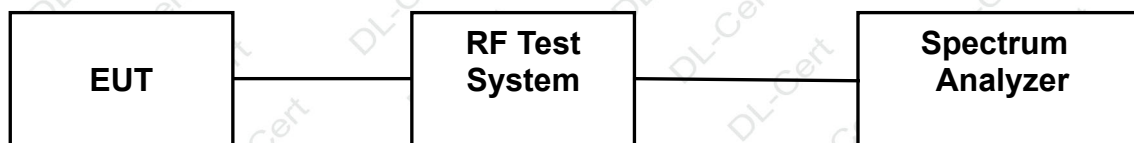

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 7.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V 60Hz
Test Mode :	TX		

Frequency	Mode	-6dB bandwidth (MHz)		Limit(KHz)	Result
		ANT A	ANT B		
2412 MHz	b	8.565	9.052	>= 500KHz	PASS
2437 MHz	b	8.110	8.508	>= 500KHz	PASS
2462 MHz	b	8.056	7.555	>= 500KHz	PASS
2412 MHz	g	16.26	16.31	>= 500KHz	PASS
2437 MHz	g	16.22	15.44	>= 500KHz	PASS
2462 MHz	g	16.05	13.87	>= 500KHz	PASS
2412 MHz	n20	17.40	17.29	>= 500KHz	PASS
2437 MHz	n20	17.50	15.15	>= 500KHz	PASS
2462 MHz	n20	16.49	15.03	>= 500KHz	PASS
2422 MHz	n40	35.8	35.06	>= 500KHz	PASS
2437 MHz	n40	36.28	35.11	>= 500KHz	PASS
2452 MHz	n40	35.85	35.47	>= 500KHz	PASS




Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.

Test plot as follows:



802.11b

802.11g


Lowest channel

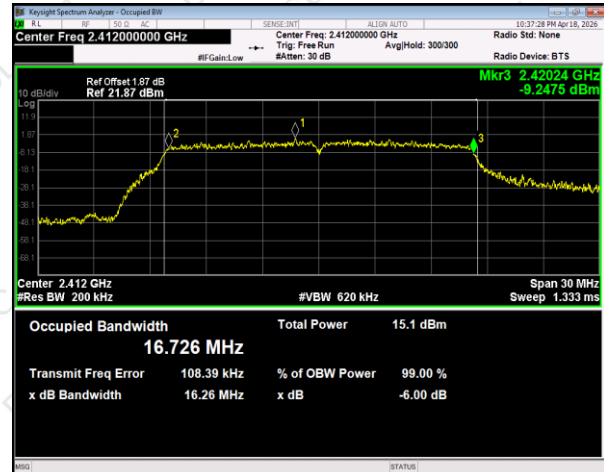

Middle channel

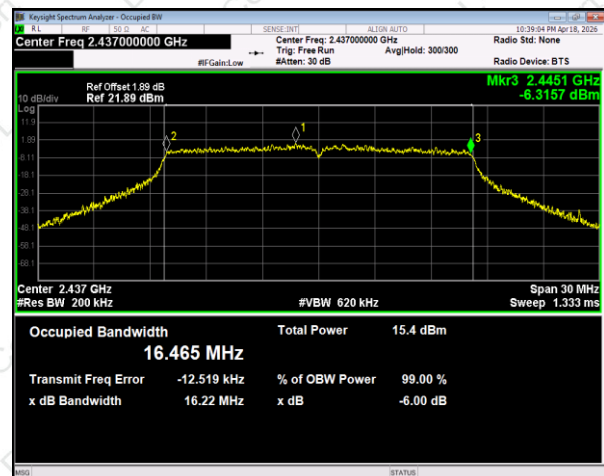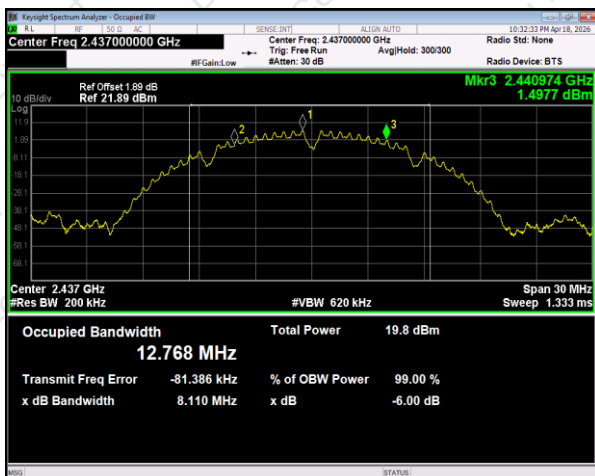

Highest channel


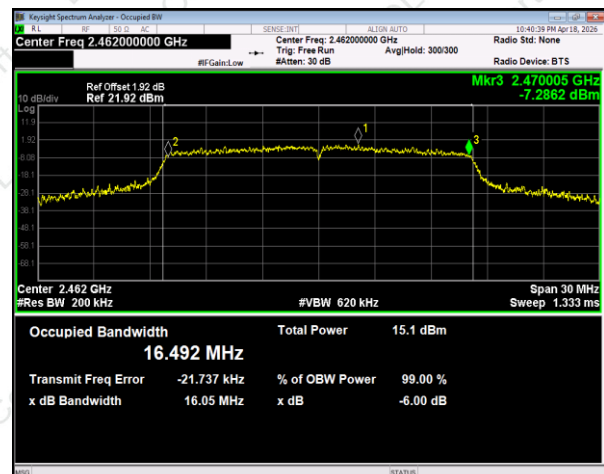






802.11n20

802.11n40



Lowest channel

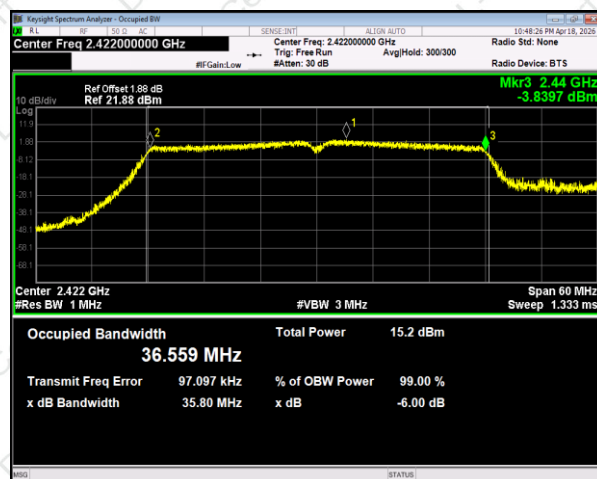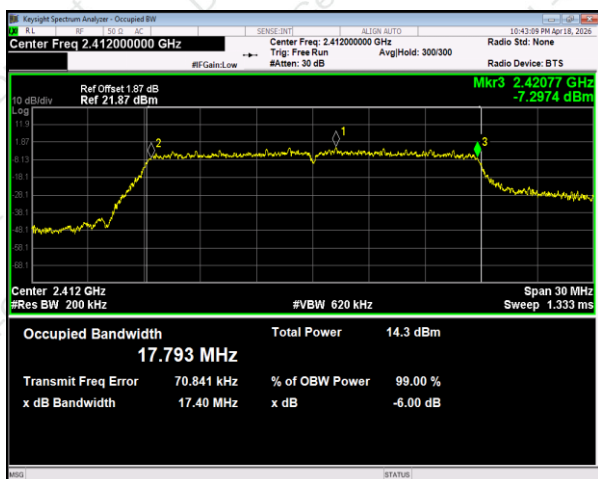

Middle channel

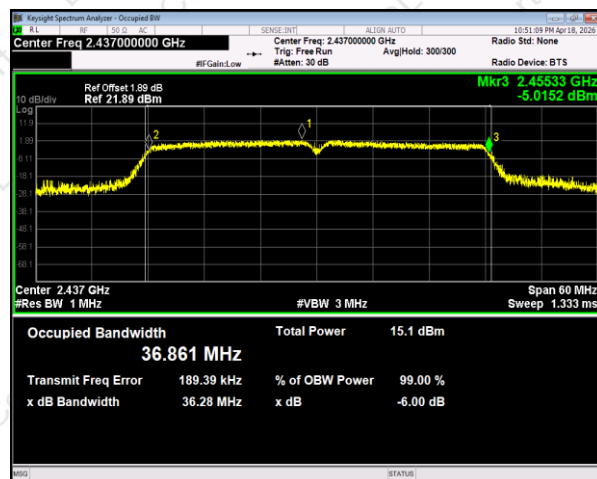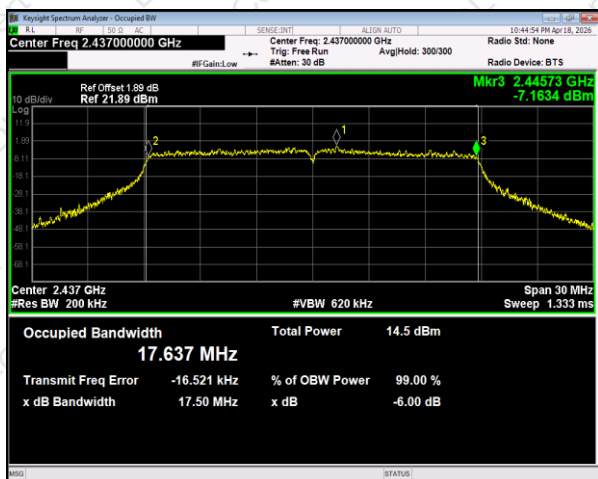

Highest channel

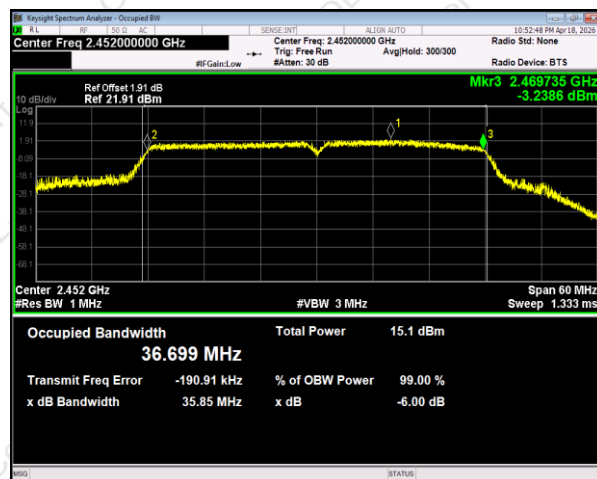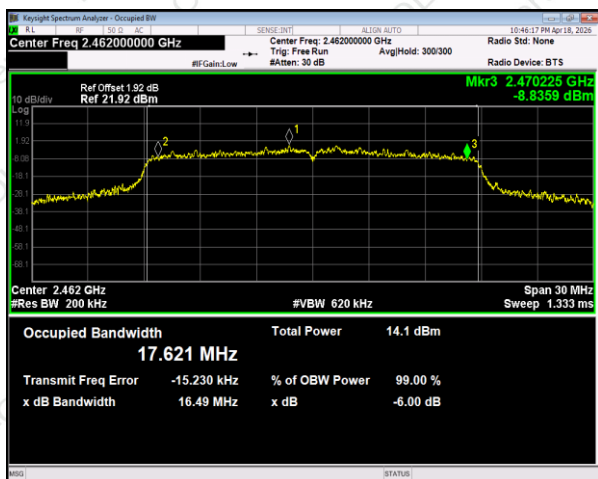



8. PEAK OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 8.4 Unless otherwise a special operating condition is specified in the follows during the testing.



8.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V 60Hz

Frequency	Mode	Conducted Output Power (dBm)			Limit (dBm)	Result
		ANT A	ANT B	Total		
2412 MHz	b	17.77	16.45	/	30	PASS
2437 MHz	b	17.79	16.71	/	30	PASS
2462 MHz	b	17.99	17.06	/	30	PASS
2412 MHz	g	16.51	14.83	/	30	PASS
2437 MHz	g	16.86	15.66	/	30	PASS
2462 MHz	g	16.56	15.25	/	30	PASS
2412 MHz	n20	15.53	13.94	17.82	30	PASS
2437 MHz	n20	15.98	14.6	18.35	30	PASS
2462 MHz	n20	15.44	14.06	17.81	30	PASS
2422 MHz	n40	15.92	13.7	17.96	30	PASS
2437 MHz	n40	15.94	13.52	17.91	30	PASS
2452 MHz	n40	15.77	13.35	17.74	30	PASS



9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

A. Reference level measurement, establish a reference level by using the following procedure:

- Set instrument center frequency to FHSS channel center frequency.
- Set the span to ≥ 1.5 times the 20dB bandwidth.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

B. Emission level measurement, establish an emission level by using the following procedure:

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

9.3 DEVIATION FROM STANDARD

No deviation.



9.4 TEST SETUP

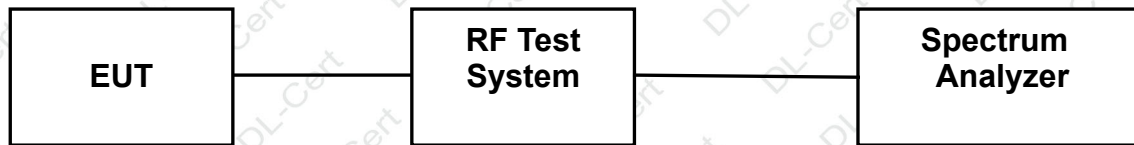

9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 9.4 Unless otherwise a special operating condition is specified in the follows during the testing.


9.6 TEST RESULTS

Note: A(B) Represent the value of antenna A and B, Antenna A, only shown the worst data Plot.


Test mode: 802.11b Antenna A (The worst data)




Lowest Ref

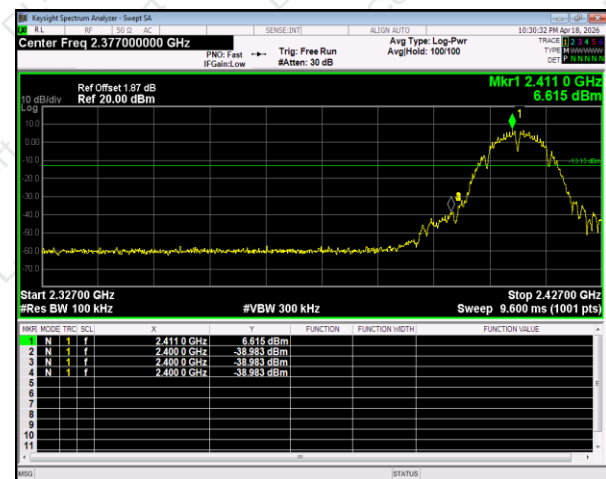

Lowest Emission

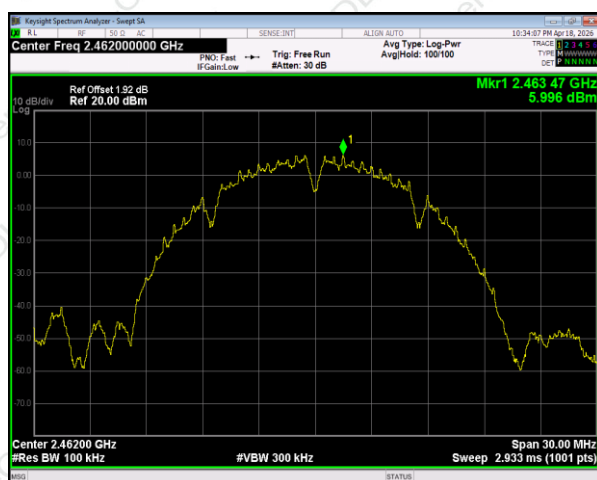

Highest Ref

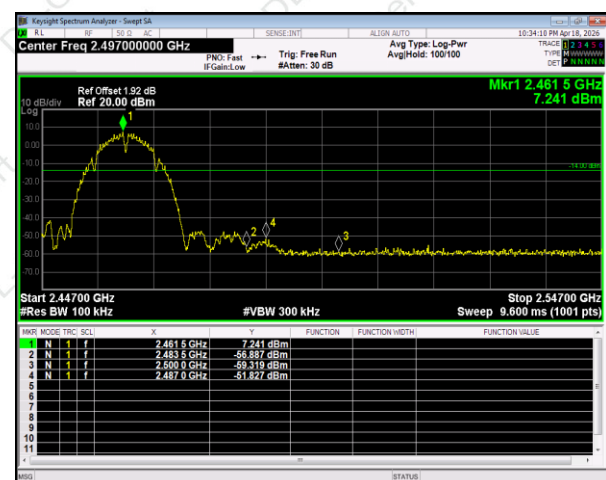


Highest Emission




Test mode: 802.11g Antenna A (The worst data)




Lowest Ref

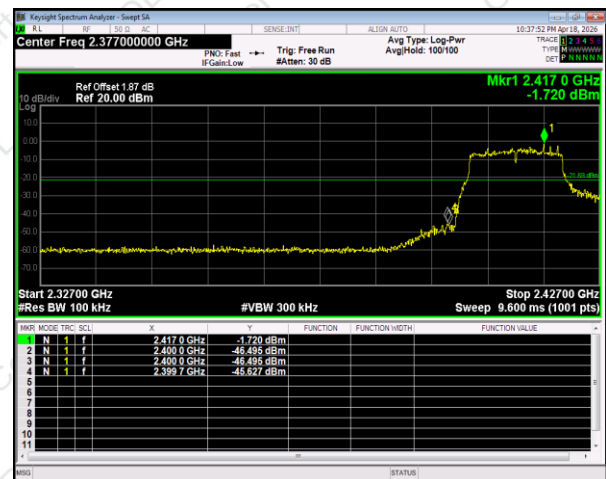

Lowest Emission

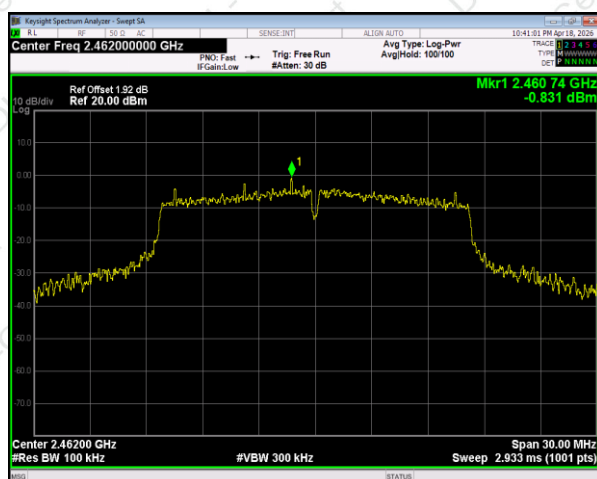

Highest Ref

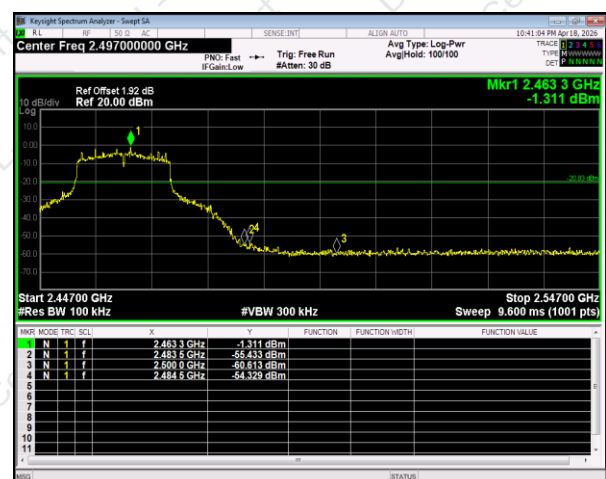


Highest Emission




Test mode: 802.11n20 MIMO Mode (The worst data)




Lowest Ref

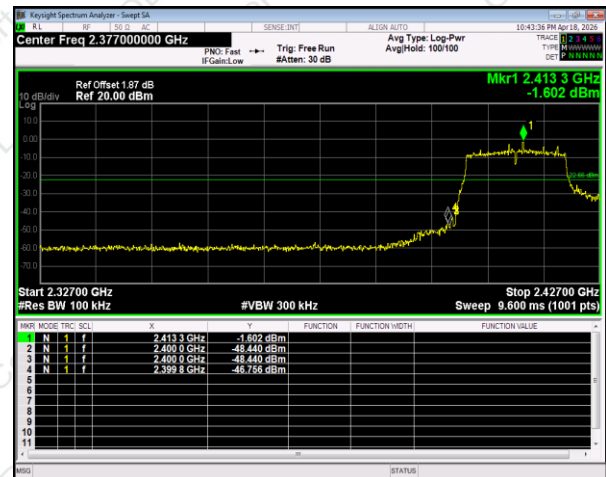

Lowest Emission

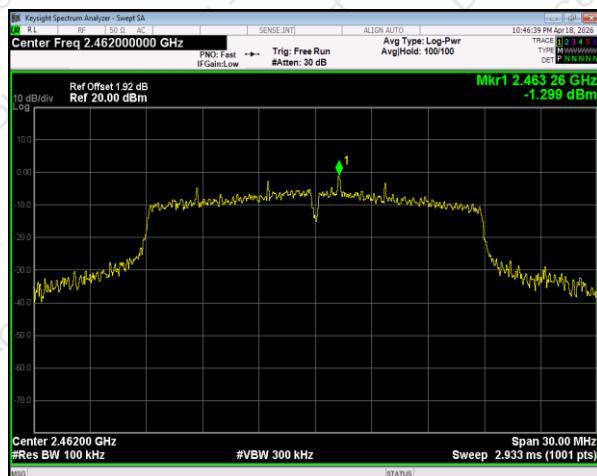

Highest Ref

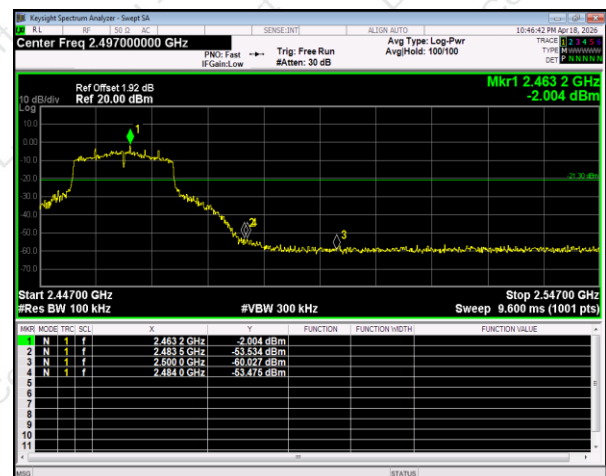

Highest Emission