



802.11n20_2412MHz

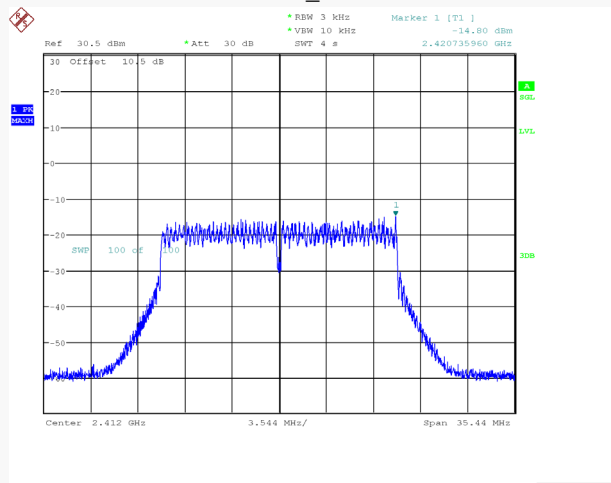


ProjectNo.:RSHA251208002 Tester:Neil Zhou
Date: 25.DEC.2025 11:01:47

802.11n20_2437MHz

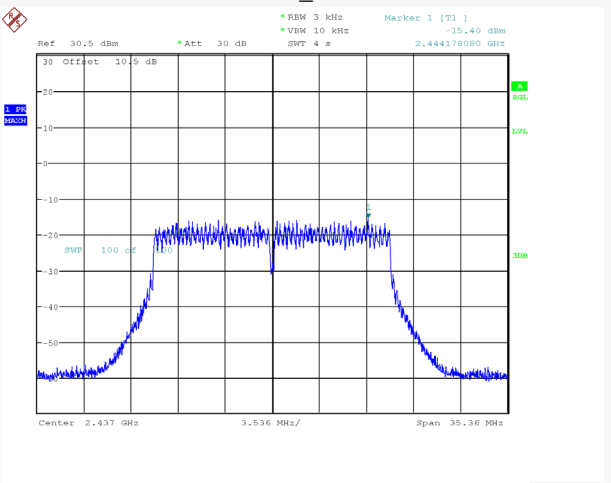


ProjectNo.:RSHA251208002 Tester:Neil Zhou
Date: 25.DEC.2025 11:17:47

802.11n20_2462MHz

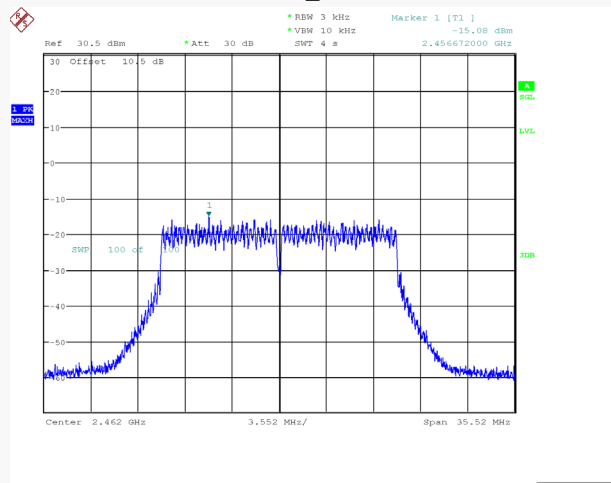


ProjectNo.:RSHA251208002 Tester:Neil Zhou
Date: 25.DEC.2025 11:35:43

802.11n40_2422MHz

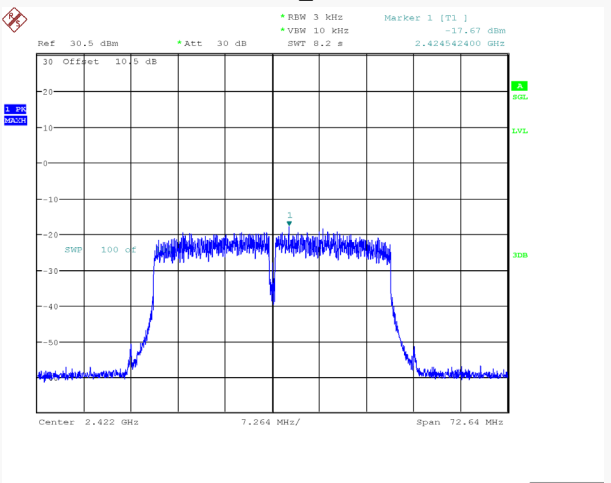


ProjectNo.:RSHA251208002 Tester:Neil Zhou
Date: 25.DEC.2025 12:01:19

802.11n40_2437MHz

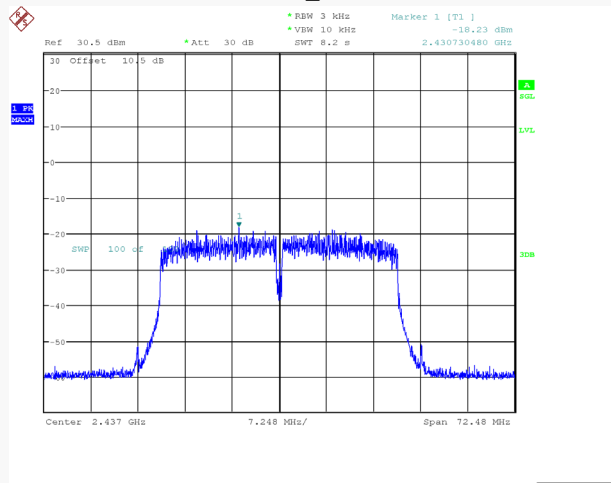

ProjectNo.:RSHA251208002 Tester:Neil Zhou
Date: 25.DEC.2025 13:27:42


802.11n40_2452MHz

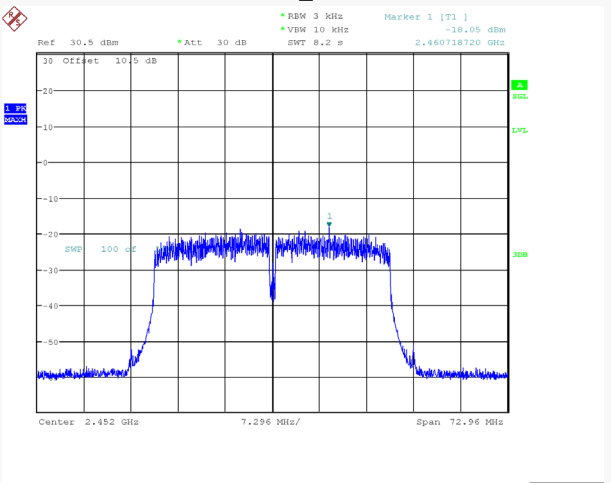

ProjectNo.:RSHA251208002 Tester:Neil Zhou
Date: 25.DEC.2025 13:50:49


For BLE Mode:
BLE (1 Mbps)

Low Channel

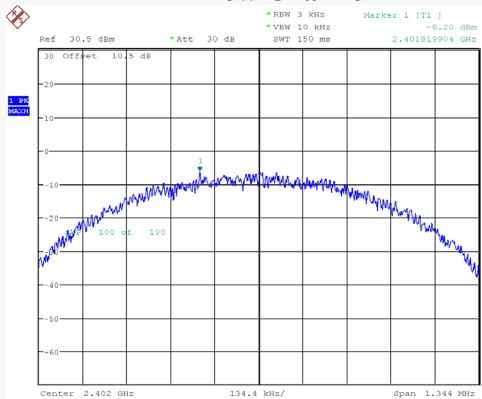

ProjectNo.:RSHA251208002 Tester:Nail Zhou
Date: 24.DEC.2025 14:41:47


Middle Channel

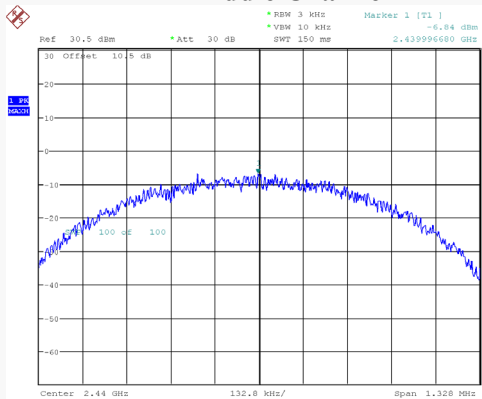

ProjectNo.:RSHA251208002 Tester:Nail Zhou
Date: 24.DEC.2025 14:54:07


BLE (2 Mbps)

High Channel

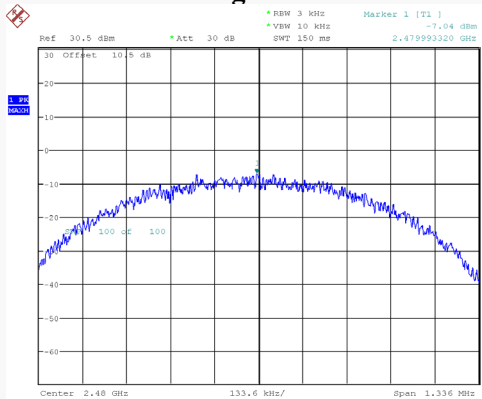


ProjectNo.:RSHA251208002 Tester:Nail Zhou
Date: 24.DEC.2025 15:05:42

Low Channel

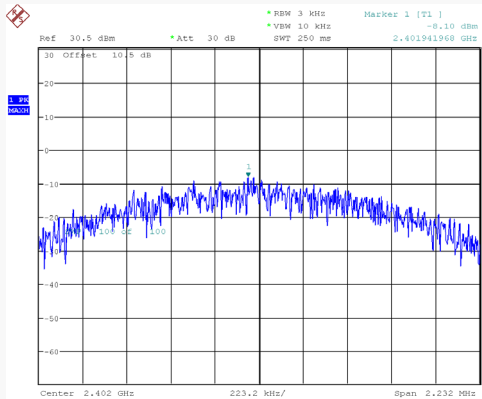


ProjectNo.:RSHA251208002 Tester:Nail Zhou
Date: 24.DEC.2025 16:29:05

Middle Channel

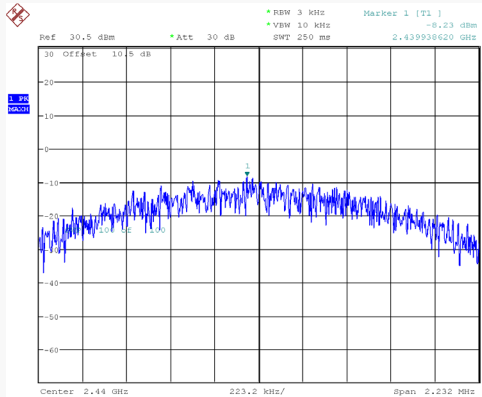

ProjectNo.:RSHA251208002 Tester:Nail Zhou
Date: 24.DEC.2025 16:40:15

High Channel

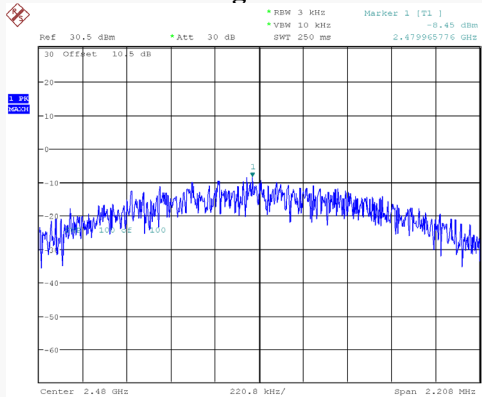

ProjectNo.:RSHA251208002 Tester:Nail Zhou
Date: 24.DEC.2025 16:51:41

EUT PHOTOGRAPHS

Please refer to the attachment EXHIBIT A - EUT EXTERNAL PHOTOGRAPHS and EXHIBIT B - EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment EXHIBIT C - TEST SETUP PHOTOGRAPHS.

Declarations

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★” .
2. The test data was only valid for the test sample(s).
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95.45% confidence interval.

******* END OF REPORT *******