



BLE (1 Mbps)

Low Channel

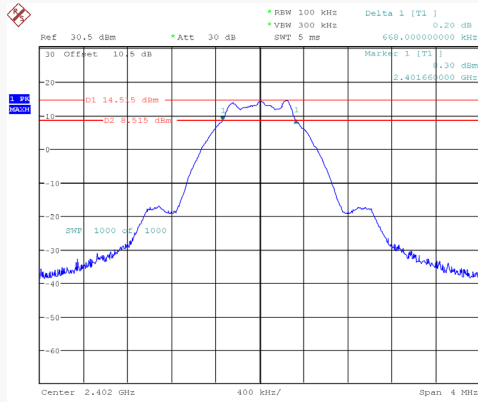

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 10:07:42


Middle Channel

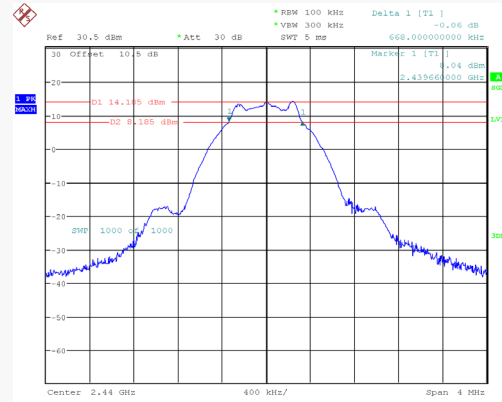

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 10:18:01


BLE (2 Mbps)

High Channel

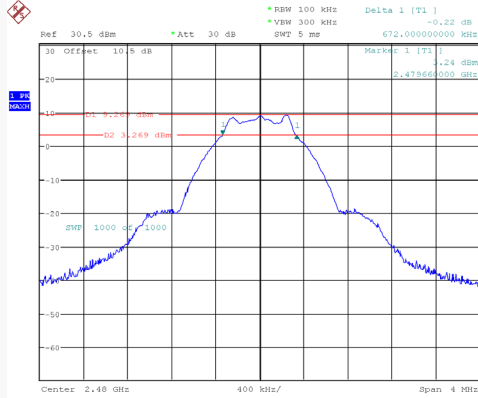


ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 11:07:00

Low Channel

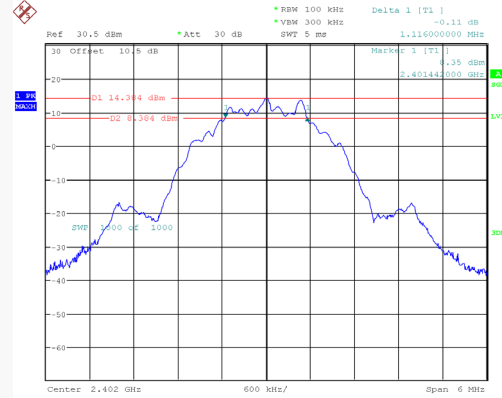


ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 10:24:32

Middle Channel

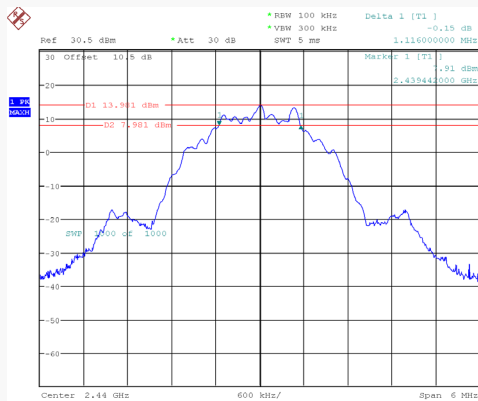

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 10:34:29

High Channel

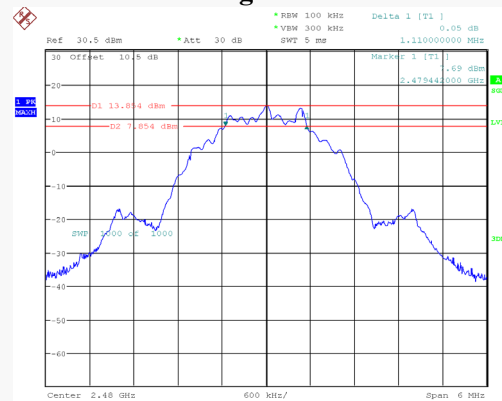

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 10:53:07

MAXIMUM CONDUCTED OUTPUT POWER**Environmental Conditions & Test Information**

Test Date:	2026-03-06
Temperature:	21.8°C
Relative Humidity:	52 %
ATM Pressure:	101.4 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou


Test Result: Compliant.

EUT operation mode: Transmitting

Mode	Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
BLE (1 Mbps)	Low	2402	14.87	≤30	Pass
	Middle	2440	14.54	≤30	Pass
	High	2476	14.42	≤30	Pass
		2478	13.47	≤30	Pass
		2480	9.51	≤30	Pass
BLE (2 Mbps)	Low	2402	14.82	≤30	Pass
	Middle	2440	14.33	≤30	Pass
	High	2480	14.27	≤30	Pass


BLE (1 Mbps)

Low Channel

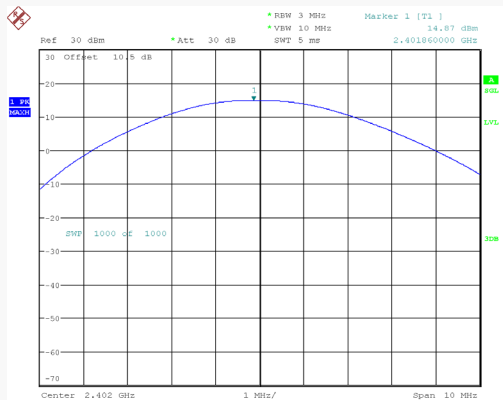


ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 09:47:57

Middle Channel

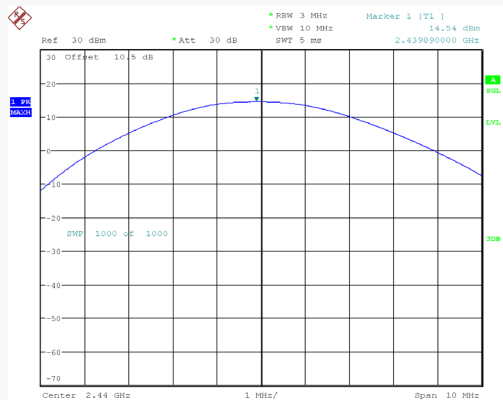


ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 09:50:44

High Channel: 2476MHz

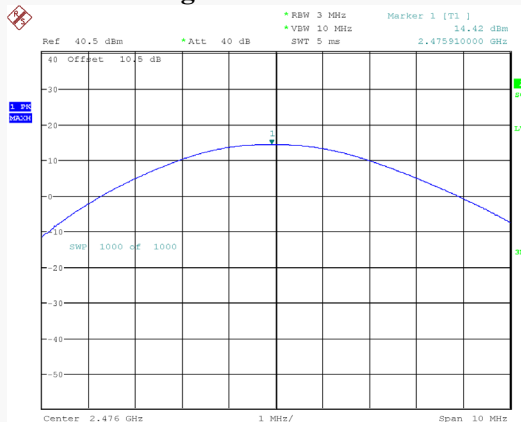


ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 13:34:50

High Channel: 2478MHz

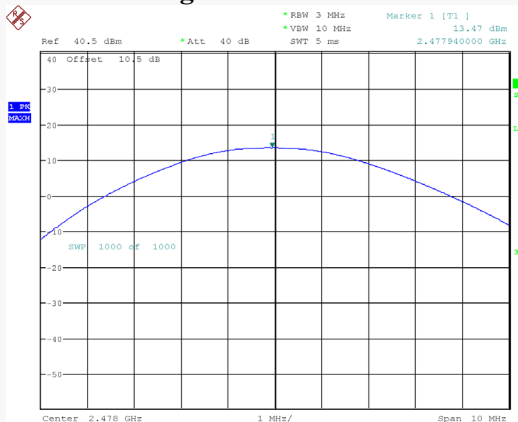

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 13:26:20


High Channel: 2480MHz

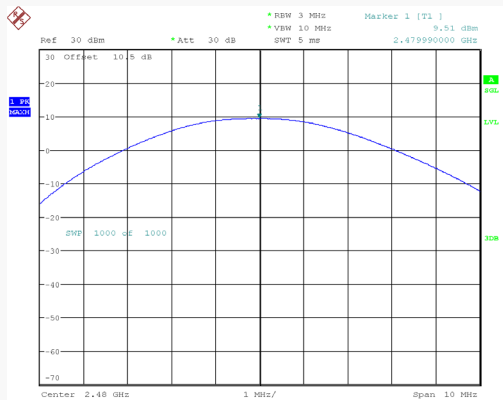

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 09:52:09


BLE (2 Mbps)

Low Channel

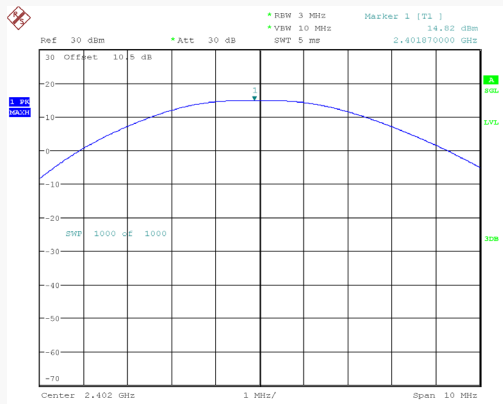


ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 09:53:16

Middle Channel

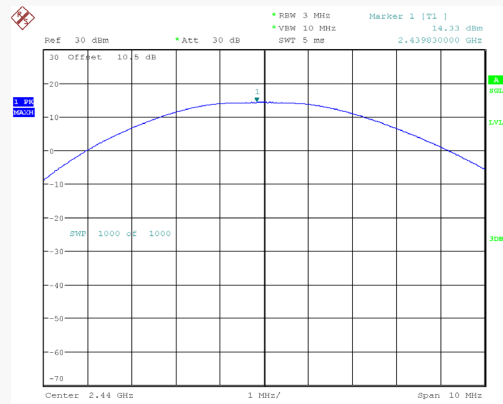

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 09:54:19

High Channel

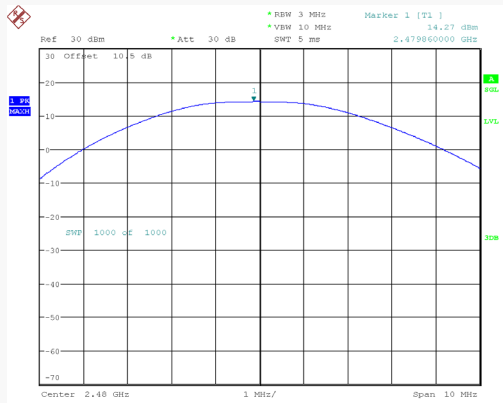

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 09:55:45

100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE**Environmental Conditions & Test Information**


Test Date:	2026-03-06
Temperature:	21.8°C
Relative Humidity:	52 %
ATM Pressure:	101.4 kPa
Test Engineer:	Neil Zhou

*EUT operation mode: Transmitting***Test Result:** Compliant

Mode	Channel	Frequency (MHz)	Result (dB)	Limit (dB)
BLE (1 Mbps)	Low	2402	51.16	20
	High	2476	46.02	
		2478	45.25	
		2480	52.89	
BLE (2 Mbps)	Low	2402	31.30	20
	High	2480	52.87	


BLE (1 Mbps)

Left Side

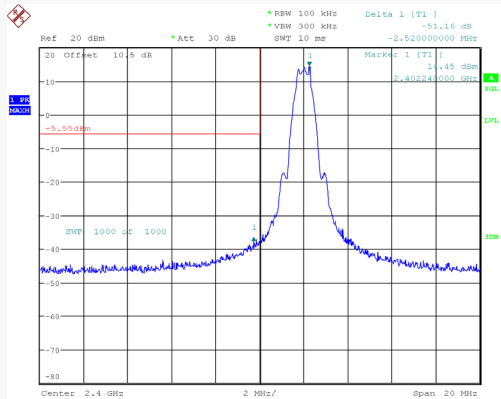


ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 10:11:49

Right Side: 2476MHz

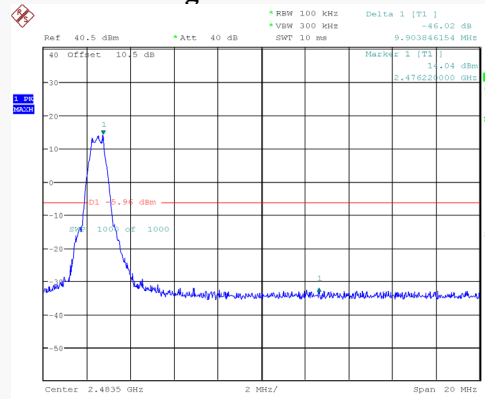


ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 13:37:32

Right Side: 2478MHz

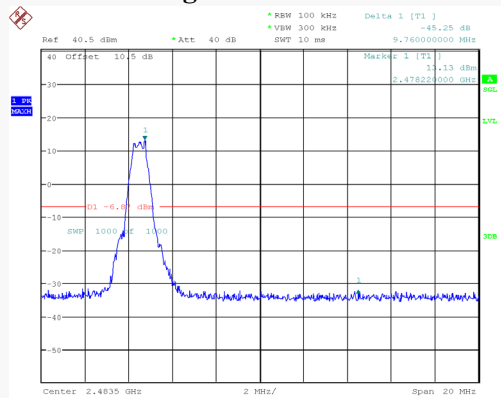

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 13:39:47


Right Side: 2480MHz

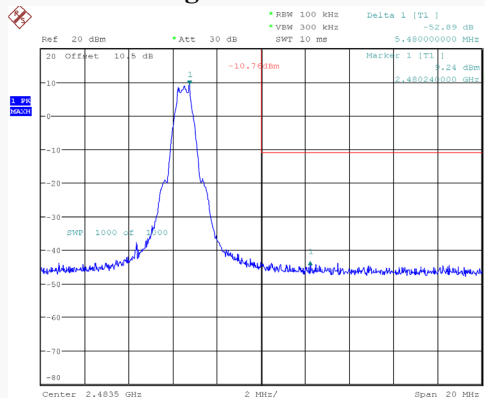

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 11:07:59


BLE (2 Mbps)

Left Side

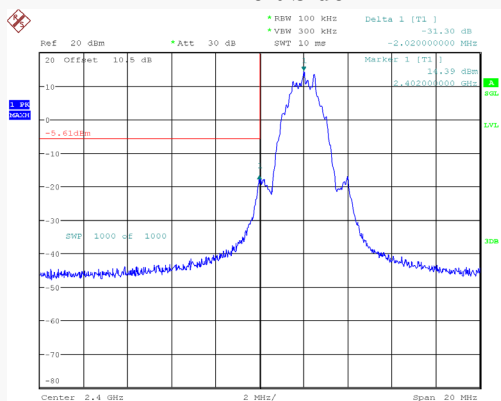

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 10:25:32

Right Side

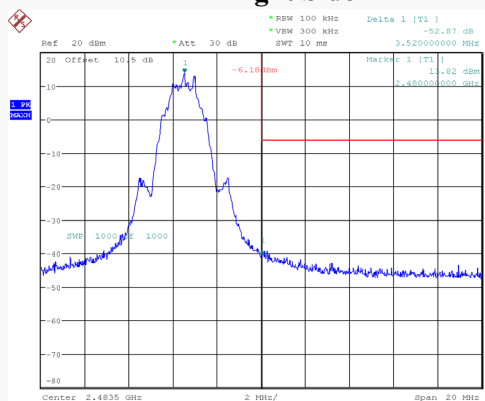

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 10:54:07


CONDUCTED SPURIOUS EMISSION**Environmental Conditions & Test Information**

Test Date:	2026-03-06
Temperature:	21.8°C
Relative Humidity:	52 %
ATM Pressure:	101.4 kPa
Test Engineer:	Neil Zhou

Mode	Channel	Frequency (MHz)	Result (dB)	Limit (dB)
BLE (1 Mbps)	Low	2402	54.21	20
	Middle	2440	53.11	20
	High	2480	48.75	20
BLE (2 Mbps)	Low	2402	53.61	20
	Middle	2440	53.51	20
	High	2480	50.98	20


BLE (1 Mbps)

Low Channel

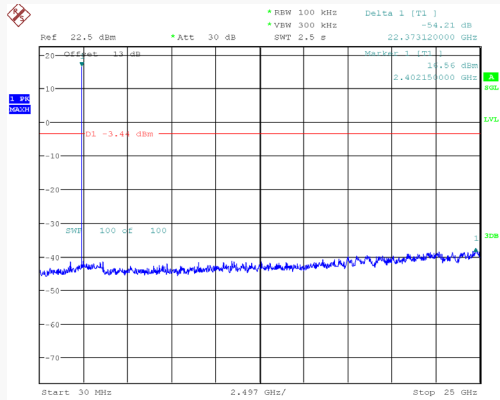

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 10:16:52


Middle Channel

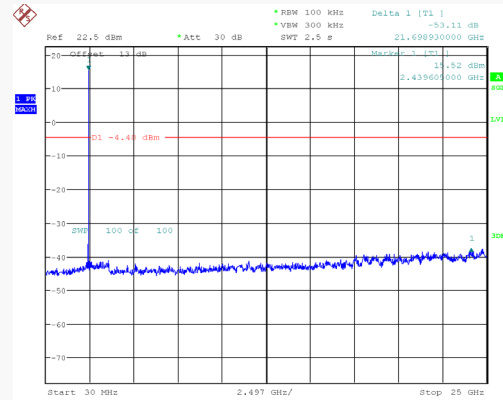

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 10:23:05


BLE (2 Mbps)

High Channel

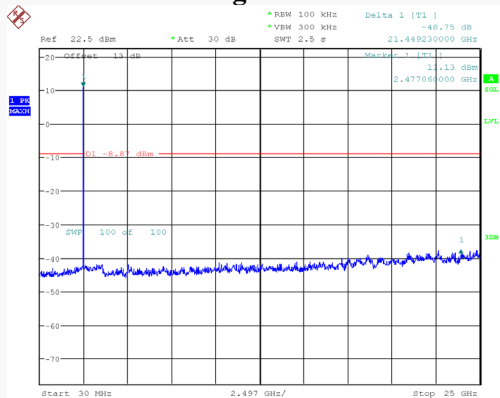


ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 11:13:04

Low Channel

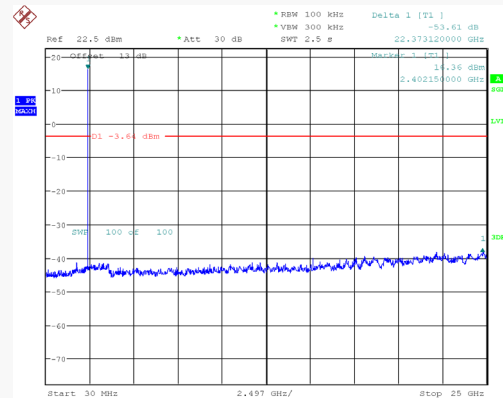


ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 10:30:47

Middle Channel

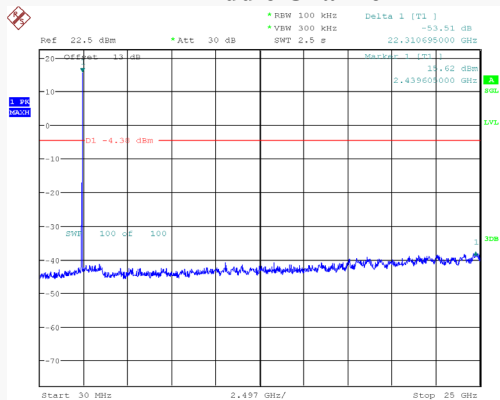

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 10:39:45

High Channel

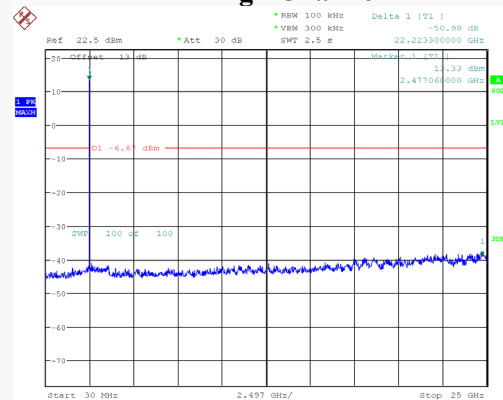

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 10:59:21

POWER SPECTRAL DENSITY**Environmental Conditions & Test Information**

Test Date:	2026-03-06
Temperature:	21.8℃
Relative Humidity:	52 %
ATM Pressure:	101.4 kPa
Test Engineer:	Neil Zhou


Test Result: Compliant.

EUT operation mode: Transmitting

Mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
BLE (1 Mbps)	Low	2402	-1.49	≤8	Pass
	Middle	2440	-1.76	≤8	Pass
	High	2480	-6.56	≤8	Pass
BLE (2 Mbps)	Low	2402	-2.99	≤8	Pass
	Middle	2440	-3.43	≤8	Pass
	High	2480	-3.63	≤8	Pass


BLE (1 Mbps)

Low Channel

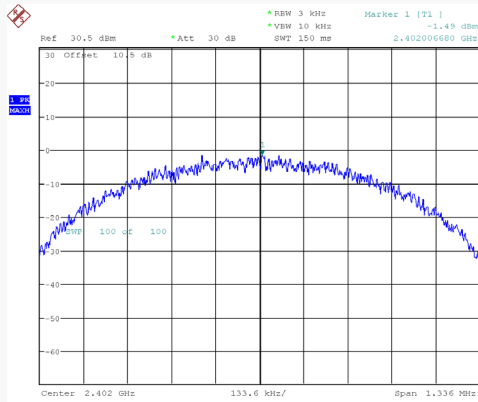

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 10:12:13


Middle Channel

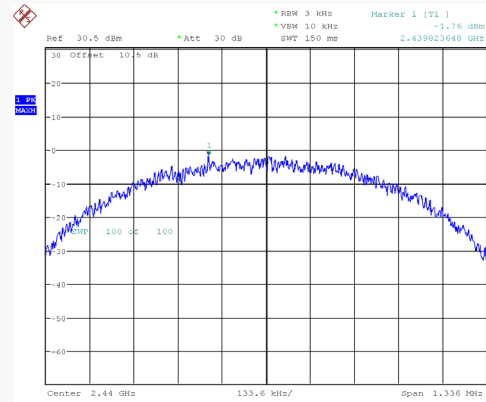

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 10:18:25


BLE (2 Mbps)

High Channel

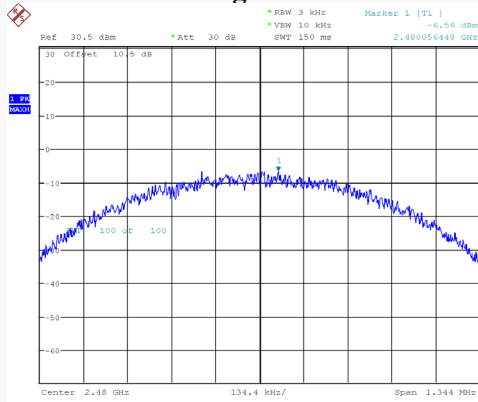


ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 11:08:24

Low Channel

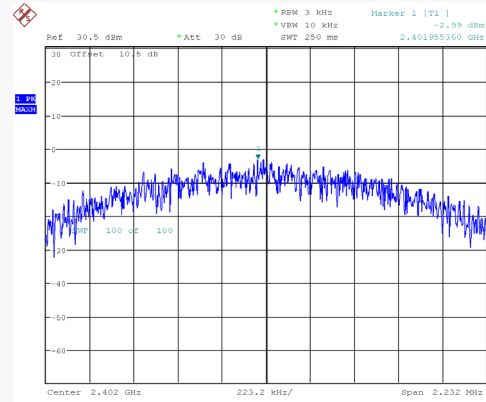


ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 10:26:07

Middle Channel

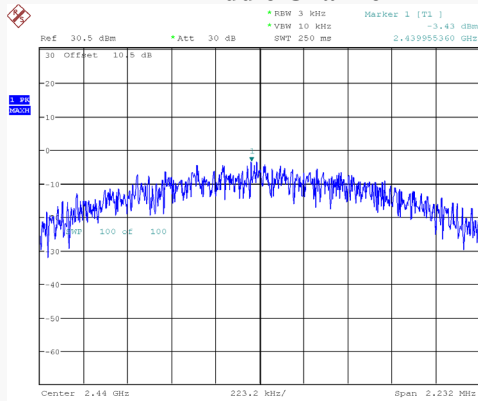

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 10:35:04

High Channel

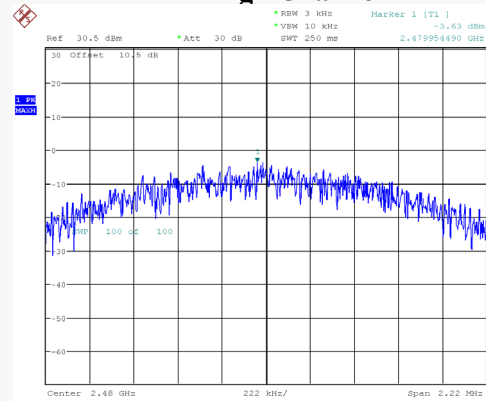

ProjectNo.:RSHA251208003 Tester:Neil Zhou
Date: 6.MAR.2026 10:54:41

EUT PHOTOGRAPHS

Please refer to the attachment EXHIBIT A - EUT EXTERNAL PHOTOGRAPHS and EXHIBIT B - EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment EXHIBIT C - TEST SETUP PHOTOGRAPHS.

Declarations

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★” .
2. The test data was only valid for the test sample(s).
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95.45% confidence interval.

******* END OF REPORT *******