

SPECIFICATION FOR APPROVAL

CUSTOMER:	CYSPO TECHNOLOGY (SHENZHEN) Co., Ltd.
CUST P/N:	FS.000038
FINE P/N:	01.01.02.02.0023
DESC:	Pot core (soft magnetic material) (24.5mm*8.0mm*2.3mm)
DATE:	2025.12.08
Version:	A.0

PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVE
上官禄游	上官禄游	安帅印	

Shen zhen SAN SHENG CHUANG Electronic Technology Co.,Ltd

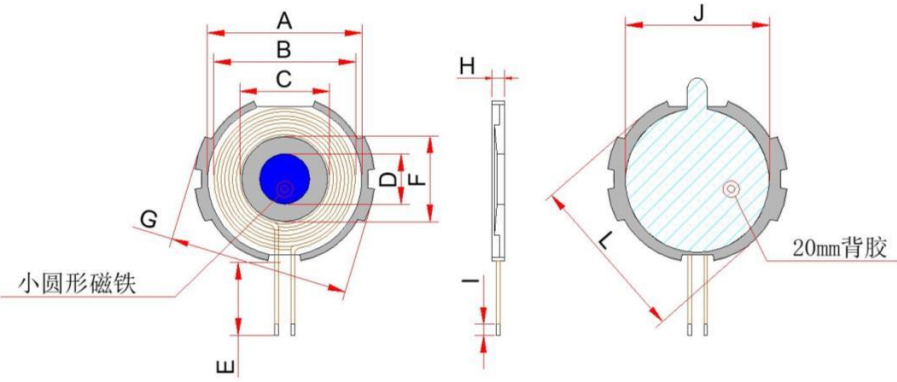
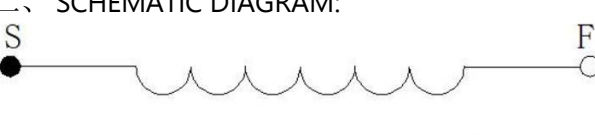
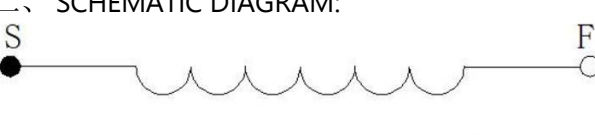
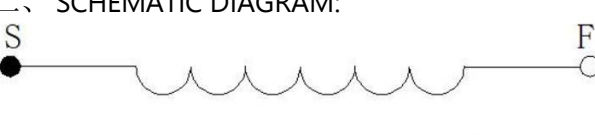
Factory Address: 2/F, No. 105, Zhenyu 2nd Road, Guangming District, Shenzhen, China

Tel: 86+13076959310
E-mail: 1297773854@qq.com

VersionChangeHistory

[illegible]

SPECIFICATION

D E S C:	Φ 14.2mm*20mm-8.1uH- 0.08*24P*14TS-15mm	Rev: A.0	CUST:	CYSPO TECHNOLOGY (SHENZHEN) Co., Ltd.																																																																																															
			CUST P/N:	FS.000038																																																																																															
一、尺寸 DIMENSION:(mm)  <tr><td>A</td><td>21±0.5</td></tr> <tr><td>B</td><td>20±1.0</td></tr> <tr><td>C</td><td>14.2±0.5</td></tr> <tr><td>D</td><td>8±0.5</td></tr> <tr><td>E</td><td>15±2.0</td></tr> <tr><td>F</td><td>13.5±2.0</td></tr> <tr><td>G</td><td>24.7±0.5</td></tr> <tr><td>H (Total coil thickness)</td><td>3±0.5</td></tr> <tr><td>I</td><td>3±1.0</td></tr> <tr><td colspan="4" rowspan="4"> 二、SCHEMATIC DIAGRAM:  </td><td colspan="2">Remark; 1.Crosslead-out;</td></tr> <tr><td colspan="2"></td></tr> <tr><td colspan="2"></td></tr> <tr><td colspan="2"></td></tr> <tr><td colspan="6"> 三、Winding Specification: <table><tr><th>NO.</th><th colspan="2">TERMINAL</th><th>WIRE</th><th>Turns</th><th>Winding Direction</th></tr><tr><td>1</td><td>S</td><td>F</td><td>Hot air drying line0.08*24P</td><td>14Ts</td><td>CCW</td></tr></table></td></tr> <tr><td colspan="6"> 四、ELECTRICAL CHARACTERISTICS: TEMPERATURE:25±10°C, RELATIVE HUMIDITY:65±20% <table><tr><th>NO.</th><th>ITEM</th><th>TERMINAL</th><th>SPECIFICATION</th><th>TEST FREQUENCY</th><th>TEST EQUIPMENTS</th></tr><tr><td>1</td><td>IND.</td><td>S-F</td><td>8.1uH ±10%Magnetic sheet</td><td>100KHz/0.25V</td><td>TM U2832</td></tr><tr><td>2</td><td>DCR</td><td>S-F</td><td>≤128 mΩ</td><td>100KHz/0.25V</td><td>TM U2832</td></tr><tr><td>3</td><td>Q</td><td>S-F</td><td>≥15</td><td>100KHz/0.25V</td><td>TM U2832</td></tr><tr><td colspan="6"></td></tr></table></td></tr> <tr><td colspan="3">PREPARED BY/DATE</td><td colspan="3">CHECKED BY/DATE</td></tr> <tr><td colspan="3">上官禄游 2025.12.08</td><td colspan="3">上官禄游 2025.12.08</td></tr>				A	21±0.5	B	20±1.0	C	14.2±0.5	D	8±0.5	E	15±2.0	F	13.5±2.0	G	24.7±0.5	H (Total coil thickness)	3±0.5	I	3±1.0	二、SCHEMATIC DIAGRAM: 				Remark; 1.Crosslead-out;								三、Winding Specification: <table><tr><th>NO.</th><th colspan="2">TERMINAL</th><th>WIRE</th><th>Turns</th><th>Winding Direction</th></tr><tr><td>1</td><td>S</td><td>F</td><td>Hot air drying line0.08*24P</td><td>14Ts</td><td>CCW</td></tr></table>						NO.	TERMINAL		WIRE	Turns	Winding Direction	1	S	F	Hot air drying line0.08*24P	14Ts	CCW	四、ELECTRICAL CHARACTERISTICS: TEMPERATURE:25±10°C, RELATIVE HUMIDITY:65±20% <table><tr><th>NO.</th><th>ITEM</th><th>TERMINAL</th><th>SPECIFICATION</th><th>TEST FREQUENCY</th><th>TEST EQUIPMENTS</th></tr><tr><td>1</td><td>IND.</td><td>S-F</td><td>8.1uH ±10%Magnetic sheet</td><td>100KHz/0.25V</td><td>TM U2832</td></tr><tr><td>2</td><td>DCR</td><td>S-F</td><td>≤128 mΩ</td><td>100KHz/0.25V</td><td>TM U2832</td></tr><tr><td>3</td><td>Q</td><td>S-F</td><td>≥15</td><td>100KHz/0.25V</td><td>TM U2832</td></tr><tr><td colspan="6"></td></tr></table>						NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS	1	IND.	S-F	8.1uH ±10%Magnetic sheet	100KHz/0.25V	TM U2832	2	DCR	S-F	≤128 mΩ	100KHz/0.25V	TM U2832	3	Q	S-F	≥15	100KHz/0.25V	TM U2832							PREPARED BY/DATE			CHECKED BY/DATE			上官禄游 2025.12.08			上官禄游 2025.12.08		
				A	21±0.5																																																																																														
				B	20±1.0																																																																																														
				C	14.2±0.5																																																																																														
				D	8±0.5																																																																																														
				E	15±2.0																																																																																														
				F	13.5±2.0																																																																																														
				G	24.7±0.5																																																																																														
				H (Total coil thickness)	3±0.5																																																																																														
				I	3±1.0																																																																																														
二、SCHEMATIC DIAGRAM: 				Remark; 1.Crosslead-out;																																																																																															
三、Winding Specification: <table><tr><th>NO.</th><th colspan="2">TERMINAL</th><th>WIRE</th><th>Turns</th><th>Winding Direction</th></tr><tr><td>1</td><td>S</td><td>F</td><td>Hot air drying line0.08*24P</td><td>14Ts</td><td>CCW</td></tr></table>						NO.	TERMINAL		WIRE	Turns	Winding Direction	1	S	F	Hot air drying line0.08*24P	14Ts	CCW																																																																																		
NO.	TERMINAL		WIRE	Turns	Winding Direction																																																																																														
1	S	F	Hot air drying line0.08*24P	14Ts	CCW																																																																																														
四、ELECTRICAL CHARACTERISTICS: TEMPERATURE:25±10°C, RELATIVE HUMIDITY:65±20% <table><tr><th>NO.</th><th>ITEM</th><th>TERMINAL</th><th>SPECIFICATION</th><th>TEST FREQUENCY</th><th>TEST EQUIPMENTS</th></tr><tr><td>1</td><td>IND.</td><td>S-F</td><td>8.1uH ±10%Magnetic sheet</td><td>100KHz/0.25V</td><td>TM U2832</td></tr><tr><td>2</td><td>DCR</td><td>S-F</td><td>≤128 mΩ</td><td>100KHz/0.25V</td><td>TM U2832</td></tr><tr><td>3</td><td>Q</td><td>S-F</td><td>≥15</td><td>100KHz/0.25V</td><td>TM U2832</td></tr><tr><td colspan="6"></td></tr></table>						NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS	1	IND.	S-F	8.1uH ±10%Magnetic sheet	100KHz/0.25V	TM U2832	2	DCR	S-F	≤128 mΩ	100KHz/0.25V	TM U2832	3	Q	S-F	≥15	100KHz/0.25V	TM U2832																																																																						
NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS																																																																																														
1	IND.	S-F	8.1uH ±10%Magnetic sheet	100KHz/0.25V	TM U2832																																																																																														
2	DCR	S-F	≤128 mΩ	100KHz/0.25V	TM U2832																																																																																														
3	Q	S-F	≥15	100KHz/0.25V	TM U2832																																																																																														
PREPARED BY/DATE			CHECKED BY/DATE																																																																																																
上官禄游 2025.12.08			上官禄游 2025.12.08																																																																																																

SPECIFICATION

D E S C	Φ 14.2mm*20mm-8.1uH- 0.08*24P*14TS-15mm	Rev: A. 0	CUST:	CYSPO TECHNOLOGY (SHENZHEN) Co., Ltd. FS.000038
			CUSTP/N:	
MaterialList:				
NO	Materialname	Description		
1	Wire	Hot air line 0.08*24		
2	Magnetic sheet	Pot-shaped soft magnetic sheet (24.7mm*8.0mm*2.5mm)		
3	Solder bar	High-temperature lead-free solder bar		
4	Glue	Eco-friendly PVA adhesive		
5	Magnet	Small disc magnet (7.8mm*2.5mm)		
6	Adhesive-backed	20mm (9441A3M Adhesive backing)		

Shen zhen SAN SHENG CHUANG Electronic Technology Co.,Ltd

Factory Address: 2/F, No. 105, Zhenyu 2nd Road,
Guangming District, Shenzhen, China

TEL: 86+13076959310

E-mail: 1297773854@qq.com