



Radio Test Report

Report No.: STS2603084W01

Issued for

Par Breaker LLC

10817 Renner Blvd, Lenexa, KS 66219, United States

Product Name: Swing Pulse

Brand Name: N/A

Model Name: X10

Series Model(s) N/A

FCC ID: 2BUUX-X10

Test Standards: FCC Part 15.245

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT**

Applicant's Name.....: Par Breaker LLC
Address: 10817 Renner Blvd, Lenexa, KS 66219, United States
Manufacture's Name.....: Muniu Technology (Shanghai) Co., Ltd.
Address: Floor 2,Building12,No.14,Lane 258,Yinlong Road, Jiading District,
Shanghai City, 201814,China

Product Description

Product Name: Swing Pulse

Brand Name: N/A

Model Name: X10

Series Model: N/A

Test Standards.....: FCC Part 15.245

Test Procedure: ANSI C63.4-2014
ANSI C63.10-2020

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test

Date of receipt of test item: 11Mar. 2026

Date of performance of tests ..: 11Mar. 2026~14 Apr. 2026

Date of Issue: 14 Apr. 2026

Test Result.....: **Pass**

Testing Engineer :

Rain Liu

(Rain Liu)

Technical Manager :

Skylar Li

(Skylar Li)

Authorized Signatory :

Bovey Yang

(Bovey Yang)





Table of Contents

Page

1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 EUT OPERATION MODE	8
2.3 DESCRIPTION OF TEST MODES	8
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	9
2.6 TEST EQUIPMENT	10
3. EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.2 TEST PROCEDURE	12
3.3 TEST SETUP	12
3.4 EUT OPERATING CONDITIONS	12
3.5 TEST RESULT	13
4. EFIELD STRENGTH OF EMISSIONS	15
4.1 LIMIT	15
4.2 TEST PROCEDURE	16
4.3 TEST SETUP	19
4.4 FIELD STRENGTH CALCULATION	21
4.5 TEST RESULTS	22
5. OCCUPIED BANDWIDTH	65
5.1 LIMIT	65
5.2 TEST PROCEDURE	65
5.3 TEST SETUP	66
5.4 TEST RESULT	66
6. ANTENNA REQUIREMENT	70
6.1 STANDARD REQUIREMENT	70
6.2 EUT ANTENNA	70
7. PHOTOS OF TEST SETUP	71



Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	14 Apr. 2026	STS2603084W01	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part 15.245		
FCC standard	Test Item	Results
15.207	AC Conducted Emission	PASS
15.245(b)	Field strength of emissions (wanted signal)	PASS
2.1049	Occupied Bandwidth	PASS
15.209(a) 15.245(b)(1)(2)(3)	Field Strength of Spurious Radiation	PASS
15.203	Antenna requirement	PASS

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report.

(2) All tests are according to ANSI C63.4 and ANSI C63.10. 2020



1.1 TEST FACILITY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power	$\pm 0.751\text{dB}$
2	Occupied bandwidth	$\pm 3.6\%$
3	All emissions, radiated below 1GHz	$\pm 2.52\text{dB}$
4	All emissions, radiated 1GHz-18GHz	$\pm 3.48\text{dB}$
5	All emissions, radiated >18G	$\pm 4.18\text{dB}$
6	Duty Cycle	$\pm 3.2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name	Swing Pulse
Brand Name	N/A
Model Name	X10
Series Model(s)	N/A
Model Difference	N/A
Operation Frequency	24.080 GHz-24.168GHz
Modulation Type	CW
Antenna Type	Comb antenna array
Antenna Gain(dBi)	11.7dBi
Test Channel	Please refer to the Note 3.
Power Rating	Input: DC 5V 2A
Battery	Model: SL30S Brand: N/A Rated Voltage: 3.6V Charge Limit Voltage: 4.2 V Capacity: 9.5Ah
Hardware version number	N/A
Software version number	N/A

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	X10	Comb antenna array	N/A	11.7	Antenna

3

Channel List	
Channel	Frequency (GHz)
01	24.080
02	24.124
03	24.168

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above listed frequency for testing.

2.2 EUT OPERATION MODE

The EUT has been tested under typical operating condition and The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Test Mode	Description
Mode1	TX mode
Mode2	Charging mode

2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Emission Test

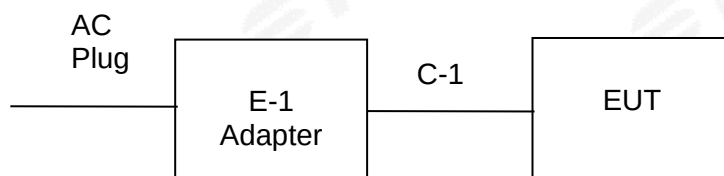

2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
N/A	N/A	N/A	N/A	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-1	Adapter	ZTC	NB-A515A	N/A	N/A
C-1	USB Cable	ZTC	NB-A515A	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.6 TEST EQUIPMENT

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2026.02.04	2027.02.03
Pre-Amplifier (0.1M-3GHz)	EM	EM330	60665	2026.02.04	2027.02.03
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2025.09.25	2026.09.24
Pre-Amplifier (18G-40GHz)	SKET	LNPA_1840-50	SK2018101801	2026.02.04	2027.02.03
Active loop Antenna (9KHz-30MHz)	ZHINAN	ZN30900C	16035	2025.02.25	2027.02.24
Bilog Antenna (30-1000MHz)	TESEQ	CBL6111D	34678	2025.09.27	2027.09.26
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA 9120D	2014	2025.09.27	2027.09.26
HornAntenna (18G-40GHz)	A-INFOMW	LB-180400-KF	J211020657	2025.09.27	2027.09.26
Horn Antenna (40G-60GHz)	A-INFO	LB-19-25-A	2020039000053	2024.12.25	2027.12.24
Horn Antenna (50G-75GHz)	A-INFO	LB-15-25-A	2020028000183	2024.12.25	2027.12.24
Horn Antenna (75G-110GHz)	A-INFO	LB-10-25-A	2020017000101	2024.12.25	2027.12.24
Mixer(40-60GHz)	AT-Microwave	AT-SAX8-4060	N/A	2024.12.25	2027.12.24
Mixer(50-75GHz)	AT-Microwave	AT-SAXB-5075	N/A	2024.12.25	2027.12.24
Mixer(75-110GHz)	AT-Microwave	AT-SAX8-75110	N/A	2024.12.25	2027.12.24
Mixer(40-60GHz)	TLHM	TLHM-4060-04-19	N/A	2024.12.25	2027.12.24
Signal Analyzer	Keysight	N9020A	MY52440124	2026.02.04	2027.02.03
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
signal generator	Keysight	E8257D	MY58040082	2026.02.04	2027.02.03
Signal Analyzer	R&S	FSV 40-N	101823	2025.09.26	2026.09.25
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENG FENG	DPS-305AF	17064939	2025.09.22	2026.09.21
Test SW	EZ-MMW	Ver.STSLAB-MMW1.0			
Conduction Test equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2025.09.25	2026.09.24
Limttr	CYBERTEK	EM5010	N/A	2025.09.25	2026.09.24
LISN	R&S	ENV216	101242	2025.09.25	2026.09.24
LISN	EMCO	3810/2NM	23625	2025.09.25	2026.09.24
Temperature & Humidity	SW-108	SuWei	N/A	2026.02.04	2027.02.03
Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

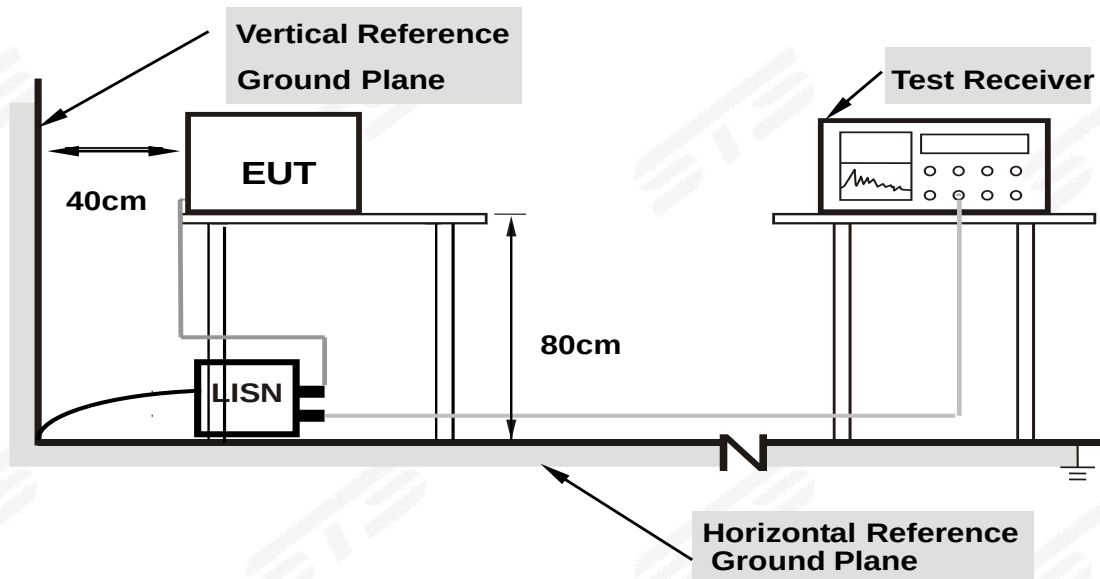

Note: 1. Support units were connected to second LISN.


2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.5 TEST RESULT

Temperature:	25.1 °C	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 2		

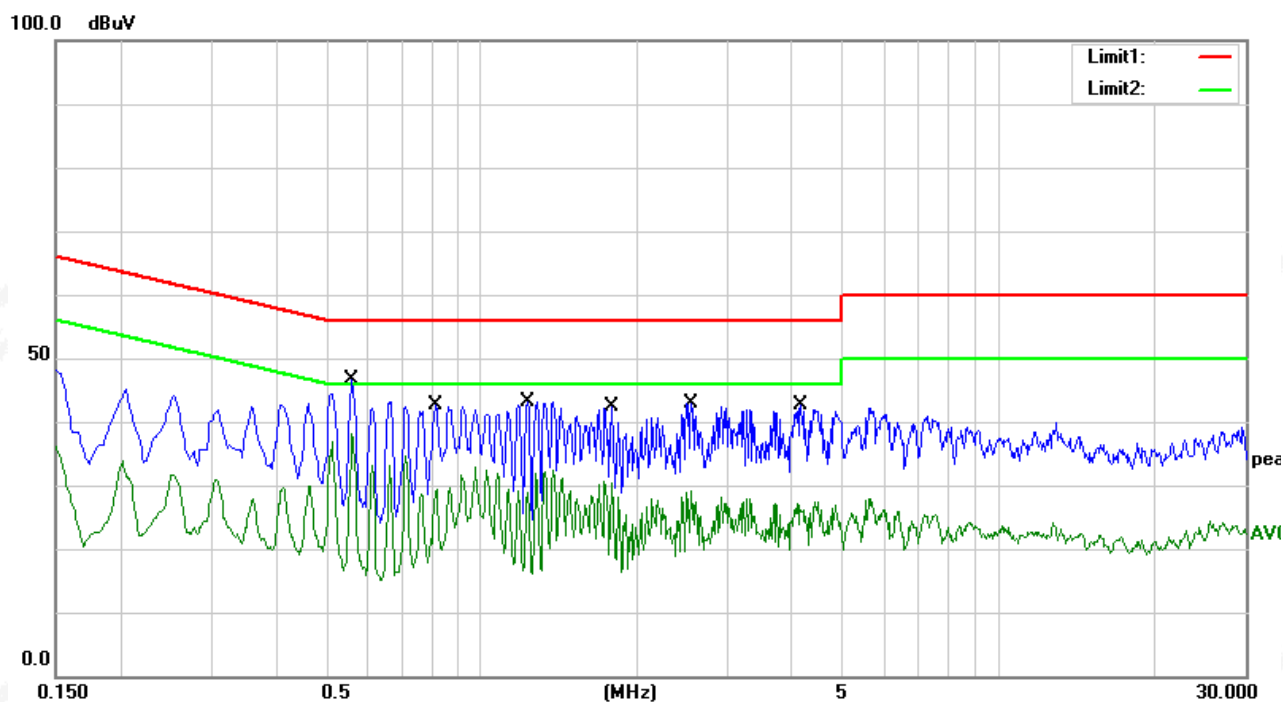


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.3300	24.63	19.37	44.00	59.45	-15.45	QP
2	0.3300	13.84	19.37	33.21	49.45	-16.24	AVG
3	0.4260	25.05	19.39	44.44	57.33	-12.89	QP
4	0.4260	12.20	19.39	31.59	47.33	-15.74	AVG
5	0.5660	24.88	19.39	44.27	56.00	-11.73	QP
6	0.5660	11.44	19.39	30.83	46.00	-15.17	AVG
7	0.7140	23.65	19.37	43.02	56.00	-12.98	QP
8	0.7140	11.33	19.37	30.70	46.00	-15.30	AVG
9	0.9900	23.06	19.35	42.41	56.00	-13.59	QP
10	0.9900	10.29	19.35	29.64	46.00	-16.36	AVG
11	1.2100	23.47	19.35	42.82	56.00	-13.18	QP
12	1.2100	9.95	19.35	29.30	46.00	-16.70	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

Temperature:	25.1 °C	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 2		

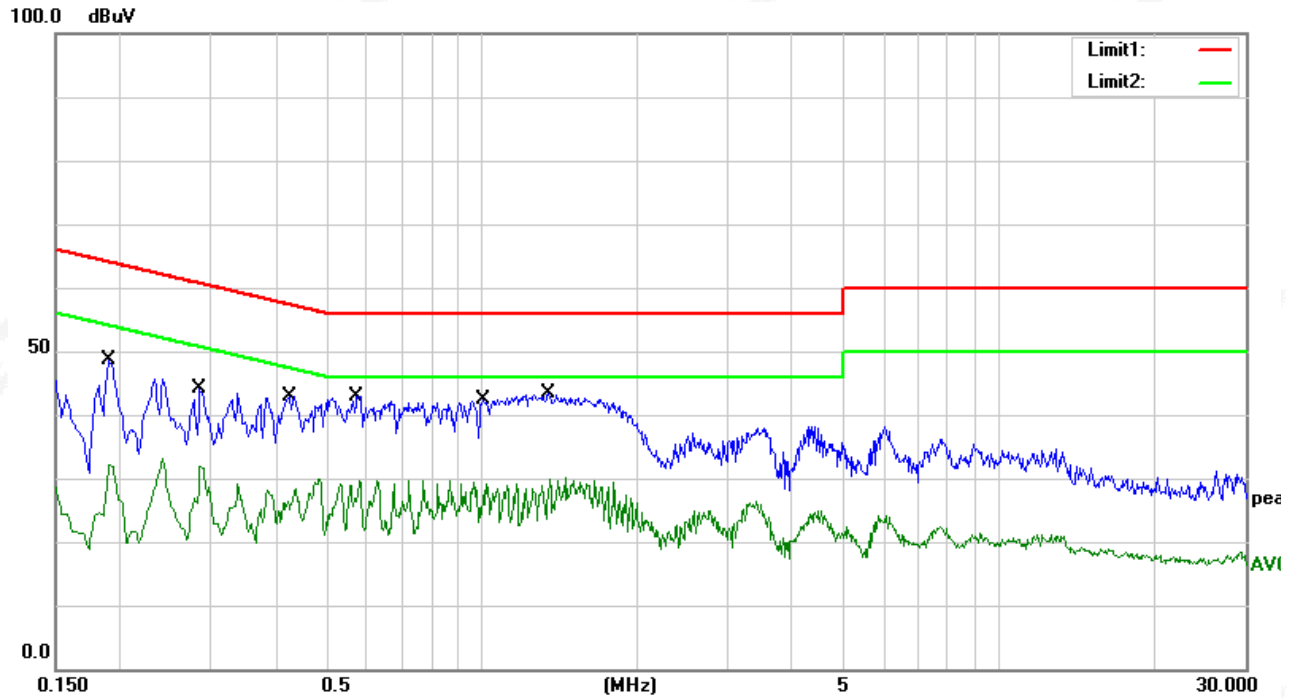

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1900	29.28	19.38	48.66	64.04	-15.38	QP
2	0.1900	13.76	19.38	33.14	54.04	-20.90	AVG
3	0.2860	24.72	19.38	44.10	60.64	-16.54	QP
4	0.2860	12.51	19.38	31.89	50.64	-18.75	AVG
5	0.4260	23.50	19.35	42.85	57.33	-14.48	QP
6	0.4260	10.64	19.35	29.99	47.33	-17.34	AVG
7	0.5740	23.53	19.36	42.89	56.00	-13.11	QP
8	0.5740	10.30	19.36	29.66	46.00	-16.34	AVG
9	1.0060	22.98	19.39	42.37	56.00	-13.63	QP
10	1.0060	10.32	19.39	29.71	46.00	-16.29	AVG
11	1.3500	23.92	19.39	43.31	56.00	-12.69	QP
12	1.3500	10.86	19.39	30.25	46.00	-15.75	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)



4. EFIELD STRENGTH OF EMISSIONS

4.1 LIMIT

(a) According to § 15.245(b) and RSS-210 F.1 (a): The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency (MHz)	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (millivolts/meter)
902-928	500	1.6
2435-2465	500	1.6
5785-5815	500	1.6
10500-10550	2500	25.0
24075-24175	2500	25.0

(b) Regardless of the limits shown in the above table, harmonic emissions in the restricted bands below 17.7GHz, as specified in § 15.205 and RSS-Gen, shall not exceed the field strength limits shown in § 15.209 and RSS-Gen. Harmonic emissions in the restricted bands at and above 17.7 GHz shall not exceed the following field strength limits:

(i) For the second and third harmonics of field disturbance sensors operating in the 24075-24175 MHzband and for other field disturbance sensors designed for use only within a building or to open building doors, 25.0 mV/m.

(ii) For all other field disturbance sensors, 7.5 mV/m.

(iii) Field disturbance sensors designed to be used in motor vehicles or aircraft must include features to prevent continuous operation unless their emissions in the restricted bands, other than the second and third harmonics from devices operating in the 24075-24175 MHz band, fully comply with the limits given in § 15.209 and RSS-Gen. Continuous operation of field disturbance sensors designed to be used in farm equipment, vehicles such as fork lifts that are intended primarily for use indoors or for very specialized operations, or railroad locomotives, railroad cars and other equipment which travels on fixed tracks is permitted. A field disturbance sensor will be considered not to be operating in a continuous mode if its operation is limited to specific activities of limited duration (e.g., putting a vehicle into reverse gear, activating a turn signal, etc.).

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

(c) Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209 and RSS-Gen, whichever is the lesser attenuation.

(e) The emission limits shown above are based on measurement instrumentation employing an average detector. The provisions in § 15.35 and RSS-Gen for limiting peak emissions apply.

4.2 TEST PROCEDURE

4.2.1 Sequence of testing radiated spurious 9 KHz to 30 MHz

Setup

- a. The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer
- b. If the EUT is a tabletop system, 1 m height is used.
- c. If the EUT is a floor standing device, it is placed directly on the turn table.
- d. Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C63.4.
- e. The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- f. Measurement distance is 3m (see ANSI C63.4) – see test details.
- g. EUT is set into operation.

Premeasurement

- a. The turntable rotates from 0 degree to 360 degree.
- b. The antenna height is 1.5m.
- c. Set RBW = 200 Hz / VBW = 1 KHz, sweep time: Auto
- d. At each turntable position the analyzer sweeps with position-peak detector to find the maximum of all emissions.

Final measurement

- a. Identified emissions during the premeasurement are maximized by the software by rotating the turntable from 0 degree to 360 degree.
- b. The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- c. Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to The limit and limit will be recorded. A plot with the graph of the measurement and the limit is stored.

4.2.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- a. The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer
- b. If the EUT is a tabletop system, 0.8 m height is used, which is placed on the ground plane.
- c. If the EUT is a floor standing device, it is placed directly on the ground plane.
- d. Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C63.4.
- e. The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- f. Measurement distance is 3m (see ANSI C63.4) – see test details.
- g. EUT is set into operation.

Premeasurement

- a. The turntable rotates from 0 degree to 360 degree.
- b. The antenna is polarized vertical and horizontal.
- c. The antenna height changes from 1m to 4m.

- d. Set RBW = 120 KHz / VBW = 1 MHz, sweep time: Auto
- e. At each turntable position the analyzer sweeps with position-peak detector to find the maximum of all emissions.

Final measurement

The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.

Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by changing turntable and antenna height between 1 and 4 m.

The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).

Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the measurement and the limit is stored.

4.2.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

- a. The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer
- b. If the EUT is a tabletop system, 1.5 m height is used.
- c. If the EUT is a floor standing device, it is placed directly on the turn table.
- d. Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C63.4.
- e. The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- f. Measurement distance is 3m (see ANSI C63.4) – see test details.
- g. EUT is set into operation.

Premeasurement

- a. The turntable rotates from 0 degree to 360 degree.
- b. The antenna is polarized vertical and horizontal.
- c. The antenna height changes from 1m to 4m.
- d. Set RBW = 1 MHz / VBW = 3 MHz, sweep time: Auto, detector: Peak for Peak, RBW = 1 MHz / VBW = 3MHz, sweep time: Auto, detector: Average for Average.
- e. At each turntable position the analyzer sweeps with position-peak detector to find the maximum of all emissions.

Final measurement

- a. The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- b. Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by changing turntable and antenna height between 1 and 4 m.
- c. The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- d. The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector (as described in ANSI C 63.4).
- e. Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the measurement and the limit is stored.

4.2.4 Sequence of testing radiated spurious above 18 GHz

Setup

- a. The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer
- b. If the EUT is a tabletop system, 1.5 m height is used.

- c. If the EUT is a floor standing device, it is placed directly on the turn table.
- d. Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C63.4.
- e. The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- f. Measurement distance is 3m (see ANSI C63.4) – see test details.
- g. EUT is set into operation.

Premeasurement

- a. The turntable rotates from 0 degree to 360 degree.
- b. The antenna is polarized vertical and horizontal.
- c. The antenna height changes from 1m to 4m.
- d. Set RBW = 1 MHz / VBW = 3 MHz, sweep time: Auto, detector: Peak for Peak, RBW = 1 MHz / VBW = 3MHz, sweep time: Auto, detector: Average for Average.
- e. At each turntable position the analyzer sweeps with position-peak detector to find the maximum of all emissions.

Final measurement

- a. The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- b. Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by changing turntable and antenna height between 1 and 4 m.
- c. The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- d. The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector (as described in ANSI C 63.4).
- e. Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the measurement and the limit is stored.

4.2.5 Sequence of testing radiated spurious above 40 GHz with external mixers

Setup

- a. The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer
- b. If the EUT is a tabletop system, 1.5 m height is used.
- c. If the EUT is a floor standing device, it is placed directly on the turn table.
- d. Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C63.4.
- e. The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- f. Measurement distance is 3m (see ANSI C63.4) – see test details.
- g. EUT is set into operation.

Premeasurement


- a. The turntable rotates from 0 degree to 360 degree.
- b. The antenna is polarized vertical and horizontal.
- c. The antenna height changes from 1m to 4m.
- d. Set RBW = 1 MHz / VBW = 3 MHz, sweep time: Auto, detector: Peak for Peak, RBW = 1 MHz / VBW = 3MHz, sweep time: Auto, detector: Average for Average.
- e. At each turntable position the analyzer sweeps with position-peak detector to find the maximum of all emissions.

Final measurement


- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by changing turntable and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the measurement and the limit is stored.

4.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency 9 KHz – 30MHz

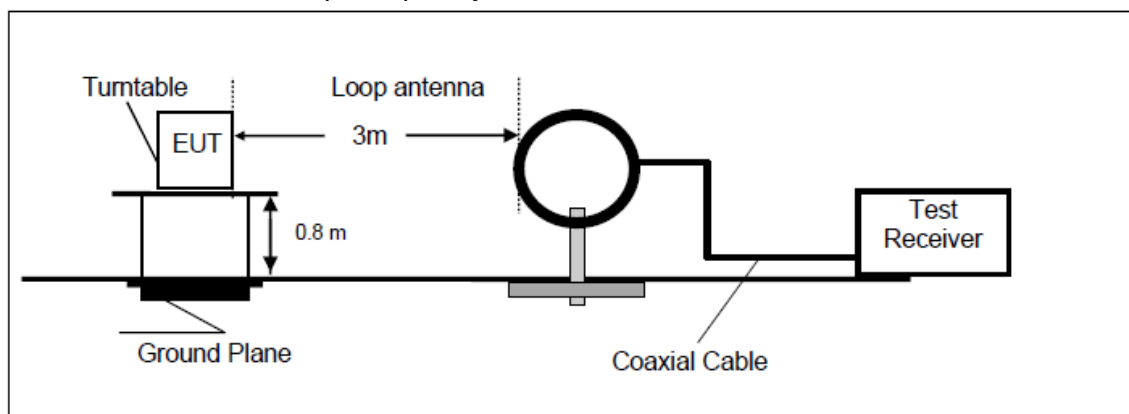


(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

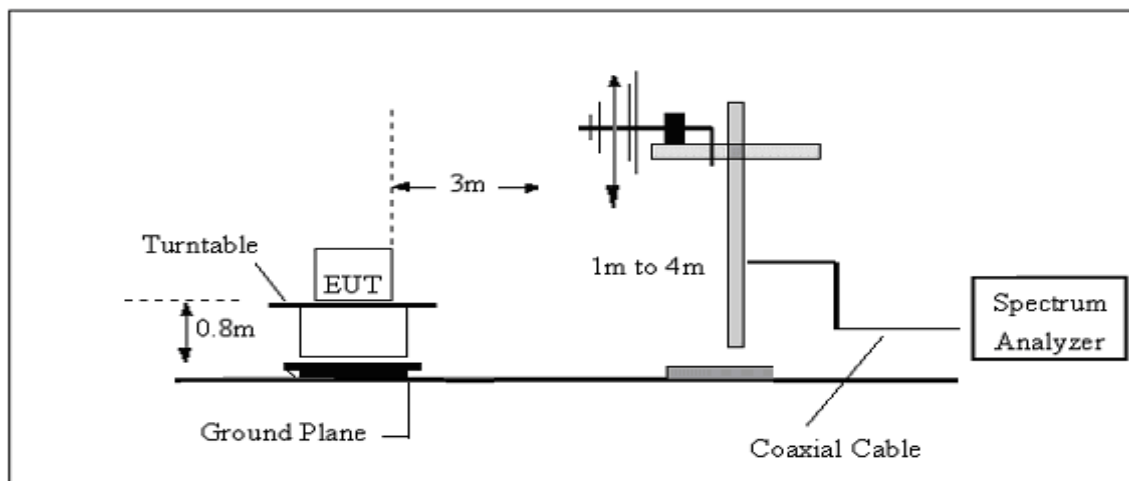

(C) Radiated Emission Test-Up Frequency 1GHz~18GHz

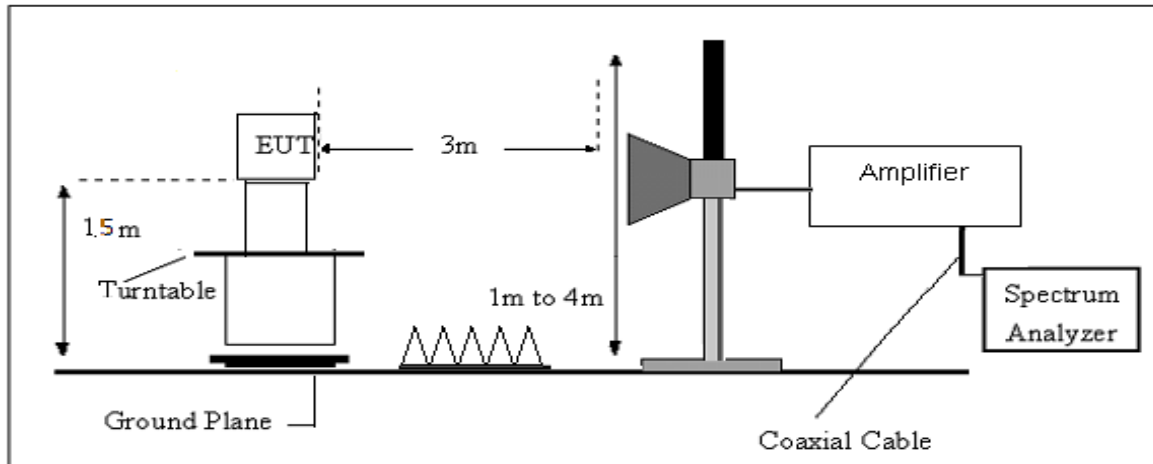

(D) Radiated Emission Test-Up Frequency 18GHz~200GHz

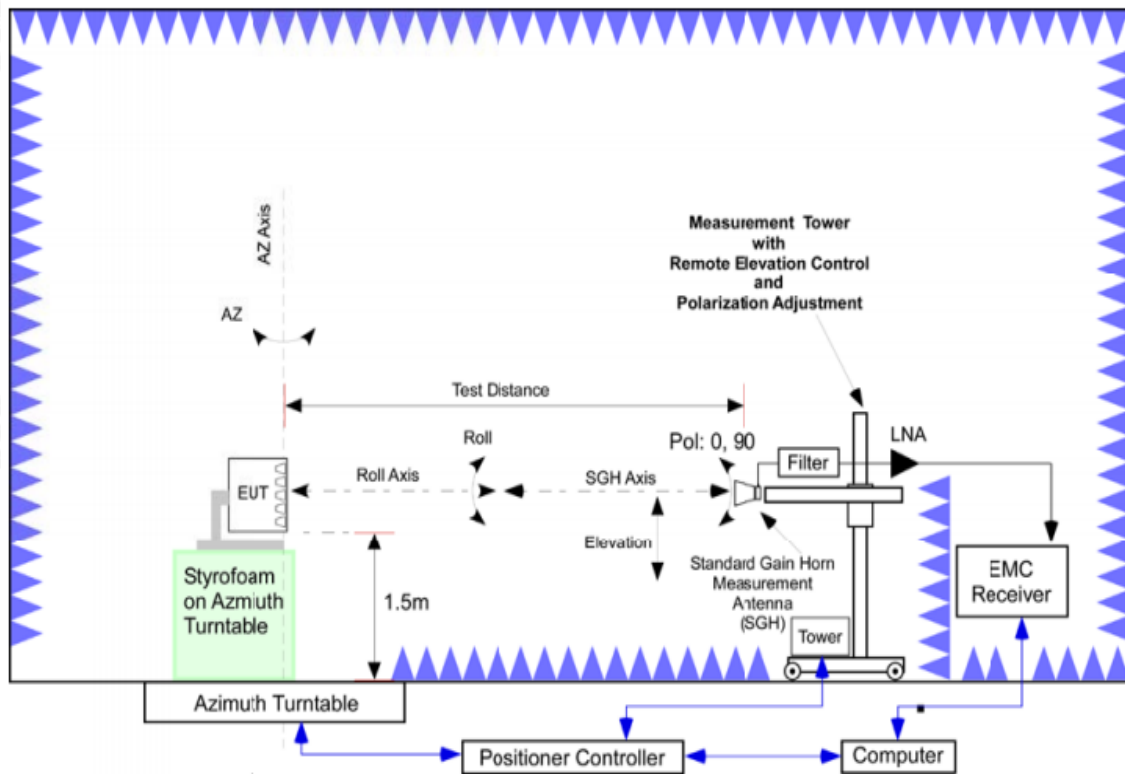



4.4 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor


For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dB μ V/m)	(dB μ V/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = AF + CL - AG$$


4.5 TEST RESULTS

Coxial
RSE-9KHz-150KHz

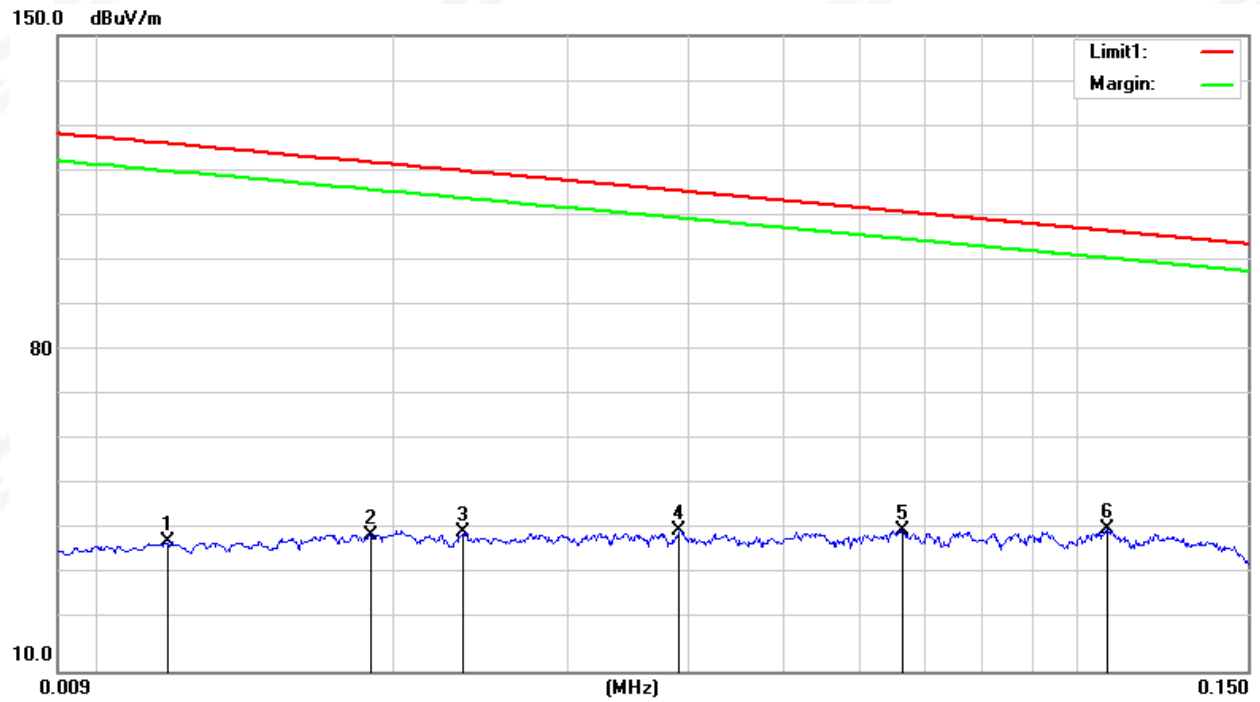


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.0117	18.88	19.50	38.38	126.24	-87.86	peak
2	0.0190	19.98	20.03	40.01	122.03	-82.02	peak
3	0.0235	20.45	20.03	40.48	120.18	-79.70	peak
4	0.0391	21.11	19.72	40.83	115.76	-74.93	peak
5	0.0663	21.89	19.04	40.93	111.17	-70.24	peak
6	0.1076	23.62	17.58	41.20	106.97	-65.77	peak

RSE-150KHz-30MHz

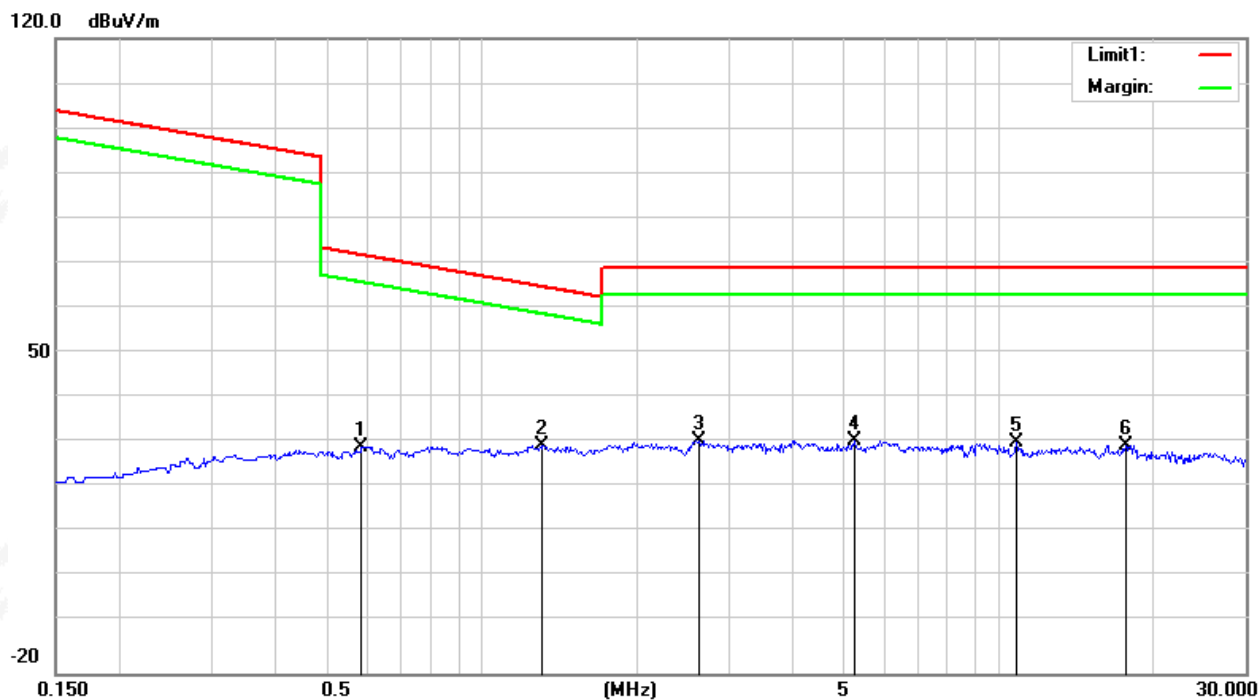


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5854	9.64	20.23	29.87	72.25	-42.38	peak
2	1.3024	9.98	20.26	30.24	65.31	-35.07	peak
3	2.6360	11.00	20.21	31.21	69.50	-38.29	peak
4	5.2541	10.86	20.48	31.34	69.50	-38.16	peak
5	10.8063	10.51	20.38	30.89	69.50	-38.61	peak
6	17.5823	8.34	21.92	30.26	69.50	-39.24	peak

Coplanar
RSE-9KHz-150KHz

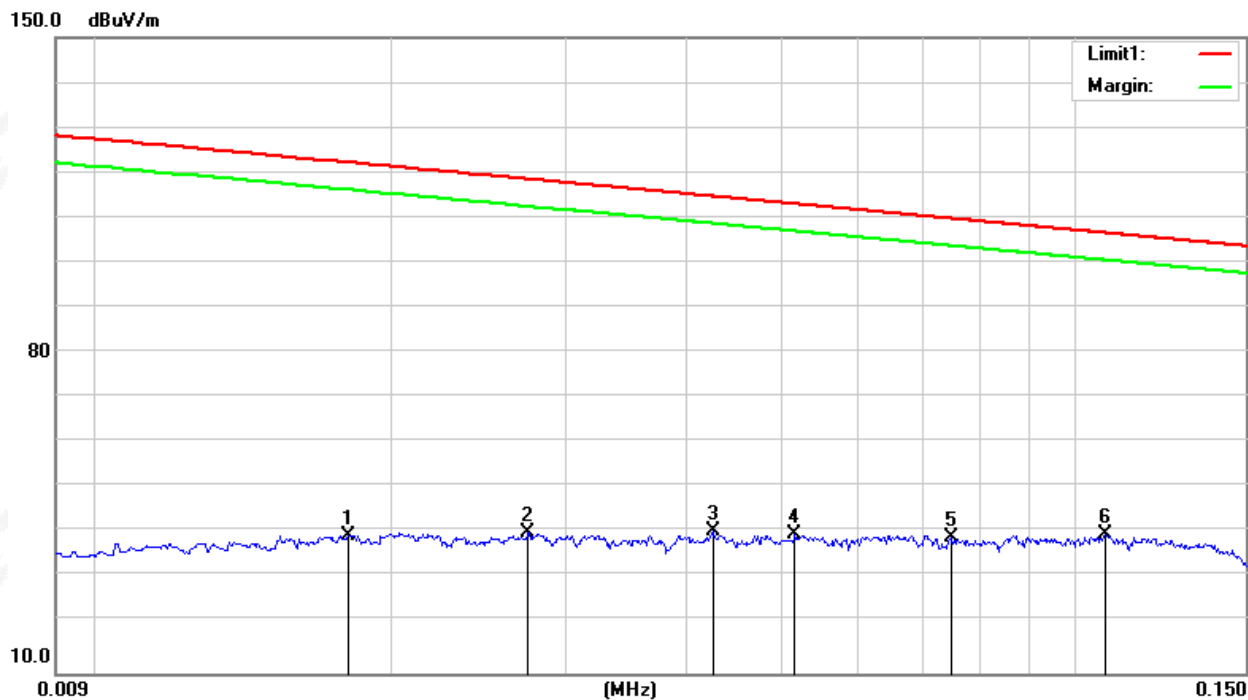

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0180	20.44	19.95	40.39	122.50	-82.11	peak
2	0.0275	20.96	19.95	40.91	118.82	-77.91	peak
3	0.0425	21.51	19.65	41.16	115.04	-73.88	peak
4	0.0516	21.00	19.46	40.46	113.35	-72.89	peak
5	0.0747	21.27	18.81	40.08	110.14	-70.06	peak
6	0.1076	23.12	17.58	40.70	106.97	-66.27	peak


RSE-150KHz-30MHz

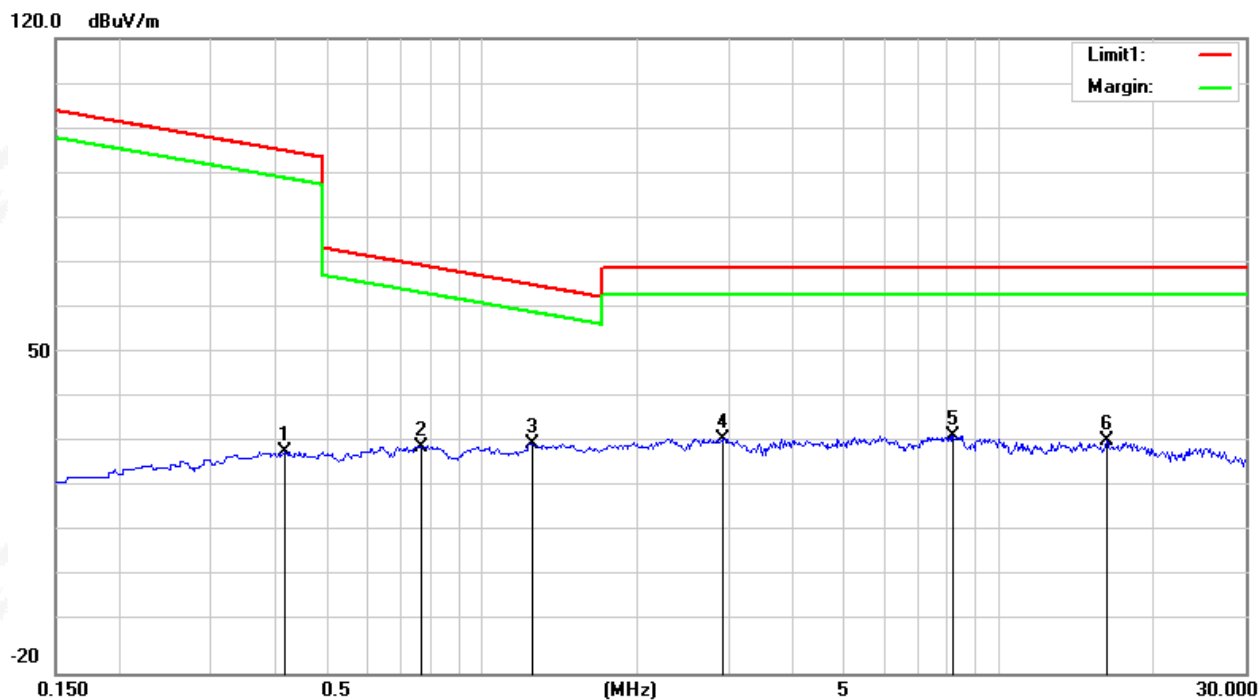

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.4148	8.77	20.17	28.94	95.25	-66.31	peak
2	0.7630	9.74	20.29	30.03	69.95	-39.92	peak
3	1.2540	10.44	20.25	30.69	65.64	-34.95	peak
4	2.9305	11.62	20.12	31.74	69.50	-37.76	peak
5	8.1797	12.03	20.31	32.34	69.50	-37.16	peak
6	16.1794	9.54	21.58	31.12	69.50	-38.38	peak


30MHz – 1000MHz

Horizontal

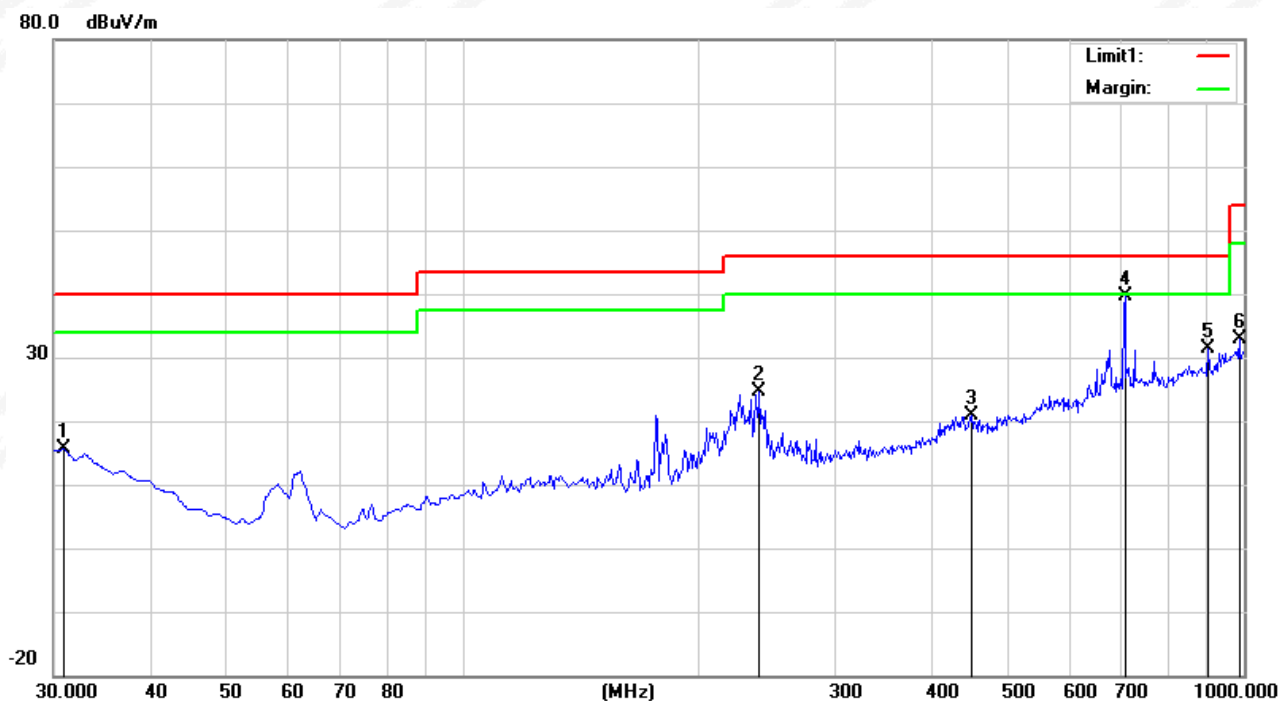

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	28.87	-13.35	15.52	40.00	-24.48	peak
2	240.4900	42.44	-17.93	24.51	46.00	-21.49	peak
3	448.0700	30.66	-9.76	20.90	46.00	-25.10	peak
4	705.1200	43.67	-4.01	39.66	46.00	-6.34	peak
5	901.0600	31.87	-0.43	31.44	46.00	-14.56	peak
6	989.3300	30.86	2.09	32.95	54.00	-21.05	peak

Vertical

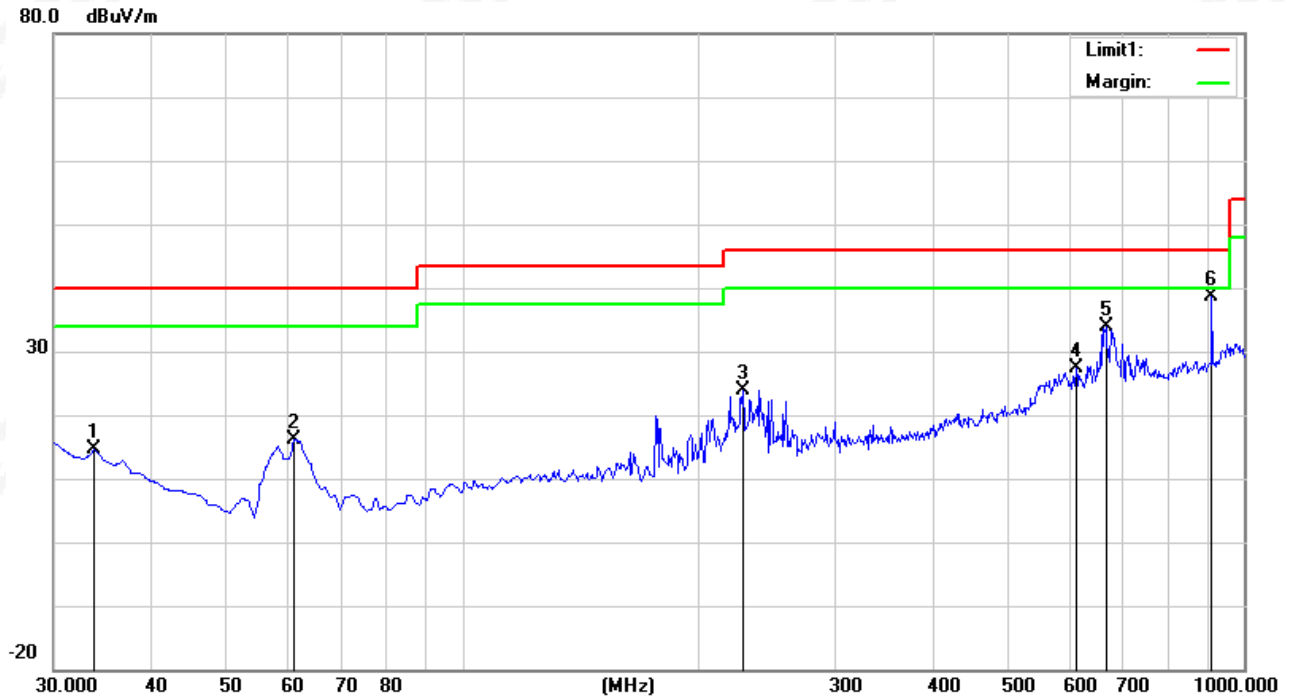


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	33.8800	29.31	-14.80	14.51	40.00	-25.49	peak
2	61.0400	41.96	-25.80	16.16	40.00	-23.84	peak
3	228.8500	43.10	-19.17	23.93	46.00	-22.07	peak
4	611.0300	32.87	-5.50	27.37	46.00	-18.63	peak
5	666.3200	38.65	-4.66	33.99	46.00	-12.01	peak
6	910.7600	38.90	-0.17	38.73	46.00	-7.27	peak



Above 1G Radiation Spurious

Channel 01
1GHz - 18GHz
Horizontal


RE_FCC Test Case_FCC 15C-IC-RSS 1GHz-18GHz -

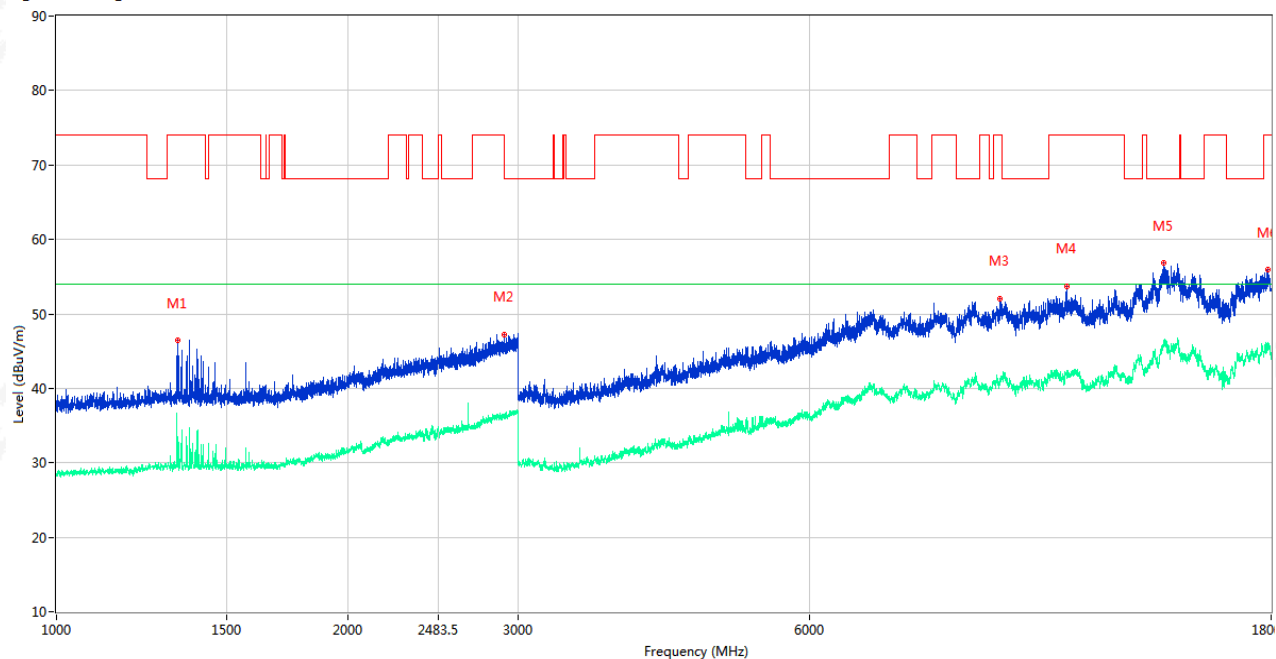

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1336.000	46.50	-1.28	74.0	-27.50	Peak	37.20	Horizontal	Pass
1**	1336.000	33.50	-1.28	54.0	-20.50	AV	37.20	Horizontal	Pass
2	2901.500	47.28	4.91	68.2	-20.92	Peak	17.90	Horizontal	Pass
2**	2901.500	35.96	4.91	54.0	-18.04	AV	17.90	Horizontal	Pass
3	9436.500	52.09	1.16	74.0	-21.91	Peak	357.10	Horizontal	Pass
3**	9436.500	40.93	1.16	54.0	-13.07	AV	357.10	Horizontal	Pass
4	11059.000	53.76	1.95	74.0	-20.24	Peak	134.70	Horizontal	Pass
4**	11059.000	41.76	1.95	54.0	-12.24	AV	134.70	Horizontal	Pass
5	13930.000	56.81	7.58	68.2	-11.39	Peak	243.70	Horizontal	Pass
5**	13930.000	45.83	7.58	54.0	-8.17	AV	243.70	Horizontal	Pass
6	17854.251	55.98	6.85	74.0	-18.02	Peak	68.10	Horizontal	Pass
6**	17854.251	45.36	6.85	54.0	-8.64	AV	68.10	Horizontal	Pass


Vertical

RE_FCC Test Case_FCC 15C-IC-RSS 1GHz-18GHz -

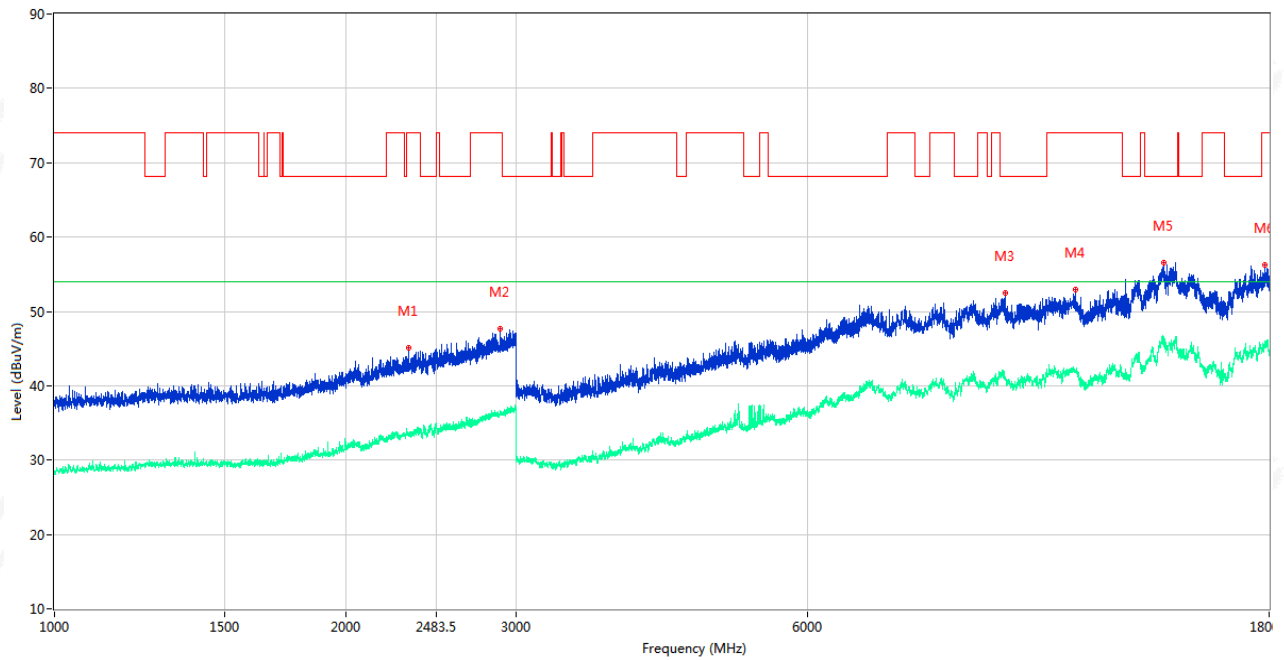


No .	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	2323.500	45.04	2.48	74.0	-28.96	Peak	79.80	Vertical	Pass
1**	2323.500	33.34	2.48	54.0	-20.66	AV	79.80	Vertical	Pass
2	2885.000	47.70	4.93	74.0	-26.30	Peak	145.70	Vertical	Pass
2**	2885.000	36.30	4.93	54.0	-17.70	AV	145.70	Vertical	Pass
3	9598.750	52.51	0.58	68.2	-15.69	Peak	132.30	Vertical	Pass
3**	9598.750	40.79	0.58	54.0	-13.21	AV	132.30	Vertical	Pass
4	11342.250	52.90	2.14	74.0	-21.10	Peak	287.00	Vertical	Pass
4**	11342.250	42.02	2.14	54.0	-11.98	AV	287.00	Vertical	Pass
5	13993.250	56.59	8.37	68.2	-11.61	Peak	0.30	Vertical	Pass
5**	13993.250	46.54	8.37	54.0	-7.46	AV	0.30	Vertical	Pass
6	17807.499	56.27	6.44	74.0	-17.73	Peak	25.10	Vertical	Pass
6**	17807.499	45.42	6.44	54.0	-8.58	AV	25.10	Vertical	Pass

18 GHz - 26GHz
Horizontal

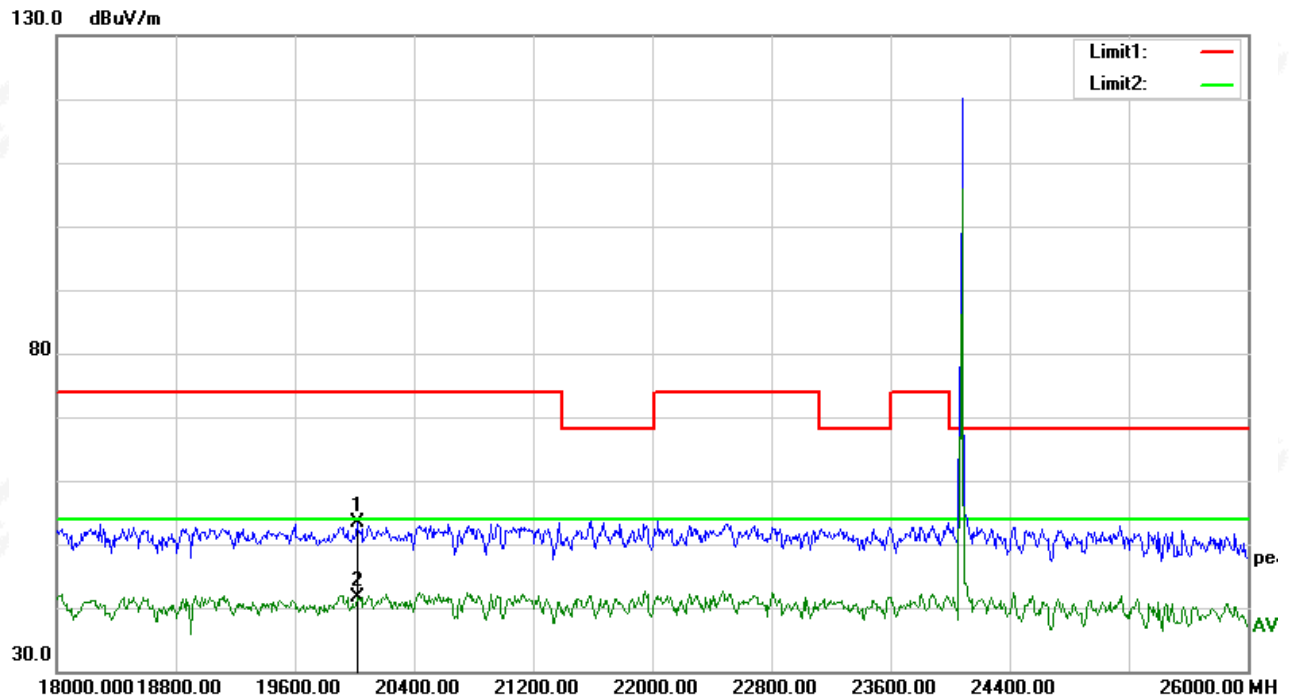


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	20016.000	51.51	1.81	53.32	74.00	-20.68	peak
2	20016.000	39.90	1.81	41.71	54.00	-12.29	AVG

Vertical

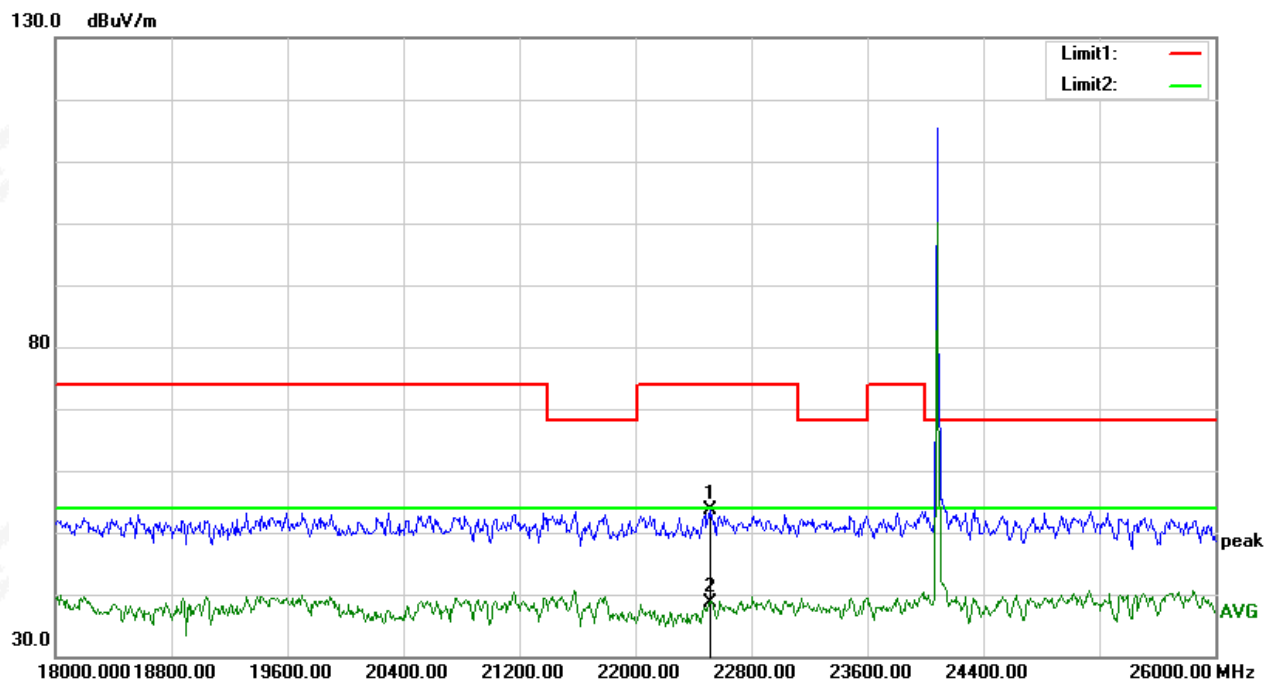


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	22520.000	49.64	3.91	53.55	74.00	-20.45	peak
2	22520.000	34.72	3.91	38.63	54.00	-15.37	AVG

26 GHz - 40GHz
Horizontal

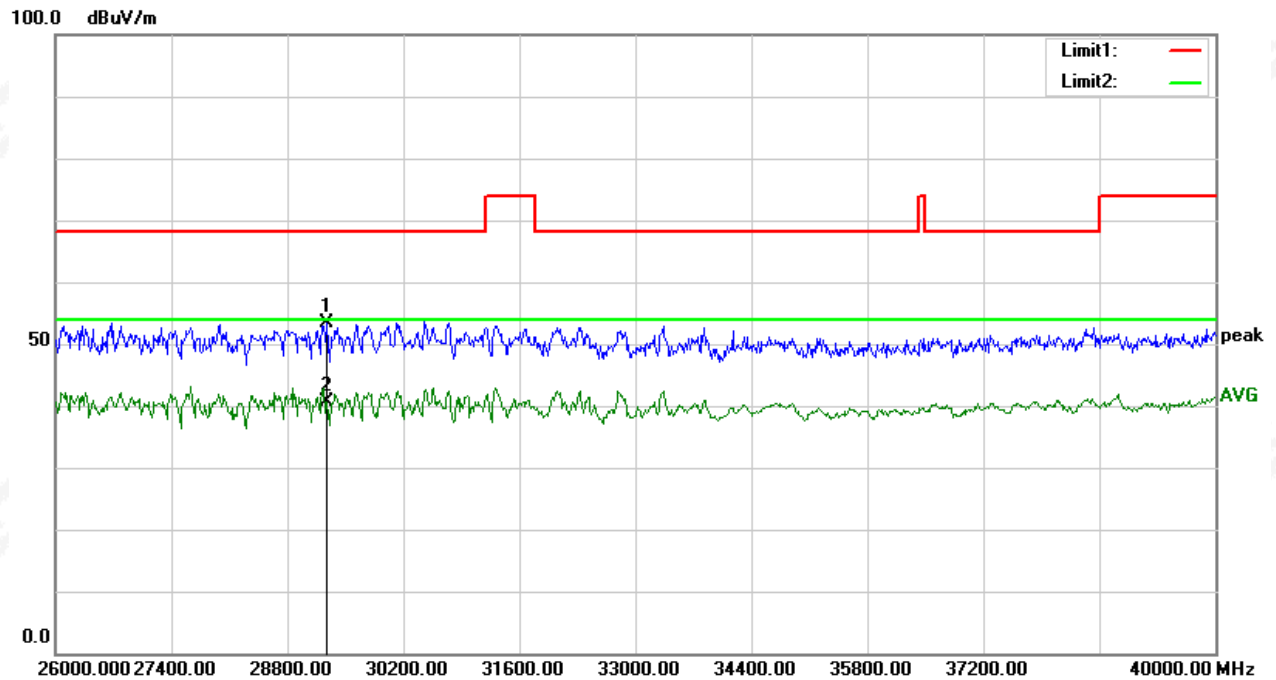

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	29276.000	44.41	9.06	53.47	68.20	-14.73	peak
2	29276.000	31.67	9.06	40.73	54.00	-13.27	AVG

Vertical

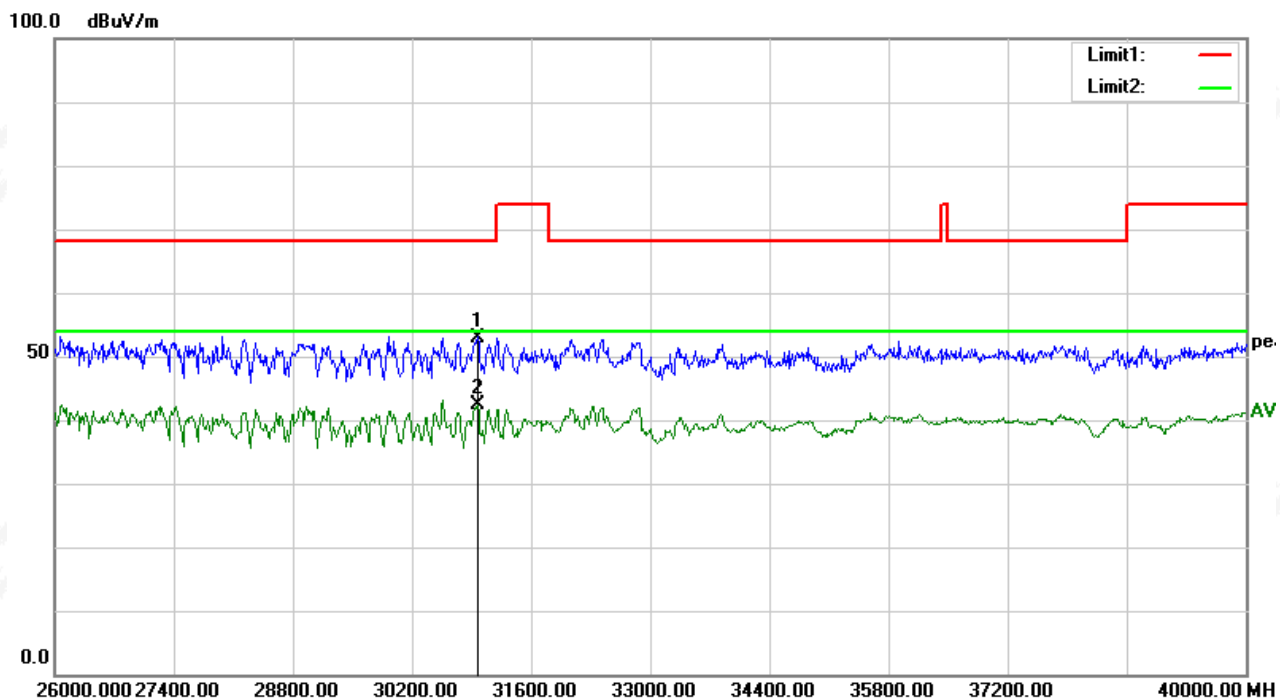


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	30970.000	44.06	8.94	53.00	68.20	-15.20	peak
2	30970.000	33.36	8.94	42.30	54.00	-11.70	AVG




Above 40GHz

Frequency	Result	Limit	Margin	Remark	Pol.
(GHz)	(dBuV/m)	(dBuV/m)	(dB)		
57.9400	50.83	74.00	-23.17	peak	H
57.9400	40.47	54.00	-13.53	AVG	H
58.0420	50.88	74.00	-23.12	peak	V
58.0420	40.81	54.00	-13.19	AVG	V
73.1175	52.82	74.00	-21.18	peak	H
73.1175	42.09	54.00	-11.91	AVG	H
73.0965	52.93	74.00	-21.07	peak	V
73.0965	42.09	54.00	-11.91	AVG	V
76.9075	51.96	74.00	-22.04	peak	H
76.9075	42.02	54.00	-11.98	AVG	H
77.0965	52.48	74.00	-21.52	peak	V
77.0965	42.34	54.00	-11.66	AVG	V

40GHz - 60GHz-H

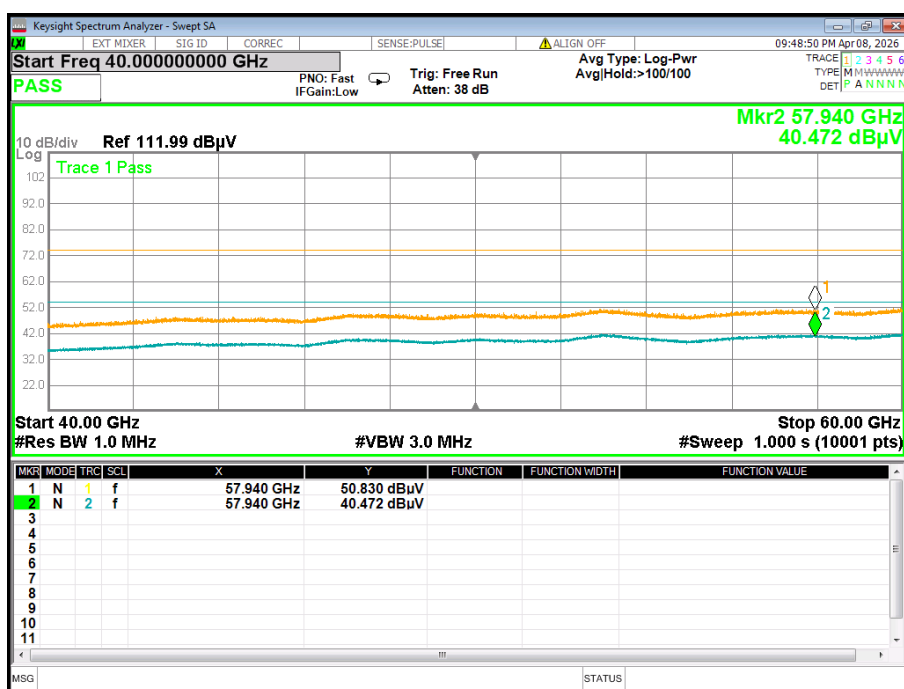


40GHz - 60GHz-V

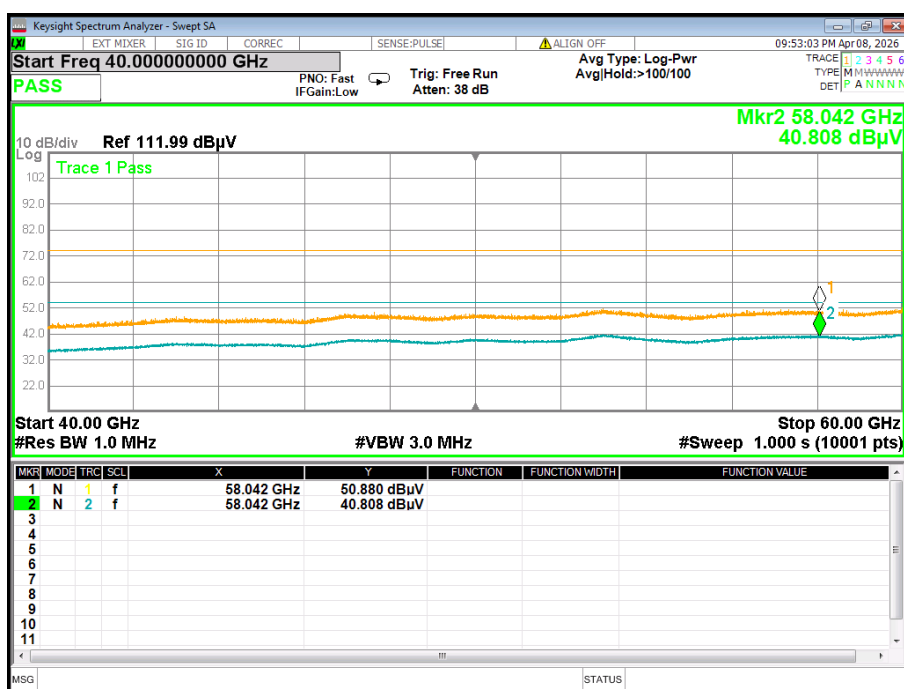



Channel 02
1GHz - 18GHz
Horizontal

RE_FCC Test Case_FCC 15C-IC-RSS 1GHz-18GHz -

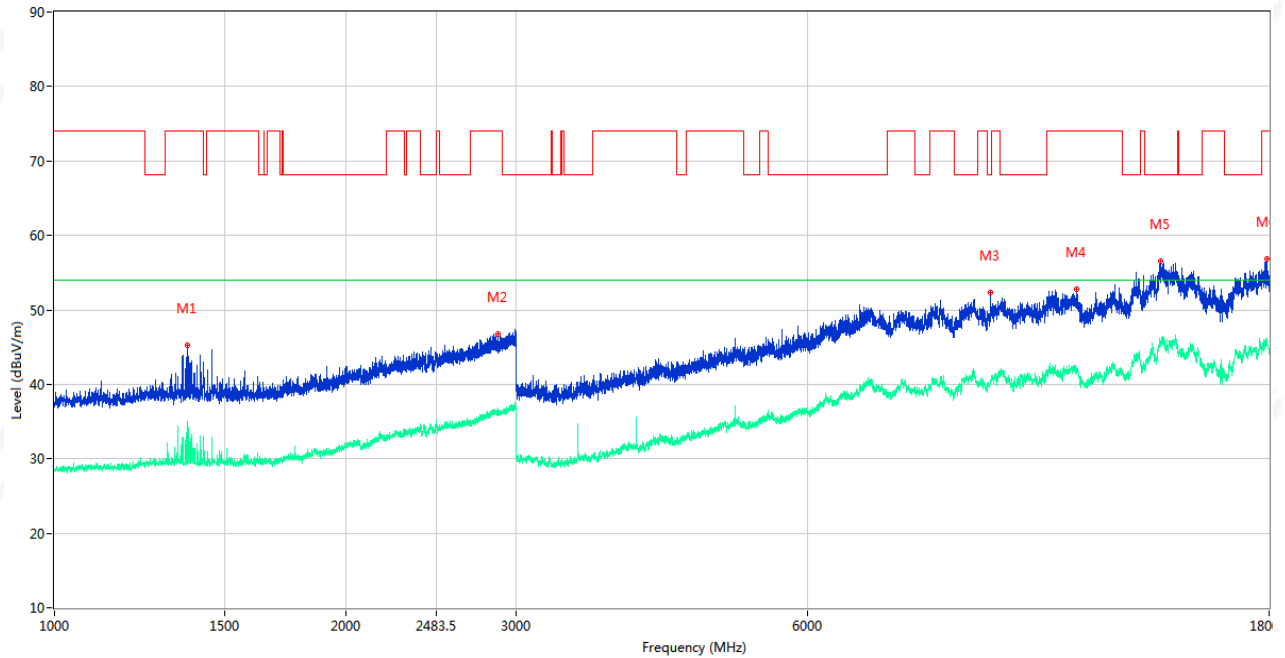


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1372.000	45.22	-1.23	74.0	-28.78	Peak	177.30	Horizontal	Pass
1**	1372.000	34.94	-1.23	54.0	-19.06	AV	177.30	Horizontal	Pass
2	2873.500	46.69	4.95	74.0	-27.31	Peak	185.80	Horizontal	Pass
2**	2873.500	35.97	4.95	54.0	-18.03	AV	185.80	Horizontal	Pass
3	9274.250	52.30	0.63	68.2	-15.90	Peak	0.00	Horizontal	Pass
3**	9274.250	40.34	0.63	54.0	-13.66	AV	0.00	Horizontal	Pass
4	11397.250	52.73	1.96	74.0	-21.27	Peak	84.70	Horizontal	Pass
4**	11397.250	42.20	1.96	54.0	-11.80	AV	84.70	Horizontal	Pass
5	13905.250	56.54	7.27	68.2	-11.66	Peak	208.60	Horizontal	Pass
5**	13905.250	45.72	7.27	54.0	-8.28	AV	208.60	Horizontal	Pass
6	17906.500	56.86	7.19	74.0	-17.14	Peak	1.30	Horizontal	Pass
6**	17906.500	45.70	7.19	54.0	-8.30	AV	1.30	Horizontal	Pass




Vertical

RE_FCC Test Case_FCC 15C-IC-RSS 1GHz-18GHz -

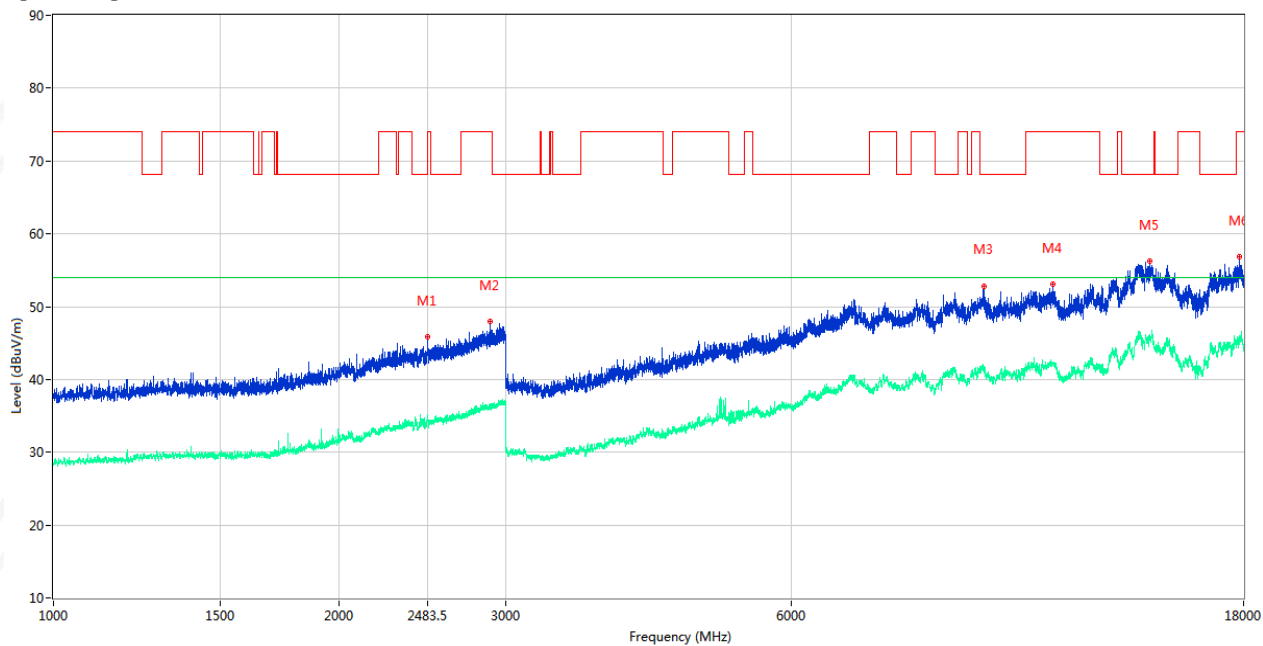


No	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	2481.000	45.84	3.18	68.2	-22.36	Peak	24.90	Vertical	Pass
1**	2481.000	34.65	3.18	54.0	-19.35	AV	24.90	Vertical	Pass
2	2889.500	47.94	4.92	74.0	-26.06	Peak	152.20	Vertical	Pass
2**	2889.500	36.63	4.92	54.0	-17.37	AV	152.20	Vertical	Pass
3	9587.750	52.85	0.69	68.2	-15.35	Peak	178.60	Vertical	Pass
3**	9587.750	41.20	0.69	54.0	-12.80	AV	178.60	Vertical	Pass
4	11320.250	53.09	2.21	74.0	-20.91	Peak	210.60	Vertical	Pass
4**	11320.250	42.04	2.21	54.0	-11.96	AV	210.60	Vertical	Pass
5	14328.750	56.29	6.91	68.2	-11.91	Peak	193.50	Vertical	Pass
5**	14328.750	45.67	6.91	54.0	-8.33	AV	193.50	Vertical	Pass
6	17818.499	56.79	6.54	74.0	-17.21	Peak	341.20	Vertical	Pass
6**	17818.499	45.34	6.54	54.0	-8.66	AV	341.20	Vertical	Pass

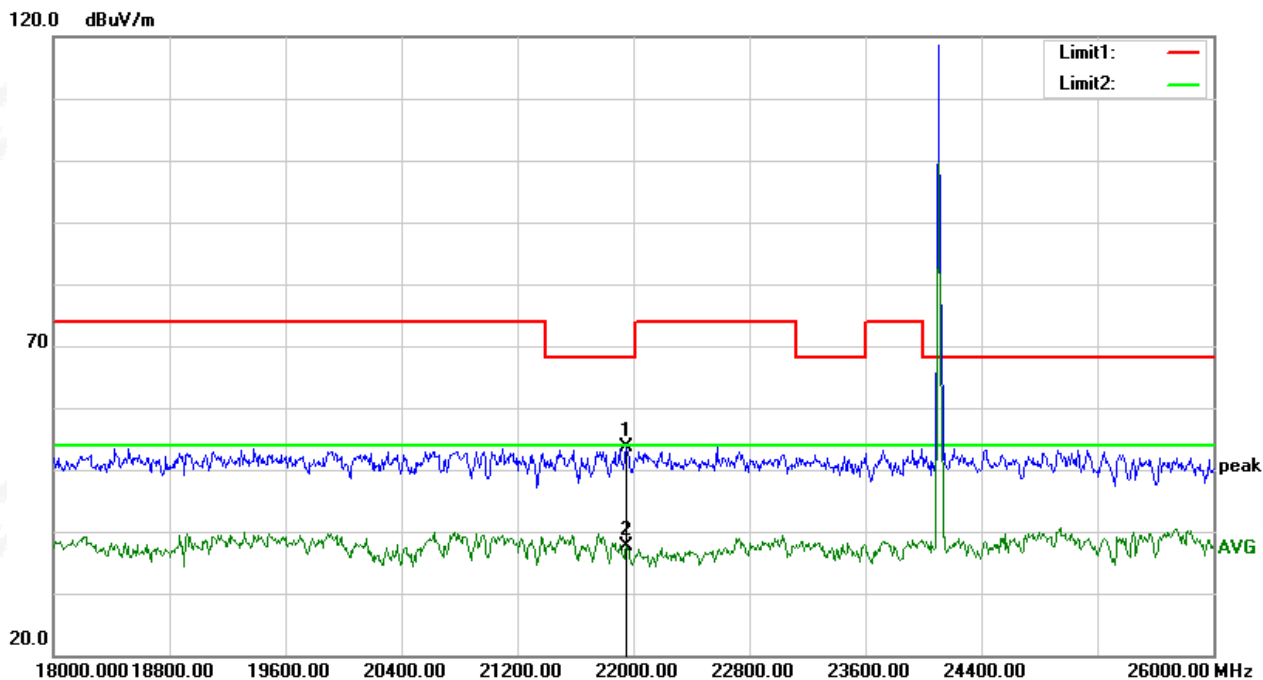18 GHz - 26GHz
Horizontal


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	21952.000	50.23	3.36	53.59	68.20	-14.61	peak
2	21952.000	34.36	3.36	37.72	54.00	-16.28	AVG

Vertical

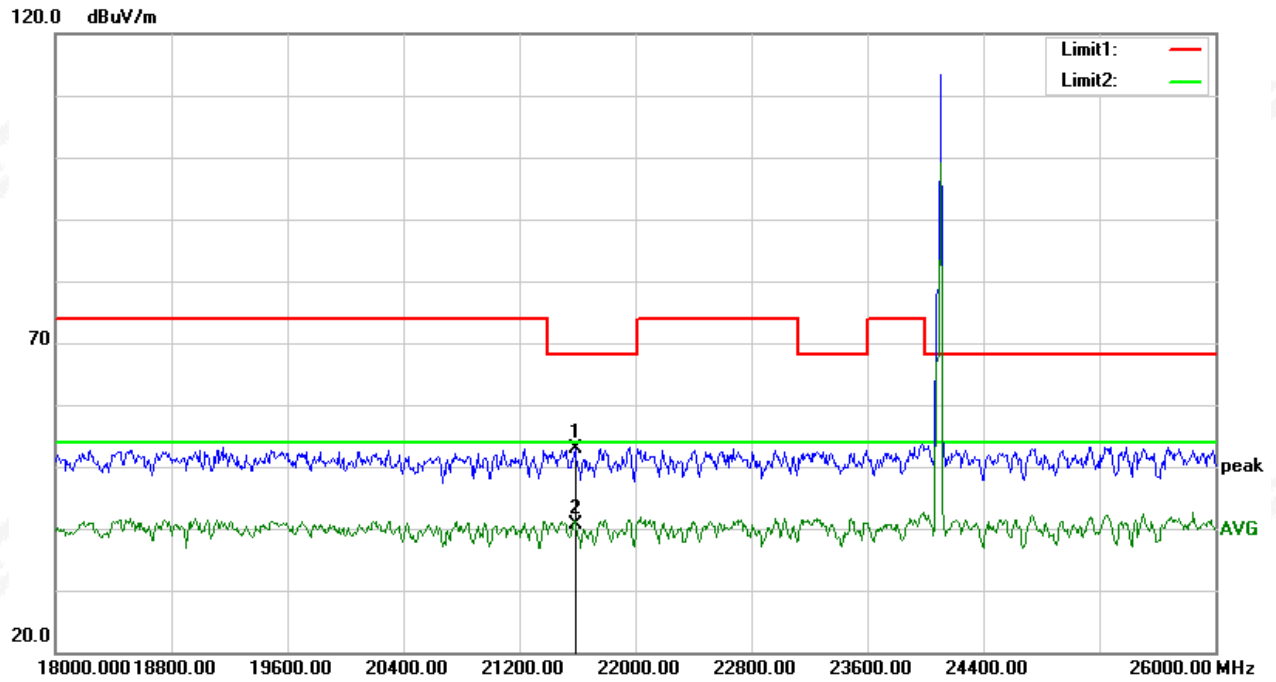


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	21584.000	49.80	3.01	52.81	68.20	-15.39	peak
2	21592.000	37.51	3.03	40.54	54.00	-13.46	AVG

26 GHz - 40GHz
Horizontal

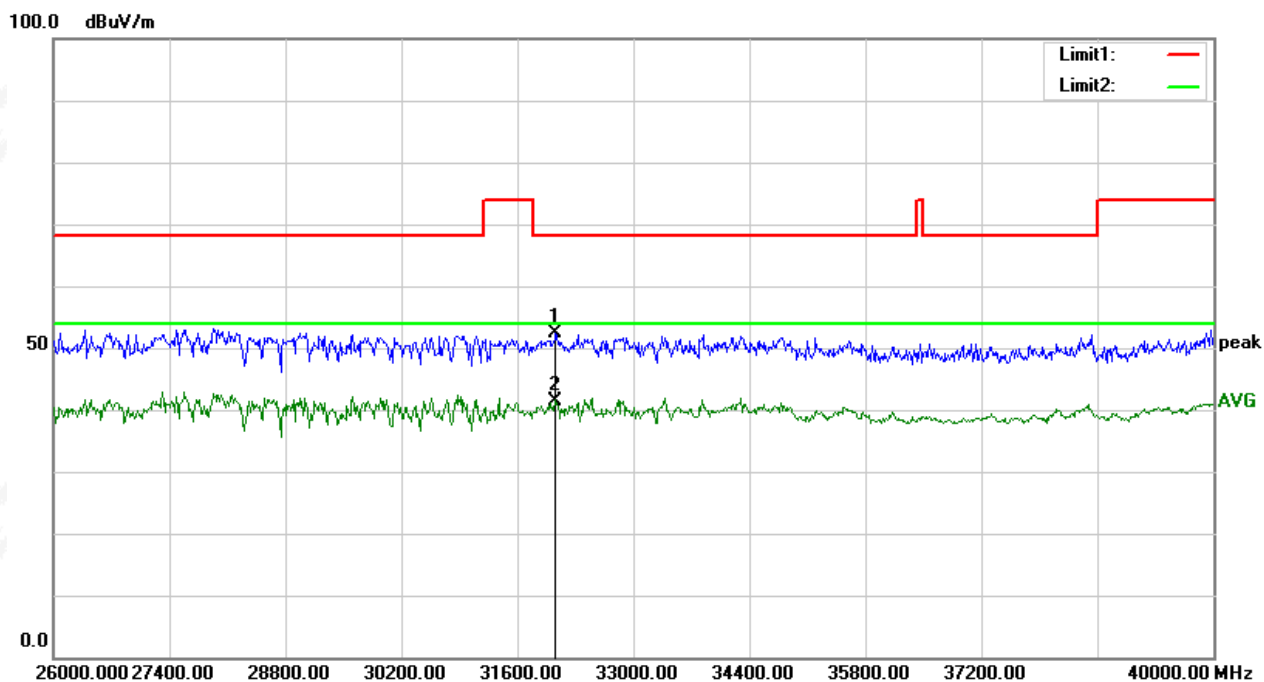

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	32062.000	43.18	9.23	52.41	68.20	-15.79	peak
2	32062.000	32.06	9.23	41.29	54.00	-12.71	AVG

Vertical

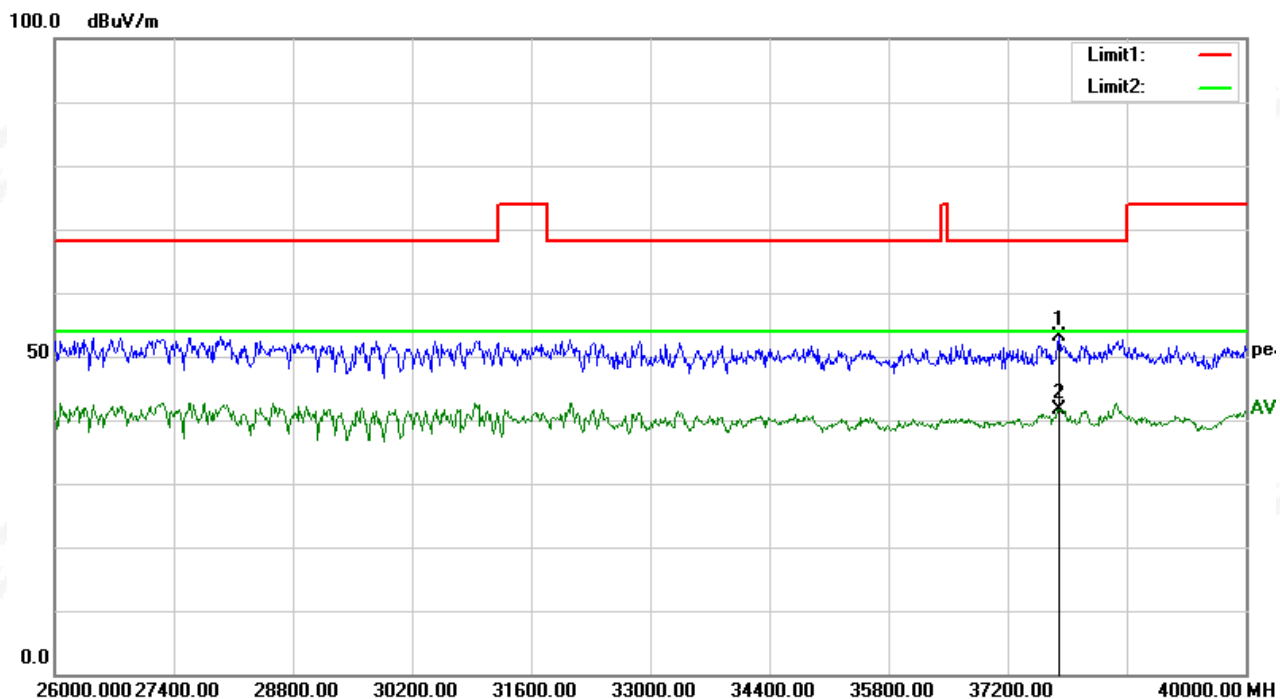


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	37802.000	46.28	6.91	53.19	68.20	-15.01	peak
2	37802.000	34.77	6.91	41.68	54.00	-12.32	AVG




Above 40GHz

Frequency	Result	Limit	Margin	Remark	Pol.
(GHz)	(dBuV/m)	(dBuV/m)	(dB)		
57.3140	51.02	74.00	-22.99	peak	H
57.3140	40.75	54.00	-13.25	AVG	H
57.4560	50.99	74.00	-23.01	peak	V
57.4560	40.69	54.00	-13.31	AVG	V
73.0545	52.80	74.00	-21.20	peak	H
73.0545	42.04	54.00	-11.96	AVG	H
73.0725	52.81	74.00	-21.19	peak	V
73.0725	42.03	54.00	-11.97	AVG	V
77.0230	52.93	74.00	-21.07	peak	H
77.0230	42.46	54.00	-11.54	AVG	H
76.8900	52.82	74.00	-21.18	peak	V
76.8900	42.01	54.00	-11.99	AVG	V


40GHz - 60GHz-H

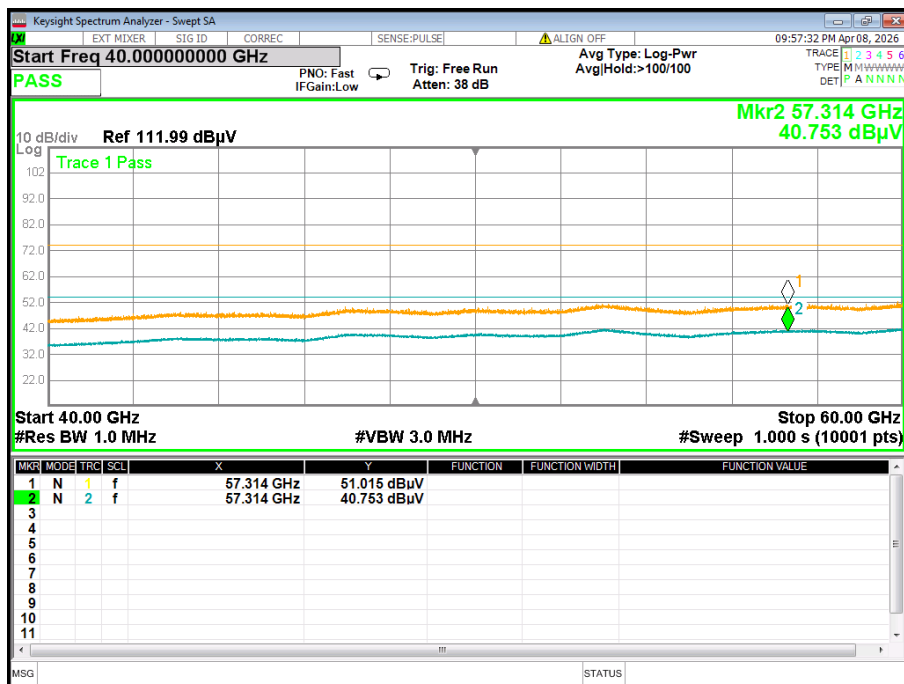


40GHz - 60GHz-V

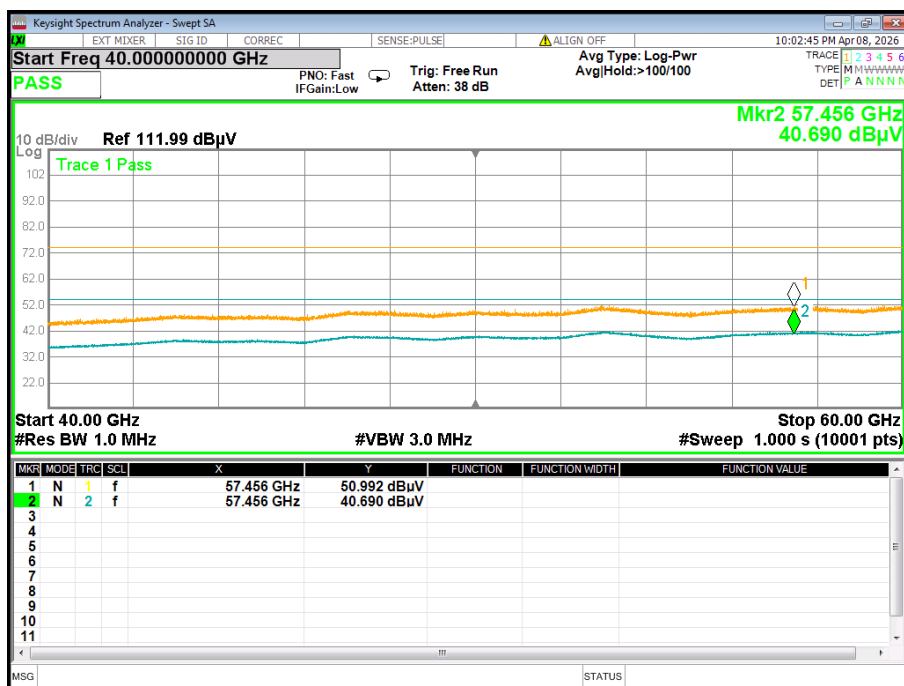


60GHz - 75GHz-H

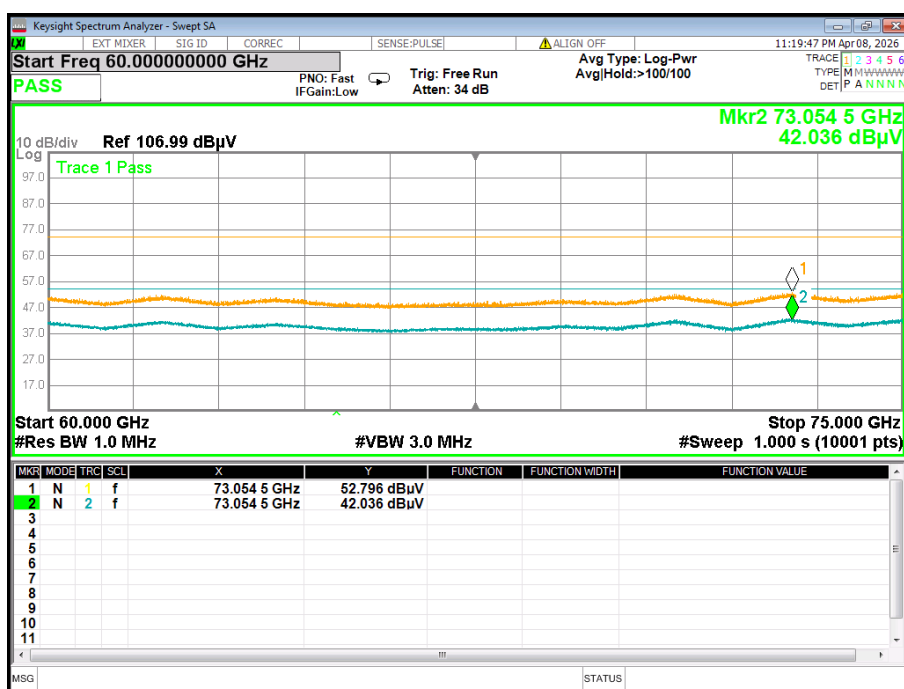


60GHz - 75GHz-V

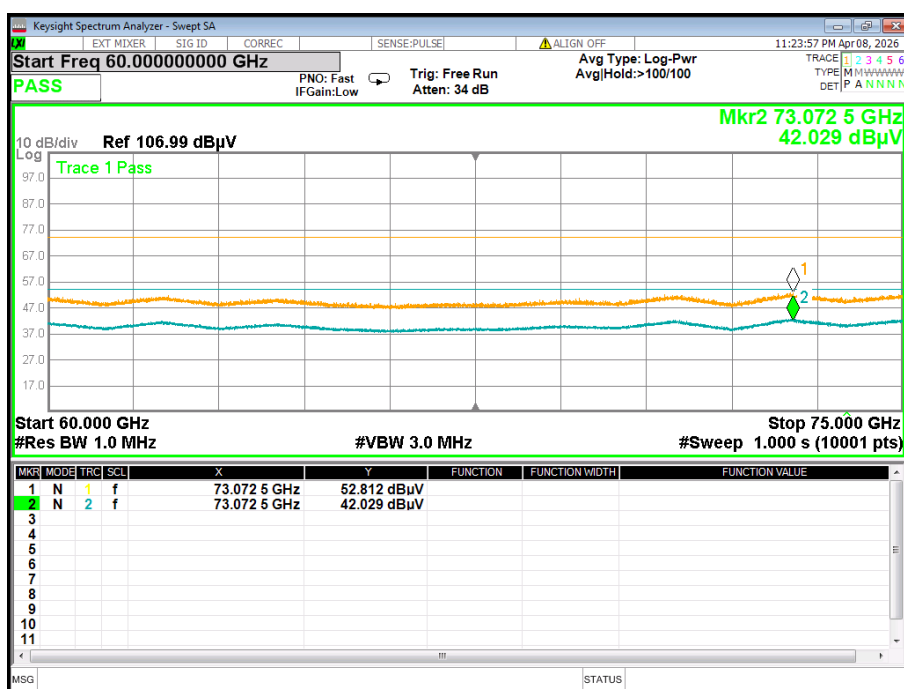

75GHz - 100GHz-H

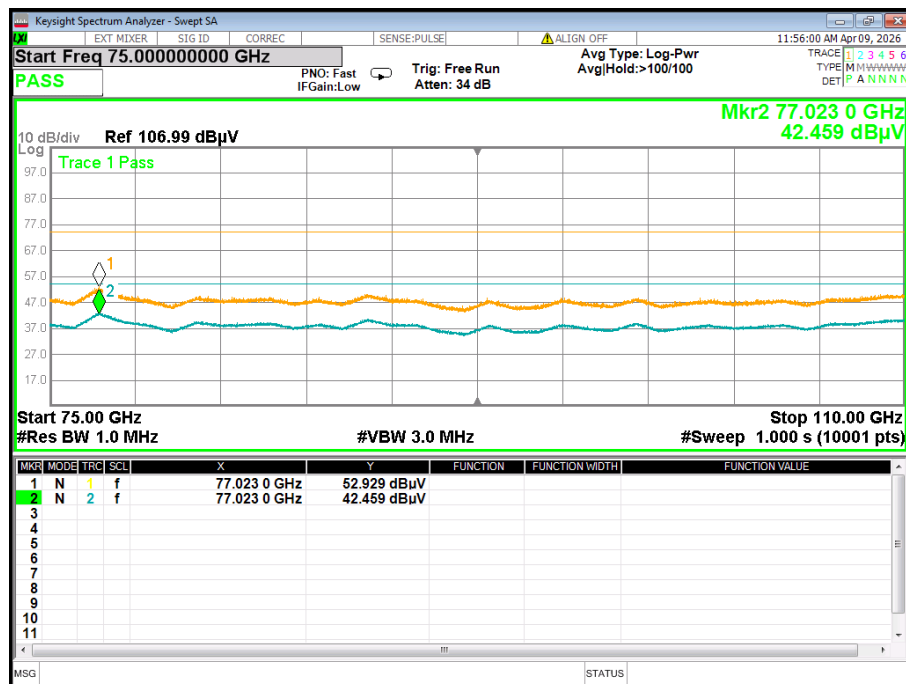


75GHz - 100GHz-V

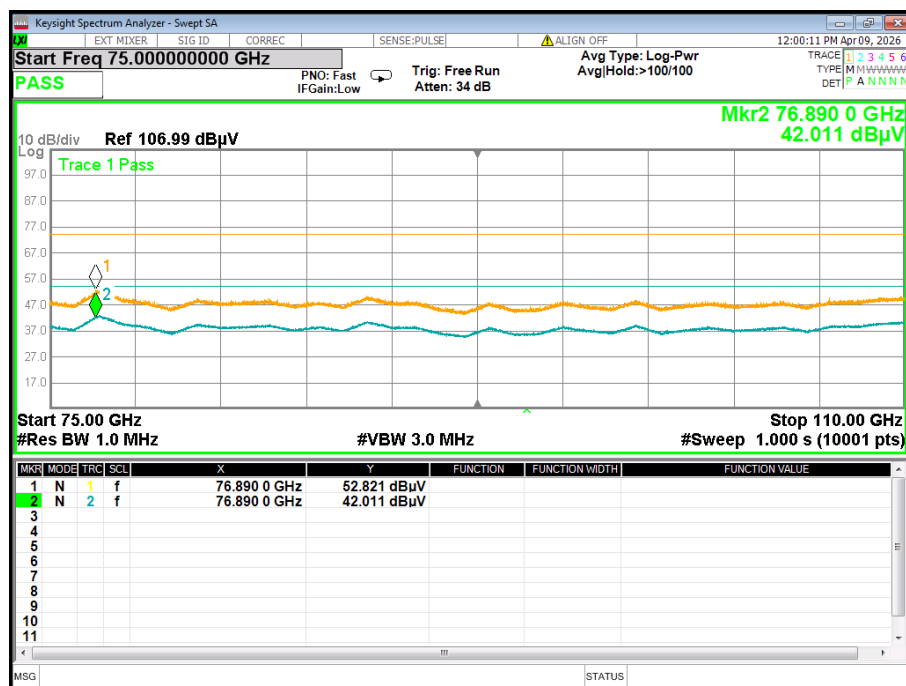



Channel 03
1GHz - 18GHz
Horizontal

RE_FCC Test Case_FCC 15C-IC-RSS 1GHz-18GHz -

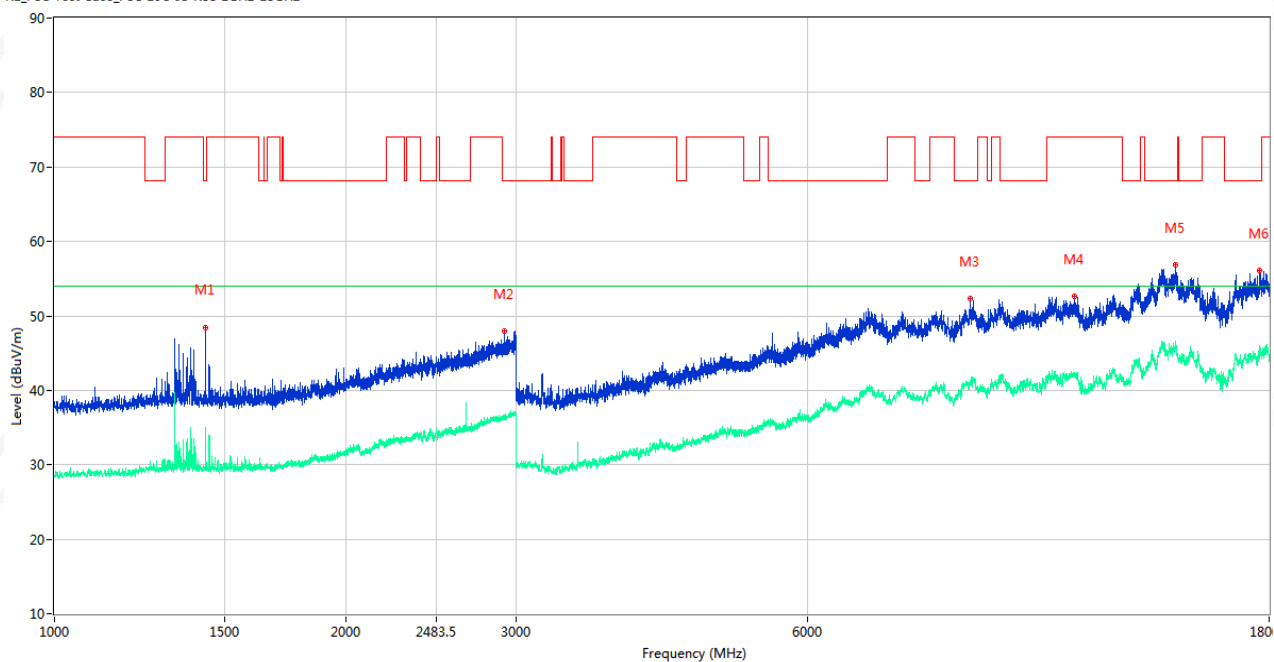


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1432.000	48.47	-1.13	68.2	-19.73	Peak	162.20	Horizontal	Pass
1**	1432.000	34.99	-1.13	54.0	-19.01	AV	162.20	Horizontal	Pass
2	2914.000	47.95	4.99	68.2	-20.25	Peak	233.30	Horizontal	Pass
2**	2914.000	36.34	4.99	54.0	-17.66	AV	233.30	Horizontal	Pass
3	8839.750	52.36	0.73	68.2	-15.84	Peak	93.00	Horizontal	Pass
3**	8839.750	41.25	0.73	54.0	-12.75	AV	93.00	Horizontal	Pass
4	11336.750	52.66	2.16	74.0	-21.34	Peak	309.20	Horizontal	Pass
4**	11336.750	42.04	2.16	54.0	-11.96	AV	309.20	Horizontal	Pass
5	14422.250	56.83	6.83	68.2	-11.37	Peak	84.50	Horizontal	Pass
5**	14422.250	46.19	6.83	54.0	-7.81	AV	84.50	Horizontal	Pass
6	17612.249	56.06	6.53	68.2	-12.14	Peak	0.10	Horizontal	Pass
6**	17612.249	44.88	6.53	54.0	-9.12	AV	0.10	Horizontal	Pass




Vertical

RE_FCC Test Case_FCC 15C-IC-RSS 1GHz-18GHz -

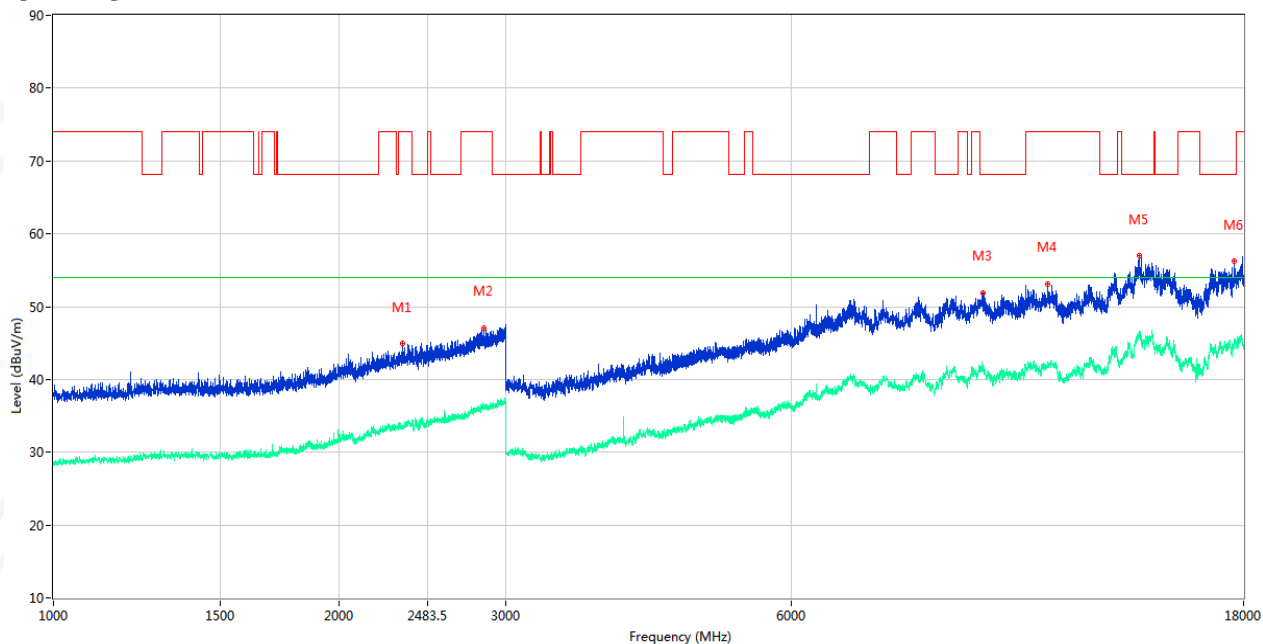


No	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	2335.000	44.93	2.60	74.0	-29.07	Peak	0.00	Vertical	Pass
1**	2335.000	33.26	2.60	54.0	-20.74	AV	0.00	Vertical	Pass
2	2847.000	47.09	4.98	74.0	-26.91	Peak	3.50	Vertical	Pass
2**	2847.000	36.09	4.98	54.0	-17.91	AV	3.50	Vertical	Pass
3	9554.750	51.96	1.01	68.2	-16.24	Peak	94.30	Vertical	Pass
3**	9554.750	41.77	1.01	54.0	-12.23	AV	94.30	Vertical	Pass
4	11182.750	53.15	2.53	74.0	-20.85	Peak	74.60	Vertical	Pass
4**	11182.750	42.37	2.53	54.0	-11.63	AV	74.60	Vertical	Pass
5	13982.250	56.99	8.23	68.2	-11.21	Peak	167.20	Vertical	Pass
5**	13982.250	46.49	8.23	54.0	-7.51	AV	167.20	Vertical	Pass
6	17601.249	56.24	6.60	68.2	-11.96	Peak	358.70	Vertical	Pass
6**	17601.249	45.41	6.60	54.0	-8.59	AV	358.70	Vertical	Pass

18 GHz - 26GHz
Horizontal

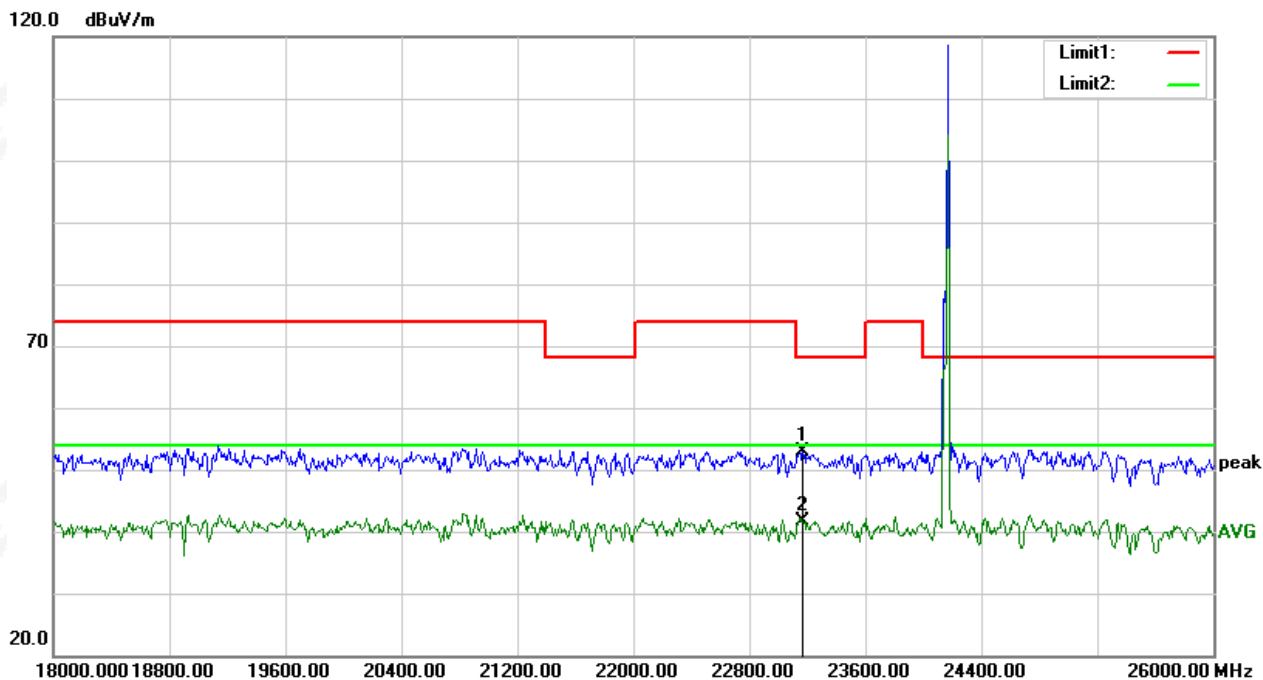


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	23168.000	49.06	3.80	52.86	68.20	-15.34	peak
2	23168.000	37.78	3.80	41.58	54.00	-12.42	AVG

Vertical

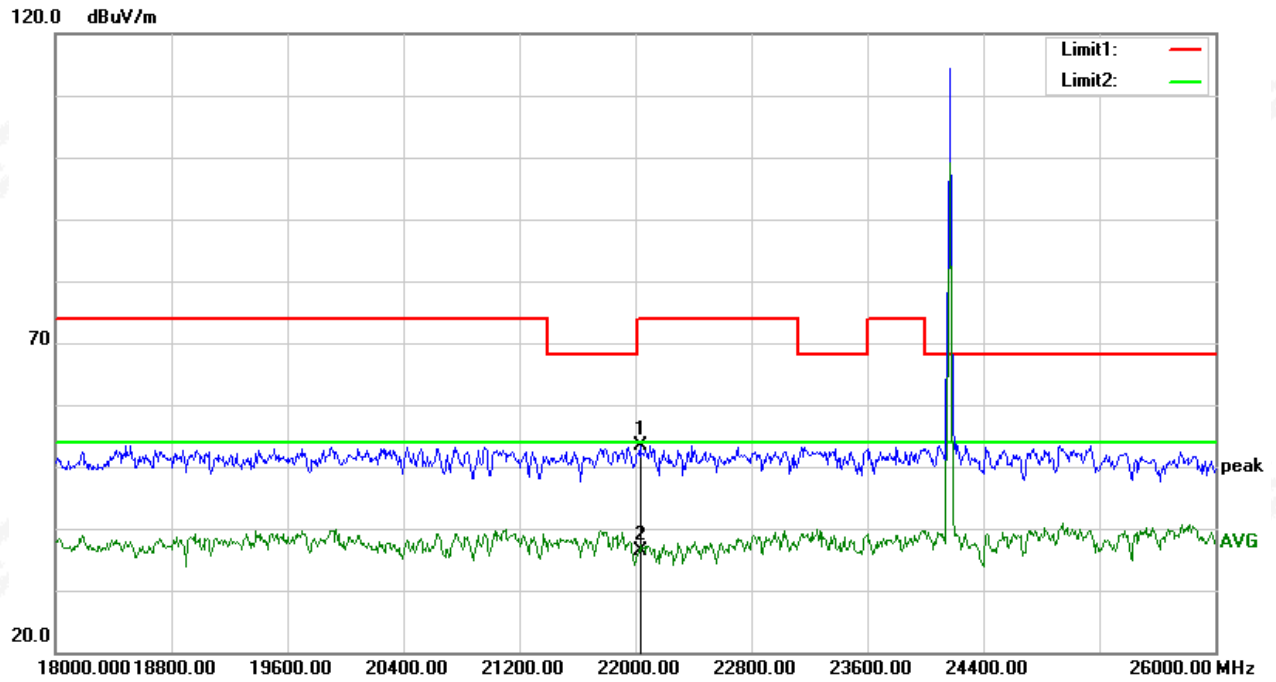


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	22032.000	49.94	3.45	53.39	74.00	-20.61	peak
2	22032.000	32.95	3.45	36.40	54.00	-17.60	AVG

26 GHz - 40GHz
Horizontal

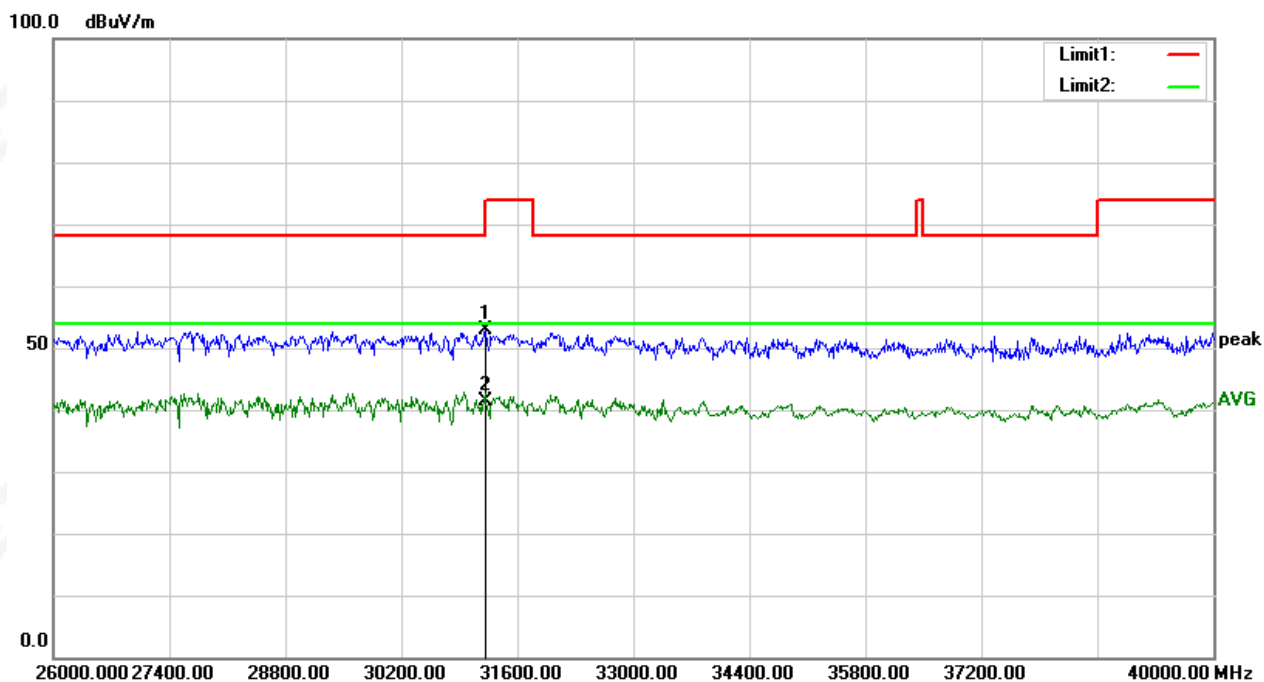

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	31208.000	43.80	9.04	52.84	74.00	-21.16	peak
2	31208.000	32.31	9.04	41.35	54.00	-12.65	AVG

Vertical

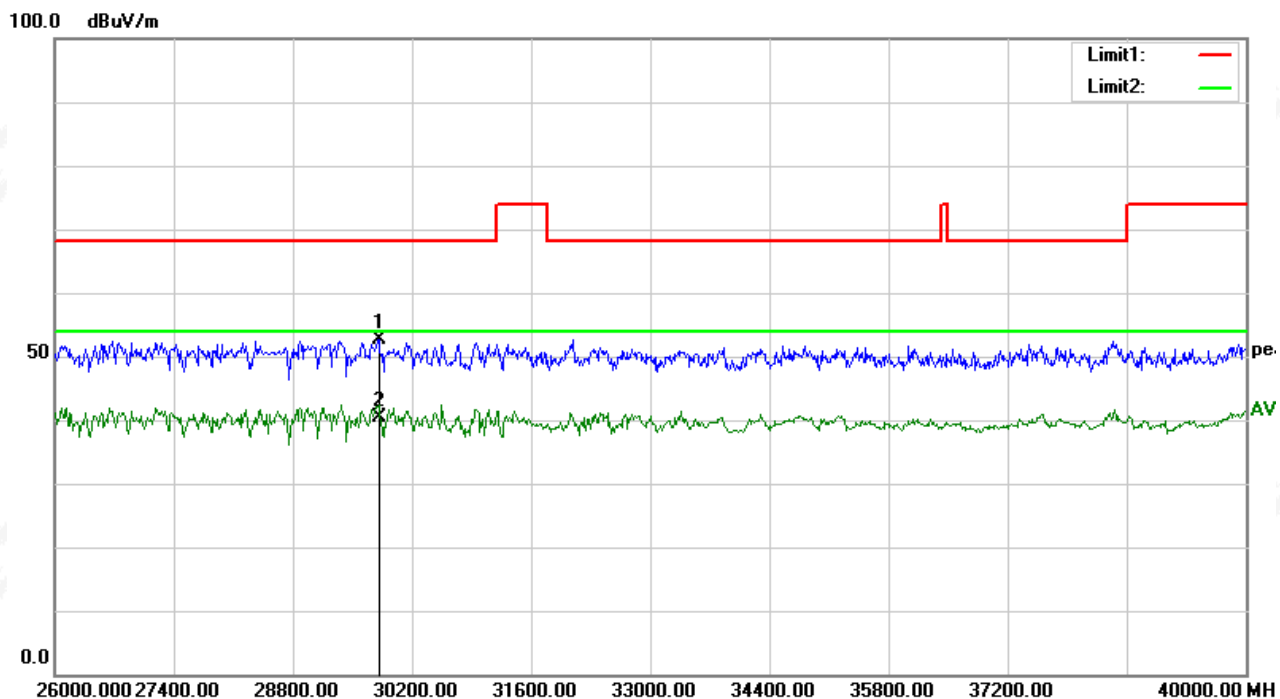


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	29808.000	43.61	9.08	52.69	68.20	-15.51	peak
2	29808.000	31.31	9.08	40.39	54.00	-13.61	AVG




Above 40GHz

Frequency	Result	Limit	Margin	Remark	Pol.
(GHz)	(dBuV/m)	(dBuV/m)	(dB)		
57.1600	50.48	74.00	-23.52	peak	H
57.1600	40.48	54.00	-13.52	AVG	H
57.0140	50.36	74.00	-23.64	peak	V
57.0140	40.89	54.00	-13.11	AVG	V
72.9975	52.98	74.00	-21.02	peak	H
72.9975	42.23	54.00	-11.77	AVG	H
72.9630	52.56	74.00	-21.44	peak	V
72.9630	41.88	54.00	-12.12	AVG	V
77.0510	52.74	74.00	-21.26	peak	H
77.0510	42.44	54.00	-11.56	AVG	H
77.1420	53.42	74.00	-20.58	peak	V
77.1420	42.01	54.00	-11.99	AVG	V


40GHz - 60GHz-H

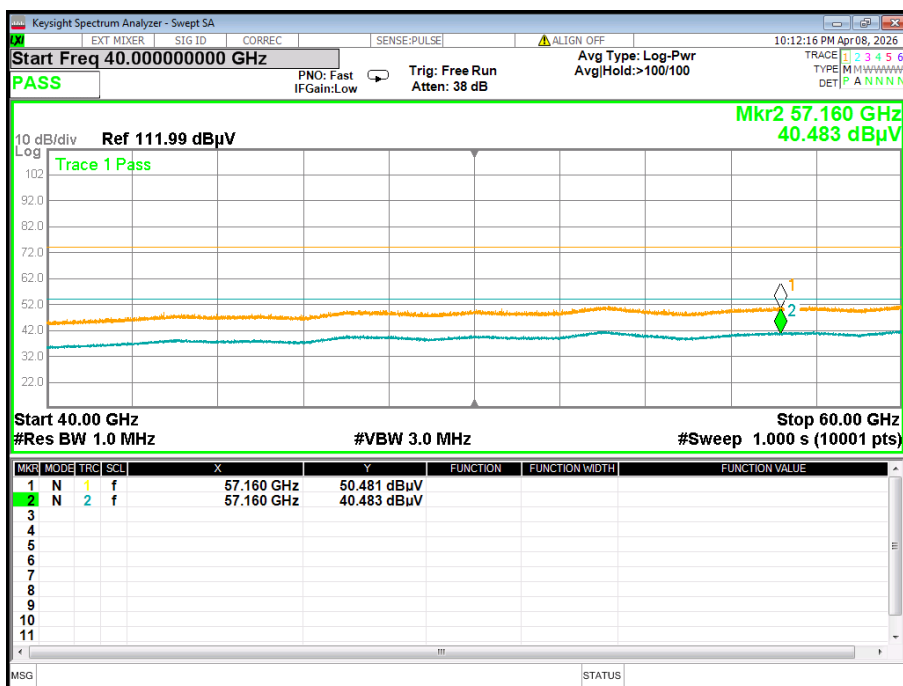


40GHz - 60GHz-V

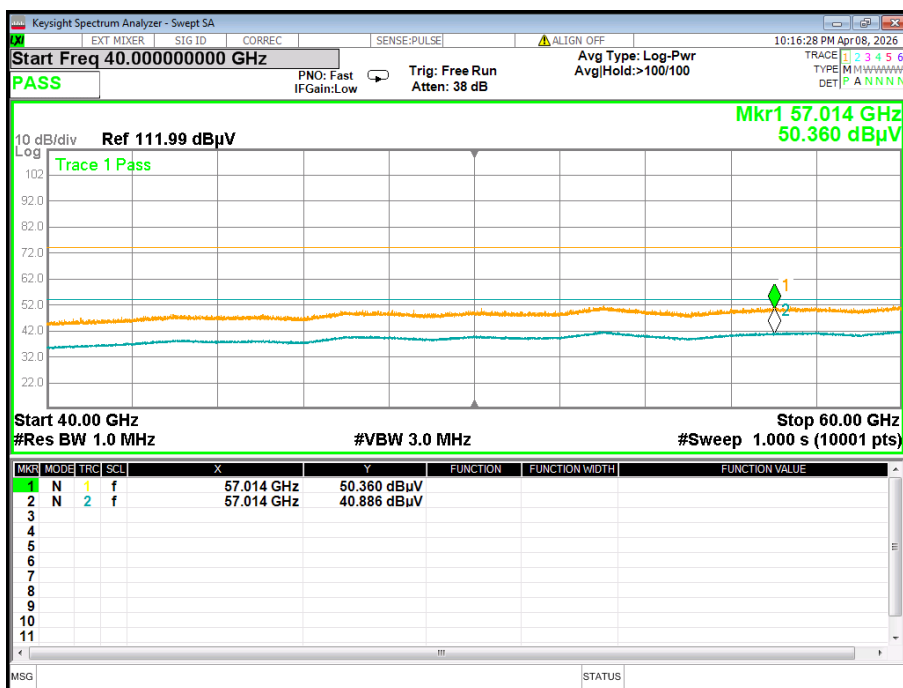


60GHz - 75GHz-H

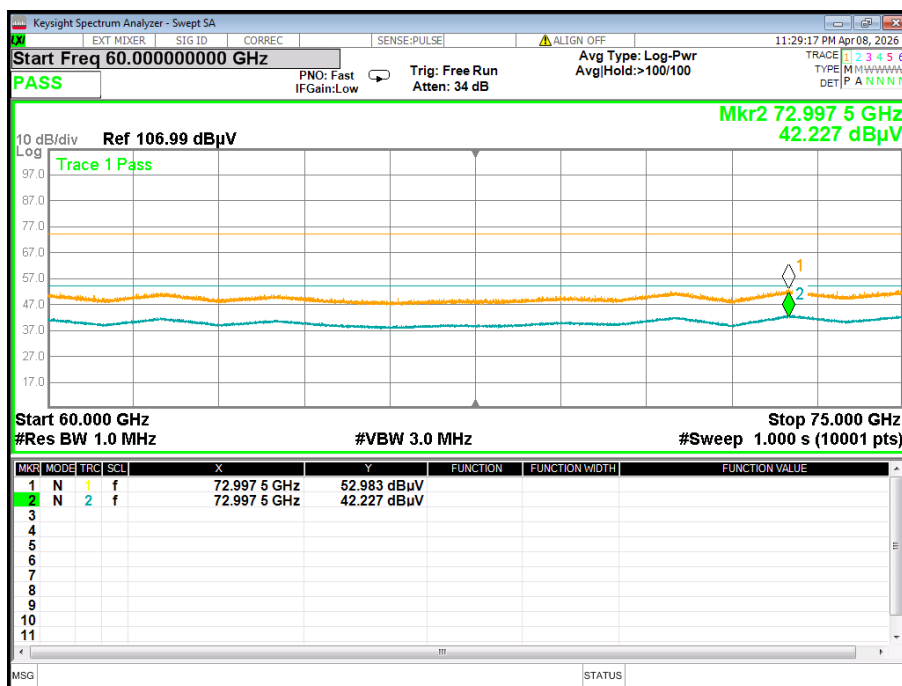


60GHz - 75GHz-V

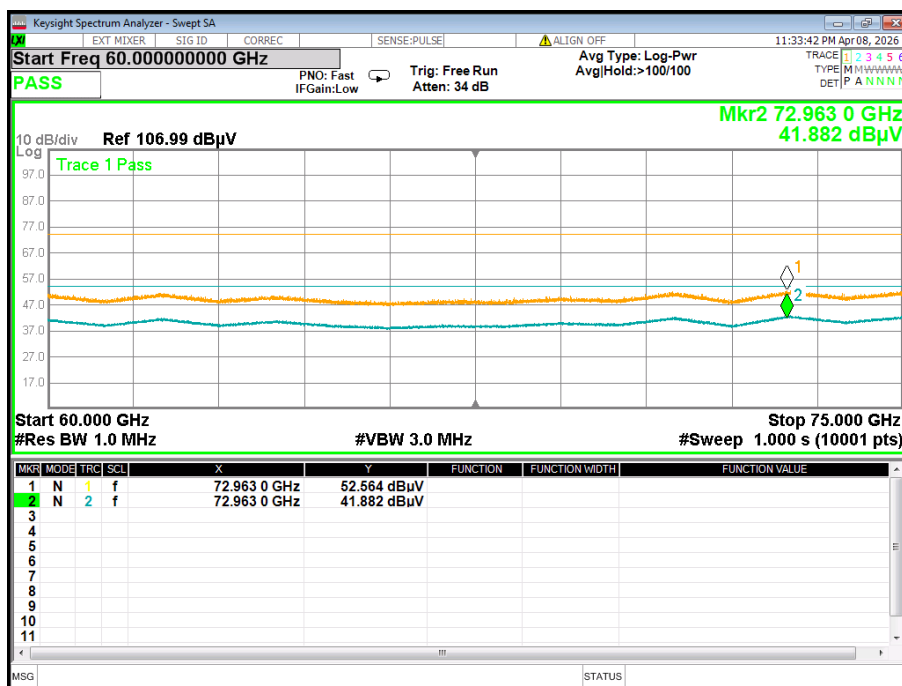

75GHz - 100GHz-H

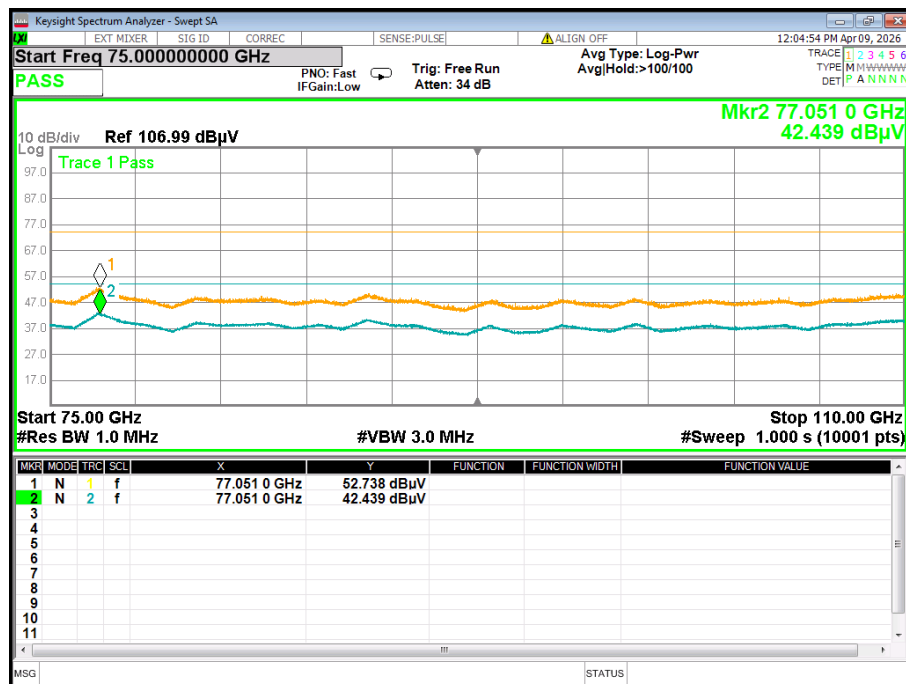


75GHz - 100GHz-V

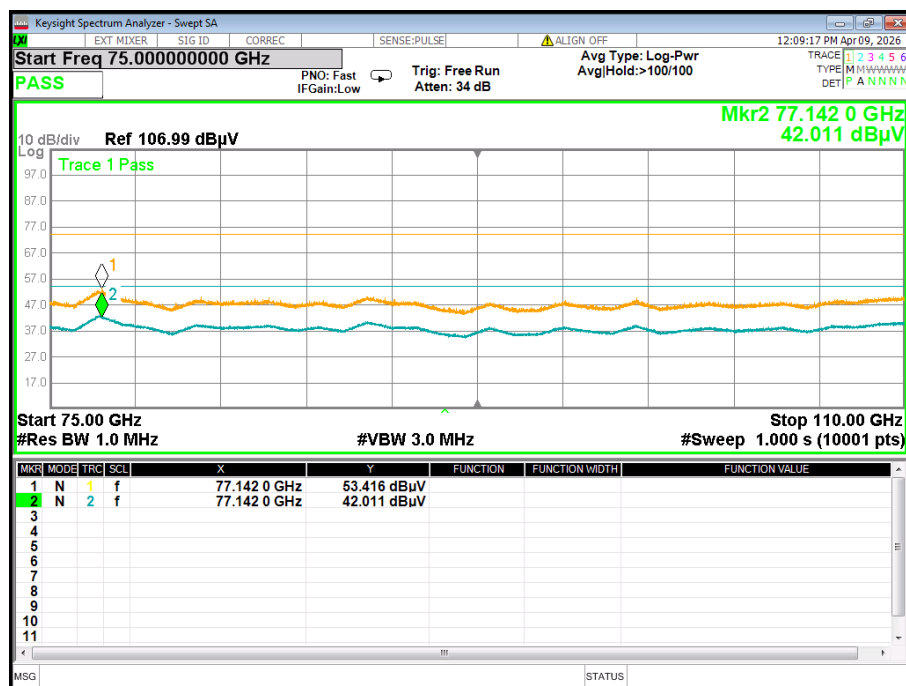



Duty cycle

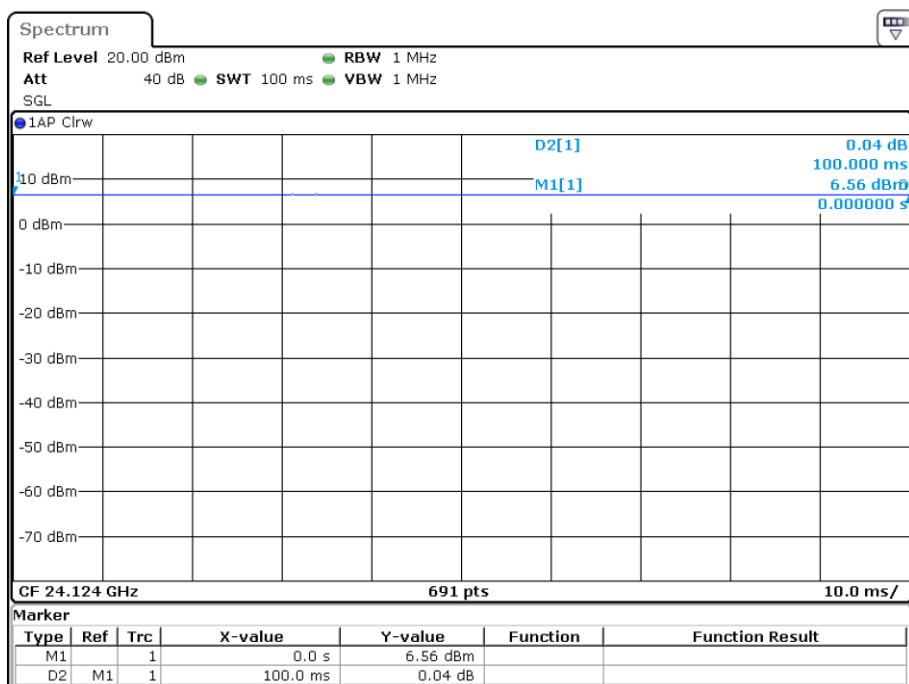

Ton (ms)	Tp (ms)	Duty Cycle (%)	Duty Factor
100	100	100	0


Note:

- Duty Factor=20*LOG10((Ton/Tp))

Radiation Restricted band&EIRP

Channel 01

RSE-H

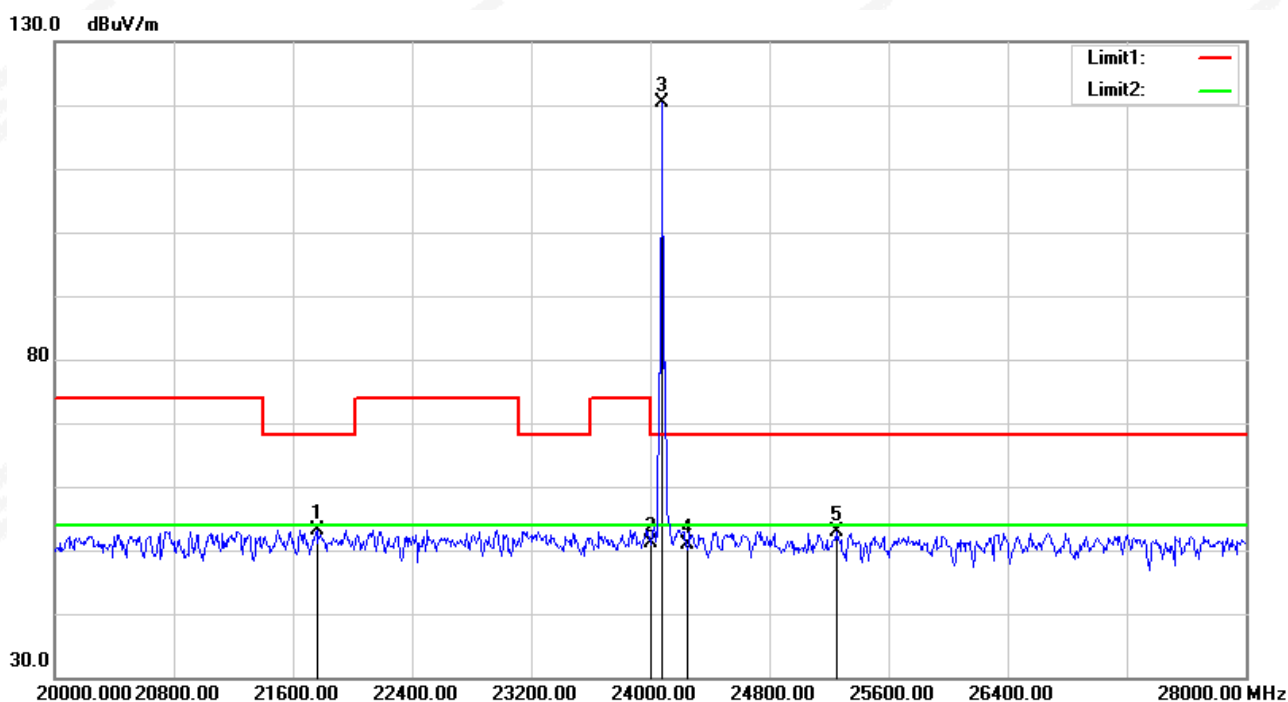


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	21760.000	50.03	3.18	53.21	68.20	-14.99	peak
2	24000.000	46.46	4.63	51.09	68.20	-17.11	peak
4	24250.000	46.17	4.67	50.84	68.20	-17.36	peak
5	25248.000	47.36	5.48	52.84	68.20	-15.36	peak

Fundamental Frequency

No.	Frequency	Reading	Correct	Duty cycle	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
3	24080.000	115.78	4.65	-	120.43	147.96	-27.53	peak
3	24080.000	115.78	4.65	0	120.43	127.96	-7.53	AVG

RSE-V

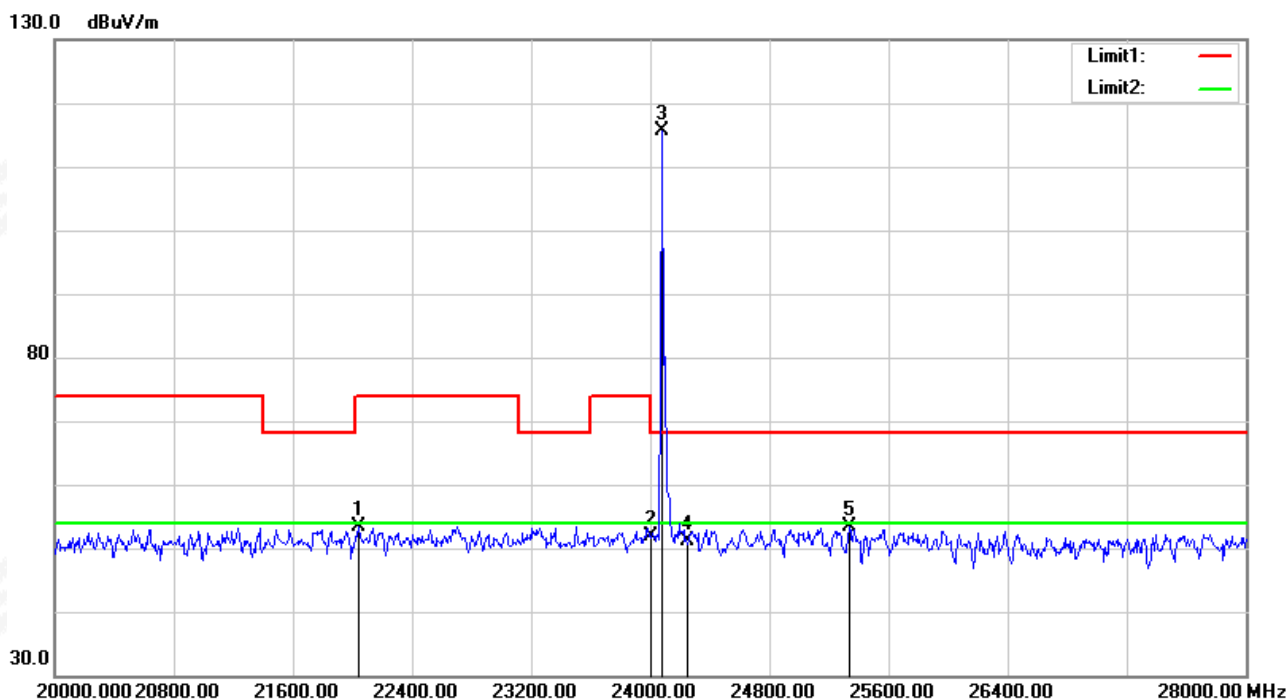


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	22040.000	49.80	3.46	53.26	74.00	-20.74	peak
2	24000.000	47.36	4.63	51.99	68.20	-16.21	peak
4	24250.000	46.37	4.67	51.04	68.20	-17.16	peak
5	25336.000	47.85	5.54	53.39	68.20	-14.81	peak

Fundamental Frequency

No.	Frequency	Reading	Correct	Duty cycle	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
3	24080.000	110.86	4.65	-	115.51	147.96	-32.45	peak
3	24080.000	110.86	4.65	0	115.51	127.96	-12.45	AVG

Channel 02

RSE-H

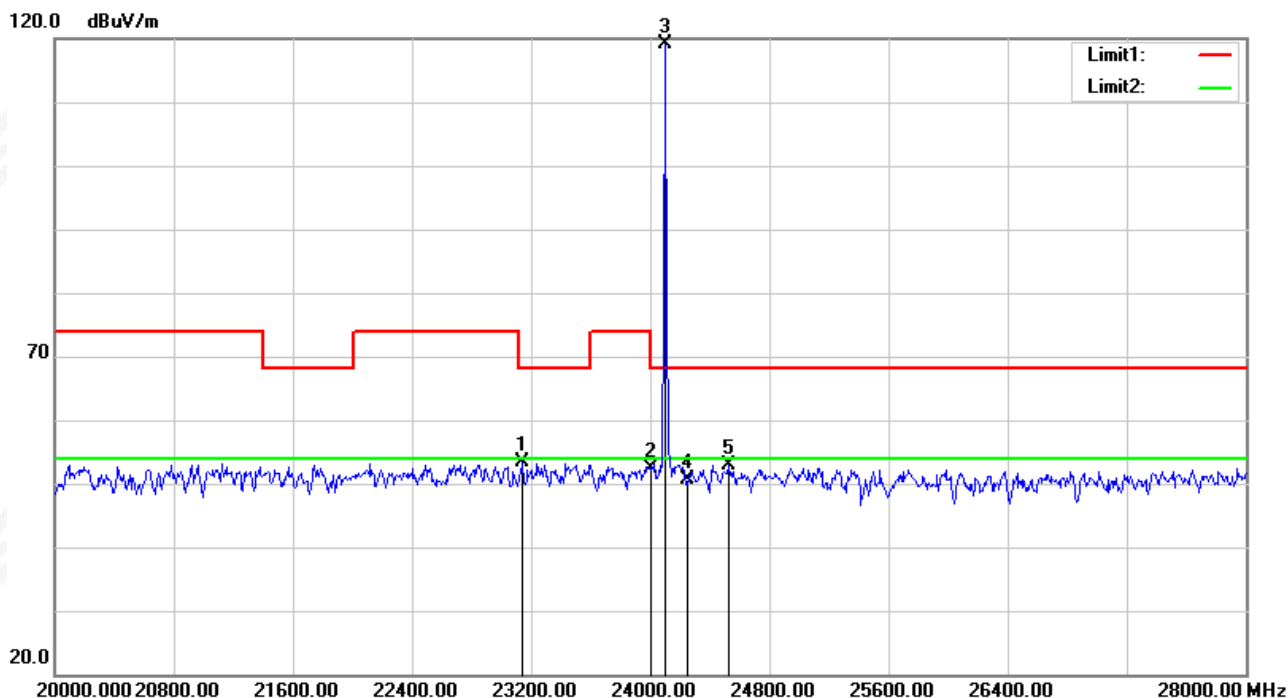


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	23144.000	49.70	3.77	53.47	68.20	-14.73	peak
2	24000.000	47.80	4.63	52.43	68.20	-15.77	peak
4	24250.000	45.94	4.67	50.61	68.20	-17.59	peak
5	24528.000	48.20	4.75	52.95	68.20	-15.25	peak

Fundamental Frequency

No.	Frequency	Reading	Correct	Duty cycle	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
3	24124.000	114.52	4.65	-	119.17	147.96	-28.79	peak
3	24124.000	114.52	4.65	0	119.17	127.96	-8.79	AVG

RSE-V

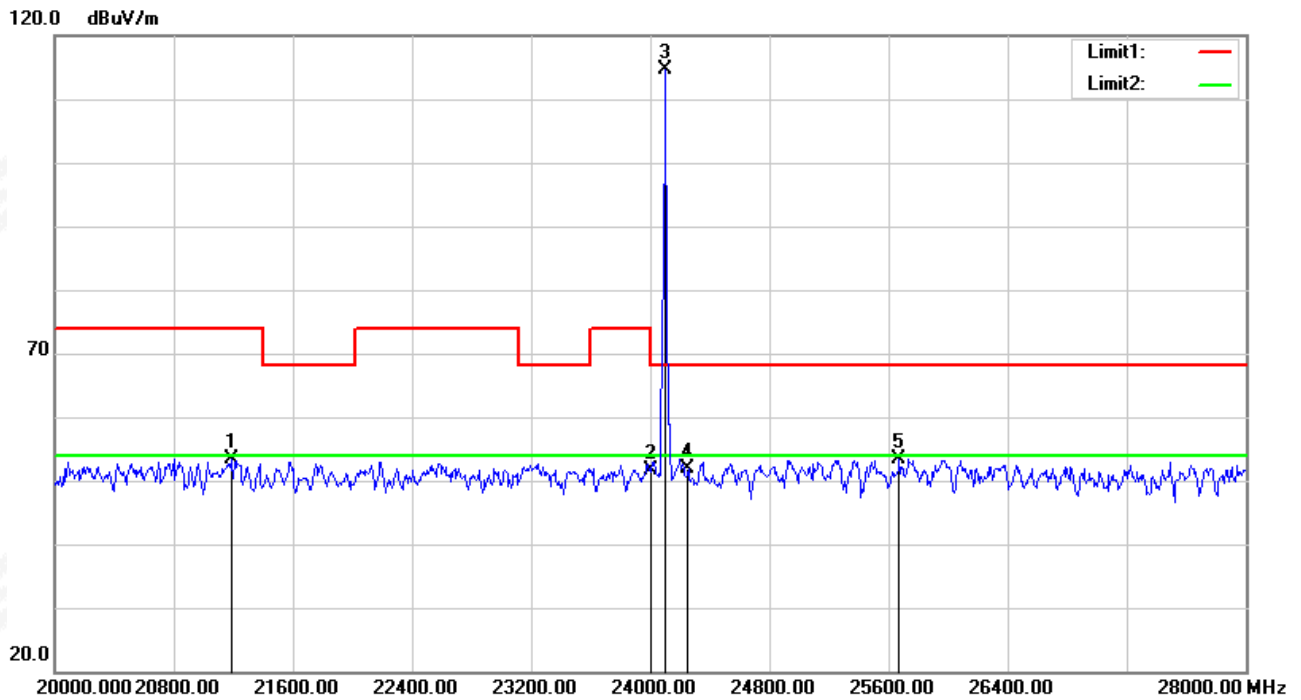


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	21184.000	50.73	2.76	53.49	74.00	-20.51	peak
2	24000.000	47.07	4.63	51.70	68.20	-16.50	peak
4	24250.000	47.17	4.67	51.84	68.20	-16.36	peak
5	25672.000	47.72	5.70	53.42	68.20	-14.78	peak

Fundamental Frequency

No.	Frequency	Reading	Correct	Duty cycle	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
3	24124.000	110.07	4.64	-	114.71	147.96	-33.25	peak
3	24124.000	110.07	4.64	0	114.71	127.96	-13.25	AVG

Channel 03

RSE-H

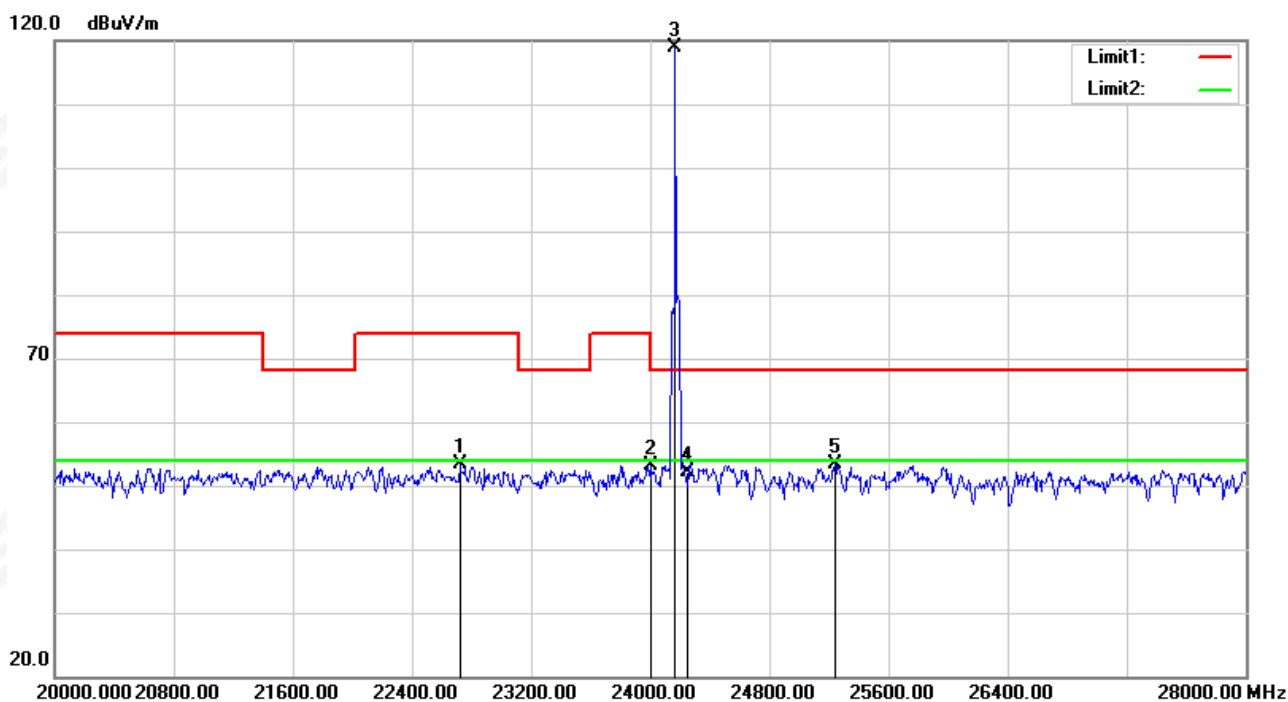


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	22720.000	49.48	3.79	53.27	74.00	-20.73	peak
2	24000.000	48.55	4.63	53.18	68.20	-15.02	peak
4	24250.000	47.41	4.67	52.08	68.20	-16.12	peak
5	25240.000	48.01	5.47	53.48	68.20	-14.72	peak

Fundamental Frequency

No.	Frequency	Reading	Correct	Duty cycle	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
3	24168.000	114.16	4.65	-	118.81	147.96	-29.15	peak
3	24168.000	114.16	4.65	0	118.81	127.96	-9.15	AVG

RSE-V

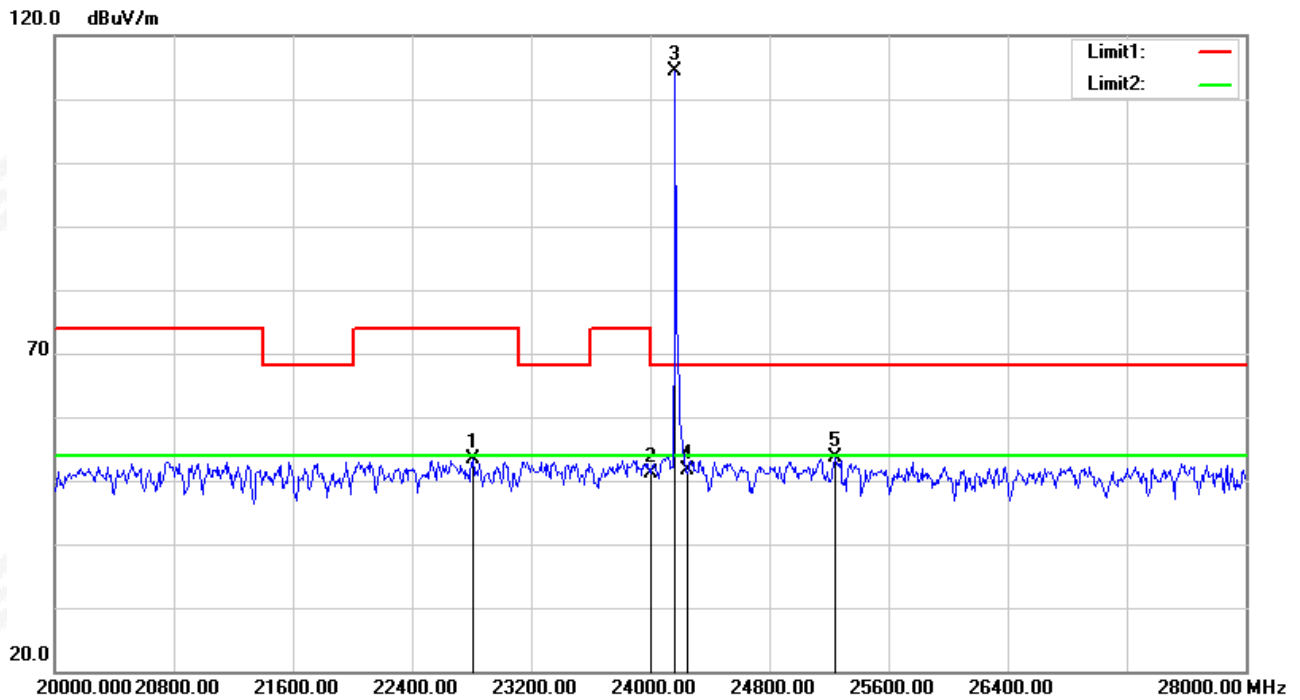

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	22808.000	49.74	3.75	53.49	74.00	-20.51	peak
2	24000.000	46.60	4.63	51.23	68.20	-16.97	peak
4	24250.000	46.85	4.67	51.52	68.20	-16.68	peak
5	25240.000	48.25	5.47	53.72	68.20	-14.48	peak

Fundamental Frequency

No.	Frequency	Reading	Correct	Duty cycle	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
3	24168.000	109.84	4.65	-	114.49	147.96	-33.47	peak
3	24168.000	109.84	4.65	0	114.49	127.96	-13.47	AVG

5. OCCUPIED BANDWIDTH

5.1 LIMIT

The occupied bandwidth is defined as the 99% bandwidth.

According to § 2.1049 and RSS-Gen section 6.7: The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.


The occupied bandwidth is defined as the 20dB bandwidth.

According to § 15.215 (c): Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. In the case of intentional radiators operating under the provisions of subpart E, the emission bandwidth may span across multiple contiguous frequency bands identified in that subpart. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

5.2 TEST PROCEDURE

- a. The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer
- b. If the EUT is a tabletop system, 1.5 m height is used.
- c. If the EUT is a floor standing device, it is placed directly on the turntable.
- d. Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C63.4.
- e. The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- f. Measurement distance is 1m (see ANSI C63.4) – see test details.
- g. EUT is set into operation.
- h. The turntable rotates from 0 degree to 360 degree.
- i. The antenna with external mixer is polarized vertical and horizontal.
- j. The antenna height changes from 1m to 4m.
- k. Set the resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.


5.3 TEST SETUP

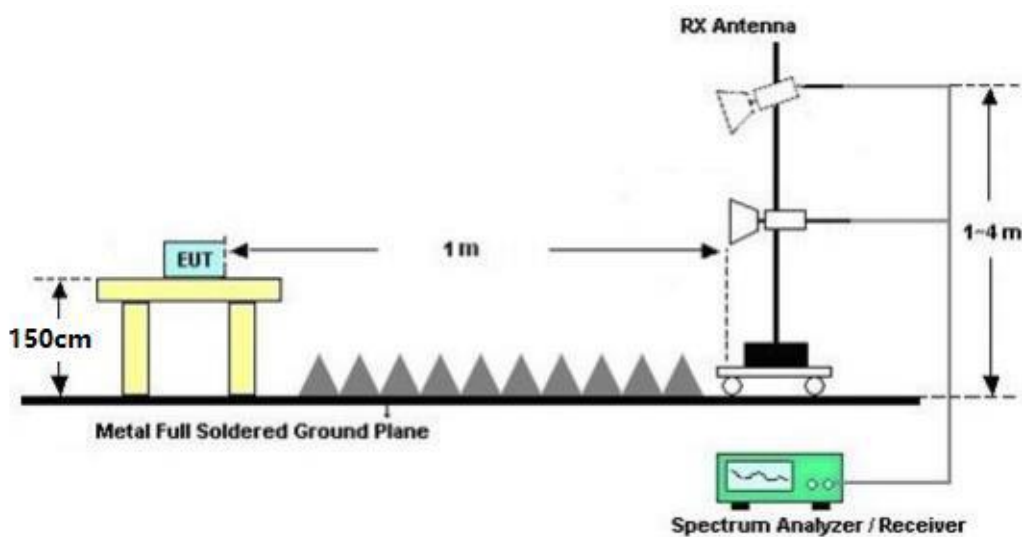


5.4 TEST RESULT

Channel	Lowest Frequency(GHz)	Highest Frequency(GHz)	99%Bandwidth (KHz)	Limit (GHz)	Result
01	24.0792041	24.0800724	868.3068	24.075-24.175	Pass
02	24.1236382	24.1245065	868.3068		
03	24.1675658	24.1686512	1085.3835		


CH 01
99% BW

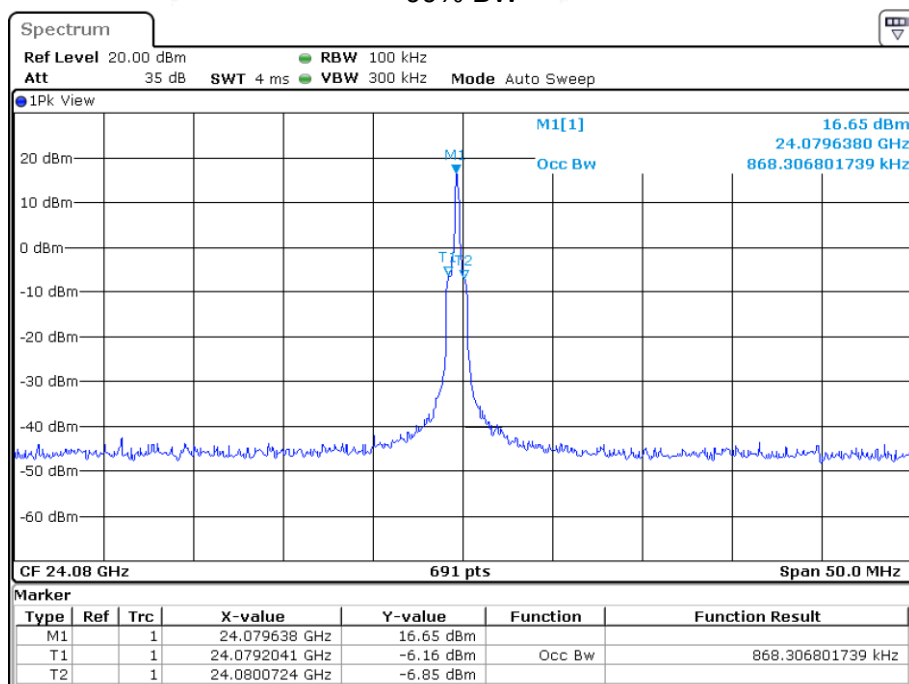

CH 02
99% BW

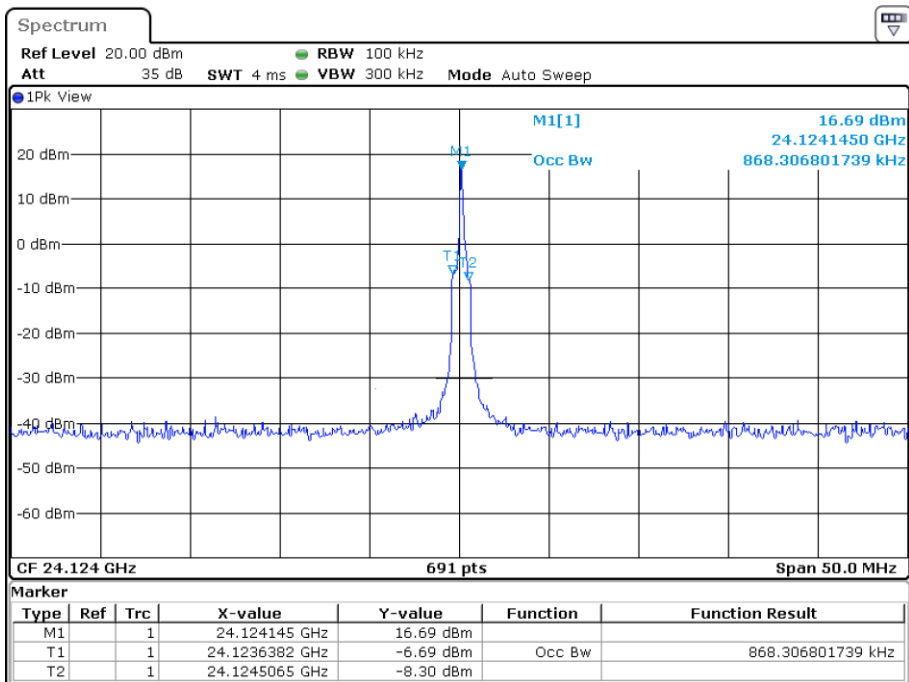


CH 03
99% BW

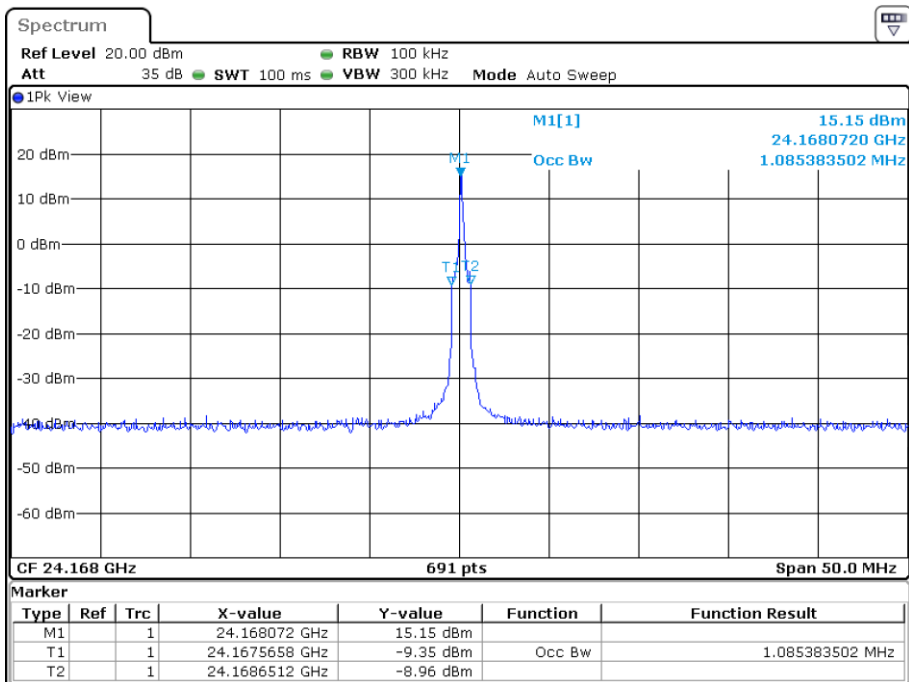




Channel	Lowest Frequency (GHz)	Highest Frequency (GHz)	20dB Bandwidth (KHz)	Limit (GHz)	Result
01	24.079349	24.079928	579.00	24.075-24.175	Pass
02	24.123855	24.124434	579.00		
03	24.167783	24.168362	579.00		

CH 01
20dB BW

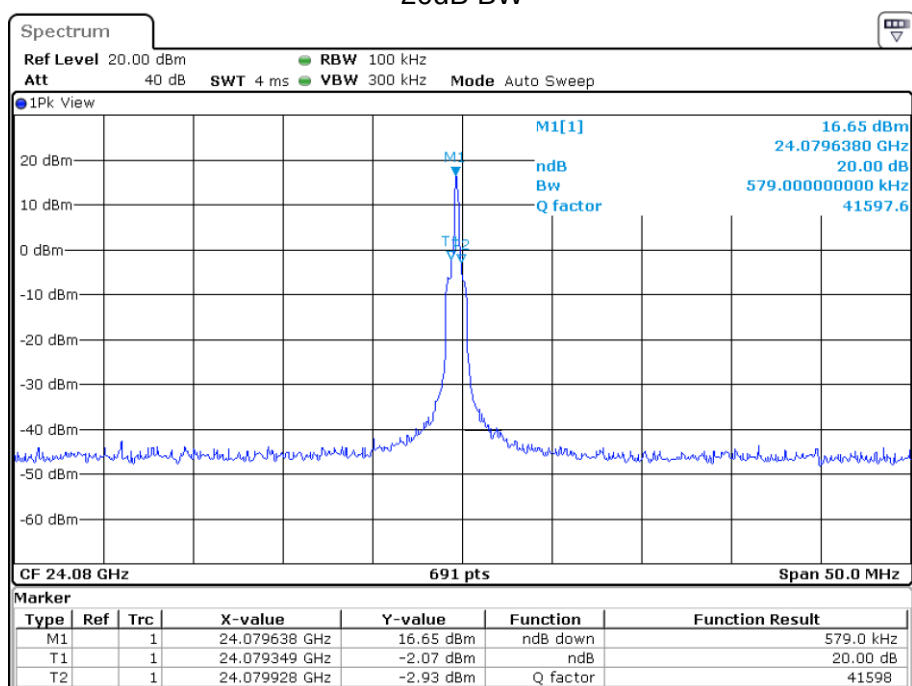


CH 02

20dB BW

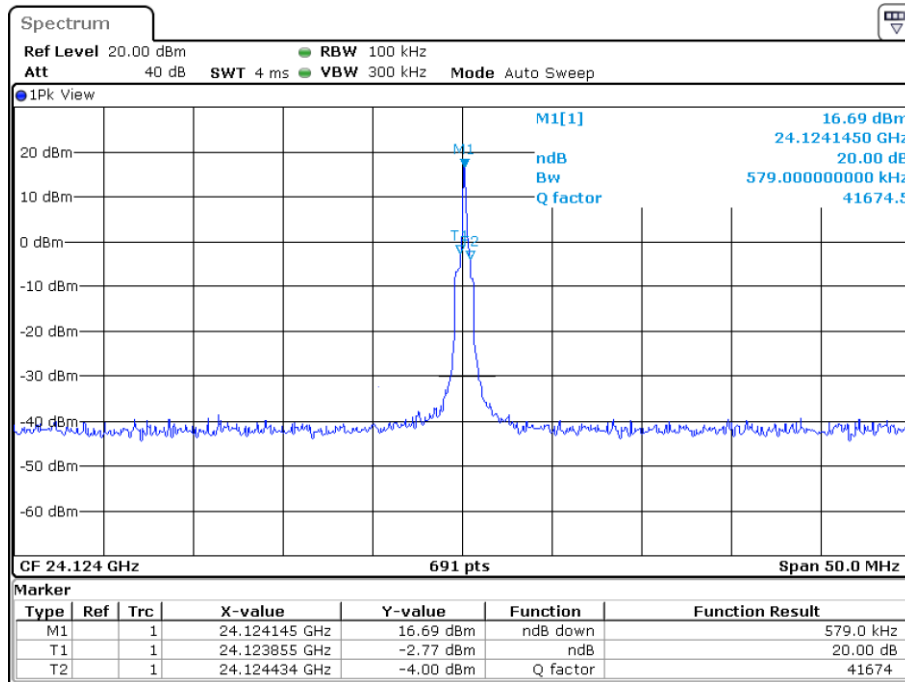

CH 03

20dB BW

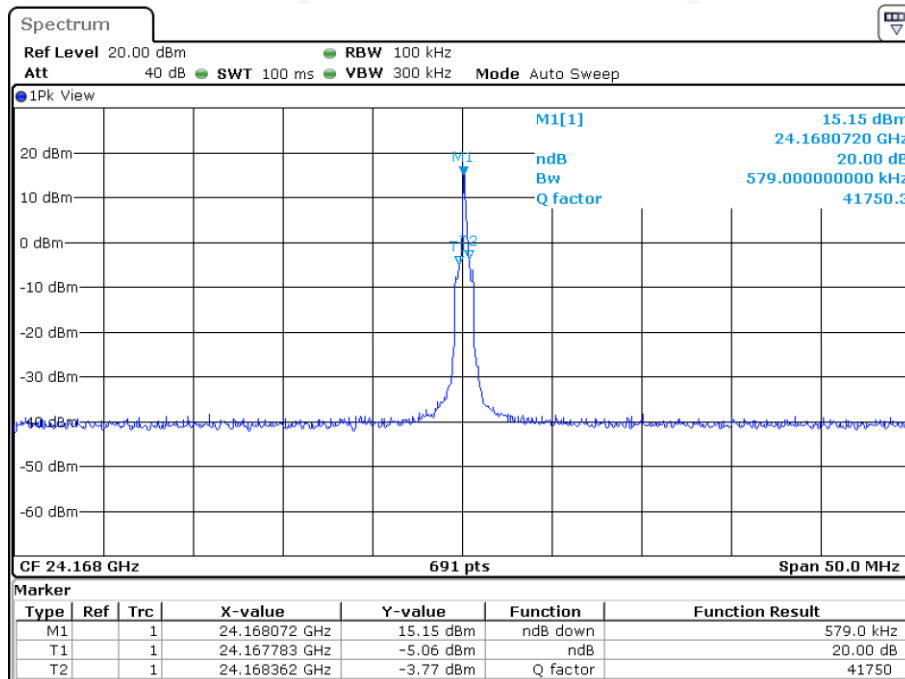

6. ANTENNA REQUIREMENT

6.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 EUT ANTENNA

The EUT antenna is Comb antenna array Antenna. It comply with the standard requirement.



7. PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****