



AI Vending Machine

CIRCUIT DIAGRAM

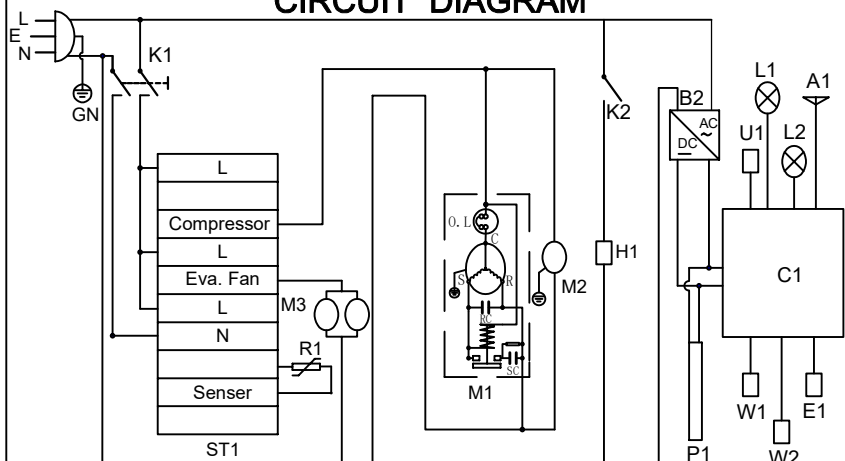

K1: Cooling Switch M1: Compressor M2: Condensor Fan
 M3: Evaporator Fans ST1: Digital Controller R1:
 Coldroom Sensor B2: Power Adapter P1: POS machines
 C1: Controller U1: lithium Battery L1/L2: LED lamp
 A1: Antenna W1/W2: Webcam E1: Electromagnetic Locks
 K2: Door Heating Switch H1: Door Heating Wire

Product Model: Cooler 440
 Rated Voltage: 110~120V AC
 Rated Frequency: 60Hz
 Total Input Power: 350W
 Total Current: 2.9A
 Energy Consumption: 3.2kW. h/24h
 Total Capacity: 16.3cu ft (460L)
 Refrigerant: R290/2.19oz (62g)
 Protection Type: I
 Design Pressure (High Side): 350PSIG
 Design Pressure (Low Side): 136PSIG
 Insulation Blowing Gas: C-pentane
 Net Weight: 264.5lb (120kg)
 Date Code: See barcode
 FCC ID: 2BUXP-HH-US-001
 IC: 35194-HHUS001
 Contains FCC ID: XMR201706SC20A
 Contains IC: 10224A-201707SC20A

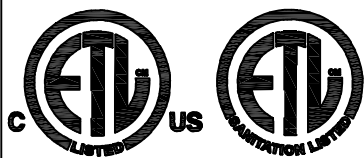

Intertek Intertek

5036066



CONFORMS TO UL STD. UL 541. CERTIFIED TO CSA STD. C22. 2NO. 128.
 CONFORMS TO NSF/ANSI STD. 25

*This equipment is not for the display of time / temperature control for safety packaged foods

*Do not clean label with solven

*For indoor use only

*Refrigerant lower flammable limit 0.038 kg/m³

Trademark: HAA VENDING

Label location

