


AI Vending Machine

CIRCUIT DIAGRAM

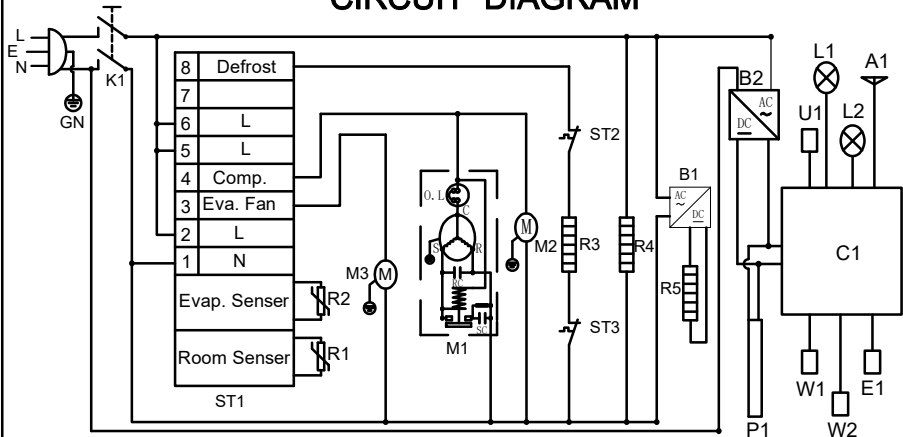

K1: Cooling Switch M1: Compressor M2: Condensor Fan M3: Evaporator Fans
ST1: Digital Controller ST2/ST3: Bimetal R1: Coldroom Sensor R2: Evaporator Sensor R3: Defrost Heater R4: Drain-Pipe Heater R5: Glass Heater B1: Door Glass Heating Power Supply Adapter B2: Power Adapter P1: POS machines C1: Controller U1: lithium Battery L1/L2: LED lamp A1: Antenna W1/W2: Webcam E1: Electromagnetic Locks

Note: Quantity of fan motor M3 may be more than 1 pic, specific quantity in kind shall prevail

Product Model: Freezer 550
Rated Voltage: 110~120V AC
Rated Frequency: 60Hz
Total Input Power: 500W
Total Current: 6.0A
Energy Consumption: 8.59kW. h/24h
defrosting input power: 500W
Total Capacity: 19.56cu ft (554L)
Refrigerant: R290/4.41oz (125g)
Protection Type: I
Design Pressure (High Side): 609PSIG
Design Pressure (Low Side): 145PSIG
Insulation Blowing Gas: C-pentane
Net Weight: 275.58lb (125kg)
Date Code: See barcode
FCC ID: 2BUXP-HH-US-001
IC: 35194-HHUS001
Contains FCC ID: XMR201706SC20A
Contains IC: 10224A-201707SC20A



CONFORMS TO UL STD. UL 541. CERTIFIED TO CSA STD. C22.2NO.128.
CONFORMS TO NSF/ANSI STD. 25

*This equipment is not for the display of time / temperature control for safety packaged foods

*Do not clean label with solven

*For indoor use only

*Refrigerant lower flammable limit 0.038 kg/m³

Trademark: HAA VENDING

Label location

