


AI Vending Machine

CIRCUIT DIAGRAM

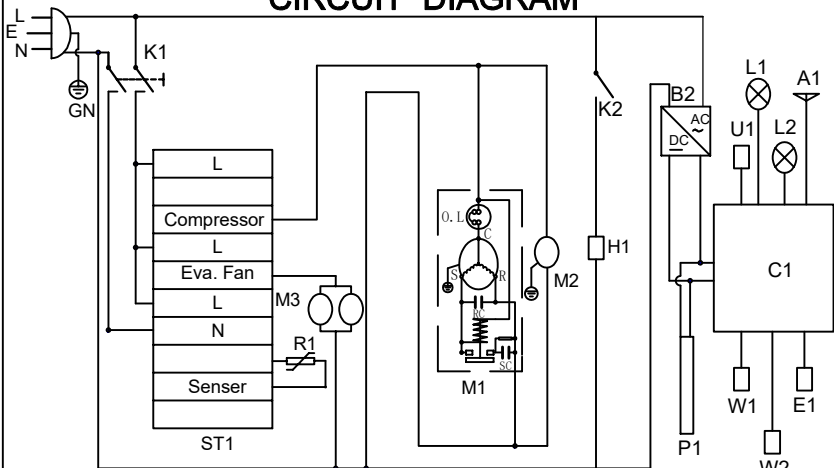

K1: Cooling Switch M1: Compressor M2: Condensor Fan M3: Evaporator Fans ST1: Digital Controller R1: Coldroom Sensor B2: Power Adapter P1: POS machines C1: Controller U1: Lithium Battery L1/L2: LED lamp A1: Antenna W1/W2: Webcam E1: Electromagnetic Locks K2: Door Heating Switch H1: Door Heating Wire

Product Model: Max 620
 Rated Voltage: 110~120V AC
 Rated Frequency: 60Hz
 Total Input Power: 400W
 Total Current: 2.85A
 Energy Consumption: 5.16 kW.h/24h
 Total Capacity: 21.2cu ft (600L)
 Refrigerant: R290/2.83oz (80g)
 Protection Type: I
 Design Pressure (High Side): 350PSIG
 Design Pressure (Low Side): 136PSIG
 Insulation Blowing Gas: C-pentane
 Net Weight: 291lb (132kg)
 Date Code: See barcode
 FCC ID: 2BUXP-HH-US-001
 IC: 35194-HHUS001
 Contains FCC ID: XMR201706SC20A
 Contains IC: 10224A-201707SC20A



CONFORMS TO UL STD. UL 541. CERTIFIED TO CSA STD. C22.2NO.128.
 CONFORMS TO NSF/ANSI STD. 25

*This equipment is not for the display of time / temperature control for safety packaged foods

*Do not clean label with solven

*For indoor use only

*Refrigerant lower flammable limit 0.038 kg/m³

Trademark: HAH VENDING

Label location

