

**WUHAN HAHA CONVENIENCE TECHNOLOGY
CO., LTD**

RF TEST REPORT

Report Type:

FCC Part 15.407 & ISSED RSS-247 RF report

Model:

Max 620S, Cooler 620S, Max 620, Cooler 620, Max 660,
Cooler 660, Max 660S, Cooler 660S, Plus 440, Cooler 440,
Freezer 550, Cooler 550

REPORT NUMBER:

2601B0310SHA-002

ISSUE DATE:

May 26, 2026

DOCUMENT CONTROL NUMBER:

TTRF15.407_V1 © 2017 Intertek



Applicant: WUHAN HAH CONVENIENCE TECHNOLOGY CO., LTD
Room 301, Building A, Wanqili Science and Innovation Center No. 8,
East Lake High-Tech Development Zone, Wuhan City, Hubei Province,
China

Manufacturer: WUHAN HAH CONVENIENCE TECHNOLOGY CO., LTD
Room 301, Building A, Wanqili Science and Innovation Center No. 8,
East Lake High-Tech Development Zone, Wuhan City, Hubei Province,
China

Product Name (PMN): AI Vending Machine
Type/Model (HVIN): Max 620S, Cooler 620S, Max 620, Cooler 620, Max 660,
Cooler 660, Max 660S, Cooler 660S, Plus 440, Cooler 440,
Freezer 550, Cooler 550

FCC ID: 2BUXP-HH-US-001

IC: 35194-HHUS001

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2024): Radio Frequency Devices (Subpart E)

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-247 Issue 4 (July 2025): Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 5 (February 2021) Amendment 2: General Requirements for Compliance of Radio Apparatus

PREPARED BY:

REVIEWED BY:

Alexander Li



Project Engineer
Alexander Li

Reviewer
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY.....	5
MEASUREMENT RESULT SUMMARY	6
1 GENERAL INFORMATION	7
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	7
1.2 TECHNICAL SPECIFICATION.....	8
1.3 WORKING FREQUENCIES FOR THIS REPORT	8
1.4 ANTENNA INFORMATION	10
1.5 DESCRIPTION OF TEST FACILITY	10
2 TEST SPECIFICATIONS.....	11
2.1 STANDARDS OR SPECIFICATION	11
2.2 MODE OF OPERATION DURING THE TEST	11
2.3 TEST SOFTWARE LIST	13
2.4 TEST PERIPHERALS LIST.....	13
2.5 TEST ENVIRONMENT CONDITION:.....	13
2.6 INSTRUMENT LIST	14
2.7 MEASUREMENT UNCERTAINTY.....	16
3 26 DB BANDWIDTH & 99% OCCUPIED BANDWIDTH	17
3.1 LIMIT	17
3.2 MEASUREMENT PROCEDURE	17
3.3 TEST CONFIGURATION	18
3.4 THE RESULTS OF 26 DB BANDWIDTH & 99% OCCUPIED BANDWIDTH.....	18
4 MINIMUM 6DB BANDWIDTH.....	19
4.1 LIMIT	19
4.2 MEASUREMENT PROCEDURE	19
4.3 TEST CONFIGURATION	19
4.4 THE RESULTS OF MINIMUM 6dB BANDWIDTH.....	19
5 MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P.....	20
5.1 LIMIT	20
5.2 MEASUREMENT PROCEDURE	21
5.3 TEST CONFIGURATION	22
5.4 TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P.....	22
6 POWER SPECTRUM DENSITY	23
6.1 LIMIT	23
6.2 MEASUREMENT PROCEDURE	24
6.3 TEST CONFIGURATION	25
6.4 TEST RESULTS OF POWER SPECTRUM DENSITY	25
7 RADIATED EMISSIONS	26
7.1 LIMIT	26
7.2 MEASUREMENT PROCEDURE	27
7.3 TEST CONFIGURATION	28
7.4 TEST RESULTS OF RADIATED EMISSIONS	30
8 POWER LINE CONDUCTED EMISSION.....	46
8.1 MEASUREMENT PROCEDURE	46

TEST REPORT

8.2	TEST CONFIGURATION	46
8.3	TEST RESULTS OF POWER LINE CONDUCTED EMISSION.....	47
9	FREQUENCY STABILITY.....	53
9.1	LIMIT	53
9.2	TEST RESULT	53
10	ANTENNA REQUIREMENT.....	54

Revision History

Report No.	Version	Description	Issued Date
2601B0310SHA-002	Rev. 01	Initial issue of report	May 26, 2026

Measurement result summary

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
26 dB Bandwidth & 99% Occupied Bandwidth	15.407(a)	RSS-247 Issue 3 Clause 6	Pass
Minimum 6dB Bandwidth	15.407(e)	RSS-247 Issue 3 Clause 6	Pass
Maximum Conducted Output Power	15.407(a)	RSS-247 Issue 3 Clause 6	Pass
Power spectral density	15.407(a)	RSS-247 Issue 3 Clause 6	Pass
Radiated emission	15.407(b) 15.205 15.209	RSS-247 Issue 3 Clause 6 RSS-Gen Issue 5 Clause 8.9&8.10	Pass
Power line conducted emission	15.407(b) 15.207	RSS-Gen Issue 5 Clause 8.8	Pass
Frequency Stability	15.407(g)	RSS-Gen Issue 5 Clause 8.11	Tested
Antenna requirement	15.203	-	Pass

Notes:

- 1: NA =Not Applicable
- 2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.
- 3: Additions, Deviations and Exclusions from Standards: None.

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	AI Vending Machine
Model name:	Max 620S, Cooler 620S, Max 620, Cooler 620, Max 660, Cooler 660, Max 660S, Cooler 660S, Plus 440, Cooler 440, Freezer 550, Cooler 550
Description of EUT:	The EUT is the AI Vending Machine, it supports 2.4GHz and 5GHz WIFI function, it also contains LTE module, FCC ID: XMR201706SC20A, IC: 10224A-201707SC20A. All models share the same wireless module. Plus 440 and Cooler 440 are identical except model name. Freezer 550 and Cooler 550 are identical except model name. Max 620S, Cooler 620S, Max 620, Cooler 620, Max 660, Cooler 660, Max 660S and Cooler 660S are identical except model name. After review, model Cooler 440, Cooler 550 and Cooler 660 were selected to perform all tests.
Rating:	Plus 440, Cooler 440: 110-120V/60Hz, 2.9A Freezer 550, Cooler 550: 110-120V/60Hz, 6A Max 620S, Cooler 620S, Max 620, Cooler 620, Max 660, Cooler 660, Max 660S, Cooler 660S: 110-120V/60Hz, 2.85A
Brand Name:	/
EUT type:	☐ Table top ☒ Floor standing
Software Version:	/
Hardware Version:	/
Sample Identification No.:	A251209-55-001, A251209-55-002, A251209-55-003,
Sample received date:	December 9, 2025
Date of test:	December 9, 2025 to May 26, 2026

TEST REPORT

1.2 Technical Specification

FCC

Frequency Range:	5150 ~ 5250MHz 5250 ~ 5350MHz 5470 ~ 5725MHz 5725 ~ 5850MHz
Support Standards:	802.11a, 802.11n(HT20), 802.11n(HT40), 802.11ac(VHT20), 802.11ac(VHT40), 802.11ac(VHT80)
Type of Modulation:	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Channel Number:	For 5180 ~ 5240MHz band: Channel 36 - 48 For 5260 ~ 5320MHz Band: Channel 52 - 64 For 5500 ~ 5700MHz Band: Channel 100 - 140 For 5745 ~ 5825MHz band: Channel 149 - 165

IC

Frequency Range:	5150 ~ 5250MHz 5250 ~ 5350MHz 5470 ~ 5600MHz 5650 ~ 5725MHz 5725 ~ 5850MHz
Support Standards:	802.11a, 802.11n(HT20), 802.11n(HT40), 802.11ac(VHT20), 802.11ac(VHT40), 802.11ac(VHT80)
Type of Modulation:	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Channel Number:	For 5180 ~ 5240MHz band: Channel 36 - 48 For 5260 ~ 5320MHz Band: Channel 52 - 64 For 5500 ~ 5590MHz Band: Channel 100 – 118 For 5660 ~ 5700MHz Band: Channel 132 – 140 For 5745 ~ 5825MHz band: Channel 149 - 165

1.3 Working Frequencies for this report

FCC

802.11a/n(HT20)/ac(VHT20)					
Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180MHz	40	5200MHz	44	5220MHz
48	5240MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	149	5745 MHz	153	5765 MHz

TEST REPORT

157	5785 MHz	161	5805 MHz	165	5825 MHz
802.11n(HT40)/ ac(VHT40)					
Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
151	5755 MHz	159	5795 MHz	-	-
802.11ac(VHT80)					
Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210MHz	58	5290MHz	106	5530 MHz
112	5610 MHz	155	5775 MHz	-	-

IC

802.11a/n(HT20)/ac(VHT20)					
Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180MHz	40	5200MHz	44	5220MHz
48	5240MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	149	5745 MHz	153	5765 MHz
157	5785 MHz	161	5805 MHz	165	5825 MHz
802.11n(HT40)/ ac(VHT40)					
Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550MHz
118	5590 MHz	134	5670 MHz	151	5755 MHz
159	5795 MHz				
802.11ac(VHT80)					
Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210MHz	58	5290MHz	106	5530 MHz
155	5775 MHz				

TEST REPORT

1.4 Antenna information

No.	Antenna Type	Gain	Note
1	Monopole antenna	5dBi	External type
2	Monopole antenna	5dBi	External type

Mode	Tx/Rx Function	Beamforming function	CDD function	Directional gain (dBi)
802.11a	1Tx/1Rx	NO	NO	-
802.11n(HT20)	2Tx/2Rx	NO	NO	5
802.11n(HT40)	2Tx/2Rx	NO	NO	5
802.11ac(VHT20)	2Tx/2Rx	NO	NO	5
802.11ac(VHT40)	2Tx/2Rx	NO	NO	5
802.11ac(VHT80)	2Tx/2Rx	NO	NO	5

Note: For 802.11a mode, it only supports 1TX.

For 802.11n/ac modes, it can support 2TX,

all transmit signals are *completely uncorrelated* with each other, Directional gain = 5dBi.

1.5 Description of Test Facility

Name:	Intertek Testing Services (Shanghai FTZ) Co., Ltd
Address:	Building 86, No. 1198 Qinzhou Road (North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L21189
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2024)

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

RSS-247 Issue 4 (July 2025)

RSS-Gen Issue 5 (April 2018)

KDB 789033 D02 v02r01

KDB 662911 D01 v02r01

2.2 Mode of operation during the test

While testing transmitting mode of EUT, the continuously transmission was applied by following software.

Software name	Manufacturer	Version	Supplied by
QATool_Dbg	--	--	Client

The lowest, middle and highest channel were tested as representatives.

Frequency Band (MHz)	Mode	Lowest (MHz)	Middle (MHz)	Highest (MHz)
5150~5250MHz	802.11a	5180	5200	5240
	802.11ac20	5180	5200	5240
	802.11ac40	5190	/	5230
	802.11ac80	5210	/	/
5250~5350MHz	802.11a	5260	5280	5320
	802.11ac20	5260	5280	5320
	802.11ac40	5270	/	5310
	802.11ac80	5290	/	/
5470~5725MHz	802.11a	5500	5580	5700
	802.11ac20	5500	5580	5700
	802.11ac40	5510	5550	5670
	802.11ac80	5530	/	5610
5725~5850MHz	802.11a	5745	5785	5825
	802.11ac20	5745	5785	5825
	802.11ac40	5755	/	5795
	802.11ac80	5775	/	/

TEST REPORT

After this pre-scan with the RF power, the following data rate was chosen to do the test as the worst case.

Frequency Band (MHz)	Mode	Worst case data rate
5150~5250	802.11a	6Mbps
	802.11ac20	MCS0
	802.11ac40	MCS0
	802.11ac80	MCS0
5250~5350	802.11a	6Mbps
	802.11ac20	MCS0
	802.11ac40	MCS0
	802.11ac80	MCS0
5500~5725	802.11a	6Mbps
	802.11ac20	MCS0
	802.11ac40	MCS0
	802.11ac80	MCS0
5725~5850	802.11a	6Mbps
	802.11ac20	MCS0
	802.11ac40	MCS0
	802.11ac80	MCS0

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	DELL 5480	

2.5 Test environment condition:

Test items	Temperature	Humidity
26 dB Bandwidth & 99% Occupied Bandwidth	23°C	52% RH
Minimum 6dB Bandwidth		
Maximum Conducted Output Power		
Power spectral density		
Radiated Emissions in restricted frequency bands	22°C	55% RH
Power line conducted emission	21°C	53% RH

2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Test Receiver	R&S	ESR7	EC 6194	2026-02-27
☒	Attenuator	Hua Xiang	Ts5-10db-6g	EC 6194-1	2026-12-06
☒	A.M.N.	R&S	ESH2-Z5	EC 3119	2026-07-23
☐	A.M.N.	R&S	ENV 216	EC 3393	2026-07-16
☐	A.M.N.	R&S	ENV4200	EC 3558	2026-06-05
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Test Receiver	R&S	ESIB 26	EC 3045	2026-08-18
☒	Test Receiver	R&S	ESR	EC6501	2026-09-10
☐	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2026-09-11
☒	TRILOG broadband Antenna	Schwarzbeck	VULB9168	EC 6402	2026-03-19
☒	Pre-amplifier	R&S	AFS42-00101800-25-S-42	EC 5262	2026-11-06
☐	Pre-amplifier	Tonscend	tap01018050	EC 6432-1	2026-12-03
☐	Horn antenna	Tonscend	bha9120d	EC 6432-2	2026-03-20
☒	Horn antenna	ETS	3117	EC 4792-1	2026-09-13
☒	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2026-09-12
☒	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2026-08-10
☒	Horn antenna	ETS	3116c	EC 5955	2026-08-14
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2026-03-05
☒	Vector Signal Generator	Agilent	N5182B	EC 5175	2026-03-05
☐	Universal Radio Communication Tester	R&S	CMW500	EC5944	2026-03-05
☐	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2026-03-07

TEST REPORT

☐	Mobile Test System	Litepoint	Iqxel	EC 5176	2027-01-10
☐	Test Receiver	R&S	ESCI 7	EC 4501	2026-03-09
☐	Climate chamber	GWS	MT3065	EC 6021	2026-03-07
☐	Spectrum Analyzer	Keysight	N9030B	EC 6078	2026-03-18
Tet Site					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Shielded room	Zhongyu	-	EC 2838	2027-01-09
☐	Shielded room	Zhongyu	-	EC 2839	2027-01-09
☒	Semi-anechoic chamber	Albatross project	-	EC 3048	2026-07-11
☐	Fully-anechoic chamber	Albatross project	-	EC 3047	2026-07-11
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Thermo-Hygrograph	Testo	175h1	EC 6640	2026-08-29
☐	Thermo-Hygrograph	Testo	175h1	EC 6641	2026-08-29
☒	Thermo-Hygrograph	Testo	175h1	EC6642	2026-08-29
☒	Thermo-Hygrograph	Testo	175h1	EC 6643	2026-08-29
☐	Thermo-Hygrograph	Testo	175h1	EC 6644	2026-08-29
☐	Pressure meter	YM3	Shanghai Mengde	EC 3320	2026-08-16

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	$\pm 0.74\text{dB}$
Radiated Emissions in restricted frequency bands below 1GHz	$\pm 4.90\text{dB}$
Radiated Emissions in restricted frequency bands above 1GHz	$\pm 5.02\text{dB}$
Emission outside the frequency band	$\pm 2.89\text{dB}$
Power line conducted emission	$\pm 3.19\text{dB}$

TEST REPORT

3 26 dB Bandwidth & 99% Occupied Bandwidth

Test result: Pass

3.1 Limit

None

3.2 Measurement Procedure

The EUT was tested according to test procedure of "KDB789033 D02 General UNII Test Procedures New Rules"

26 dB Bandwidth


- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Occupied Bandwidth

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

3.3 Test Configuration

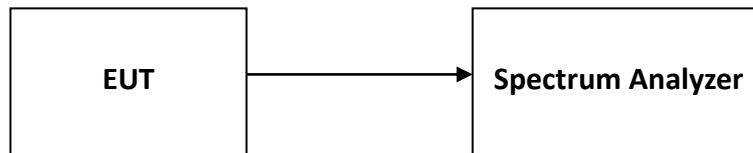

3.4 The results of 26 dB Bandwidth & 99% Occupied Bandwidth

Please refer to Appendix B.

4 Minimum 6dB Bandwidth

Test result: Pass

4.1 Limit


For systems using digital modulation techniques that may operate in the 5725 - 5850 MHz band, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.2 Measurement Procedure

The EUT was tested according to test procedure of “KDB789033 D02 General UNII Test Procedures New Rules”

- a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

4.3 Test Configuration

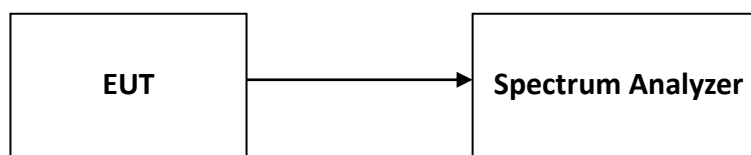

4.4 The results of Minimum 6dB Bandwidth

Please refer to Appendix B.

5 Maximum conducted output power and e.i.r.p.

Test result: Pass

5.1 Limit

☐ For an outdoor access point operating in the band 5.15-5.25GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1W provided the maximum antenna gain does not exceed 6dBi.

The maximum e.i.r.p. at any elevation angle above 30 degrees from the horizon must not exceed 125mW (21 dBm).

☒ For an indoor access point operating in the band 5.15-5.25GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6dBi.

☐ For fixed point-to-point access points operating in the band 5.15-5.25GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1W.

☐ For client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi.

☒ For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10\log B$, where B is the 26dB emission bandwidth in megahertz.

☒ For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1W.

☒ For Frequency Band 5150-5250 MHz, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz.

☒ For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 99% emission bandwidth in megahertz.

☒ For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz.

☒ For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

TEST REPORT

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.2 Measurement Procedure

The EUT was tested according to test procedure of “KDB789033 D02 General UNII Test Procedures New Rules”


For 802.11a and 802.11n(HT20) mode:

- (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.
The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- (ii) If the transmitter does not transmit continuously, measure the duty cycle, x , of the transmitter output signal as described in II.B.
- (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25%).

For 802.11n(HT40) and 802.11ac(VHT80):

- (i) Measure the duty cycle, x , of the transmitter output signal as described in II.B.
- (ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (iii) Set RBW = 1 MHz.
- (iv) Set VBW $\geq$ 3 MHz.
- (v) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- (vi) Sweep time = auto.
- (vii) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
- (viii) Do not use sweep triggering. Allow the sweep to “free run.”
- (ix) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
- (x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (xi) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log (1/0.25) = 6 \text{ dB}$ if the duty cycle is 25%.

5.3 Test Configuration

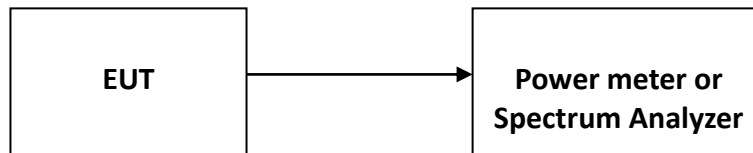

5.4 Test Results of Maximum conducted output power and e.i.r.p.

Please refer to Appendix B.

6 Power spectrum density

Test result: Pass

6.1 Limit

- ☐ For an outdoor access point operating in the band 5.15-5.25GHz, the maximum power spectral density shall not exceed 17dBm in any 1 megahertz band.
- ☒ For an indoor access point operating in the band 5.15-5.25GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.
- ☐ For client devices in the 5.15-5.25GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.
- ☒ For the 5.25-5.35 GHz and 5.47-5.725GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.
- ☒ For the band 5.725-5.85GHz, the maximum power spectral density shall not exceed 30dBm in any 500kHz band.
- ☒ For the 5.15-5.25GHz band, the e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.
- ☒ For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.
- ☒ For the 5.725-5.85GHz band, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the less of original and original + (6 - antenna gain - beamforming gain).


6.2 Measurement Procedure

The EUT was tested according to test procedure of “KDB789033 D02 General UNII Test Procedures New Rules”

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power....” (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
3. Make the following adjustments to the peak value of the spectrum, if applicable:
 - a) If Method SA-2 or SA-2 Alternative was used, add $10 \log (1/x)$, where x is the duty cycle, to the peak of the spectrum.
 - b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
4. The result is the Maximum PSD over 1 MHz reference bandwidth.
5. For devices operating in the bands 5.15 5.25 GHz, 5.25 5.35 GHz, and 5.47 5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725 5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:
 - a) Set $RBW \geq 1/T$, where T is defined in II.B.I.a).
 - b) Set $VBW \geq 3 RBW$.
 - c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
 - d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
 - e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for steps 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

6.3 Test Configuration

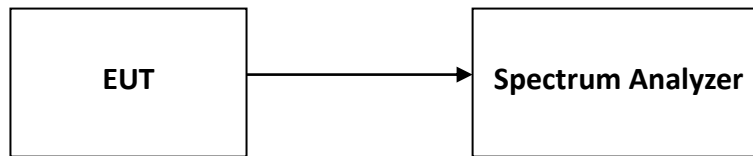

6.4 Test Results of Power spectrum density

Please refer to Appendix B.

7 Radiated Emissions

Test result: Pass

7.1 Limit

The radiated emissions which fall in the restricted bands, and the radiated emissions below 1GHz, must comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

The radiated emissions which fall outside the restrict bands, should comply with the EIRP limit as below:

For transmitters operating in the 5.15 - 5.25 / 5.25 - 5.35 / 5.47 - 5.725GHz band:

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength (3m) (dBμV/m)
<5150	-27	68.20
>5350		
<5470		
>5725		

For transmitters operating in the 5.725 - 5.85GHz band:

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength (3m) (dBμV/m)
<5650	-27	68.20
5650 ~ 5700	-27 ~ 10	68.20 ~ 105.20
5700 ~ 5720	10 ~ 15.6	105.20 ~ 110.80
5720 ~ 5725	15.6 ~ 27	110.80 ~ 122.20
5850 ~ 5855	27 ~ 15.6	122.20 ~ 110.80
5855 ~ 5875	15.6 ~ 10	110.80 ~ 105.20
5875 ~ 5925	10 ~ -27	105.20 ~ 68.20
>5925	-27	68.20

TEST REPORT

7.2 Measurement Procedure

For Radiated emission below 30MHz:

- a) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) Both X and Y axes of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz:


- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or $3 \times \text{RBW}$ (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported

7.3 Test Configuration


For Radiated emission below 30MHz:

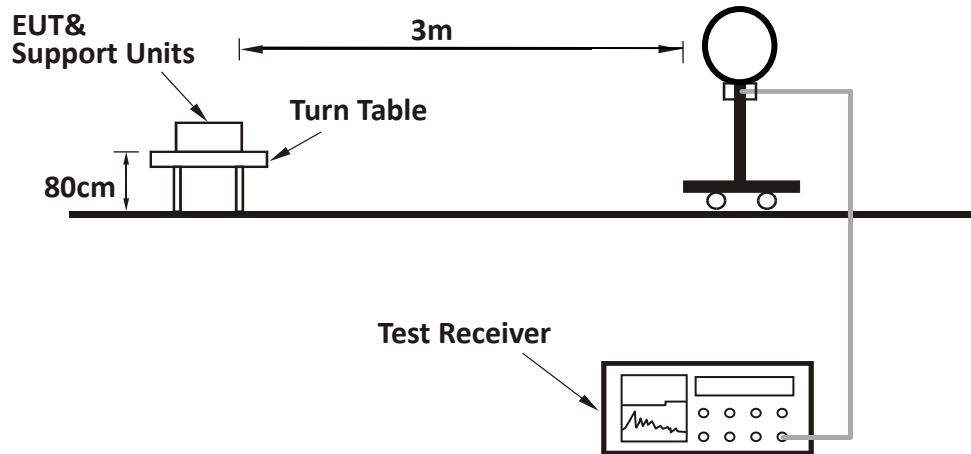

For Radiated emission 30MHz to 1GHz:

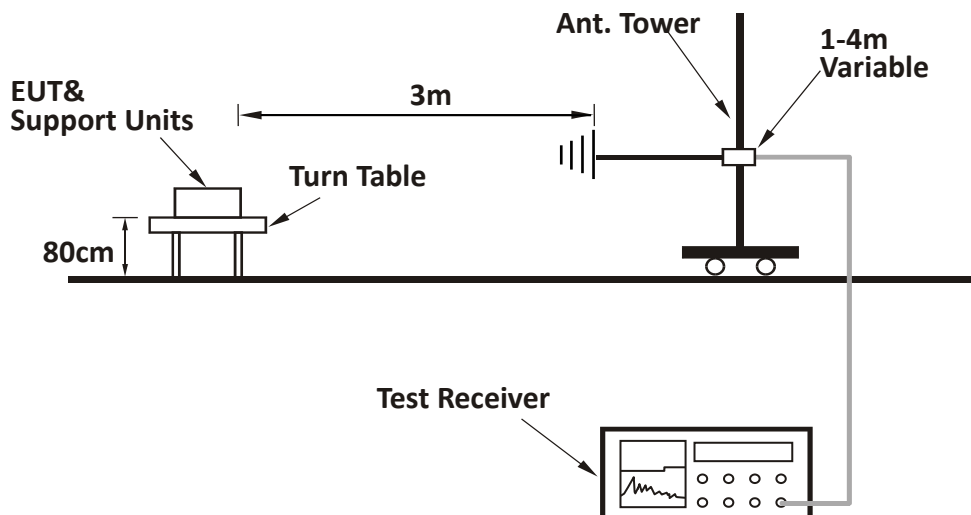

For Radiated emission above 1GHz:

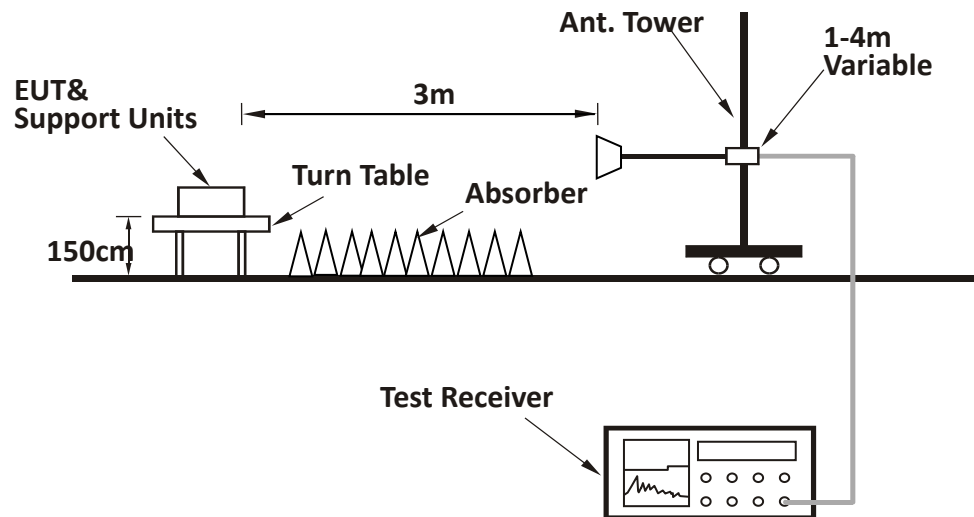


7.4 Test Results of Radiated Emissions

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

The worst waveform from 30MHz to 1000MHz is listed as below:

Model Cooler 440:


Horizontal

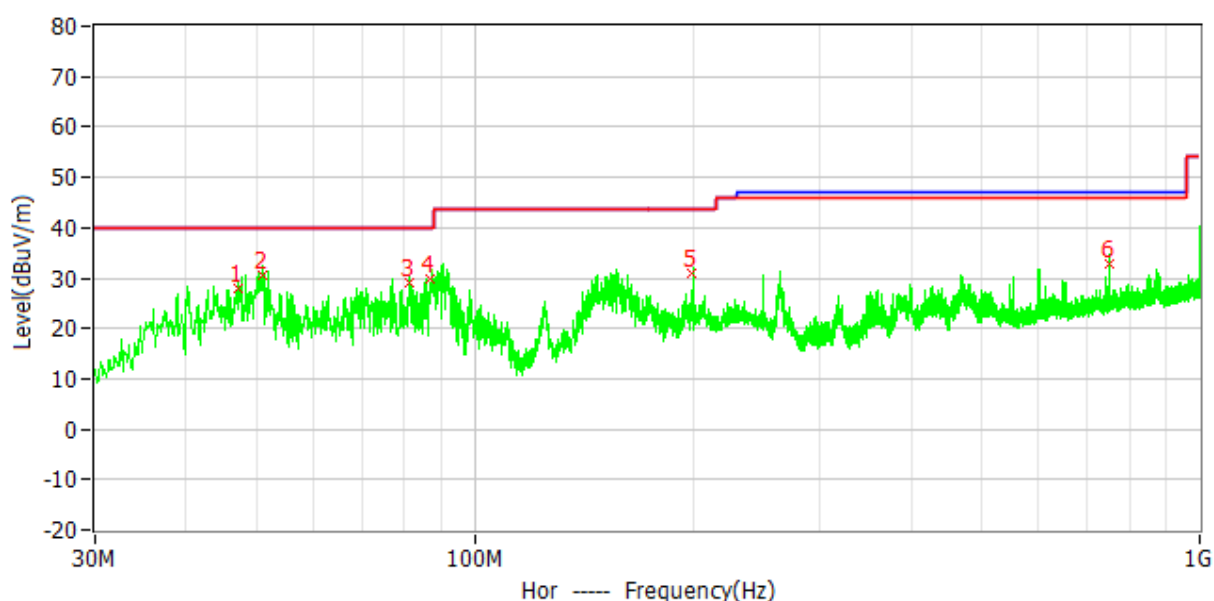

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
1*	47.272MHz	40.0	27.9	-12.1	14.3	13.6	QP	Hor
2*	50.927MHz	40.0	30.7	-9.3	16.8	13.9	QP	Hor
3*	81.512MHz	40.0	28.9	-11.1	19.5	9.4	QP	Hor
4*	86.702MHz	40.0	29.7	-10.3	20.9	8.8	QP	Hor
5*	199.597MHz	43.5	30.8	-12.7	19.0	11.8	QP	Hor
6*	750.011MHz	46.0	32.7	-13.3	6.6	26.1	QP	Hor

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
 2. Level = Original Receiver Reading + Correct Factor
 3. Delta = Level - Limit
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Vertical

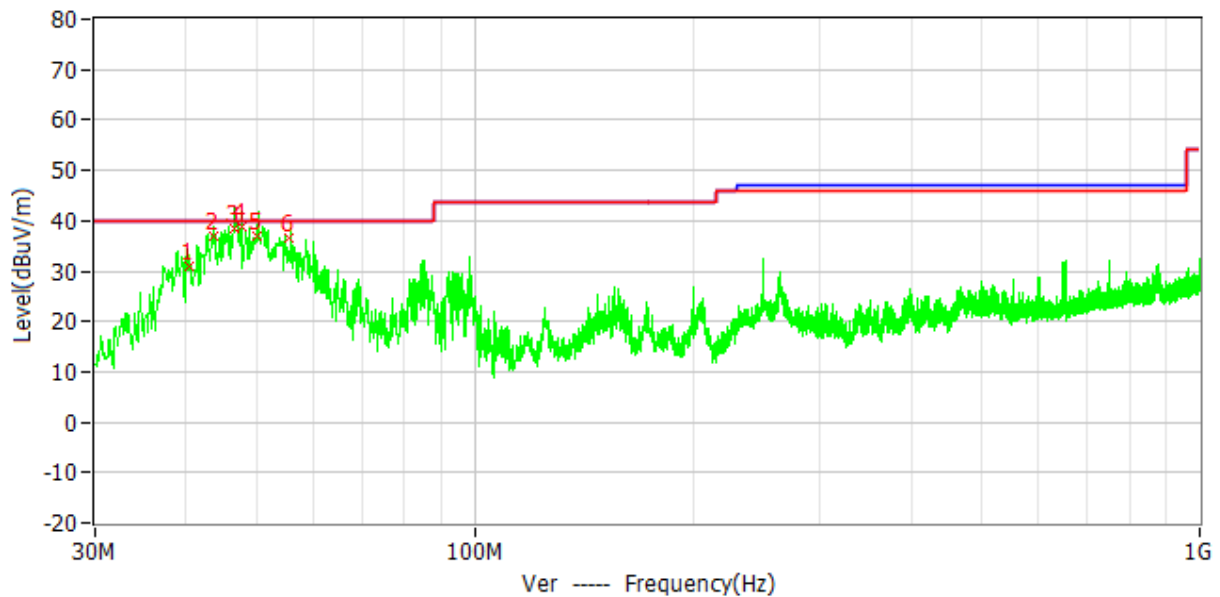

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
1*	40.369MHz	40.0	30.8	-9.2	17.5	13.3	QP	Ver
2*	43.816MHz	40.0	37.1	-2.9	23.6	13.5	QP	Ver
3*	46.726MHz	40.0	38.4	-1.6	24.8	13.6	QP	Ver
4*	47.824MHz	40.0	38.7	-1.3	25.0	13.7	QP	Ver
5*	50.047MHz	40.0	37.1	-2.9	23.3	13.8	QP	Ver
6*	55.579MHz	40.0	36.4	-3.6	22.8	13.6	QP	Ver

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor


3. Delta = Level - Limit

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

TEST REPORT

Model Cooler 550:

Horizontal

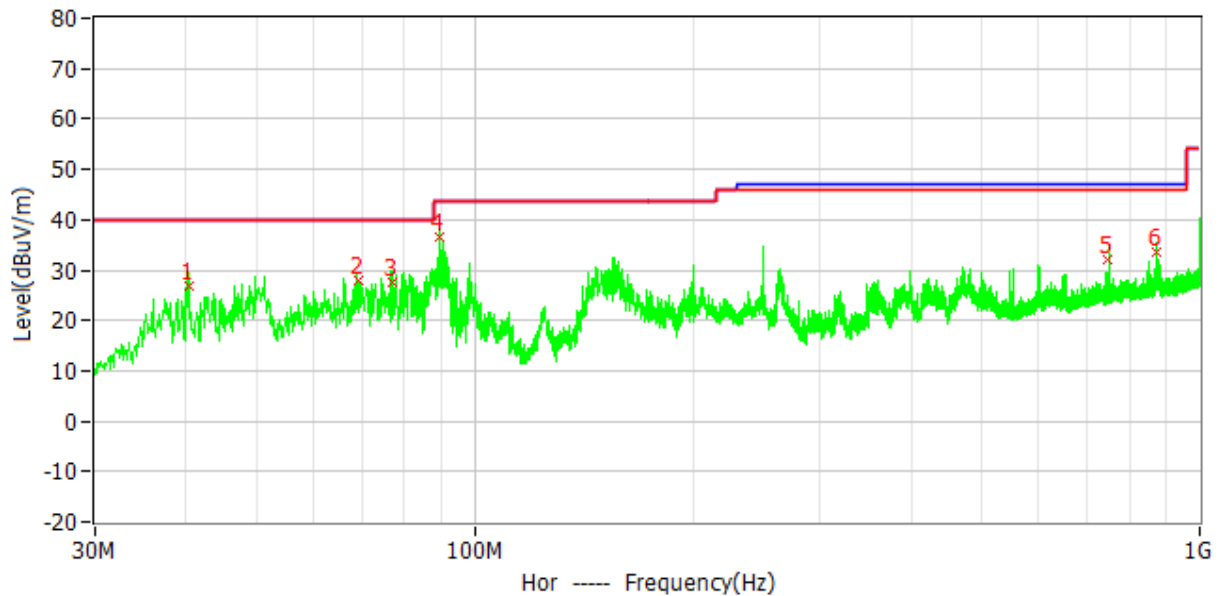

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
1*	40.322MHz	40.0	26.7	-13.3	13.4	13.3	QP	Hor
2*	69.129MHz	40.0	27.9	-12.1	15.8	12.1	QP	Hor
3*	77.209MHz	40.0	27.5	-12.5	17.2	10.3	QP	Hor
4*	89.288MHz	43.5	36.7	-6.8	28.1	8.6	QP	Hor
5*	746.094MHz	46.0	31.9	-14.1	5.9	26.0	QP	Hor
6*	872.345MHz	46.0	33.5	-12.5	6.0	27.5	QP	Hor

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.


2. Level = Original Receiver Reading + Correct Factor

3. Delta = Level - Limit

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

TEST REPORT

Vertical

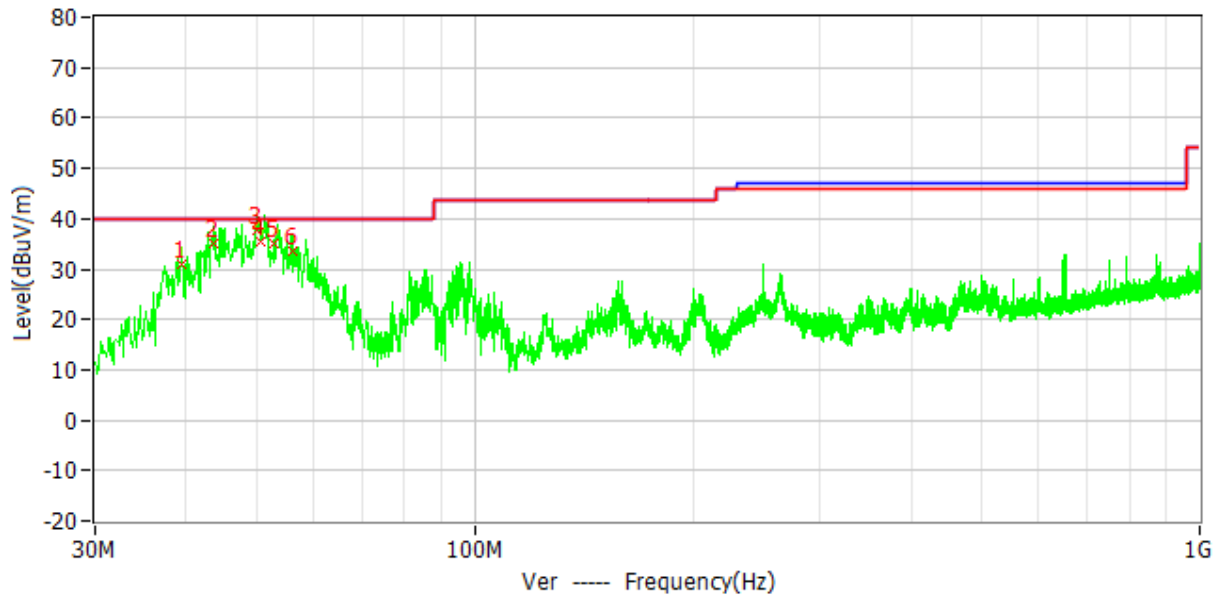

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
1*	39.517MHz	40.0	30.9	-9.1	17.7	13.2	QP	Ver
2*	43.822MHz	40.0	34.9	-5.1	21.4	13.5	QP	Ver
3*	50.092MHz	40.0	37.5	-2.5	23.7	13.8	QP	Ver
4*	50.877MHz	40.0	35.5	-4.5	21.6	13.9	QP	Ver
5*	52.983MHz	40.0	35.2	-4.8	21.5	13.7	QP	Ver
6*	56.015MHz	40.0	33.5	-6.5	19.9	13.6	QP	Ver

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor


3. Delta = Level - Limit

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

TEST REPORT

Model Cooler 660:

Horizontal

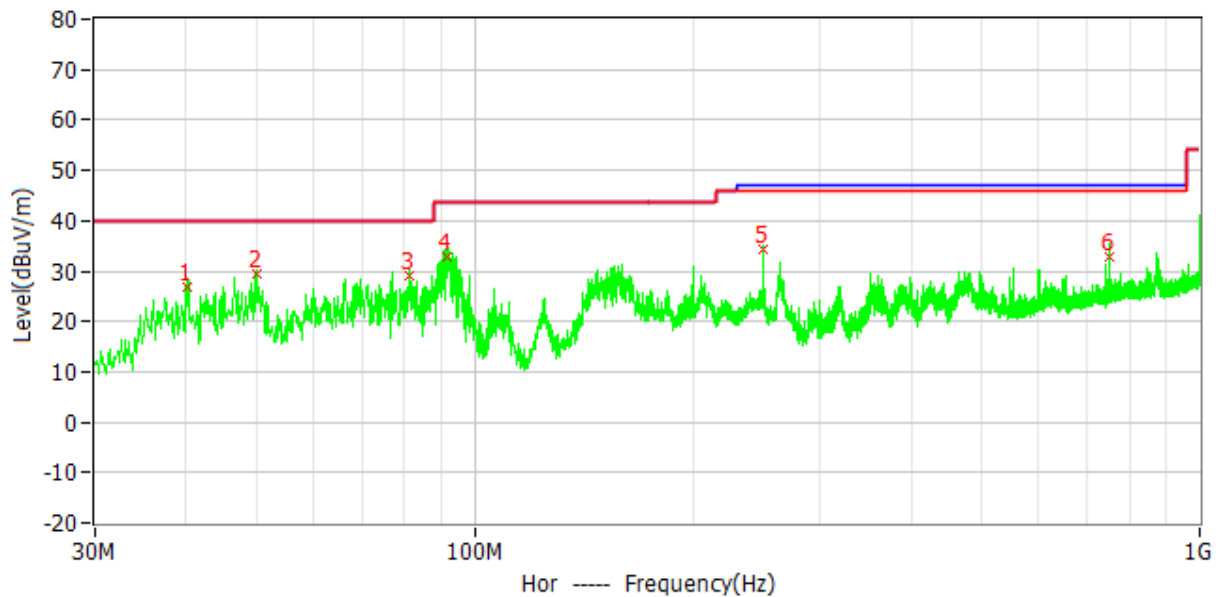

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
1*	40.314MHz	40.0	26.8	-13.2	13.5	13.3	QP	Hor
2*	50.066MHz	40.0	29.6	-10.4	15.8	13.8	QP	Hor
3*	81.212MHz	40.0	28.9	-11.1	19.5	9.4	QP	Hor
4*	91.557MHz	43.5	32.9	-10.6	24.1	8.8	QP	Hor
5*	249.981MHz	46.0	34.4	-11.6	20.4	14.0	QP	Hor
6*	750.034MHz	46.0	32.8	-13.2	6.7	26.1	QP	Hor


Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor

3. Delta = Level - Limit

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Vertical

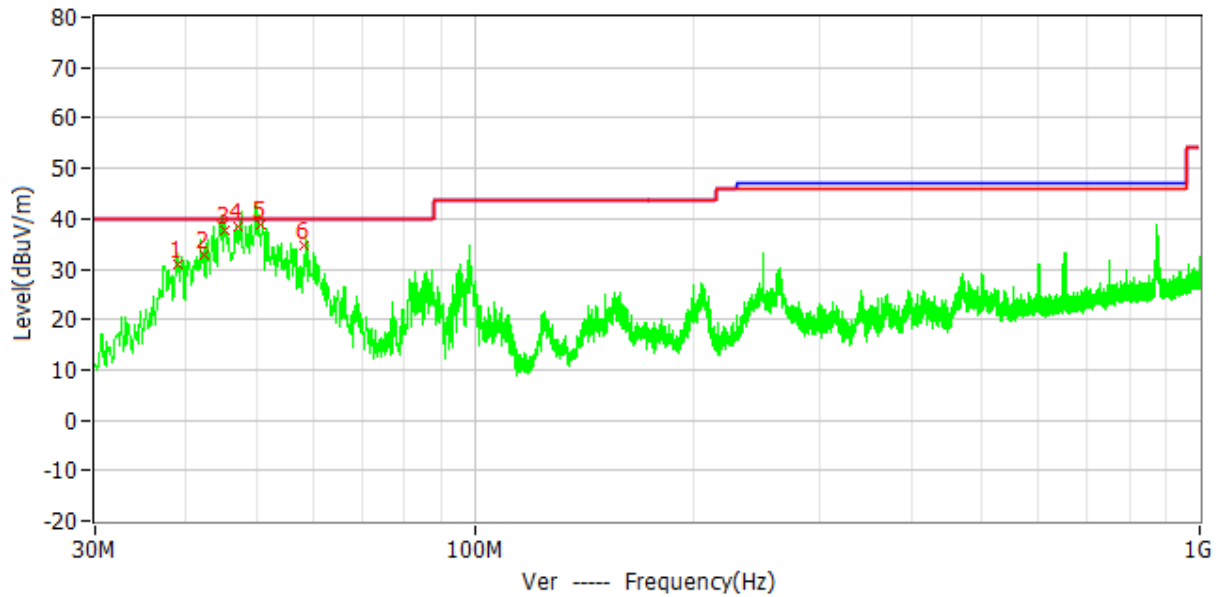

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
1*	38.951MHz	40.0	30.8	-9.2	17.7	13.1	QP	Ver
2*	42.313MHz	40.0	32.9	-7.1	19.5	13.4	QP	Ver
3*	45.203MHz	40.0	37.5	-2.5	23.9	13.6	QP	Ver
4*	47.297MHz	40.0	38.6	-1.4	24.9	13.7	QP	Ver
5*	50.638MHz	40.0	38.9	-1.1	25.1	13.8	QP	Ver
6*	58.390MHz	40.0	34.8	-5.2	21.3	13.5	QP	Ver

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor



3. Delta = Level - Limit

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

TEST REPORT

Test result above 1GHz:

802.11a mode, low channel as the worst case, and the test plots were recorded.

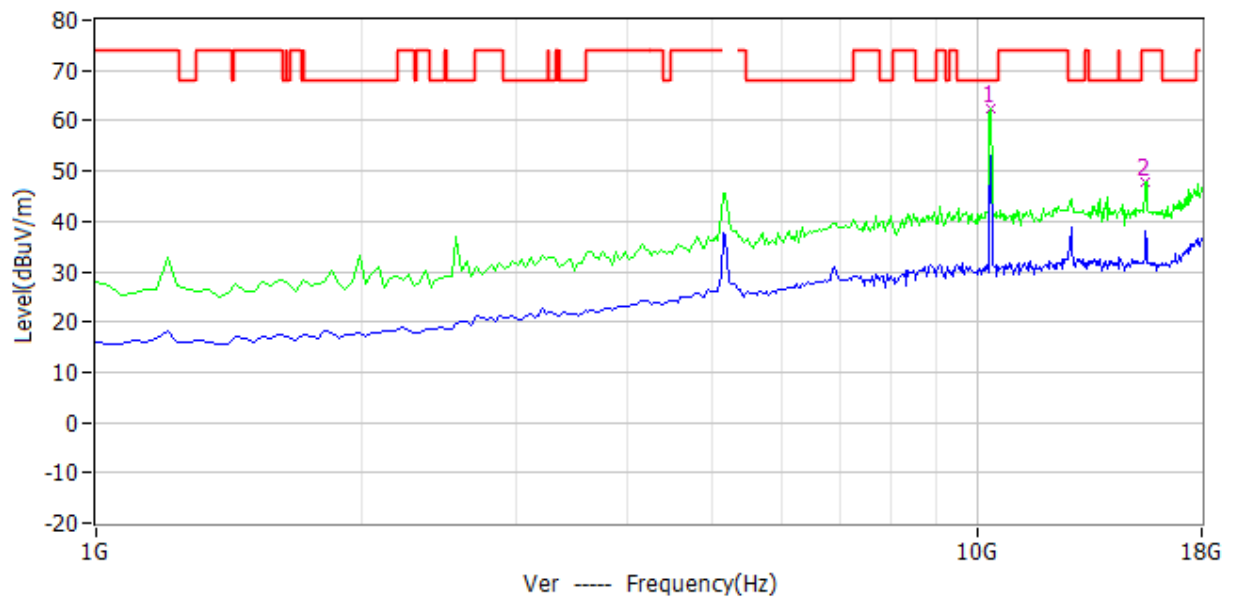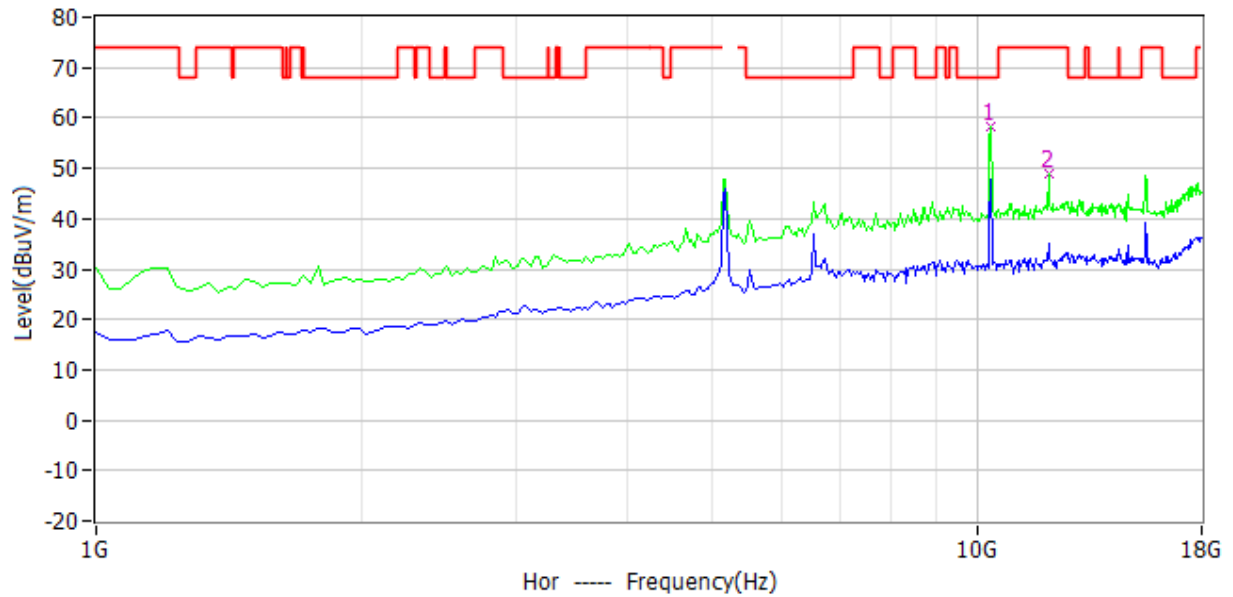

TEST REPORT

The emission was conducted from 1GHz to 40GHz

U-NII-1 Band:

802.11a

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	5150.00	58.30	74.00	15.70	PK
	H	5150.00	46.40	54.00	7.60	AV
	V	5150.00	57.80	74.00	16.20	PK
	V	5150.00	46.70	54.00	7.30	AV
	H	10360.00	62.39	68.20	5.81	PK
	V	10360.00	58.31	68.20	9.89	PK
M	H	10440.00	39.70	68.20	28.50	PK
	V	10440.00	39.74	68.20	28.46	PK
H	H	5350.00	59.66	74.00	14.34	PK
	H	5350.00	46.50	54.00	7.50	AV
	V	5350.00	57.50	74.00	16.50	PK
	V	5350.00	46.30	54.00	7.70	AV
	H	10480.00	41.50	68.20	26.70	PK
	V	10480.00	43.60	68.20	24.60	PK

802.11ac20

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	5150.00	57.60	74.00	16.40	PK
	H	5150.00	47.10	54.00	6.90	AV
	V	5150.00	56.90	74.00	17.10	PK
	V	5150.00	46.50	54.00	7.50	AV
	H	10360.00	42.40	68.20	25.80	PK
	V	10360.00	44.30	68.20	23.90	PK

TEST REPORT

M	H	10440.00	42.40	68.20	25.80	PK
	V	10440.00	46.30	68.20	21.90	PK
H	H	5350.00	58.30	74.00	15.70	PK
	H	5350.00	46.40	54.00	7.60	AV
	V	5350.00	57.80	74.00	16.20	PK
	V	5350.00	46.60	54.00	7.40	AV
	H	10480.00	39.01	68.20	29.19	PK
	V	10480.00	44.60	68.20	23.60	PK

802.11ac40

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	5150.00	59.70	74.00	14.30	PK
	H	5150.00	47.10	54.00	6.90	AV
	V	5150.00	60.00	74.00	14.00	PK
	V	5150.00	48.00	54.00	6.00	AV
	H	10380.00	41.95	68.20	26.25	PK
	V	10380.00	42.57	68.20	25.63	PK
H	H	5350.00	58.00	74.00	16.00	PK
	H	5350.00	46.70	54.00	7.30	AV
	V	5350.00	58.50	74.00	15.50	PK
	V	5350.00	46.60	54.00	7.40	AV
	H	10460.00	41.20	68.20	27.00	PK
	V	10460.00	42.65	68.20	25.55	PK

TEST REPORT

802.11ac80

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
M	H	5150.00	59.80	74.00	14.20	PK
	H	5150.00	47.30	54.00	6.70	AV
	V	5150.00	61.50	74.00	12.50	PK
	V	5150.00	47.80	54.00	6.20	AV
	H	10420.00	40.70	68.20	27.50	PK
	V	10420.00	42.42	68.20	25.78	PK

TEST REPORT

U-NII-2A Band:

802.11a

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	10520.00	40.02	68.20	28.18	PK
	V	10520.00	47.93	68.20	20.27	PK
M	H	10600.00	39.31	68.20	28.89	PK
	V	10600.00	42.05	68.20	26.15	PK
H	H	5350.00	59.27	74.00	14.73	PK
	H	5350.00	47.24	54.00	6.76	AV
	V	5350.00	60.36	74.00	13.64	PK
	V	5350.00	46.90	54.00	7.10	AV
	H	10640.00	39.36	68.20	28.84	PK
	V	10640.00	44.33	68.20	23.87	PK

802.11ac20

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	10520.00	41.32	68.20	26.88	PK
	V	10520.00	48.45	68.20	19.75	PK
M	H	10600.00	40.37	68.20	27.83	PK
	V	10600.00	43.12	68.20	25.08	PK
H	H	5350.00	58.32	74.00	15.68	PK
	H	5350.00	48.17	54.00	5.83	AV
	V	5350.00	59.86	74.00	14.14	PK
	V	5350.00	48.03	54.00	5.97	AV
	H	10640.00	41.32	68.20	26.88	PK
	V	10640.00	43.62	68.20	24.58	PK

TEST REPORT

802.11ac40

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	10540.00	39.80	68.20	28.40	PK
	V	10540.00	44.08	68.20	24.12	PK
H	H	5350.00	59.40	74.00	14.60	PK
	H	5350.00	47.60	54.00	6.40	AV
	V	5350.00	63.90	74.00	10.10	PK
	V	5350.00	47.90	54.00	6.10	AV
	H	10620.00	40.54	68.20	27.66	PK
	V	10620.00	42.35	68.20	25.85	PK

802.11ac80

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	5350.00	65.45	74.00	8.55	PK
	H	5350.00	47.20	54.00	6.80	AV
	V	5350.00	66.45	74.00	7.55	PK
	V	5350.00	47.90	54.00	6.10	AV
	H	10580.00	40.34	68.20	27.86	PK
	V	10580.00	43.29	68.20	24.91	PK

TEST REPORT

U-NII-2C Band:

802.11a

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	5460.00	58.00	74.00	16.00	PK
	H	5460.00	46.90	54.00	7.10	AV
	V	5460.00	58.20	74.00	15.80	PK
	V	5460.00	47.00	54.00	7.00	AV
	H	11000.00	41.15	68.20	27.05	PK
	V	11000.00	44.22	68.20	23.98	PK
M	H	11160.00	40.80	68.20	27.40	PK
	V	11160.00	43.74	68.20	24.46	PK
H	H	11400.00	40.65	68.20	27.55	PK
	V	11400.00	43.93	68.20	24.27	PK

802.11ac20

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	5460.00	58.10	74.00	15.90	PK
	H	5460.00	47.40	54.00	6.60	AV
	V	5460.00	59.10	74.00	14.90	PK
	V	5460.00	48.10	54.00	5.90	AV
	H	11000.00	40.13	68.20	28.07	PK
	V	11000.00	42.45	68.20	25.75	PK
M	H	11160.00	41.30	68.20	26.90	PK
	V	11160.00	43.45	68.20	24.75	PK
H	H	11400.00	40.12	68.20	28.08	PK
	V	11400.00	42.86	68.20	25.34	PK

TEST REPORT

802.11ac40

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	5460.00	58.30	74.00	15.70	PK
	H	5460.00	46.70	54.00	7.30	AV
	V	5460.00	58.50	74.00	15.50	PK
	V	5460.00	47.80	54.00	6.20	AV
	H	11020.00	40.34	68.20	27.86	PK
	V	11020.00	41.43	68.20	26.77	PK
M	H	11100.00	40.14	68.20	28.06	PK
	V	11100.00	42.31	68.20	25.89	PK
H	H	11340.00	40.23	68.20	27.97	PK
	V	11340.00	42.50	68.20	25.70	PK

802.11ac80

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	5460.00	59.50	74.00	14.50	PK
	H	5460.00	47.00	54.00	7.00	AV
	V	5460.00	63.80	74.00	10.20	PK
	V	5460.00	48.05	54.00	5.95	AV
	H	11060.00	40.56	68.20	27.64	PK
	V	11060.00	42.34	68.20	25.86	PK
H	H	11220.00	41.40	68.20	26.80	PK
	V	11220.00	44.24	68.20	23.96	PK

TEST REPORT

U-NII-3 Band:

802.11a

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	11490.00	41.50	68.20	26.70	PK
	V	11490.00	44.10	68.20	24.10	PK
M	H	11570.00	41.90	68.20	26.30	PK
	V	11570.00	46.85	68.20	21.35	PK
H	H	11650.00	41.55	68.20	26.65	PK
	V	11650.00	44.29	68.20	23.91	PK

802.11ac20

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	11490.00	40.70	68.20	27.50	PK
	V	11490.00	43.28	68.20	24.92	PK
M	H	11570.00	41.10	68.20	27.10	PK
	V	11570.00	43.38	68.20	24.82	PK
H	H	11650.00	41.30	68.20	26.90	PK
	V	11650.00	45.05	68.20	23.15	PK

802.11ac40

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	11510.00	41.24	68.20	26.96	PK
	V	11510.00	43.18	68.20	25.02	PK
H	H	11590.00	41.42	68.20	26.78	PK
	V	11598.40	44.20	68.20	24.00	PK

TEST REPORT

802.11ac80

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	11550.00	41.20	68.20	27.00	PK
	V	11550.00	43.38	68.20	24.82	PK

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
Limit = 40.00dBuV/m.
Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;
Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m;
Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

8 Power line conducted emission

Test result: Pass


8.1 Measurement Procedure

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.



8.2 Test Configuration

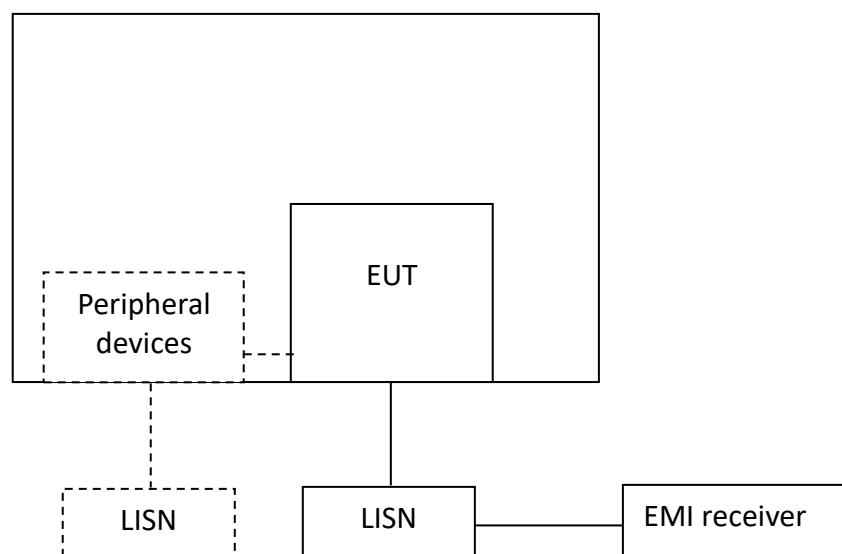

8.3 Test Results of Power line conducted emission

Cooler 440:

Test Voltage: AC 120V, 60Hz

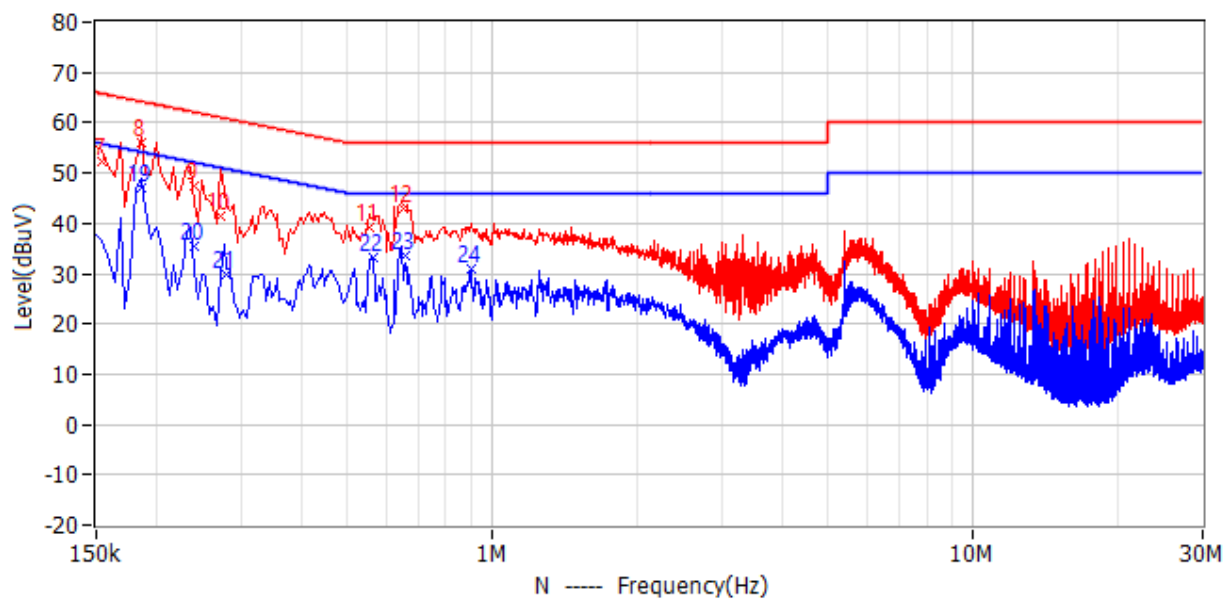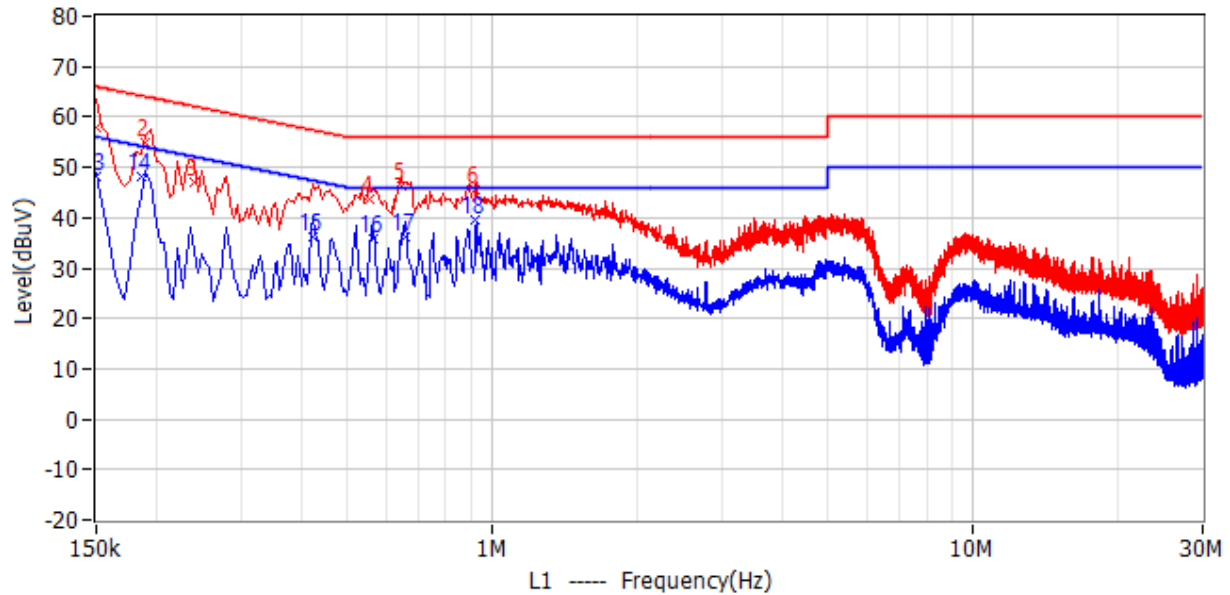

TEST REPORT

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
1	150.000kHz	66.00	57.94	-8.06	47.74	10.20	QP	L1
2	190.500kHz	64.01	55.01	-9.00	44.81	10.20	QP	L1
3	240.000kHz	62.10	47.12	-14.98	36.92	10.20	QP	L1
4	555.000kHz	56.00	43.50	-12.50	33.30	10.20	QP	L1
5	645.000kHz	56.00	46.31	-9.69	36.11	10.20	QP	L1
6	924.000kHz	56.00	45.45	-10.55	35.15	10.30	QP	L1
7	154.500kHz	65.75	52.10	-13.65	42.00	10.10	QP	N
8	186.000kHz	64.21	56.05	-8.16	45.95	10.10	QP	N
9	240.000kHz	62.10	47.40	-14.70	37.30	10.10	QP	N
10	271.500kHz	61.07	41.35	-19.72	31.25	10.10	QP	N
11	555.000kHz	56.00	39.28	-16.72	29.08	10.20	QP	N
12	654.000kHz	56.00	42.83	-13.17	32.63	10.20	QP	N
13	150.000kHz	56.00	48.14	-7.86	37.94	10.20	CAV	L1
14	186.000kHz	54.21	48.24	-5.97	38.04	10.20	CAV	L1
15	424.500kHz	47.36	36.22	-11.14	26.02	10.20	CAV	L1
16	564.000kHz	46.00	35.99	-10.01	25.79	10.20	CAV	L1
17	658.500kHz	46.00	36.26	-9.74	26.06	10.20	CAV	L1
18	924.000kHz	46.00	39.71	-6.29	29.41	10.30	CAV	L1
19	186.000kHz	54.21	47.10	-7.11	37.00	10.10	CAV	N
20	240.000kHz	52.10	35.27	-16.83	25.17	10.10	CAV	N
21	280.500kHz	50.80	29.83	-20.97	19.73	10.10	CAV	N
22	564.000kHz	46.00	33.12	-12.88	22.92	10.20	CAV	N
23	658.500kHz	46.00	33.73	-12.27	23.53	10.20	CAV	N
24	901.500kHz	46.00	31.06	-14.94	20.76	10.30	CAV	N

Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor



3. Delta = Level - Limit

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

TEST REPORT

Cooler 550:

Test Voltage: AC 120V, 60Hz

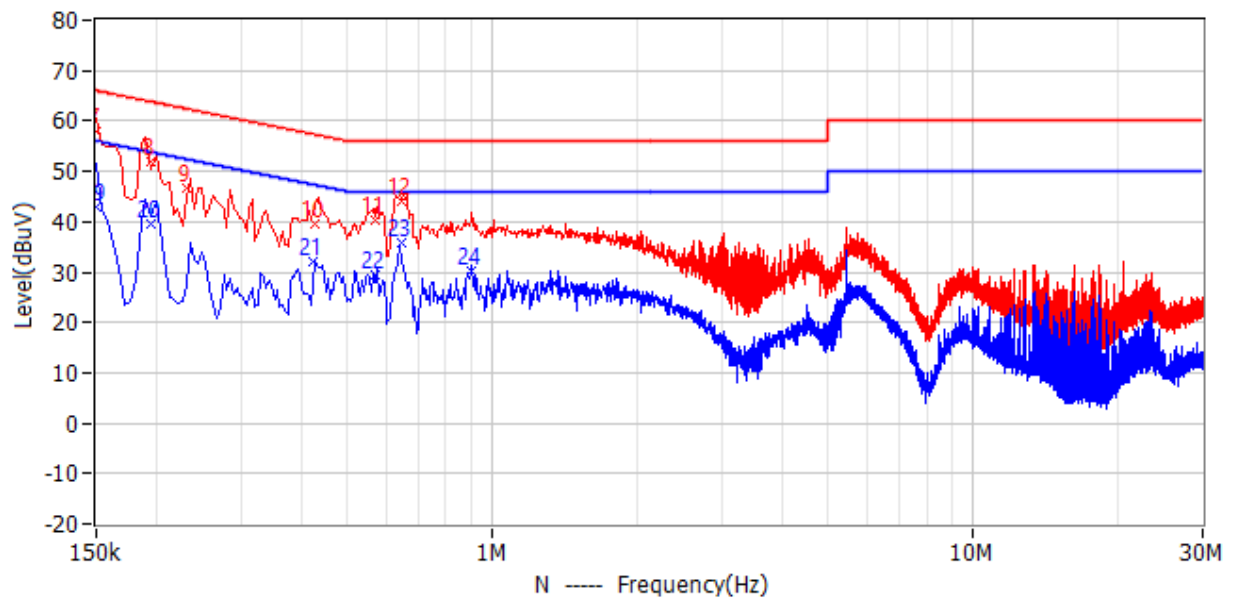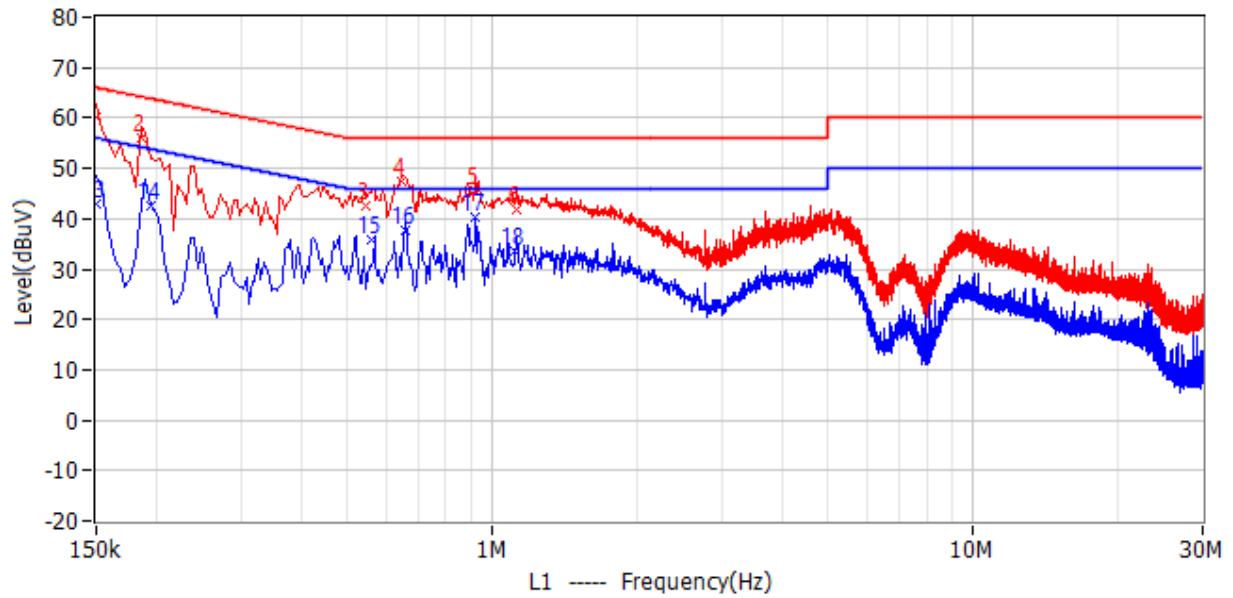

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
1	150.000kHz	66.00	60.07	-5.93	49.87	10.20	QP	L1
2	186.000kHz	64.21	55.98	-8.23	45.78	10.20	QP	L1
3	546.000kHz	56.00	42.46	-13.54	32.26	10.20	QP	L1
4	645.000kHz	56.00	47.52	-8.48	37.32	10.20	QP	L1
5	924.000kHz	56.00	45.61	-10.39	35.31	10.30	QP	L1
6	1.118MHz	56.00	41.67	-14.33	31.37	10.30	QP	L1
7	150.000kHz	66.00	58.06	-7.94	47.96	10.10	QP	N
8	195.000kHz	63.82	51.82	-12.00	41.72	10.10	QP	N
9	231.000kHz	62.41	46.84	-15.57	36.74	10.10	QP	N
10	429.000kHz	57.27	39.56	-17.71	29.36	10.20	QP	N
11	568.500kHz	56.00	40.40	-15.60	30.20	10.20	QP	N
12	649.500kHz	56.00	43.89	-12.11	33.69	10.20	QP	N
13	150.000kHz	56.00	42.85	-13.15	32.65	10.20	CAV	L1
14	195.000kHz	53.82	42.58	-11.24	32.38	10.20	CAV	L1
15	559.500kHz	46.00	35.72	-10.28	25.52	10.20	CAV	L1
16	658.500kHz	46.00	37.84	-8.16	27.64	10.20	CAV	L1
17	924.000kHz	46.00	40.22	-5.78	29.92	10.30	CAV	L1
18	1.113MHz	46.00	33.38	-12.62	23.08	10.30	CAV	L1
19	150.000kHz	56.00	43.01	-12.99	32.91	10.10	CAV	N
20	195.000kHz	53.82	39.38	-14.44	29.28	10.10	CAV	N
21	424.500kHz	47.36	32.12	-15.24	21.92	10.20	CAV	N
22	568.500kHz	46.00	29.53	-16.47	19.33	10.20	CAV	N
23	649.500kHz	46.00	35.85	-10.15	25.65	10.20	CAV	N
24	906.000kHz	46.00	30.29	-15.71	19.99	10.30	CAV	N

Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor



3. Delta = Level - Limit

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

TEST REPORT

Cooler 660:

Test Voltage: AC 120V, 60Hz

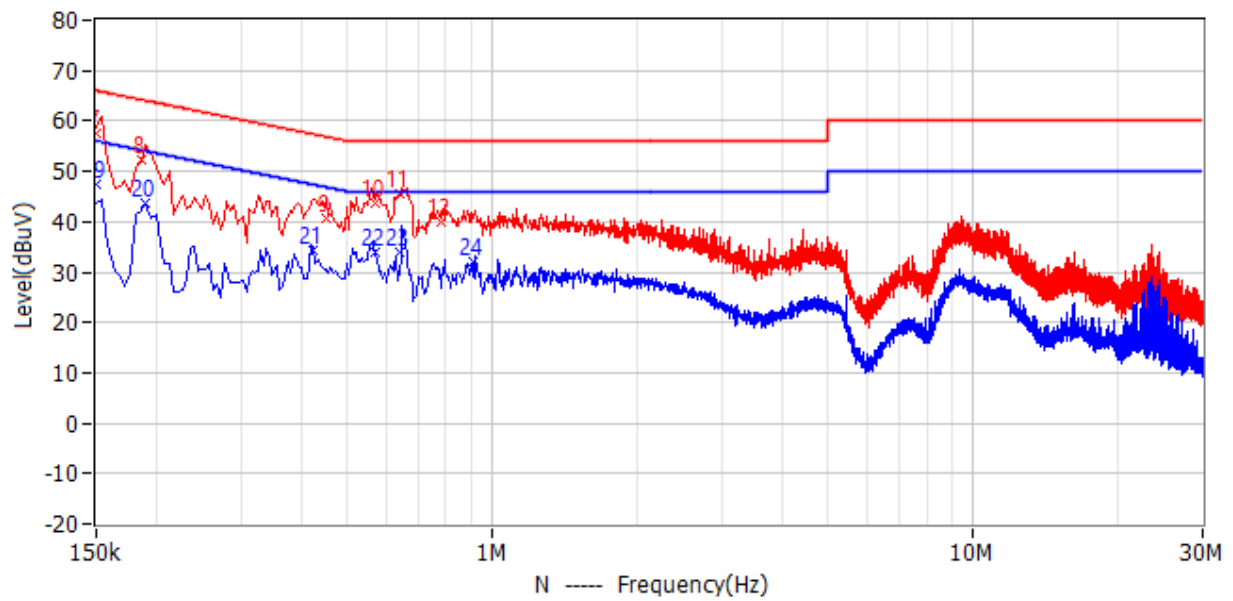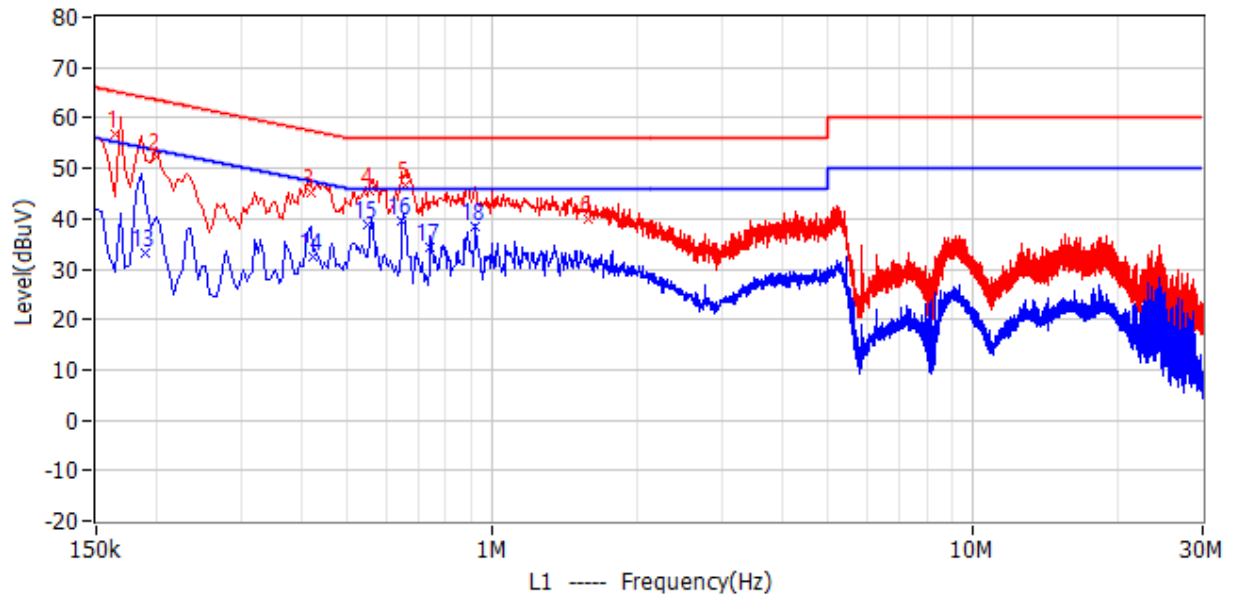

TEST REPORT

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
1	163.500kHz	65.28	56.71	-8.57	46.51	10.20	QP	L1
2	199.500kHz	63.63	52.38	-11.25	42.18	10.20	QP	L1
3	420.000kHz	57.45	45.35	-12.10	35.15	10.20	QP	L1
4	555.000kHz	56.00	45.49	-10.51	35.29	10.20	QP	L1
5	658.500kHz	56.00	46.75	-9.25	36.55	10.20	QP	L1
6	1.581MHz	56.00	39.97	-16.03	29.67	10.30	QP	L1
7	150.000kHz	66.00	57.46	-8.54	47.36	10.10	QP	N
8	186.000kHz	64.21	52.42	-11.79	42.32	10.10	QP	N
9	451.500kHz	56.85	40.62	-16.23	30.42	10.20	QP	N
10	568.500kHz	56.00	43.60	-12.40	33.40	10.20	QP	N
11	640.500kHz	56.00	45.68	-10.32	35.48	10.20	QP	N
12	784.500kHz	56.00	39.87	-16.13	29.57	10.30	QP	N
13	190.500kHz	54.01	33.23	-20.78	23.03	10.20	CAV	L1
14	424.500kHz	47.36	32.49	-14.87	22.29	10.20	CAV	L1
15	550.500kHz	46.00	38.65	-7.35	28.45	10.20	CAV	L1
16	649.500kHz	46.00	39.57	-6.43	29.37	10.20	CAV	L1
17	744.000kHz	46.00	34.26	-11.74	24.06	10.20	CAV	L1
18	924.000kHz	46.00	38.49	-7.51	28.19	10.30	CAV	L1
19	150.000kHz	56.00	47.29	-8.71	37.19	10.10	CAV	N
20	190.500kHz	54.01	43.62	-10.39	33.52	10.10	CAV	N
21	424.500kHz	47.36	34.13	-13.23	23.93	10.20	CAV	N
22	573.000kHz	46.00	34.11	-11.89	23.91	10.20	CAV	N
23	640.500kHz	46.00	33.78	-12.22	23.58	10.20	CAV	N
24	910.500kHz	46.00	32.24	-13.76	21.94	10.30	CAV	N

Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor

3. Delta = Level - Limit

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

9 Frequency Stability

Test result: Pass

9.1 Limit

The frequency stability shall be sufficient to ensure that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

9.2 Test Result

Frequency Error - Temperature Variation

Supply Voltage AC (V)	Temperature (°C)	Frequency Deviation (ppm)
		Channel (5180MHz)
120	-20	-3.861004
	-10	-7.722008
	0	-3.861004
	10	-7.692308
	20	-7.692308
	30	-3.846154
	40	0.000000
	50	-3.816794

Frequency Error - Voltage Variation

Supply Voltage AC (V)	Temperature (°C)	Frequency Deviation (Hz)
		Channel (5180MHz)
108	20	-3.802281
120		-7.692308
132		-3.802281

10 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

***** END *****