

TRU-BOLT.

Luna

Biometric Enabled Deadbolt

ENGLISH


Important

Use the QR code below for the most up to date instructions:




Tools Needed for Lock Installation:

- Phillips Screwdriver




Read this manual carefully before installing and operating!

1 Installation Overview

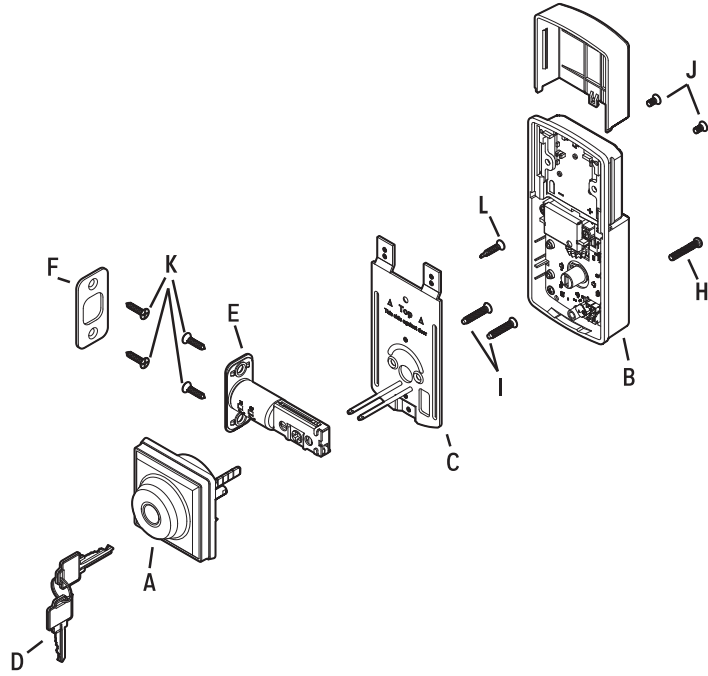

Package Includes:

- | | | |
|-----------------------|--------------------|------------------------|
| 1 - Exterior Assembly | 1 - Strike Plate | 2 - 5/16" Screws |
| 1 - Interior Assembly | 1 - Mounting Plate | 2 - 1" Screws |
| 1 - User Guide | 1 - Latch | 4 - 3/4" Screws |
| 2 - Keys | 1 - 1 3/8" Screw | 1 - Optional Set Screw |

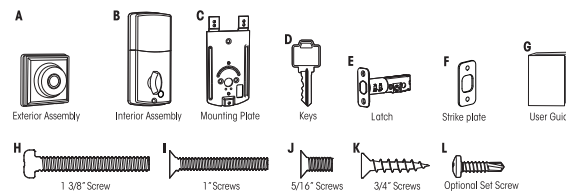


Please carefully check the above list to confirm all items have been received. If any items are missing, please contact Consumer Assistance. (See back for contact information)


Read this manual carefully before installing and operating!

2 Install Enclosed Latch and Strike Plate

NOTE: Do not extend Cylindrical Cover past 2-3/4" (70mm), 2-3/8" position

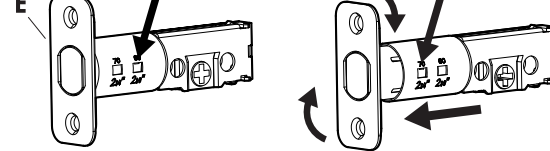

TO CONVERT FROM 2-3/8" (60mm) BACKSET TO 2-3/4" (70mm) BACKSET:
1. Hold latch with numbers facing forward and thumb pressing on the bolt.
2. Rotate the cylinder cover clockwise.
3. Pull and twist the extension plate all the way out.
4. Rotate the cylinder counter clockwise so that the marking aligns with the 2-3/4" position indicator.

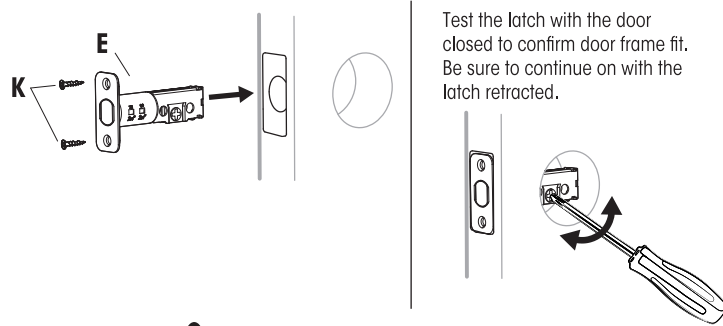

Deadbolt Latch Must Be Retracted During Installation.

Preparation for Interior Assembly


Remove (J) Screw from inside the battery compartment within the (B) Housing to release the Mounting Plate (C).

Ensure screw posts are fully tightened.


Test the latch with the door closed to confirm door frame fit. Be sure to continue on with the latch retracted.

3 Install Exterior Assembly

Ensure Adapter Ring is Installed




Place Interior Assembly in 2 1/8" Door Hole



Check that the Rubber Gasket is secured on the Exterior Assembly (A). Insert the Exterior Assembly onto the door with the tailpiece going through the Deadbolt Latch in the


Route the Control Wire through the door UNDER the Deadbolt Latch.

If not, go back to step 2 and ensure you followed the steps.

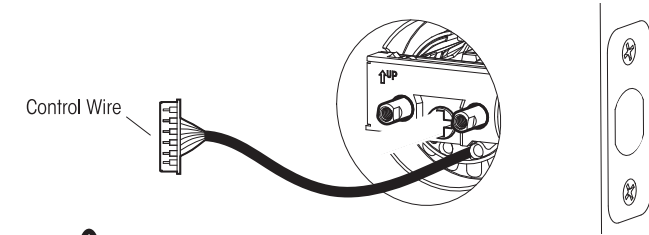


Work with the door open


Install mounting plate by inserting screw posts into exterior assembly




Secure mounting plate to door

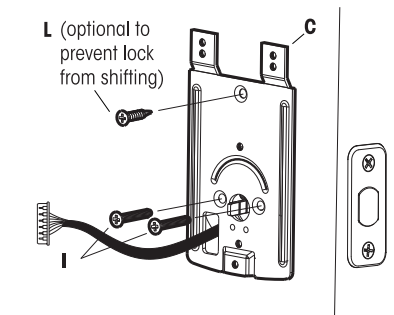

4 Install Interior Assembly

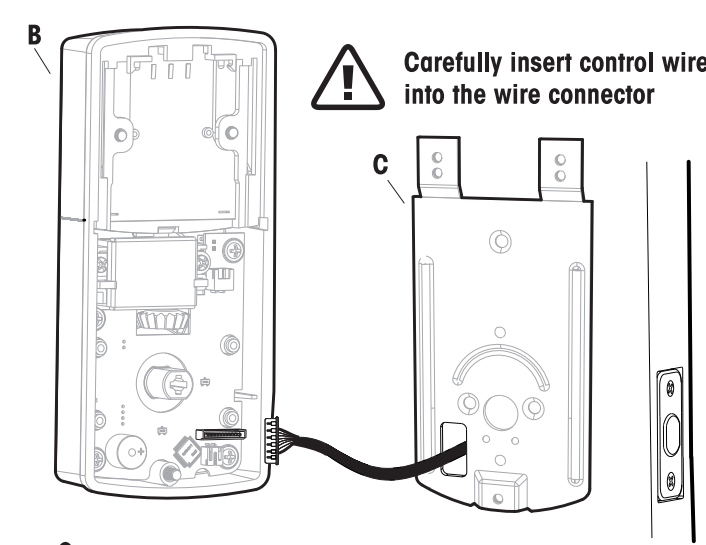


Work with the door open

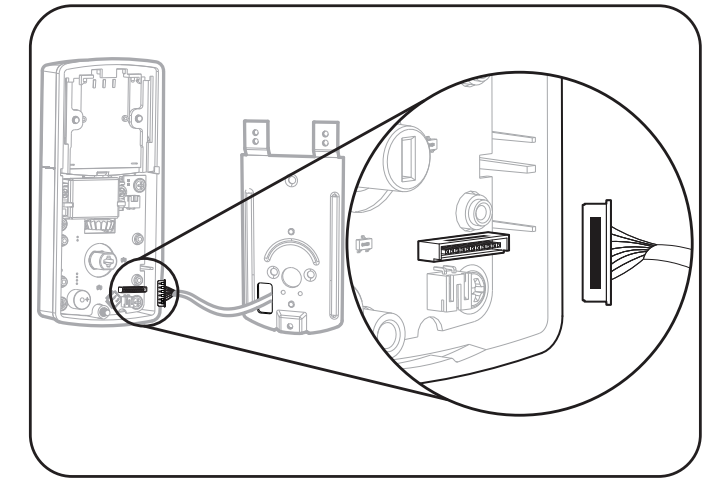


5 Install Interior Assembly

NOTE: Make sure the Turn Knob is in the vertical position. Be careful not to pinch the control wire when assembling.

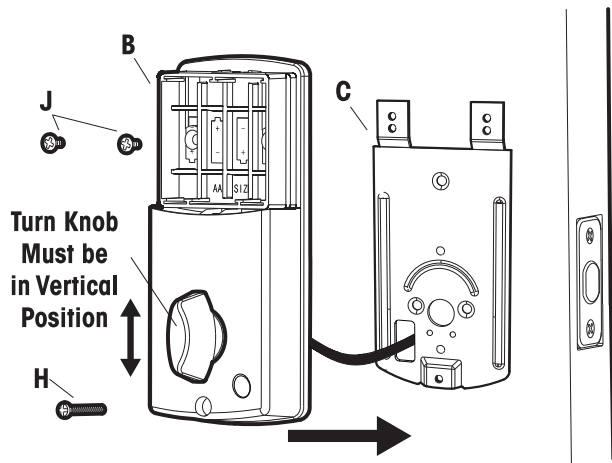

6 Install Batteries and Cover

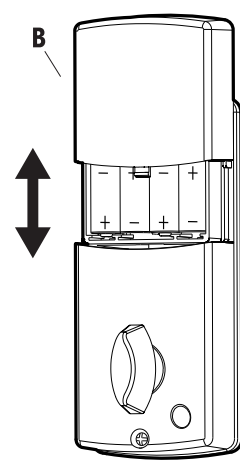

This Electronic lock requires (4) High Quality AA Alkaline batteries. Do not use rechargeable batteries or non-alkaline batteries.


When all 4 batteries are installed in the correct position, the Lock will engage in order to automatically determine your door "Handing" (left or right handed door).

When completed the lock will beep and the Fingerprint Reader will flash.


7 Testing Operation

Keep door open during testing


Place finger on Fingerprint Reader to lock and unlock door




Press the button to lock and unlock door



Key slot behind Fingerprint Reader can also be used to lock and unlock door



Lock and unlock using the turn knob, make sure the latch is opening and closing easily. If not, go back to step 2 and ensure you followed the steps




The lock will beep twice after locking and once after unlocking.

Preparing Door


Tools Needed for Door Preparation (if there is no knob hole):

NOTE: Skip this step if your door comes with pre-drilled holes.


- Drill
- 2 1/8" Hole Saw
- 1" Hole Saw
- 3/4" Chisel

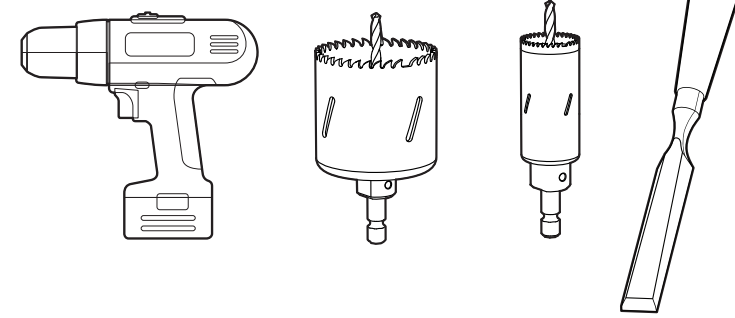


Refer to Template included for Door Prep Instructions

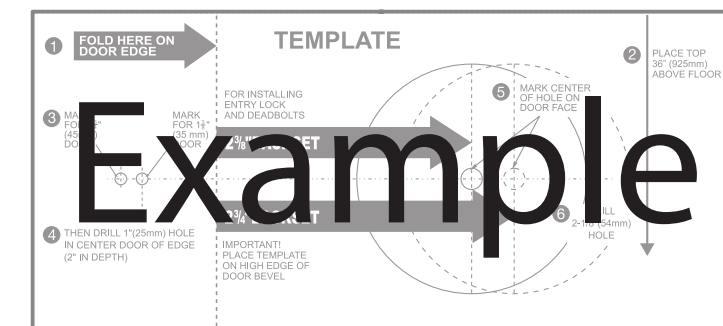


1.

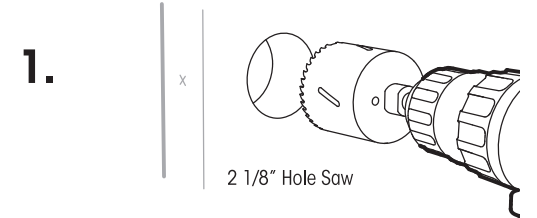


2.

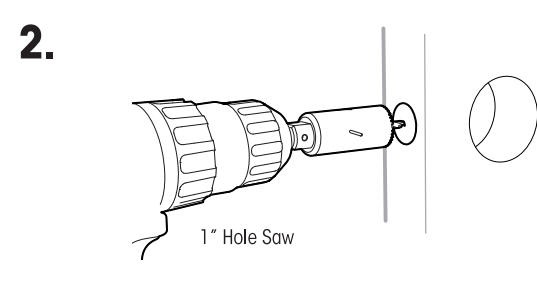

3.

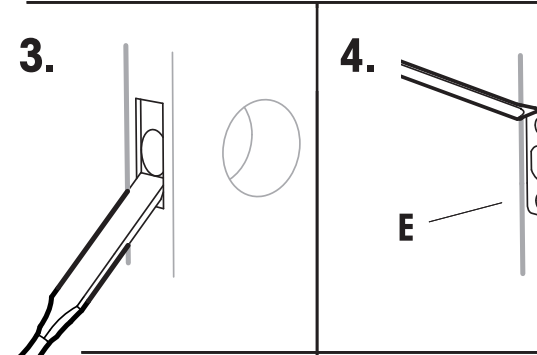


4.

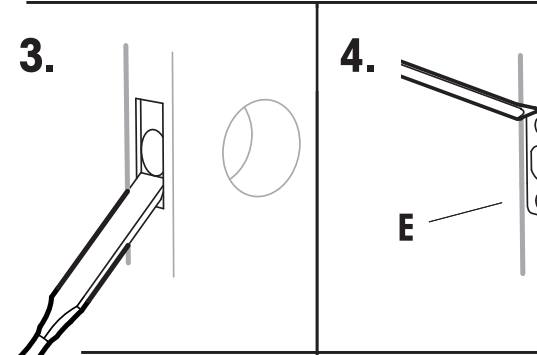

Strike Plate Installation


NOTE: The strike plate on the door frame needs to be straight and not protruding from door frame. Make adjustment before installing or this will cause problems with bolt fitting into latch hole.

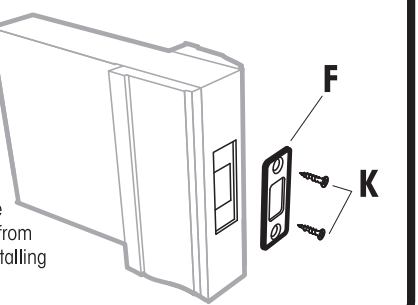


Programming Instructions



Download the My Key Mobile App from the APP store or Google Play

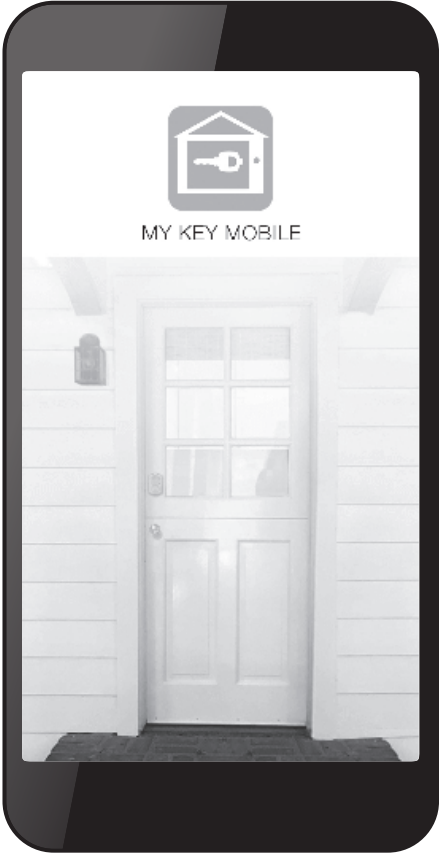



1 Register an Account

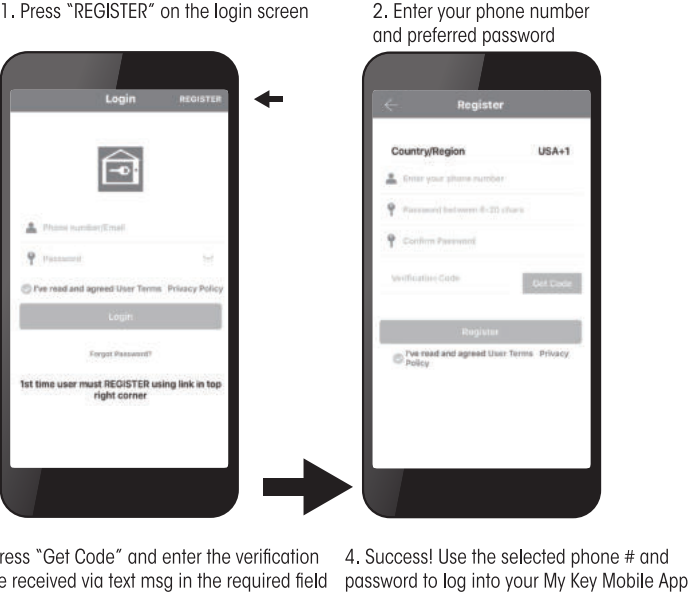


2 Add a Lock





Press the Fingerprint Reader to wake up Lock. The Fingerprint Reader must be lit in order to add the Lock

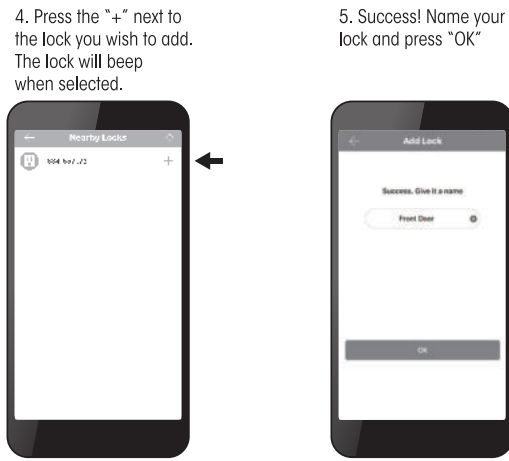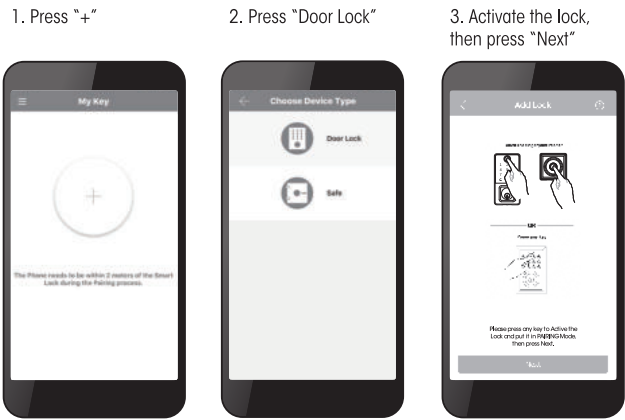



3 Add a Fingerprint

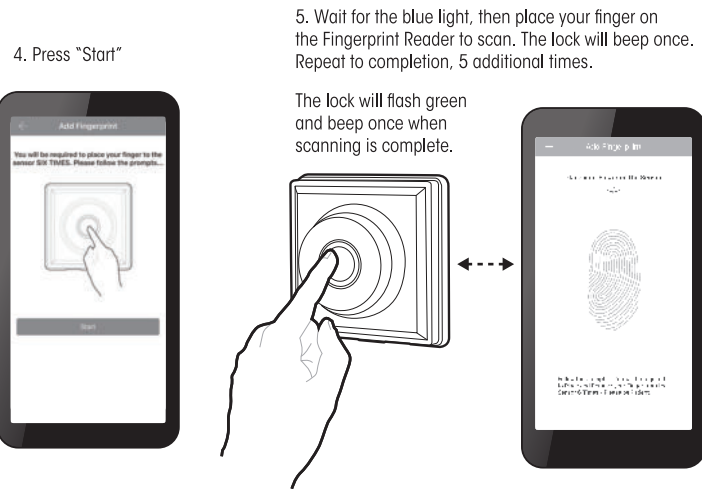

4 Locking and Unlocking via APP

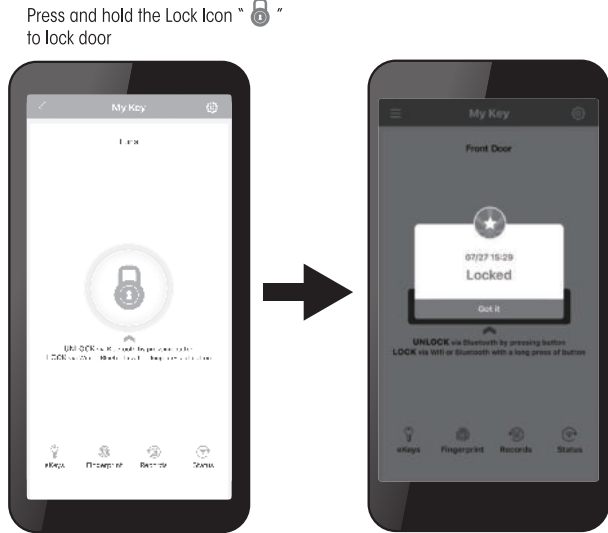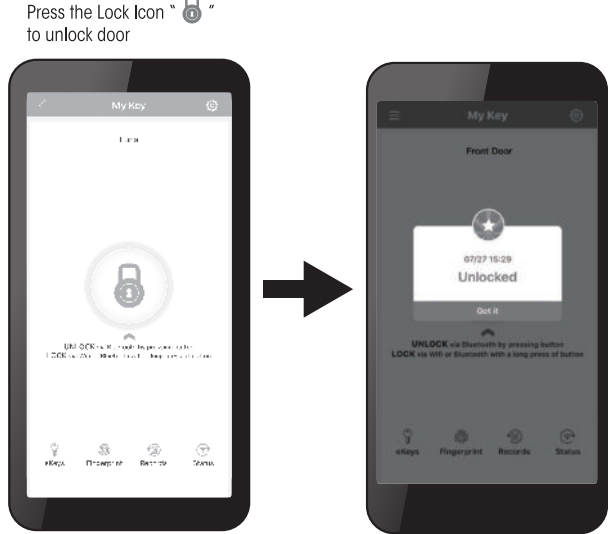

5 Creating and Sending eKeys

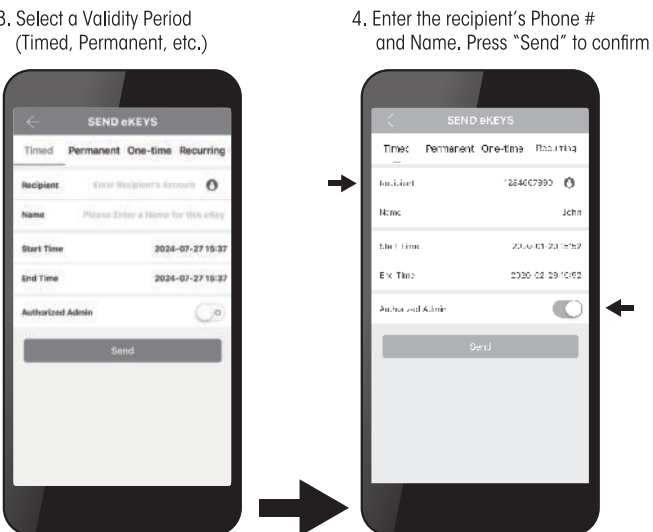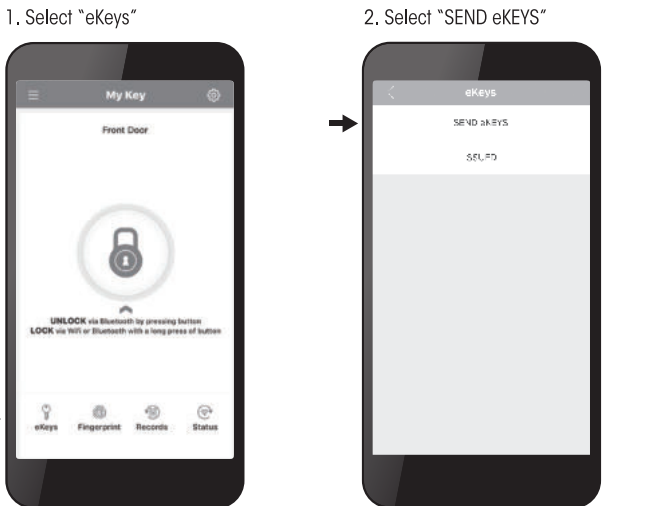


Selecting "Authorized Admin" allows recipient to make changes to the lock

6 Additional Programming Functions

You will use the APP to make these changes in settings

The Additional Programming Functions allow you to make adjustments to your lock that suit your lifestyle and needs.

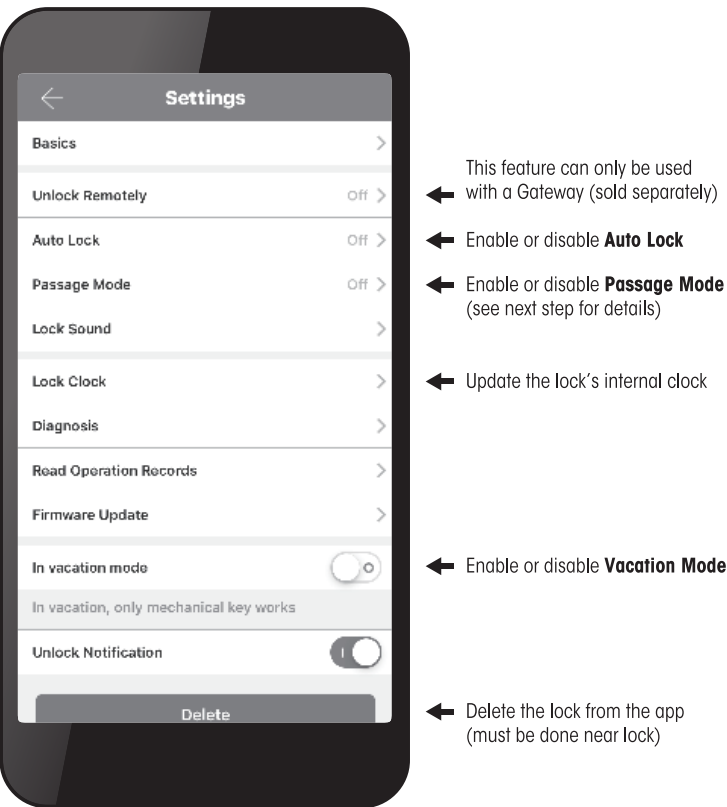

This feature can only be used with a Gateway (sold separately)

Enable or disable **Auto Lock**

Enable or disable **Passage Mode** (see next step for details)

Update the lock's internal clock


Enable or disable **Vacation Mode**

Delete the lock from the app (must be done near lock)

7 Passage Mode

You will use the APP to make these changes in settings

Passage Mode keeps the lock open on a set schedule. When Passage Mode is enabled, the lock will remain open until it is manually closed.

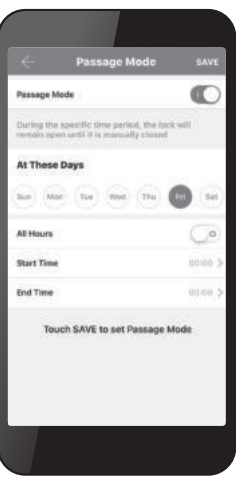

Enable or disable Passage Mode

Select days when Passage Mode will be active

Configure time of day when Passage Mode will be active

8 Restore Factory Settings

The lock restores to factory settings when the Administrator deletes the lock from the App (see Step 6). A green light will flash and the lock will beep when it has been restored to factory settings.

Troubleshooting

Issue	Solution
Lock will not function electronically.	• Check that all batteries are fresh high quality Alkaline Batteries • Check for proper polarity (+ -) of all batteries • Check that the Control Wire is attached to the Interior Assembly
Lock gives error signal when opening or locking and Latch will not extend or retract completely when closed.	• Unlock door using Key or Interior Knob • While door is open, check that the Latch operates smoothly • Check for proper alignment of the strike plate, adjust as needed to assure there is no binding against the Latch
The Latch is sticking.	• Installation screws of the lock may be too tight and have to be loosened • Remove Interior Assembly • Slightly loosen the Mounting Plate screws • Lock and unlock using the Key • Reattach Control Wire and Interior Assembly
The App is unable to connect to a lock.	• Bluetooth is off, smart device is not compatible, or the lock may not be activated • Contact customer assistance regarding compatibility issues, but iPhone 5 and later models, and most Android devices are compatible • Turn Bluetooth on, and ensure the lock is activated by pressing the Fingerprint Reader on the physical lock until you see the icon to add the lock
eKeys will not send.	• Only registered users of the App can receive ekeys. Ensure that whoever is receiving the eKey has a registered account, and their information is entered correctly • Ensure you are connected to the lock via Bluetooth, and that the smart device is updated
Fingerprint is invalid.	• Make sure your fingers and the Fingerprint Reader are both clean • Keep your finger on the Fingerprint Reader until you hear a beep • Try using another recorded fingerprint • For consistent failures, delete and re-add the fingerprint
Fingerprint Does not work.	• Hold finger on Fingerprint Reader longer
Latch is not locking in inclement weather.	• Push or pull door to direct latch • Re-adjust latch for smoother operations

Limited 1-Year Electronic Warranty - Limited Lifetime Mechanical and Finish Warranty
This Tru-Bolt® product comes with a 1-Year Limited Warranty on Electronic Parts and a Limited Lifetime Mechanical and Finish Warranty against defects in materials and workmanship under normal use to the original residential user. Proof of purchase and ownership is required for the warranty to be in effect. This warranty is non transferable and applies to the original purchaser only, as long as the original purchaser occupies the residential premises upon which the product(s) was originally installed. This warranty DOES NOT COVER removal and reinstallation of product(s), scratches, abrasions, deterioration due to the use of paints, solvents or other chemicals, abuse, misuse, or product(s) used in commercial applications, does not cover any losses, injuries to persons/property or costs, and shipping and freight expenses required to return product(s). In no event shall Tru-Bolt® be liable for any special, incidental or consequential damages. If this product(s) is considered a consumer product, please be advised that some local and state laws do not allow limitations on incidental or consequential damages or how long an implied warranty lasts, so that the above limitations may not fully apply. Refer to your local laws for your specific rights under this warranty. If there are any problems please call our customer service with any questions or concerns.

Package Warranty:
Limited Lifetime Mechanical & Finish Warranty:
This Tru-Bolt® product(s) comes with a 1-Year Limited Warranty on Electronic Parts and a Limited Lifetime Mechanical and Finish Warranty against defects in materials and workmanship under normal use to the original residential user. If there are any problems please call our customer service with any questions or concerns. See installation instructions for full terms and conditions.

DO NOT RETURN TO STORE
For questions / comments, technical assistance or repair parts - please call toll free at: 1-800-860-1677 x 1801 (M-F 7am-5pm PST)

Regulatory Compliance
This product complies with standards established by following regulatory bodies:
- Federal Communications Commission (FCC)

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference, including interference that may cause undesired operation

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

IMPORTANT! Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

料号：3.22.010089

名称：TB T634-BLE版说明书（英语版）

版本：A1

日期：2024.9.24

材质：80克双胶,双面印刷彩色,折页(先风琴折,再对折)

展开尺寸：546.1x355.6mm(成型尺寸177.8x109.2mm)