


FCC Test Report

FCC ID : 2BV36EE4210-00
Equipment : Tri-Band Wireless BE9400 2.5G Ethernet Gateway
Model No. : EE4210-00
Brand Name : ZYXEL
Applicant : ZYXEL Communications Inc.
Address : 1130 N. Miller Street, Anaheim, CA 92806, USA
Standard : 47 CFR FCC Part 15.407
Equipment Class / Type : ☒ 6ID: Indoor access point
☐ 6PP: Subordinate device
☐ 6XD: Client device
Received Date : Jun. 09, 2026
Tested Date : Jul. 01 ~ Sep. 02, 2026

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Along Chen / Manager

Approved by:



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	11
1.3	Test Setup Chart	11
1.4	The Equipment List	12
1.5	Test Standards	14
1.6	Reference Guidance	14
1.7	Deviation from Test Standard and Measurement Procedure.....	14
1.8	Measurement Uncertainty	15
2	TEST CONFIGURATION.....	15
2.1	Testing Facility	16
2.2	Test Worst Modes and Channel Details.....	17
3	TRANSMITTER TEST RESULTS	19
3.1	Emission Bandwidth	19
3.2	RF Output Power.....	20
3.3	Power Spectral Density	21
3.4	Unwanted Emissions.....	22
3.5	In-Band Emissions	25
3.6	Frequency Stability.....	27
3.7	Contention Based Protocol.....	28
3.8	AC Power Line Conducted Emissions	30
4	TEST LABORATORY INFORMATION	31
Appendix A. Emission Bandwidth		
Appendix B. RF Output Power		
Appendix C. Power Spectral Density		
Appendix D. Unwanted Emissions		
Appendix E. In-Band Emissions		
Appendix F. Frequency Stability		
Appendix G. Contention Based Protocol		
Appendix H. AC Power Line Conducted Emissions		

Release Record

Report No.	Version	Description	Issued Date
FR660902AO	Rev. 01	Initial issue	Sep. 21, 2026

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.178MHz 51.26 (Margin -13.33dB) - QP	Pass
15.407(b)(5) 15.209	Unwanted Emission	[dBuV/m at 3m]: 7125.00MHz 67.80 (Margin -0.40dB) - AV	Pass
15.407(b)(6)	In-Band Emissions (Mask)	Meet the requirement of limit	Pass
15.407(a)(10)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(a)(5)	RF Output Power (e.i.r.p)	Max Power [dBm]: Non-beamforming mode 5925-6425MHz: 27.86 6425-6525MHz: 21.92 6525-6875MHz: 28.15 6875-7125MHz: 28.20 Beamforming mode 5925-6425MHz: 27.39 6425-6525MHz: 21.70 6525-6875MHz: 27.66 6875-7125MHz: 27.46	Pass
15.407(a)(5)	Power Spectral Density (e.i.r.p)	Meet the requirement of limit	Pass
15.407(d)(6)	Contention Based Protocol	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
5925 ~ 7125	ax (HE20)	5955 ~ 7115	1 ~ 233 [59]	2	MCS 0-11
5925 ~ 7125	ax (HE40)	5965 ~ 7085	3 ~ 227 [29]	2	MCS 0-11
5925 ~ 7125	ax (HE80)	5985 ~ 7025	7 ~ 215 [14]	2	MCS 0-11
5925 ~ 7125	ax (HE160)	6025 ~ 6985	15 ~ 207 [7]	2	MCS 0-11
5925 ~ 7125	be (EHT20)	5955 ~ 7115	1 ~ 233 [59]	2	MCS 0-13
5925 ~ 7125	be (EHT40)	5965 ~ 7085	3 ~ 227 [29]	2	MCS 0-13
5925 ~ 7125	be (EHT80)	5985 ~ 7025	7 ~ 215 [14]	2	MCS 0-13
5925 ~ 7125	be (EHT160)	6025 ~ 6985	15 ~ 207 [7]	2	MCS 0-13
5925 ~ 7125	be (EHT320)	6105 ~ 6905	31 ~ 191 [6]	2	MCS 0-13

Note: OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM and 4096QAM modulation.

1.1.2 Antenna Details

Brand	Model	Type	Connector	Operating Frequencies (MHz) / Gain (dBi)			
				5925~6425	6425~6525	6525~6875	6875~7125
PSA	WA-P-LF-11-003	DIPOLE	IPEX	3.55	3.53	3.63	3.35
PSA	WA-P-LF-01-024	DIPOLE	IPEX	4.51	3.98	4.65	4.90

1.1.3 Configuration of Equipment under Test (EUT)

Power Supply Type	12Vdc from adapter		
Beamforming	☒ Support	☐ Not support	
RU Configuration	☒ Full RU	☐ Partial RU	
Channel Puncturing	☐ Support	☒ Not support	

1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	AC adapter	Brand: Frecom Model: FC024A13-120020U I/P: 100-240Vac, 50/60Hz 1.0A O/P: 12.0Vdc 2.0A 24.0W Power Line: 1.5m non-shielded without core
2	RJ45 cable	1.5m non-shielded without core

1.1.5 Channel List

ax HE20 / be EHT20							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5955	61	6255	121	6555	181	6855
5	5975	65	6275	125	6575	185	6875
9	5995	69	6295	129	6595	189	6895
13	6015	73	6315	133	6615	193	6915
17	6035	77	6335	137	6635	197	6935
21	6055	81	6355	141	6655	201	6955
25	6075	85	6375	145	6675	205	6975
29	6095	89	6395	149	6695	209	6995
33	6115	93	6415	153	6715	213	7015
37	6135	97	6435	157	6735	217	7035
41	6155	101	6455	161	6755	221	7055
45	6175	105	6475	165	6775	225	7075
49	6195	109	6495	169	6795	229	7095
53	6215	113	6515	173	6815	233	7115
57	6235	117	6535	177	6835	---	---

ax HE40 / be EHT40							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	5965	67	6285	131	6605	195	6925
11	6005	75	6325	139	6645	203	6965
19	6045	83	6365	147	6685	211	7005
27	6085	91	6405	155	6725	219	7045
35	6125	99	6445	163	6765	227	7085
43	6165	107	6485	171	6805	---	---
51	6205	115	6525	179	6845	---	---
59	6245	123	6565	187	6885	---	---


ax HE80 / be EHT80							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
7	5985	71	6305	135	6625	199	6945
23	6065	87	6385	151	6705	215	7025
39	6145	103	6465	167	6785	---	---
55	6225	119	6545	183	6865	---	---


ax HE160 / be EHT160							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
15	6025	79	6345	143	6665	207	6985
47	6185	111	6505	175	6825	---	---

be EHT320							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	---	---
31	6105	95	6425	159	6745	---	---
63	6265	127	6585	191	6905	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	QSPR, Version: 6.00.00234.1		
Duty Cycle and Duty Factor	Mode	Duty Cycle (%)	Duty Factor (dB)
	be EHT20	98.04%	0.09
	be EHT40	97.58%	0.11
	be EHT80	97.87%	0.09
	be EHT160	98.01%	0.09
	be EHT320	97.46%	0.11

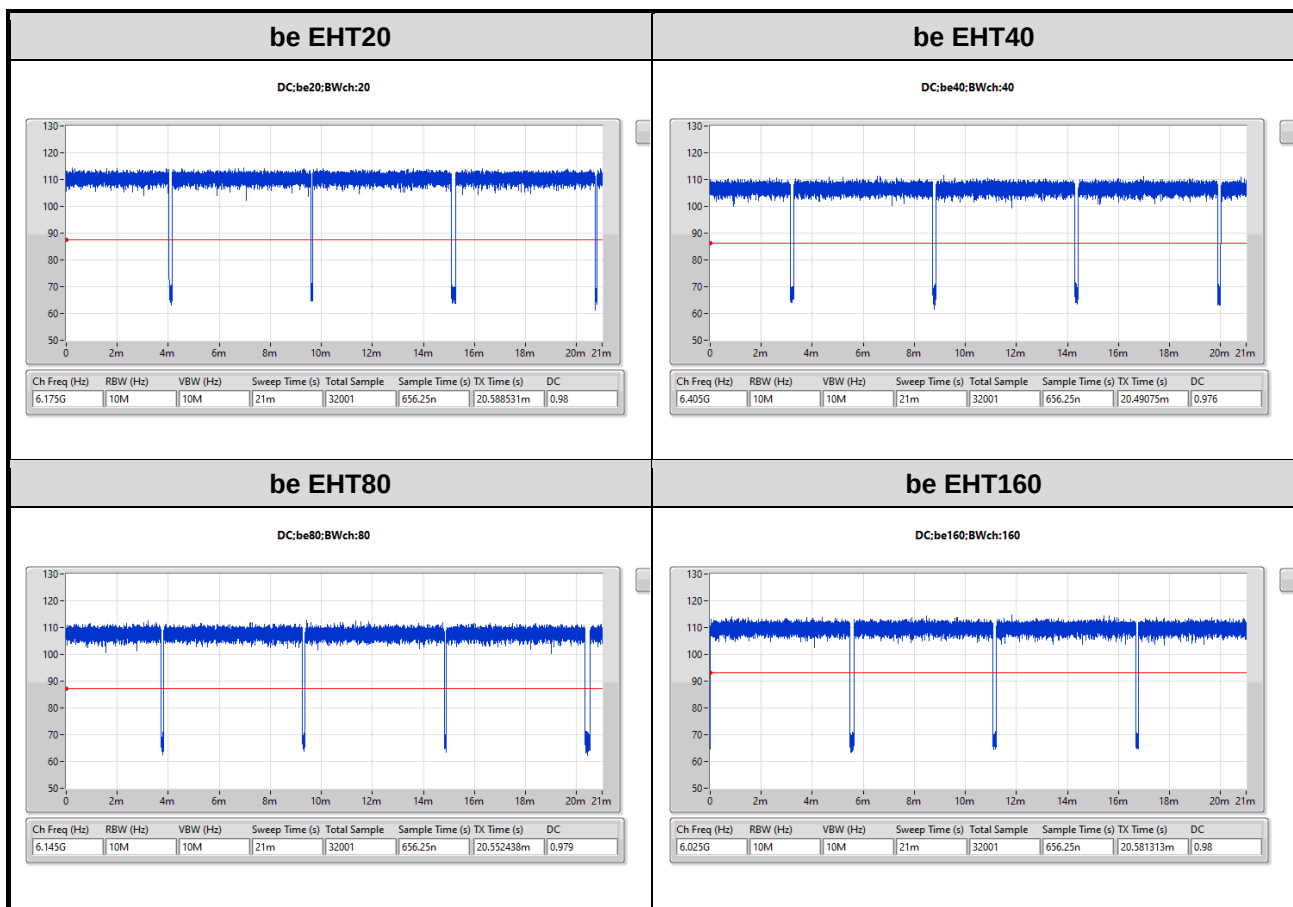

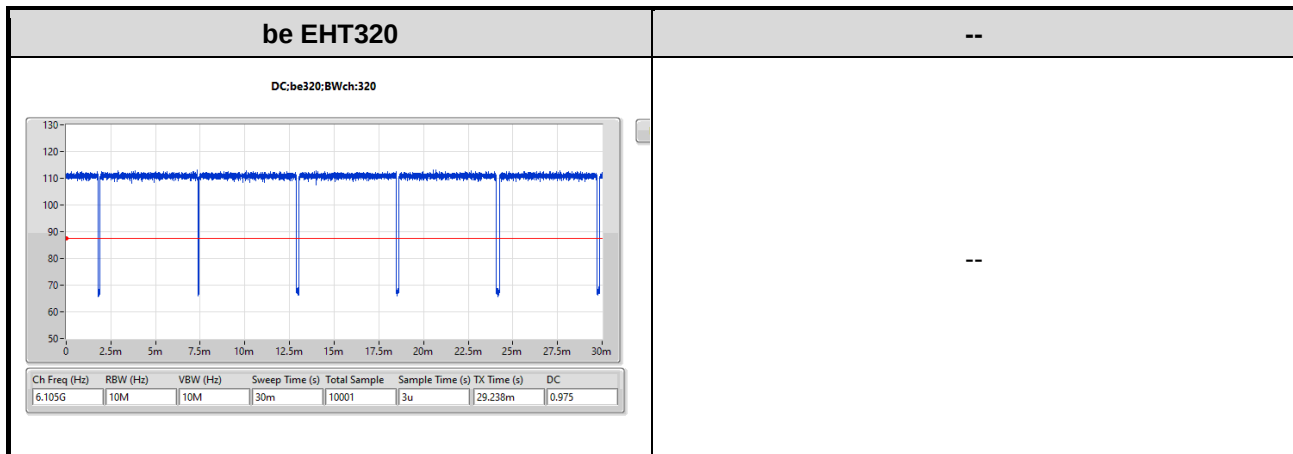

1.1.7 Power Index of Test Tool


Modulation Mode	Test Frequency (MHz)	Power Index
be EHT20	5955	7
be EHT20	6175	7
be EHT20	6415	8
be EHT20	6435	8
be EHT20	6475	8
be EHT20	6515	7.5
be EHT20	6535	7.5
be EHT20	6715	7.5
be EHT20	6855	7.5
be EHT20	6875	7.5
be EHT20	6895	7.5
be EHT20	7015	8
be EHT20	7095	8
be EHT20	7115	1.5
be EHT40	5965	9.5
be EHT40	6165	10
be EHT40	6405	11
be EHT40	6445	11
be EHT40	6485	11
be EHT40	6525	10.5
be EHT40	6565	10.5
be EHT40	6725	10.5
be EHT40	6845	10.5
be EHT40	6885	10.5

be EHT40	6925	10.5
be EHT40	7005	11
be EHT40	7085	11.5
be EHT80	5985	13
be EHT80	6145	13.5
be EHT80	6385	14.5
be EHT80	6465	14.5
be EHT80	6545	14
be EHT80	6625	13.5
be EHT80	6705	13.5
be EHT80	6785	13.5
be EHT80	6865	14
be EHT80	6945	14
be EHT80	7025	14.5
be EHT160	6025	16.5
be EHT160	6185	16.5
be EHT160	6345	17
be EHT160	6505	16.5
be EHT160	6665	16.5
be EHT160	6825	16.5
be EHT160	6985	17
be EHT320	6105	18.5
be EHT320	6265	19.5
be EHT320	6425	19.5
be EHT320	6585	19
be EHT320	6745	19
be EHT320	6905	19

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Laptop	DELL	Vostro 5410	DoC	---
2	Laptop	DELL	Latitude 3440	DoC	---
3	RJ45 Load	ICC	---	---	---

1.3 Test Setup Chart

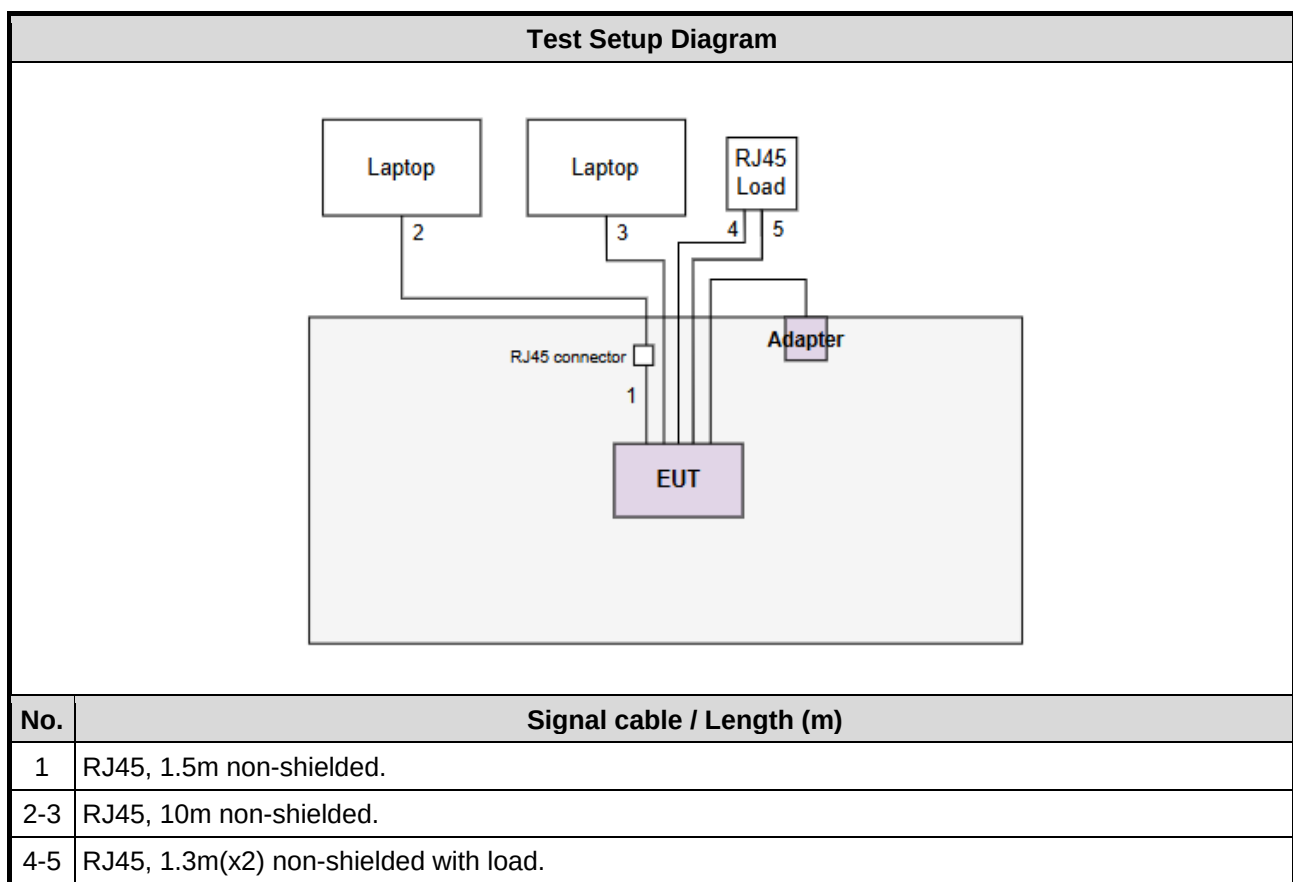

1.4 The Equipment List

Test Item	Radiated Emission below 1GHz				
Test Site	966 chamber3 / (03CH03-WS)				
Tested Date	Jul. 07, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Apr. 02, 2026	Apr. 01, 2027
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 17, 2025	Nov. 16, 2026
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-1950	May 21, 2026	May 20, 2027
Preamplifier	EMC	EMC02325	980187	Jun. 26, 2026	Jun. 25, 2027
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 01, 2025	Sep. 30, 2026
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Sep. 19, 2025	Sep. 18, 2026
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Sep. 19, 2025	Sep. 18, 2026
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Sep. 19, 2025	Sep. 18, 2026
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission above 1GHz				
Test Site	966 chamber3 / (03CH03-WS)				
Tested Date	Jul. 02, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Apr. 13, 2026	Apr. 12, 2027
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Jan. 23, 2026	Jan. 22, 2027
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 28, 2025	Nov. 27, 2026
Preamplifier	EMC	EMC118A45SE	980897	Aug. 08, 2025	Aug. 07, 2026
Preamplifier	EMC	EMC184045SE	980903	Aug. 08, 2025	Aug. 07, 2026
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 19, 2025	Sep. 18, 2026
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Sep. 19, 2025	Sep. 18, 2026
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Sep. 19, 2025	Sep. 18, 2026
Attenuator	Pasternack	PE7005-10	10-3	Sep. 19, 2025	Sep. 18, 2026
HIGHPASS FILTER 7.5-18G	STI	STI15-9722	STI-HP7.5G-B	Sep. 19, 2025	Sep. 18, 2026
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Jul. 01 ~ Jul. 08, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV3044	101516	Apr. 28, 2026	Apr. 27, 2027
Power Meter	Anritsu	ML2495A	1241002	Nov. 21, 2025	Nov. 20, 2026
Power Sensor	Anritsu	MA2411B	1207366	Nov. 21, 2025	Nov. 20, 2026
Attenuator	Pasternack	PE7005-10	10-2	Oct. 03, 2025	Oct. 02, 2026
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GTH-150-40-CP-AR-T	MAA1407-012	Sep. 02, 2025	Sep. 01, 2026
AC POWER SOURCE	APC	AFC-500W	F312060012	Jan. 08, 2026	Jan. 07, 2027
Measurement Software	Sporton	SENSE-15407_NII	V5.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Jul. 06, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101659	Apr. 29, 2026	Apr. 28, 2027
LISN	R&S	ENV216	101579	May 18, 2026	May 17, 2027
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Apr. 12, 2026	Apr. 11, 2027
RF Cable-CON	EMC	EMCCFD300-BM-B M-6000	50821	Oct. 07, 2025	Oct. 06, 2026
50 ohm terminal	NA	50	03	Jul. 30, 2025	Jul. 29, 2026
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Contention Based Protocol				
Test Site	(TH01-WS)				
Tested Date	Aug. 31 ~ Sep. 02, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV3044	101747	Apr. 04, 2026	Apr. 03, 2027
AWGN Signal Generator	R&S	SMW200A	109619	Aug. 11, 2026	Aug. 10, 2027
Combiner(1X2)	woken	0120A02201801O	DOM2AEW1A23	Oct. 11, 2025	Oct. 10, 2026
Directional Coupler	Marvelous Microwave	MVE4514-20	20	Oct. 09, 2025	Oct. 08, 2026
RF CABLE	EMC	EMC105SFF-SM-S M-2000	210816	Oct. 09, 2025	Oct. 08, 2026
RF CABLE	woken	woken-S05	S05-141231-102	Oct. 09, 2025	Oct. 08, 2026
RF CABLE	woken	woken-S05	S05-141231-105	Oct. 09, 2025	Oct. 08, 2026
RF CABLE	woken	woken-S05	S05-141231-106	Oct. 09, 2025	Oct. 08, 2026
Attenuator	woken	PE7013-10	10-1	Oct. 11, 2025	Oct. 10, 2026
Attenuator	woken	PE7013-20	20-1	Oct. 11, 2025	Oct. 10, 2026
Measurement Software	NA	NA	NA	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.407

ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024

ANSI C63.4-2014 + C63.4a-2017

1.6 Reference Guidance

FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03

FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
Conducted power	± 0.808 dB
Frequency error	$\pm 1 \times 10^{-9}$
Power density	± 0.583 dB
Conducted emission	± 2.715 dB
AC conducted emission	± 2.92 dB
Unwanted Emission ≤ 1 GHz	± 3.96 dB
Unwanted Emission > 1 GHz	± 4.51 dB
Time	$\pm 0.1\%$
Temperature	± 0.4 °C

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)
Test Site	03CH03-WS
Address of Test Site	No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISED#: 10807C
- CAB identifier: TW2732

2.2 Test Worst Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Non-beamforming mode				
AC Power Line Conducted Emissions	be EHT320	6585	MCS 0	---
Unwanted Emissions ≤1GHz	be EHT320	6585	MCS 0	---
Unwanted Emissions >1GHz RF Output Power Emission Bandwidth Power Spectral Density In-Band Emissions	be EHT20	5955 / 6175 / 6415 / 6435 / 6475 / 6515 / 6535 / 6715 / 6855 / 6875 / 6895 / 7015 / 7095 / 7115	MCS 0	---
	be EHT40	5965 / 6165 / 6405 / 6445 / 6485 / 6525 / 6565 / 6725 / 6845 / 6885 / 6925 / 7005 / 7085	MCS 0	
	be EHT80	5985 / 6145 / 6385 / 6465 / 6545 / 6625 / 6705 / 6785 / 6865 / 6945 / 7025	MCS 0	
	be EHT160	6025 / 6185 / 6345 / 6505 / 6665 / 6825 / 6985	MCS 0	
	be EHT320	6105 / 6265 / 6425 / 6585 / 6745 / 6905	MCS 0	
Contention Based Protocol	be EHT20	6195 / 6475 / 6695 / 6995	MCS 0	---
	be EHT320	6105 / 6425 / 6905	MCS 0	
Frequency Stability	Un-modulation	6475 / 7015	---	---
NOTE:				
1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Z-plane results were found as the worst case and were shown in this report.				

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Beamforming mode				
RF Output Power	be EHT20	5955 / 6175 / 6415 / 6435 / 6475 / 6515 / 6535 / 6715 / 6855 / 6875 / 6895 / 7015 / 7095 / 7115	MCS 0	---
	be EHT40	5965 / 6165 / 6405 / 6445 / 6485 / 6525 / 6565 / 6725 / 6845 / 6885 / 6925 / 7005 / 7085	MCS 0	
	be EHT80	5985 / 6145 / 6385 / 6465 / 6545 / 6625 / 6705 / 6785 / 6865 / 6945 / 7025	MCS 0	
	be EHT160	6025 / 6185 / 6345 / 6505 / 6665 / 6825 / 6985	MCS 0	
	be EHT320	6105 / 6265 / 6425 / 6585 / 6745 / 6905	MCS 0	
NOTE:				
1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Z-plane results were found as the worst case and were shown in this report.				
2. Beamforming mode is calculated not measured. The calculation method is conducted power of non-beamforming – 3.01dB.				

3 Transmitter Test Results

3.1 Emission Bandwidth

3.1.1 Limit

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

3.1.2 Test Procedures


26dB Bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Occupied Bandwidth

1. Set RBW = 1 % to 5 % of the OBW.
2. Set VBW $\geq$ 3 RBW.
3. Sample detection and single sweep mode shall be used.
4. Use the 99 % power bandwidth function of the instrument.

3.1.3 Test Setup



3.1.4 Test Result

Ambient Condition	23-25°C / 63-65%	Tested By	Aska Huang
-------------------	------------------	-----------	------------

Refer to Appendix A.

3.2 RF Output Power

3.2.1 Limit

Frequency Band	Operating Mode	Maximum EIRP Limit
5925 ~ 7125 MHz	☒ Indoor access point	30 dBm
	☐ Subordinate device	30 dBm
	☐ Client devices	24 dBm

3.2.2 Test Procedures


Method PM-G (Measurement using a gated RF average power meter)

1. Measurements is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
2. $EIRP = \text{Measured conducted power} + \text{Antenna gain}$

Spectrum analyzer (For channel that extends across the 6.525 / 6.875 GHz boundary)

1. Set RBW = 1MHz, VBW = 3MHz, Sweep time = Auto, Detector = RMS.
2. Trace average at least 100 traces in power averaging mode.
3. Compute power by integrating the spectrum across the 26 dB EBW.
4. Add $10 \log(1/X, X:\text{duty cycle})$ if duty cycle is <98%.
5. $EIRP = \text{Measured conducted power} + \text{Antenna gain}$

3.2.3 Test Setup

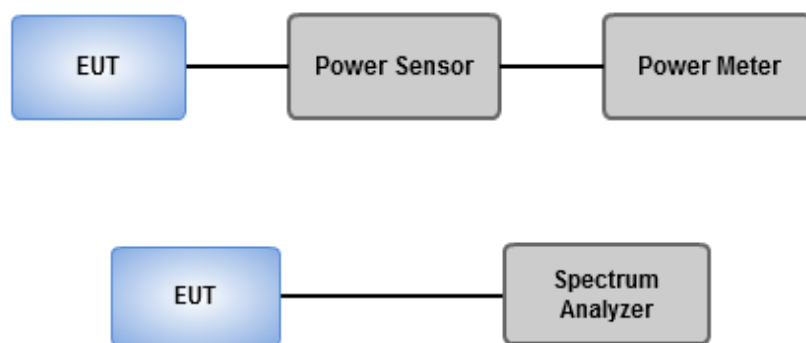

3.2.4 Test Result

Ambient Condition	23-25°C / 63-65%	Tested By	Aska Huang
-------------------	------------------	-----------	------------

Refer to Appendix B.

3.3 Power Spectral Density

3.3.1 Limit

Frequency Band	Operating Mode	Limit
5925 ~ 7125 MHz	☒ Indoor access point	EIRP: 5 dBm / 1 MHz
	☐ Subordinate device	EIRP: 5 dBm / 1 MHz
	☐ Client devices	EIRP: -1 dBm / 1 MHz

3.3.2 Test Procedures


Duty cycle $\geq$ 98 %

1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.
4. EIRP PSD = Measured conducted power density + Antenna gain

Duty cycle < 98 %

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
2. Set sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$.
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log(1/x)$, where x is the duty cycle.
6. EIRP PSD = Measured conducted power density + Antenna gain

3.3.3 Test Setup



3.3.4 Test Result

Ambient Condition	23-25°C / 63-65%	Tested By	Aska Huang
-------------------	------------------	-----------	------------

Refer to Appendix C.

3.4 Unwanted Emissions

3.4.1 Limit of Unwanted Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit		
Operating Band	PK Limit	AV Limit
5.925 – 7.125 GHz	e.i.r.p. -7 dBm [88.2 dBuV/m@3m]	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.4.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.4.3 Test Setup

Radiated Emissions below 1 GHz

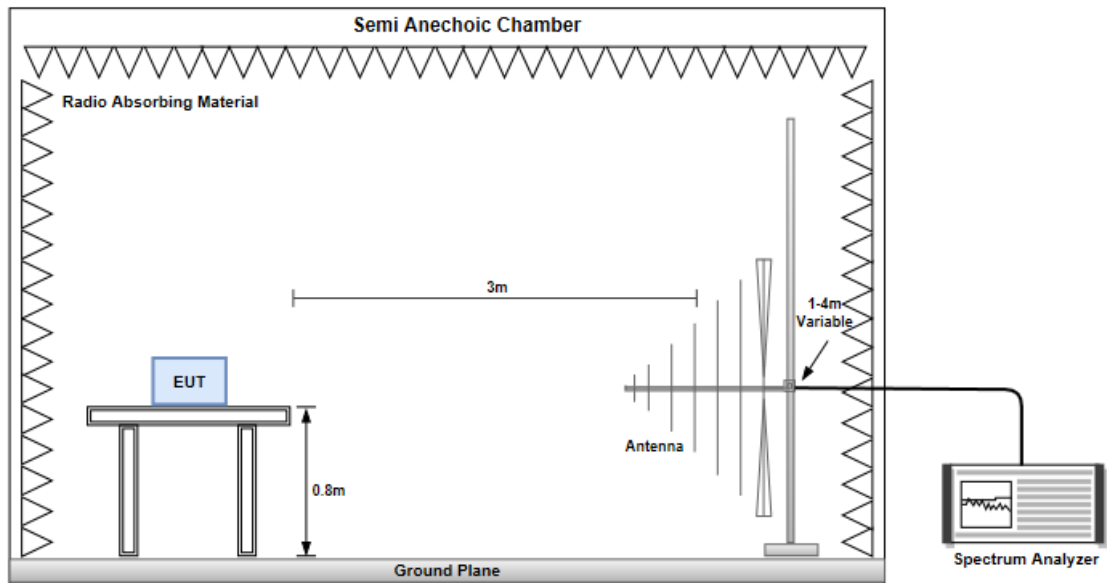

Radiated Emissions above 1 GHz

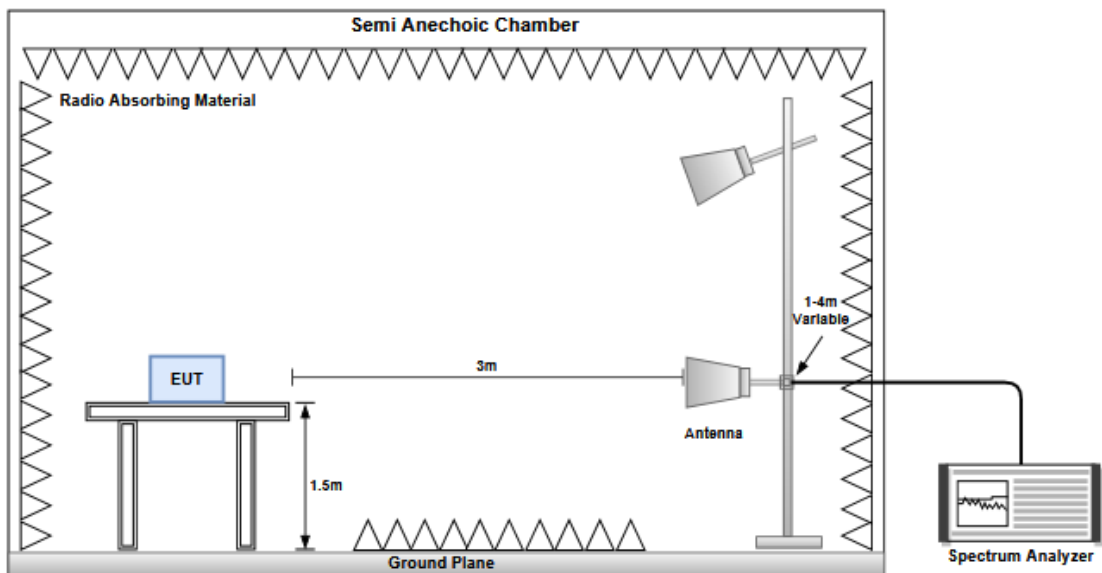


3.4.4 Test Results

Refer to Appendix D.

3.5 In-Band Emissions

3.5.1 Limit


Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

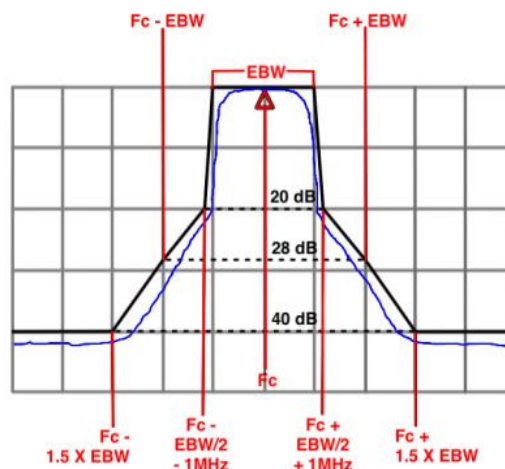

3.5.2 Test Procedures

1. Connect output of the antenna port to a spectrum analyzer
2. Set the reference level of the measuring equipment
3. Measure the 26 dB EBW
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW
6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask

3.5.3 Test Setup



3.5.4 Test Results

Ambient Condition	23-25°C / 63-65%	Tested By	Aska Huang
--------------------------	------------------	------------------	------------

Refer to Appendix E.

3.6 Frequency Stability


3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.6.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 20 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under normal and extreme condition for temperature and voltage.

3.6.3 Test Setup

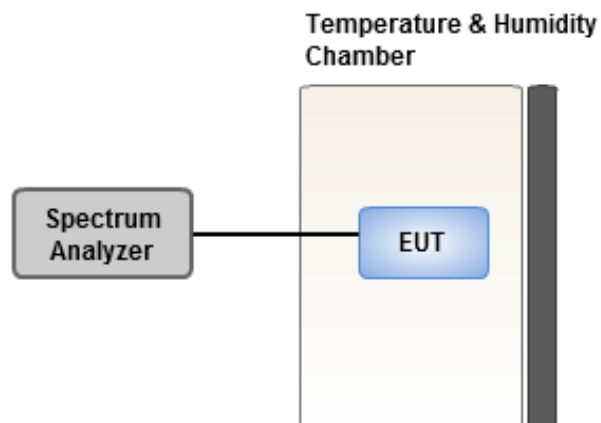

3.6.4 Test Result of Frequency Stability

Ambient Condition	23-25°C / 63-65%	Tested By	Aska Huang
-------------------	------------------	-----------	------------

Refer to Appendix F.

3.7 Contention Based Protocol


3.7.1 Limit

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty

3.7.2 Test Procedure

1. Configure the EUT to transmit with a constant duty cycle
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer, as shown in Figure. Ensure that the attenuator 1 provides enough attenuation to not overload the signal analyzer receiver.
4. Monitoring the signal analyzer, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 of KDB 987594 D02 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a splitter, to the signal analyzer and the EUT as shown in Figure.
7. Transmit the AWGN signal (RF ON) at the EUT's antenna port and verify its characteristics and signal power level on the signal analyzer.
8. Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

3.7.3 Test Setup

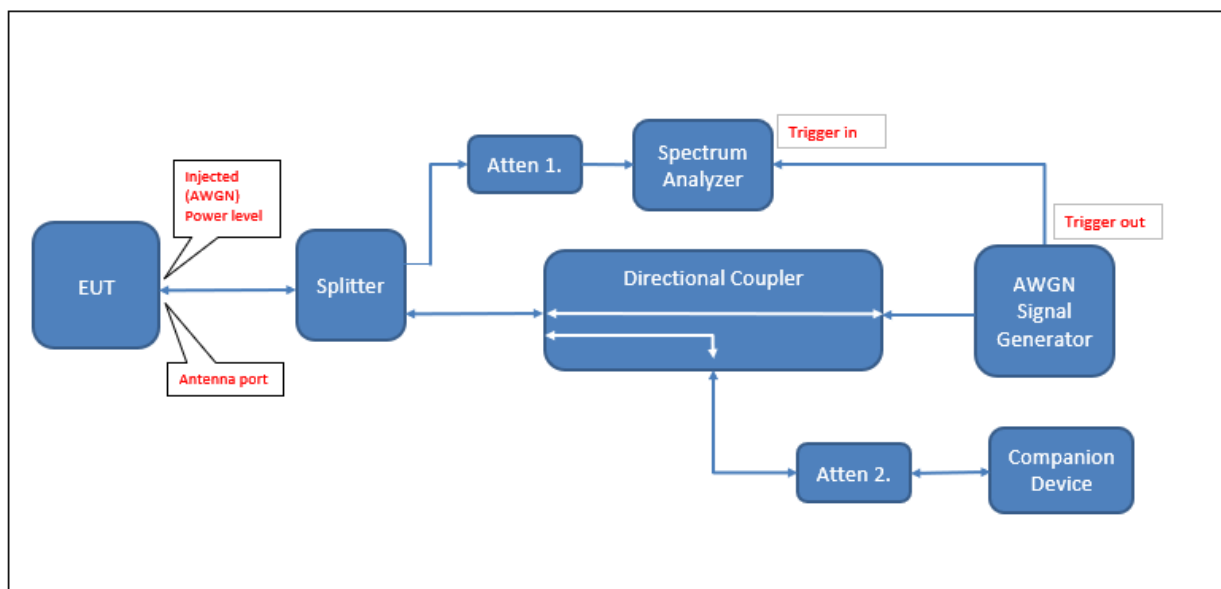

3.7.4 Test Result

Ambient Condition	24°C / 67%	Tested By	Jack Li
EUT FW version	V6.83(ACUF.0)b2_20260817		

Refer to Appendix G.

3.8 AC Power Line Conducted Emissions

3.8.1 Limit of AC Power Line Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.8.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.8.3 Test Setup

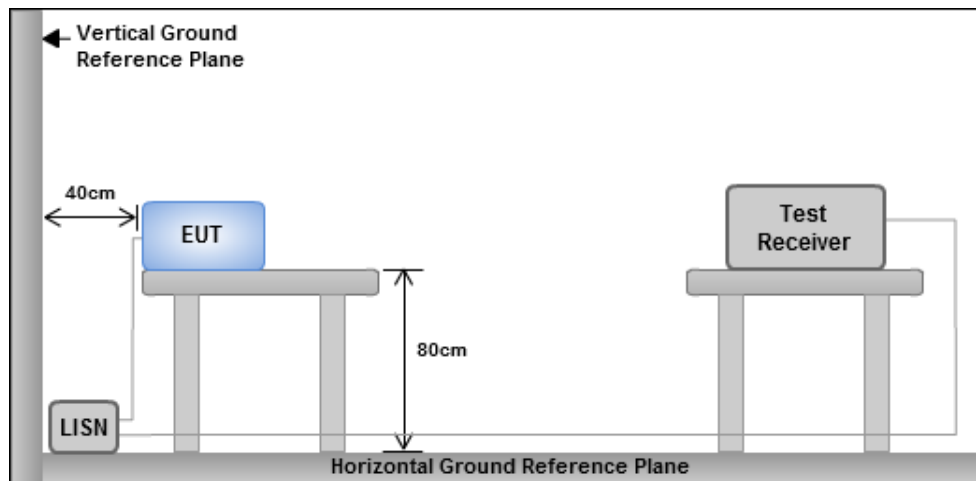

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.8.4 Test Result

Refer to Appendix H.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <https://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Zhonghe

Tel: 886-2-2222-0288

1F, No. 6, Jiankang Road, Zhonghe
District, New Taipei City 235045,
Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw

==END==

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	23.705M	19.22M	19M2D1D	22.935M	19.173M
802.11be EHT40_Nss1,(MCS0)_2TX	46.64M	38.71M	38M7D1D	45.32M	38.585M
802.11be EHT80_Nss1,(MCS0)_2TX	91.08M	78.024M	78M0D1D	89.54M	77.794M
802.11be EHT160_Nss1,(MCS0)_2TX	178.64M	158.068M	158MD1D	172.48M	157.562M
802.11be EHT320_Nss1,(MCS0)_2TX	344.08M	316.816M	317MD1D	339.68M	315.819M
6.425-6.525GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	23.705M	19.284M	19M3D1D	22.935M	19.158M
802.11be EHT40_Nss1,(MCS0)_2TX	46.09M	38.753M	38M8D1D	45.54M	38.557M
802.11be EHT80_Nss1,(MCS0)_2TX	91.52M	77.944M	77M9D1D	91.08M	77.864M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	23.595M	19.258M	19M3D1D	23.1M	19.178M
802.11be EHT40_Nss1,(MCS0)_2TX	46.42M	38.721M	38M7D1D	44.99M	38.53M
802.11be EHT80_Nss1,(MCS0)_2TX	91.52M	78.046M	78M0D1D	89.76M	77.877M
802.11be EHT160_Nss1,(MCS0)_2TX	178.2M	158.114M	158MD1D	173.36M	157.882M
802.11be EHT320_Nss1,(MCS0)_2TX	344.08M	317.217M	317MD1D	342.32M	316.736M
6.875-7.125GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	23.76M	19.236M	19M2D1D	23.155M	19.175M
802.11be EHT40_Nss1,(MCS0)_2TX	46.53M	38.704M	38M7D1D	45.21M	38.567M
802.11be EHT80_Nss1,(MCS0)_2TX	91.3M	78.082M	78M1D1D	89.32M	77.933M
802.11be EHT160_Nss1,(MCS0)_2TX	177.76M	158.121M	158MD1D	174.68M	157.812M
802.11be EHT320_Nss1,(MCS0)_2TX	344.08M	317.045M	317MD1D	341.44M	316.266M

Max-N dB = Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5955MHz	Pass	Inf	22.935M	19.22M	23.705M	19.173M
6175MHz	Pass	Inf	23.32M	19.197M	23.595M	19.2M
6415MHz	Pass	Inf	23.65M	19.189M	23.485M	19.176M
6435MHz	Pass	Inf	22.935M	19.198M	23.485M	19.19M
6475MHz	Pass	Inf	23.32M	19.158M	23.705M	19.284M
6515MHz	Pass	Inf	22.99M	19.183M	23.32M	19.225M
6535MHz	Pass	Inf	23.1M	19.202M	23.595M	19.258M
6715MHz	Pass	Inf	23.265M	19.185M	23.485M	19.21M
6855MHz Straddle 6.525-6.875GHz	Pass	Inf	23.375M	19.178M	23.595M	19.181M
6875MHz Straddle 6.875-7.125GHz	Pass	Inf	23.265M	19.217M	23.65M	19.204M
6895MHz	Pass	Inf	23.155M	19.215M	23.485M	19.228M
7015MHz	Pass	Inf	23.595M	19.21M	23.595M	19.175M
7095MHz	Pass	Inf	23.155M	19.192M	23.65M	19.211M
7115MHz	Pass	Inf	23.155M	19.236M	23.76M	19.231M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	Inf	45.32M	38.585M	45.65M	38.621M
6165MHz	Pass	Inf	45.65M	38.617M	45.65M	38.71M
6405MHz	Pass	Inf	45.98M	38.664M	46.64M	38.628M
6445MHz	Pass	Inf	45.87M	38.753M	46.09M	38.614M
6485MHz	Pass	Inf	45.65M	38.58M	45.54M	38.557M
6525MHz Straddle 6.525-6.875GHz	Pass	Inf	45.98M	38.624M	44.99M	38.721M
6565MHz	Pass	Inf	45.87M	38.705M	45.87M	38.553M
6725MHz	Pass	Inf	45.54M	38.657M	46.42M	38.53M
6845MHz Straddle 6.525-6.875GHz	Pass	Inf	45.87M	38.659M	45.76M	38.623M
6885MHz Straddle 6.875-7.125GHz	Pass	Inf	45.21M	38.704M	46.2M	38.567M
6925MHz	Pass	Inf	45.76M	38.602M	45.98M	38.645M
7005MHz	Pass	Inf	45.98M	38.649M	45.65M	38.681M
7085MHz	Pass	Inf	45.43M	38.58M	46.53M	38.657M
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	Inf	89.76M	77.794M	89.54M	77.831M
6145MHz	Pass	Inf	90.42M	77.895M	91.08M	77.959M
6385MHz	Pass	Inf	91.08M	78.024M	89.76M	77.995M
6465MHz	Pass	Inf	91.52M	77.944M	91.08M	77.864M
6545MHz Straddle 6.525-6.875GHz	Pass	Inf	90.64M	77.987M	90.42M	77.943M
6625MHz	Pass	Inf	90.2M	77.96M	89.76M	77.877M
6705MHz	Pass	Inf	89.98M	77.936M	91.52M	77.963M
6785MHz	Pass	Inf	90.64M	78.046M	91.3M	77.91M
6865MHz Straddle 6.875-7.125GHz	Pass	Inf	90.2M	77.957M	89.32M	77.998M
6945MHz	Pass	Inf	90.64M	77.933M	90.2M	78.082M
7025MHz	Pass	Inf	90.86M	77.937M	91.3M	77.942M
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	Inf	174.68M	157.621M	172.48M	157.562M
6185MHz	Pass	Inf	177.32M	158.068M	177.32M	157.764M
6345MHz	Pass	Inf	178.64M	157.995M	176.88M	157.929M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
6505MHz Straddle 6.525-6.875GHz	Pass	Inf	178.2M	158.109M	176M	158.114M
6665MHz	Pass	Inf	174.68M	157.882M	173.36M	157.944M
6825MHz Straddle 6.875-7.125GHz	Pass	Inf	177.76M	158.003M	174.68M	157.812M
6985MHz	Pass	Inf	177.32M	158.121M	176M	157.88M
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6105MHz	Pass	320M	339.68M	315.819M	340.56M	316.109M
6265MHz	Pass	320M	344.08M	316.541M	341.44M	316.816M
6425MHz Straddle 6.525-6.875GHz	Pass	320M	342.32M	317.164M	343.2M	317.217M
6585MHz Straddle 6.525-6.875GHz	Pass	320M	344.08M	317.114M	343.2M	316.736M
6745MHz Straddle 6.875-7.125GHz	Pass	320M	343.2M	316.52M	343.2M	316.918M
6905MHz Straddle 6.875-7.125GHz	Pass	320M	344.08M	316.266M	341.44M	317.045M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band


Port X-OBW = Port X 99% occupied bandwidth



5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW


5955MHz

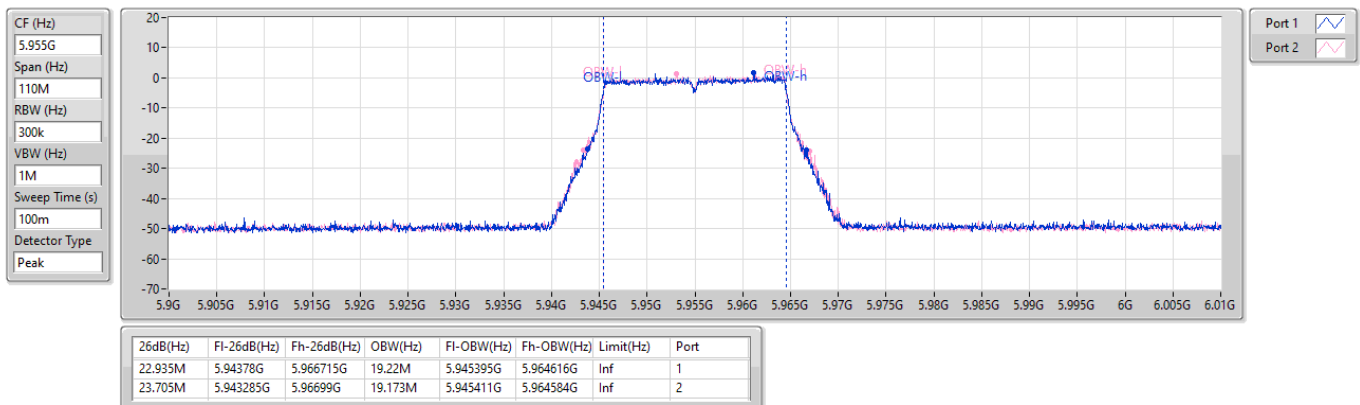

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

6175MHz

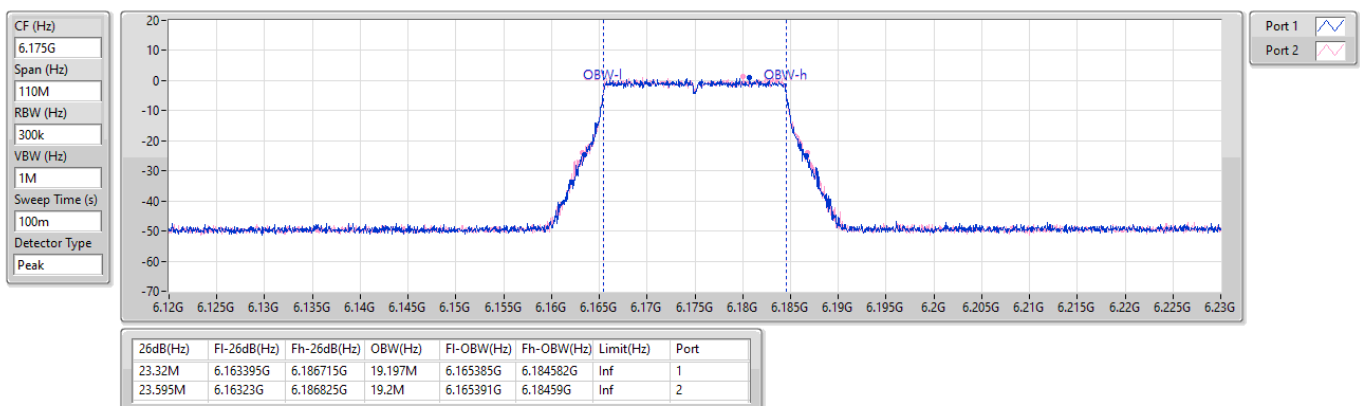




5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW


6415MHz

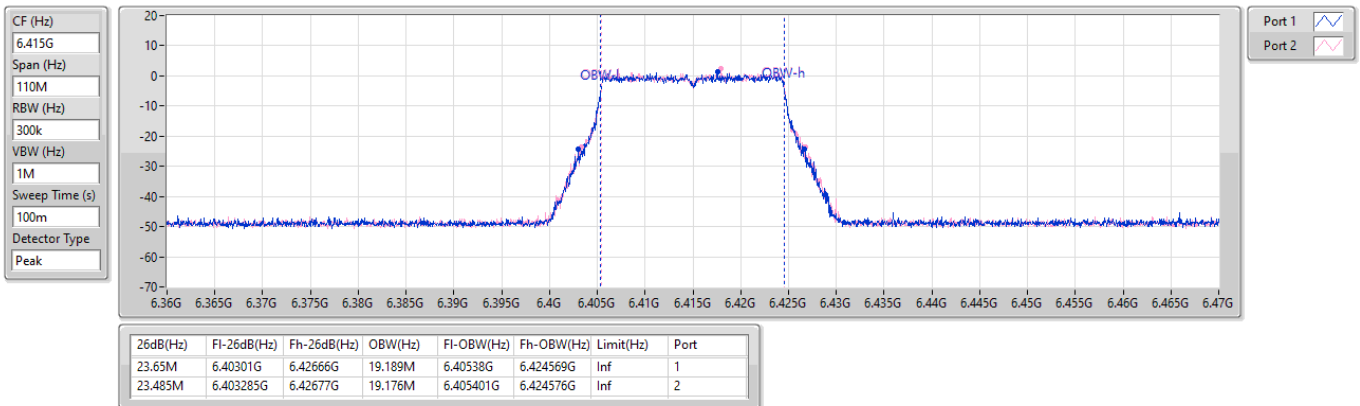

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

6435MHz

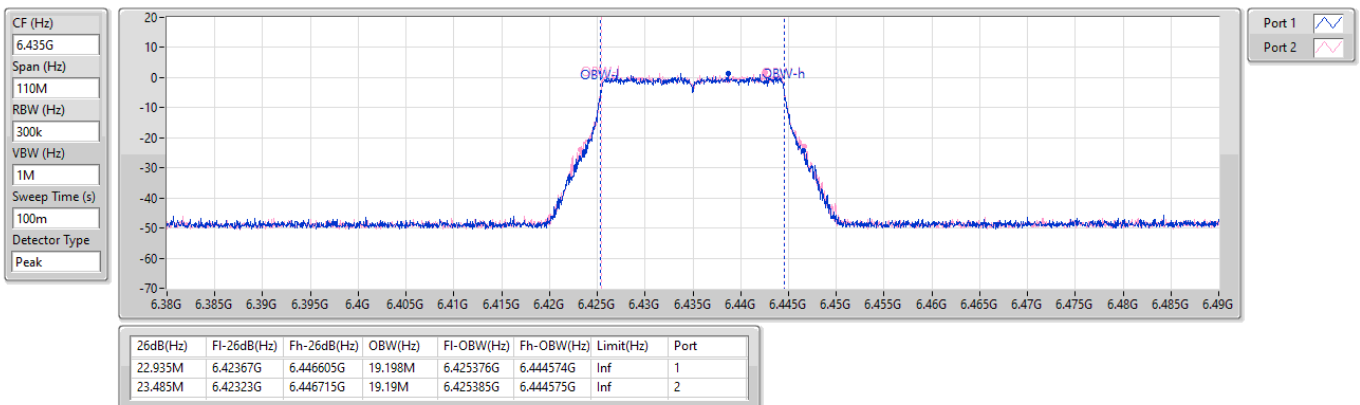




6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW


6475MHz

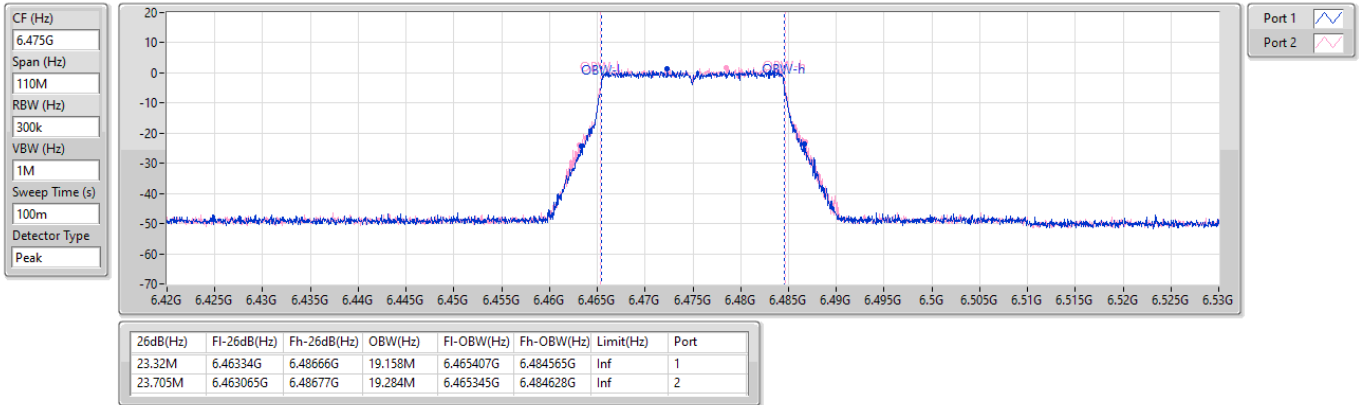

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

6515MHz

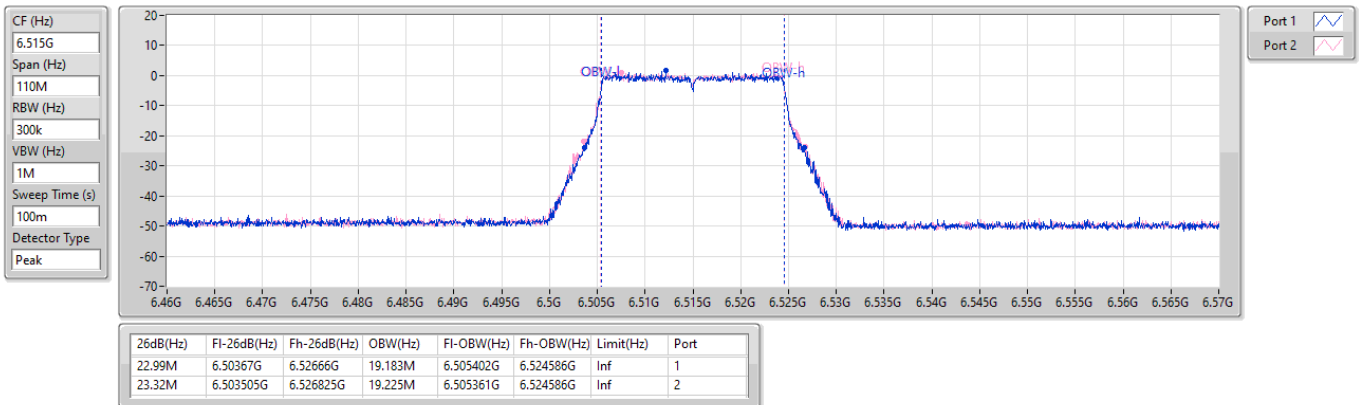




6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW


6535MHz

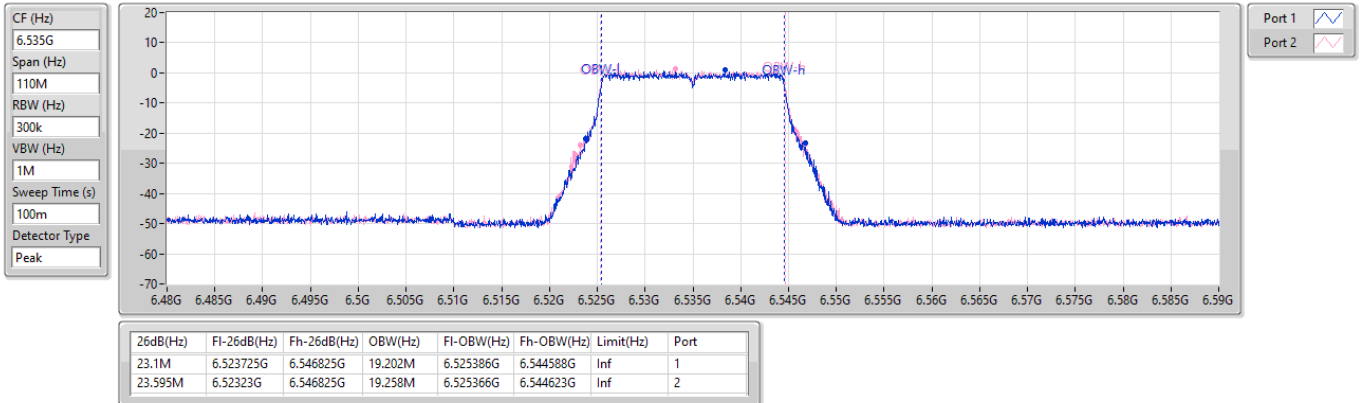

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

6715MHz

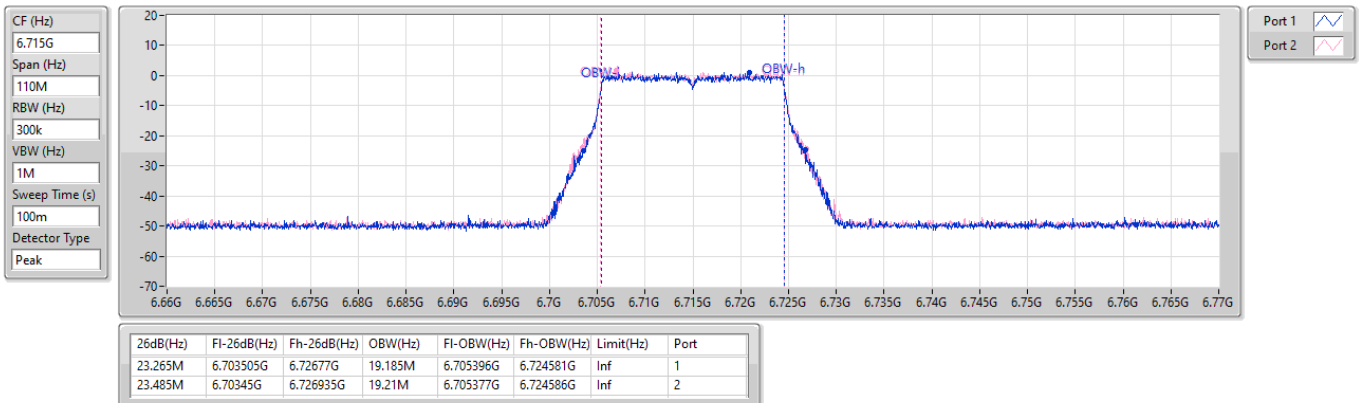




6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW


6855MHz Straddle 6.525-6.875GHz

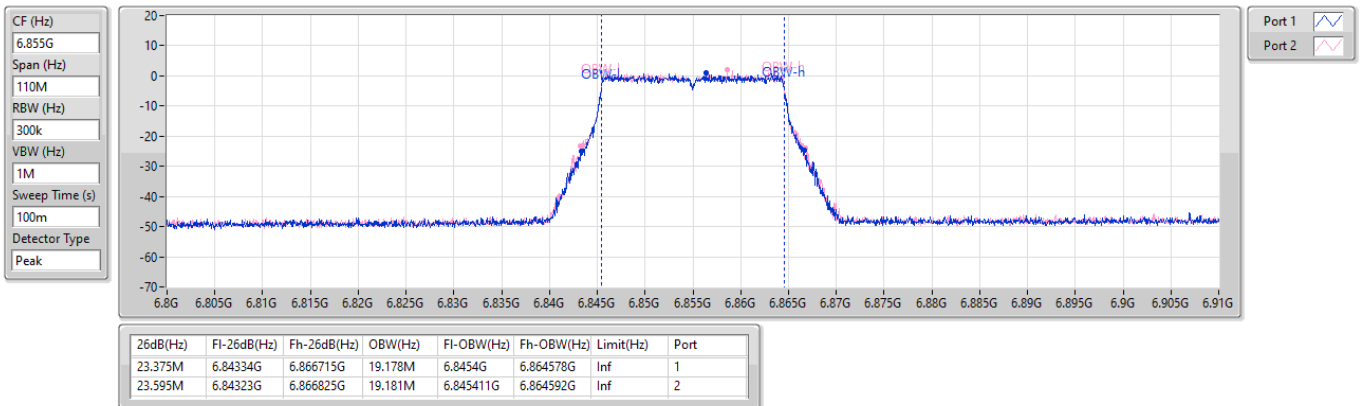

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

6875MHz Straddle 6.875-7.125GHz

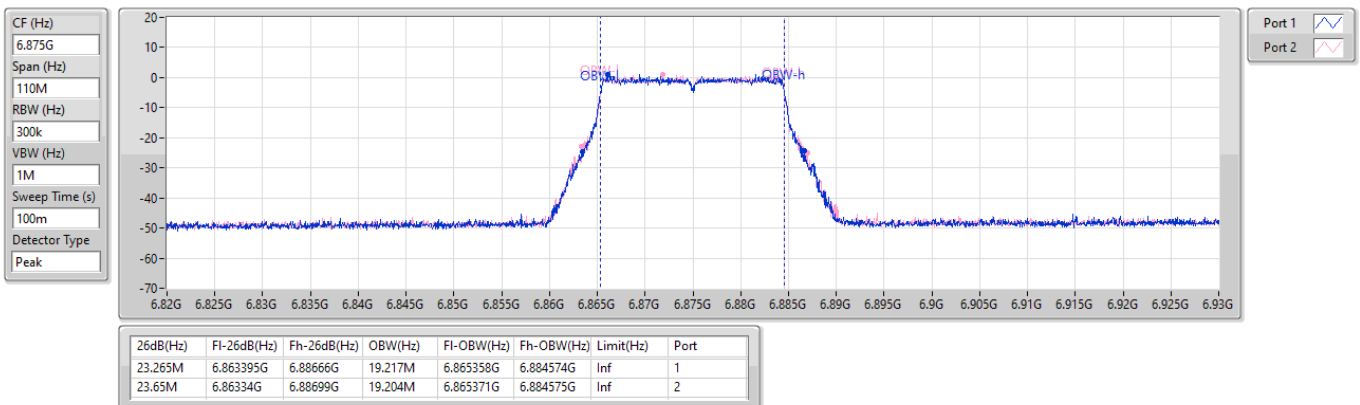




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW


6895MHz

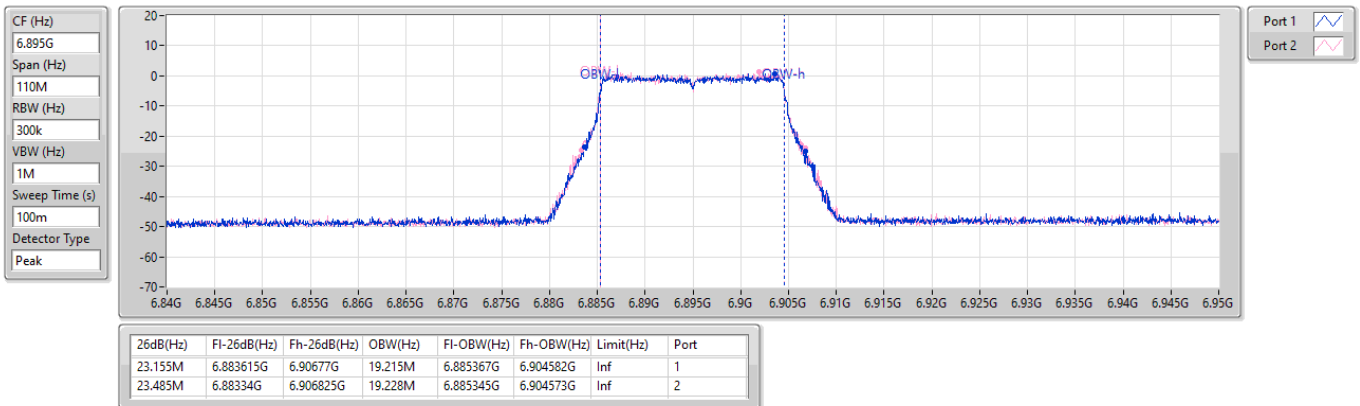

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

7015MHz

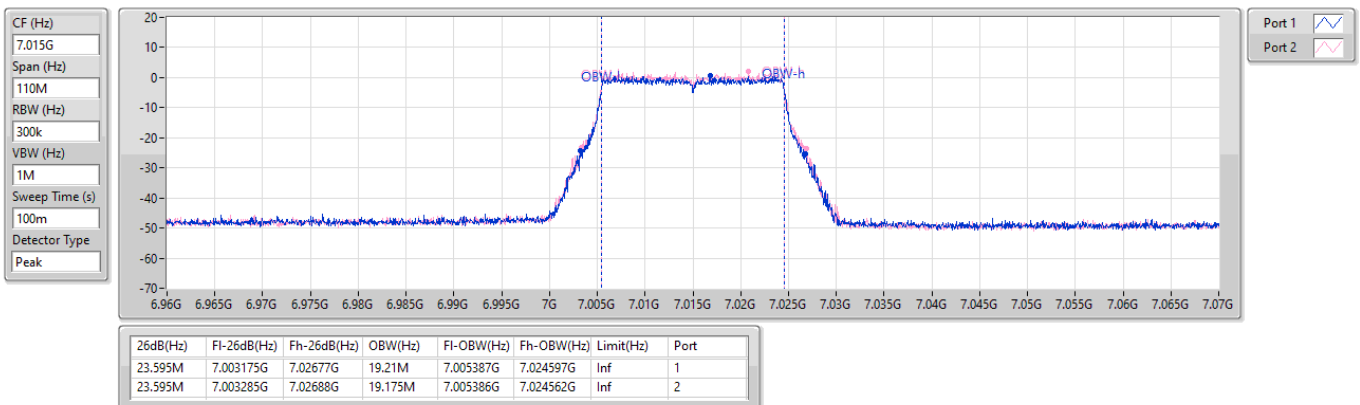




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW


7095MHz

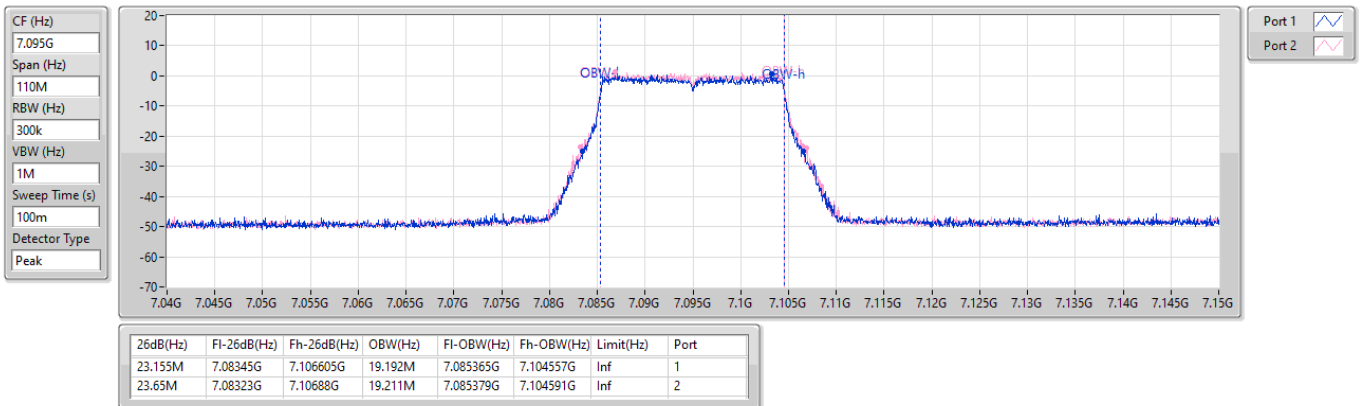

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

7115MHz

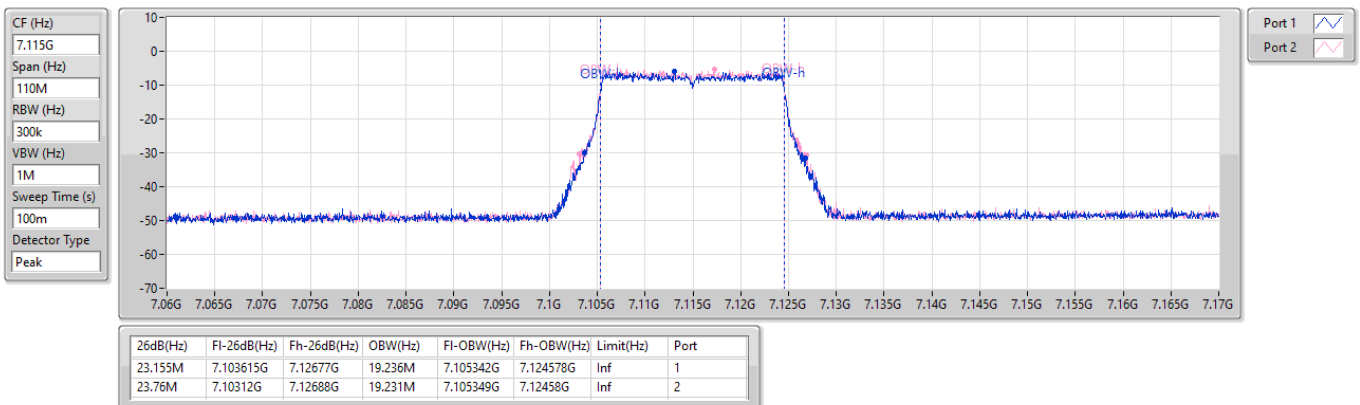




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW


5965MHz

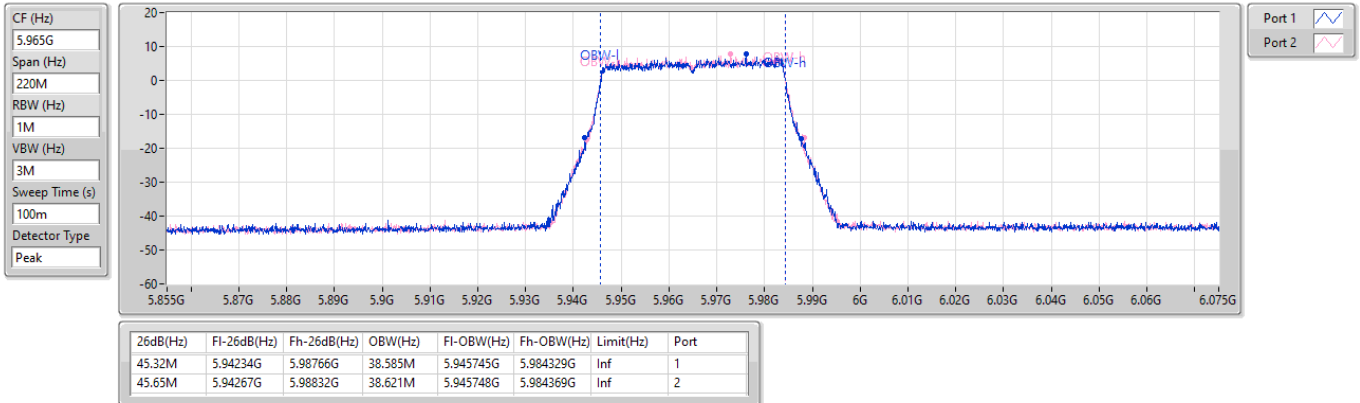

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6165MHz

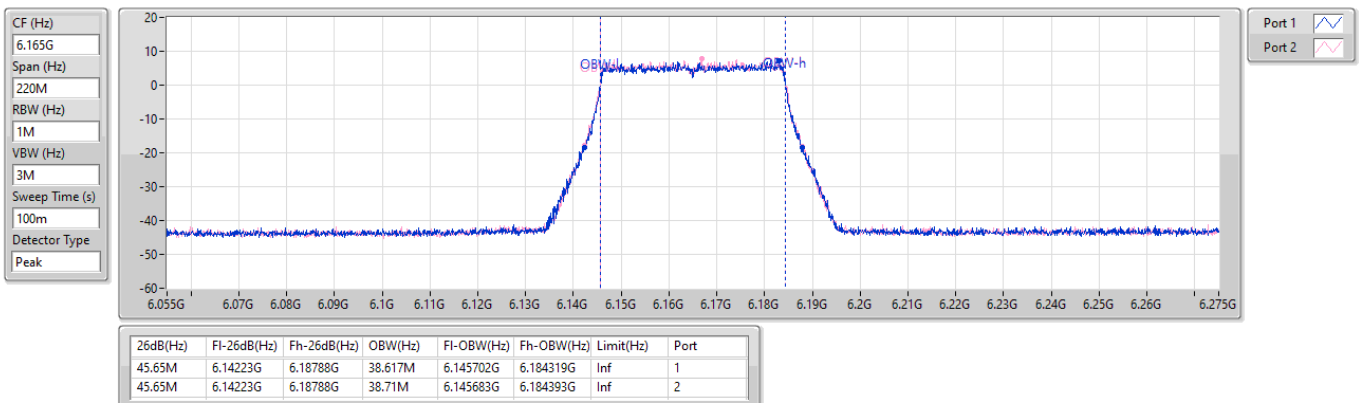




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW


6405MHz

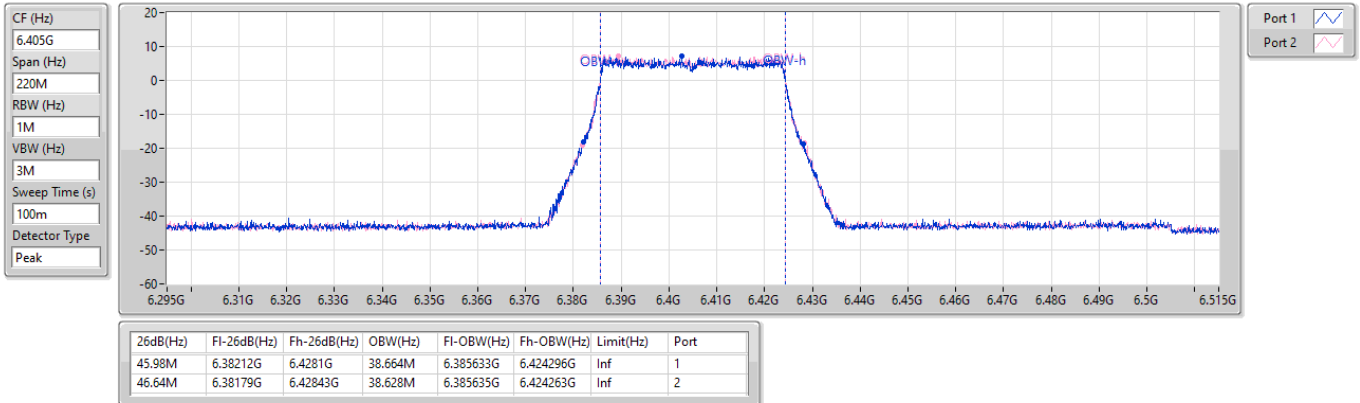

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6445MHz

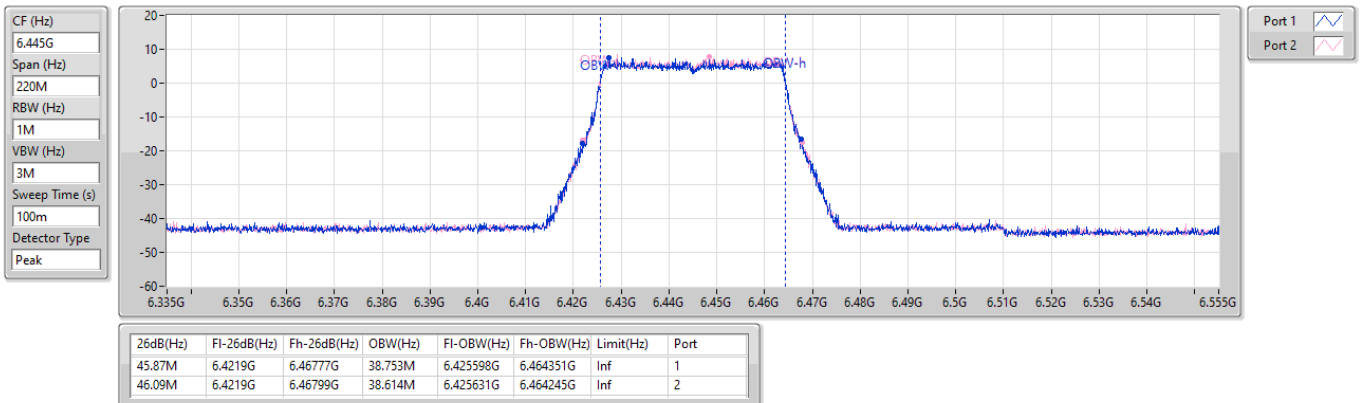




6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW


6485MHz

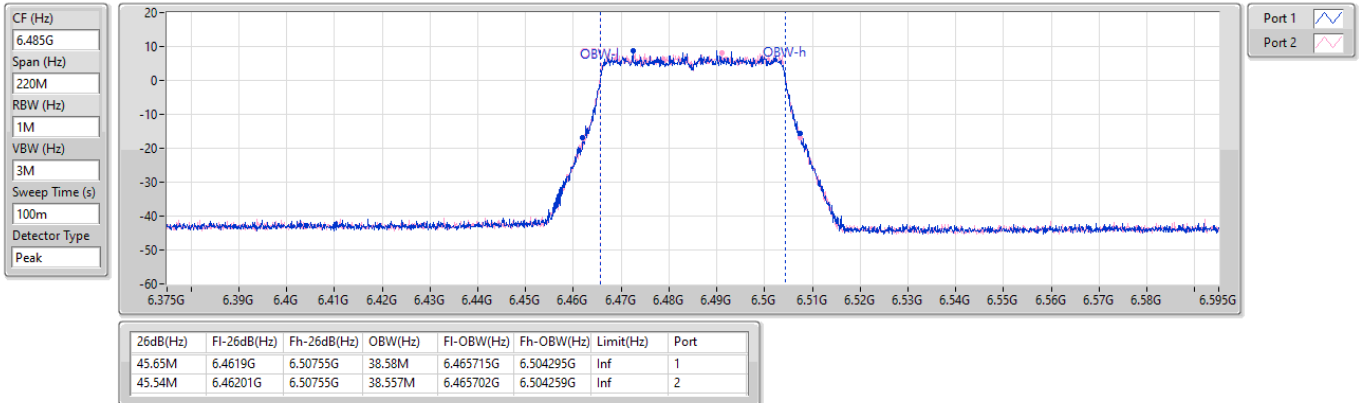

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6525MHz Straddle 6.525-6.875GHz

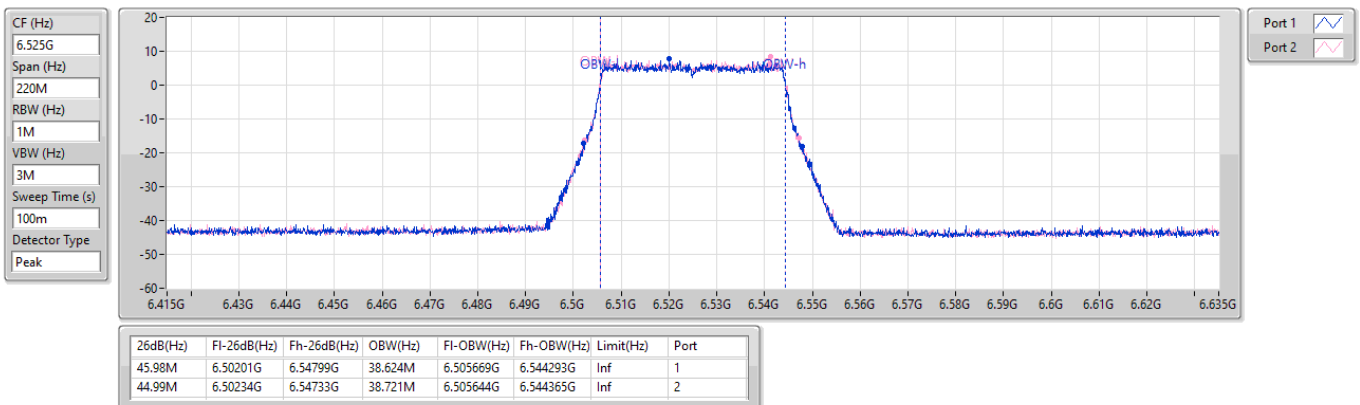




6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW


6565MHz

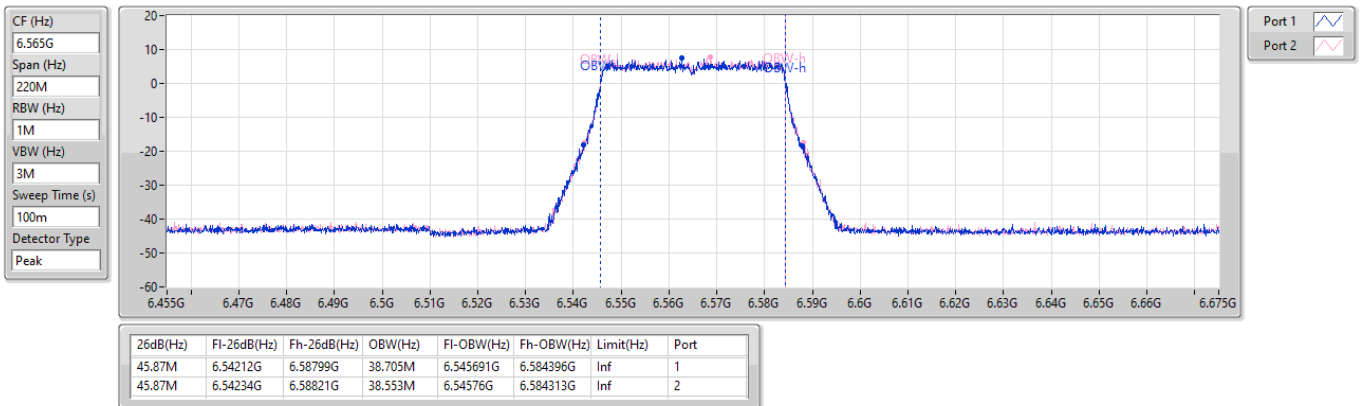

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6725MHz

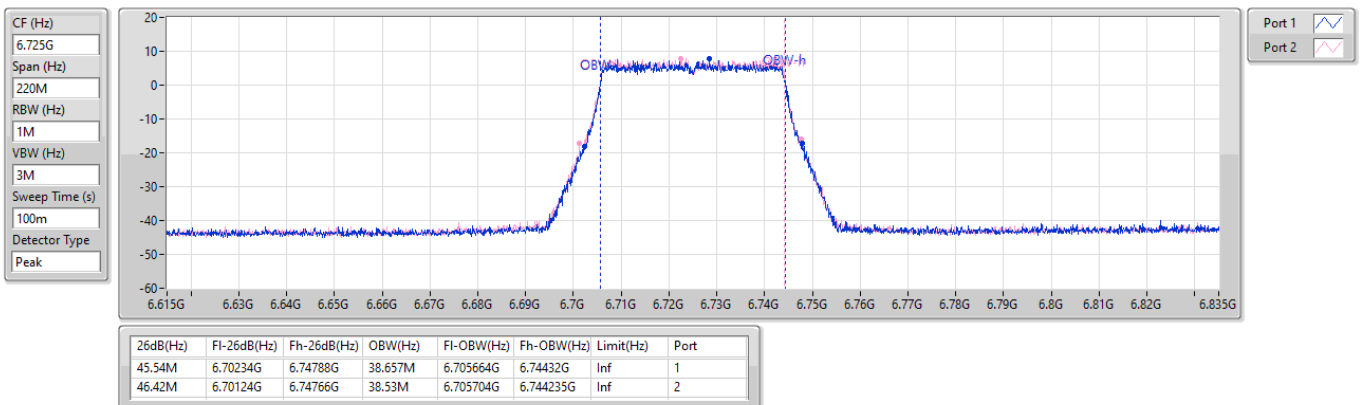




6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW


6845MHz Straddle 6.525-6.875GHz

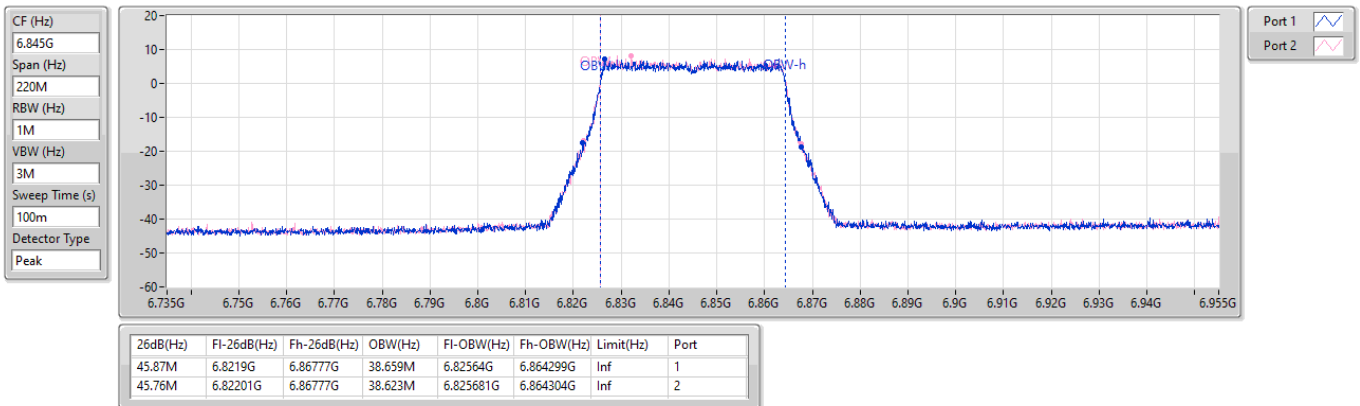

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW


6885MHz Straddle 6.875-7.125GHz

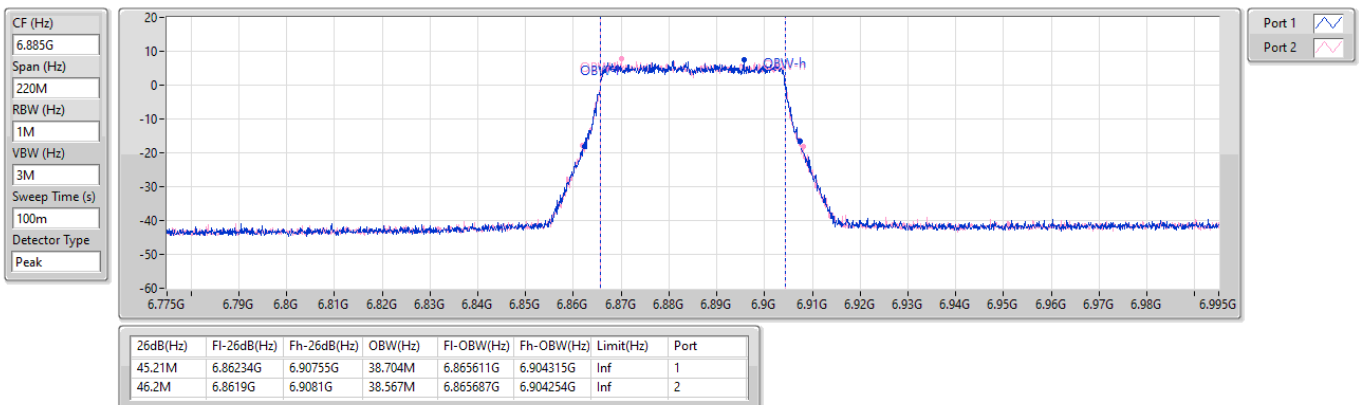

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW


6925MHz

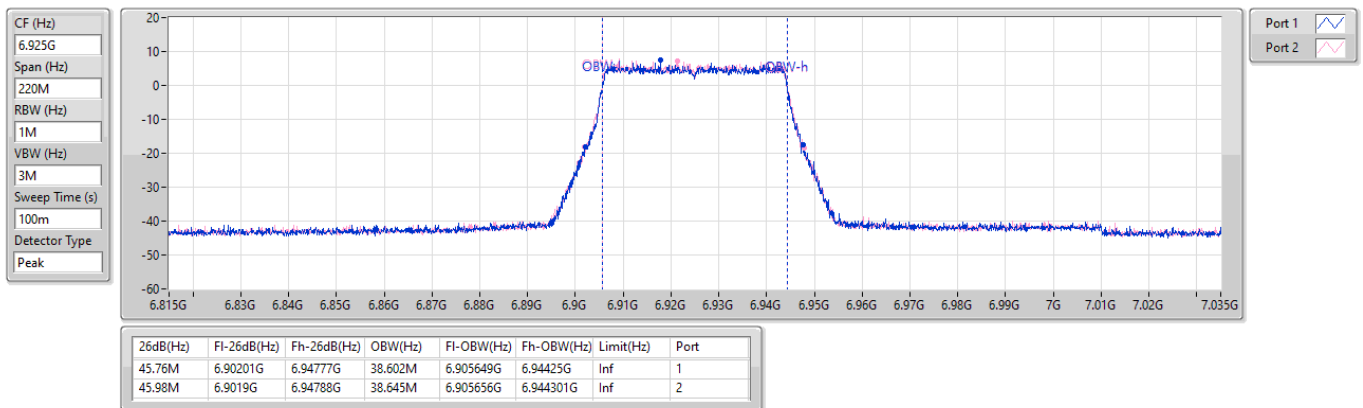

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

7005MHz

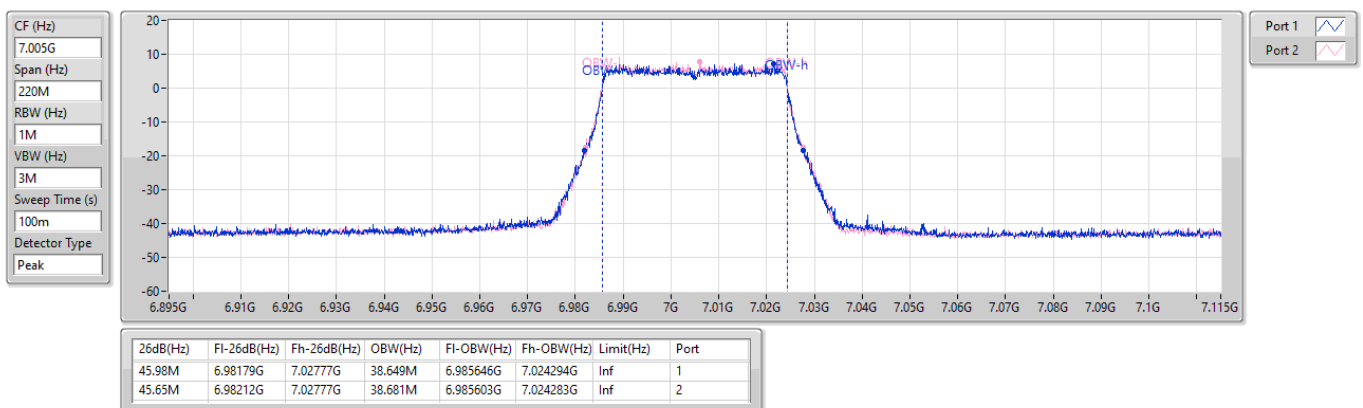




6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW


7085MHz

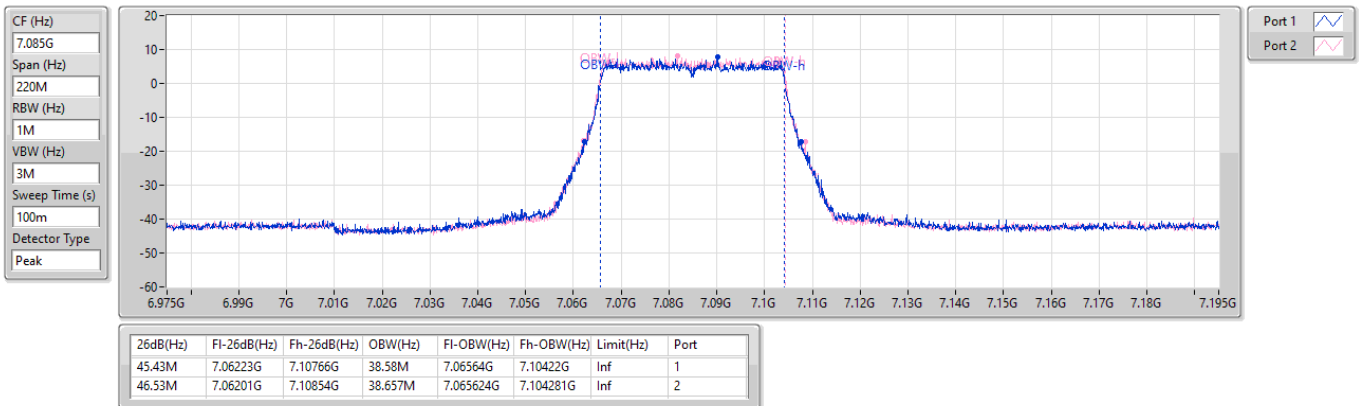

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5985MHz

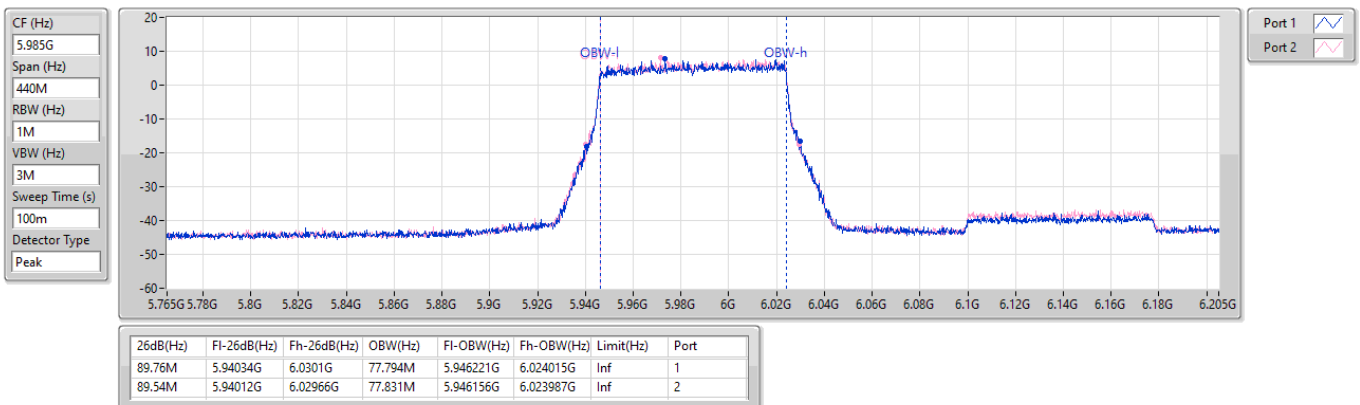




5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW


6145MHz

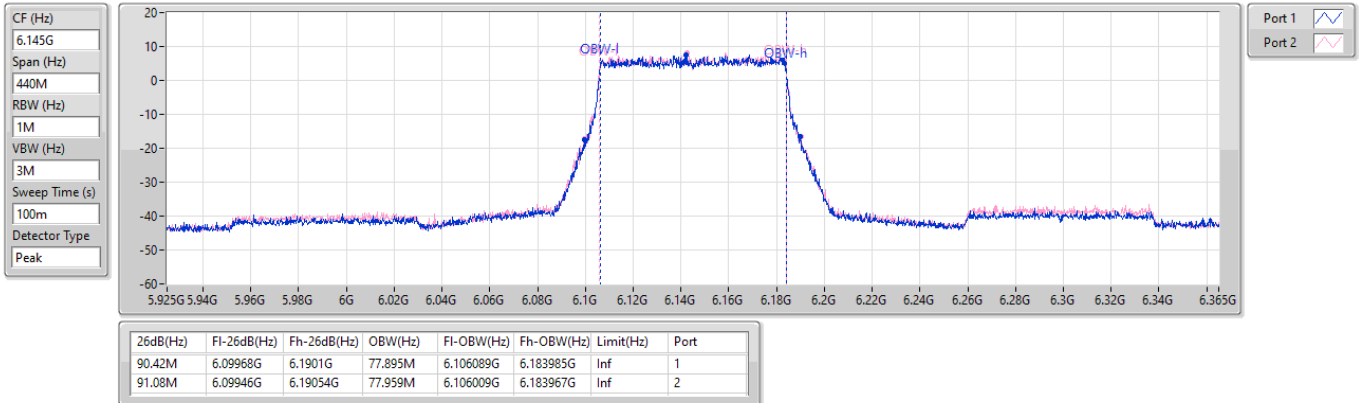

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

6385MHz

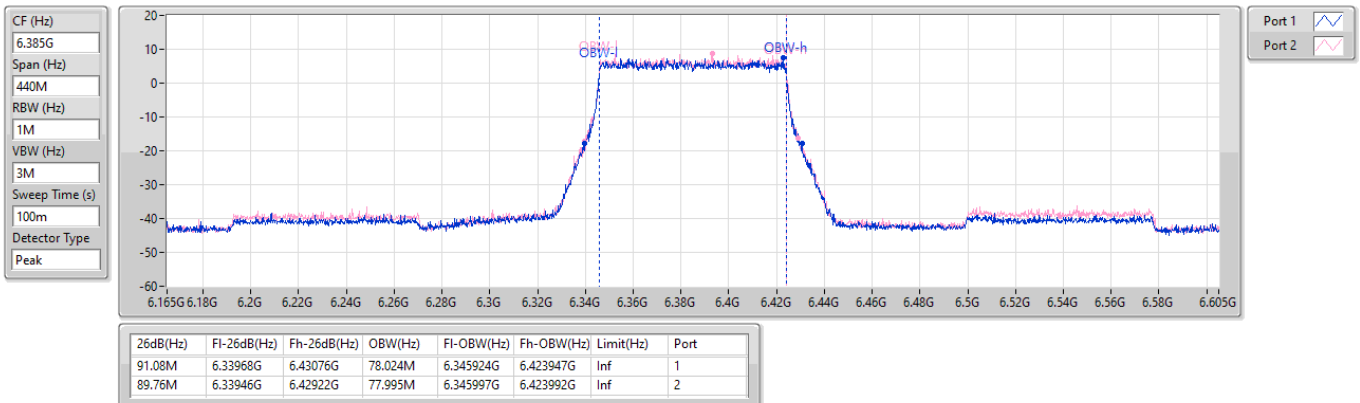




6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW


6465MHz

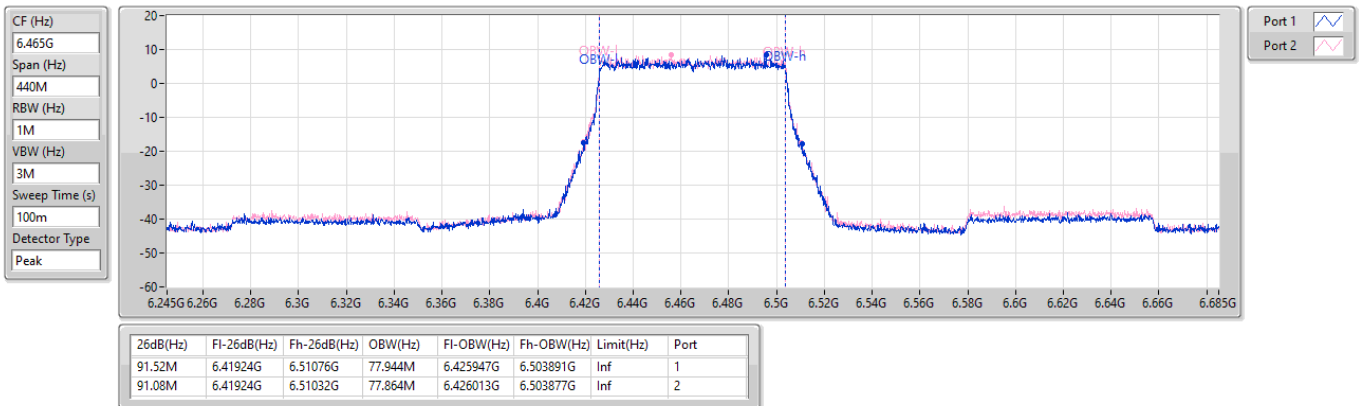

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

6545MHz Straddle 6.525-6.875GHz

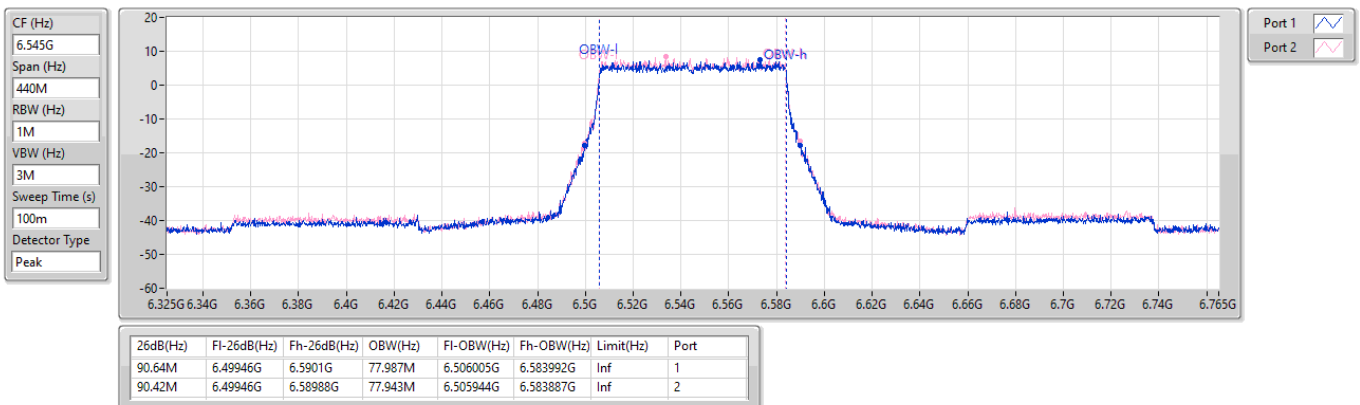




6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW


6625MHz

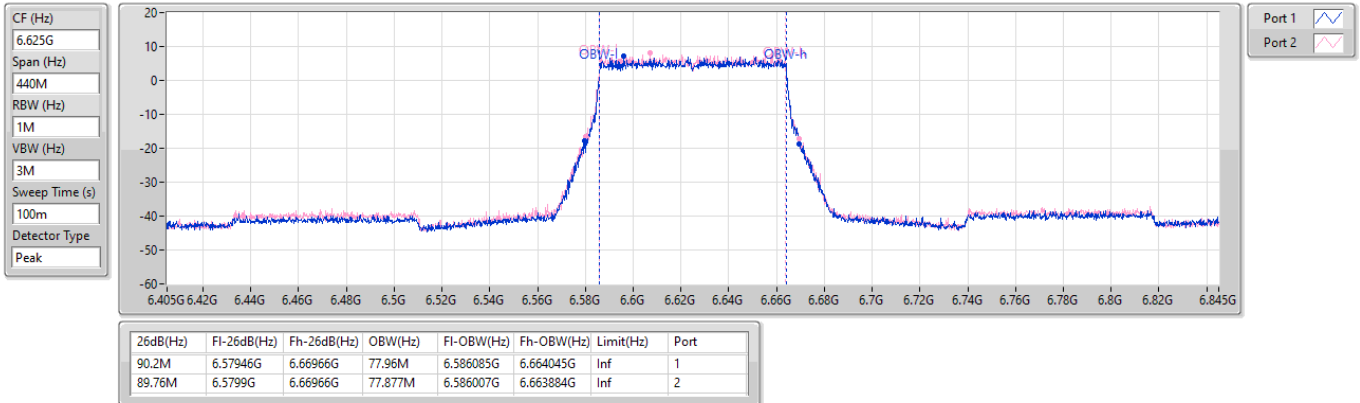

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

6705MHz

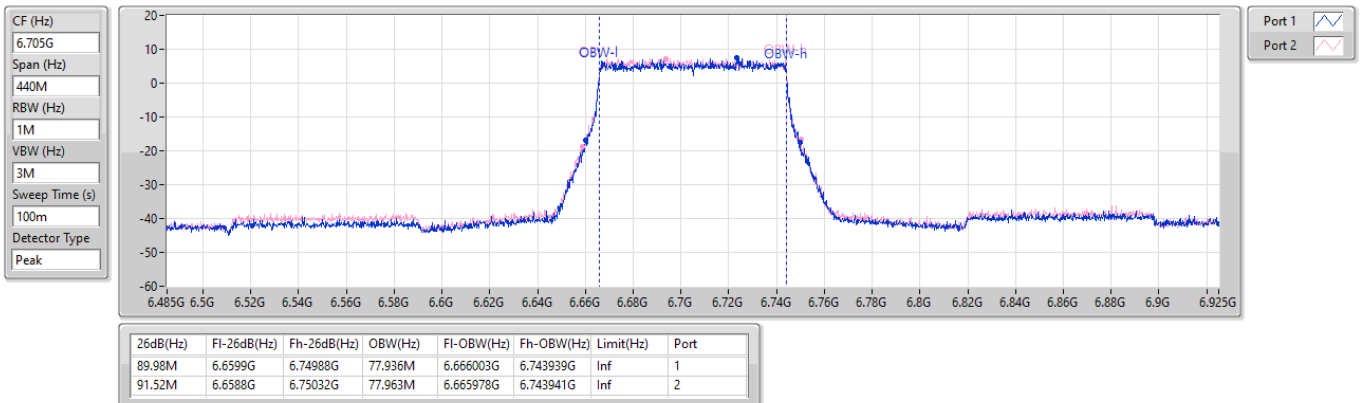




6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW


6785MHz

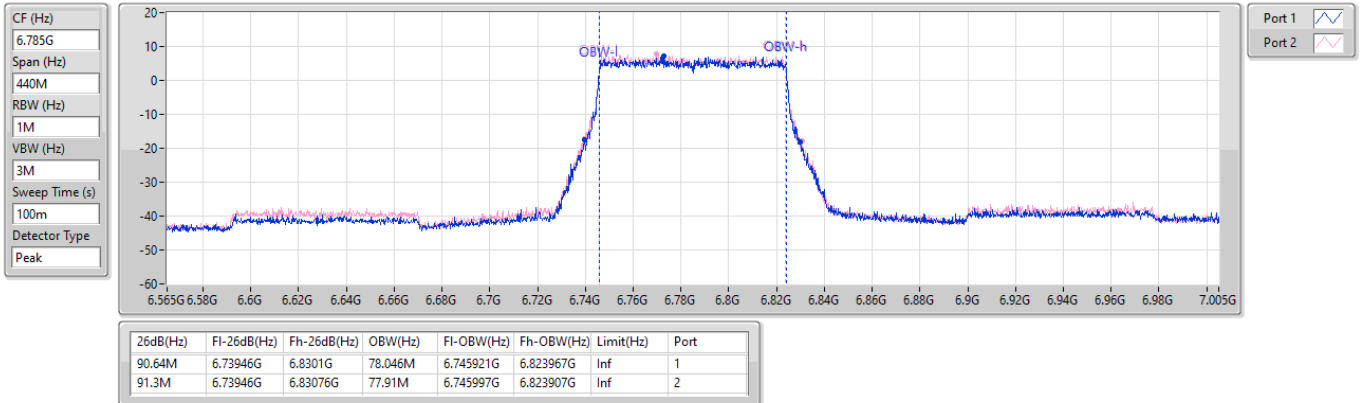

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

6865MHz Straddle 6.875-7.125GHz

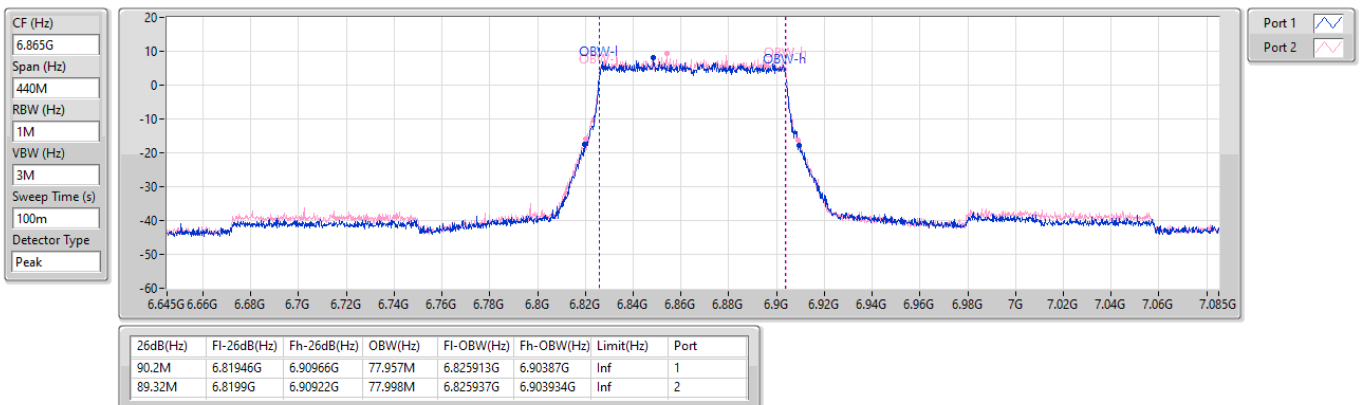




6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW


6945MHz

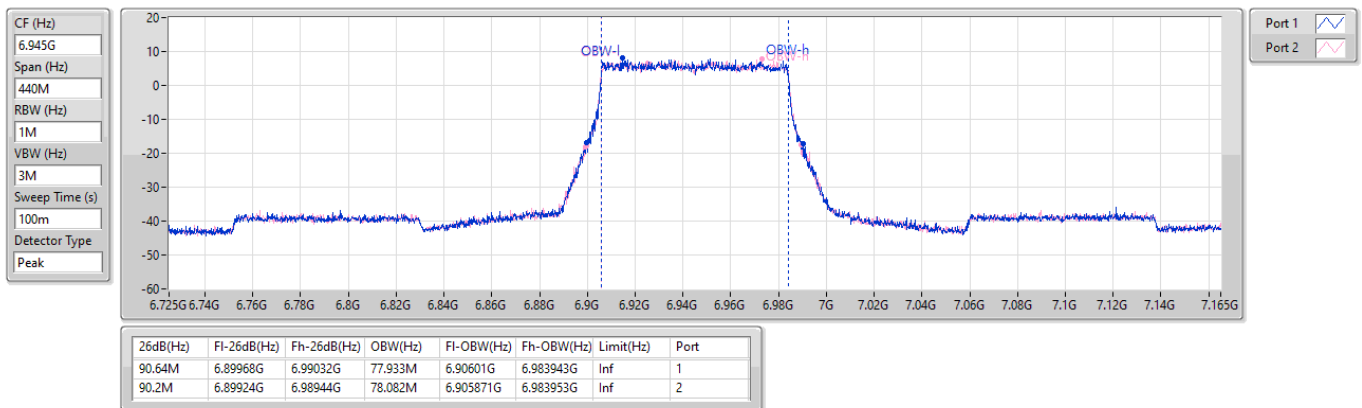

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

7025MHz

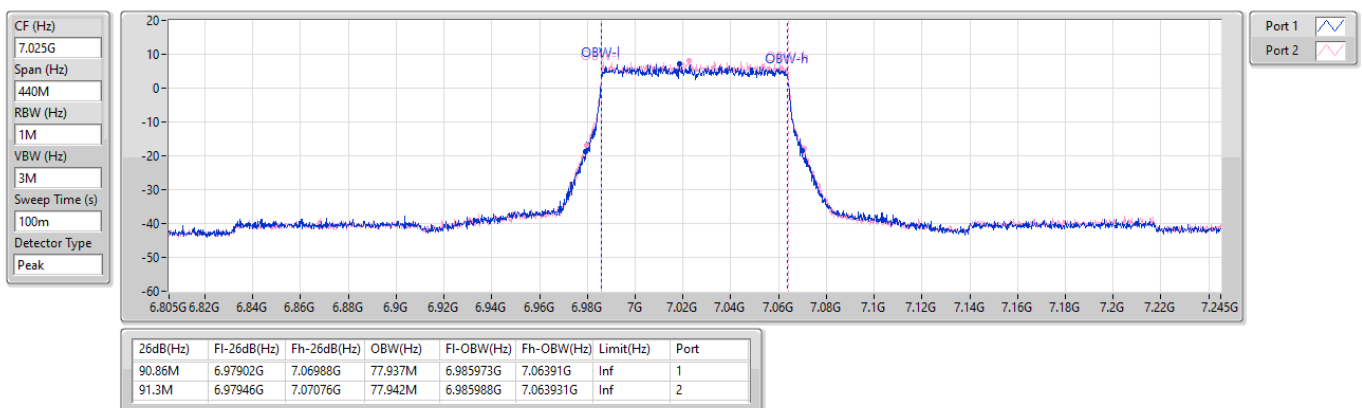




5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW


6025MHz

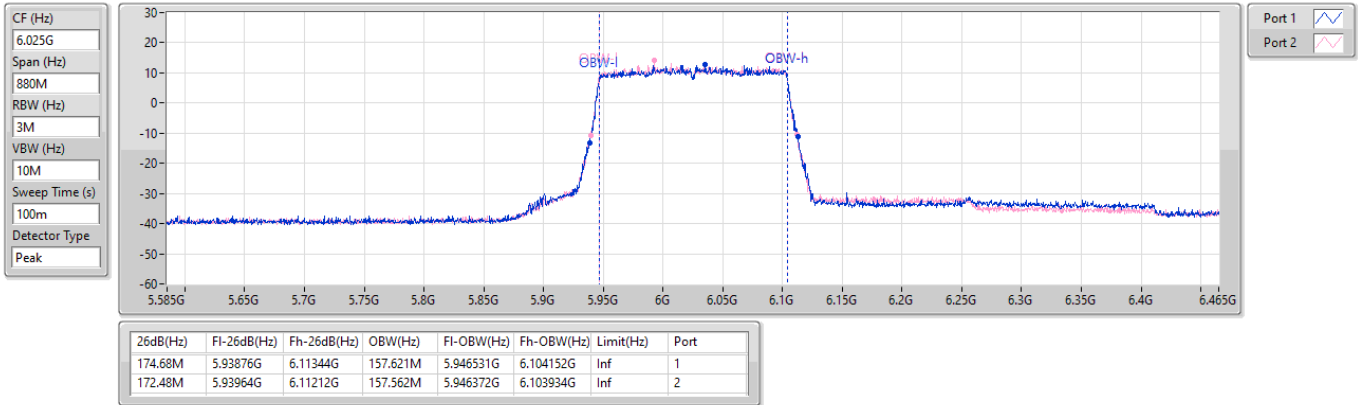

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6185MHz

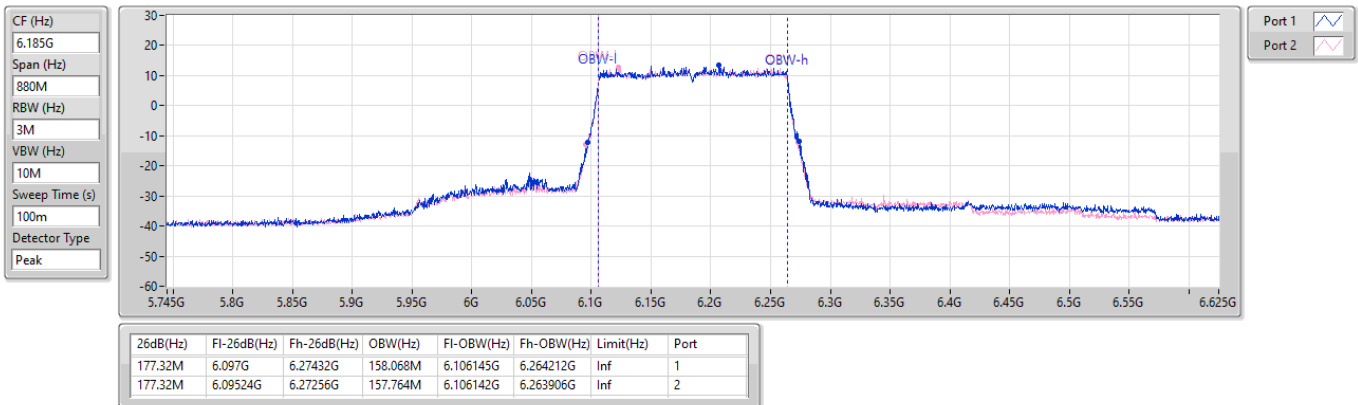




5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW


6345MHz

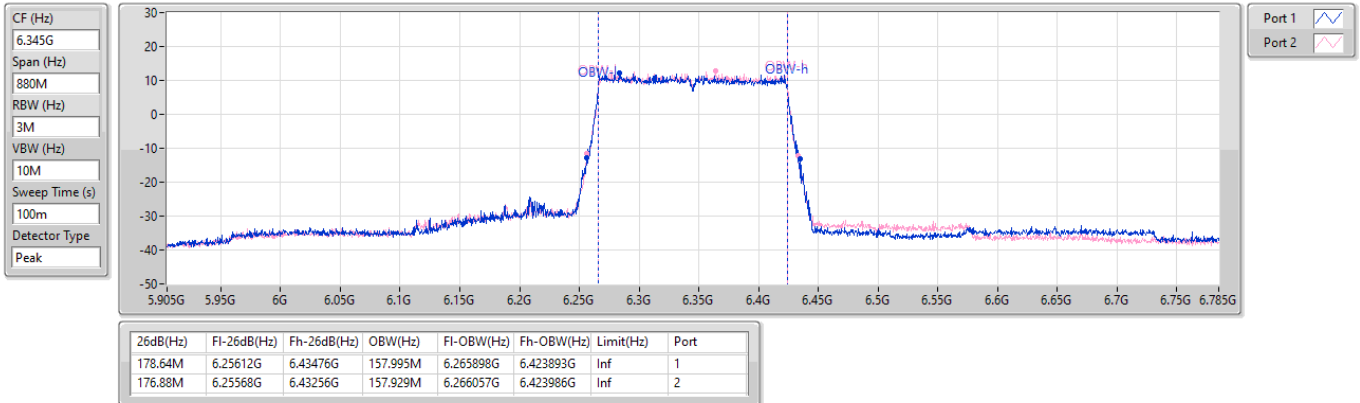

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6505MHz Straddle 6.525-6.875GHz

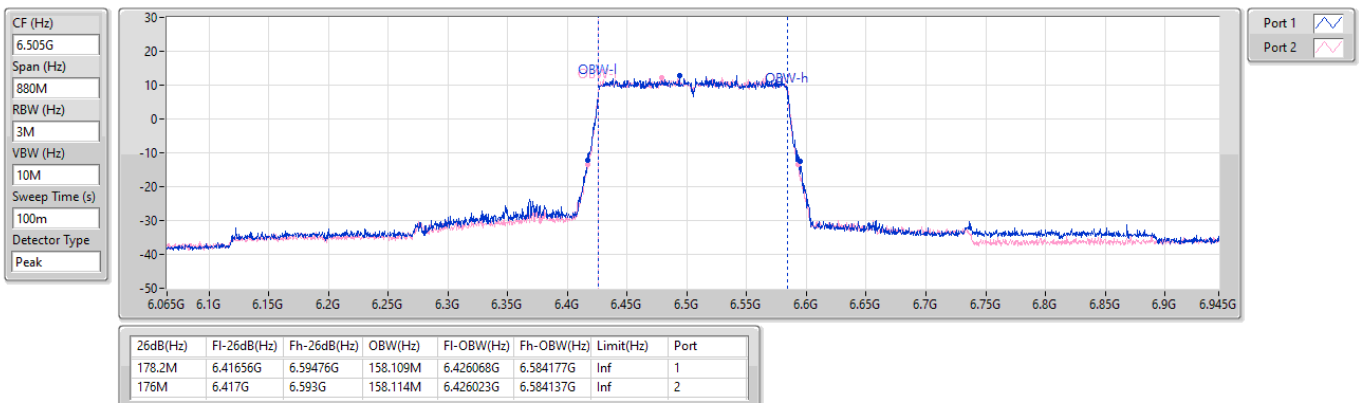




6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW


6665MHz

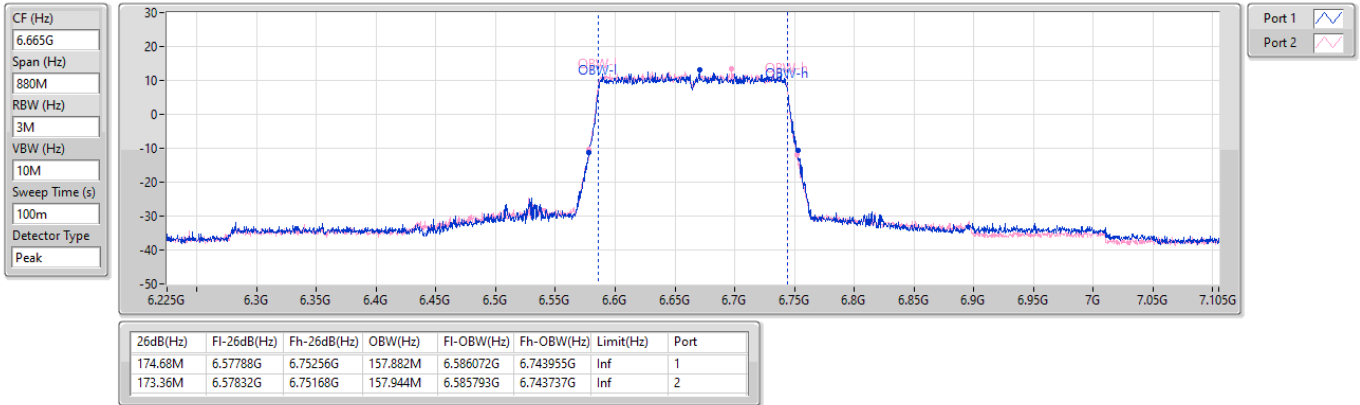

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6825MHz Straddle 6.875-7.125GHz

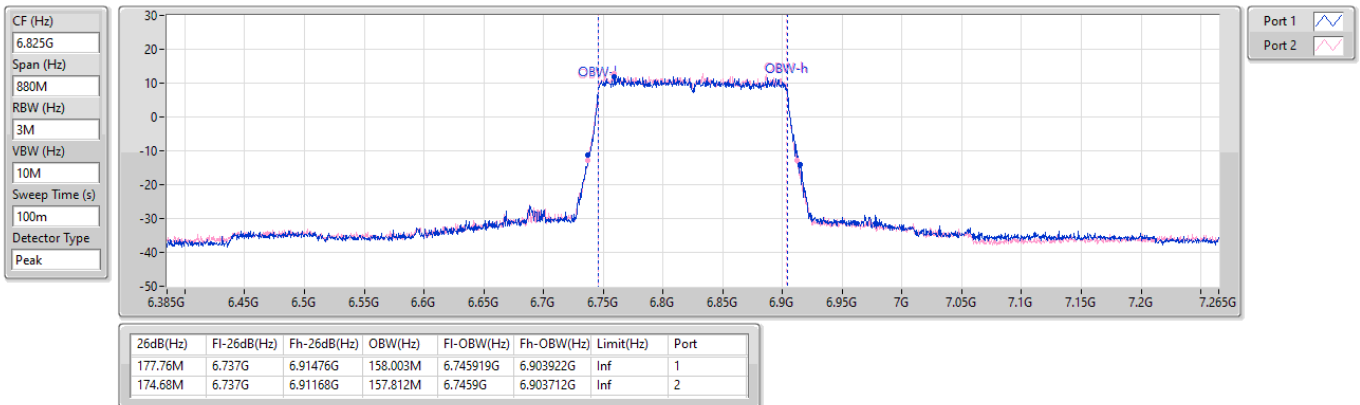




6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW


6985MHz

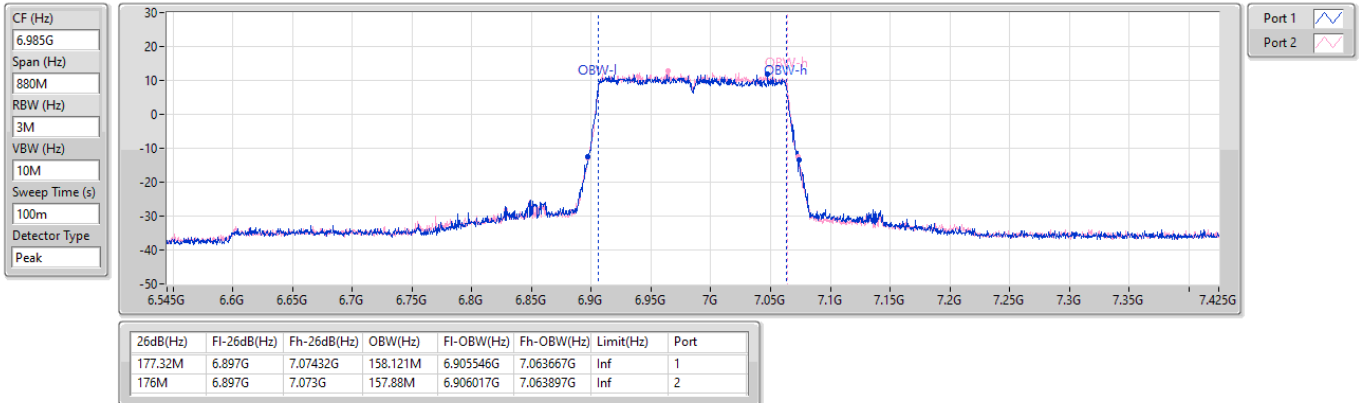

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

EBW

6105MHz

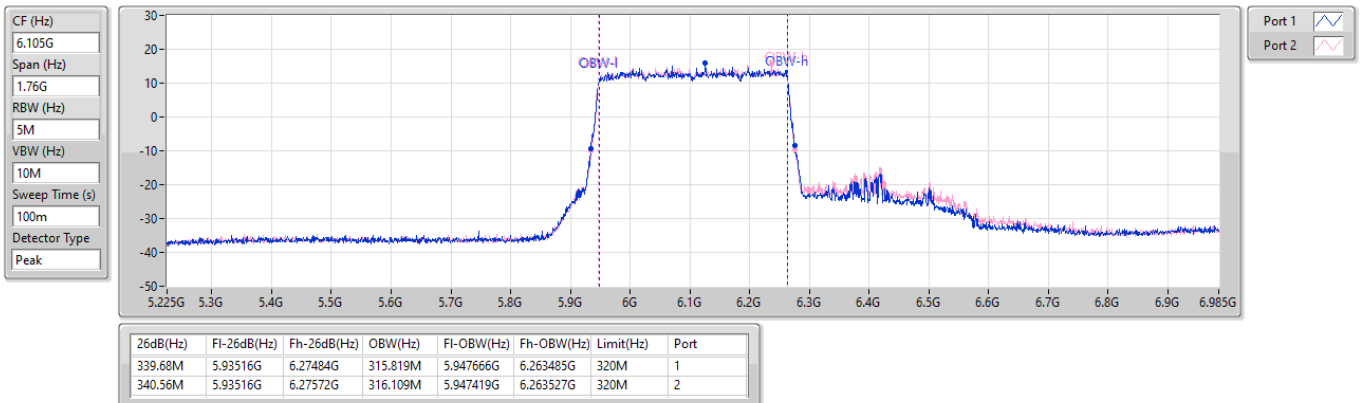




5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

EBW


6265MHz

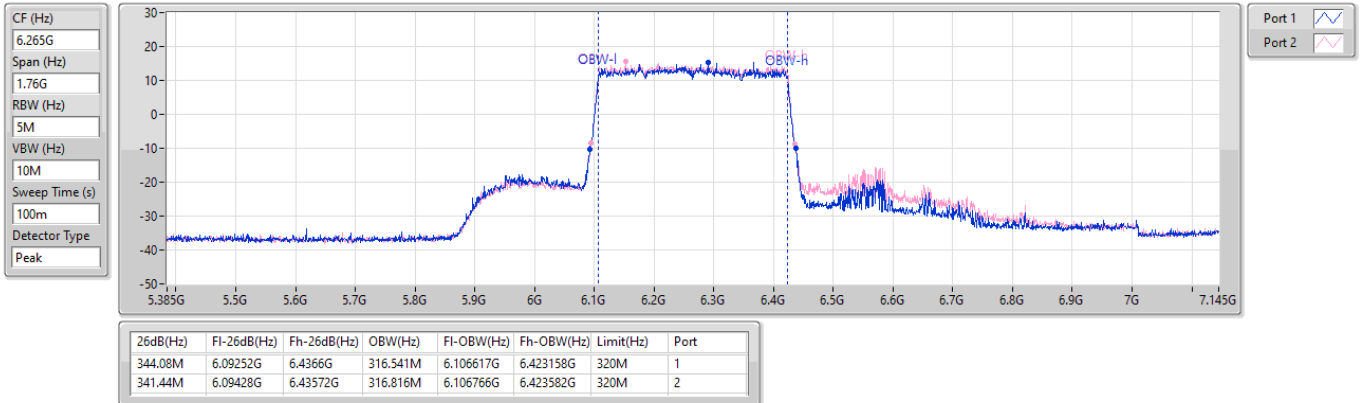

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_2TX

EBW

6425MHz Straddle 6.525-6.875GHz

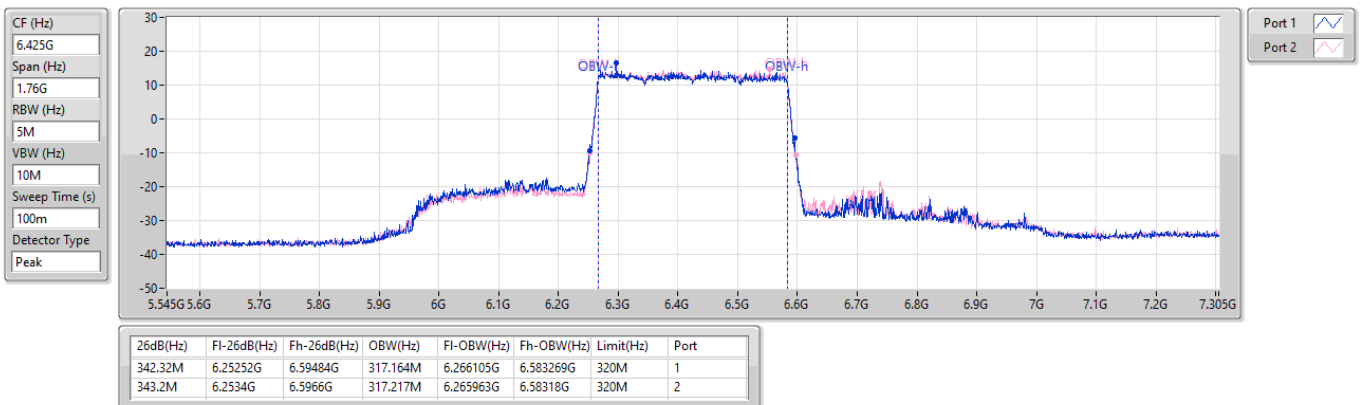




6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_2TX

EBW


6585MHz Straddle 6.525-6.875GHz

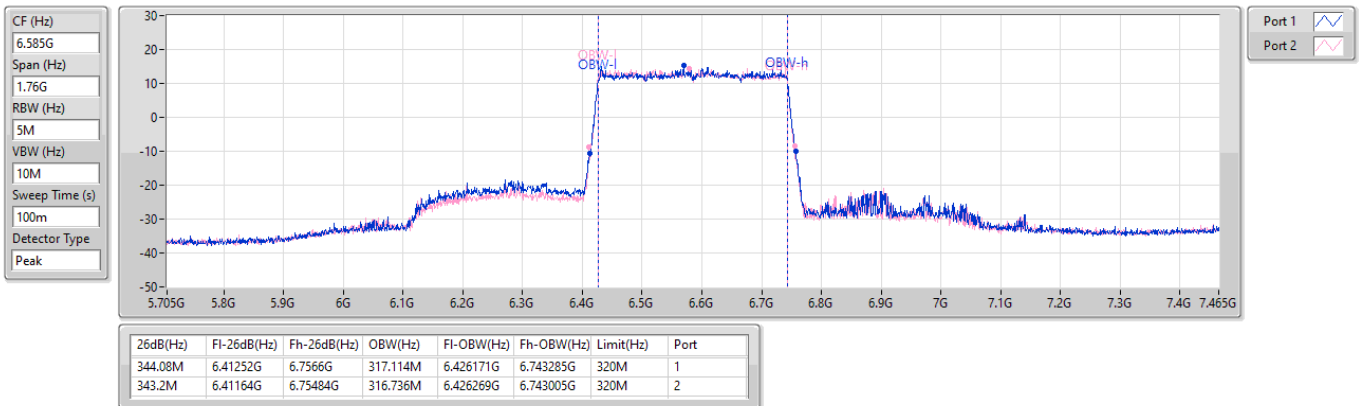

6.875-7.125GHz_802.11be EHT320_Nss1,(MCS0)_2TX

EBW

6745MHz Straddle 6.875-7.125GHz

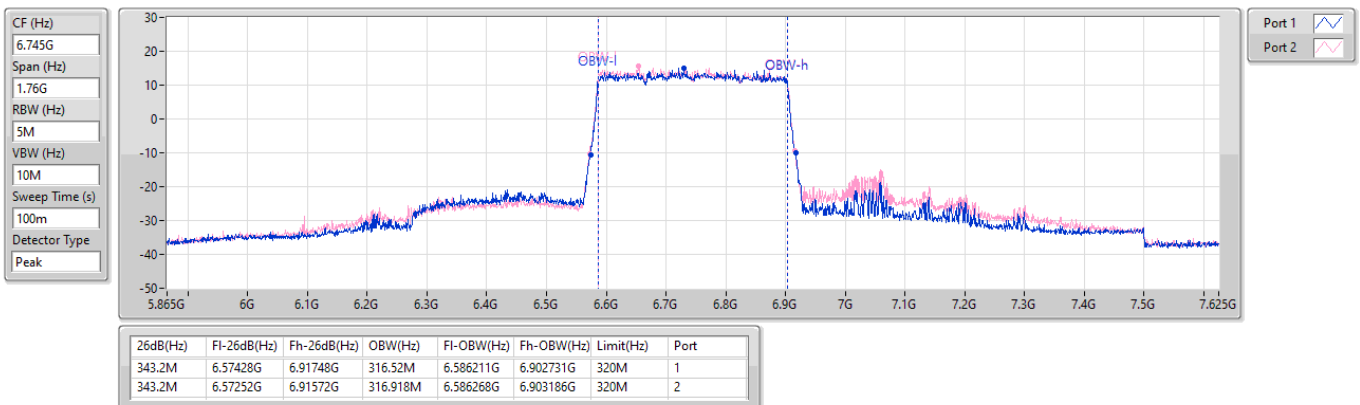




6.875-7.125GHz_802.11be EHT320_Nss1,(MCS0)_2TX

EBW

6905MHz Straddle 6.875-7.125GHz

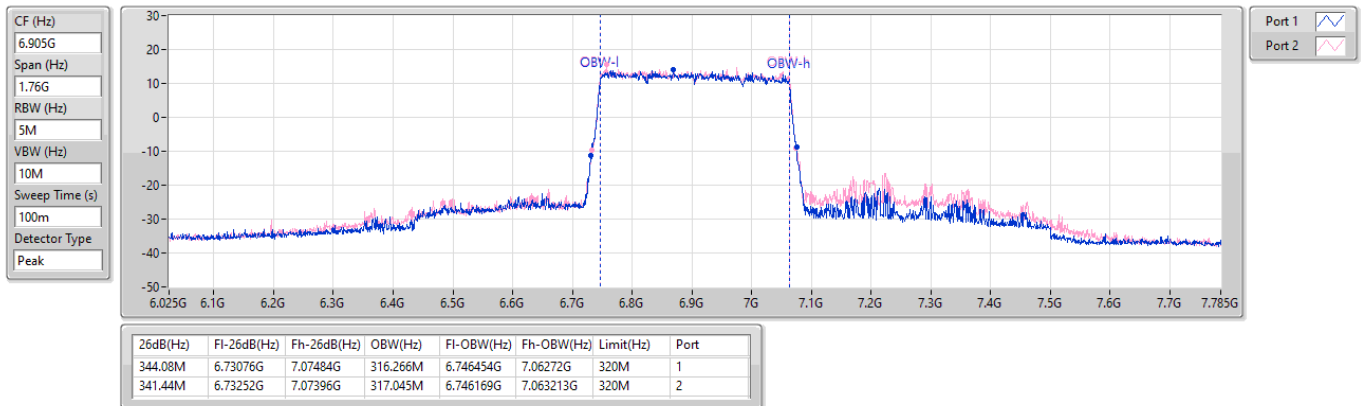

Non-beamforming mode
Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	11.34	0.01361	15.85	0.03846
802.11be EHT40_Nss1,(MCS0)_2TX	14.40	0.02754	18.91	0.07780
802.11be EHT80_Nss1,(MCS0)_2TX	17.69	0.05875	22.20	0.16596
802.11be EHT160_Nss1,(MCS0)_2TX	20.58	0.11429	25.09	0.32285
802.11be EHT320_Nss1,(MCS0)_2TX	23.35	0.21627	27.86	0.61094
6.425-6.525GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	11.79	0.01510	15.77	0.03776
802.11be EHT40_Nss1,(MCS0)_2TX	14.90	0.03090	18.88	0.07727
802.11be EHT80_Nss1,(MCS0)_2TX	17.94	0.06223	21.92	0.15560
6.525-6.875GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	11.48	0.01406	16.13	0.04102
802.11be EHT40_Nss1,(MCS0)_2TX	14.49	0.02812	19.14	0.08204
802.11be EHT80_Nss1,(MCS0)_2TX	17.64	0.05808	22.29	0.16943
802.11be EHT160_Nss1,(MCS0)_2TX	20.40	0.10965	25.05	0.31989
802.11be EHT320_Nss1,(MCS0)_2TX	23.50	0.22387	28.15	0.65313
6.875-7.125GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	11.39	0.01377	16.29	0.04256
802.11be EHT40_Nss1,(MCS0)_2TX	14.41	0.02761	19.31	0.08531
802.11be EHT80_Nss1,(MCS0)_2TX	17.36	0.05445	22.26	0.16827
802.11be EHT160_Nss1,(MCS0)_2TX	20.22	0.10520	25.12	0.32509
802.11be EHT320_Nss1,(MCS0)_2TX	23.30	0.21380	28.20	0.66069

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	4.51	8.11	8.26	11.20	Inf	15.71	30.00
6175MHz	Pass	4.51	8.06	8.38	11.23	Inf	15.74	30.00
6415MHz	Pass	4.51	8.22	8.44	11.34	Inf	15.85	30.00
6435MHz	Pass	3.98	8.32	8.7	11.52	Inf	15.50	30.00
6475MHz	Pass	3.98	8.62	8.93	11.79	Inf	15.77	30.00
6515MHz	Pass	3.98	8.38	8.49	11.45	Inf	15.43	30.00
6535MHz	Pass	4.65	8.25	8.38	11.33	Inf	15.98	30.00
6715MHz	Pass	4.65	8.16	8.76	11.48	Inf	16.13	30.00
6855MHz Straddle 6.525-6.875GHz	Pass	4.65	8.16	8.48	11.33	Inf	15.98	30.00
6875MHz Straddle 6.875-7.125GHz	Pass	4.90	8.1	8.42	11.27	Inf	16.17	30.00
6895MHz	Pass	4.90	8.06	8.35	11.22	Inf	16.12	30.00
7015MHz	Pass	4.90	7.93	8.78	11.39	Inf	16.29	30.00
7095MHz	Pass	4.90	7.68	8.47	11.10	Inf	16.00	30.00
7115MHz	Pass	4.90	1.83	2.48	5.18	Inf	10.08	30.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	4.51	10.87	11.13	14.01	Inf	18.52	30.00
6165MHz	Pass	4.51	11.14	11.63	14.40	Inf	18.91	30.00
6405MHz	Pass	4.51	11.11	11.59	14.37	Inf	18.88	30.00
6445MHz	Pass	3.98	11.33	11.72	14.54	Inf	18.52	30.00
6485MHz	Pass	3.98	11.83	11.94	14.90	Inf	18.88	30.00
6525MHz Straddle 6.525-6.875GHz	Pass	4.65	11.21	11.37	14.30	Inf	18.95	30.00
6565MHz	Pass	4.65	11.07	11.29	14.19	Inf	18.84	30.00
6725MHz	Pass	4.65	11.17	11.77	14.49	Inf	19.14	30.00
6845MHz Straddle 6.525-6.875GHz	Pass	4.65	11.03	11.38	14.22	Inf	18.87	30.00
6885MHz Straddle 6.875-7.125GHz	Pass	4.90	10.93	11.27	14.11	Inf	19.01	30.00
6925MHz	Pass	4.90	10.83	11.21	14.03	Inf	18.93	30.00
7005MHz	Pass	4.90	10.99	11.46	14.24	Inf	19.14	30.00
7085MHz	Pass	4.90	11	11.76	14.41	Inf	19.31	30.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	4.51	14.03	14.3	17.18	Inf	21.69	30.00
6145MHz	Pass	4.51	14.28	14.77	17.54	Inf	22.05	30.00
6385MHz	Pass	4.51	14.29	15.03	17.69	Inf	22.20	30.00
6465MHz	Pass	3.98	14.78	15.07	17.94	Inf	21.92	30.00
6545MHz Straddle 6.525-6.875GHz	Pass	4.65	14.38	14.86	17.64	Inf	22.29	30.00
6625MHz	Pass	4.65	13.97	14.6	17.31	Inf	21.96	30.00
6705MHz	Pass	4.65	14.03	14.73	17.40	Inf	22.05	30.00
6785MHz	Pass	4.65	13.92	14.66	17.32	Inf	21.97	30.00
6865MHz Straddle 6.875-7.125GHz	Pass	4.90	13.76	14.87	17.36	Inf	22.26	30.00
6945MHz	Pass	4.90	13.83	14.55	17.22	Inf	22.12	30.00
7025MHz	Pass	4.90	13.84	14.78	17.35	Inf	22.25	30.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-

**Conducted Output Power(Average)****Appendix B**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6025MHz	Pass	4.51	17.11	17.37	20.25	Inf	24.76	30.00
6185MHz	Pass	4.51	17.58	17.56	20.58	Inf	25.09	30.00
6345MHz	Pass	4.51	17.06	17.44	20.26	Inf	24.77	30.00
6505MHz Straddle 6.525-6.875GHz	Pass	4.65	17.35	17.19	20.28	Inf	24.93	30.00
6665MHz	Pass	4.65	17.15	17.61	20.40	Inf	25.05	30.00
6825MHz Straddle 6.875-7.125GHz	Pass	4.90	16.96	17.44	20.22	Inf	25.12	30.00
6985MHz	Pass	4.90	16.83	17.38	20.12	Inf	25.02	30.00
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	4.51	20.11	20.37	23.25	Inf	27.76	30.00
6265MHz	Pass	4.51	19.97	20.68	23.35	Inf	27.86	30.00
6425MHz Straddle 6.525-6.875GHz	Pass	4.65	20.01	20.22	23.13	Inf	27.78	30.00
6585MHz Straddle 6.525-6.875GHz	Pass	4.65	20.44	20.53	23.50	Inf	28.15	30.00
6745MHz Straddle 6.875-7.125GHz	Pass	4.90	20.01	20.55	23.30	Inf	28.20	30.00
6905MHz Straddle 6.875-7.125GHz	Pass	4.90	19.5	19.89	22.71	Inf	27.61	30.00

DG = Directional Gain; Port X = Port X output power

Beamforming mode
Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	8.33	0.00681	15.38	0.03451
802.11be EHT40-BF_Nss1,(MCS0)_2TX	11.39	0.01377	18.44	0.06982
802.11be EHT80-BF_Nss1,(MCS0)_2TX	14.68	0.02938	21.73	0.14894
802.11be EHT160-BF_Nss1,(MCS0)_2TX	17.57	0.05715	24.62	0.28973
802.11be EHT320-BF_Nss1,(MCS0)_2TX	20.34	0.10814	27.39	0.54828
6.425-6.525GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	8.78	0.00755	15.55	0.03589
802.11be EHT40-BF_Nss1,(MCS0)_2TX	11.89	0.01545	18.66	0.07345
802.11be EHT80-BF_Nss1,(MCS0)_2TX	14.93	0.03112	21.70	0.14791
6.525-6.875GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	8.47	0.00703	15.64	0.03664
802.11be EHT40-BF_Nss1,(MCS0)_2TX	11.48	0.01406	18.65	0.07328
802.11be EHT80-BF_Nss1,(MCS0)_2TX	14.63	0.02904	21.80	0.15136
802.11be EHT160-BF_Nss1,(MCS0)_2TX	17.39	0.05483	24.56	0.28576
802.11be EHT320-BF_Nss1,(MCS0)_2TX	20.49	0.11194	27.66	0.58345
6.875-7.125GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	8.38	0.00689	15.55	0.03589
802.11be EHT40-BF_Nss1,(MCS0)_2TX	11.40	0.01380	18.57	0.07194
802.11be EHT80-BF_Nss1,(MCS0)_2TX	14.35	0.02723	21.52	0.14191
802.11be EHT160-BF_Nss1,(MCS0)_2TX	17.21	0.05260	24.38	0.27416
802.11be EHT320-BF_Nss1,(MCS0)_2TX	20.29	0.10691	27.46	0.55719

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	7.05	5.1	5.25	8.19	Inf	15.24	30.00
6175MHz	Pass	7.05	5.05	5.37	8.22	Inf	15.27	30.00
6415MHz	Pass	7.05	5.21	5.43	8.33	Inf	15.38	30.00
6435MHz	Pass	6.77	5.31	5.69	8.51	Inf	15.28	30.00
6475MHz	Pass	6.77	5.61	5.92	8.78	Inf	15.55	30.00
6515MHz	Pass	6.77	5.37	5.48	8.44	Inf	15.21	30.00
6535MHz	Pass	7.17	5.24	5.37	8.32	Inf	15.49	30.00
6715MHz	Pass	7.17	5.15	5.75	8.47	Inf	15.64	30.00
6855MHz Straddle 6.525-6.875GHz	Pass	7.17	5.15	5.47	8.32	Inf	15.49	30.00
6875MHz Straddle 6.875-7.125GHz	Pass	7.17	5.09	5.41	8.26	Inf	15.43	30.00
6895MHz	Pass	7.17	5.05	5.34	8.21	Inf	15.38	30.00
7015MHz	Pass	7.17	4.92	5.77	8.38	Inf	15.55	30.00
7095MHz	Pass	7.17	4.67	5.46	8.09	Inf	15.26	30.00
7115MHz	Pass	7.17	-1.18	-0.53	2.17	Inf	9.34	30.00
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	7.05	7.86	8.12	11.00	Inf	18.05	30.00
6165MHz	Pass	7.05	8.13	8.62	11.39	Inf	18.44	30.00
6405MHz	Pass	7.05	8.1	8.58	11.36	Inf	18.41	30.00
6445MHz	Pass	6.77	8.32	8.71	11.53	Inf	18.30	30.00
6485MHz	Pass	6.77	8.82	8.93	11.89	Inf	18.66	30.00
6525MHz Straddle 6.525-6.875GHz	Pass	7.17	8.2	8.36	11.29	Inf	18.46	30.00
6565MHz	Pass	7.17	8.06	8.28	11.18	Inf	18.35	30.00
6725MHz	Pass	7.17	8.16	8.76	11.48	Inf	18.65	30.00
6845MHz Straddle 6.525-6.875GHz	Pass	7.17	8.02	8.37	11.21	Inf	18.38	30.00
6885MHz Straddle 6.875-7.125GHz	Pass	7.17	7.92	8.26	11.10	Inf	18.27	30.00
6925MHz	Pass	7.17	7.82	8.2	11.02	Inf	18.19	30.00
7005MHz	Pass	7.17	7.98	8.45	11.23	Inf	18.40	30.00
7085MHz	Pass	7.17	7.99	8.75	11.40	Inf	18.57	30.00
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	7.05	11.02	11.29	14.17	Inf	21.22	30.00
6145MHz	Pass	7.05	11.27	11.76	14.53	Inf	21.58	30.00
6385MHz	Pass	7.05	11.28	12.02	14.68	Inf	21.73	30.00
6465MHz	Pass	6.77	11.77	12.06	14.93	Inf	21.70	30.00
6545MHz Straddle 6.525-6.875GHz	Pass	7.17	11.37	11.85	14.63	Inf	21.80	30.00
6625MHz	Pass	7.17	10.96	11.59	14.30	Inf	21.47	30.00
6705MHz	Pass	7.17	11.02	11.72	14.39	Inf	21.56	30.00
6785MHz	Pass	7.17	10.91	11.65	14.31	Inf	21.48	30.00
6865MHz Straddle 6.875-7.125GHz	Pass	7.17	10.75	11.86	14.35	Inf	21.52	30.00
6945MHz	Pass	7.17	10.82	11.54	14.21	Inf	21.38	30.00
7025MHz	Pass	7.17	10.83	11.77	14.34	Inf	21.51	30.00
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6025MHz	Pass	7.05	14.1	14.36	17.24	Inf	24.29	30.00
6185MHz	Pass	7.05	14.57	14.55	17.57	Inf	24.62	30.00
6345MHz	Pass	7.05	14.05	14.43	17.25	Inf	24.30	30.00
6505MHz Straddle 6.525-6.875GHz	Pass	7.17	14.34	14.18	17.27	Inf	24.44	30.00
6665MHz	Pass	7.17	14.14	14.6	17.39	Inf	24.56	30.00
6825MHz Straddle 6.875-7.125GHz	Pass	7.17	13.95	14.43	17.21	Inf	24.38	30.00
6985MHz	Pass	7.17	13.82	14.37	17.11	Inf	24.28	30.00
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	7.05	17.1	17.36	20.24	Inf	27.29	30.00
6265MHz	Pass	7.05	16.96	17.67	20.34	Inf	27.39	30.00
6425MHz Straddle 6.525-6.875GHz	Pass	7.17	17	17.21	20.12	Inf	27.29	30.00
6585MHz Straddle 6.525-6.875GHz	Pass	7.17	17.43	17.52	20.49	Inf	27.66	30.00
6745MHz Straddle 6.875-7.125GHz	Pass	7.17	17	17.54	20.29	Inf	27.46	30.00
6905MHz Straddle 6.875-7.125GHz	Pass	7.17	16.49	16.88	19.70	Inf	26.87	30.00

DG = Directional Gain; Port X = Port X output power

Directional gain = $10 \log \left[\left(10^{G1/20} + 10^{G2/20} \right)^2 / N_{ANT} \right]$

Ant. No.	Operating Frequencies (MHz) / Antenna Gain (dBi)			
	5925 ~ 6425	6425 ~ 6525	6525 ~ 6875	6875 ~ 7125
1	3.55	3.53	3.63	3.35
2	4.51	3.98	4.65	4.9
Directional Gain (dBi)	7.05	6.77	7.17	7.17

**Summary**

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	-2.26	4.79
802.11be EHT40_Nss1,(MCS0)_2TX	-2.23	4.82
802.11be EHT80_Nss1,(MCS0)_2TX	-2.17	4.88
802.11be EHT160_Nss1,(MCS0)_2TX	-2.21	4.84
802.11be EHT320_Nss1,(MCS0)_2TX	-2.15	4.90
6.425-6.525GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	-1.99	4.78
802.11be EHT40_Nss1,(MCS0)_2TX	-1.89	4.88
802.11be EHT80_Nss1,(MCS0)_2TX	-2.00	4.77
6.525-6.875GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	-2.27	4.90
802.11be EHT40_Nss1,(MCS0)_2TX	-2.31	4.86
802.11be EHT80_Nss1,(MCS0)_2TX	-2.32	4.85
802.11be EHT160_Nss1,(MCS0)_2TX	-2.53	4.64
802.11be EHT320_Nss1,(MCS0)_2TX	-2.32	4.85
6.875-7.125GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	-2.31	4.86
802.11be EHT40_Nss1,(MCS0)_2TX	-2.31	4.86
802.11be EHT80_Nss1,(MCS0)_2TX	-2.44	4.73
802.11be EHT160_Nss1,(MCS0)_2TX	-2.38	4.79
802.11be EHT320_Nss1,(MCS0)_2TX	-2.40	4.77

RBW = 1MHz

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	7.05	-5.22	-5.19	-2.26	Inf	4.79	5.00
6175MHz	Pass	7.05	-5.73	-5.29	-2.54	Inf	4.51	5.00
6415MHz	Pass	7.05	-5.50	-5.22	-2.39	Inf	4.66	5.00
6435MHz	Pass	6.77	-5.46	-5.00	-2.24	Inf	4.53	5.00
6475MHz	Pass	6.77	-5.13	-4.78	-1.99	Inf	4.78	5.00
6515MHz	Pass	6.77	-5.29	-5.12	-2.19	Inf	4.58	5.00
6535MHz	Pass	7.17	-5.43	-5.28	-2.42	Inf	4.75	5.00
6715MHz	Pass	7.17	-5.52	-4.91	-2.27	Inf	4.90	5.00
6855MHz Straddle 6.525-6.875GHz	Pass	7.17	-5.44	-5.18	-2.34	Inf	4.83	5.00
6875MHz Straddle 6.875-7.125GHz	Pass	7.17	-5.57	-5.25	-2.41	Inf	4.76	5.00
6895MHz	Pass	7.17	-5.67	-5.33	-2.52	Inf	4.65	5.00
7015MHz	Pass	7.17	-5.60	-4.97	-2.31	Inf	4.86	5.00
7095MHz	Pass	7.17	-5.75	-5.20	-2.55	Inf	4.62	5.00
7115MHz	Pass	7.17	-11.40	-11.34	-8.38	Inf	-1.21	5.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	7.05	-5.33	-5.19	-2.28	Inf	4.77	5.00
6165MHz	Pass	7.05	-5.35	-5.03	-2.23	Inf	4.82	5.00
6405MHz	Pass	7.05	-5.51	-5.06	-2.34	Inf	4.71	5.00
6445MHz	Pass	6.77	-5.40	-5.04	-2.26	Inf	4.51	5.00
6485MHz	Pass	6.77	-4.90	-4.83	-1.89	Inf	4.88	5.00
6525MHz Straddle 6.525-6.875GHz	Pass	7.17	-5.43	-5.40	-2.45	Inf	4.72	5.00
6565MHz	Pass	7.17	-5.65	-5.50	-2.61	Inf	4.56	5.00
6725MHz	Pass	7.17	-5.57	-4.97	-2.31	Inf	4.86	5.00
6845MHz Straddle 6.525-6.875GHz	Pass	7.17	-5.63	-5.24	-2.46	Inf	4.71	5.00
6885MHz Straddle 6.875-7.125GHz	Pass	7.17	-5.74	-5.39	-2.63	Inf	4.54	5.00
6925MHz	Pass	7.17	-5.79	-5.45	-2.65	Inf	4.52	5.00
7005MHz	Pass	7.17	-5.75	-5.12	-2.45	Inf	4.72	5.00
7085MHz	Pass	7.17	-5.65	-4.89	-2.31	Inf	4.86	5.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	7.05	-5.51	-5.26	-2.40	Inf	4.65	5.00
6145MHz	Pass	7.05	-5.30	-4.99	-2.17	Inf	4.88	5.00
6385MHz	Pass	7.05	-5.55	-4.81	-2.20	Inf	4.85	5.00
6465MHz	Pass	6.77	-5.09	-4.81	-2.00	Inf	4.77	5.00
6545MHz Straddle 6.525-6.875GHz	Pass	7.17	-5.51	-5.07	-2.32	Inf	4.85	5.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6625MHz	Pass	7.17	-5.90	-5.28	-2.61	Inf	4.56	5.00
6705MHz	Pass	7.17	-5.85	-5.10	-2.56	Inf	4.61	5.00
6785MHz	Pass	7.17	-5.88	-5.12	-2.56	Inf	4.61	5.00
6865MHz Straddle 6.875-7.125GHz	Pass	7.17	-5.96	-4.88	-2.44	Inf	4.73	5.00
6945MHz	Pass	7.17	-5.91	-5.15	-2.53	Inf	4.64	5.00
7025MHz	Pass	7.17	-5.87	-4.98	-2.46	Inf	4.71	5.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	7.05	-5.37	-5.24	-2.37	Inf	4.68	5.00
6185MHz	Pass	7.05	-5.09	-5.25	-2.21	Inf	4.84	5.00
6345MHz	Pass	7.05	-5.39	-5.31	-2.38	Inf	4.67	5.00
6505MHz Straddle 6.525-6.875GHz	Pass	7.17	-5.43	-5.55	-2.53	Inf	4.64	5.00
6665MHz	Pass	7.17	-5.61	-5.07	-2.55	Inf	4.62	5.00
6825MHz Straddle 6.875-7.125GHz	Pass	7.17	-5.74	-5.05	-2.38	Inf	4.79	5.00
6985MHz	Pass	7.17	-5.63	-5.13	-2.42	Inf	4.75	5.00
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	7.05	-5.58	-5.35	-2.51	Inf	4.54	5.00
6265MHz	Pass	7.05	-5.37	-4.92	-2.15	Inf	4.90	5.00
6425MHz Straddle 6.525-6.875GHz	Pass	7.17	-5.44	-5.46	-2.47	Inf	4.70	5.00
6585MHz Straddle 6.525-6.875GHz	Pass	7.17	-5.33	-5.17	-2.32	Inf	4.85	5.00
6745MHz Straddle 6.875-7.125GHz	Pass	7.17	-5.53	-4.97	-2.40	Inf	4.77	5.00
6905MHz Straddle 6.875-7.125GHz	Pass	7.17	-5.80	-5.32	-2.63	Inf	4.54	5.00

DG = Directional Gain; RBW = 1MHz

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

Directional gain = $10 \log \left[\left(10^{G1/20} + 10^{G2/20} \right)^2 / N_{ANT} \right]$


Ant. No.	Operating Frequencies (MHz) / Antenna Gain (dBi)			
	5925 ~ 6425	6425 ~ 6525	6525 ~ 6875	6875 ~ 7125
1	3.55	3.53	3.63	3.35
2	4.51	3.98	4.65	4.9
Directional Gain (dBi)	7.05	6.77	7.17	7.17



5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD


5955MHz

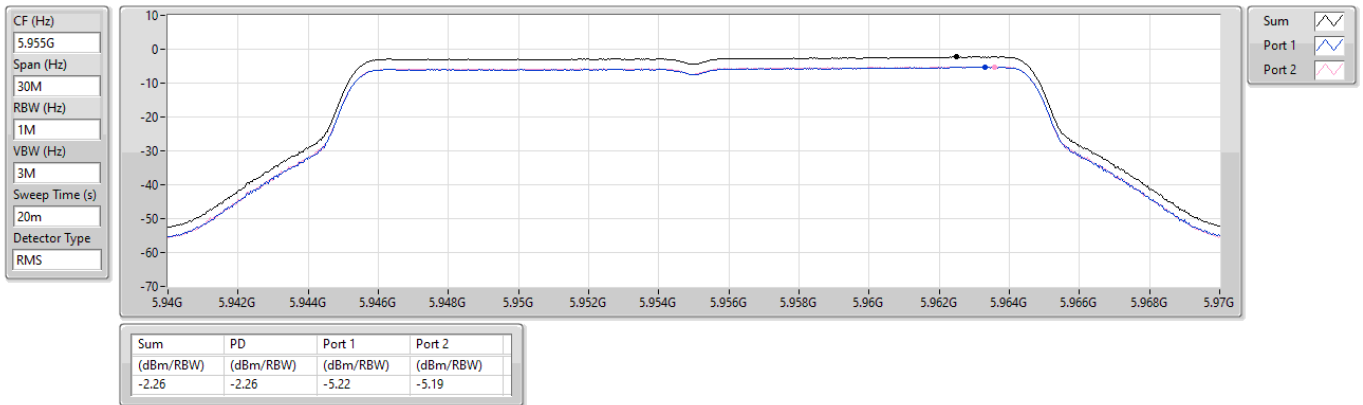

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6175MHz

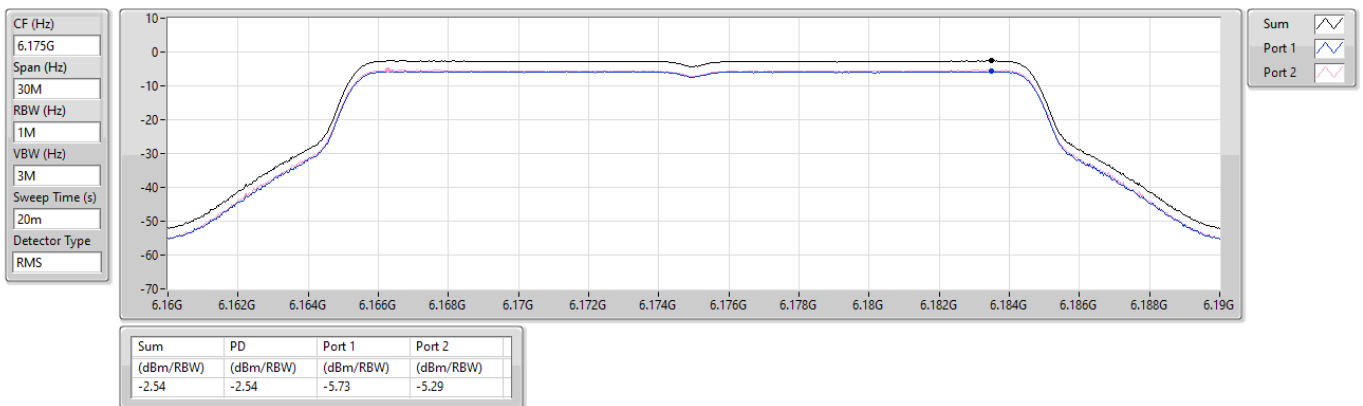




5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6415MHz

CF (Hz)
6.415G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

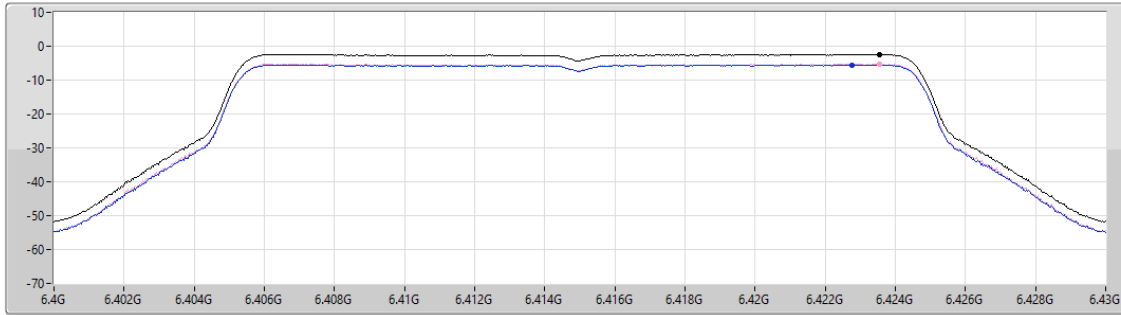

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.39	-2.39	-5.50	-5.22

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6435MHz

CF (Hz)
6.435G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

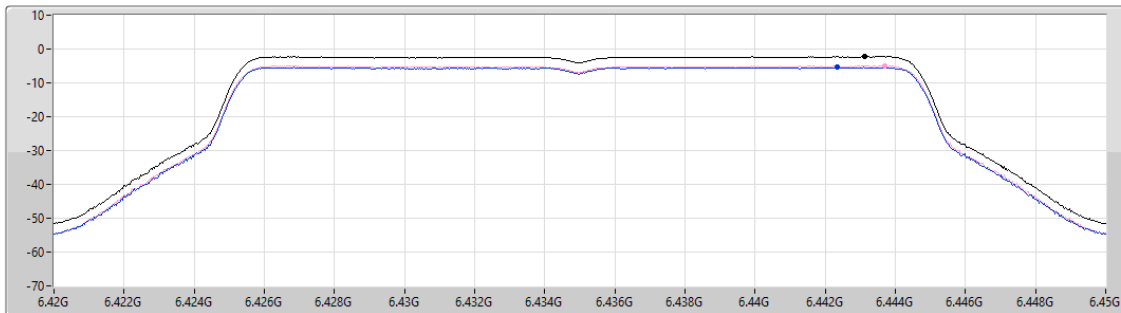

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.24	-2.24	-5.46	-5.00

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6475MHz

CF (Hz)
6.475G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

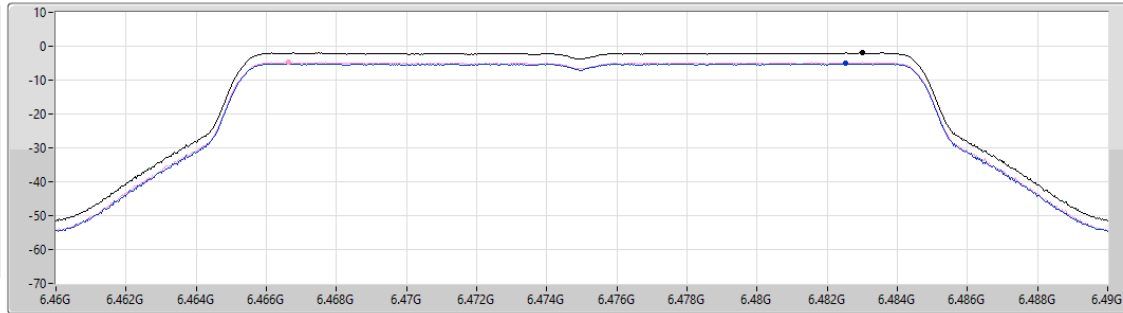

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.99	-1.99	-5.13	-4.78

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6515MHz

CF (Hz)
6.515G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

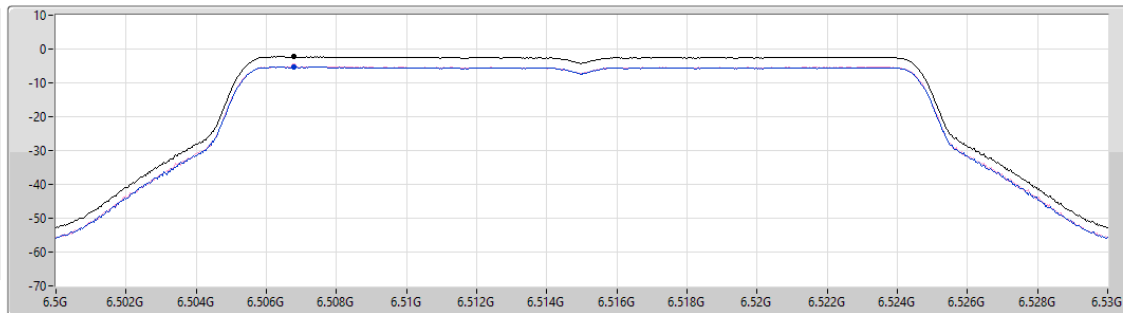

Sum 

Port 1 

Port 2 


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.19	-2.19	-5.29	-5.12



6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD


6535MHz

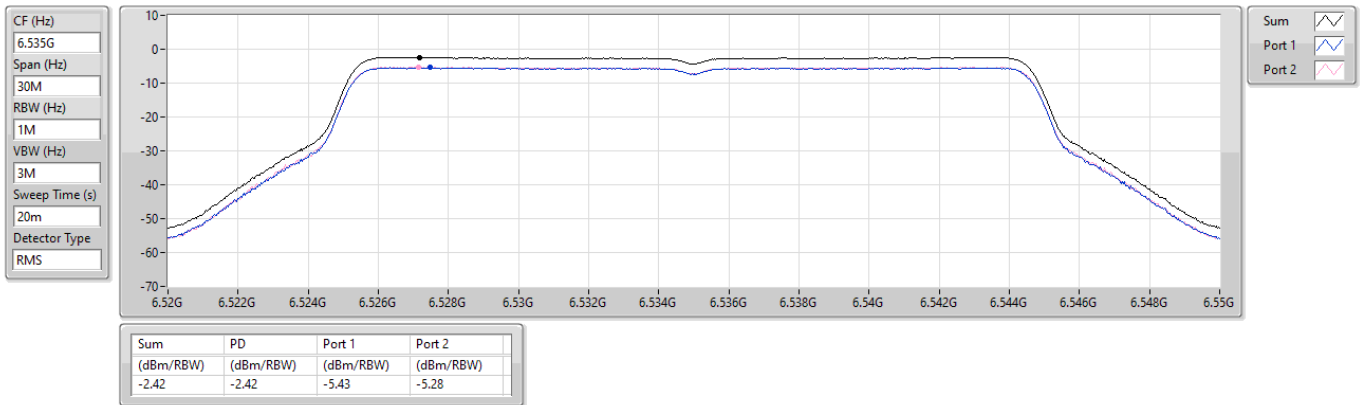

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6715MHz

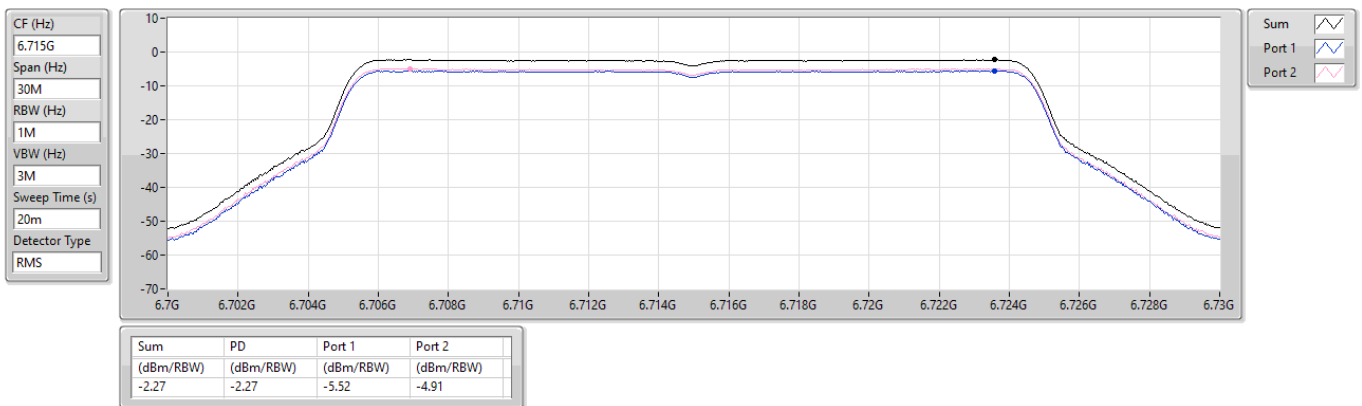




6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD


6855MHz Straddle 6.525-6.875GHz

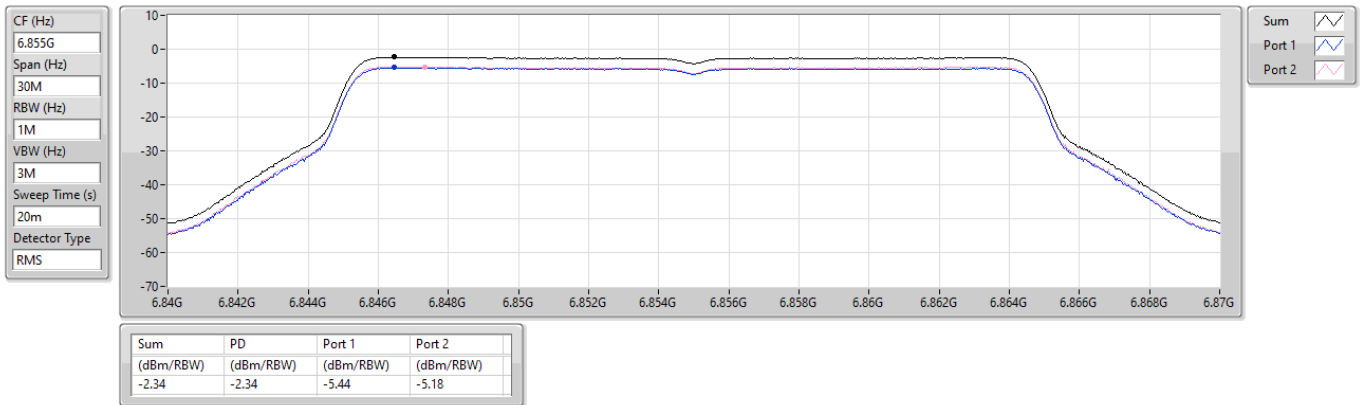

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6875MHz Straddle 6.875-7.125GHz

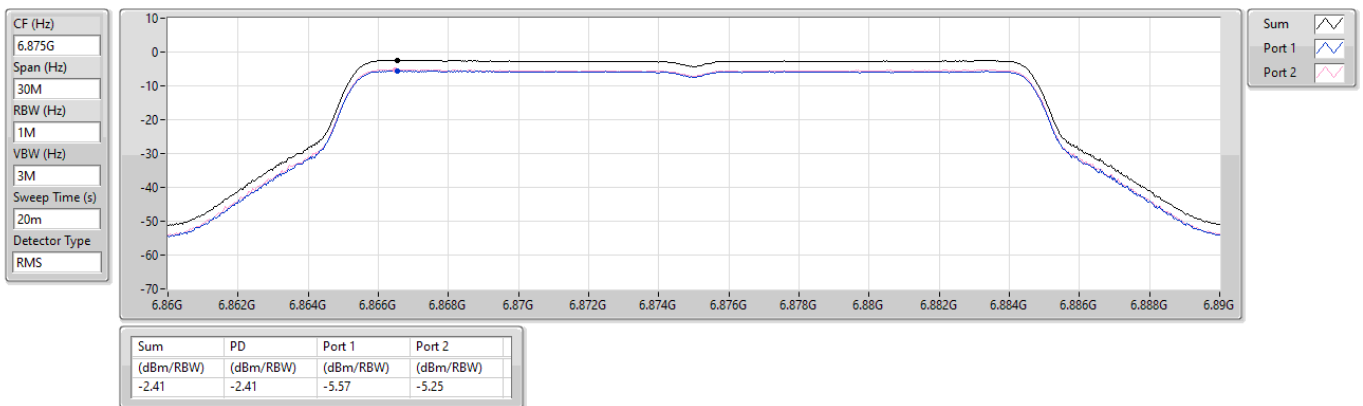




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD


6895MHz

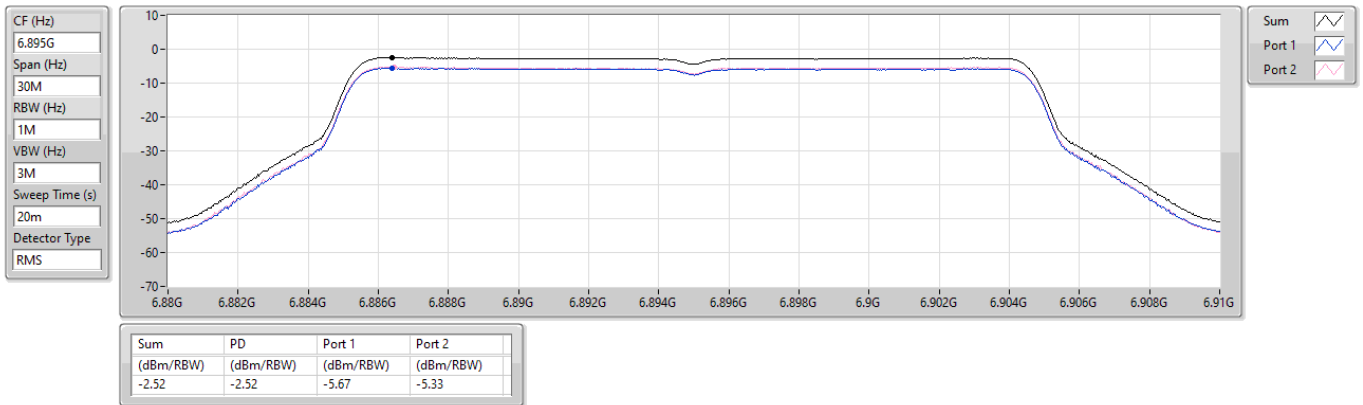

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

7015MHz

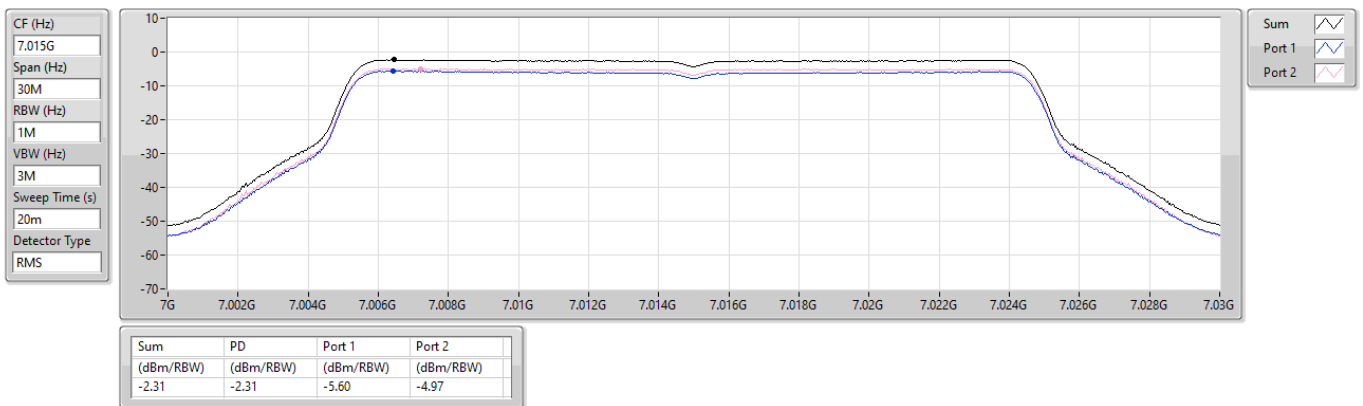




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD


7095MHz

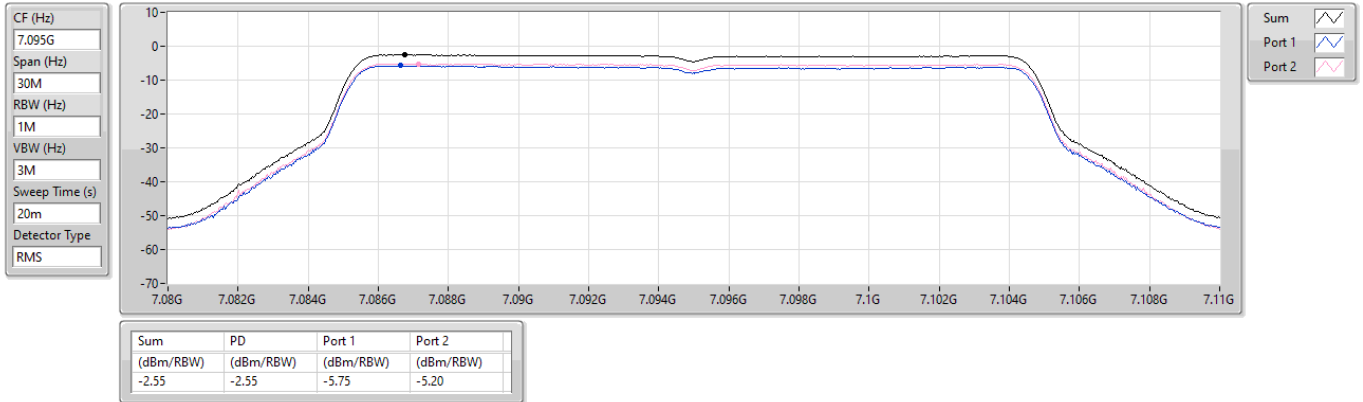

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

7115MHz

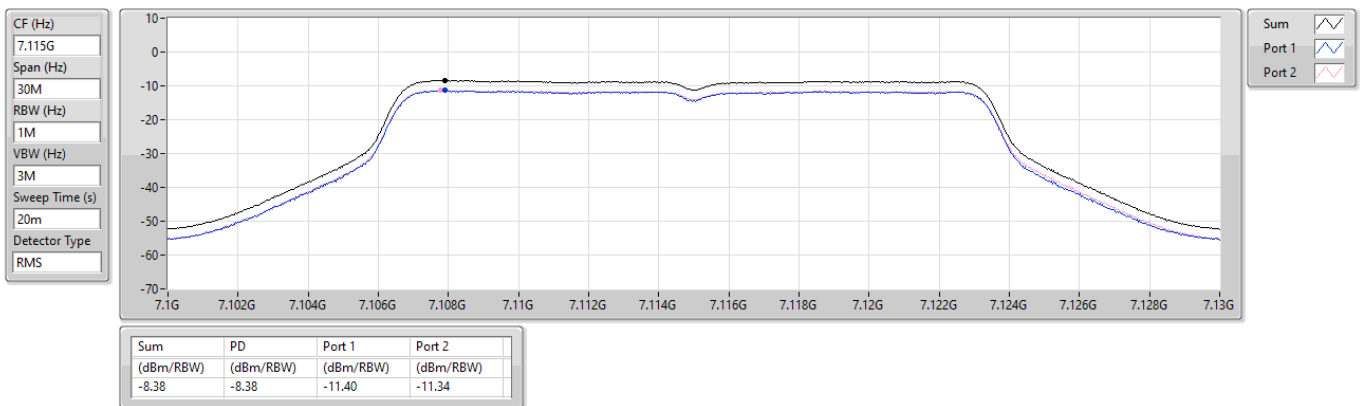




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5965MHz

CF (Hz)
5.965G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

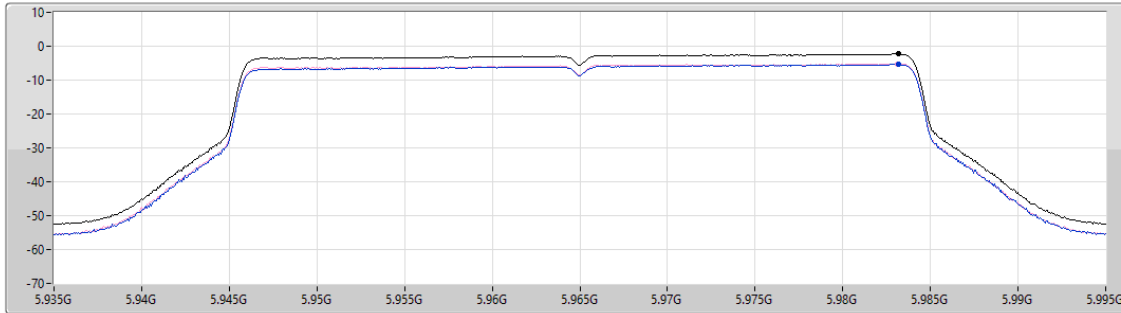

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.28	-2.28	-5.33	-5.19

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6165MHz

CF (Hz)
6.165G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

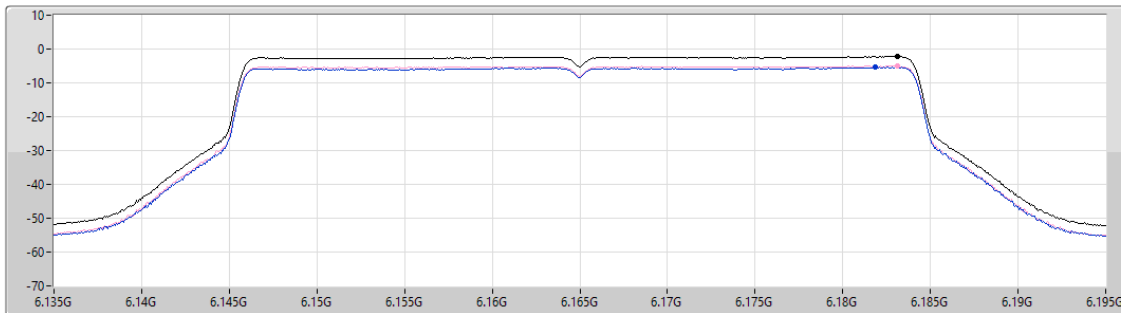

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.23	-2.23	-5.35	-5.03



5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD


6405MHz

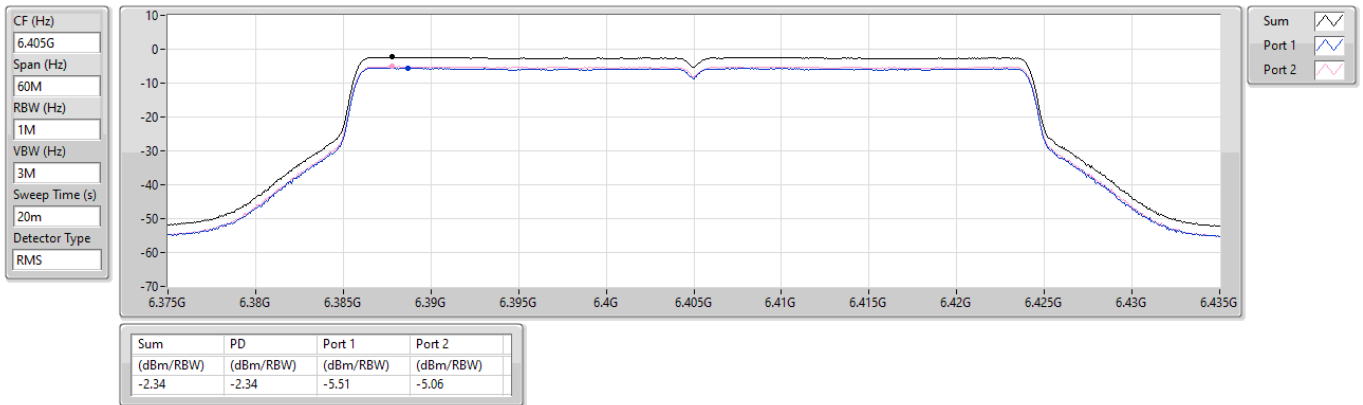

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6445MHz

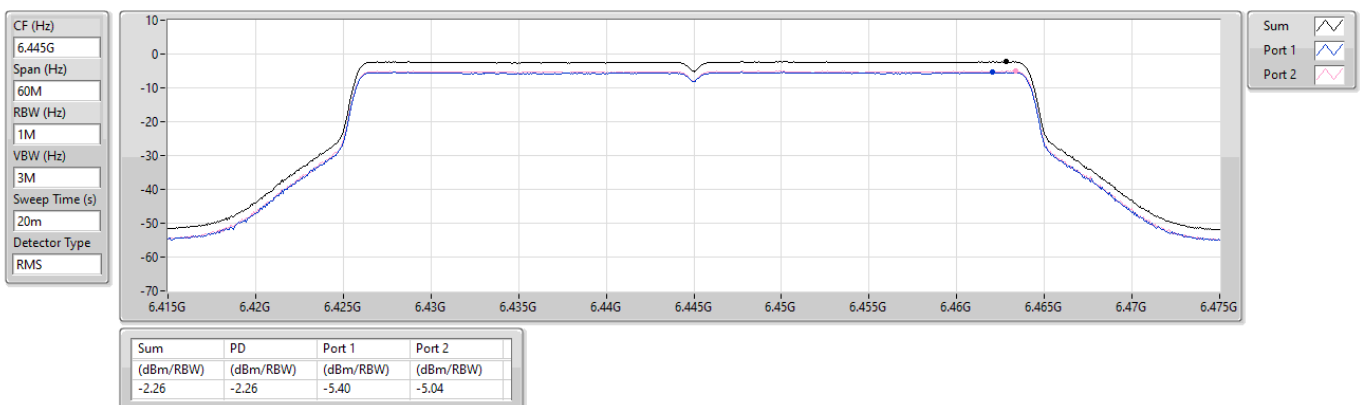




6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD


6485MHz

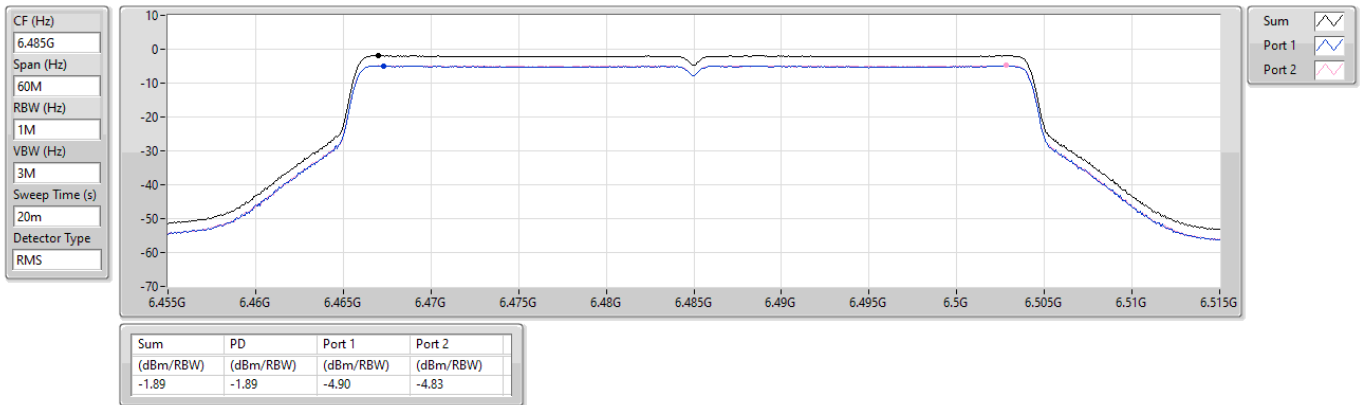

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6525MHz Straddle 6.525-6.875GHz

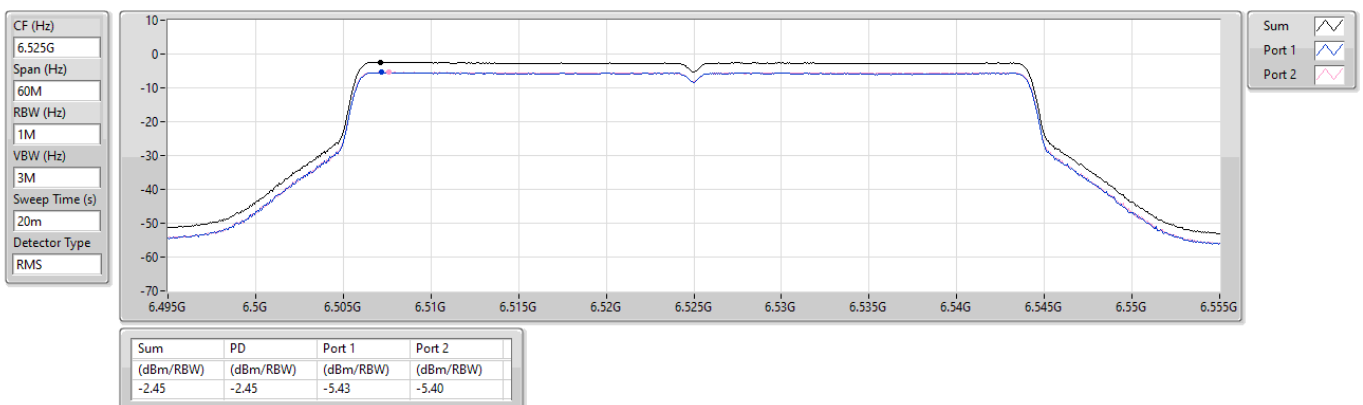




6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6565MHz

CF (Hz)
6.565G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

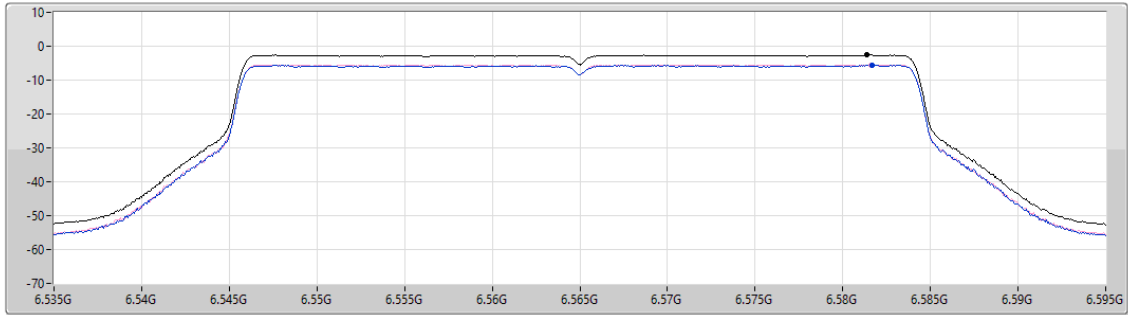

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.61	-2.61	-5.65	-5.50

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6725MHz

CF (Hz)
6.725G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

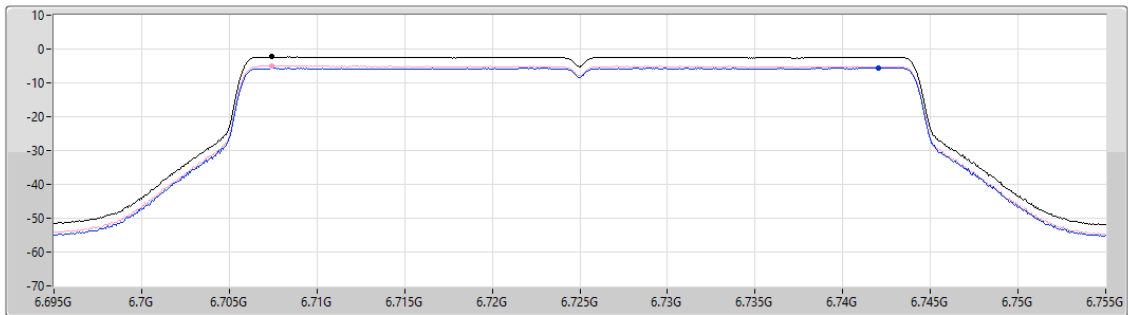

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.31	-2.31	-5.57	-4.97



6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD


6845MHz Straddle 6.525-6.875GHz

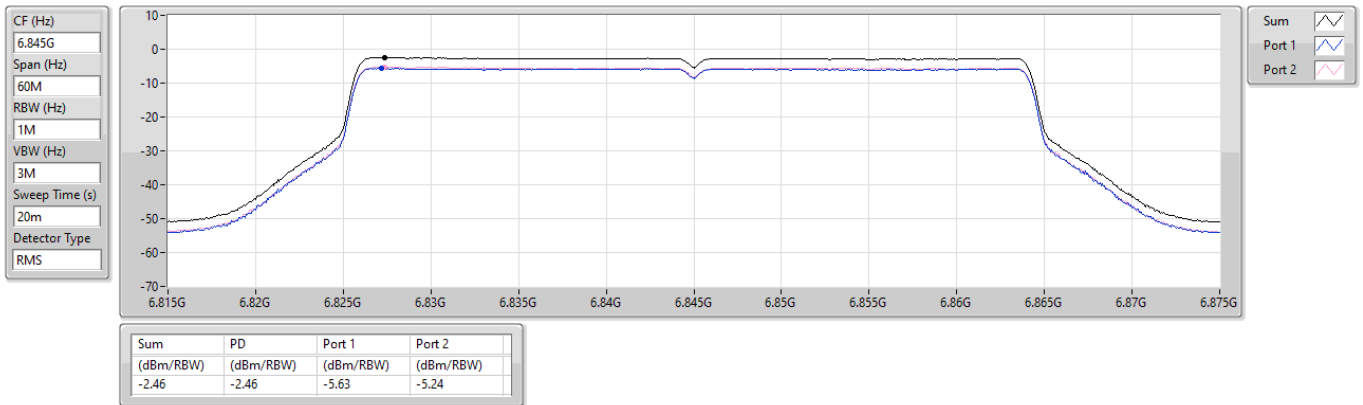

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6885MHz Straddle 6.875-7.125GHz

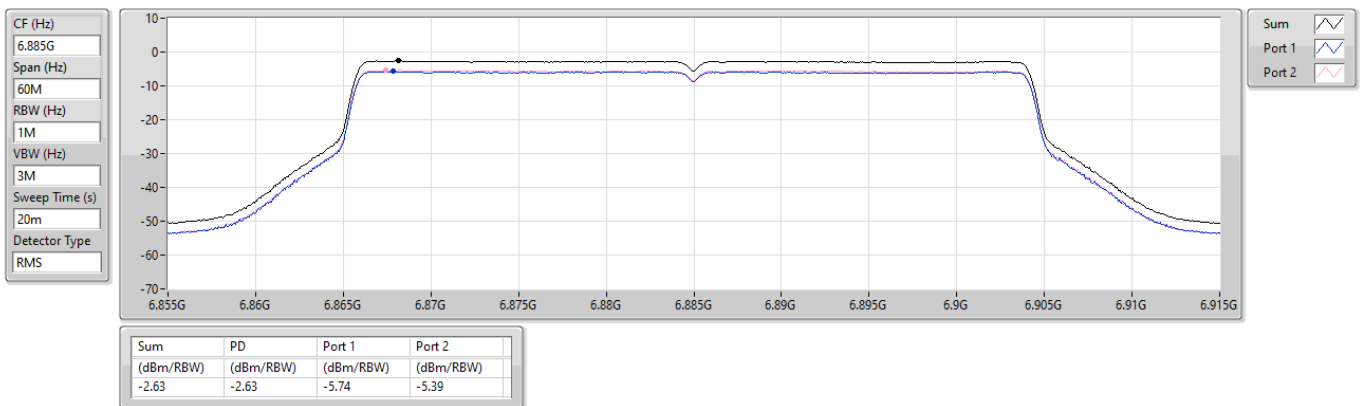




6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD


6925MHz

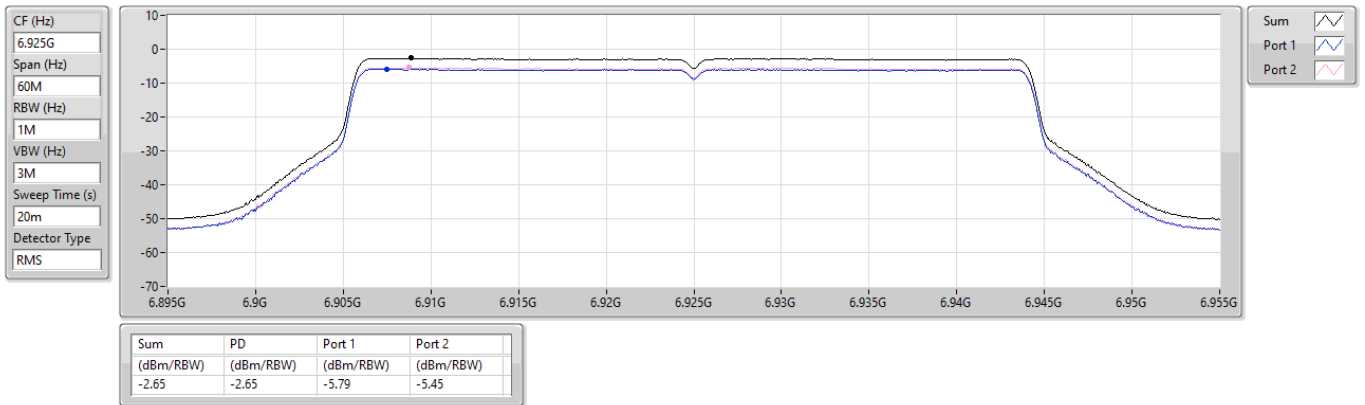

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

7005MHz

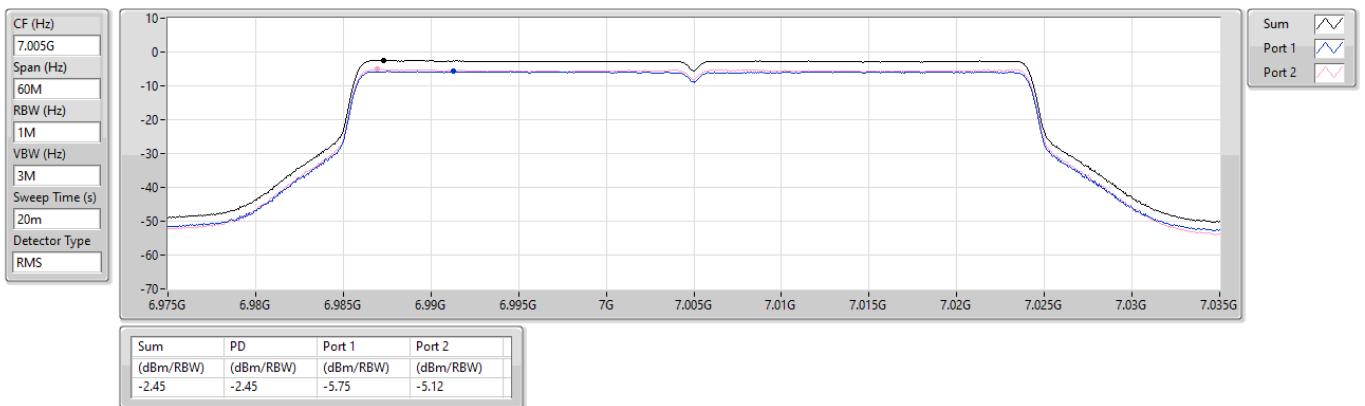




6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD


7085MHz

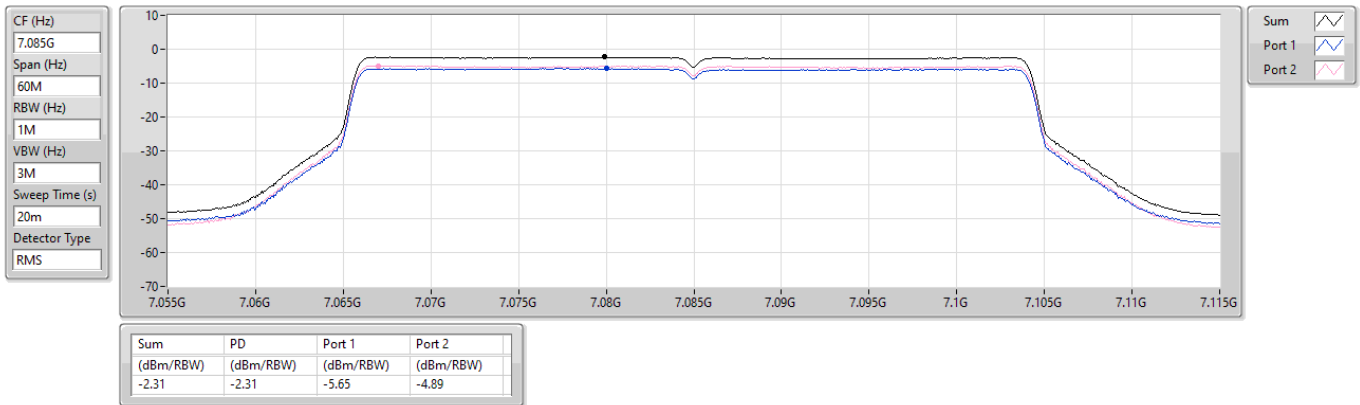

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5985MHz

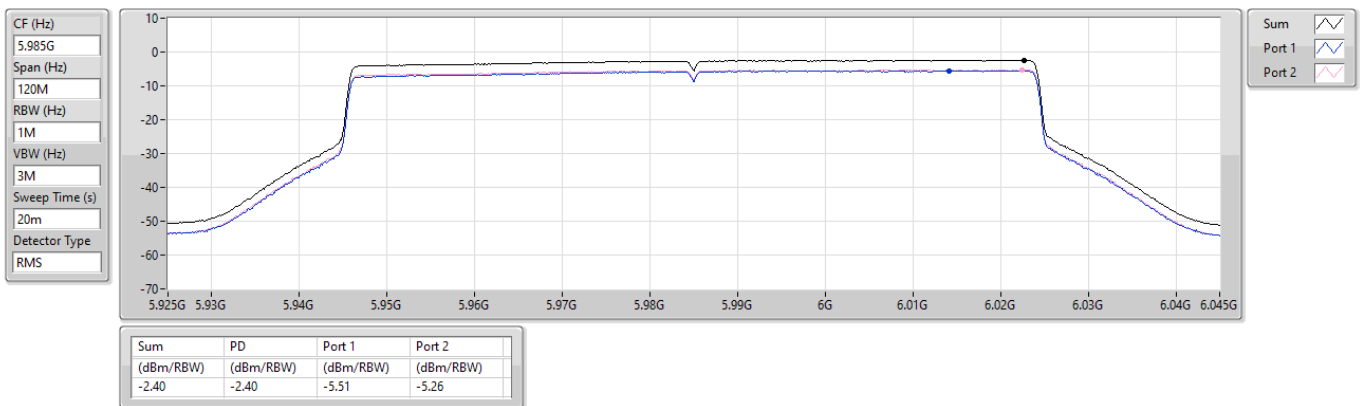




5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD


6145MHz

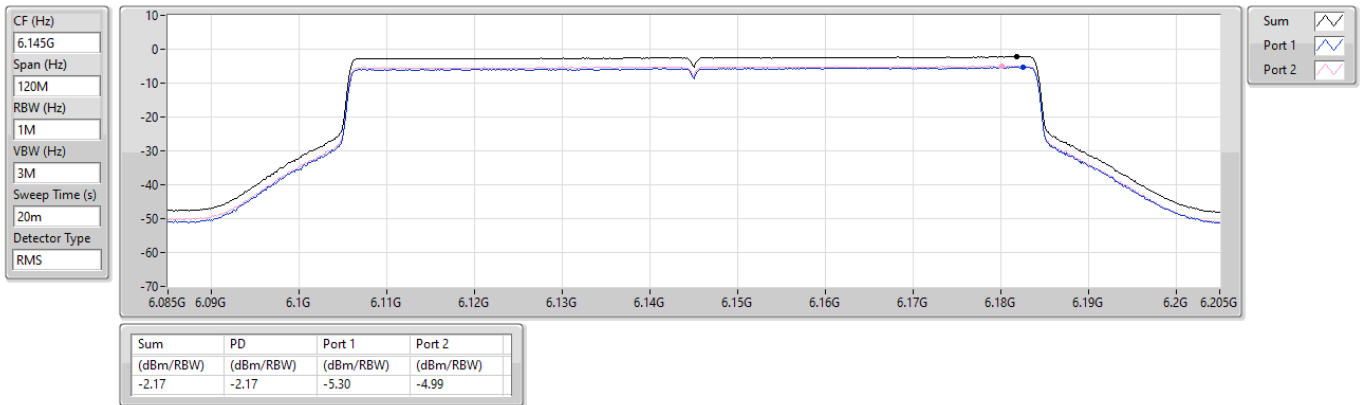

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6385MHz

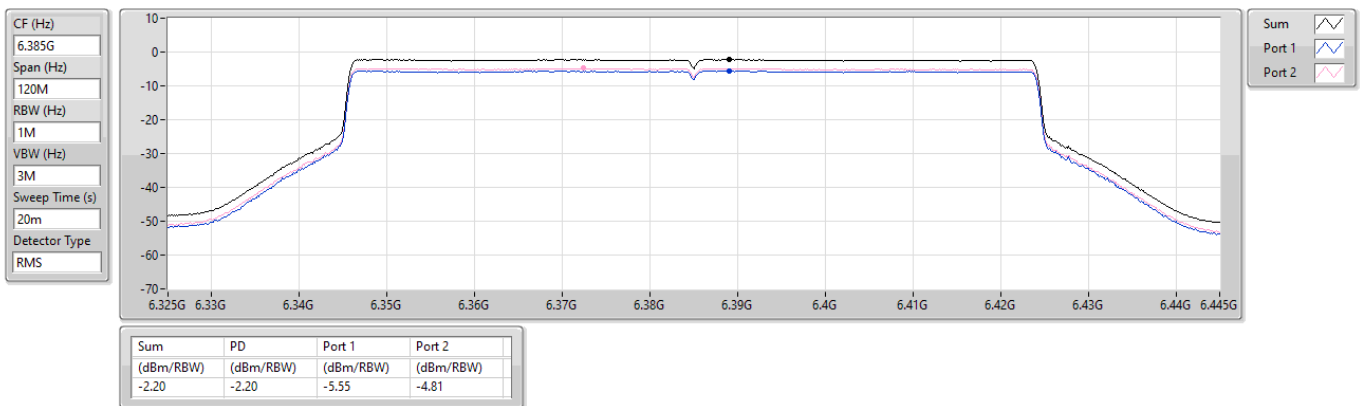




6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6465MHz

CF (Hz)
6.465G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

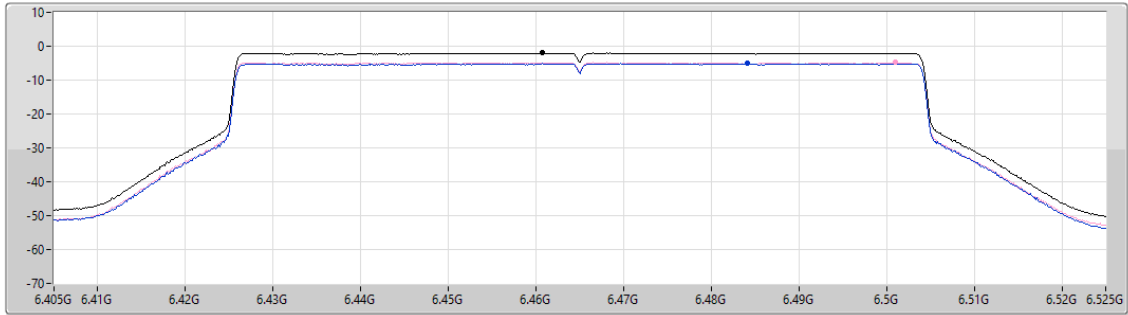


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.00	-2.00	-5.09	-4.81

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6545MHz Straddle 6.525-6.875GHz

CF (Hz)
6.545G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

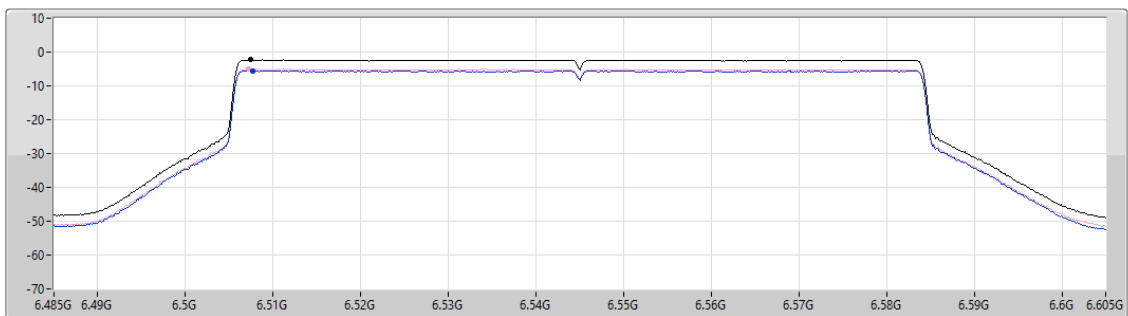

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.32	-2.32	-5.51	-5.07




6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6625MHz

CF (Hz)
6.625G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

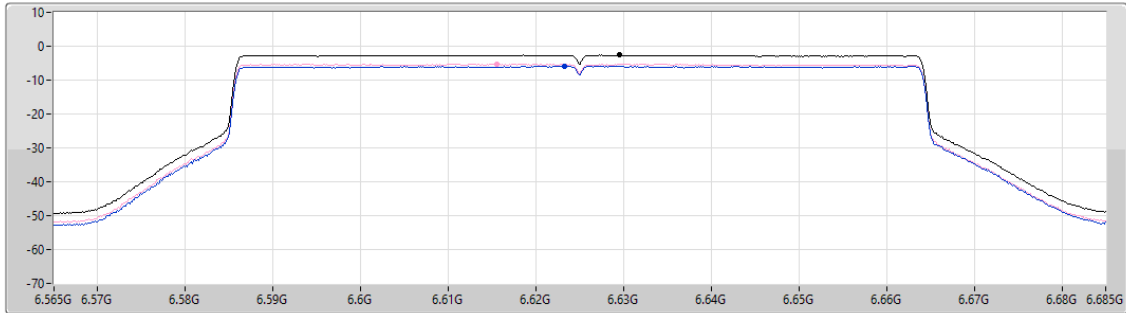

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.61	-2.61	-5.90	-5.28

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6705MHz

CF (Hz)
6.705G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

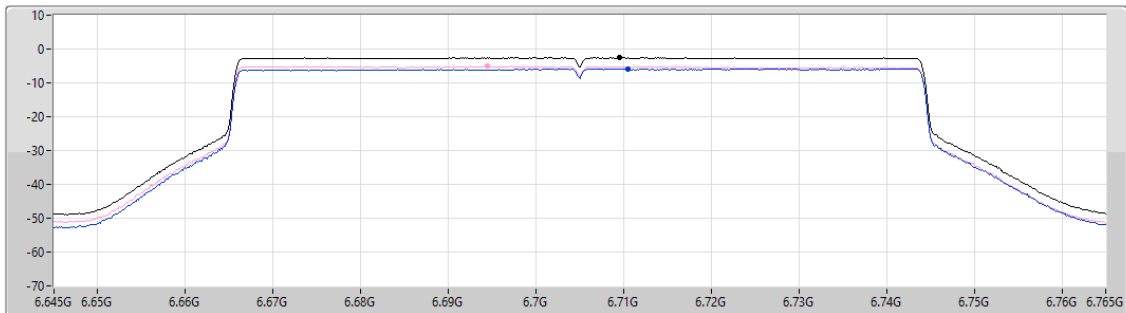

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.56	-2.56	-5.85	-5.10



6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD


6785MHz

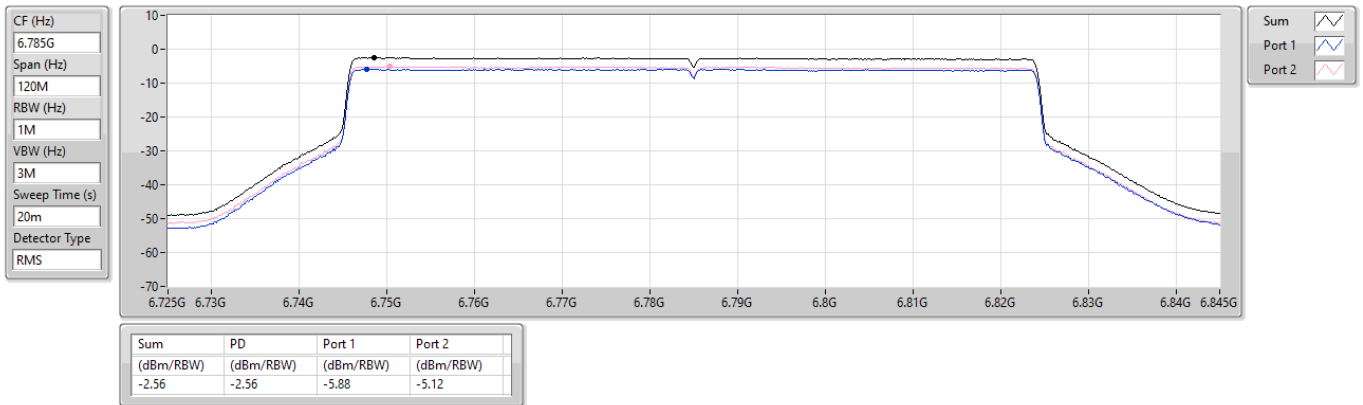

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6865MHz Straddle 6.875-7.125GHz

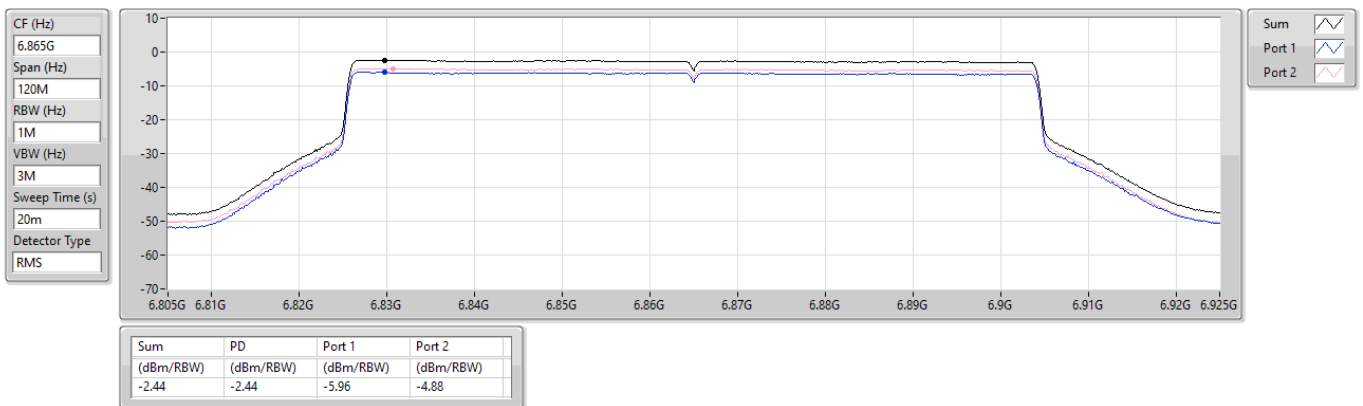




6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD


6945MHz

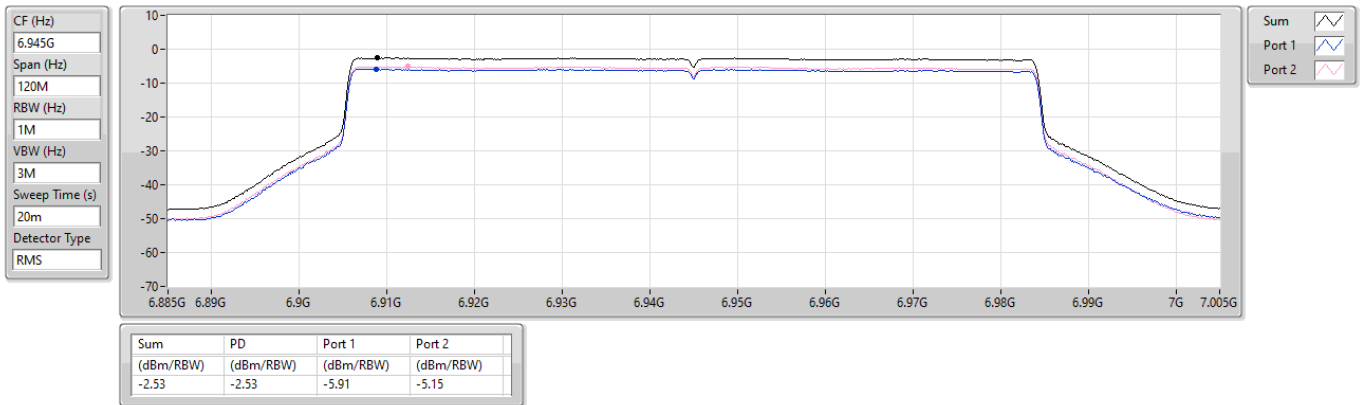

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

7025MHz

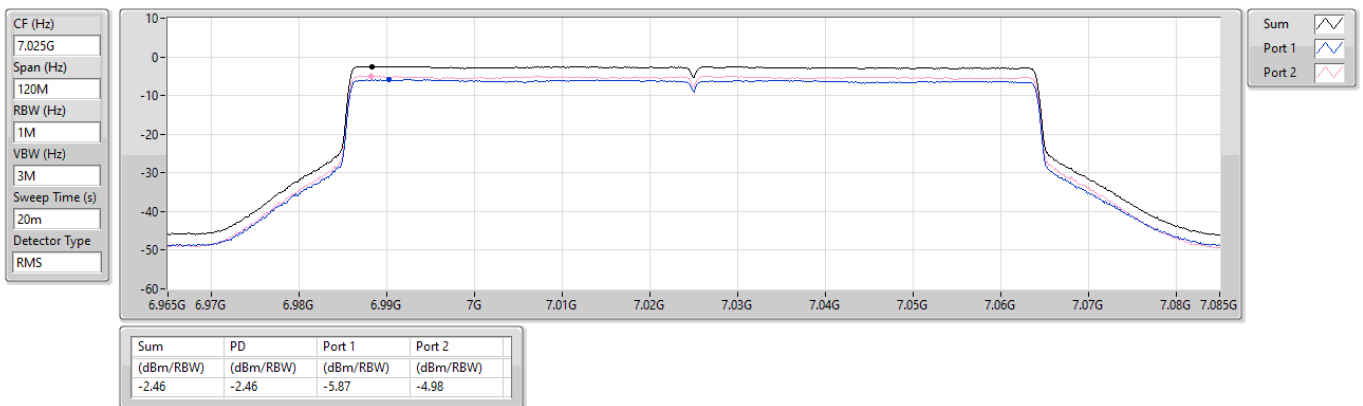




5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6025MHz

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

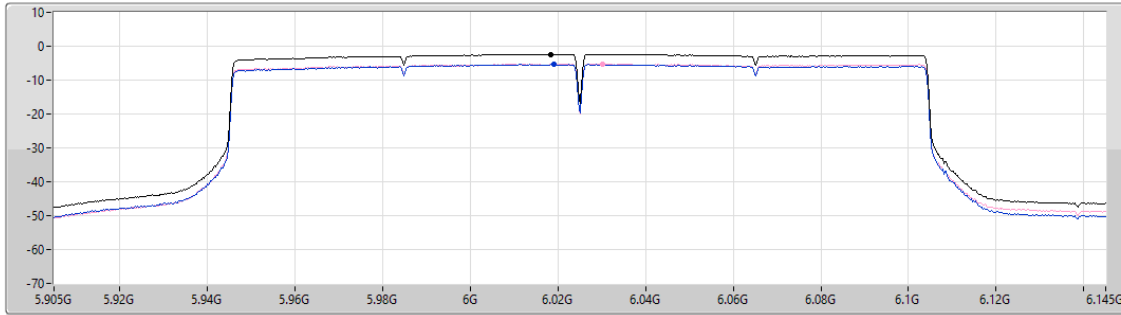

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.37	-2.37	-5.37	-5.24

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6185MHz

CF (Hz)
6.185G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

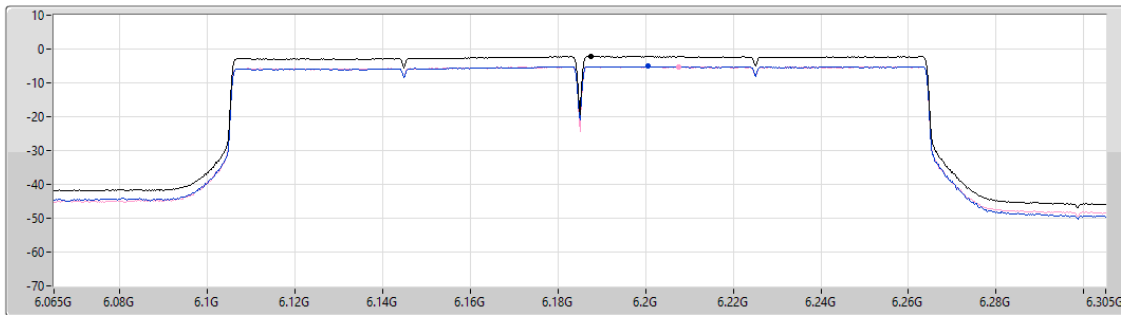

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.21	-2.21	-5.09	-5.25



5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD


6345MHz

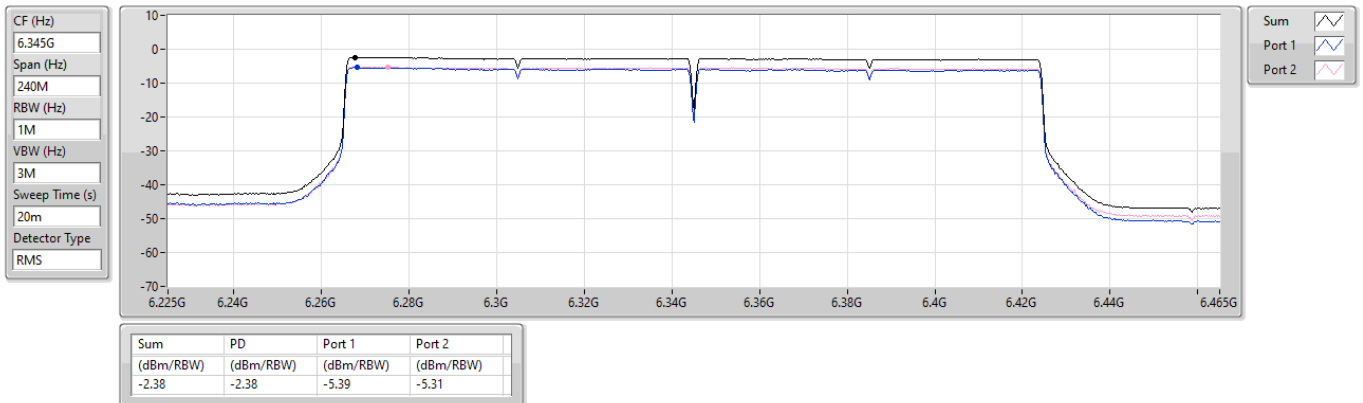

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6505MHz Straddle 6.525-6.875GHz

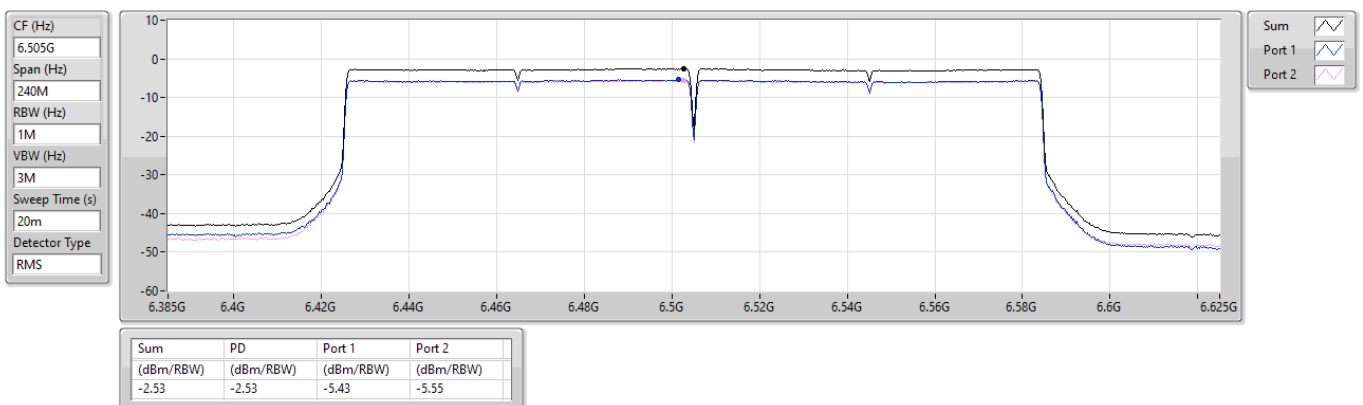




6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD


6665MHz

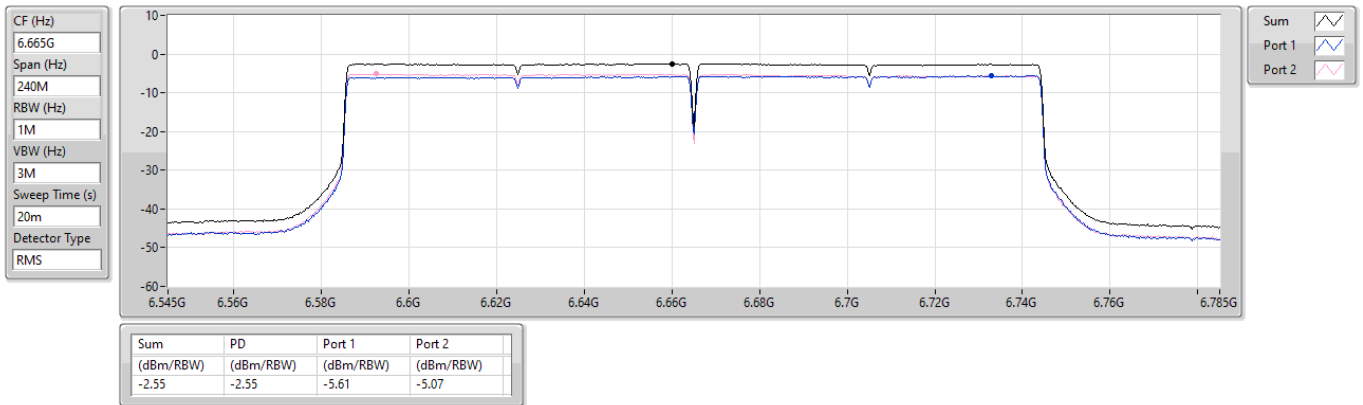

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6825MHz Straddle 6.875-7.125GHz

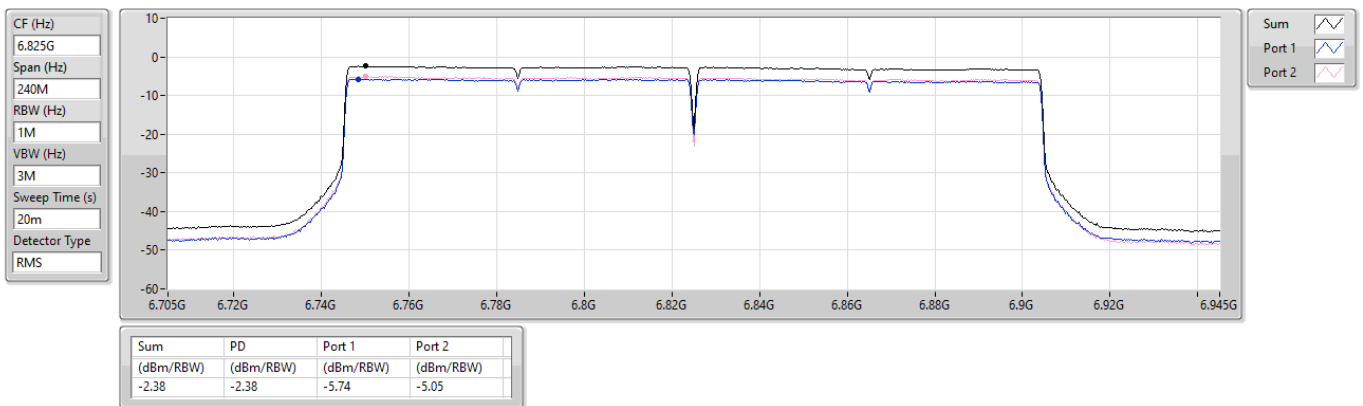




6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6985MHz

CF (Hz)
6.985G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

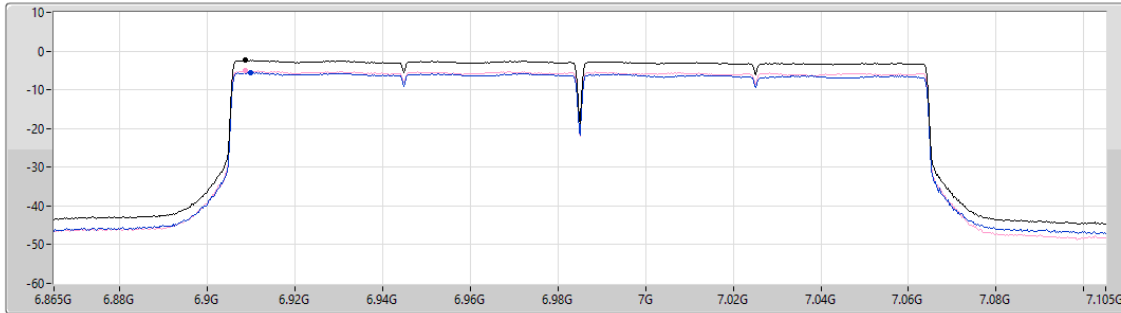

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.42	-2.42	-5.63	-5.13

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6105MHz

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

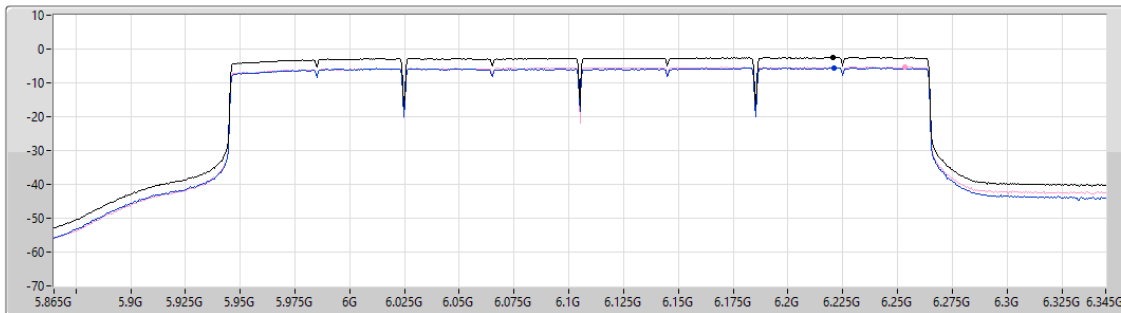

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.51	-2.51	-5.58	-5.35

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6265MHz

CF (Hz)
6.265G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

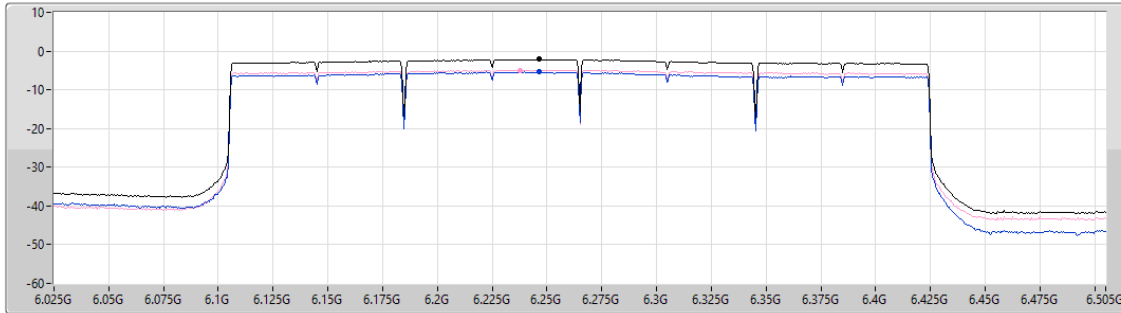

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.15	-2.15	-5.37	-4.92

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6425MHz Straddle 6.525-6.875GHz

CF (Hz)
6.425G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

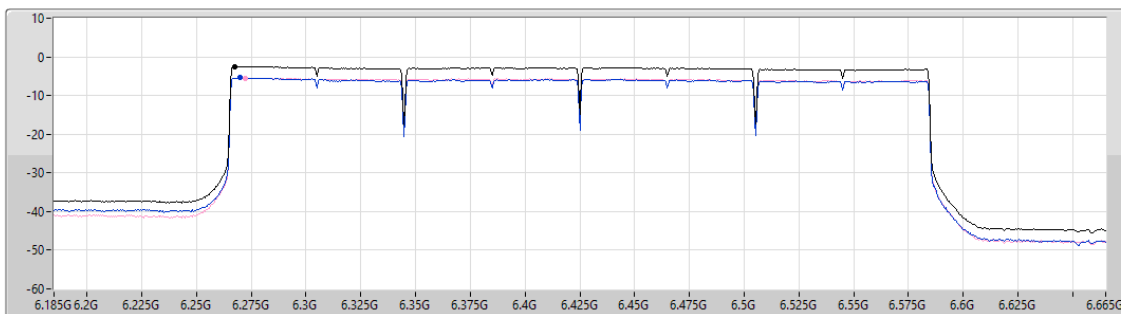

Sum 

Port 1 

Port 2 


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.47	-2.47	-5.44	-5.46



6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD


6585MHz Straddle 6.525-6.875GHz

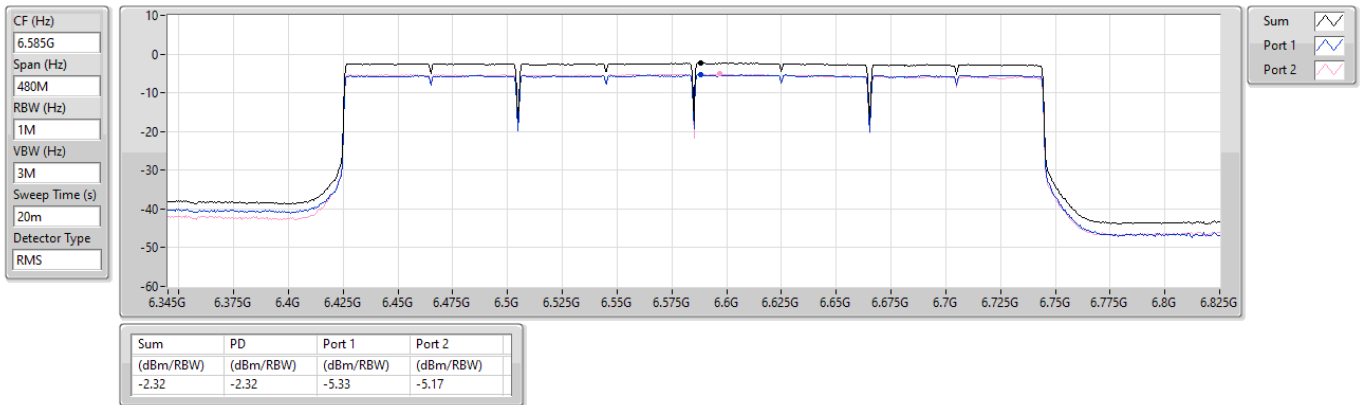

6.875-7.125GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6745MHz Straddle 6.875-7.125GHz

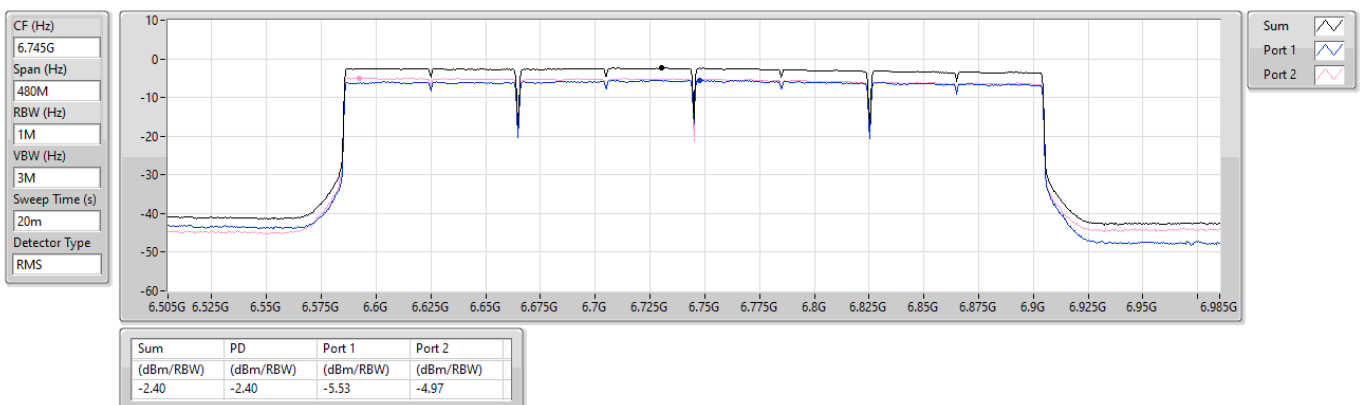




6.875-7.125GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6905MHz Straddle 6.875-7.125GHz

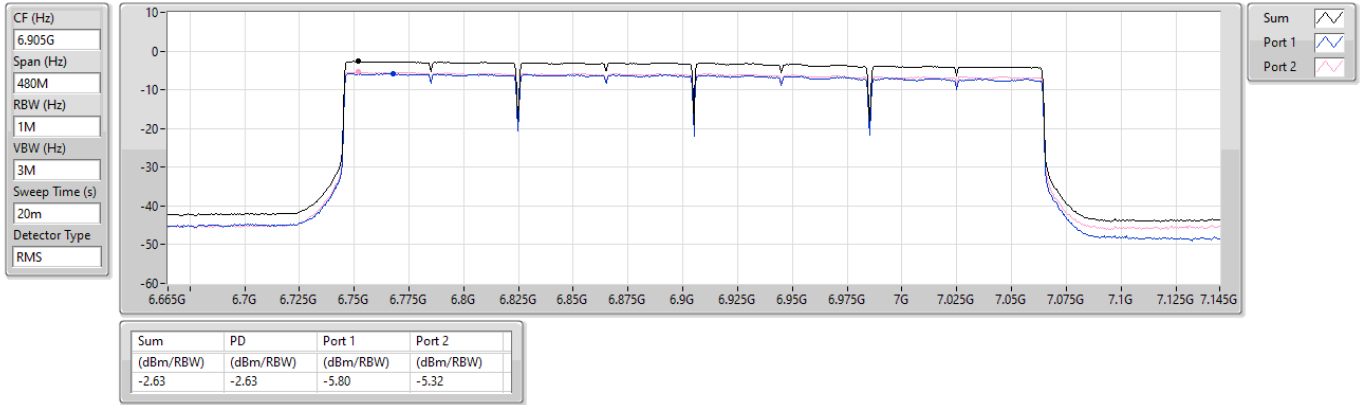




Unwanted Emissions (Below 1GHz)


Modulation	be EHT320	Test Freq. (MHz)	6585																																																																						
Polarization	Horizontal																																																																								
Test By :Brad Wu_ Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m) CLASS-B <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>43.58</td><td>24.87</td><td>40.00</td><td>-15.13</td><td>33.65</td><td>-8.78</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>67.83</td><td>26.27</td><td>40.00</td><td>-13.73</td><td>36.19</td><td>-9.92</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>77.53</td><td>25.36</td><td>40.00</td><td>-14.64</td><td>38.09</td><td>-12.73</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>159.01</td><td>28.16</td><td>43.50</td><td>-15.34</td><td>36.56</td><td>-8.40</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>560.59</td><td>34.67</td><td>46.00</td><td>-11.33</td><td>35.44</td><td>-0.77</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>1000.00</td><td>41.45</td><td>54.00</td><td>-12.55</td><td>33.74</td><td>7.71</td><td>Peak</td><td>---</td><td>---</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	43.58	24.87	40.00	-15.13	33.65	-8.78	Peak	---	---	2	67.83	26.27	40.00	-13.73	36.19	-9.92	Peak	---	---	3	77.53	25.36	40.00	-14.64	38.09	-12.73	Peak	---	---	4	159.01	28.16	43.50	-15.34	36.56	-8.40	Peak	---	---	5	560.59	34.67	46.00	-11.33	35.44	-0.77	Peak	---	---	6	1000.00	41.45	54.00	-12.55	33.74	7.71	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	43.58	24.87	40.00	-15.13	33.65	-8.78	Peak	---	---																																																																
2	67.83	26.27	40.00	-13.73	36.19	-9.92	Peak	---	---																																																																
3	77.53	25.36	40.00	-14.64	38.09	-12.73	Peak	---	---																																																																
4	159.01	28.16	43.50	-15.34	36.56	-8.40	Peak	---	---																																																																
5	560.59	34.67	46.00	-11.33	35.44	-0.77	Peak	---	---																																																																
6	1000.00	41.45	54.00	-12.55	33.74	7.71	Peak	---	---																																																																

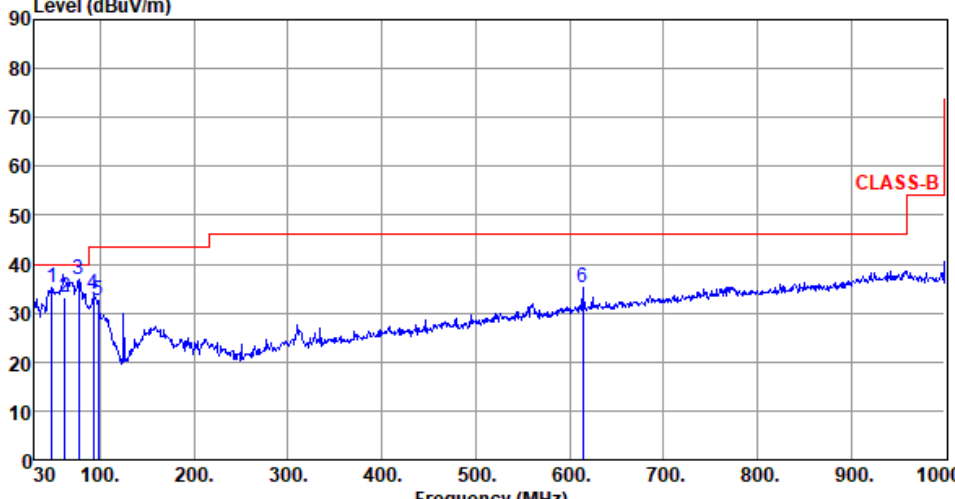

Modulation	be EHT320	Test Freq. (MHz)	6585																																																																						
Polarization	Vertical																																																																								
Test By :Brad Wu_ Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>48.43</td><td>35.13</td><td>40.00</td><td>-4.87</td><td>43.20</td><td>-8.07</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>62.08</td><td>33.35</td><td>40.00</td><td>-6.65</td><td>42.48</td><td>-9.13</td><td>QP</td><td>106</td><td>17</td></tr><tr><td>3</td><td>77.53</td><td>36.96</td><td>40.00</td><td>-3.04</td><td>49.69</td><td>-12.73</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>93.05</td><td>33.80</td><td>43.50</td><td>-9.70</td><td>47.75</td><td>-13.95</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>97.90</td><td>32.64</td><td>43.50</td><td>-10.86</td><td>46.18</td><td>-13.54</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>613.94</td><td>35.20</td><td>46.00</td><td>-10.80</td><td>34.41</td><td>0.79</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	48.43	35.13	40.00	-4.87	43.20	-8.07	Peak	---	---	2	62.08	33.35	40.00	-6.65	42.48	-9.13	QP	106	17	3	77.53	36.96	40.00	-3.04	49.69	-12.73	Peak	---	---	4	93.05	33.80	43.50	-9.70	47.75	-13.95	Peak	---	---	5	97.90	32.64	43.50	-10.86	46.18	-13.54	Peak	---	---	6	613.94	35.20	46.00	-10.80	34.41	0.79	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	48.43	35.13	40.00	-4.87	43.20	-8.07	Peak	---	---																																																																
2	62.08	33.35	40.00	-6.65	42.48	-9.13	QP	106	17																																																																
3	77.53	36.96	40.00	-3.04	49.69	-12.73	Peak	---	---																																																																
4	93.05	33.80	43.50	-9.70	47.75	-13.95	Peak	---	---																																																																
5	97.90	32.64	43.50	-10.86	46.18	-13.54	Peak	---	---																																																																
6	613.94	35.20	46.00	-10.80	34.41	0.79	Peak	---	---																																																																




Unwanted Emissions (Above 1GHz) for be EHT20

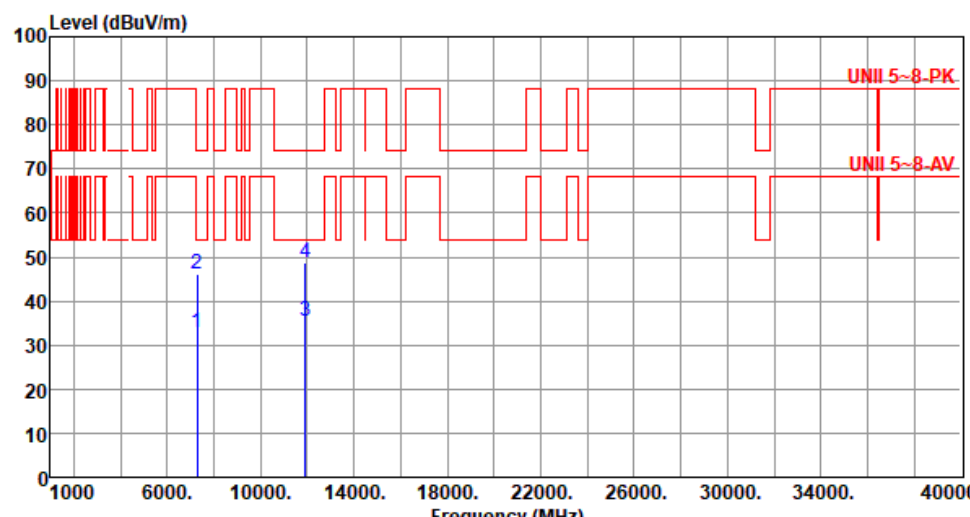Modulation	be EHT20	Test Freq. (MHz)	5955																																																		
Polarization	Horizontal																																																				
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																					
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7288.00</td><td>32.98</td><td>54.00</td><td>-21.02</td><td>26.83</td><td>6.15</td><td>Average</td><td>122</td><td>344</td></tr><tr><td>2</td><td>7288.00</td><td>46.25</td><td>74.00</td><td>-27.75</td><td>40.10</td><td>6.15</td><td>Peak</td><td>122</td><td>344</td></tr><tr><td>3</td><td>11910.00</td><td>35.41</td><td>54.00</td><td>-18.59</td><td>27.31</td><td>8.10</td><td>Average</td><td>104</td><td>316</td></tr><tr><td>4</td><td>11910.00</td><td>48.86</td><td>74.00</td><td>-25.14</td><td>40.76</td><td>8.10</td><td>Peak</td><td>104</td><td>316</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7288.00	32.98	54.00	-21.02	26.83	6.15	Average	122	344	2	7288.00	46.25	74.00	-27.75	40.10	6.15	Peak	122	344	3	11910.00	35.41	54.00	-18.59	27.31	8.10	Average	104	316	4	11910.00	48.86	74.00	-25.14	40.76	8.10	Peak	104	316
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	7288.00	32.98	54.00	-21.02	26.83	6.15	Average	122	344																																												
2	7288.00	46.25	74.00	-27.75	40.10	6.15	Peak	122	344																																												
3	11910.00	35.41	54.00	-18.59	27.31	8.10	Average	104	316																																												
4	11910.00	48.86	74.00	-25.14	40.76	8.10	Peak	104	316																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT20	Test Freq. (MHz)	5955
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) </			

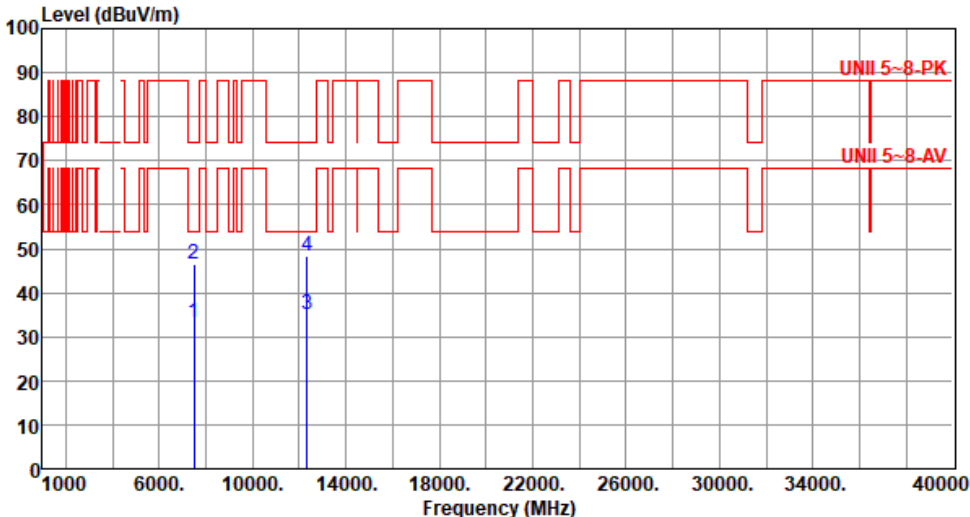

Modulation	be EHT20		Test Freq. (MHz)		6175																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7508.00</td><td>33.26</td><td>54.00</td><td>-20.74</td><td>27.03</td><td>6.23</td><td>Average</td><td>131</td><td>336</td></tr><tr><td>2</td><td>7508.00</td><td>46.50</td><td>74.00</td><td>-27.50</td><td>40.27</td><td>6.23</td><td>Peak</td><td>131</td><td>336</td></tr><tr><td>3</td><td>12350.00</td><td>34.98</td><td>54.00</td><td>-19.02</td><td>27.34</td><td>7.64</td><td>Average</td><td>173</td><td>302</td></tr><tr><td>4</td><td>12350.00</td><td>48.49</td><td>74.00</td><td>-25.51</td><td>40.85</td><td>7.64</td><td>Peak</td><td>173</td><td>302</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7508.00	33.26	54.00	-20.74	27.03	6.23	Average	131	336	2	7508.00	46.50	74.00	-27.50	40.27	6.23	Peak	131	336	3	12350.00	34.98	54.00	-19.02	27.34	7.64	Average	173	302	4	12350.00	48.49	74.00	-25.51	40.85	7.64	Peak	173	302
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7508.00	33.26	54.00	-20.74	27.03	6.23	Average	131	336																																																		
2	7508.00	46.50	74.00	-27.50	40.27	6.23	Peak	131	336																																																		
3	12350.00	34.98	54.00	-19.02	27.34	7.64	Average	173	302																																																		
4	12350.00	48.49	74.00	-25.51	40.85	7.64	Peak	173	302																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																											



Modulation	be EHT20	Test Freq. (MHz)	6175
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) </			




Modulation	be EHT20	Test Freq. (MHz)	6415
Polarization	Horizontal		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m)			



Modulation	be EHT20	Test Freq. (MHz)	6415
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) </			

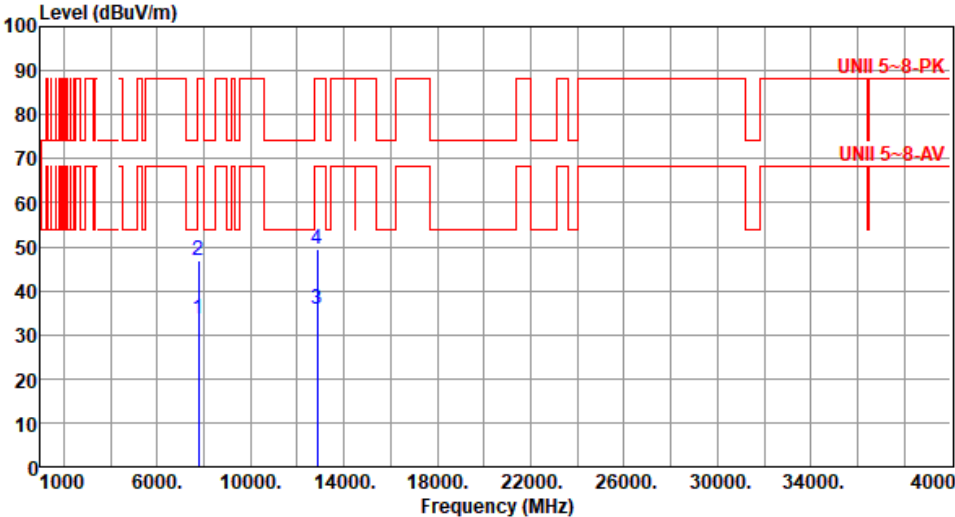

Modulation	be EHT20		Test Freq. (MHz)		6435																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7768.00</td><td>33.67</td><td>68.20</td><td>-34.53</td><td>27.62</td><td>6.05</td><td>Average</td><td>128</td><td>346</td></tr><tr><td>2</td><td>7768.00</td><td>46.83</td><td>88.20</td><td>-41.37</td><td>40.78</td><td>6.05</td><td>Peak</td><td>128</td><td>346</td></tr><tr><td>3</td><td>12870.00</td><td>35.96</td><td>68.20</td><td>-32.24</td><td>27.93</td><td>8.03</td><td>Average</td><td>146</td><td>310</td></tr><tr><td>4</td><td>12870.00</td><td>49.56</td><td>88.20</td><td>-38.64</td><td>41.53</td><td>8.03</td><td>Peak</td><td>146</td><td>310</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7768.00	33.67	68.20	-34.53	27.62	6.05	Average	128	346	2	7768.00	46.83	88.20	-41.37	40.78	6.05	Peak	128	346	3	12870.00	35.96	68.20	-32.24	27.93	8.03	Average	146	310	4	12870.00	49.56	88.20	-38.64	41.53	8.03	Peak	146	310
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7768.00	33.67	68.20	-34.53	27.62	6.05	Average	128	346																																																		
2	7768.00	46.83	88.20	-41.37	40.78	6.05	Peak	128	346																																																		
3	12870.00	35.96	68.20	-32.24	27.93	8.03	Average	146	310																																																		
4	12870.00	49.56	88.20	-38.64	41.53	8.03	Peak	146	310																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											



Modulation	be EHT20		Test Freq. (MHz)		6435																																																						
Polarization	Vertical																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7768.00</td><td>33.89</td><td>68.20</td><td>-34.31</td><td>27.84</td><td>6.05</td><td>Average</td><td>245</td><td>166</td></tr><tr><td>2</td><td>7768.00</td><td>47.13</td><td>88.20</td><td>-41.07</td><td>41.08</td><td>6.05</td><td>Peak</td><td>245</td><td>166</td></tr><tr><td>3</td><td>12870.00</td><td>35.94</td><td>68.20</td><td>-32.26</td><td>27.91</td><td>8.03</td><td>Average</td><td>151</td><td>140</td></tr><tr><td>4</td><td>12870.00</td><td>49.42</td><td>88.20</td><td>-38.78</td><td>41.39</td><td>8.03</td><td>Peak</td><td>151</td><td>140</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7768.00	33.89	68.20	-34.31	27.84	6.05	Average	245	166	2	7768.00	47.13	88.20	-41.07	41.08	6.05	Peak	245	166	3	12870.00	35.94	68.20	-32.26	27.91	8.03	Average	151	140	4	12870.00	49.42	88.20	-38.78	41.39	8.03	Peak	151	140
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7768.00	33.89	68.20	-34.31	27.84	6.05	Average	245	166																																																		
2	7768.00	47.13	88.20	-41.07	41.08	6.05	Peak	245	166																																																		
3	12870.00	35.94	68.20	-32.26	27.91	8.03	Average	151	140																																																		
4	12870.00	49.42	88.20	-38.78	41.39	8.03	Peak	151	140																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											



Modulation	be EHT20	Test Freq. (MHz)	6475																																																		
Polarization	Horizontal																																																				
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7808.00</td><td>32.92</td><td>68.20</td><td>-35.28</td><td>26.83</td><td>6.09</td><td>Average</td><td>100</td><td>335</td></tr><tr><td>2</td><td>7808.00</td><td>46.13</td><td>88.20</td><td>-42.07</td><td>40.04</td><td>6.09</td><td>Peak</td><td>100</td><td>335</td></tr><tr><td>3</td><td>12950.00</td><td>35.44</td><td>68.20</td><td>-32.76</td><td>27.39</td><td>8.05</td><td>Average</td><td>102</td><td>307</td></tr><tr><td>4</td><td>12950.00</td><td>49.04</td><td>88.20</td><td>-39.16</td><td>40.99</td><td>8.05</td><td>Peak</td><td>102</td><td>307</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7808.00	32.92	68.20	-35.28	26.83	6.09	Average	100	335	2	7808.00	46.13	88.20	-42.07	40.04	6.09	Peak	100	335	3	12950.00	35.44	68.20	-32.76	27.39	8.05	Average	102	307	4	12950.00	49.04	88.20	-39.16	40.99	8.05	Peak	102	307
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	7808.00	32.92	68.20	-35.28	26.83	6.09	Average	100	335																																												
2	7808.00	46.13	88.20	-42.07	40.04	6.09	Peak	100	335																																												
3	12950.00	35.44	68.20	-32.76	27.39	8.05	Average	102	307																																												
4	12950.00	49.04	88.20	-39.16	40.99	8.05	Peak	102	307																																												



Modulation	be EHT20	Test Freq. (MHz)	6475
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) </			



Modulation	be EHT20		Test Freq. (MHz)		6515																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7848.00</td><td>34.09</td><td>68.20</td><td>-34.11</td><td>27.84</td><td>6.25</td><td>Average</td><td>234</td><td>348</td></tr><tr><td>2</td><td>7848.00</td><td>47.92</td><td>88.20</td><td>-40.28</td><td>41.67</td><td>6.25</td><td>Peak</td><td>234</td><td>348</td></tr><tr><td>3</td><td>13030.00</td><td>36.37</td><td>68.20</td><td>-31.83</td><td>28.49</td><td>7.88</td><td>Average</td><td>201</td><td>300</td></tr><tr><td>4</td><td>13030.00</td><td>50.39</td><td>88.20</td><td>-37.81</td><td>42.51</td><td>7.88</td><td>Peak</td><td>201</td><td>300</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7848.00	34.09	68.20	-34.11	27.84	6.25	Average	234	348	2	7848.00	47.92	88.20	-40.28	41.67	6.25	Peak	234	348	3	13030.00	36.37	68.20	-31.83	28.49	7.88	Average	201	300	4	13030.00	50.39	88.20	-37.81	42.51	7.88	Peak	201	300
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7848.00	34.09	68.20	-34.11	27.84	6.25	Average	234	348																																																		
2	7848.00	47.92	88.20	-40.28	41.67	6.25	Peak	234	348																																																		
3	13030.00	36.37	68.20	-31.83	28.49	7.88	Average	201	300																																																		
4	13030.00	50.39	88.20	-37.81	42.51	7.88	Peak	201	300																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											




Modulation	be EHT20	Test Freq. (MHz)	6515
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) <			



Modulation	be EHT20		Test Freq. (MHz)		6535																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7868.00</td><td>33.95</td><td>68.20</td><td>-34.25</td><td>27.61</td><td>6.34</td><td>Average</td><td>288</td><td>344</td></tr><tr><td>2</td><td>7868.00</td><td>47.87</td><td>88.20</td><td>-40.33</td><td>41.53</td><td>6.34</td><td>Peak</td><td>288</td><td>344</td></tr><tr><td>3</td><td>13070.00</td><td>36.23</td><td>68.20</td><td>-31.97</td><td>28.47</td><td>7.76</td><td>Average</td><td>162</td><td>301</td></tr><tr><td>4</td><td>13070.00</td><td>50.33</td><td>88.20</td><td>-37.87</td><td>42.57</td><td>7.76</td><td>Peak</td><td>162</td><td>301</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7868.00	33.95	68.20	-34.25	27.61	6.34	Average	288	344	2	7868.00	47.87	88.20	-40.33	41.53	6.34	Peak	288	344	3	13070.00	36.23	68.20	-31.97	28.47	7.76	Average	162	301	4	13070.00	50.33	88.20	-37.87	42.57	7.76	Peak	162	301
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7868.00	33.95	68.20	-34.25	27.61	6.34	Average	288	344																																																		
2	7868.00	47.87	88.20	-40.33	41.53	6.34	Peak	288	344																																																		
3	13070.00	36.23	68.20	-31.97	28.47	7.76	Average	162	301																																																		
4	13070.00	50.33	88.20	-37.87	42.57	7.76	Peak	162	301																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											

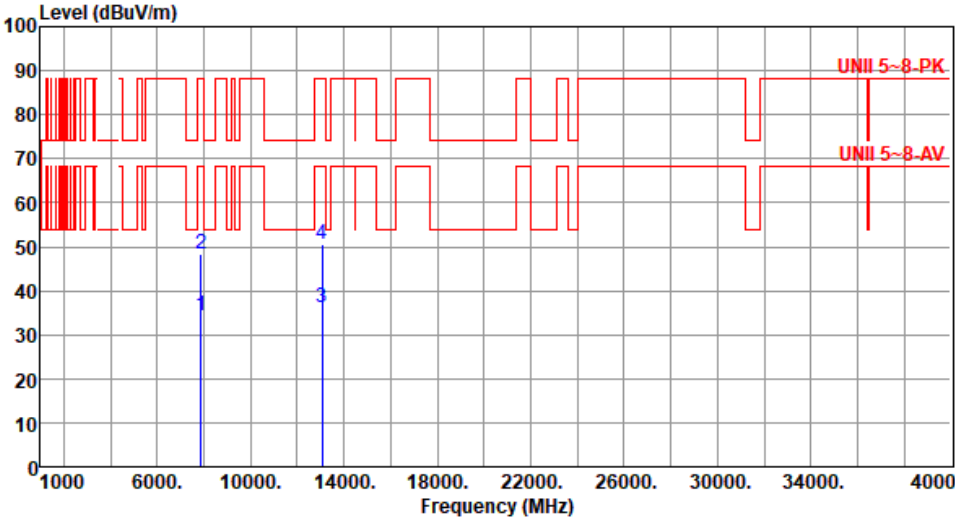

Modulation	be EHT20	Test Freq. (MHz)	6535																																																		
Polarization	Vertical																																																				
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																					
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7868.00</td><td>34.19</td><td>68.20</td><td>-34.01</td><td>27.85</td><td>6.34</td><td>Average</td><td>274</td><td>159</td></tr><tr><td>2</td><td>7868.00</td><td>48.18</td><td>88.20</td><td>-40.02</td><td>41.84</td><td>6.34</td><td>Peak</td><td>274</td><td>159</td></tr><tr><td>3</td><td>13070.00</td><td>36.32</td><td>68.20</td><td>-31.88</td><td>28.56</td><td>7.76</td><td>Average</td><td>183</td><td>145</td></tr><tr><td>4</td><td>13070.00</td><td>50.44</td><td>88.20</td><td>-37.76</td><td>42.68</td><td>7.76</td><td>Peak</td><td>183</td><td>145</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7868.00	34.19	68.20	-34.01	27.85	6.34	Average	274	159	2	7868.00	48.18	88.20	-40.02	41.84	6.34	Peak	274	159	3	13070.00	36.32	68.20	-31.88	28.56	7.76	Average	183	145	4	13070.00	50.44	88.20	-37.76	42.68	7.76	Peak	183	145
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	7868.00	34.19	68.20	-34.01	27.85	6.34	Average	274	159																																												
2	7868.00	48.18	88.20	-40.02	41.84	6.34	Peak	274	159																																												
3	13070.00	36.32	68.20	-31.88	28.56	7.76	Average	183	145																																												
4	13070.00	50.44	88.20	-37.76	42.68	7.76	Peak	183	145																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT20		Test Freq. (MHz)		6715																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8048.00</td><td>34.75</td><td>54.00</td><td>-19.25</td><td>27.77</td><td>6.98</td><td>Average</td><td>124</td><td>336</td></tr><tr><td>2</td><td>8048.00</td><td>48.51</td><td>74.00</td><td>-25.49</td><td>41.53</td><td>6.98</td><td>Peak</td><td>124</td><td>336</td></tr><tr><td>3</td><td>13430.00</td><td>36.78</td><td>68.20</td><td>-31.42</td><td>28.63</td><td>8.15</td><td>Average</td><td>154</td><td>306</td></tr><tr><td>4</td><td>13430.00</td><td>50.71</td><td>88.20</td><td>-37.49</td><td>42.56</td><td>8.15</td><td>Peak</td><td>154</td><td>306</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8048.00	34.75	54.00	-19.25	27.77	6.98	Average	124	336	2	8048.00	48.51	74.00	-25.49	41.53	6.98	Peak	124	336	3	13430.00	36.78	68.20	-31.42	28.63	8.15	Average	154	306	4	13430.00	50.71	88.20	-37.49	42.56	8.15	Peak	154	306
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	8048.00	34.75	54.00	-19.25	27.77	6.98	Average	124	336																																																		
2	8048.00	48.51	74.00	-25.49	41.53	6.98	Peak	124	336																																																		
3	13430.00	36.78	68.20	-31.42	28.63	8.15	Average	154	306																																																		
4	13430.00	50.71	88.20	-37.49	42.56	8.15	Peak	154	306																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											



Modulation	be EHT20	Test Freq. (MHz)	6715
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m)			



Modulation	be EHT20		Test Freq. (MHz)		6855																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8188.00</td><td>34.38</td><td>54.00</td><td>-19.62</td><td>27.79</td><td>6.59</td><td>Average</td><td>150</td><td>350</td></tr><tr><td>2</td><td>8188.00</td><td>48.11</td><td>74.00</td><td>-25.89</td><td>41.52</td><td>6.59</td><td>Peak</td><td>150</td><td>350</td></tr><tr><td>3</td><td>13710.00</td><td>36.83</td><td>68.20</td><td>-31.37</td><td>28.66</td><td>8.17</td><td>Average</td><td>108</td><td>319</td></tr><tr><td>4</td><td>13710.00</td><td>50.91</td><td>88.20</td><td>-37.29</td><td>42.74</td><td>8.17</td><td>Peak</td><td>108</td><td>319</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8188.00	34.38	54.00	-19.62	27.79	6.59	Average	150	350	2	8188.00	48.11	74.00	-25.89	41.52	6.59	Peak	150	350	3	13710.00	36.83	68.20	-31.37	28.66	8.17	Average	108	319	4	13710.00	50.91	88.20	-37.29	42.74	8.17	Peak	108	319
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	8188.00	34.38	54.00	-19.62	27.79	6.59	Average	150	350																																																		
2	8188.00	48.11	74.00	-25.89	41.52	6.59	Peak	150	350																																																		
3	13710.00	36.83	68.20	-31.37	28.66	8.17	Average	108	319																																																		
4	13710.00	50.91	88.20	-37.29	42.74	8.17	Peak	108	319																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											




Modulation	be EHT20	Test Freq. (MHz)	6855
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m)			



Modulation	be EHT20	Test Freq. (MHz)	6875																																																		
Polarization	Horizontal																																																				
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8208.00</td><td>34.32</td><td>54.00</td><td>-19.68</td><td>27.81</td><td>6.51</td><td>Average</td><td>253</td><td>338</td></tr><tr><td>2</td><td>8208.00</td><td>48.31</td><td>74.00</td><td>-25.69</td><td>41.80</td><td>6.51</td><td>Peak</td><td>253</td><td>338</td></tr><tr><td>3</td><td>13750.00</td><td>36.91</td><td>68.20</td><td>-31.29</td><td>28.79</td><td>8.12</td><td>Average</td><td>161</td><td>323</td></tr><tr><td>4</td><td>13750.00</td><td>50.93</td><td>88.20</td><td>-37.27</td><td>42.81</td><td>8.12</td><td>Peak</td><td>161</td><td>323</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8208.00	34.32	54.00	-19.68	27.81	6.51	Average	253	338	2	8208.00	48.31	74.00	-25.69	41.80	6.51	Peak	253	338	3	13750.00	36.91	68.20	-31.29	28.79	8.12	Average	161	323	4	13750.00	50.93	88.20	-37.27	42.81	8.12	Peak	161	323
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8208.00	34.32	54.00	-19.68	27.81	6.51	Average	253	338																																												
2	8208.00	48.31	74.00	-25.69	41.80	6.51	Peak	253	338																																												
3	13750.00	36.91	68.20	-31.29	28.79	8.12	Average	161	323																																												
4	13750.00	50.93	88.20	-37.27	42.81	8.12	Peak	161	323																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					

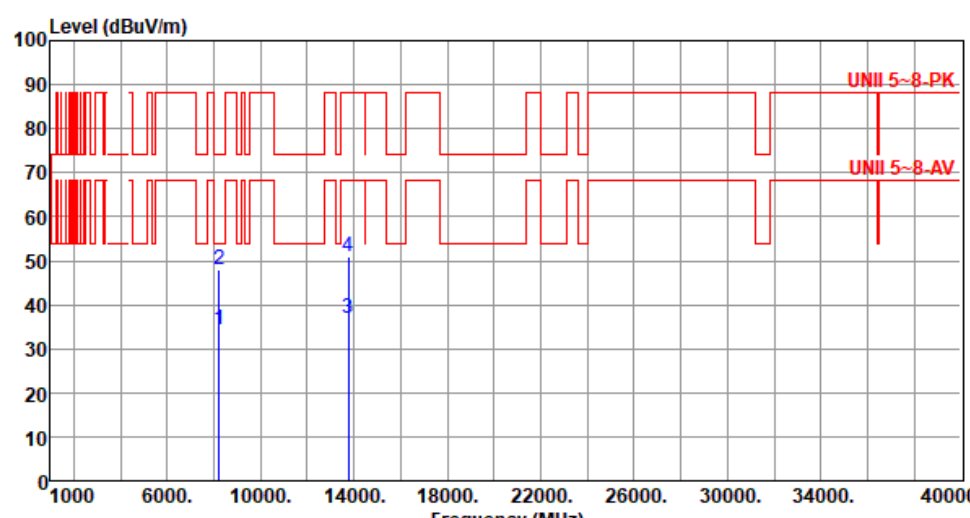

Modulation	be EHT20	Test Freq. (MHz)	6875						
Polarization	Vertical								
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8208.00	34.31	54.00	-19.69	27.80	6.51	Average	120	163
2	8208.00	48.02	74.00	-25.98	41.51	6.51	Peak	120	163
3	13750.00	36.75	68.20	-31.45	28.63	8.12	Average	131	137
4	13750.00	50.85	88.20	-37.35	42.73	8.12	Peak	131	137

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20		Test Freq. (MHz)		6895																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8228.00</td><td>33.52</td><td>54.00</td><td>-20.48</td><td>27.05</td><td>6.47</td><td>Average</td><td>102</td><td>337</td></tr><tr><td>2</td><td>8228.00</td><td>47.33</td><td>74.00</td><td>-26.67</td><td>40.86</td><td>6.47</td><td>Peak</td><td>102</td><td>337</td></tr><tr><td>3</td><td>13790.00</td><td>36.24</td><td>68.20</td><td>-31.96</td><td>28.09</td><td>8.15</td><td>Average</td><td>100</td><td>322</td></tr><tr><td>4</td><td>13790.00</td><td>50.37</td><td>88.20</td><td>-37.83</td><td>42.22</td><td>8.15</td><td>Peak</td><td>100</td><td>322</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8228.00	33.52	54.00	-20.48	27.05	6.47	Average	102	337	2	8228.00	47.33	74.00	-26.67	40.86	6.47	Peak	102	337	3	13790.00	36.24	68.20	-31.96	28.09	8.15	Average	100	322	4	13790.00	50.37	88.20	-37.83	42.22	8.15	Peak	100	322
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	8228.00	33.52	54.00	-20.48	27.05	6.47	Average	102	337																																																		
2	8228.00	47.33	74.00	-26.67	40.86	6.47	Peak	102	337																																																		
3	13790.00	36.24	68.20	-31.96	28.09	8.15	Average	100	322																																																		
4	13790.00	50.37	88.20	-37.83	42.22	8.15	Peak	100	322																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											




Modulation	be EHT20	Test Freq. (MHz)	6895																																																		
Polarization	Vertical																																																				
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8228.00</td><td>33.54</td><td>54.00</td><td>-20.46</td><td>27.07</td><td>6.47</td><td>Average</td><td>100</td><td>160</td></tr><tr><td>2</td><td>8228.00</td><td>47.27</td><td>74.00</td><td>-26.73</td><td>40.80</td><td>6.47</td><td>Peak</td><td>100</td><td>160</td></tr><tr><td>3</td><td>13790.00</td><td>36.74</td><td>68.20</td><td>-31.46</td><td>28.59</td><td>8.15</td><td>Average</td><td>106</td><td>143</td></tr><tr><td>4</td><td>13790.00</td><td>49.96</td><td>88.20</td><td>-38.24</td><td>41.81</td><td>8.15</td><td>Peak</td><td>106</td><td>143</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8228.00	33.54	54.00	-20.46	27.07	6.47	Average	100	160	2	8228.00	47.27	74.00	-26.73	40.80	6.47	Peak	100	160	3	13790.00	36.74	68.20	-31.46	28.59	8.15	Average	106	143	4	13790.00	49.96	88.20	-38.24	41.81	8.15	Peak	106	143
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8228.00	33.54	54.00	-20.46	27.07	6.47	Average	100	160																																												
2	8228.00	47.27	74.00	-26.73	40.80	6.47	Peak	100	160																																												
3	13790.00	36.74	68.20	-31.46	28.59	8.15	Average	106	143																																												
4	13790.00	49.96	88.20	-38.24	41.81	8.15	Peak	106	143																																												



Modulation	be EHT20	Test Freq. (MHz)	7015
Polarization	Horizontal		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) </			

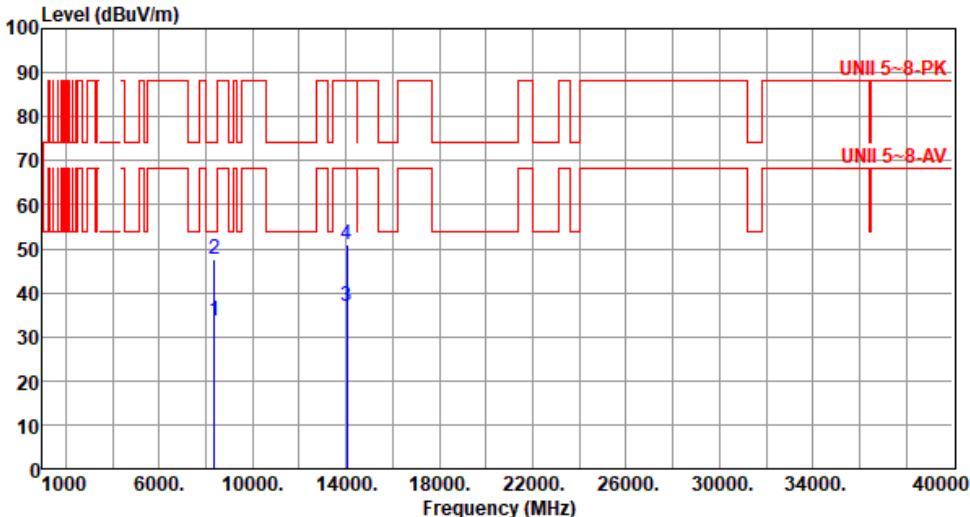

Modulation	be EHT20		Test Freq. (MHz)		7015																																																						
Polarization	Vertical																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8348.00</td><td>33.72</td><td>54.00</td><td>-20.28</td><td>27.49</td><td>6.23</td><td>Average</td><td>143</td><td>159</td></tr><tr><td>2</td><td>8348.00</td><td>47.45</td><td>74.00</td><td>-26.55</td><td>41.22</td><td>6.23</td><td>Peak</td><td>143</td><td>159</td></tr><tr><td>3</td><td>14030.00</td><td>36.84</td><td>68.20</td><td>-31.36</td><td>28.34</td><td>8.50</td><td>Average</td><td>161</td><td>140</td></tr><tr><td>4</td><td>14030.00</td><td>50.76</td><td>88.20</td><td>-37.44</td><td>42.26</td><td>8.50</td><td>Peak</td><td>161</td><td>140</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8348.00	33.72	54.00	-20.28	27.49	6.23	Average	143	159	2	8348.00	47.45	74.00	-26.55	41.22	6.23	Peak	143	159	3	14030.00	36.84	68.20	-31.36	28.34	8.50	Average	161	140	4	14030.00	50.76	88.20	-37.44	42.26	8.50	Peak	161	140
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	8348.00	33.72	54.00	-20.28	27.49	6.23	Average	143	159																																																		
2	8348.00	47.45	74.00	-26.55	41.22	6.23	Peak	143	159																																																		
3	14030.00	36.84	68.20	-31.36	28.34	8.50	Average	161	140																																																		
4	14030.00	50.76	88.20	-37.44	42.26	8.50	Peak	161	140																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											




Modulation	be EHT20	Test Freq. (MHz)	7095
Polarization	Horizontal		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBUV/m)			




Modulation	be EHT20	Test Freq. (MHz)	7095																																																		
Polarization	Vertical																																																				
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																					
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8428.00</td><td>33.59</td><td>54.00</td><td>-20.41</td><td>27.41</td><td>6.18</td><td>Average</td><td>224</td><td>156</td></tr><tr><td>2</td><td>8428.00</td><td>47.43</td><td>74.00</td><td>-26.57</td><td>41.25</td><td>6.18</td><td>Peak</td><td>224</td><td>156</td></tr><tr><td>3</td><td>14190.00</td><td>37.26</td><td>68.20</td><td>-30.94</td><td>28.34</td><td>8.92</td><td>Average</td><td>152</td><td>131</td></tr><tr><td>4</td><td>14190.00</td><td>51.45</td><td>88.20</td><td>-36.75</td><td>42.53</td><td>8.92</td><td>Peak</td><td>152</td><td>131</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8428.00	33.59	54.00	-20.41	27.41	6.18	Average	224	156	2	8428.00	47.43	74.00	-26.57	41.25	6.18	Peak	224	156	3	14190.00	37.26	68.20	-30.94	28.34	8.92	Average	152	131	4	14190.00	51.45	88.20	-36.75	42.53	8.92	Peak	152	131
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8428.00	33.59	54.00	-20.41	27.41	6.18	Average	224	156																																												
2	8428.00	47.43	74.00	-26.57	41.25	6.18	Peak	224	156																																												
3	14190.00	37.26	68.20	-30.94	28.34	8.92	Average	152	131																																												
4	14190.00	51.45	88.20	-36.75	42.53	8.92	Peak	152	131																																												

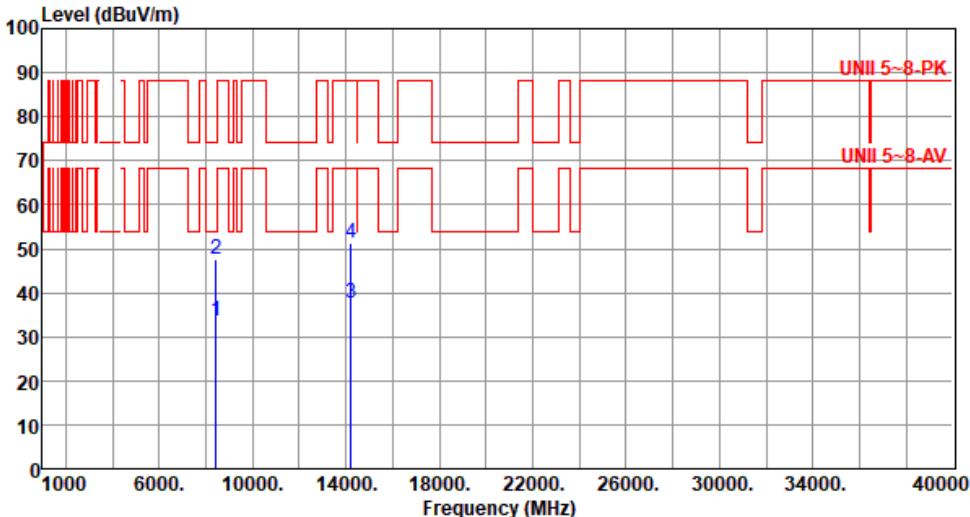


Modulation	be EHT20		Test Freq. (MHz)		7115																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8448.00</td><td>33.57</td><td>54.00</td><td>-20.43</td><td>27.43</td><td>6.14</td><td>Average</td><td>216</td><td>335</td></tr><tr><td>2</td><td>8448.00</td><td>47.52</td><td>74.00</td><td>-26.48</td><td>41.38</td><td>6.14</td><td>Peak</td><td>216</td><td>335</td></tr><tr><td>3</td><td>14230.00</td><td>37.55</td><td>68.20</td><td>-30.65</td><td>28.64</td><td>8.91</td><td>Average</td><td>200</td><td>302</td></tr><tr><td>4</td><td>14230.00</td><td>51.36</td><td>88.20</td><td>-36.84</td><td>42.45</td><td>8.91</td><td>Peak</td><td>200</td><td>302</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8448.00	33.57	54.00	-20.43	27.43	6.14	Average	216	335	2	8448.00	47.52	74.00	-26.48	41.38	6.14	Peak	216	335	3	14230.00	37.55	68.20	-30.65	28.64	8.91	Average	200	302	4	14230.00	51.36	88.20	-36.84	42.45	8.91	Peak	200	302
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	8448.00	33.57	54.00	-20.43	27.43	6.14	Average	216	335																																																		
2	8448.00	47.52	74.00	-26.48	41.38	6.14	Peak	216	335																																																		
3	14230.00	37.55	68.20	-30.65	28.64	8.91	Average	200	302																																																		
4	14230.00	51.36	88.20	-36.84	42.45	8.91	Peak	200	302																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											

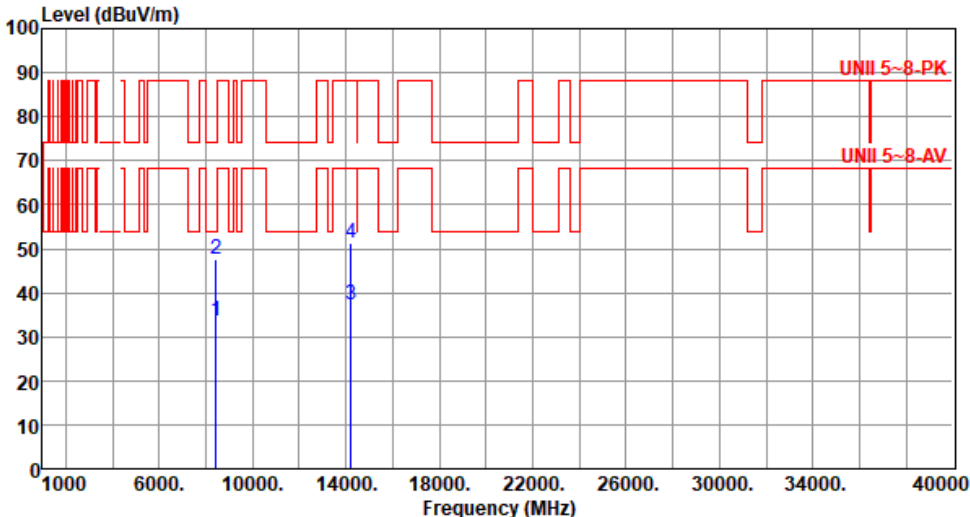

Modulation	be EHT20		Test Freq. (MHz)		7115																																																						
Polarization	Vertical																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8448.00</td><td>33.61</td><td>54.00</td><td>-20.39</td><td>27.47</td><td>6.14</td><td>Average</td><td>241</td><td>155</td></tr><tr><td>2</td><td>8448.00</td><td>47.51</td><td>74.00</td><td>-26.49</td><td>41.37</td><td>6.14</td><td>Peak</td><td>241</td><td>155</td></tr><tr><td>3</td><td>14230.00</td><td>37.42</td><td>68.20</td><td>-30.78</td><td>28.51</td><td>8.91</td><td>Average</td><td>122</td><td>139</td></tr><tr><td>4</td><td>14230.00</td><td>51.25</td><td>88.20</td><td>-36.95</td><td>42.34</td><td>8.91</td><td>Peak</td><td>122</td><td>139</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8448.00	33.61	54.00	-20.39	27.47	6.14	Average	241	155	2	8448.00	47.51	74.00	-26.49	41.37	6.14	Peak	241	155	3	14230.00	37.42	68.20	-30.78	28.51	8.91	Average	122	139	4	14230.00	51.25	88.20	-36.95	42.34	8.91	Peak	122	139
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	8448.00	33.61	54.00	-20.39	27.47	6.14	Average	241	155																																																		
2	8448.00	47.51	74.00	-26.49	41.37	6.14	Peak	241	155																																																		
3	14230.00	37.42	68.20	-30.78	28.51	8.91	Average	122	139																																																		
4	14230.00	51.25	88.20	-36.95	42.34	8.91	Peak	122	139																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																											



Unwanted Emissions (Above 1GHz) for be EHT40

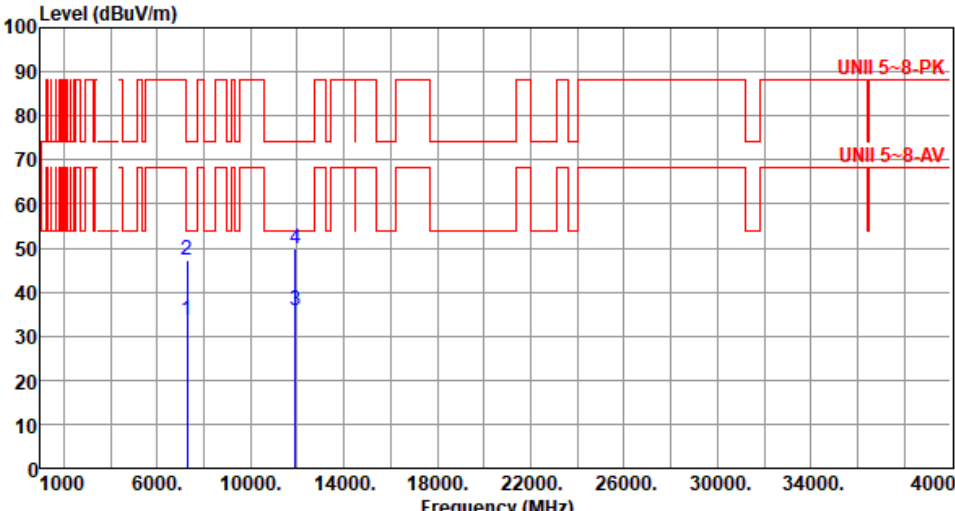Modulation	be EHT40	Test Freq. (MHz)	5965						
Polarization	Horizontal								
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	7298.00	33.54	54.00	-20.46	27.34	6.20	Average	133	344
2	7298.00	47.23	74.00	-26.77	41.03	6.20	Peak	133	344
3	11930.00	35.66	54.00	-18.34	27.51	8.15	Average	148	317
4	11930.00	49.70	74.00	-24.30	41.55	8.15	Peak	148	317

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5965
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) </			



Modulation	be EHT40		Test Freq. (MHz)		6165																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7498.00</td><td>33.53</td><td>54.00</td><td>-20.47</td><td>27.26</td><td>6.27</td><td>Average</td><td>111</td><td>347</td></tr><tr><td>2</td><td>7498.00</td><td>47.22</td><td>74.00</td><td>-26.78</td><td>40.95</td><td>6.27</td><td>Peak</td><td>111</td><td>347</td></tr><tr><td>3</td><td>12330.00</td><td>35.28</td><td>54.00</td><td>-18.72</td><td>27.55</td><td>7.73</td><td>Average</td><td>137</td><td>329</td></tr><tr><td>4</td><td>12330.00</td><td>49.16</td><td>74.00</td><td>-24.84</td><td>41.43</td><td>7.73</td><td>Peak</td><td>137</td><td>329</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7498.00	33.53	54.00	-20.47	27.26	6.27	Average	111	347	2	7498.00	47.22	74.00	-26.78	40.95	6.27	Peak	111	347	3	12330.00	35.28	54.00	-18.72	27.55	7.73	Average	137	329	4	12330.00	49.16	74.00	-24.84	41.43	7.73	Peak	137	329
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7498.00	33.53	54.00	-20.47	27.26	6.27	Average	111	347																																																		
2	7498.00	47.22	74.00	-26.78	40.95	6.27	Peak	111	347																																																		
3	12330.00	35.28	54.00	-18.72	27.55	7.73	Average	137	329																																																		
4	12330.00	49.16	74.00	-24.84	41.43	7.73	Peak	137	329																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											




Modulation	be EHT40		Test Freq. (MHz)		6165																																																						
Polarization	Vertical																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7498.00</td><td>33.75</td><td>54.00</td><td>-20.25</td><td>27.48</td><td>6.27</td><td>Average</td><td>122</td><td>148</td></tr><tr><td>2</td><td>7498.00</td><td>47.62</td><td>74.00</td><td>-26.38</td><td>41.35</td><td>6.27</td><td>Peak</td><td>122</td><td>148</td></tr><tr><td>3</td><td>12330.00</td><td>35.32</td><td>54.00</td><td>-18.68</td><td>27.59</td><td>7.73</td><td>Average</td><td>198</td><td>133</td></tr><tr><td>4</td><td>12330.00</td><td>49.17</td><td>74.00</td><td>-24.83</td><td>41.44</td><td>7.73</td><td>Peak</td><td>198</td><td>133</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7498.00	33.75	54.00	-20.25	27.48	6.27	Average	122	148	2	7498.00	47.62	74.00	-26.38	41.35	6.27	Peak	122	148	3	12330.00	35.32	54.00	-18.68	27.59	7.73	Average	198	133	4	12330.00	49.17	74.00	-24.83	41.44	7.73	Peak	198	133
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7498.00	33.75	54.00	-20.25	27.48	6.27	Average	122	148																																																		
2	7498.00	47.62	74.00	-26.38	41.35	6.27	Peak	122	148																																																		
3	12330.00	35.32	54.00	-18.68	27.59	7.73	Average	198	133																																																		
4	12330.00	49.17	74.00	-24.83	41.44	7.73	Peak	198	133																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																											



Modulation	be EHT40	Test Freq. (MHz)	6405						
Polarization	Horizontal								
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7738.00	33.66	54.00	-20.34	27.62	6.04	Average	116	349
2	7738.00	47.68	74.00	-26.32	41.64	6.04	Peak	116	349
3	12810.00	35.81	68.20	-32.39	27.72	8.09	Average	129	304
4	12810.00	49.75	88.20	-38.45	41.66	8.09	Peak	129	304
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

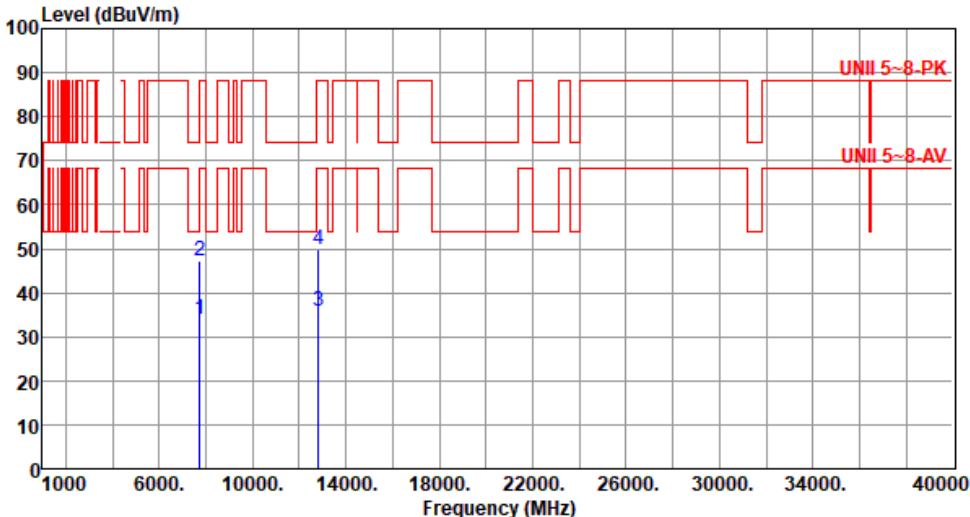

Modulation	be EHT40		Test Freq. (MHz)		6405																																																						
Polarization	Vertical																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7738.00</td><td>33.79</td><td>54.00</td><td>-20.21</td><td>27.75</td><td>6.04</td><td>Average</td><td>121</td><td>162</td></tr><tr><td>2</td><td>7738.00</td><td>47.41</td><td>74.00</td><td>-26.59</td><td>41.37</td><td>6.04</td><td>Peak</td><td>121</td><td>162</td></tr><tr><td>3</td><td>12810.00</td><td>35.87</td><td>68.20</td><td>-32.33</td><td>27.78</td><td>8.09</td><td>Average</td><td>261</td><td>136</td></tr><tr><td>4</td><td>12810.00</td><td>49.76</td><td>88.20</td><td>-38.44</td><td>41.67</td><td>8.09</td><td>Peak</td><td>261</td><td>136</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7738.00	33.79	54.00	-20.21	27.75	6.04	Average	121	162	2	7738.00	47.41	74.00	-26.59	41.37	6.04	Peak	121	162	3	12810.00	35.87	68.20	-32.33	27.78	8.09	Average	261	136	4	12810.00	49.76	88.20	-38.44	41.67	8.09	Peak	261	136
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7738.00	33.79	54.00	-20.21	27.75	6.04	Average	121	162																																																		
2	7738.00	47.41	74.00	-26.59	41.37	6.04	Peak	121	162																																																		
3	12810.00	35.87	68.20	-32.33	27.78	8.09	Average	261	136																																																		
4	12810.00	49.76	88.20	-38.44	41.67	8.09	Peak	261	136																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											



Modulation	be EHT40		Test Freq. (MHz)		6445																																																																										
Polarization	Horizontal																																																																														
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																																															
<table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7778.00</td><td>33.46</td><td>68.20</td><td>-34.74</td><td>27.41</td><td>6.05</td><td>Average</td><td>253</td><td>350</td></tr><tr><td>2</td><td>7778.00</td><td>47.32</td><td>88.20</td><td>-40.88</td><td>41.27</td><td>6.05</td><td>Peak</td><td>253</td><td>350</td></tr><tr><td>3</td><td>12890.00</td><td>35.67</td><td>68.20</td><td>-32.53</td><td>27.68</td><td>7.99</td><td>Average</td><td>163</td><td>309</td></tr><tr><td>4</td><td>12890.00</td><td>49.74</td><td>88.20</td><td>-38.46</td><td>41.75</td><td>7.99</td><td>Peak</td><td>163</td><td>309</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	7778.00	33.46	68.20	-34.74	27.41	6.05	Average	253	350	2	7778.00	47.32	88.20	-40.88	41.27	6.05	Peak	253	350	3	12890.00	35.67	68.20	-32.53	27.68	7.99	Average	163	309	4	12890.00	49.74	88.20	-38.46	41.75	7.99	Peak	163	309
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																						
		dBuV/m			dBuV			cm	deg																																																																						
1	7778.00	33.46	68.20	-34.74	27.41	6.05	Average	253	350																																																																						
2	7778.00	47.32	88.20	-40.88	41.27	6.05	Peak	253	350																																																																						
3	12890.00	35.67	68.20	-32.53	27.68	7.99	Average	163	309																																																																						
4	12890.00	49.74	88.20	-38.46	41.75	7.99	Peak	163	309																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															



Modulation	be EHT40	Test Freq. (MHz)	6445						
Polarization	Vertical								
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7778.00	33.53	68.20	-34.67	27.48	6.05	Average	223	166
2	7778.00	47.43	88.20	-40.77	41.38	6.05	Peak	223	166
3	12890.00	35.57	68.20	-32.63	27.58	7.99	Average	115	147
4	12890.00	49.76	88.20	-38.44	41.77	7.99	Peak	115	147
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Modulation	be EHT40		Test Freq. (MHz)		6485																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7818.00</td><td>33.51</td><td>68.20</td><td>-34.69</td><td>27.39</td><td>6.12</td><td>Average</td><td>112</td><td>332</td></tr><tr><td>2</td><td>7818.00</td><td>47.24</td><td>88.20</td><td>-40.96</td><td>41.12</td><td>6.12</td><td>Peak</td><td>112</td><td>332</td></tr><tr><td>3</td><td>12970.00</td><td>35.83</td><td>68.20</td><td>-32.37</td><td>27.80</td><td>8.03</td><td>Average</td><td>100</td><td>311</td></tr><tr><td>4</td><td>12970.00</td><td>49.48</td><td>88.20</td><td>-38.72</td><td>41.45</td><td>8.03</td><td>Peak</td><td>100</td><td>311</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7818.00	33.51	68.20	-34.69	27.39	6.12	Average	112	332	2	7818.00	47.24	88.20	-40.96	41.12	6.12	Peak	112	332	3	12970.00	35.83	68.20	-32.37	27.80	8.03	Average	100	311	4	12970.00	49.48	88.20	-38.72	41.45	8.03	Peak	100	311
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7818.00	33.51	68.20	-34.69	27.39	6.12	Average	112	332																																																		
2	7818.00	47.24	88.20	-40.96	41.12	6.12	Peak	112	332																																																		
3	12970.00	35.83	68.20	-32.37	27.80	8.03	Average	100	311																																																		
4	12970.00	49.48	88.20	-38.72	41.45	8.03	Peak	100	311																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											



Modulation	be EHT40	Test Freq. (MHz)	6485
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) </			

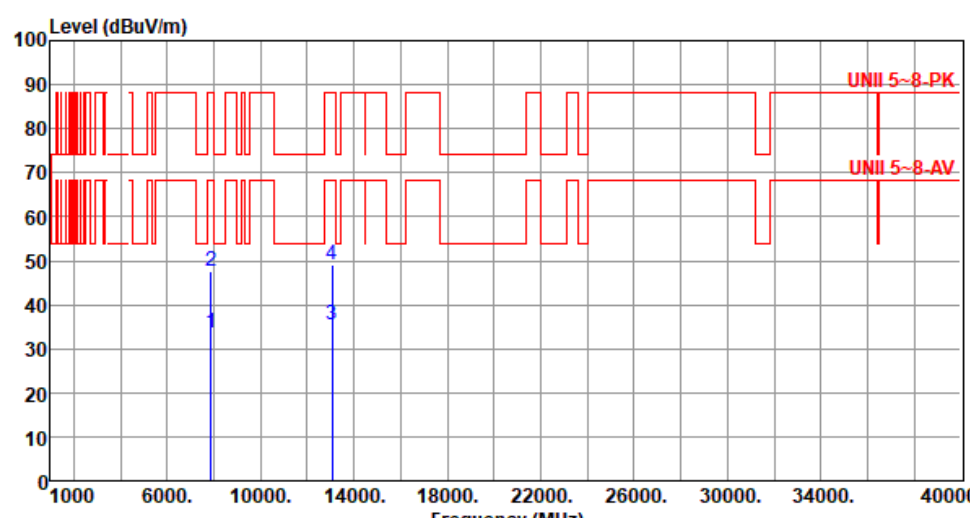


Modulation	be EHT40	Test Freq. (MHz)	6525																																																		
Polarization	Horizontal																																																				
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																					
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7858.00</td><td>33.41</td><td>68.20</td><td>-34.79</td><td>27.12</td><td>6.29</td><td>Average</td><td>125</td><td>336</td></tr><tr><td>2</td><td>7858.00</td><td>47.51</td><td>88.20</td><td>-40.69</td><td>41.22</td><td>6.29</td><td>Peak</td><td>125</td><td>336</td></tr><tr><td>3</td><td>13050.00</td><td>35.45</td><td>68.20</td><td>-32.75</td><td>27.67</td><td>7.78</td><td>Average</td><td>102</td><td>314</td></tr><tr><td>4</td><td>13050.00</td><td>49.12</td><td>88.20</td><td>-39.08</td><td>41.34</td><td>7.78</td><td>Peak</td><td>102</td><td>314</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7858.00	33.41	68.20	-34.79	27.12	6.29	Average	125	336	2	7858.00	47.51	88.20	-40.69	41.22	6.29	Peak	125	336	3	13050.00	35.45	68.20	-32.75	27.67	7.78	Average	102	314	4	13050.00	49.12	88.20	-39.08	41.34	7.78	Peak	102	314
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	7858.00	33.41	68.20	-34.79	27.12	6.29	Average	125	336																																												
2	7858.00	47.51	88.20	-40.69	41.22	6.29	Peak	125	336																																												
3	13050.00	35.45	68.20	-32.75	27.67	7.78	Average	102	314																																												
4	13050.00	49.12	88.20	-39.08	41.34	7.78	Peak	102	314																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					




Modulation	be EHT40		Test Freq. (MHz)		6525																																																						
Polarization	Vertical																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7858.00</td><td>33.70</td><td>68.20</td><td>-34.50</td><td>27.41</td><td>6.29</td><td>Average</td><td>239</td><td>166</td></tr><tr><td>2</td><td>7858.00</td><td>47.58</td><td>88.20</td><td>-40.62</td><td>41.29</td><td>6.29</td><td>Peak</td><td>239</td><td>166</td></tr><tr><td>3</td><td>13050.00</td><td>35.52</td><td>68.20</td><td>-32.68</td><td>27.74</td><td>7.78</td><td>Average</td><td>167</td><td>145</td></tr><tr><td>4</td><td>13050.00</td><td>49.41</td><td>88.20</td><td>-38.79</td><td>41.63</td><td>7.78</td><td>Peak</td><td>167</td><td>145</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7858.00	33.70	68.20	-34.50	27.41	6.29	Average	239	166	2	7858.00	47.58	88.20	-40.62	41.29	6.29	Peak	239	166	3	13050.00	35.52	68.20	-32.68	27.74	7.78	Average	167	145	4	13050.00	49.41	88.20	-38.79	41.63	7.78	Peak	167	145
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7858.00	33.70	68.20	-34.50	27.41	6.29	Average	239	166																																																		
2	7858.00	47.58	88.20	-40.62	41.29	6.29	Peak	239	166																																																		
3	13050.00	35.52	68.20	-32.68	27.74	7.78	Average	167	145																																																		
4	13050.00	49.41	88.20	-38.79	41.63	7.78	Peak	167	145																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											

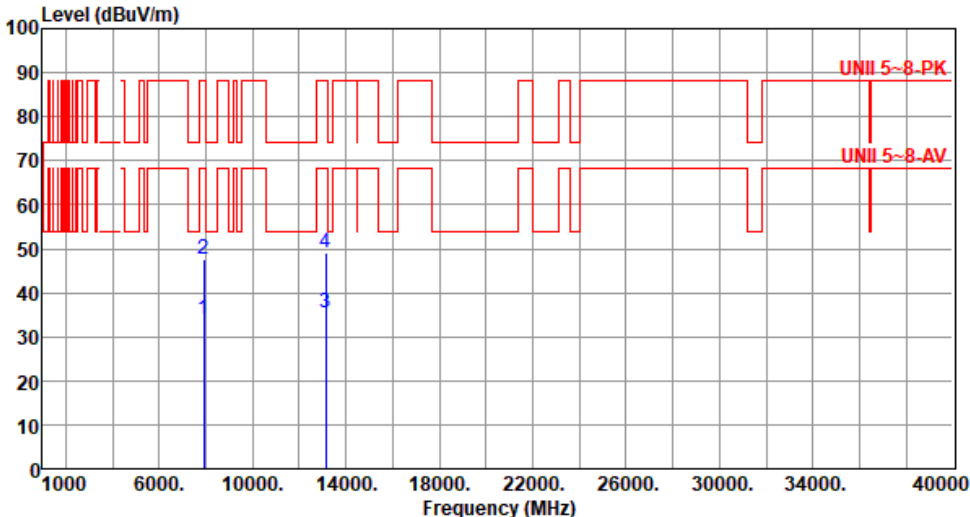


Modulation	be EHT40		Test Freq. (MHz)		6565																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7898.00</td><td>33.79</td><td>68.20</td><td>-34.41</td><td>27.33</td><td>6.46</td><td>Average</td><td>109</td><td>343</td></tr><tr><td>2</td><td>7898.00</td><td>47.52</td><td>88.20</td><td>-40.68</td><td>41.06</td><td>6.46</td><td>Peak</td><td>109</td><td>343</td></tr><tr><td>3</td><td>13130.00</td><td>35.52</td><td>68.20</td><td>-32.68</td><td>27.71</td><td>7.81</td><td>Average</td><td>104</td><td>323</td></tr><tr><td>4</td><td>13130.00</td><td>49.19</td><td>88.20</td><td>-39.01</td><td>41.38</td><td>7.81</td><td>Peak</td><td>104</td><td>323</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7898.00	33.79	68.20	-34.41	27.33	6.46	Average	109	343	2	7898.00	47.52	88.20	-40.68	41.06	6.46	Peak	109	343	3	13130.00	35.52	68.20	-32.68	27.71	7.81	Average	104	323	4	13130.00	49.19	88.20	-39.01	41.38	7.81	Peak	104	323
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7898.00	33.79	68.20	-34.41	27.33	6.46	Average	109	343																																																		
2	7898.00	47.52	88.20	-40.68	41.06	6.46	Peak	109	343																																																		
3	13130.00	35.52	68.20	-32.68	27.71	7.81	Average	104	323																																																		
4	13130.00	49.19	88.20	-39.01	41.38	7.81	Peak	104	323																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											

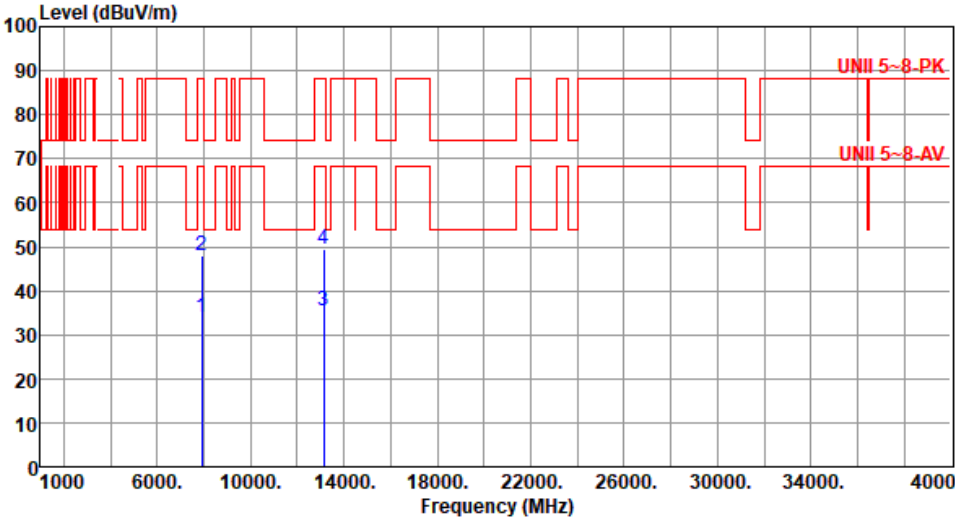

Modulation	be EHT40		Test Freq. (MHz)		6565																																																						
Polarization	Vertical																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7898.00</td><td>33.99</td><td>68.20</td><td>-34.21</td><td>27.53</td><td>6.46</td><td>Average</td><td>242</td><td>160</td></tr><tr><td>2</td><td>7898.00</td><td>47.83</td><td>88.20</td><td>-40.37</td><td>41.37</td><td>6.46</td><td>Peak</td><td>242</td><td>160</td></tr><tr><td>3</td><td>13130.00</td><td>35.54</td><td>68.20</td><td>-32.66</td><td>27.73</td><td>7.81</td><td>Average</td><td>171</td><td>131</td></tr><tr><td>4</td><td>13130.00</td><td>49.46</td><td>88.20</td><td>-38.74</td><td>41.65</td><td>7.81</td><td>Peak</td><td>171</td><td>131</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7898.00	33.99	68.20	-34.21	27.53	6.46	Average	242	160	2	7898.00	47.83	88.20	-40.37	41.37	6.46	Peak	242	160	3	13130.00	35.54	68.20	-32.66	27.73	7.81	Average	171	131	4	13130.00	49.46	88.20	-38.74	41.65	7.81	Peak	171	131
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7898.00	33.99	68.20	-34.21	27.53	6.46	Average	242	160																																																		
2	7898.00	47.83	88.20	-40.37	41.37	6.46	Peak	242	160																																																		
3	13130.00	35.54	68.20	-32.66	27.73	7.81	Average	171	131																																																		
4	13130.00	49.46	88.20	-38.74	41.65	7.81	Peak	171	131																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											

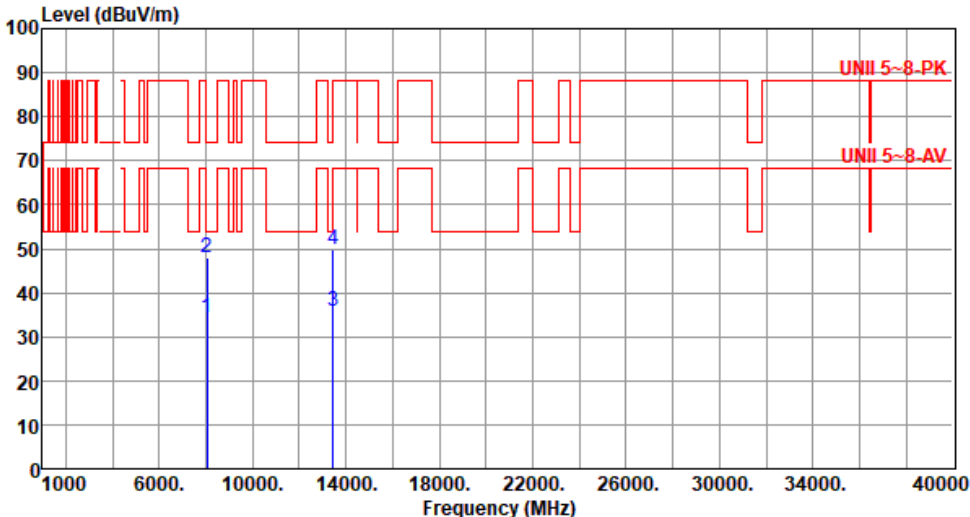

Modulation	be EHT40		Test Freq. (MHz)		6725																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8058.00</td><td>34.40</td><td>54.00</td><td>-19.60</td><td>27.41</td><td>6.99</td><td>Average</td><td>109</td><td>330</td></tr><tr><td>2</td><td>8058.00</td><td>48.08</td><td>74.00</td><td>-25.92</td><td>41.09</td><td>6.99</td><td>Peak</td><td>109</td><td>330</td></tr><tr><td>3</td><td>13450.00</td><td>35.91</td><td>68.20</td><td>-32.29</td><td>27.66</td><td>8.25</td><td>Average</td><td>107</td><td>311</td></tr><tr><td>4</td><td>13450.00</td><td>49.66</td><td>88.20</td><td>-38.54</td><td>41.41</td><td>8.25</td><td>Peak</td><td>107</td><td>311</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8058.00	34.40	54.00	-19.60	27.41	6.99	Average	109	330	2	8058.00	48.08	74.00	-25.92	41.09	6.99	Peak	109	330	3	13450.00	35.91	68.20	-32.29	27.66	8.25	Average	107	311	4	13450.00	49.66	88.20	-38.54	41.41	8.25	Peak	107	311
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	8058.00	34.40	54.00	-19.60	27.41	6.99	Average	109	330																																																		
2	8058.00	48.08	74.00	-25.92	41.09	6.99	Peak	109	330																																																		
3	13450.00	35.91	68.20	-32.29	27.66	8.25	Average	107	311																																																		
4	13450.00	49.66	88.20	-38.54	41.41	8.25	Peak	107	311																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											




Modulation	be EHT40	Test Freq. (MHz)	6725
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) </			



Modulation	be EHT40	Test Freq. (MHz)	6845
Polarization	Horizontal		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m)			

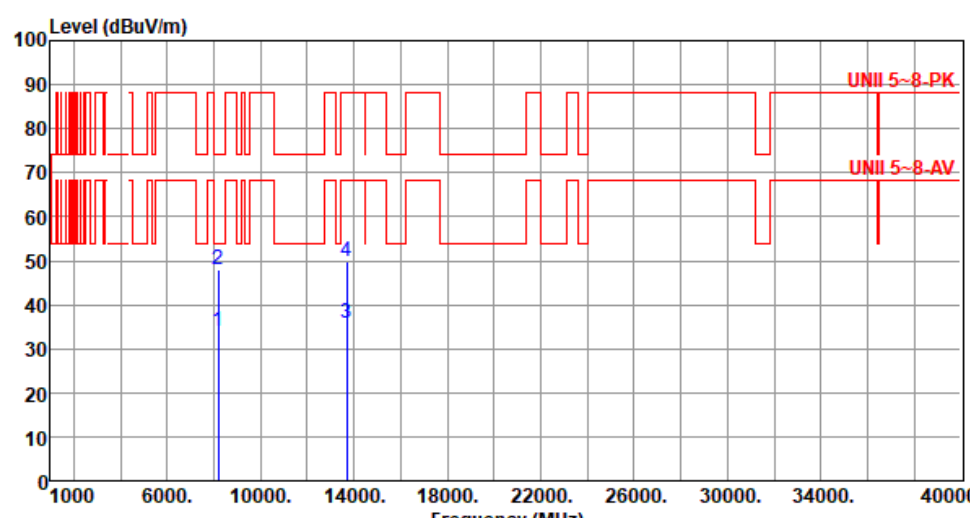

Modulation	be EHT40	Test Freq. (MHz)	6845																																																		
Polarization	Vertical																																																				
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																					
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8178.00</td><td>34.02</td><td>54.00</td><td>-19.98</td><td>27.39</td><td>6.63</td><td>Average</td><td>247</td><td>169</td></tr><tr><td>2</td><td>8178.00</td><td>47.91</td><td>74.00</td><td>-26.09</td><td>41.28</td><td>6.63</td><td>Peak</td><td>247</td><td>169</td></tr><tr><td>3</td><td>13690.00</td><td>35.80</td><td>68.20</td><td>-32.40</td><td>27.66</td><td>8.14</td><td>Average</td><td>166</td><td>155</td></tr><tr><td>4</td><td>13690.00</td><td>49.76</td><td>88.20</td><td>-38.44</td><td>41.62</td><td>8.14</td><td>Peak</td><td>166</td><td>155</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8178.00	34.02	54.00	-19.98	27.39	6.63	Average	247	169	2	8178.00	47.91	74.00	-26.09	41.28	6.63	Peak	247	169	3	13690.00	35.80	68.20	-32.40	27.66	8.14	Average	166	155	4	13690.00	49.76	88.20	-38.44	41.62	8.14	Peak	166	155
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8178.00	34.02	54.00	-19.98	27.39	6.63	Average	247	169																																												
2	8178.00	47.91	74.00	-26.09	41.28	6.63	Peak	247	169																																												
3	13690.00	35.80	68.20	-32.40	27.66	8.14	Average	166	155																																												
4	13690.00	49.76	88.20	-38.44	41.62	8.14	Peak	166	155																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					




Modulation	be EHT40	Test Freq. (MHz)	6885
Polarization	Horizontal		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBUV/m)			



Modulation	be EHT40	Test Freq. (MHz)	6885
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) </			

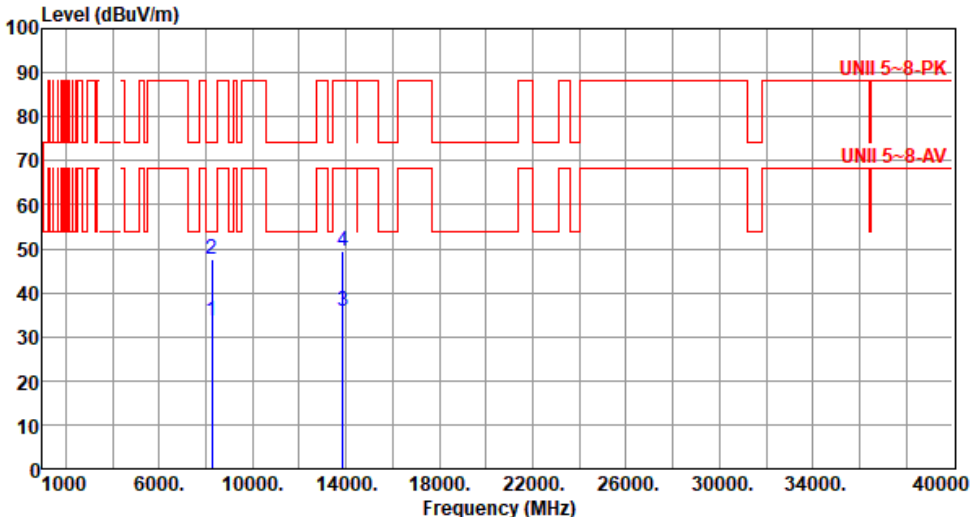

Modulation	be EHT40		Test Freq. (MHz)		6925																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8258.00</td><td>33.66</td><td>54.00</td><td>-20.34</td><td>27.24</td><td>6.42</td><td>Average</td><td>107</td><td>338</td></tr><tr><td>2</td><td>8258.00</td><td>47.44</td><td>74.00</td><td>-26.56</td><td>41.02</td><td>6.42</td><td>Peak</td><td>107</td><td>338</td></tr><tr><td>3</td><td>13850.00</td><td>35.73</td><td>68.20</td><td>-32.47</td><td>27.62</td><td>8.11</td><td>Average</td><td>102</td><td>305</td></tr><tr><td>4</td><td>13850.00</td><td>49.40</td><td>88.20</td><td>-38.80</td><td>41.29</td><td>8.11</td><td>Peak</td><td>102</td><td>305</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8258.00	33.66	54.00	-20.34	27.24	6.42	Average	107	338	2	8258.00	47.44	74.00	-26.56	41.02	6.42	Peak	107	338	3	13850.00	35.73	68.20	-32.47	27.62	8.11	Average	102	305	4	13850.00	49.40	88.20	-38.80	41.29	8.11	Peak	102	305
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	8258.00	33.66	54.00	-20.34	27.24	6.42	Average	107	338																																																		
2	8258.00	47.44	74.00	-26.56	41.02	6.42	Peak	107	338																																																		
3	13850.00	35.73	68.20	-32.47	27.62	8.11	Average	102	305																																																		
4	13850.00	49.40	88.20	-38.80	41.29	8.11	Peak	102	305																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											



Modulation	be EHT40		Test Freq. (MHz)		6925																																																						
Polarization	Vertical																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8258.00</td><td>33.89</td><td>54.00</td><td>-20.11</td><td>27.47</td><td>6.42</td><td>Average</td><td>245</td><td>148</td></tr><tr><td>2</td><td>8258.00</td><td>47.74</td><td>74.00</td><td>-26.26</td><td>41.32</td><td>6.42</td><td>Peak</td><td>245</td><td>148</td></tr><tr><td>3</td><td>13850.00</td><td>35.69</td><td>68.20</td><td>-32.51</td><td>27.58</td><td>8.11</td><td>Average</td><td>174</td><td>131</td></tr><tr><td>4</td><td>13850.00</td><td>49.67</td><td>88.20</td><td>-38.53</td><td>41.56</td><td>8.11</td><td>Peak</td><td>174</td><td>131</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8258.00	33.89	54.00	-20.11	27.47	6.42	Average	245	148	2	8258.00	47.74	74.00	-26.26	41.32	6.42	Peak	245	148	3	13850.00	35.69	68.20	-32.51	27.58	8.11	Average	174	131	4	13850.00	49.67	88.20	-38.53	41.56	8.11	Peak	174	131
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	8258.00	33.89	54.00	-20.11	27.47	6.42	Average	245	148																																																		
2	8258.00	47.74	74.00	-26.26	41.32	6.42	Peak	245	148																																																		
3	13850.00	35.69	68.20	-32.51	27.58	8.11	Average	174	131																																																		
4	13850.00	49.67	88.20	-38.53	41.56	8.11	Peak	174	131																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											



Modulation	be EHT40		Test Freq. (MHz)		7005																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8338.00</td><td>33.69</td><td>54.00</td><td>-20.31</td><td>27.44</td><td>6.25</td><td>Average</td><td>114</td><td>348</td></tr><tr><td>2</td><td>8338.00</td><td>47.47</td><td>74.00</td><td>-26.53</td><td>41.22</td><td>6.25</td><td>Peak</td><td>114</td><td>348</td></tr><tr><td>3</td><td>14010.00</td><td>36.31</td><td>68.20</td><td>-31.89</td><td>27.85</td><td>8.46</td><td>Average</td><td>109</td><td>339</td></tr><tr><td>4</td><td>14010.00</td><td>50.04</td><td>88.20</td><td>-38.16</td><td>41.58</td><td>8.46</td><td>Peak</td><td>109</td><td>339</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8338.00	33.69	54.00	-20.31	27.44	6.25	Average	114	348	2	8338.00	47.47	74.00	-26.53	41.22	6.25	Peak	114	348	3	14010.00	36.31	68.20	-31.89	27.85	8.46	Average	109	339	4	14010.00	50.04	88.20	-38.16	41.58	8.46	Peak	109	339
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	8338.00	33.69	54.00	-20.31	27.44	6.25	Average	114	348																																																		
2	8338.00	47.47	74.00	-26.53	41.22	6.25	Peak	114	348																																																		
3	14010.00	36.31	68.20	-31.89	27.85	8.46	Average	109	339																																																		
4	14010.00	50.04	88.20	-38.16	41.58	8.46	Peak	109	339																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											



Modulation	be EHT40	Test Freq. (MHz)	7005
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) </			



Modulation	be EHT40		Test Freq. (MHz)		7085																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8418.00</td><td>33.69</td><td>54.00</td><td>-20.31</td><td>27.50</td><td>6.19</td><td>Average</td><td>110</td><td>335</td></tr><tr><td>2</td><td>8418.00</td><td>47.44</td><td>74.00</td><td>-26.56</td><td>41.25</td><td>6.19</td><td>Peak</td><td>110</td><td>335</td></tr><tr><td>3</td><td>14170.00</td><td>36.80</td><td>68.20</td><td>-31.40</td><td>27.88</td><td>8.92</td><td>Average</td><td>108</td><td>327</td></tr><tr><td>4</td><td>14170.00</td><td>50.47</td><td>88.20</td><td>-37.73</td><td>41.55</td><td>8.92</td><td>Peak</td><td>108</td><td>327</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8418.00	33.69	54.00	-20.31	27.50	6.19	Average	110	335	2	8418.00	47.44	74.00	-26.56	41.25	6.19	Peak	110	335	3	14170.00	36.80	68.20	-31.40	27.88	8.92	Average	108	327	4	14170.00	50.47	88.20	-37.73	41.55	8.92	Peak	108	327
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	8418.00	33.69	54.00	-20.31	27.50	6.19	Average	110	335																																																		
2	8418.00	47.44	74.00	-26.56	41.25	6.19	Peak	110	335																																																		
3	14170.00	36.80	68.20	-31.40	27.88	8.92	Average	108	327																																																		
4	14170.00	50.47	88.20	-37.73	41.55	8.92	Peak	108	327																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																											



Modulation	be EHT40		Test Freq. (MHz)		7085																																																						
Polarization	Vertical																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8418.00</td><td>33.81</td><td>54.00</td><td>-20.19</td><td>27.62</td><td>6.19</td><td>Average</td><td>249</td><td>170</td></tr><tr><td>2</td><td>8418.00</td><td>47.66</td><td>74.00</td><td>-26.34</td><td>41.47</td><td>6.19</td><td>Peak</td><td>249</td><td>170</td></tr><tr><td>3</td><td>14170.00</td><td>36.83</td><td>68.20</td><td>-31.37</td><td>27.91</td><td>8.92</td><td>Average</td><td>173</td><td>134</td></tr><tr><td>4</td><td>14170.00</td><td>50.76</td><td>88.20</td><td>-37.44</td><td>41.84</td><td>8.92</td><td>Peak</td><td>173</td><td>134</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8418.00	33.81	54.00	-20.19	27.62	6.19	Average	249	170	2	8418.00	47.66	74.00	-26.34	41.47	6.19	Peak	249	170	3	14170.00	36.83	68.20	-31.37	27.91	8.92	Average	173	134	4	14170.00	50.76	88.20	-37.44	41.84	8.92	Peak	173	134
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	8418.00	33.81	54.00	-20.19	27.62	6.19	Average	249	170																																																		
2	8418.00	47.66	74.00	-26.34	41.47	6.19	Peak	249	170																																																		
3	14170.00	36.83	68.20	-31.37	27.91	8.92	Average	173	134																																																		
4	14170.00	50.76	88.20	-37.44	41.84	8.92	Peak	173	134																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																											

Unwanted Emissions (Above 1GHz) for be EHT80

Modulation	be EHT80	Test Freq. (MHz)	5985
Polarization	Horizontal		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) </			



Modulation	be EHT80		Test Freq. (MHz)		5985																																																						
Polarization	Vertical																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7318.00</td><td>33.62</td><td>54.00</td><td>-20.38</td><td>27.41</td><td>6.21</td><td>Average</td><td>235</td><td>161</td></tr><tr><td>2</td><td>7318.00</td><td>47.42</td><td>74.00</td><td>-26.58</td><td>41.21</td><td>6.21</td><td>Peak</td><td>235</td><td>161</td></tr><tr><td>3</td><td>11970.00</td><td>35.70</td><td>54.00</td><td>-18.30</td><td>27.52</td><td>8.18</td><td>Average</td><td>174</td><td>148</td></tr><tr><td>4</td><td>11970.00</td><td>49.74</td><td>74.00</td><td>-24.26</td><td>41.56</td><td>8.18</td><td>Peak</td><td>174</td><td>148</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7318.00	33.62	54.00	-20.38	27.41	6.21	Average	235	161	2	7318.00	47.42	74.00	-26.58	41.21	6.21	Peak	235	161	3	11970.00	35.70	54.00	-18.30	27.52	8.18	Average	174	148	4	11970.00	49.74	74.00	-24.26	41.56	8.18	Peak	174	148
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7318.00	33.62	54.00	-20.38	27.41	6.21	Average	235	161																																																		
2	7318.00	47.42	74.00	-26.58	41.21	6.21	Peak	235	161																																																		
3	11970.00	35.70	54.00	-18.30	27.52	8.18	Average	174	148																																																		
4	11970.00	49.74	74.00	-24.26	41.56	8.18	Peak	174	148																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											



Modulation	be EHT80		Test Freq. (MHz)		6145																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7478.00</td><td>33.62</td><td>54.00</td><td>-20.38</td><td>27.39</td><td>6.23</td><td>Average</td><td>115</td><td>349</td></tr><tr><td>2</td><td>7478.00</td><td>47.34</td><td>74.00</td><td>-26.66</td><td>41.11</td><td>6.23</td><td>Peak</td><td>115</td><td>349</td></tr><tr><td>3</td><td>12290.00</td><td>35.68</td><td>54.00</td><td>-18.32</td><td>27.77</td><td>7.91</td><td>Average</td><td>110</td><td>338</td></tr><tr><td>4</td><td>12290.00</td><td>49.36</td><td>74.00</td><td>-24.64</td><td>41.45</td><td>7.91</td><td>Peak</td><td>110</td><td>338</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7478.00	33.62	54.00	-20.38	27.39	6.23	Average	115	349	2	7478.00	47.34	74.00	-26.66	41.11	6.23	Peak	115	349	3	12290.00	35.68	54.00	-18.32	27.77	7.91	Average	110	338	4	12290.00	49.36	74.00	-24.64	41.45	7.91	Peak	110	338
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7478.00	33.62	54.00	-20.38	27.39	6.23	Average	115	349																																																		
2	7478.00	47.34	74.00	-26.66	41.11	6.23	Peak	115	349																																																		
3	12290.00	35.68	54.00	-18.32	27.77	7.91	Average	110	338																																																		
4	12290.00	49.36	74.00	-24.64	41.45	7.91	Peak	110	338																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											



Modulation	be EHT80	Test Freq. (MHz)	6145																																																		
Polarization	Vertical																																																				
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																					
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7478.00</td><td>33.83</td><td>54.00</td><td>-20.17</td><td>27.60</td><td>6.23</td><td>Average</td><td>241</td><td>160</td></tr><tr><td>2</td><td>7478.00</td><td>47.63</td><td>74.00</td><td>-26.37</td><td>41.40</td><td>6.23</td><td>Peak</td><td>241</td><td>160</td></tr><tr><td>3</td><td>12290.00</td><td>35.70</td><td>54.00</td><td>-18.30</td><td>27.79</td><td>7.91</td><td>Average</td><td>176</td><td>148</td></tr><tr><td>4</td><td>12290.00</td><td>49.62</td><td>74.00</td><td>-24.38</td><td>41.71</td><td>7.91</td><td>Peak</td><td>176</td><td>148</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7478.00	33.83	54.00	-20.17	27.60	6.23	Average	241	160	2	7478.00	47.63	74.00	-26.37	41.40	6.23	Peak	241	160	3	12290.00	35.70	54.00	-18.30	27.79	7.91	Average	176	148	4	12290.00	49.62	74.00	-24.38	41.71	7.91	Peak	176	148
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	7478.00	33.83	54.00	-20.17	27.60	6.23	Average	241	160																																												
2	7478.00	47.63	74.00	-26.37	41.40	6.23	Peak	241	160																																												
3	12290.00	35.70	54.00	-18.30	27.79	7.91	Average	176	148																																												
4	12290.00	49.62	74.00	-24.38	41.71	7.91	Peak	176	148																																												



Modulation	be EHT80	Test Freq. (MHz)	6385																																																		
Polarization	Horizontal																																																				
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																					
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7718.00</td><td>33.39</td><td>54.00</td><td>-20.61</td><td>27.35</td><td>6.04</td><td>Average</td><td>118</td><td>342</td></tr><tr><td>2</td><td>7718.00</td><td>47.13</td><td>74.00</td><td>-26.87</td><td>41.09</td><td>6.04</td><td>Peak</td><td>118</td><td>342</td></tr><tr><td>3</td><td>12770.00</td><td>35.60</td><td>68.20</td><td>-32.60</td><td>27.68</td><td>7.92</td><td>Average</td><td>113</td><td>338</td></tr><tr><td>4</td><td>12770.00</td><td>49.25</td><td>88.20</td><td>-38.95</td><td>41.33</td><td>7.92</td><td>Peak</td><td>113</td><td>338</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7718.00	33.39	54.00	-20.61	27.35	6.04	Average	118	342	2	7718.00	47.13	74.00	-26.87	41.09	6.04	Peak	118	342	3	12770.00	35.60	68.20	-32.60	27.68	7.92	Average	113	338	4	12770.00	49.25	88.20	-38.95	41.33	7.92	Peak	113	338
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	7718.00	33.39	54.00	-20.61	27.35	6.04	Average	118	342																																												
2	7718.00	47.13	74.00	-26.87	41.09	6.04	Peak	118	342																																												
3	12770.00	35.60	68.20	-32.60	27.68	7.92	Average	113	338																																												
4	12770.00	49.25	88.20	-38.95	41.33	7.92	Peak	113	338																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT80	Test Freq. (MHz)	6385																																																		
Polarization	Vertical																																																				
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																					
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7718.00</td><td>33.66</td><td>54.00</td><td>-20.34</td><td>27.62</td><td>6.04</td><td>Average</td><td>240</td><td>168</td></tr><tr><td>2</td><td>7718.00</td><td>47.32</td><td>74.00</td><td>-26.68</td><td>41.28</td><td>6.04</td><td>Peak</td><td>240</td><td>168</td></tr><tr><td>3</td><td>12770.00</td><td>35.73</td><td>68.20</td><td>-32.47</td><td>27.81</td><td>7.92</td><td>Average</td><td>173</td><td>159</td></tr><tr><td>4</td><td>12770.00</td><td>49.67</td><td>88.20</td><td>-38.53</td><td>41.75</td><td>7.92</td><td>Peak</td><td>173</td><td>159</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7718.00	33.66	54.00	-20.34	27.62	6.04	Average	240	168	2	7718.00	47.32	74.00	-26.68	41.28	6.04	Peak	240	168	3	12770.00	35.73	68.20	-32.47	27.81	7.92	Average	173	159	4	12770.00	49.67	88.20	-38.53	41.75	7.92	Peak	173	159
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	7718.00	33.66	54.00	-20.34	27.62	6.04	Average	240	168																																												
2	7718.00	47.32	74.00	-26.68	41.28	6.04	Peak	240	168																																												
3	12770.00	35.73	68.20	-32.47	27.81	7.92	Average	173	159																																												
4	12770.00	49.67	88.20	-38.53	41.75	7.92	Peak	173	159																																												




Modulation	be EHT80	Test Freq. (MHz)	6465																																																		
Polarization	Horizontal																																																				
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7798.00</td><td>33.47</td><td>68.20</td><td>-34.73</td><td>27.42</td><td>6.05</td><td>Average</td><td>101</td><td>326</td></tr><tr><td>2</td><td>7798.00</td><td>47.14</td><td>88.20</td><td>-41.06</td><td>41.09</td><td>6.05</td><td>Peak</td><td>101</td><td>326</td></tr><tr><td>3</td><td>12930.00</td><td>35.79</td><td>68.20</td><td>-32.41</td><td>27.78</td><td>8.01</td><td>Average</td><td>111</td><td>311</td></tr><tr><td>4</td><td>12930.00</td><td>49.45</td><td>88.20</td><td>-38.75</td><td>41.44</td><td>8.01</td><td>Peak</td><td>111</td><td>311</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7798.00	33.47	68.20	-34.73	27.42	6.05	Average	101	326	2	7798.00	47.14	88.20	-41.06	41.09	6.05	Peak	101	326	3	12930.00	35.79	68.20	-32.41	27.78	8.01	Average	111	311	4	12930.00	49.45	88.20	-38.75	41.44	8.01	Peak	111	311
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	7798.00	33.47	68.20	-34.73	27.42	6.05	Average	101	326																																												
2	7798.00	47.14	88.20	-41.06	41.09	6.05	Peak	101	326																																												
3	12930.00	35.79	68.20	-32.41	27.78	8.01	Average	111	311																																												
4	12930.00	49.45	88.20	-38.75	41.44	8.01	Peak	111	311																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT80		Test Freq. (MHz)		6465																																																						
Polarization	Vertical																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7798.00</td><td>33.69</td><td>68.20</td><td>-34.51</td><td>27.64</td><td>6.05</td><td>Average</td><td>248</td><td>149</td></tr><tr><td>2</td><td>7798.00</td><td>47.51</td><td>88.20</td><td>-40.69</td><td>41.46</td><td>6.05</td><td>Peak</td><td>248</td><td>149</td></tr><tr><td>3</td><td>12930.00</td><td>35.82</td><td>68.20</td><td>-32.38</td><td>27.81</td><td>8.01</td><td>Average</td><td>176</td><td>135</td></tr><tr><td>4</td><td>12930.00</td><td>49.74</td><td>88.20</td><td>-38.46</td><td>41.73</td><td>8.01</td><td>Peak</td><td>176</td><td>135</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7798.00	33.69	68.20	-34.51	27.64	6.05	Average	248	149	2	7798.00	47.51	88.20	-40.69	41.46	6.05	Peak	248	149	3	12930.00	35.82	68.20	-32.38	27.81	8.01	Average	176	135	4	12930.00	49.74	88.20	-38.46	41.73	8.01	Peak	176	135
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7798.00	33.69	68.20	-34.51	27.64	6.05	Average	248	149																																																		
2	7798.00	47.51	88.20	-40.69	41.46	6.05	Peak	248	149																																																		
3	12930.00	35.82	68.20	-32.38	27.81	8.01	Average	176	135																																																		
4	12930.00	49.74	88.20	-38.46	41.73	8.01	Peak	176	135																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											

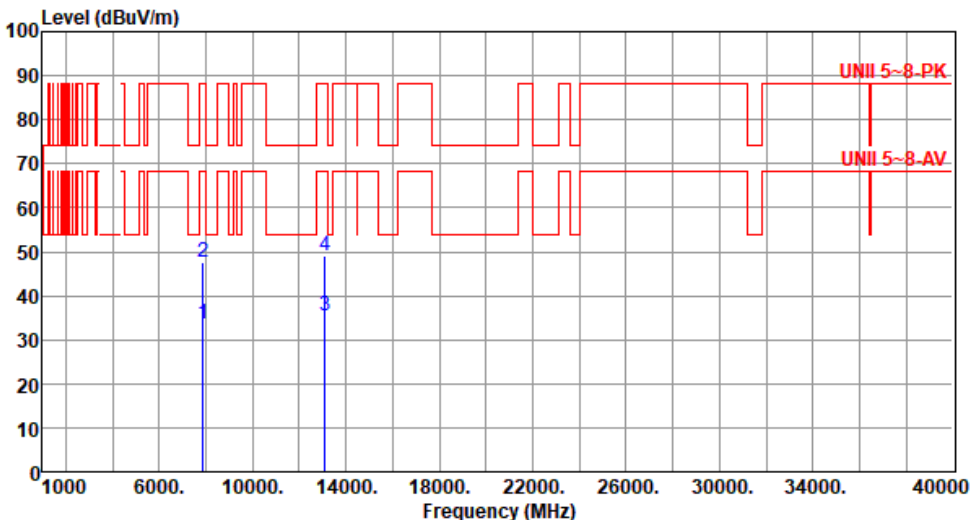


Modulation	be EHT80		Test Freq. (MHz)		6545																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7878.00</td><td>33.74</td><td>68.20</td><td>-34.46</td><td>27.37</td><td>6.37</td><td>Average</td><td>108</td><td>345</td></tr><tr><td>2</td><td>7878.00</td><td>47.46</td><td>88.20</td><td>-40.74</td><td>41.09</td><td>6.37</td><td>Peak</td><td>108</td><td>345</td></tr><tr><td>3</td><td>13090.00</td><td>35.46</td><td>68.20</td><td>-32.74</td><td>27.73</td><td>7.73</td><td>Average</td><td>105</td><td>322</td></tr><tr><td>4</td><td>13090.00</td><td>49.14</td><td>88.20</td><td>-39.06</td><td>41.41</td><td>7.73</td><td>Peak</td><td>105</td><td>322</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7878.00	33.74	68.20	-34.46	27.37	6.37	Average	108	345	2	7878.00	47.46	88.20	-40.74	41.09	6.37	Peak	108	345	3	13090.00	35.46	68.20	-32.74	27.73	7.73	Average	105	322	4	13090.00	49.14	88.20	-39.06	41.41	7.73	Peak	105	322
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7878.00	33.74	68.20	-34.46	27.37	6.37	Average	108	345																																																		
2	7878.00	47.46	88.20	-40.74	41.09	6.37	Peak	108	345																																																		
3	13090.00	35.46	68.20	-32.74	27.73	7.73	Average	105	322																																																		
4	13090.00	49.14	88.20	-39.06	41.41	7.73	Peak	105	322																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											



Modulation	be EHT80	Test Freq. (MHz)	6545
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) </			

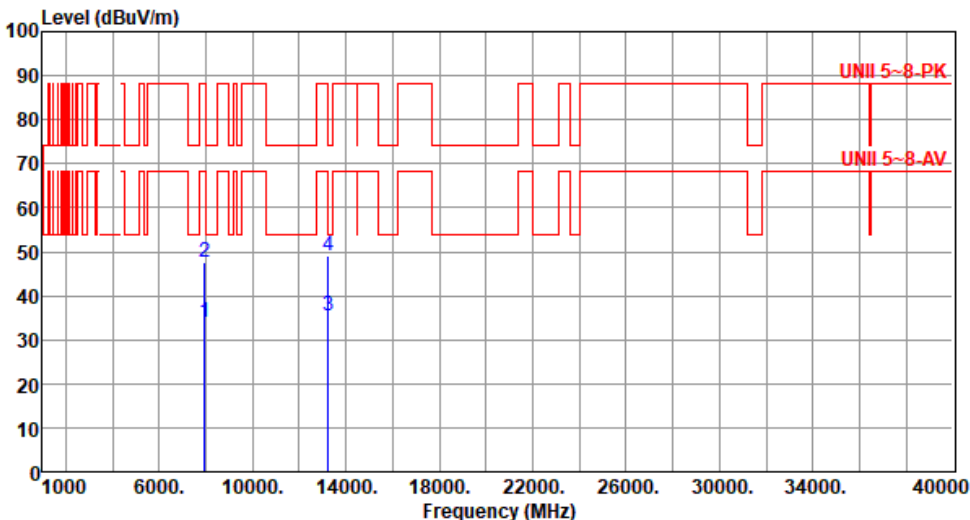

Modulation	be EHT80		Test Freq. (MHz)		6625																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7958.00</td><td>34.00</td><td>68.20</td><td>-34.20</td><td>27.29</td><td>6.71</td><td>Average</td><td>106</td><td>344</td></tr><tr><td>2</td><td>7958.00</td><td>47.75</td><td>88.20</td><td>-40.45</td><td>41.04</td><td>6.71</td><td>Peak</td><td>106</td><td>344</td></tr><tr><td>3</td><td>13250.00</td><td>35.49</td><td>54.00</td><td>-18.51</td><td>27.73</td><td>7.76</td><td>Average</td><td>101</td><td>316</td></tr><tr><td>4</td><td>13250.00</td><td>49.12</td><td>74.00</td><td>-24.88</td><td>41.36</td><td>7.76</td><td>Peak</td><td>101</td><td>316</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7958.00	34.00	68.20	-34.20	27.29	6.71	Average	106	344	2	7958.00	47.75	88.20	-40.45	41.04	6.71	Peak	106	344	3	13250.00	35.49	54.00	-18.51	27.73	7.76	Average	101	316	4	13250.00	49.12	74.00	-24.88	41.36	7.76	Peak	101	316
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7958.00	34.00	68.20	-34.20	27.29	6.71	Average	106	344																																																		
2	7958.00	47.75	88.20	-40.45	41.04	6.71	Peak	106	344																																																		
3	13250.00	35.49	54.00	-18.51	27.73	7.76	Average	101	316																																																		
4	13250.00	49.12	74.00	-24.88	41.36	7.76	Peak	101	316																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											



Modulation	be EHT80	Test Freq. (MHz)	6625
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m)			



Modulation	be EHT80	Test Freq. (MHz)	6705																																																		
Polarization	Horizontal																																																				
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8038.00</td><td>34.37</td><td>54.00</td><td>-19.63</td><td>27.41</td><td>6.96</td><td>Average</td><td>111</td><td>348</td></tr><tr><td>2</td><td>8038.00</td><td>48.09</td><td>74.00</td><td>-25.91</td><td>41.13</td><td>6.96</td><td>Peak</td><td>111</td><td>348</td></tr><tr><td>3</td><td>13410.00</td><td>35.81</td><td>68.20</td><td>-32.39</td><td>27.75</td><td>8.06</td><td>Average</td><td>107</td><td>330</td></tr><tr><td>4</td><td>13410.00</td><td>49.50</td><td>88.20</td><td>-38.70</td><td>41.44</td><td>8.06</td><td>Peak</td><td>107</td><td>330</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8038.00	34.37	54.00	-19.63	27.41	6.96	Average	111	348	2	8038.00	48.09	74.00	-25.91	41.13	6.96	Peak	111	348	3	13410.00	35.81	68.20	-32.39	27.75	8.06	Average	107	330	4	13410.00	49.50	88.20	-38.70	41.44	8.06	Peak	107	330
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8038.00	34.37	54.00	-19.63	27.41	6.96	Average	111	348																																												
2	8038.00	48.09	74.00	-25.91	41.13	6.96	Peak	111	348																																												
3	13410.00	35.81	68.20	-32.39	27.75	8.06	Average	107	330																																												
4	13410.00	49.50	88.20	-38.70	41.44	8.06	Peak	107	330																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					




Modulation	be EHT80	Test Freq. (MHz)	6705
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) <			




Modulation	be EHT80		Test Freq. (MHz)		6785																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8118.00</td><td>34.21</td><td>54.00</td><td>-19.79</td><td>27.26</td><td>6.95</td><td>Average</td><td>117</td><td>312</td></tr><tr><td>2</td><td>8118.00</td><td>47.98</td><td>74.00</td><td>-26.02</td><td>41.03</td><td>6.95</td><td>Peak</td><td>117</td><td>312</td></tr><tr><td>3</td><td>13570.00</td><td>35.91</td><td>68.20</td><td>-32.29</td><td>27.63</td><td>8.28</td><td>Average</td><td>108</td><td>301</td></tr><tr><td>4</td><td>13570.00</td><td>49.59</td><td>88.20</td><td>-38.61</td><td>41.31</td><td>8.28</td><td>Peak</td><td>108</td><td>301</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8118.00	34.21	54.00	-19.79	27.26	6.95	Average	117	312	2	8118.00	47.98	74.00	-26.02	41.03	6.95	Peak	117	312	3	13570.00	35.91	68.20	-32.29	27.63	8.28	Average	108	301	4	13570.00	49.59	88.20	-38.61	41.31	8.28	Peak	108	301
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	8118.00	34.21	54.00	-19.79	27.26	6.95	Average	117	312																																																		
2	8118.00	47.98	74.00	-26.02	41.03	6.95	Peak	117	312																																																		
3	13570.00	35.91	68.20	-32.29	27.63	8.28	Average	108	301																																																		
4	13570.00	49.59	88.20	-38.61	41.31	8.28	Peak	108	301																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											

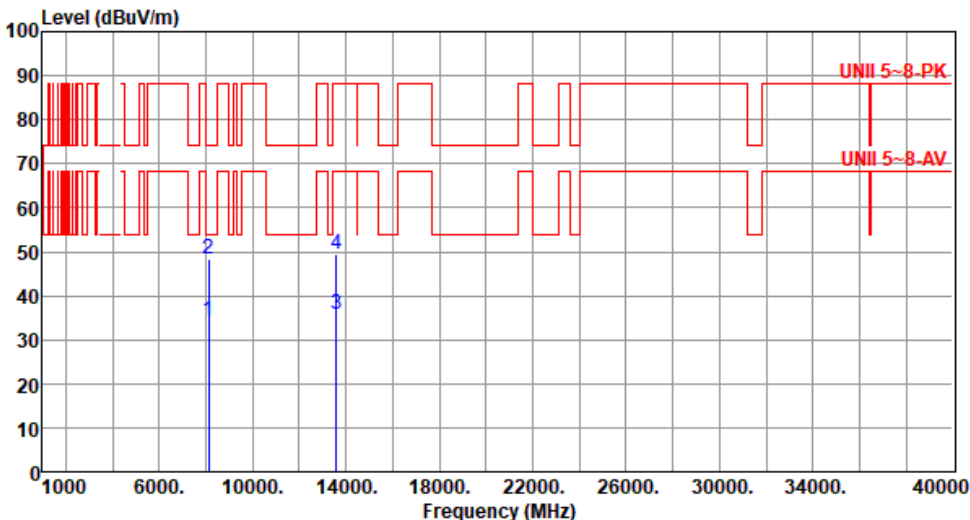

Modulation	be EHT80		Test Freq. (MHz)		6785																																																						
Polarization	Vertical																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8118.00</td><td>34.43</td><td>54.00</td><td>-19.57</td><td>27.48</td><td>6.95</td><td>Average</td><td>234</td><td>161</td></tr><tr><td>2</td><td>8118.00</td><td>48.18</td><td>74.00</td><td>-25.82</td><td>41.23</td><td>6.95</td><td>Peak</td><td>234</td><td>161</td></tr><tr><td>3</td><td>13570.00</td><td>35.67</td><td>68.20</td><td>-32.53</td><td>27.39</td><td>8.28</td><td>Average</td><td>177</td><td>147</td></tr><tr><td>4</td><td>13570.00</td><td>49.60</td><td>88.20</td><td>-38.60</td><td>41.32</td><td>8.28</td><td>Peak</td><td>177</td><td>147</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8118.00	34.43	54.00	-19.57	27.48	6.95	Average	234	161	2	8118.00	48.18	74.00	-25.82	41.23	6.95	Peak	234	161	3	13570.00	35.67	68.20	-32.53	27.39	8.28	Average	177	147	4	13570.00	49.60	88.20	-38.60	41.32	8.28	Peak	177	147
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	8118.00	34.43	54.00	-19.57	27.48	6.95	Average	234	161																																																		
2	8118.00	48.18	74.00	-25.82	41.23	6.95	Peak	234	161																																																		
3	13570.00	35.67	68.20	-32.53	27.39	8.28	Average	177	147																																																		
4	13570.00	49.60	88.20	-38.60	41.32	8.28	Peak	177	147																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											

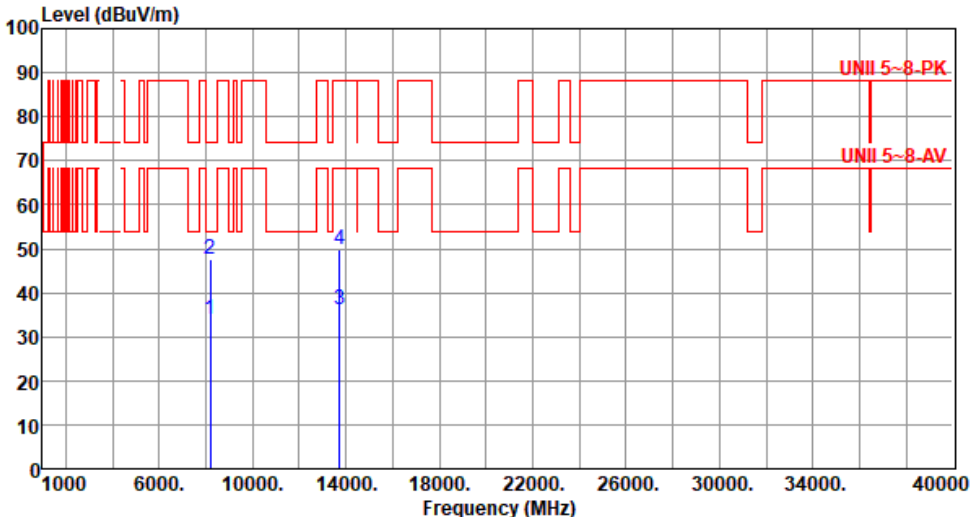


Modulation	be EHT80		Test Freq. (MHz)		6865																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8198.00</td><td>34.05</td><td>54.00</td><td>-19.95</td><td>27.50</td><td>6.55</td><td>Average</td><td>116</td><td>350</td></tr><tr><td>2</td><td>8198.00</td><td>47.76</td><td>74.00</td><td>-26.24</td><td>41.21</td><td>6.55</td><td>Peak</td><td>116</td><td>350</td></tr><tr><td>3</td><td>13730.00</td><td>36.03</td><td>68.20</td><td>-32.17</td><td>27.89</td><td>8.14</td><td>Average</td><td>111</td><td>339</td></tr><tr><td>4</td><td>13730.00</td><td>49.71</td><td>88.20</td><td>-38.49</td><td>41.57</td><td>8.14</td><td>Peak</td><td>111</td><td>339</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8198.00	34.05	54.00	-19.95	27.50	6.55	Average	116	350	2	8198.00	47.76	74.00	-26.24	41.21	6.55	Peak	116	350	3	13730.00	36.03	68.20	-32.17	27.89	8.14	Average	111	339	4	13730.00	49.71	88.20	-38.49	41.57	8.14	Peak	111	339
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	8198.00	34.05	54.00	-19.95	27.50	6.55	Average	116	350																																																		
2	8198.00	47.76	74.00	-26.24	41.21	6.55	Peak	116	350																																																		
3	13730.00	36.03	68.20	-32.17	27.89	8.14	Average	111	339																																																		
4	13730.00	49.71	88.20	-38.49	41.57	8.14	Peak	111	339																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											



Modulation	be EHT80	Test Freq. (MHz)	6865
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBUV/m)			

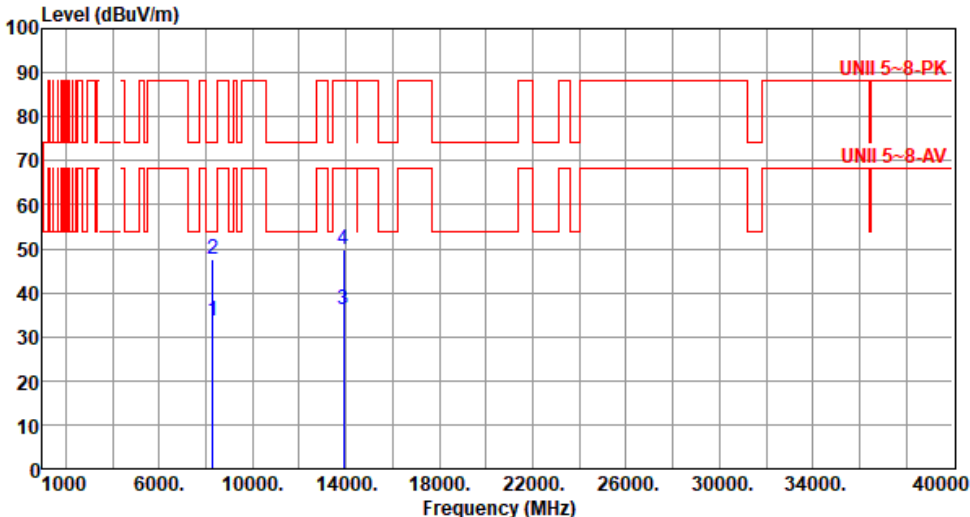

Modulation	be EHT80		Test Freq. (MHz)		6945																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8278.00</td><td>33.69</td><td>54.00</td><td>-20.31</td><td>27.31</td><td>6.38</td><td>Average</td><td>105</td><td>341</td></tr><tr><td>2</td><td>8278.00</td><td>47.42</td><td>74.00</td><td>-26.58</td><td>41.04</td><td>6.38</td><td>Peak</td><td>105</td><td>341</td></tr><tr><td>3</td><td>13890.00</td><td>35.98</td><td>68.20</td><td>-32.22</td><td>27.68</td><td>8.30</td><td>Average</td><td>101</td><td>328</td></tr><tr><td>4</td><td>13890.00</td><td>49.63</td><td>88.20</td><td>-38.57</td><td>41.33</td><td>8.30</td><td>Peak</td><td>101</td><td>328</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8278.00	33.69	54.00	-20.31	27.31	6.38	Average	105	341	2	8278.00	47.42	74.00	-26.58	41.04	6.38	Peak	105	341	3	13890.00	35.98	68.20	-32.22	27.68	8.30	Average	101	328	4	13890.00	49.63	88.20	-38.57	41.33	8.30	Peak	101	328
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	8278.00	33.69	54.00	-20.31	27.31	6.38	Average	105	341																																																		
2	8278.00	47.42	74.00	-26.58	41.04	6.38	Peak	105	341																																																		
3	13890.00	35.98	68.20	-32.22	27.68	8.30	Average	101	328																																																		
4	13890.00	49.63	88.20	-38.57	41.33	8.30	Peak	101	328																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																											



Modulation	be EHT80	Test Freq. (MHz)	6945
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBUV/m)			




Modulation	be EHT80		Test Freq. (MHz)		7025																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8358.00</td><td>33.78</td><td>54.00</td><td>-20.22</td><td>27.55</td><td>6.23</td><td>Average</td><td>120</td><td>134</td></tr><tr><td>2</td><td>8358.00</td><td>47.52</td><td>74.00</td><td>-26.48</td><td>41.29</td><td>6.23</td><td>Peak</td><td>120</td><td>134</td></tr><tr><td>3</td><td>14050.00</td><td>36.44</td><td>68.20</td><td>-31.76</td><td>27.91</td><td>8.53</td><td>Average</td><td>115</td><td>162</td></tr><tr><td>4</td><td>14050.00</td><td>50.12</td><td>88.20</td><td>-38.08</td><td>41.59</td><td>8.53</td><td>Peak</td><td>115</td><td>162</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8358.00	33.78	54.00	-20.22	27.55	6.23	Average	120	134	2	8358.00	47.52	74.00	-26.48	41.29	6.23	Peak	120	134	3	14050.00	36.44	68.20	-31.76	27.91	8.53	Average	115	162	4	14050.00	50.12	88.20	-38.08	41.59	8.53	Peak	115	162
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	8358.00	33.78	54.00	-20.22	27.55	6.23	Average	120	134																																																		
2	8358.00	47.52	74.00	-26.48	41.29	6.23	Peak	120	134																																																		
3	14050.00	36.44	68.20	-31.76	27.91	8.53	Average	115	162																																																		
4	14050.00	50.12	88.20	-38.08	41.59	8.53	Peak	115	162																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																											



Modulation	be EHT80		Test Freq. (MHz)		7025																																																						
Polarization	Vertical																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8358.00</td><td>33.98</td><td>54.00</td><td>-20.02</td><td>27.75</td><td>6.23</td><td>Average</td><td>253</td><td>300</td></tr><tr><td>2</td><td>8358.00</td><td>47.83</td><td>74.00</td><td>-26.17</td><td>41.60</td><td>6.23</td><td>Peak</td><td>253</td><td>300</td></tr><tr><td>3</td><td>14050.00</td><td>36.47</td><td>68.20</td><td>-31.73</td><td>27.94</td><td>8.53</td><td>Average</td><td>183</td><td>322</td></tr><tr><td>4</td><td>14050.00</td><td>50.39</td><td>88.20</td><td>-37.81</td><td>41.86</td><td>8.53</td><td>Peak</td><td>183</td><td>322</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8358.00	33.98	54.00	-20.02	27.75	6.23	Average	253	300	2	8358.00	47.83	74.00	-26.17	41.60	6.23	Peak	253	300	3	14050.00	36.47	68.20	-31.73	27.94	8.53	Average	183	322	4	14050.00	50.39	88.20	-37.81	41.86	8.53	Peak	183	322
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	8358.00	33.98	54.00	-20.02	27.75	6.23	Average	253	300																																																		
2	8358.00	47.83	74.00	-26.17	41.60	6.23	Peak	253	300																																																		
3	14050.00	36.47	68.20	-31.73	27.94	8.53	Average	183	322																																																		
4	14050.00	50.39	88.20	-37.81	41.86	8.53	Peak	183	322																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											




Unwanted Emissions (Above 1GHz) for be EHT160

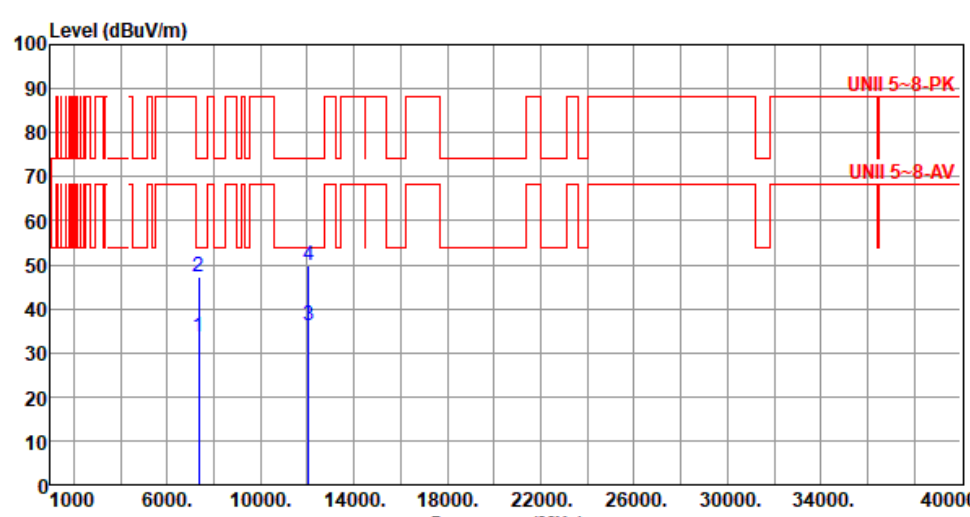Modulation	be EHT160	Test Freq. (MHz)	6025						
Polarization	Horizontal								
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7358.00	33.55	54.00	-20.45	27.39	6.16	Average	113	330
2	7358.00	47.30	74.00	-26.70	41.14	6.16	Peak	113	330
3	12050.00	36.05	54.00	-17.95	27.78	8.27	Average	103	310
4	12050.00	49.72	74.00	-24.28	41.45	8.27	Peak	103	310
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT160		Test Freq. (MHz)		6025																																																						
Polarization	Vertical																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7358.00</td><td>33.68</td><td>54.00</td><td>-20.32</td><td>27.52</td><td>6.16</td><td>Average</td><td>240</td><td>158</td></tr><tr><td>2</td><td>7358.00</td><td>47.51</td><td>74.00</td><td>-26.49</td><td>41.35</td><td>6.16</td><td>Peak</td><td>240</td><td>158</td></tr><tr><td>3</td><td>12050.00</td><td>35.97</td><td>54.00</td><td>-18.03</td><td>27.70</td><td>8.27</td><td>Average</td><td>166</td><td>165</td></tr><tr><td>4</td><td>12050.00</td><td>49.89</td><td>74.00</td><td>-24.11</td><td>41.62</td><td>8.27</td><td>Peak</td><td>166</td><td>165</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7358.00	33.68	54.00	-20.32	27.52	6.16	Average	240	158	2	7358.00	47.51	74.00	-26.49	41.35	6.16	Peak	240	158	3	12050.00	35.97	54.00	-18.03	27.70	8.27	Average	166	165	4	12050.00	49.89	74.00	-24.11	41.62	8.27	Peak	166	165
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7358.00	33.68	54.00	-20.32	27.52	6.16	Average	240	158																																																		
2	7358.00	47.51	74.00	-26.49	41.35	6.16	Peak	240	158																																																		
3	12050.00	35.97	54.00	-18.03	27.70	8.27	Average	166	165																																																		
4	12050.00	49.89	74.00	-24.11	41.62	8.27	Peak	166	165																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											

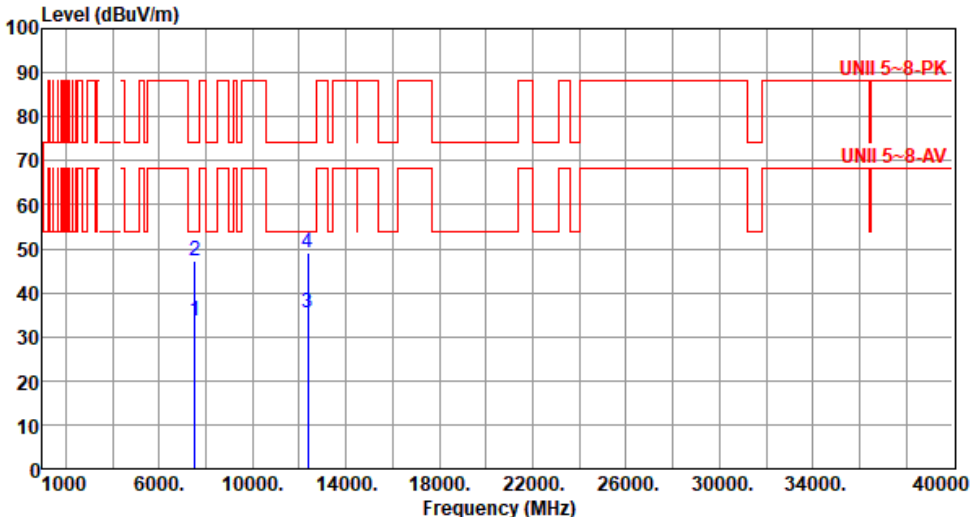

Modulation	be EHT160		Test Freq. (MHz)		6185																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7518.00</td><td>33.63</td><td>54.00</td><td>-20.37</td><td>27.46</td><td>6.17</td><td>Average</td><td>123</td><td>337</td></tr><tr><td>2</td><td>7518.00</td><td>47.36</td><td>74.00</td><td>-26.64</td><td>41.19</td><td>6.17</td><td>Peak</td><td>123</td><td>337</td></tr><tr><td>3</td><td>12370.00</td><td>35.48</td><td>54.00</td><td>-18.52</td><td>27.88</td><td>7.60</td><td>Average</td><td>116</td><td>303</td></tr><tr><td>4</td><td>12370.00</td><td>49.20</td><td>74.00</td><td>-24.80</td><td>41.60</td><td>7.60</td><td>Peak</td><td>116</td><td>303</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7518.00	33.63	54.00	-20.37	27.46	6.17	Average	123	337	2	7518.00	47.36	74.00	-26.64	41.19	6.17	Peak	123	337	3	12370.00	35.48	54.00	-18.52	27.88	7.60	Average	116	303	4	12370.00	49.20	74.00	-24.80	41.60	7.60	Peak	116	303
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7518.00	33.63	54.00	-20.37	27.46	6.17	Average	123	337																																																		
2	7518.00	47.36	74.00	-26.64	41.19	6.17	Peak	123	337																																																		
3	12370.00	35.48	54.00	-18.52	27.88	7.60	Average	116	303																																																		
4	12370.00	49.20	74.00	-24.80	41.60	7.60	Peak	116	303																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																											



Modulation	be EHT160	Test Freq. (MHz)	6185
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m)			



Modulation	be EHT160	Test Freq. (MHz)	6345
Polarization	Horizontal		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) <			



Modulation	be EHT160		Test Freq. (MHz)		6345																																																						
Polarization	Vertical																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7678.00</td><td>33.58</td><td>54.00</td><td>-20.42</td><td>27.55</td><td>6.03</td><td>Average</td><td>239</td><td>164</td></tr><tr><td>2</td><td>7678.00</td><td>47.37</td><td>74.00</td><td>-26.63</td><td>41.34</td><td>6.03</td><td>Peak</td><td>239</td><td>164</td></tr><tr><td>3</td><td>12690.00</td><td>35.46</td><td>54.00</td><td>-18.54</td><td>27.66</td><td>7.80</td><td>Average</td><td>180</td><td>162</td></tr><tr><td>4</td><td>12690.00</td><td>49.39</td><td>74.00</td><td>-24.61</td><td>41.59</td><td>7.80</td><td>Peak</td><td>180</td><td>162</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7678.00	33.58	54.00	-20.42	27.55	6.03	Average	239	164	2	7678.00	47.37	74.00	-26.63	41.34	6.03	Peak	239	164	3	12690.00	35.46	54.00	-18.54	27.66	7.80	Average	180	162	4	12690.00	49.39	74.00	-24.61	41.59	7.80	Peak	180	162
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7678.00	33.58	54.00	-20.42	27.55	6.03	Average	239	164																																																		
2	7678.00	47.37	74.00	-26.63	41.34	6.03	Peak	239	164																																																		
3	12690.00	35.46	54.00	-18.54	27.66	7.80	Average	180	162																																																		
4	12690.00	49.39	74.00	-24.61	41.59	7.80	Peak	180	162																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											




Modulation	be EHT160	Test Freq. (MHz)	6505
Polarization	Horizontal		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) </			



Modulation	be EHT160	Test Freq. (MHz)	6505						
Polarization	Vertical								
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7838.00	33.84	68.20	-34.36	27.63	6.21	Average	232	167
2	7838.00	47.71	88.20	-40.49	41.50	6.21	Peak	232	167
3	13010.00	35.88	68.20	-32.32	27.90	7.98	Average	180	161
4	13010.00	49.80	88.20	-38.40	41.82	7.98	Peak	180	161
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

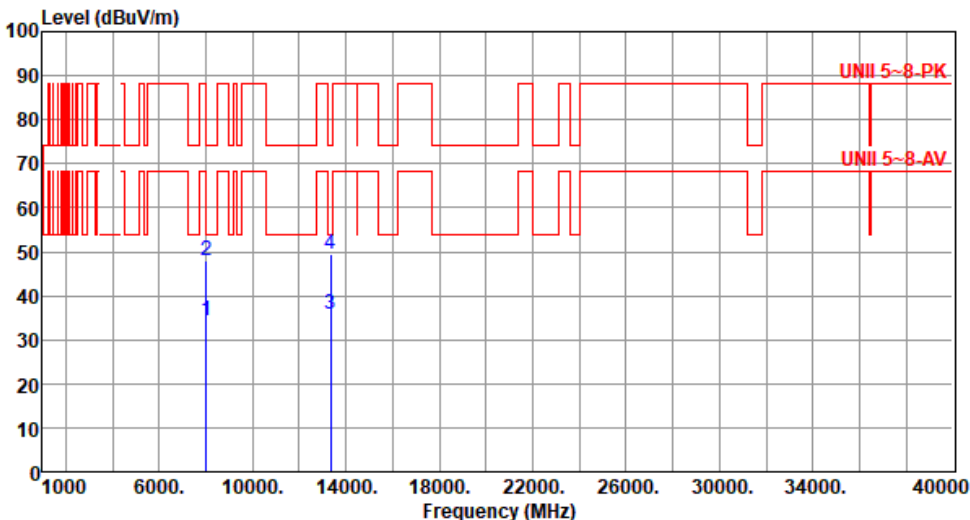

Modulation	be EHT160		Test Freq. (MHz)		6665																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7998.00</td><td>34.37</td><td>68.20</td><td>-33.83</td><td>27.49</td><td>6.88</td><td>Average</td><td>117</td><td>336</td></tr><tr><td>2</td><td>7998.00</td><td>48.11</td><td>88.20</td><td>-40.09</td><td>41.23</td><td>6.88</td><td>Peak</td><td>117</td><td>336</td></tr><tr><td>3</td><td>13330.00</td><td>35.78</td><td>54.00</td><td>-18.22</td><td>27.88</td><td>7.90</td><td>Average</td><td>106</td><td>325</td></tr><tr><td>4</td><td>13330.00</td><td>49.52</td><td>74.00</td><td>-24.48</td><td>41.62</td><td>7.90</td><td>Peak</td><td>106</td><td>325</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7998.00	34.37	68.20	-33.83	27.49	6.88	Average	117	336	2	7998.00	48.11	88.20	-40.09	41.23	6.88	Peak	117	336	3	13330.00	35.78	54.00	-18.22	27.88	7.90	Average	106	325	4	13330.00	49.52	74.00	-24.48	41.62	7.90	Peak	106	325
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7998.00	34.37	68.20	-33.83	27.49	6.88	Average	117	336																																																		
2	7998.00	48.11	88.20	-40.09	41.23	6.88	Peak	117	336																																																		
3	13330.00	35.78	54.00	-18.22	27.88	7.90	Average	106	325																																																		
4	13330.00	49.52	74.00	-24.48	41.62	7.90	Peak	106	325																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											



Modulation	be EHT160	Test Freq. (MHz)	6665
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBUV/m) </			




Modulation	be EHT160	Test Freq. (MHz)	6825						
Polarization	Horizontal								
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8158.00	34.07	54.00	-19.93	27.35	6.72	Average	112	327
2	8158.00	47.80	74.00	-26.20	41.08	6.72	Peak	112	327
3	13650.00	35.69	68.20	-32.51	27.66	8.03	Average	109	307
4	13650.00	49.36	88.20	-38.84	41.33	8.03	Peak	109	307

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	be EHT160	Test Freq. (MHz)	6825
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) </			

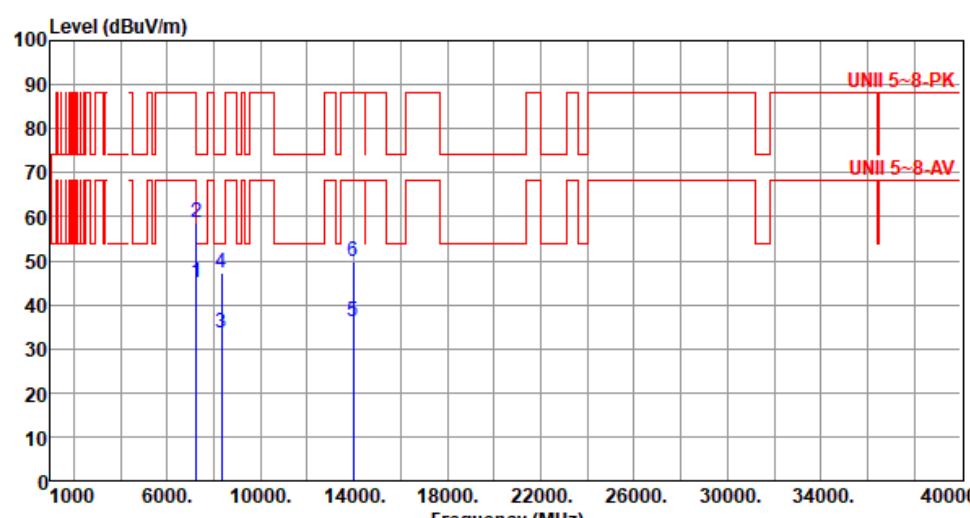

Modulation	be EHT160		Test Freq. (MHz)		6985																																																																										
Polarization	Horizontal																																																																														
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7250.00</td><td>44.85</td><td>54.00</td><td>-9.15</td><td>38.92</td><td>5.93</td><td>Average</td><td>109</td><td>269</td></tr><tr><td>2</td><td>7250.00</td><td>58.55</td><td>74.00</td><td>-15.45</td><td>52.62</td><td>5.93</td><td>Peak</td><td>109</td><td>269</td></tr><tr><td>3</td><td>8318.00</td><td>33.60</td><td>54.00</td><td>-20.40</td><td>27.31</td><td>6.29</td><td>Average</td><td>100</td><td>344</td></tr><tr><td>4</td><td>8318.00</td><td>47.33</td><td>74.00</td><td>-26.67</td><td>41.04</td><td>6.29</td><td>Peak</td><td>100</td><td>344</td></tr><tr><td>5</td><td>13970.00</td><td>36.02</td><td>68.20</td><td>-32.18</td><td>27.61</td><td>8.41</td><td>Average</td><td>103</td><td>339</td></tr><tr><td>6</td><td>13970.00</td><td>49.70</td><td>88.20</td><td>-38.50</td><td>41.29</td><td>8.41</td><td>Peak</td><td>103</td><td>339</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	44.85	54.00	-9.15	38.92	5.93	Average	109	269	2	7250.00	58.55	74.00	-15.45	52.62	5.93	Peak	109	269	3	8318.00	33.60	54.00	-20.40	27.31	6.29	Average	100	344	4	8318.00	47.33	74.00	-26.67	41.04	6.29	Peak	100	344	5	13970.00	36.02	68.20	-32.18	27.61	8.41	Average	103	339	6	13970.00	49.70	88.20	-38.50	41.29	8.41	Peak	103	339
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	7250.00	44.85	54.00	-9.15	38.92	5.93	Average	109	269																																																																						
2	7250.00	58.55	74.00	-15.45	52.62	5.93	Peak	109	269																																																																						
3	8318.00	33.60	54.00	-20.40	27.31	6.29	Average	100	344																																																																						
4	8318.00	47.33	74.00	-26.67	41.04	6.29	Peak	100	344																																																																						
5	13970.00	36.02	68.20	-32.18	27.61	8.41	Average	103	339																																																																						
6	13970.00	49.70	88.20	-38.50	41.29	8.41	Peak	103	339																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

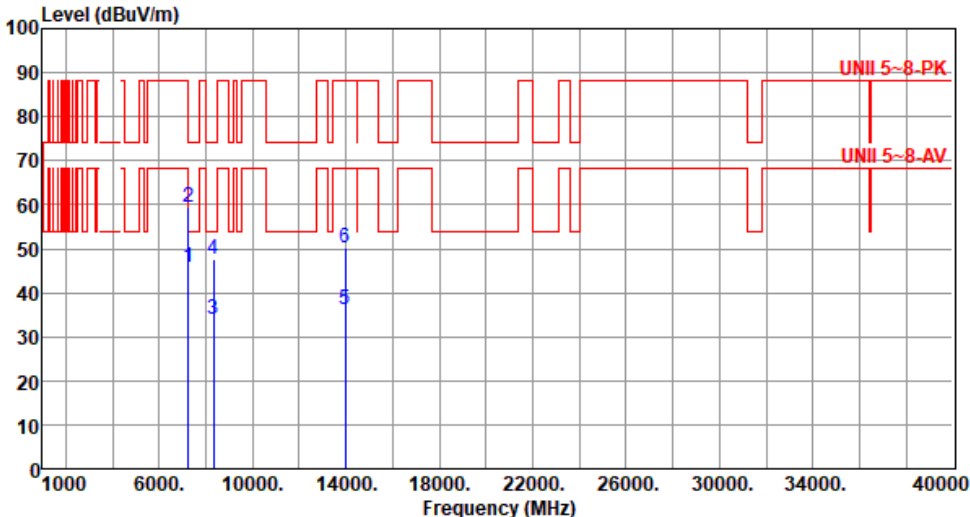

Modulation	be EHT160		Test Freq. (MHz)		6985																																																																										
Polarization	Vertical																																																																														
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7250.00</td><td>45.59</td><td>54.00</td><td>-8.41</td><td>39.66</td><td>5.93</td><td>Average</td><td>207</td><td>199</td></tr><tr><td>2</td><td>7250.00</td><td>59.50</td><td>74.00</td><td>-14.50</td><td>53.57</td><td>5.93</td><td>Peak</td><td>207</td><td>199</td></tr><tr><td>3</td><td>8318.00</td><td>33.80</td><td>54.00</td><td>-20.20</td><td>27.51</td><td>6.29</td><td>Average</td><td>251</td><td>163</td></tr><tr><td>4</td><td>8318.00</td><td>47.63</td><td>74.00</td><td>-26.37</td><td>41.34</td><td>6.29</td><td>Peak</td><td>251</td><td>163</td></tr><tr><td>5</td><td>13970.00</td><td>36.09</td><td>68.20</td><td>-32.11</td><td>27.68</td><td>8.41</td><td>Average</td><td>160</td><td>152</td></tr><tr><td>6</td><td>13970.00</td><td>50.00</td><td>88.20</td><td>-38.20</td><td>41.59</td><td>8.41</td><td>Peak</td><td>160</td><td>152</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	45.59	54.00	-8.41	39.66	5.93	Average	207	199	2	7250.00	59.50	74.00	-14.50	53.57	5.93	Peak	207	199	3	8318.00	33.80	54.00	-20.20	27.51	6.29	Average	251	163	4	8318.00	47.63	74.00	-26.37	41.34	6.29	Peak	251	163	5	13970.00	36.09	68.20	-32.11	27.68	8.41	Average	160	152	6	13970.00	50.00	88.20	-38.20	41.59	8.41	Peak	160	152
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	7250.00	45.59	54.00	-8.41	39.66	5.93	Average	207	199																																																																						
2	7250.00	59.50	74.00	-14.50	53.57	5.93	Peak	207	199																																																																						
3	8318.00	33.80	54.00	-20.20	27.51	6.29	Average	251	163																																																																						
4	8318.00	47.63	74.00	-26.37	41.34	6.29	Peak	251	163																																																																						
5	13970.00	36.09	68.20	-32.11	27.68	8.41	Average	160	152																																																																						
6	13970.00	50.00	88.20	-38.20	41.59	8.41	Peak	160	152																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															



Unwanted Emissions (Above 1GHz) for be EHT320

Modulation	be EHT320	Test Freq. (MHz)	6105																																																		
Polarization	Horizontal																																																				
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																					
Level (dBuV/m) UNII 5~8-PK UNII 5~8-AV <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7438.00</td><td>33.40</td><td>54.00</td><td>-20.60</td><td>27.25</td><td>6.15</td><td>Average</td><td>105</td><td>345</td></tr><tr><td>2</td><td>7438.00</td><td>47.14</td><td>74.00</td><td>-26.86</td><td>40.99</td><td>6.15</td><td>Peak</td><td>105</td><td>345</td></tr><tr><td>3</td><td>12210.00</td><td>37.10</td><td>54.00</td><td>-16.90</td><td>28.84</td><td>8.26</td><td>Average</td><td>106</td><td>333</td></tr><tr><td>4</td><td>12210.00</td><td>51.80</td><td>74.00</td><td>-22.20</td><td>43.54</td><td>8.26</td><td>Peak</td><td>106</td><td>333</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7438.00	33.40	54.00	-20.60	27.25	6.15	Average	105	345	2	7438.00	47.14	74.00	-26.86	40.99	6.15	Peak	105	345	3	12210.00	37.10	54.00	-16.90	28.84	8.26	Average	106	333	4	12210.00	51.80	74.00	-22.20	43.54	8.26	Peak	106	333
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	7438.00	33.40	54.00	-20.60	27.25	6.15	Average	105	345																																												
2	7438.00	47.14	74.00	-26.86	40.99	6.15	Peak	105	345																																												
3	12210.00	37.10	54.00	-16.90	28.84	8.26	Average	106	333																																												
4	12210.00	51.80	74.00	-22.20	43.54	8.26	Peak	106	333																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT320	Test Freq. (MHz)	6105
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) </			



Modulation	be EHT320		Test Freq. (MHz)		6265				
Polarization	Horizontal								
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	8353.00	33.25	54.00	-20.75	27.01	6.24	Average	100	338
2	8353.00	46.78	74.00	-27.22	40.54	6.24	Peak	100	338
3	12530.00	36.89	54.00	-17.11	29.37	7.52	Average	102	314
4	12530.00	51.23	74.00	-22.77	43.71	7.52	Peak	102	314
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	be EHT320	Test Freq. (MHz)	6265
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) </			



Modulation	be EHT320	Test Freq. (MHz)	6425
Polarization	Horizontal		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBUV/m)			



Modulation	be EHT320	Test Freq. (MHz)	6425
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) </			



Modulation	be EHT320		Test Freq. (MHz)		6585																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7918.00</td><td>33.68</td><td>68.20</td><td>-34.52</td><td>27.14</td><td>6.54</td><td>Average</td><td>115</td><td>347</td></tr><tr><td>2</td><td>7918.00</td><td>47.59</td><td>88.20</td><td>-40.61</td><td>41.05</td><td>6.54</td><td>Peak</td><td>115</td><td>347</td></tr><tr><td>3</td><td>13170.00</td><td>36.12</td><td>68.20</td><td>-32.08</td><td>28.31</td><td>7.81</td><td>Average</td><td>128</td><td>337</td></tr><tr><td>4</td><td>13170.00</td><td>50.15</td><td>88.20</td><td>-38.05</td><td>42.34</td><td>7.81</td><td>Peak</td><td>128</td><td>337</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7918.00	33.68	68.20	-34.52	27.14	6.54	Average	115	347	2	7918.00	47.59	88.20	-40.61	41.05	6.54	Peak	115	347	3	13170.00	36.12	68.20	-32.08	28.31	7.81	Average	128	337	4	13170.00	50.15	88.20	-38.05	42.34	7.81	Peak	128	337
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	7918.00	33.68	68.20	-34.52	27.14	6.54	Average	115	347																																																		
2	7918.00	47.59	88.20	-40.61	41.05	6.54	Peak	115	347																																																		
3	13170.00	36.12	68.20	-32.08	28.31	7.81	Average	128	337																																																		
4	13170.00	50.15	88.20	-38.05	42.34	7.81	Peak	128	337																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																											




Modulation	be EHT320	Test Freq. (MHz)	6585
Polarization	Vertical		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBUV/m) </			




Modulation	be EHT320		Test Freq. (MHz)		6745																																																						
Polarization	Horizontal																																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8078.00</td><td>33.73</td><td>54.00</td><td>-20.27</td><td>26.70</td><td>7.03</td><td>Average</td><td>109</td><td>313</td></tr><tr><td>2</td><td>8078.00</td><td>47.60</td><td>74.00</td><td>-26.40</td><td>40.57</td><td>7.03</td><td>Peak</td><td>109</td><td>313</td></tr><tr><td>3</td><td>13490.00</td><td>36.56</td><td>68.20</td><td>-31.64</td><td>28.27</td><td>8.29</td><td>Average</td><td>104</td><td>347</td></tr><tr><td>4</td><td>13490.00</td><td>49.42</td><td>88.20</td><td>-38.78</td><td>41.13</td><td>8.29</td><td>Peak</td><td>104</td><td>347</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8078.00	33.73	54.00	-20.27	26.70	7.03	Average	109	313	2	8078.00	47.60	74.00	-26.40	40.57	7.03	Peak	109	313	3	13490.00	36.56	68.20	-31.64	28.27	8.29	Average	104	347	4	13490.00	49.42	88.20	-38.78	41.13	8.29	Peak	104	347
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	8078.00	33.73	54.00	-20.27	26.70	7.03	Average	109	313																																																		
2	8078.00	47.60	74.00	-26.40	40.57	7.03	Peak	109	313																																																		
3	13490.00	36.56	68.20	-31.64	28.27	8.29	Average	104	347																																																		
4	13490.00	49.42	88.20	-38.78	41.13	8.29	Peak	104	347																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											

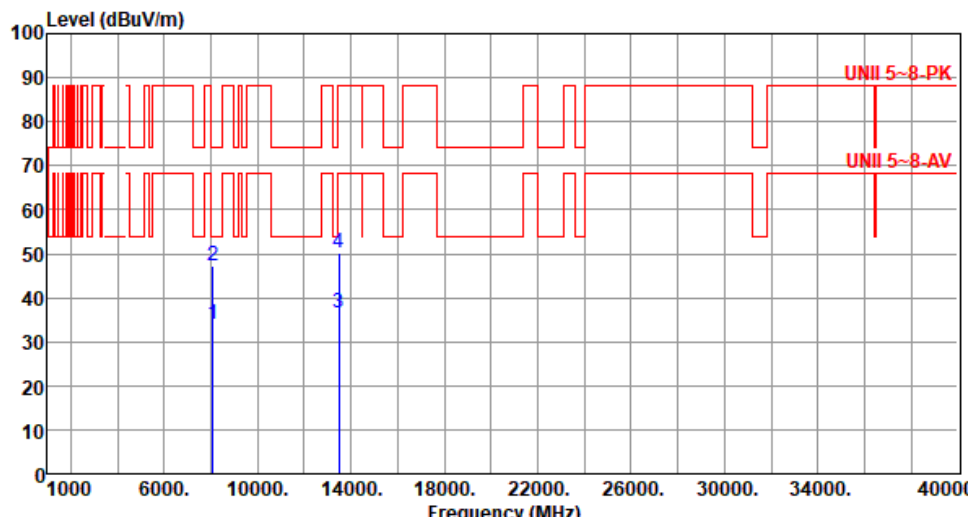

Modulation	be EHT320	Test Freq. (MHz)	6745						
Polarization	Vertical								
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8078.00	33.97	54.00	-20.03	26.94	7.03	Average	103	167
2	8078.00	47.08	74.00	-26.92	40.05	7.03	Peak	103	167
3	13490.00	36.43	68.20	-31.77	28.14	8.29	Average	100	155
4	13490.00	50.01	88.20	-38.19	41.72	8.29	Peak	100	155
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

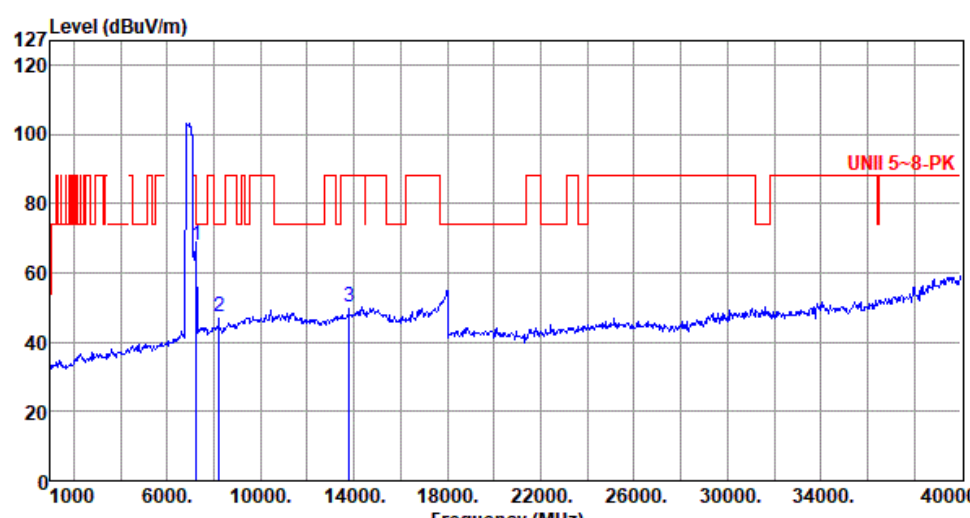


Modulation	be EHT320	Test Freq. (MHz)	6905						
Polarization	Horizontal-Peak Value								
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7250.00	67.81	74.00	-6.19	61.88	5.93	Peak	256	90
2	8238.00	47.42	74.00	-26.58	40.96	6.46	Peak	110	337
3	13810.00	50.26	88.20	-37.94	42.10	8.16	Peak	216	319

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor, cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).




Modulation	be EHT320	Test Freq. (MHz)	6905																																								
Polarization	Horizontal-Average Value																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																											
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7250.00</td><td>51.46</td><td>54.00</td><td>-2.54</td><td>45.53</td><td>5.93</td><td>Average</td><td>256</td><td>90</td></tr><tr><td>2</td><td>8238.00</td><td>33.68</td><td>54.00</td><td>-20.32</td><td>27.22</td><td>6.46</td><td>Average</td><td>110</td><td>337</td></tr><tr><td>3</td><td>13810.00</td><td>36.34</td><td>68.20</td><td>-31.86</td><td>28.18</td><td>8.16</td><td>Average</td><td>216</td><td>319</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	51.46	54.00	-2.54	45.53	5.93	Average	256	90	2	8238.00	33.68	54.00	-20.32	27.22	6.46	Average	110	337	3	13810.00	36.34	68.20	-31.86	28.18	8.16	Average	216	319
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	7250.00	51.46	54.00	-2.54	45.53	5.93	Average	256	90																																		
2	8238.00	33.68	54.00	-20.32	27.22	6.46	Average	110	337																																		
3	13810.00	36.34	68.20	-31.86	28.18	8.16	Average	216	319																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

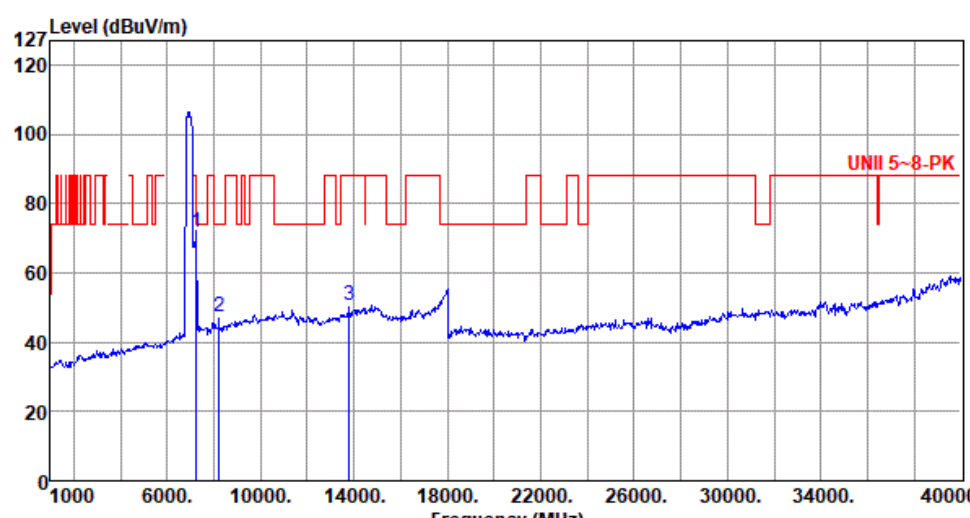

Modulation	be EHT320	Test Freq. (MHz)	6905																																								
Polarization	Vertical-Peak Value																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																											
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7250.00</td><td>71.62</td><td>74.00</td><td>-2.38</td><td>65.69</td><td>5.93</td><td>Peak</td><td>227</td><td>164</td></tr><tr><td>2</td><td>8238.00</td><td>47.54</td><td>74.00</td><td>-26.46</td><td>41.08</td><td>6.46</td><td>Peak</td><td>155</td><td>164</td></tr><tr><td>3</td><td>13810.00</td><td>50.46</td><td>88.20</td><td>-37.74</td><td>42.30</td><td>8.16</td><td>Peak</td><td>246</td><td>169</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	71.62	74.00	-2.38	65.69	5.93	Peak	227	164	2	8238.00	47.54	74.00	-26.46	41.08	6.46	Peak	155	164	3	13810.00	50.46	88.20	-37.74	42.30	8.16	Peak	246	169
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	7250.00	71.62	74.00	-2.38	65.69	5.93	Peak	227	164																																		
2	8238.00	47.54	74.00	-26.46	41.08	6.46	Peak	155	164																																		
3	13810.00	50.46	88.20	-37.74	42.30	8.16	Peak	246	169																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

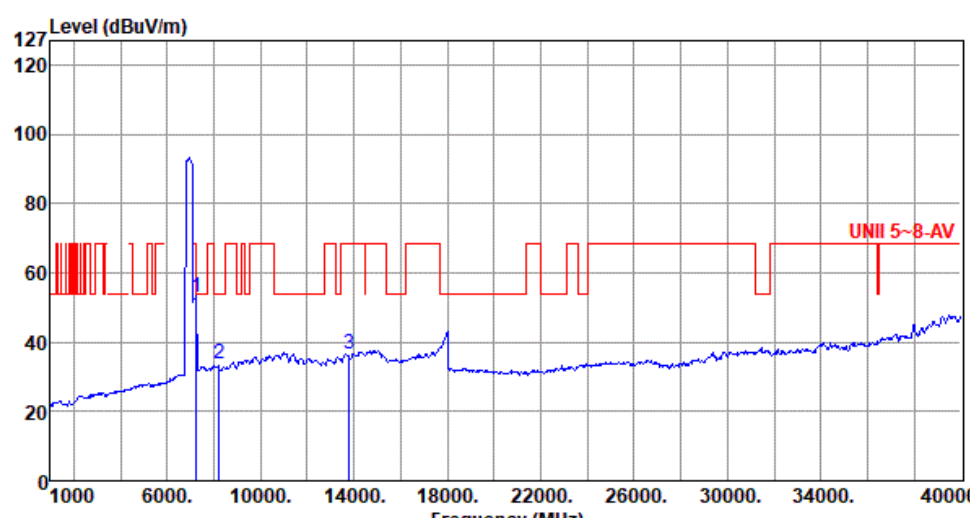


Modulation	be EHT320	Test Freq. (MHz)	6905																																								
Polarization	Vertical -Average Value																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																											
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7250.00</td><td>52.92</td><td>54.00</td><td>-1.08</td><td>46.99</td><td>5.93</td><td>Average</td><td>227</td><td>164</td></tr><tr><td>2</td><td>8238.00</td><td>33.83</td><td>54.00</td><td>-20.17</td><td>27.37</td><td>6.46</td><td>Average</td><td>155</td><td>164</td></tr><tr><td>3</td><td>13810.00</td><td>36.49</td><td>68.20</td><td>-31.71</td><td>28.33</td><td>8.16</td><td>Average</td><td>246</td><td>169</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	52.92	54.00	-1.08	46.99	5.93	Average	227	164	2	8238.00	33.83	54.00	-20.17	27.37	6.46	Average	155	164	3	13810.00	36.49	68.20	-31.71	28.33	8.16	Average	246	169
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	7250.00	52.92	54.00	-1.08	46.99	5.93	Average	227	164																																		
2	8238.00	33.83	54.00	-20.17	27.37	6.46	Average	155	164																																		
3	13810.00	36.49	68.20	-31.71	28.33	8.16	Average	246	169																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

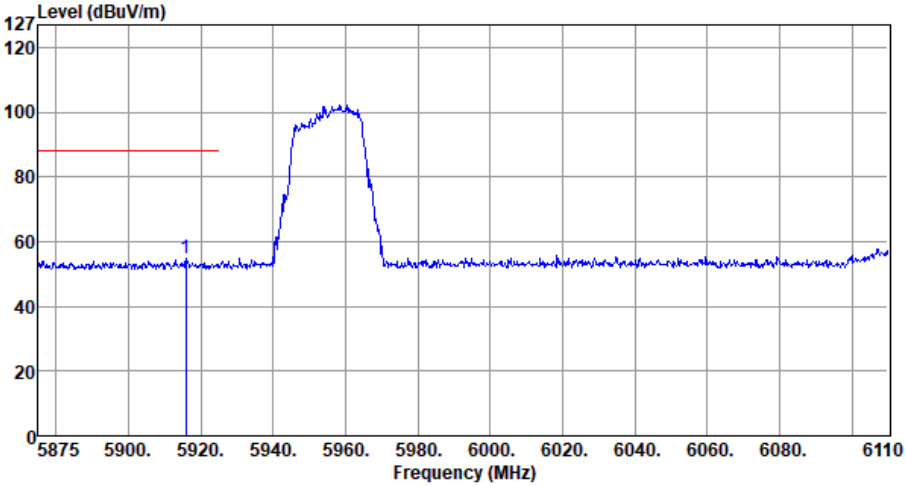Modulation	EHT20	Test Freq. (MHz)	5955																				
Polarization	Horizontal-Peak																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5915.89</td><td>54.64</td><td>88.20</td><td>-33.56</td><td>52.99</td><td>1.65</td><td>Peak</td><td>236</td><td>138</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5915.89	54.64	88.20	-33.56	52.99	1.65	Peak	236	138
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5915.89	54.64	88.20	-33.56	52.99	1.65	Peak	236	138														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

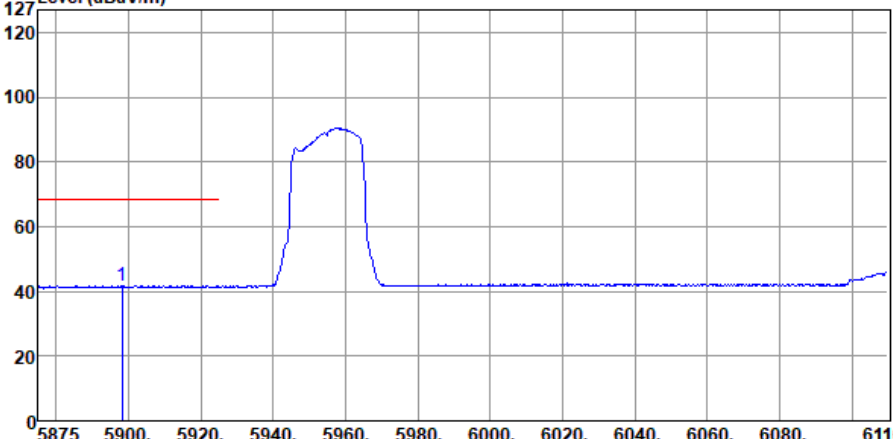Modulation	EHT20	Test Freq. (MHz)	5955																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5898.27</td><td>41.82</td><td>68.20</td><td>-26.38</td><td>40.19</td><td>1.63</td><td>Average</td><td>236</td><td>138</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5898.27	41.82	68.20	-26.38	40.19	1.63	Average	236	138
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																								
1	5898.27	41.82	68.20	-26.38	40.19	1.63	Average	236	138																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement


Appendix D

Modulation	EHT20	Test Freq. (MHz)	5955																				
Polarization	Vertical-Peak																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5899.44</td><td>54.45</td><td>88.20</td><td>-33.75</td><td>52.81</td><td>1.64</td><td>Peak</td><td>328</td><td>181</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5899.44	54.45	88.20	-33.75	52.81	1.64	Peak	328	181
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5899.44	54.45	88.20	-33.75	52.81	1.64	Peak	328	181														



Band Edge measurement


Appendix D

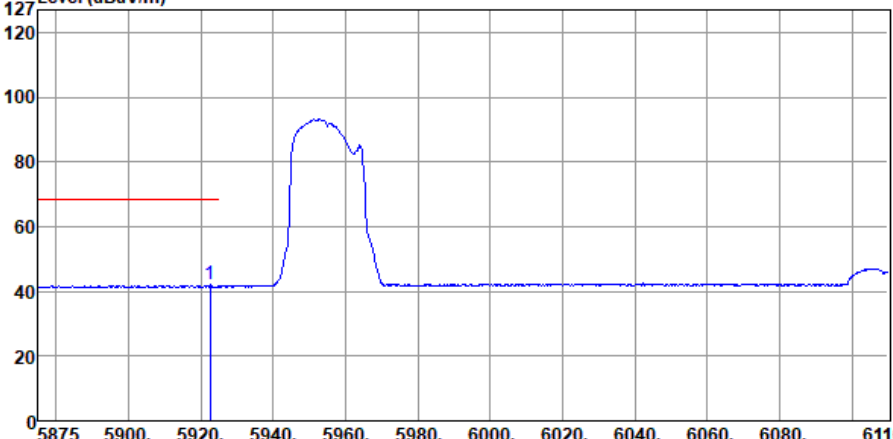Modulation	EHT20	Test Freq. (MHz)	5955																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5922.47</td><td>41.99</td><td>68.20</td><td>-26.21</td><td>40.34</td><td>1.65</td><td>Average</td><td>328</td><td>181</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5922.47	41.99	68.20	-26.21	40.34	1.65	Average	328	181
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5922.47	41.99	68.20	-26.21	40.34	1.65	Average	328	181														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

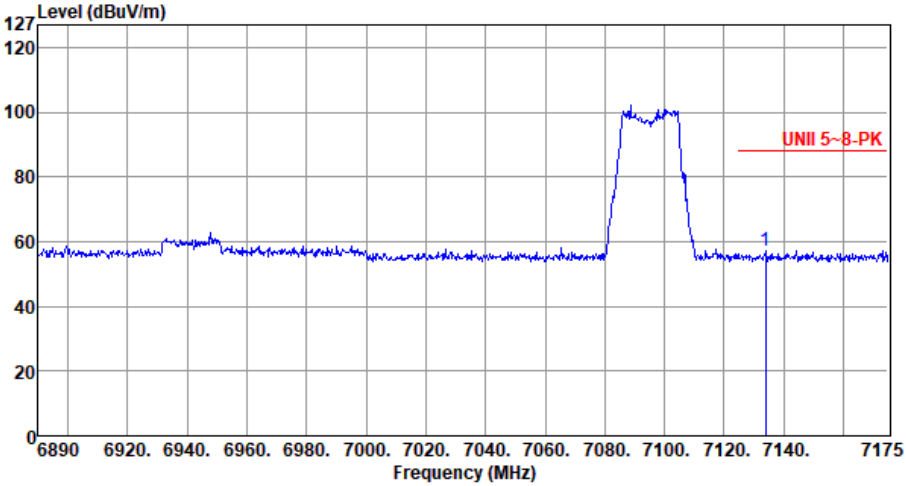Modulation	EHT20	Test Freq. (MHz)	7095																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7133.96</td><td>57.39</td><td>88.20</td><td>-30.81</td><td>51.65</td><td>5.74</td><td>Peak</td><td>329</td><td>94</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1	7133.96	57.39	88.20	-30.81	51.65	5.74	Peak	329	94
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																		
					dBuV			cm	deg																																		
1	7133.96	57.39	88.20	-30.81	51.65	5.74	Peak	329	94																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

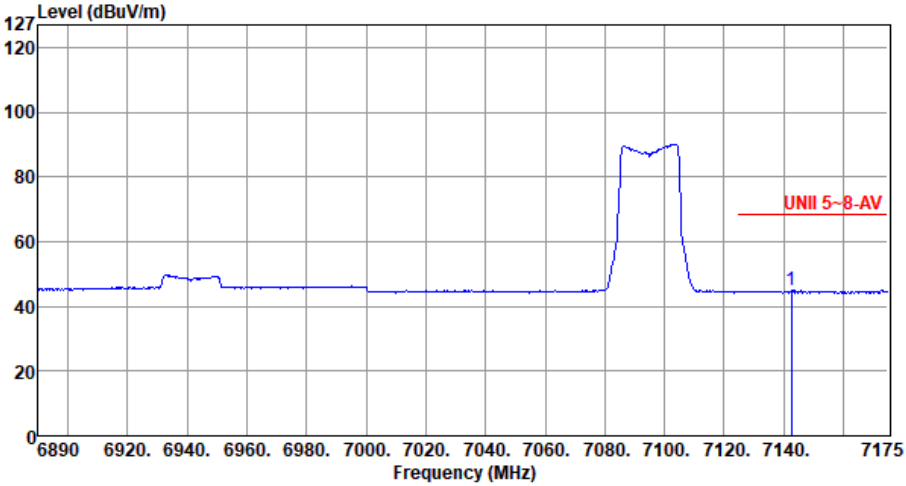Modulation	EHT20	Test Freq. (MHz)	7095																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7142.51</td><td>44.96</td><td>68.20</td><td>-23.24</td><td>39.20</td><td>5.76</td><td>Average</td><td>329</td><td>94</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7142.51	44.96	68.20	-23.24	39.20	5.76	Average	329	94
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7142.51	44.96	68.20	-23.24	39.20	5.76	Average	329	94														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

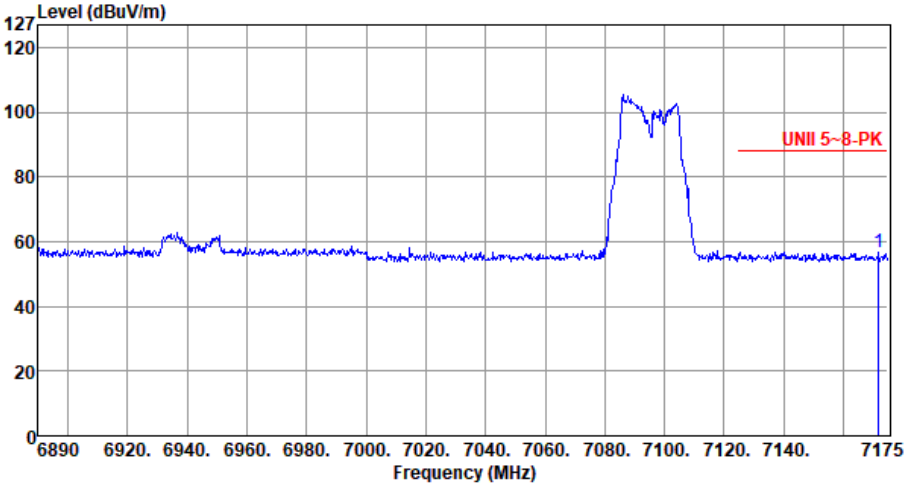Modulation	EHT20	Test Freq. (MHz)	7095																				
Polarization	Vertical-Peak																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7171.87</td><td>56.92</td><td>88.20</td><td>-31.28</td><td>51.08</td><td>5.84</td><td>Peak</td><td>255</td><td>169</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7171.87	56.92	88.20	-31.28	51.08	5.84	Peak	255	169
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7171.87	56.92	88.20	-31.28	51.08	5.84	Peak	255	169														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

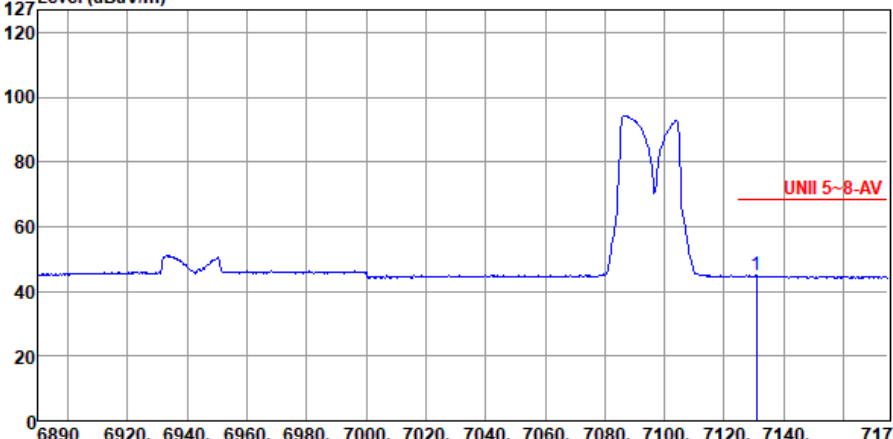Modulation	EHT20	Test Freq. (MHz)	7095																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7130.83</td><td>44.88</td><td>68.20</td><td>-23.32</td><td>39.14</td><td>5.74</td><td>Average</td><td>255</td><td>169</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7130.83	44.88	68.20	-23.32	39.14	5.74	Average	255	169
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7130.83	44.88	68.20	-23.32	39.14	5.74	Average	255	169														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D

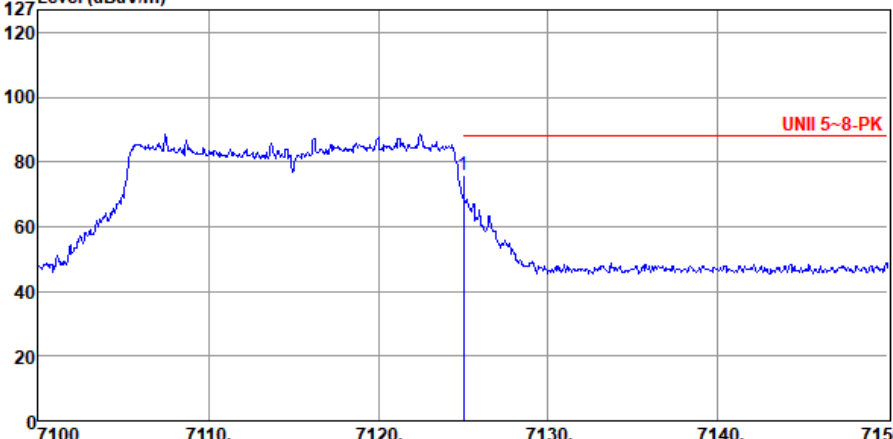Modulation	EHT20	Test Freq. (MHz)	7115																				
Polarization	Horizontal-Peak																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>75.79</td><td>88.20</td><td>-12.41</td><td>70.07</td><td>5.72</td><td>BP-PK</td><td>330</td><td>95</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	75.79	88.20	-12.41	70.07	5.72	BP-PK	330	95
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7125.00	75.79	88.20	-12.41	70.07	5.72	BP-PK	330	95														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

Modulation	EHT20	Test Freq. (MHz)	7115																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m) UNII 5-8-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>65.64</td><td>68.20</td><td>-2.56</td><td>59.92</td><td>5.72</td><td>BP-AV</td><td>330</td><td>95</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	65.64	68.20	-2.56	59.92	5.72	BP-AV	330	95
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7125.00	65.64	68.20	-2.56	59.92	5.72	BP-AV	330	95														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

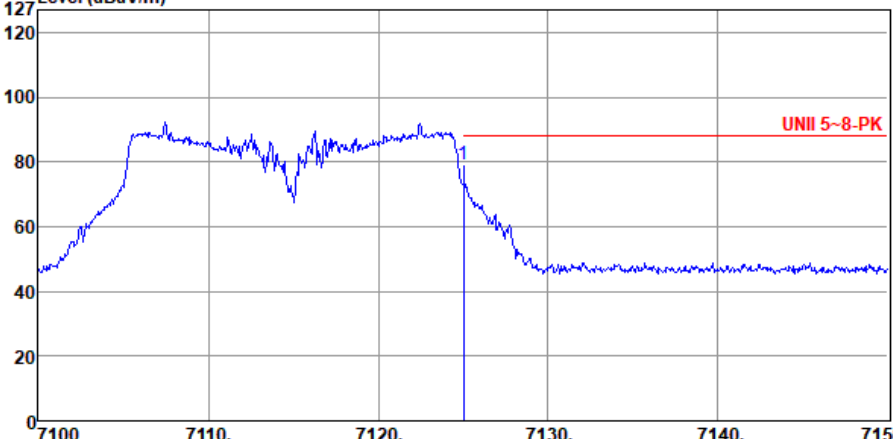Modulation	EHT20	Test Freq. (MHz)	7115																				
Polarization	Vertical-Peak																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>79.13</td><td>88.20</td><td>-9.07</td><td>73.41</td><td>5.72</td><td>BP-PK</td><td>228</td><td>163</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	79.13	88.20	-9.07	73.41	5.72	BP-PK	228	163
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7125.00	79.13	88.20	-9.07	73.41	5.72	BP-PK	228	163														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

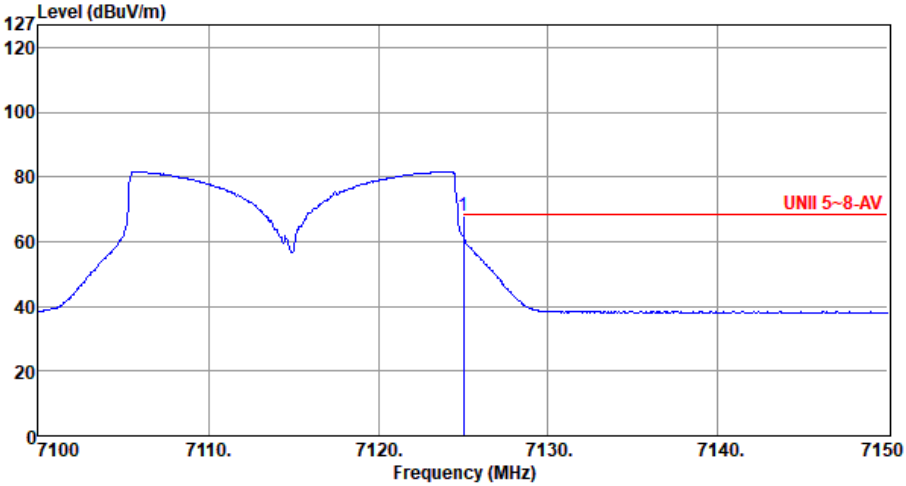Modulation	EHT20	Test Freq. (MHz)	7115																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz)																							
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>67.80</td><td>68.20</td><td>-0.40</td><td>62.08</td><td>5.72</td><td>BP-AV</td><td>228</td><td>163</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	67.80	68.20	-0.40	62.08	5.72	BP-AV	228	163
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7125.00	67.80	68.20	-0.40	62.08	5.72	BP-AV	228	163														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

Modulation	EHT40	Test Freq. (MHz)	5965																			
Polarization	Horizontal-Peak																					
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																						
Level (dBuV/m) <table><tr><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5921.06</td><td>54.34</td><td>88.20</td><td>-33.86</td><td>52.69</td><td>1.65</td><td>Peak</td><td>233</td><td>127</td></tr></table>				Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5921.06	54.34	88.20	-33.86	52.69	1.65	Peak	233	127
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5921.06	54.34	88.20	-33.86	52.69	1.65	Peak	233	127													
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																						



Band Edge measurement


Appendix D

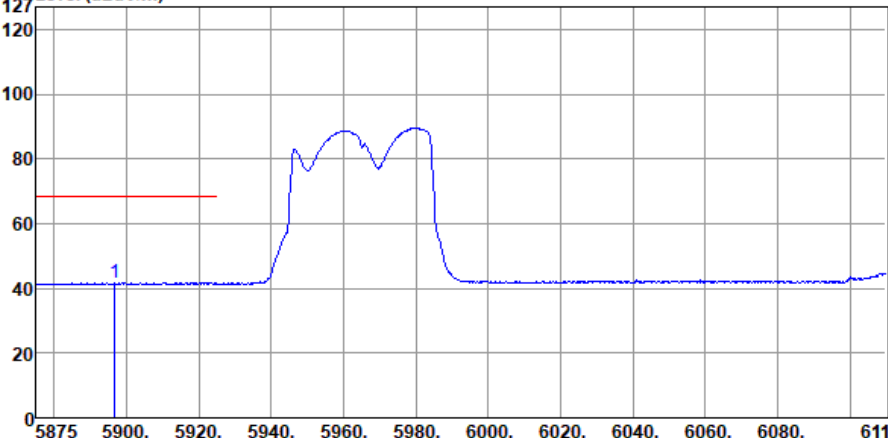Modulation	EHT40	Test Freq. (MHz)	5965																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5896.62</td><td>41.79</td><td>68.20</td><td>-26.41</td><td>40.16</td><td>1.63</td><td>Average</td><td>233</td><td>127</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5896.62	41.79	68.20	-26.41	40.16	1.63	Average	233	127
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5896.62	41.79	68.20	-26.41	40.16	1.63	Average	233	127														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement


Appendix D

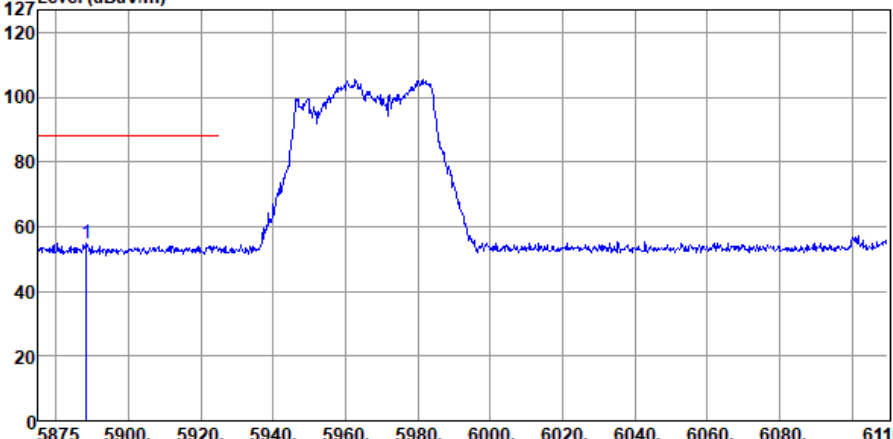Modulation	EHT40	Test Freq. (MHz)	5965																				
Polarization	Vertical-Peak																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5888.40</td><td>54.64</td><td>88.20</td><td>-33.56</td><td>53.06</td><td>1.58</td><td>Peak</td><td>340</td><td>182</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5888.40	54.64	88.20	-33.56	53.06	1.58	Peak	340	182
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5888.40	54.64	88.20	-33.56	53.06	1.58	Peak	340	182														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

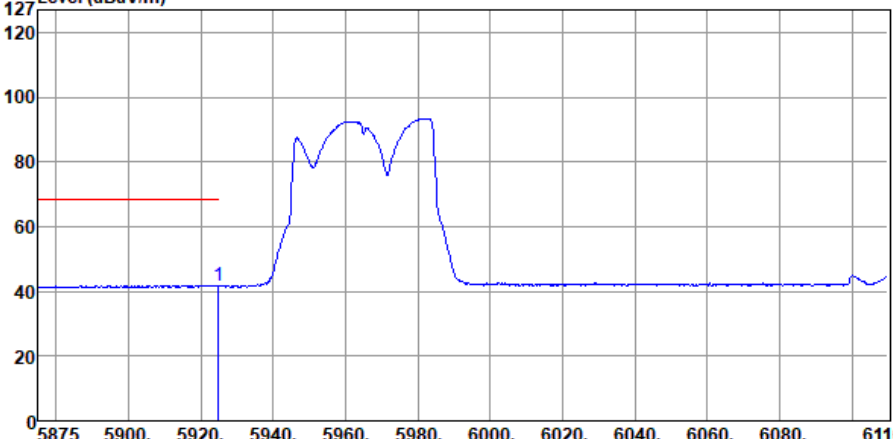Modulation	EHT40	Test Freq. (MHz)	5965																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.82</td><td>41.92</td><td>68.20</td><td>-26.28</td><td>40.27</td><td>1.65</td><td>Average</td><td>340</td><td>182</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5924.82	41.92	68.20	-26.28	40.27	1.65	Average	340	182
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																								
1	5924.82	41.92	68.20	-26.28	40.27	1.65	Average	340	182																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

Modulation	EHT40	Test Freq. (MHz)	7085																				
Polarization	Horizontal-Peak																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7172.15</td><td>57.56</td><td>88.20</td><td>-30.64</td><td>51.72</td><td>5.84</td><td>Peak</td><td>322</td><td>98</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7172.15	57.56	88.20	-30.64	51.72	5.84	Peak	322	98
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7172.15	57.56	88.20	-30.64	51.72	5.84	Peak	322	98														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

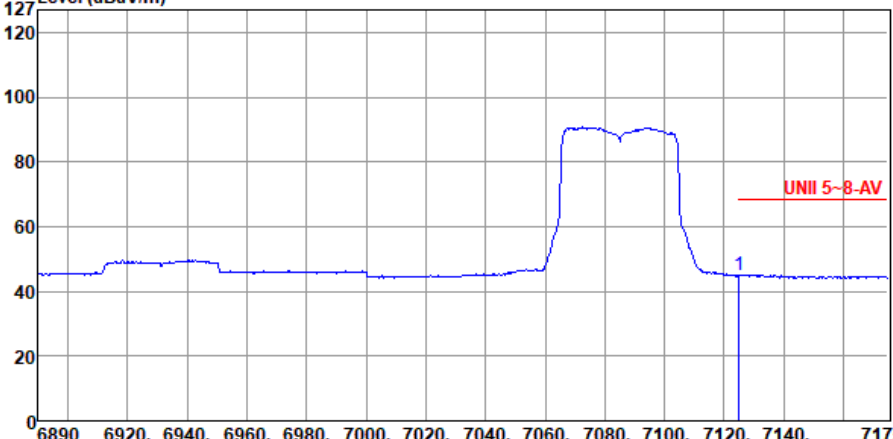Modulation	EHT40	Test Freq. (MHz)	7085																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>45.06</td><td>68.20</td><td>-23.14</td><td>39.34</td><td>5.72</td><td>Average</td><td>322</td><td>98</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	45.06	68.20	-23.14	39.34	5.72	Average	322	98
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7125.00	45.06	68.20	-23.14	39.34	5.72	Average	322	98														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

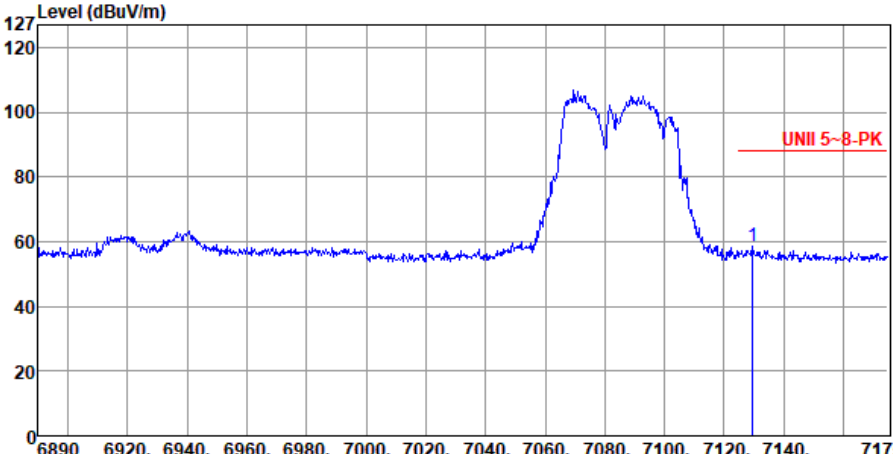Modulation	EHT40	Test Freq. (MHz)	7085																				
Polarization	Vertical-Peak																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7129.69</td><td>58.57</td><td>88.20</td><td>-29.63</td><td>52.83</td><td>5.74</td><td>Peak</td><td>222</td><td>206</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7129.69	58.57	88.20	-29.63	52.83	5.74	Peak	222	206
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7129.69	58.57	88.20	-29.63	52.83	5.74	Peak	222	206														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

Modulation	EHT40	Test Freq. (MHz)	7085																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m) UNII 5-8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7129.69</td><td>46.11</td><td>68.20</td><td>-22.09</td><td>40.37</td><td>5.74</td><td>Average</td><td>222</td><td>206</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7129.69	46.11	68.20	-22.09	40.37	5.74	Average	222	206
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7129.69	46.11	68.20	-22.09	40.37	5.74	Average	222	206														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

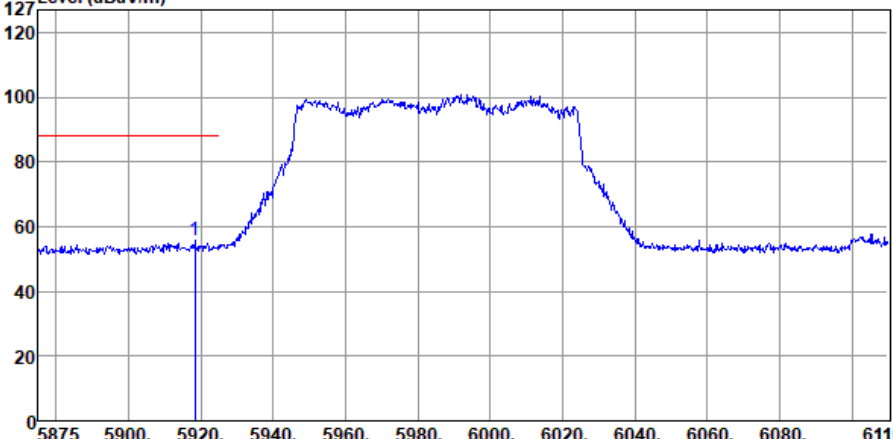Modulation	EHT80	Test Freq. (MHz)	5985																				
Polarization	Horizontal-Peak																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5918.24</td><td>55.73</td><td>88.20</td><td>-32.47</td><td>54.08</td><td>1.65</td><td>Peak</td><td>231</td><td>291</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5918.24	55.73	88.20	-32.47	54.08	1.65	Peak	231	291
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5918.24	55.73	88.20	-32.47	54.08	1.65	Peak	231	291														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

Modulation	EHT80	Test Freq. (MHz)	5985																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5912.13</td><td>42.93</td><td>68.20</td><td>-25.27</td><td>41.28</td><td>1.65</td><td>Average</td><td>231</td><td>291</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5912.13	42.93	68.20	-25.27	41.28	1.65	Average	231	291
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5912.13	42.93	68.20	-25.27	41.28	1.65	Average	231	291														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

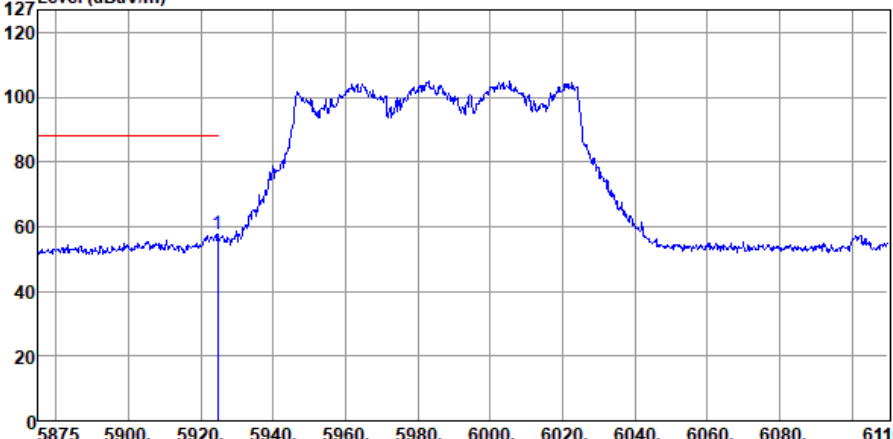Modulation	EHT80	Test Freq. (MHz)	5985																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.59</td><td>57.76</td><td>88.20</td><td>-30.44</td><td>56.11</td><td>1.65</td><td>Peak</td><td>318</td><td>187</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5924.59	57.76	88.20	-30.44	56.11	1.65	Peak	318	187
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																								
1	5924.59	57.76	88.20	-30.44	56.11	1.65	Peak	318	187																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

Modulation	EHT80	Test Freq. (MHz)	5985																																					
Polarization	Vertical-Average																																							
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																								
Level (dBuV/m) <table><tr><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.82</td><td>45.00</td><td>68.20</td><td>-23.20</td><td>43.35</td><td>1.65</td><td>Average</td><td>318</td><td>187</td></tr></table>				Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT	Turn	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		High	Table								cm	deg	1	5924.82	45.00	68.20	-23.20	43.35	1.65	Average	318	187
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT	Turn																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		High	Table																																
							cm	deg																																
1	5924.82	45.00	68.20	-23.20	43.35	1.65	Average	318	187																															
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																								



Band Edge measurement

Appendix D

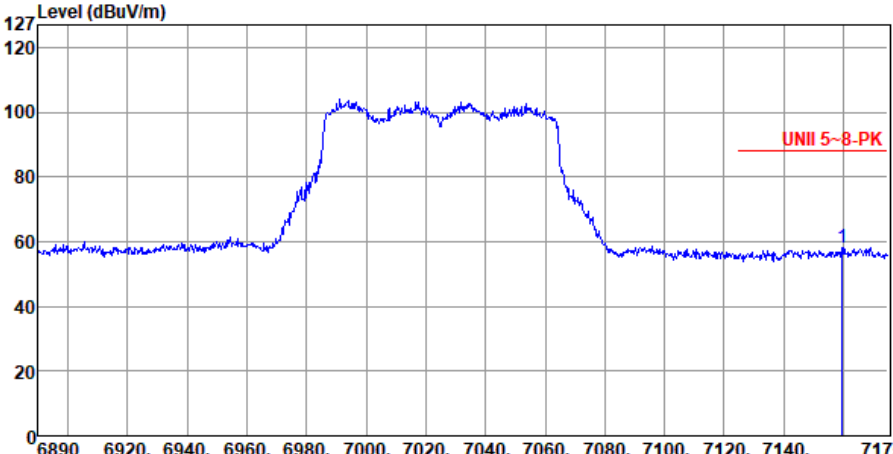Modulation	EHT80	Test Freq. (MHz)	7025																				
Polarization	Horizontal-Peak																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7159.61</td><td>58.20</td><td>88.20</td><td>-30.00</td><td>52.39</td><td>5.81</td><td>Peak</td><td>292</td><td>99</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7159.61	58.20	88.20	-30.00	52.39	5.81	Peak	292	99
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7159.61	58.20	88.20	-30.00	52.39	5.81	Peak	292	99														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							