




Band Edge measurement

Appendix D

Modulation	EHT80	Test Freq. (MHz)	7025																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7166.74</td><td>46.57</td><td>68.20</td><td>-21.63</td><td>40.74</td><td>5.83</td><td>Average</td><td>292</td><td>99</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7166.74	46.57	68.20	-21.63	40.74	5.83	Average	292	99
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7166.74	46.57	68.20	-21.63	40.74	5.83	Average	292	99														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							

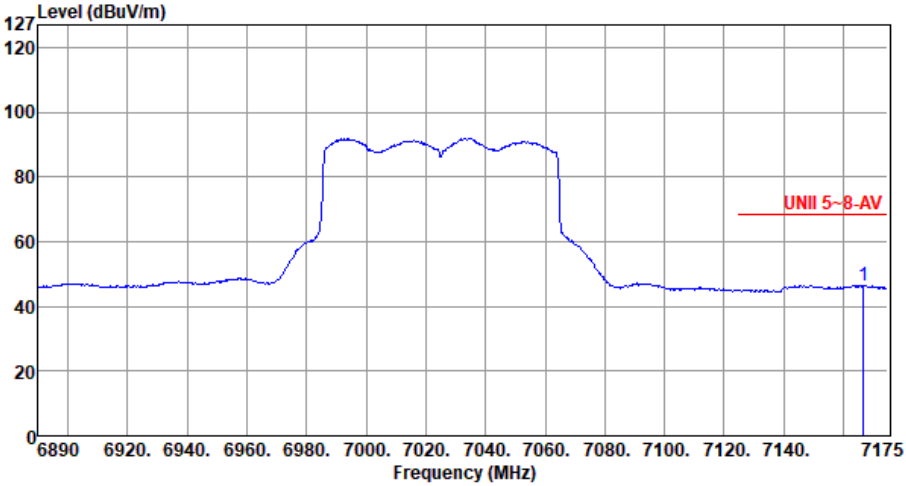

Band Edge measurement

Appendix D

Modulation	EHT80	Test Freq. (MHz)	7025
Polarization	Vertical-Peak		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) UNII 5~8-PK Freq. Emission Limit Margin SA Factor Remark ANT Turn level MHz dBuV/m dBuV/m dB dBuV dB/m 1 7151.06 59.38 88.20 -28.82 53.61 5.77 Peak 236 165			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Band Edge measurement

Appendix D

Modulation	EHT80	Test Freq. (MHz)	7025
Polarization	Vertical-Average		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) <			



Band Edge measurement


Appendix D

Modulation	EHT160	Test Freq. (MHz)	6025																				
Polarization	Horizontal-Peak																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5924.59</td><td>61.14</td><td>88.20</td><td>-27.06</td><td>59.49</td><td>1.65</td><td>Peak</td><td>229</td><td>132</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5924.59	61.14	88.20	-27.06	59.49	1.65	Peak	229	132
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5924.59	61.14	88.20	-27.06	59.49	1.65	Peak	229	132														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

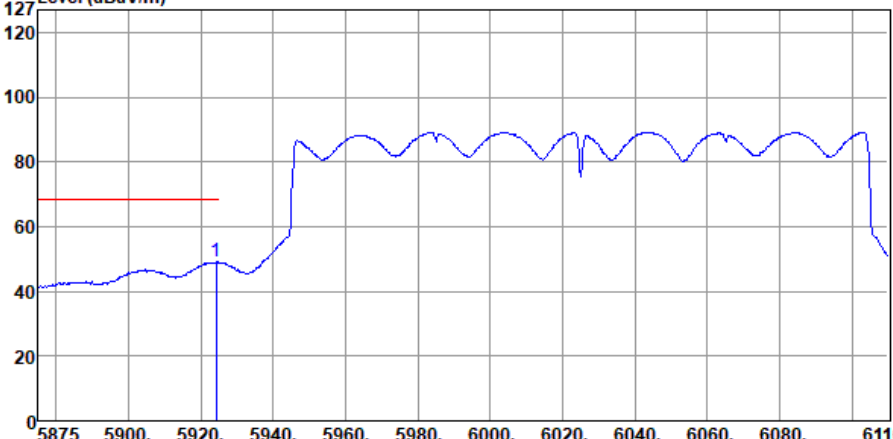Modulation	EHT160	Test Freq. (MHz)	6025																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5924.12</td><td>49.10</td><td>68.20</td><td>-19.10</td><td>47.45</td><td>1.65</td><td>Average</td><td>229</td><td>132</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5924.12	49.10	68.20	-19.10	47.45	1.65	Average	229	132
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5924.12	49.10	68.20	-19.10	47.45	1.65	Average	229	132														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

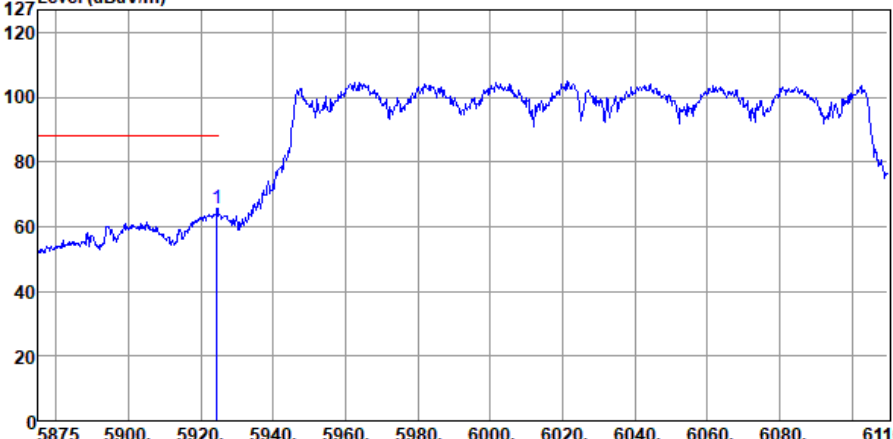Modulation	EHT160	Test Freq. (MHz)	6025																		
Polarization	Vertical-Peak																				
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																					
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5924.35</td><td>65.83</td><td>88.20</td><td>-22.37</td><td>64.18</td><td>1.65</td><td>Peak</td><td>329 187</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).				Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5924.35	65.83	88.20	-22.37	64.18	1.65	Peak	329 187
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg													
1	5924.35	65.83	88.20	-22.37	64.18	1.65	Peak	329 187													



Band Edge measurement

Appendix D

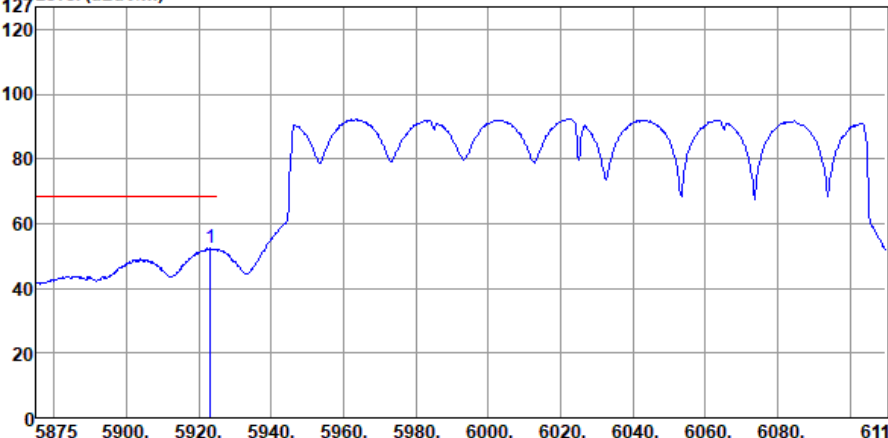Modulation	EHT160	Test Freq. (MHz)	6025																																								
Polarization	Vertical-Average																																										
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5923.18</td><td>52.39</td><td>68.20</td><td>-15.81</td><td>50.74</td><td>1.65</td><td>Average</td><td>329</td><td>187</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT	Turn		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		High	Table									cm	deg	1	5923.18	52.39	68.20	-15.81	50.74	1.65	Average	329	187
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT	Turn																																		
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		High	Table																																		
								cm	deg																																		
1	5923.18	52.39	68.20	-15.81	50.74	1.65	Average	329	187																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement


Appendix D

Modulation	EHT160	Test Freq. (MHz)	6985
Polarization	Horizontal-Peak		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m) UNII 5-8-PK Freq. Emission Limit Margin SA Factor Remark ANT Turn level MHz dBuV/m dBuV/m dB reading dB/m cm Table deg 1 7134.25 60.90 88.20 -27.30 55.16 5.74 Peak 216 108			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Band Edge measurement


Appendix D

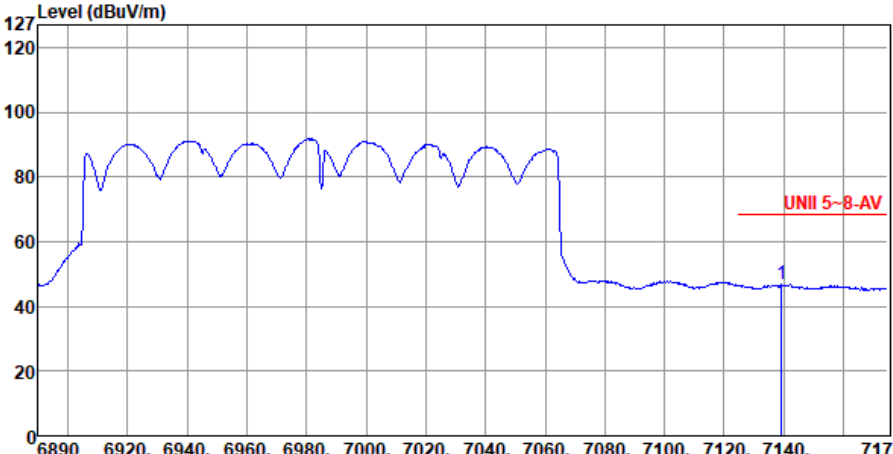Modulation	EHT160	Test Freq. (MHz)	6985																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7139.38</td><td>46.75</td><td>68.20</td><td>-21.45</td><td>41.00</td><td>5.75</td><td>Average</td><td>216</td><td>108</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7139.38	46.75	68.20	-21.45	41.00	5.75	Average	216	108
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7139.38	46.75	68.20	-21.45	41.00	5.75	Average	216	108														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

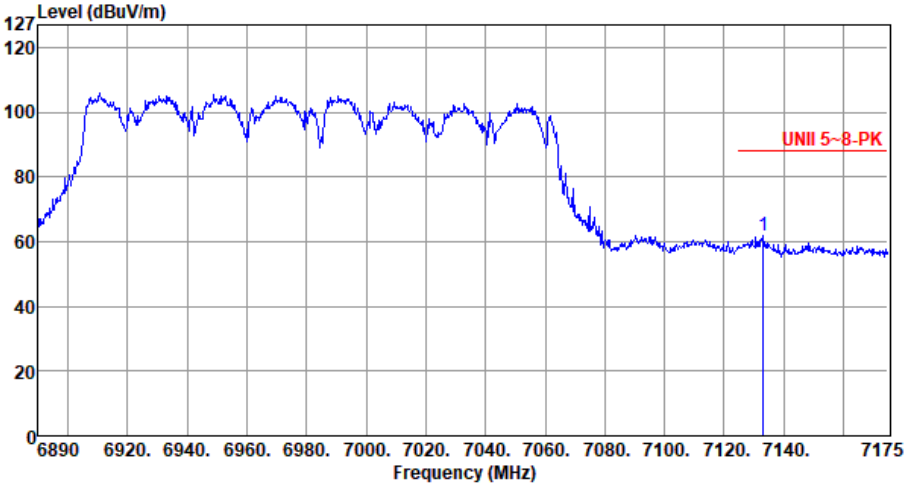Modulation	EHT160	Test Freq. (MHz)	6985																				
Polarization	Vertical-Peak																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7133.11</td><td>61.70</td><td>88.20</td><td>-26.50</td><td>55.96</td><td>5.74</td><td>Peak</td><td>112</td><td>201</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7133.11	61.70	88.20	-26.50	55.96	5.74	Peak	112	201
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7133.11	61.70	88.20	-26.50	55.96	5.74	Peak	112	201														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

Modulation	EHT160	Test Freq. (MHz)	6985																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7130.26</td><td>49.00</td><td>68.20</td><td>-19.20</td><td>43.26</td><td>5.74</td><td>Average</td><td>112</td><td>201</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7130.26	49.00	68.20	-19.20	43.26	5.74	Average	112	201
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7130.26	49.00	68.20	-19.20	43.26	5.74	Average	112	201														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement


Appendix D

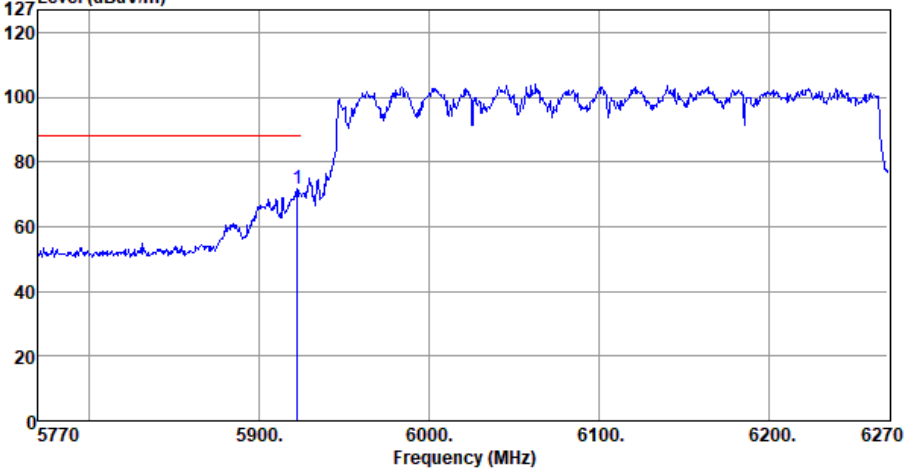Modulation	EHT320	Test Freq. (MHz)	6105																				
Polarization	Horizontal-Peak																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5922.50</td><td>71.91</td><td>88.20</td><td>-16.29</td><td>70.26</td><td>1.65</td><td>Peak</td><td>179</td><td>315</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5922.50	71.91	88.20	-16.29	70.26	1.65	Peak	179	315
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5922.50	71.91	88.20	-16.29	70.26	1.65	Peak	179	315														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

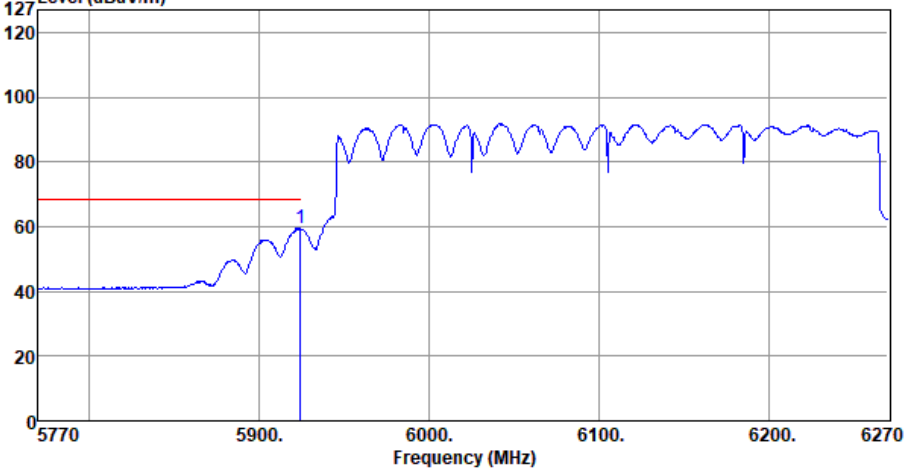Modulation	EHT320	Test Freq. (MHz)	6105																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5924.00</td><td>59.68</td><td>68.20</td><td>-8.52</td><td>58.03</td><td>1.65</td><td>Average</td><td>179</td><td>315</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5924.00	59.68	68.20	-8.52	58.03	1.65	Average	179	315
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5924.00	59.68	68.20	-8.52	58.03	1.65	Average	179	315														



Band Edge measurement

Appendix D

Modulation	EHT320	Test Freq. (MHz)	6105
Polarization	Vertical-Peak		
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	EHT320	Test Freq. (MHz)	6105																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>60.52</td><td>68.20</td><td>-7.68</td><td>58.86</td><td>1.66</td><td>Average</td><td>168</td><td>284</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	60.52	68.20	-7.68	58.86	1.66	Average	168	284
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5925.00	60.52	68.20	-7.68	58.86	1.66	Average	168	284														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

Modulation	EHT320	Test Freq. (MHz)	6905																				
Polarization	Horizontal-Peak																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m) UNII 5-8-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7210.00</td><td>69.10</td><td>88.20</td><td>-19.10</td><td>63.15</td><td>5.95</td><td>Peak</td><td>314</td><td>92</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7210.00	69.10	88.20	-19.10	63.15	5.95	Peak	314	92
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7210.00	69.10	88.20	-19.10	63.15	5.95	Peak	314	92														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

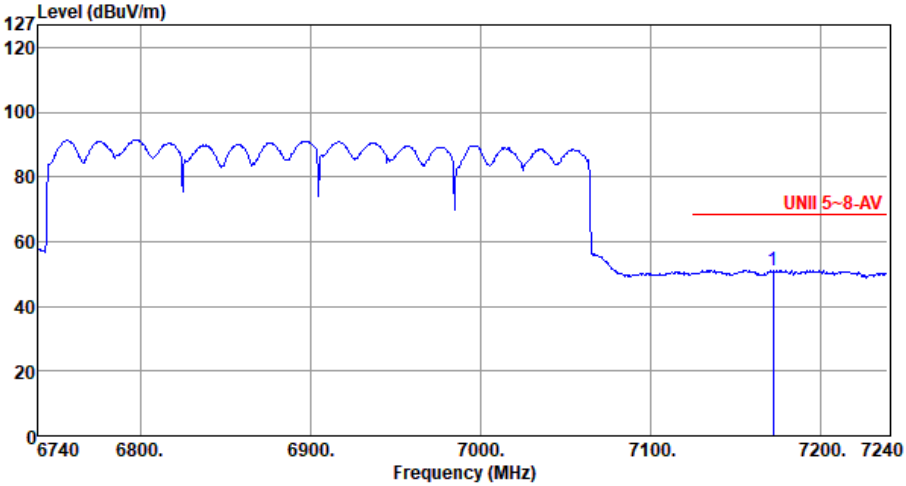Modulation	EHT320	Test Freq. (MHz)	6905																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7172.50</td><td>51.26</td><td>68.20</td><td>-16.94</td><td>45.42</td><td>5.84</td><td>Average</td><td>314</td><td>92</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7172.50	51.26	68.20	-16.94	45.42	5.84	Average	314	92
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7172.50	51.26	68.20	-16.94	45.42	5.84	Average	314	92														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

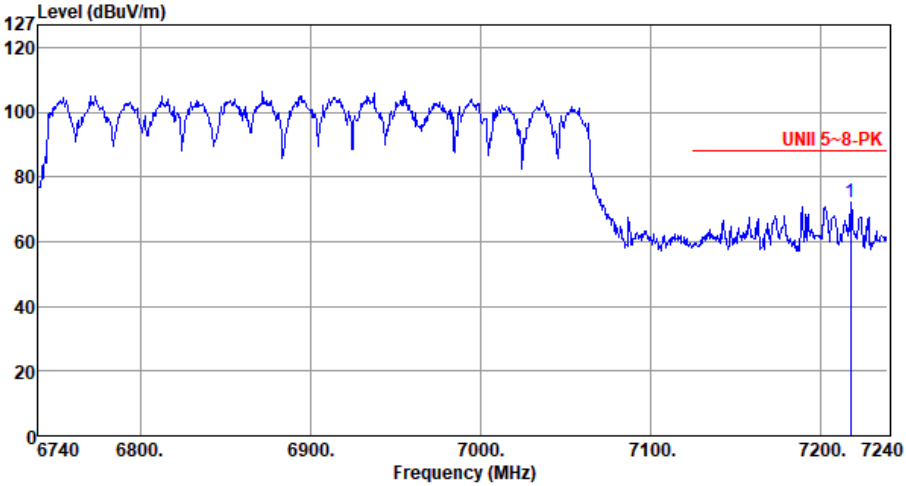Modulation	EHT320	Test Freq. (MHz)	6905																				
Polarization	Vertical-Peak																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7218.00</td><td>72.19</td><td>88.20</td><td>-16.01</td><td>66.25</td><td>5.94</td><td>Peak</td><td>258</td><td>162</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7218.00	72.19	88.20	-16.01	66.25	5.94	Peak	258	162
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7218.00	72.19	88.20	-16.01	66.25	5.94	Peak	258	162														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

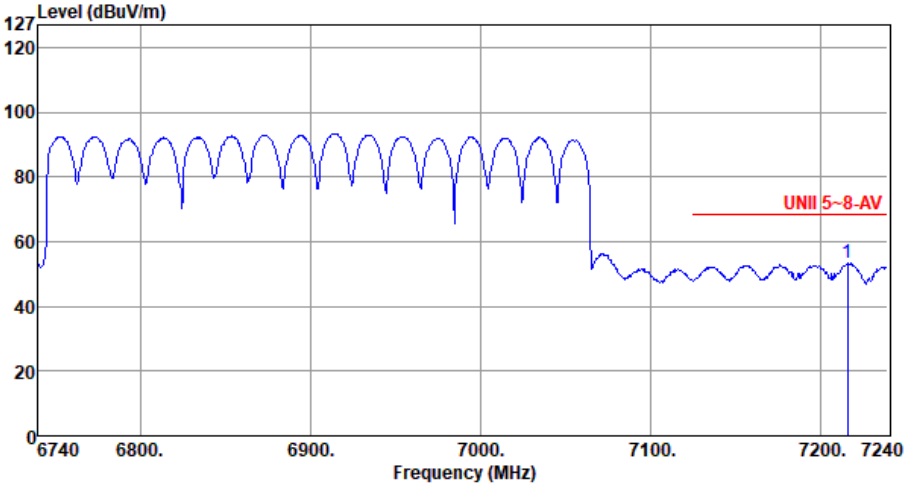Modulation	EHT320	Test Freq. (MHz)	6905																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):27 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7216.00</td><td>53.33</td><td>68.20</td><td>-14.87</td><td>47.39</td><td>5.94</td><td>Average</td><td>258</td><td>162</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7216.00	53.33	68.20	-14.87	47.39	5.94	Average	258	162
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7216.00	53.33	68.20	-14.87	47.39	5.94	Average	258	162														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	6.42239G	-9.37	6.4592G	-58.88	-49.37	-9.51	1
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	6.38862G	-4.46	6.4914G	-53.43	-44.46	-8.97	1
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	6.02016G	-4.08	6.1722G	-48.43	-44.08	-4.35	2
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	6.01701G	0.51	6.297G	-44.26	-39.49	-4.77	1
802.11be EHT320_Nss1,(MCS0)_2TX	Pass	6.1945G	2.59	6.617G	-43.06	-37.41	-5.65	2
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	6.44369G	-9.51	6.4819G	-58.74	-49.51	-9.23	1
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	6.42742G	-4.38	6.3744G	-53.94	-44.38	-9.56	1
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	6.461G	-3.57	6.613G	-48.52	-43.57	-4.95	2
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	6.84871G	-9.51	6.903G	-58.48	-49.51	-8.97	1
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	6.82722G	-4.54	6.9412G	-52.76	-44.54	-8.22	1
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	6.75063G	-3.87	6.9658G	-48.55	-43.87	-4.68	2
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	6.48742G	0.39	6.8058G	-44.54	-39.61	-4.93	1
802.11be EHT320_Nss1,(MCS0)_2TX	Pass	6.2827G	2.48	6.953G	-43.28	-37.52	-5.76	1
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	7.10691G	-16.11	7.1615G	-58.43	-56.11	-2.32	1
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	6.90722G	-4.83	7.0098G	-52.57	-44.83	-7.74	1
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	6.82984G	-3.77	7.0042G	-48.28	-43.77	-4.51	2
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	6.74908G	0.20	6.501G	-45.57	-39.80	-5.77	1
802.11be EHT320_Nss1,(MCS0)_2TX	Pass	6.7532G	2.68	7.4234G	-40.82	-37.32	-3.50	2

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.96399G	-9.21	5.9973G	-59.36	-49.21	-10.15	1
5955MHz	Pass	5.96269G	-9.05	6.0045G	-59.72	-49.05	-10.67	2
6175MHz	Pass	6.1725G	-9.53	6.2211G	-59.21	-49.53	-9.68	1
6175MHz	Pass	6.18379G	-9.28	6.2242G	-59.26	-49.28	-9.98	2
6415MHz	Pass	6.42239G	-9.37	6.4592G	-58.88	-49.37	-9.51	1
6415MHz	Pass	6.42399G	-9.16	6.4586G	-58.94	-49.16	-9.78	2
6435MHz	Pass	6.44369G	-9.51	6.4819G	-58.74	-49.51	-9.23	1
6435MHz	Pass	6.44339G	-9.03	6.4834G	-58.83	-49.03	-9.80	2
6475MHz	Pass	6.48309G	-9.12	6.5099G	-58.80	-49.04	-9.76	1
6475MHz	Pass	6.48299G	-8.64	6.4297G	-59.07	-48.64	-10.43	2
6515MHz	Pass	6.50721G	-9.43	6.4779G	-58.80	-49.43	-9.37	1
6515MHz	Pass	6.50601G	-9.03	6.476G	-58.70	-49.03	-9.67	2
6535MHz	Pass	6.52591G	-9.60	6.498G	-58.68	-49.60	-9.08	1
6535MHz	Pass	6.54379G	-9.19	6.4991G	-58.59	-49.19	-9.40	2
6715MHz	Pass	6.72339G	-9.42	6.7547G	-59.81	-49.42	-10.39	1
6715MHz	Pass	6.70701G	-8.96	6.7583G	-59.42	-48.96	-10.46	2
6855MHz Straddle 6.525-6.875GHz	Pass	6.84871G	-9.51	6.903G	-58.48	-49.51	-8.97	1
6855MHz Straddle 6.525-6.875GHz	Pass	6.84681G	-9.29	6.9038G	-58.28	-49.29	-8.99	2
6875MHz Straddle 6.875-7.125GHz	Pass	6.86621G	-9.57	6.9235G	-58.29	-49.57	-8.72	1
6875MHz Straddle 6.875-7.125GHz	Pass	6.88359G	-9.21	6.9197G	-58.02	-49.21	-8.81	2
6895MHz	Pass	6.88621G	-9.66	6.86G	-57.93	-49.66	-8.27	1
6895MHz	Pass	6.90369G	-9.36	6.9414G	-58.02	-49.36	-8.66	2
7015MHz	Pass	7.00731G	-9.56	6.9776G	-57.72	-49.56	-8.16	1
7015MHz	Pass	7.0174G	-8.96	6.9674G	-57.97	-48.96	-9.01	2
7095MHz	Pass	7.08711G	-9.80	7.1405G	-58.62	-49.80	-8.82	1
7095MHz	Pass	7.08751G	-9.12	7.1413G	-58.52	-49.12	-9.40	2
7115MHz	Pass	7.10691G	-16.11	7.1615G	-58.43	-56.11	-2.32	1
7115MHz	Pass	7.10881G	-15.56	7.1578G	-58.55	-55.56	-2.99	2
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.98218G	-4.35	6.0358G	-54.29	-44.35	-9.94	1
5965MHz	Pass	5.98278G	-4.06	6.0524G	-54.33	-44.06	-10.27	2
6165MHz	Pass	6.18298G	-4.22	6.2586G	-54.03	-44.22	-9.81	1
6165MHz	Pass	6.18018G	-4.02	6.2544G	-54.04	-44.02	-10.02	2
6405MHz	Pass	6.38862G	-4.46	6.4914G	-53.43	-44.46	-8.97	1
6405MHz	Pass	6.38842G	-4.13	6.5008G	-53.47	-44.13	-9.34	2
6445MHz	Pass	6.42742G	-4.38	6.3744G	-53.94	-44.38	-9.56	1
6445MHz	Pass	6.46238G	-3.92	6.3736G	-53.93	-43.92	-10.01	2
6485MHz	Pass	6.4868G	-3.95	6.3968G	-53.91	-43.95	-9.96	1
6485MHz	Pass	6.47761G	-3.59	6.4152G	-53.85	-43.59	-10.26	2
6525MHz Straddle 6.525-6.875GHz	Pass	6.50722G	-4.36	6.4458G	-53.78	-44.36	-9.42	1
6525MHz Straddle 6.525-6.875GHz	Pass	6.50862G	-4.18	6.4394G	-53.84	-44.18	-9.66	2

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6565MHz	Pass	6.58258G	-4.52	6.4938G	-53.60	-44.52	-9.08	1
6565MHz	Pass	6.57119G	-4.30	6.4932G	-53.55	-44.30	-9.25	2
6725MHz	Pass	6.74158G	-4.36	6.8154G	-53.96	-44.36	-9.60	1
6725MHz	Pass	6.70922G	-3.68	6.8246G	-53.94	-43.68	-10.26	2
6845MHz Straddle 6.525-6.875GHz	Pass	6.82722G	-4.54	6.9412G	-52.76	-44.54	-8.22	1
6845MHz Straddle 6.525-6.875GHz	Pass	6.82702G	-4.11	6.9442G	-52.74	-44.11	-8.63	2
6885MHz Straddle 6.875-7.125GHz	Pass	6.86762G	-4.54	6.985G	-52.49	-44.54	-7.95	1
6885MHz Straddle 6.875-7.125GHz	Pass	6.86842G	-4.32	6.9848G	-52.42	-44.32	-8.10	2
6925MHz	Pass	6.90722G	-4.83	7.0098G	-52.57	-44.83	-7.74	1
6925MHz	Pass	6.90742G	-4.42	7.003G	-52.46	-44.42	-8.04	2
7005MHz	Pass	6.99781G	-4.53	6.932G	-52.89	-44.53	-8.36	1
7005MHz	Pass	6.98722G	-4.00	6.9338G	-52.97	-44.00	-8.97	2
7085MHz	Pass	7.07741G	-4.51	7.007G	-52.58	-44.51	-8.07	1
7085MHz	Pass	7.06762G	-3.65	7.0078G	-52.49	-43.65	-8.84	2
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.01897G	-4.36	6.175G	-49.54	-44.36	-5.18	1
5985MHz	Pass	6.02016G	-4.08	6.1722G	-48.43	-44.08	-4.35	2
6145MHz	Pass	6.18056G	-4.11	6.2946G	-50.07	-44.11	-5.96	1
6145MHz	Pass	6.18216G	-3.83	6.2826G	-48.64	-43.83	-4.81	2
6385MHz	Pass	6.34744G	-4.20	6.577G	-50.41	-44.20	-6.21	1
6385MHz	Pass	6.37261G	-3.67	6.5698G	-48.57	-43.67	-4.90	2
6465MHz	Pass	6.4682G	-4.08	6.6566G	-49.84	-44.08	-5.76	1
6465MHz	Pass	6.461G	-3.57	6.613G	-48.52	-43.57	-4.95	2
6545MHz Straddle 6.525-6.875GHz	Pass	6.58136G	-4.37	6.7346G	-49.88	-44.37	-5.51	1
6545MHz Straddle 6.525-6.875GHz	Pass	6.53741G	-3.72	6.7126G	-48.92	-43.72	-5.20	2
6625MHz	Pass	6.6282G	-4.74	6.817G	-50.08	-44.74	-5.34	1
6625MHz	Pass	6.59423G	-4.03	6.791G	-49.19	-44.03	-5.16	2
6705MHz	Pass	6.74096G	-4.57	6.8634G	-49.93	-44.57	-5.36	1
6705MHz	Pass	6.67263G	-3.89	6.8686G	-48.88	-43.89	-4.99	2
6785MHz	Pass	6.74864G	-4.64	6.943G	-49.81	-44.64	-5.17	1
6785MHz	Pass	6.75063G	-3.87	6.9658G	-48.55	-43.87	-4.68	2
6865MHz Straddle 6.875-7.125GHz	Pass	6.82744G	-4.43	7.0038G	-49.87	-44.43	-5.44	1
6865MHz Straddle 6.875-7.125GHz	Pass	6.82984G	-3.77	7.0042G	-48.28	-43.77	-4.51	2
6945MHz	Pass	6.91023G	-3.92	7.085G	-49.01	-43.92	-5.09	1
6945MHz	Pass	6.93141G	-3.93	7.1042G	-48.99	-43.93	-5.06	2
7025MHz	Pass	6.99383G	-4.54	6.8786G	-50.53	-44.54	-5.99	1
7025MHz	Pass	7.0274G	-3.75	7.2166G	-50.05	-43.75	-6.30	2
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.01701G	0.51	6.297G	-44.26	-39.49	-4.77	1
6025MHz	Pass	6.03299G	0.79	6.2954G	-46.16	-39.21	-6.95	2
6185MHz	Pass	6.20178G	0.79	6.4866G	-44.41	-39.21	-5.20	1
6185MHz	Pass	6.19059G	0.70	6.4746G	-46.27	-39.30	-6.97	2


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6345MHz	Pass	6.27867G	0.38	6.6666G	-45.36	-39.62	-5.74	1
6345MHz	Pass	6.27387G	0.52	6.0338G	-45.95	-39.48	-6.47	2
6505MHz Straddle 6.525-6.875GHz	Pass	6.48742G	0.39	6.8058G	-44.54	-39.61	-4.93	1
6505MHz Straddle 6.525-6.875GHz	Pass	6.49381G	0.37	6.2106G	-45.52	-39.63	-5.89	2
6665MHz	Pass	6.669G	0.25	6.3754G	-44.77	-39.75	-5.02	1
6665MHz	Pass	6.59307G	0.84	6.3434G	-45.33	-39.16	-6.17	2
6825MHz Straddle 6.875-7.125GHz	Pass	6.74908G	0.20	6.501G	-45.57	-39.80	-5.77	1
6825MHz Straddle 6.875-7.125GHz	Pass	6.75387G	0.81	6.493G	-45.26	-39.19	-6.07	2
6985MHz	Pass	6.90988G	0.34	6.6826G	-45.45	-39.66	-5.79	1
6985MHz	Pass	6.96902G	0.52	6.6658G	-45.56	-39.48	-6.08	2
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.1993G	2.38	6.6154G	-44.07	-37.62	-6.45	1
6105MHz	Pass	6.1945G	2.59	6.617G	-43.06	-37.41	-5.65	2
6265MHz	Pass	6.2314G	2.58	6.8186G	-44.37	-37.42	-6.95	1
6265MHz	Pass	6.2474G	3.20	6.7802G	-42.69	-36.80	-5.89	2
6425MHz Straddle 6.525-6.875GHz	Pass	6.2827G	2.48	6.953G	-43.28	-37.52	-5.76	1
6425MHz Straddle 6.525-6.875GHz	Pass	6.2732G	2.61	6.9498G	-43.24	-37.39	-5.85	2
6585MHz Straddle 6.525-6.875GHz	Pass	6.6058G	2.31	6.1722G	-36.58	-30.48	-6.10	1
6585MHz Straddle 6.525-6.875GHz	Pass	6.5962G	2.43	6.0666G	-44.15	-37.57	-6.58	2
6745MHz Straddle 6.875-7.125GHz	Pass	6.7306G	2.52	7.2618G	-43.45	-37.48	-5.97	1
6745MHz Straddle 6.875-7.125GHz	Pass	6.5979G	3.12	7.2618G	-41.09	-36.88	-4.21	2
6905MHz Straddle 6.875-7.125GHz	Pass	6.7707G	2.22	7.4538G	-43.20	-37.78	-5.42	1
6905MHz Straddle 6.875-7.125GHz	Pass	6.7532G	2.68	7.4234G	-40.82	-37.32	-3.50	2



5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK


5955MHz_TX

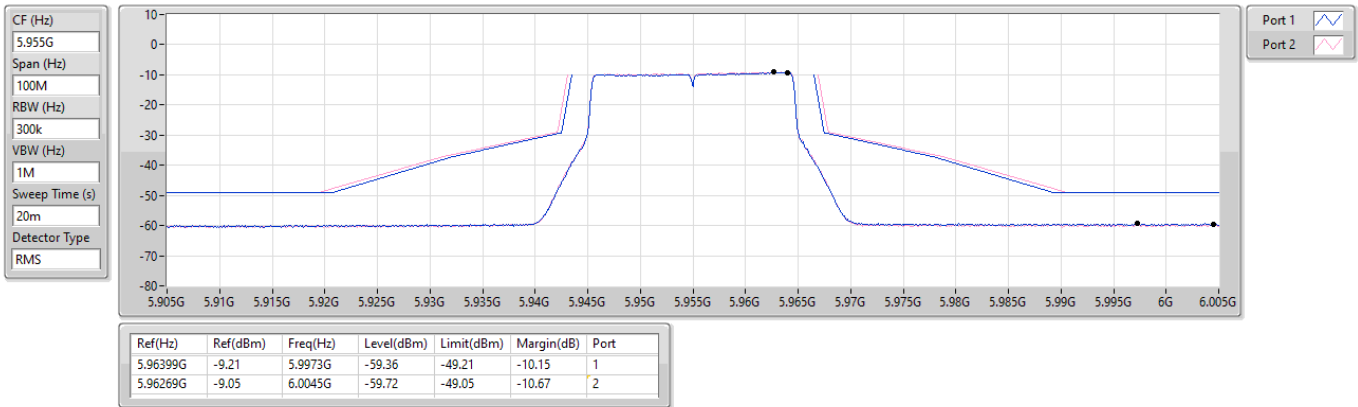

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK


6175MHz_TX

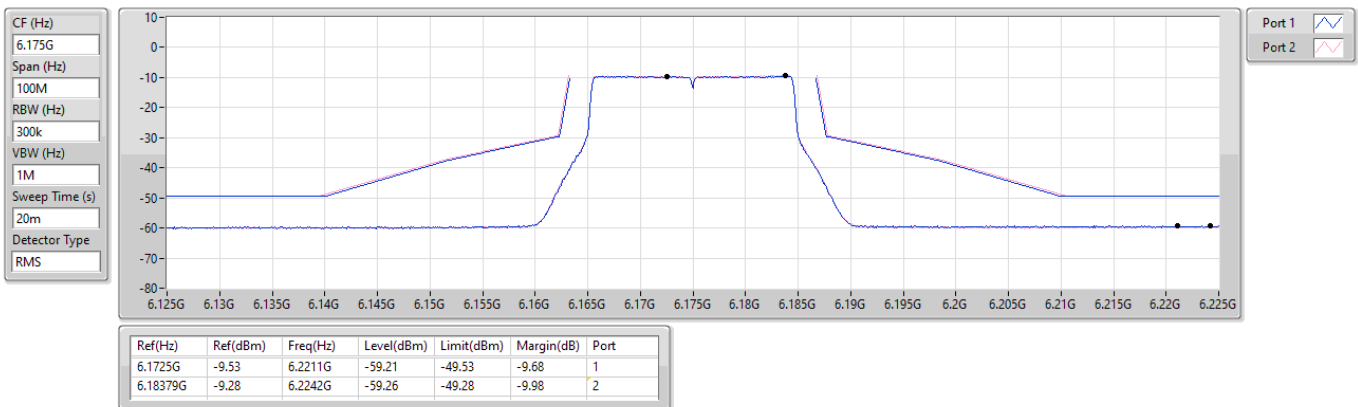

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK


6415MHz_TX

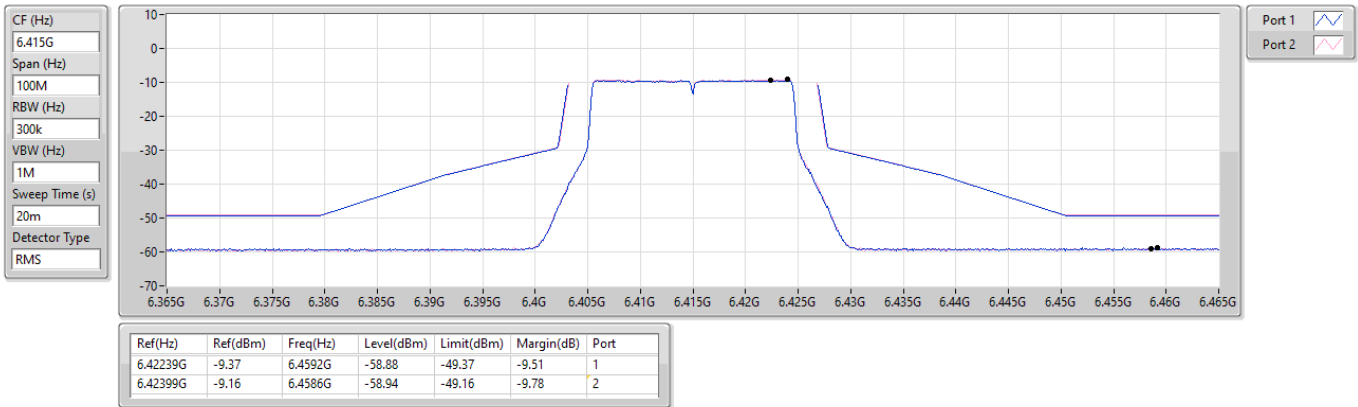

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6435MHz_TX

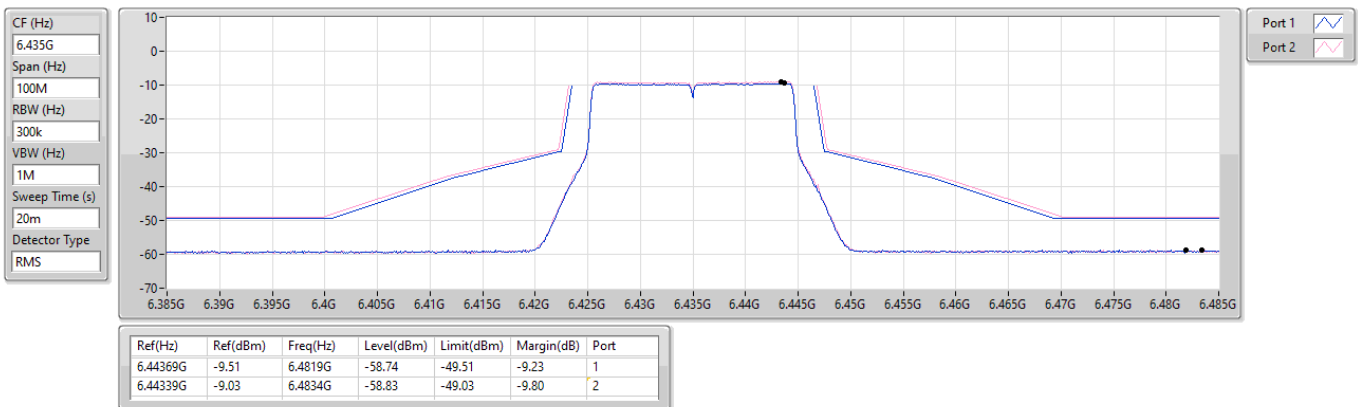




6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK


6475MHz_TX

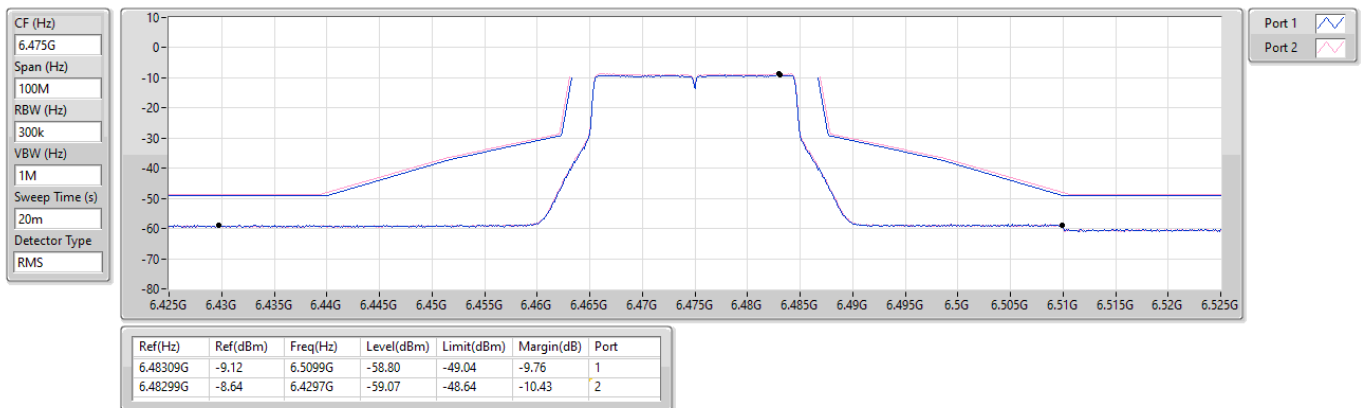

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK


6515MHz_TX

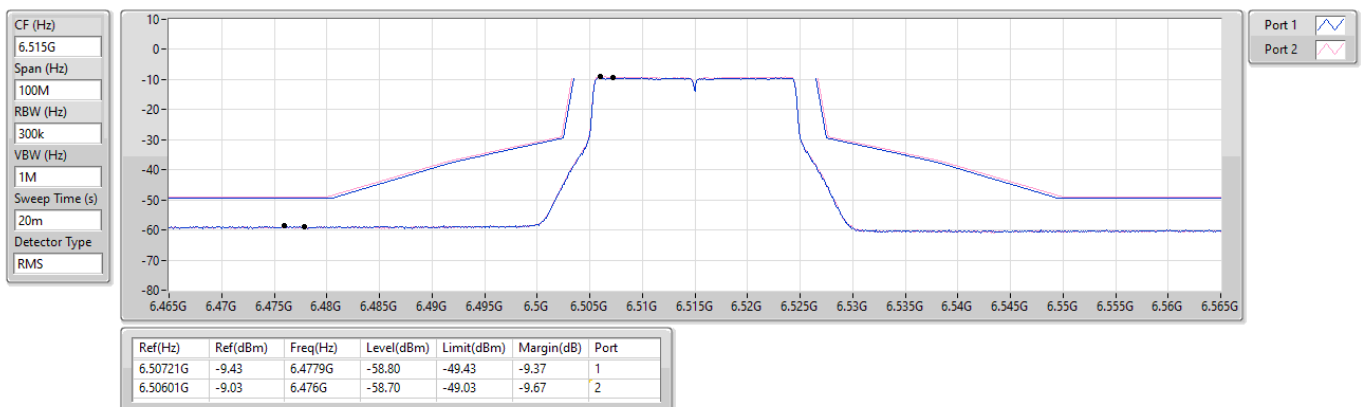

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK


6535MHz_TX

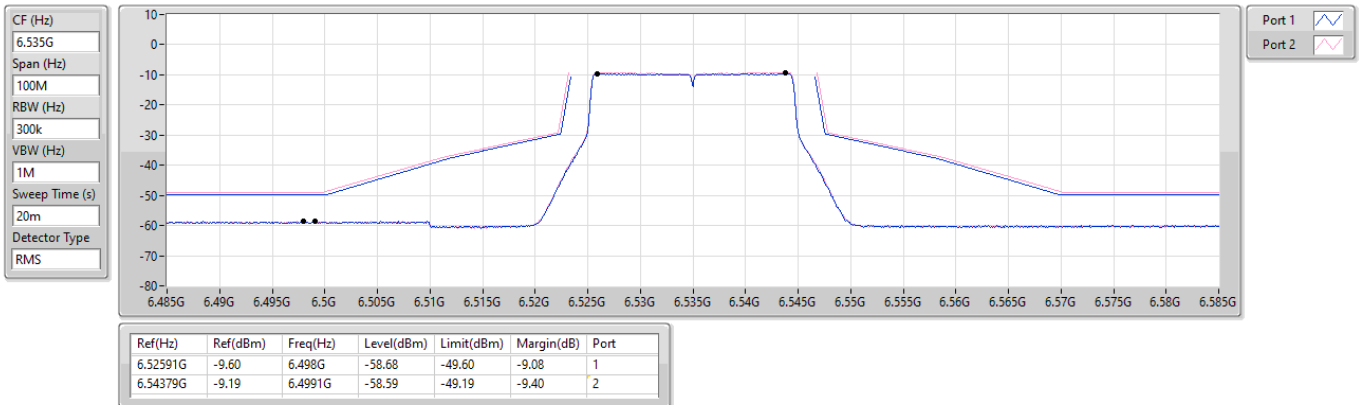

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6715MHz_TX

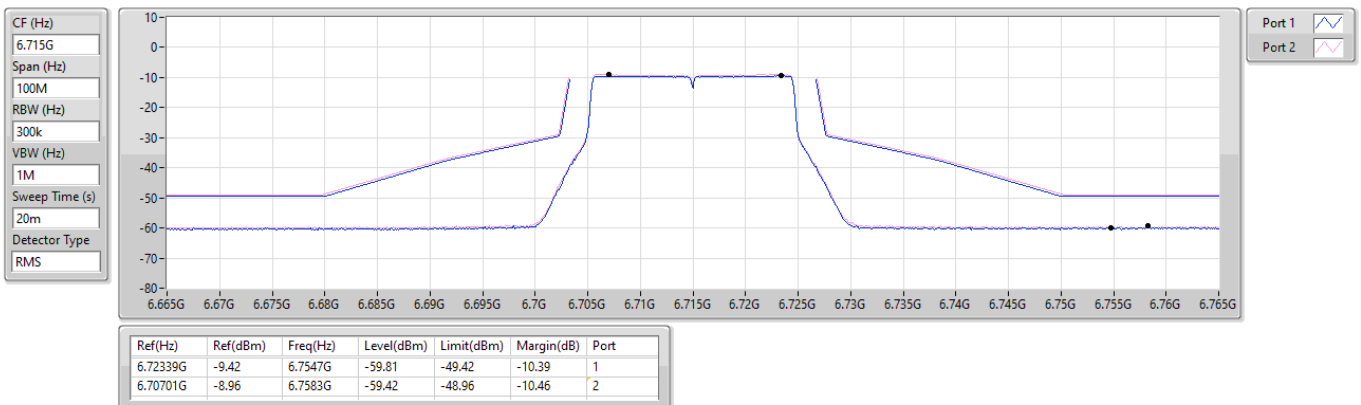




6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK


6855MHz Straddle 6.525-6.875GHz_TX

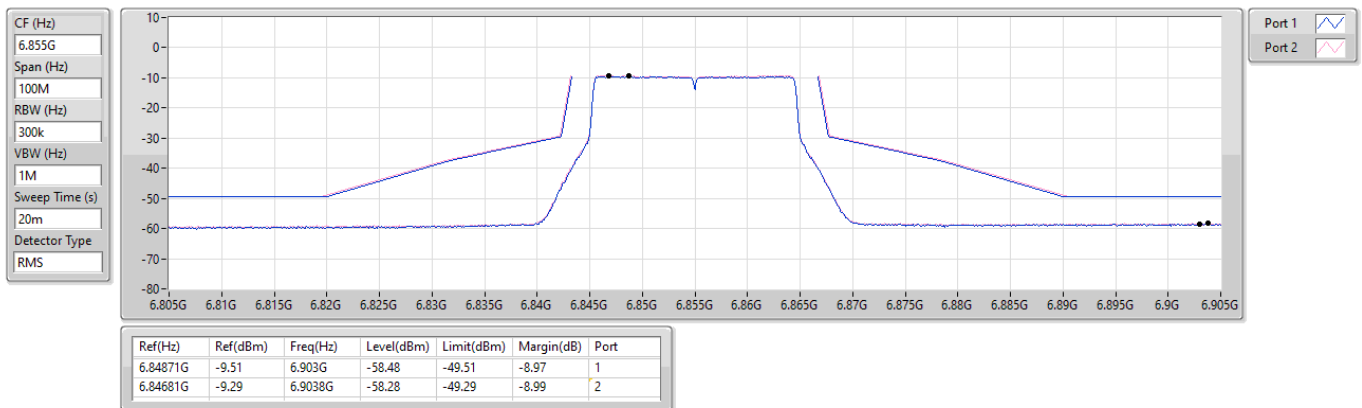

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6875MHz Straddle 6.875-7.125GHz_TX

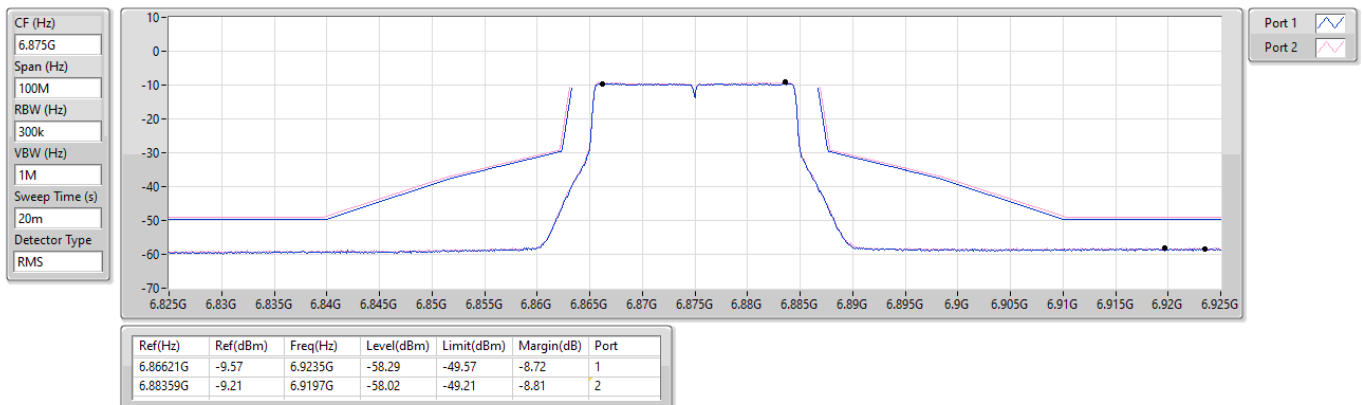




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK


6895MHz_TX

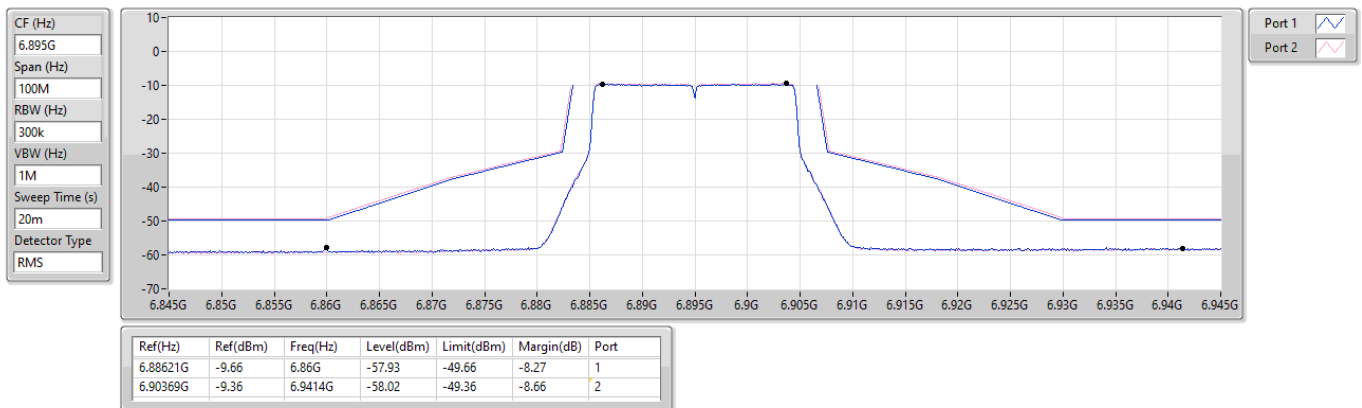

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

7015MHz_TX

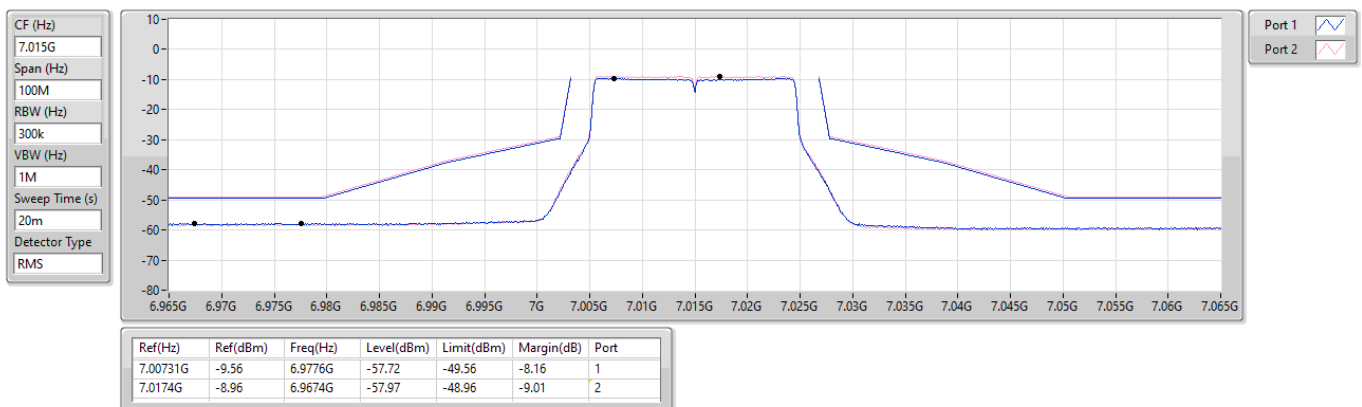




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK


7095MHz_TX

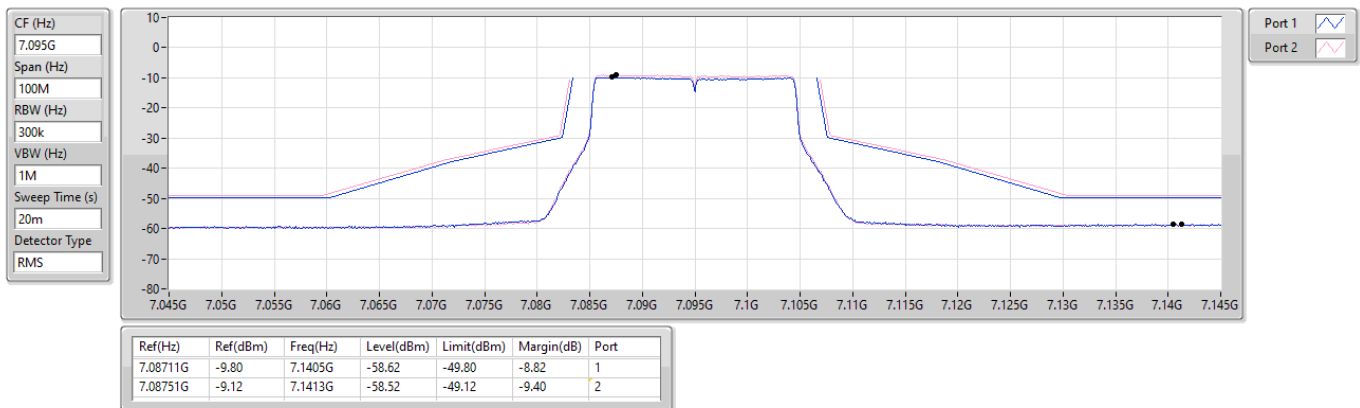

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

7115MHz_TX

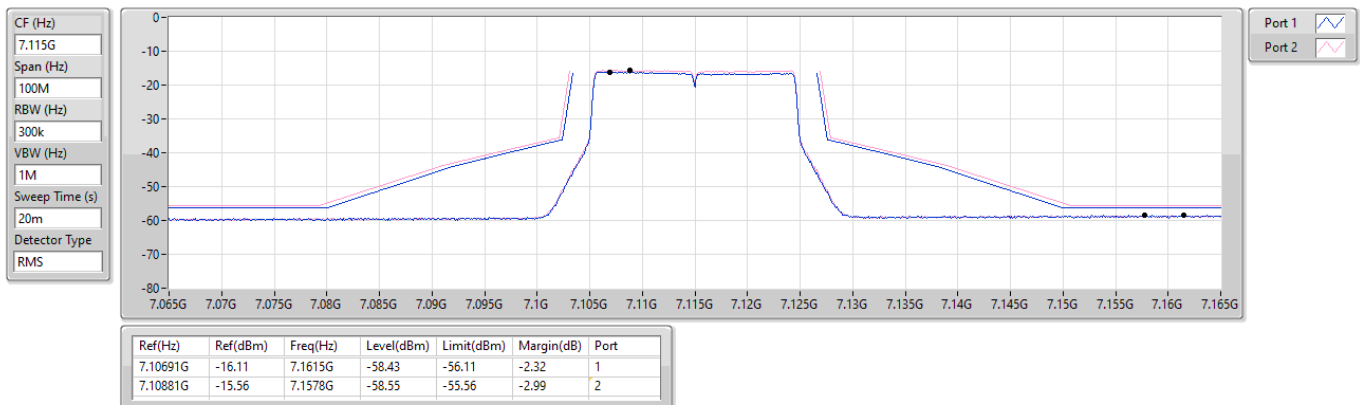



5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK


5965MHz_TX



5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6165MHz_TX

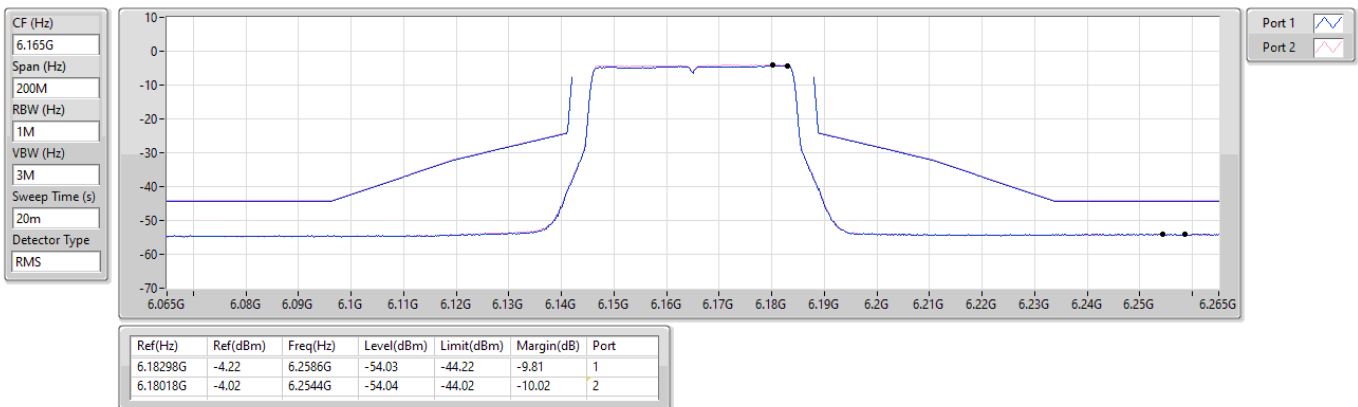




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK


6405MHz_TX

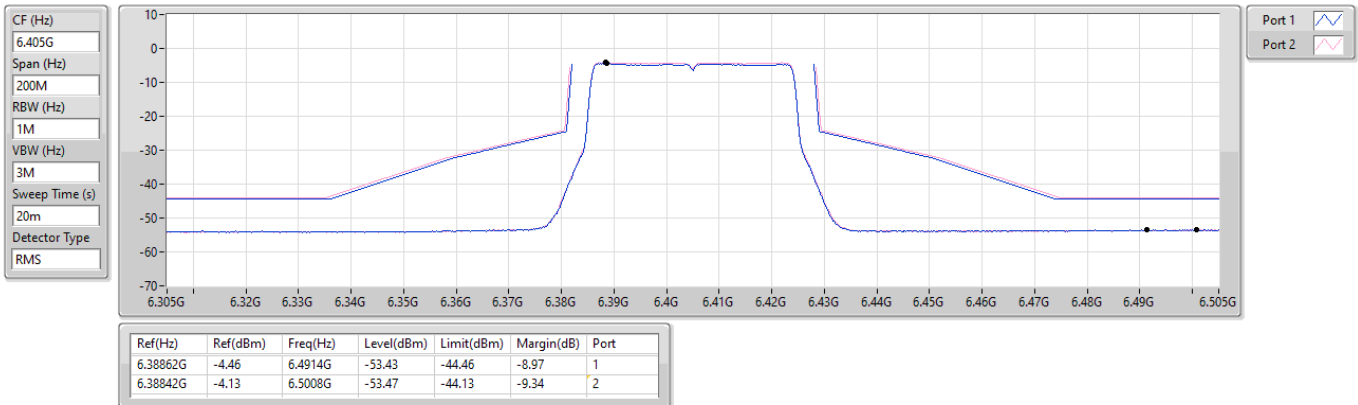

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6445MHz_TX

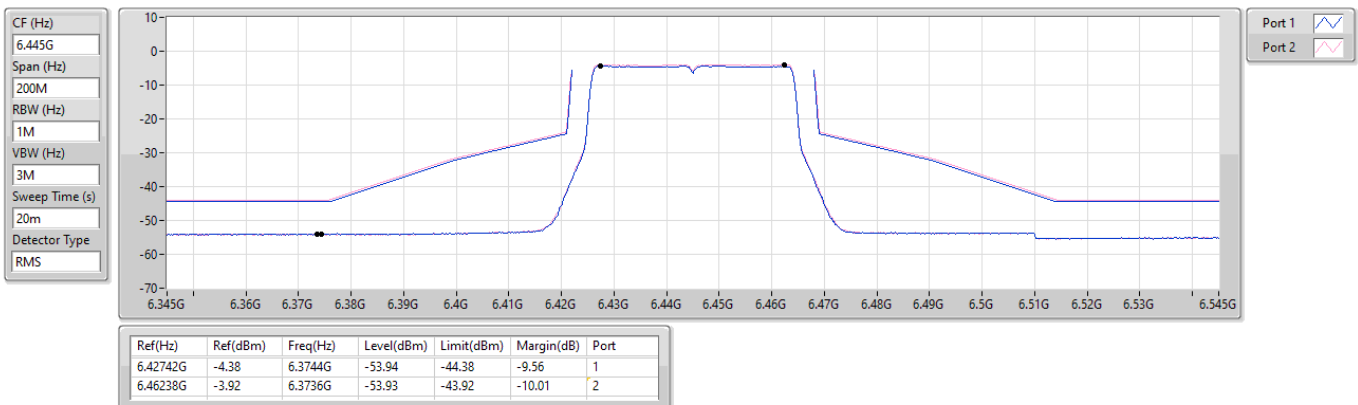




6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK


6485MHz_TX

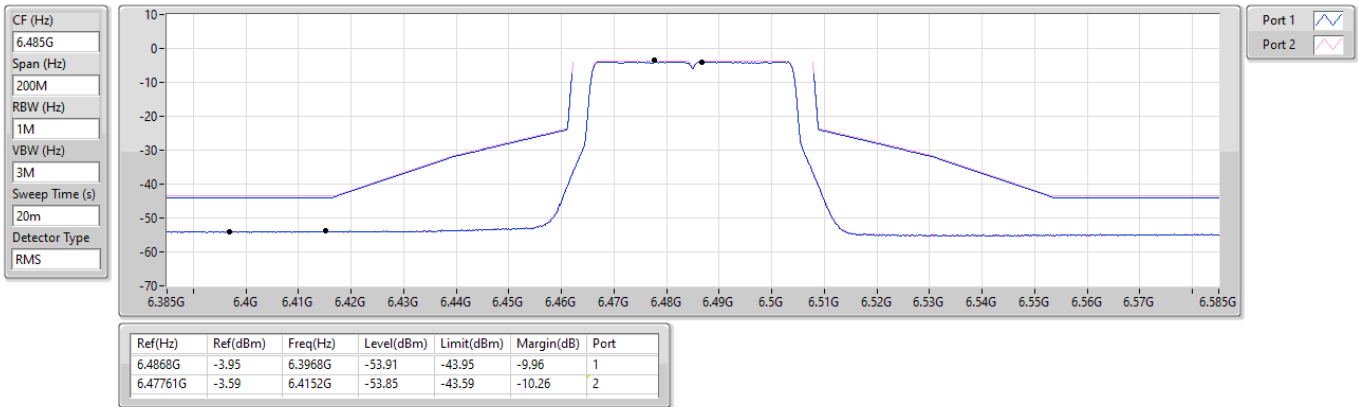

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK


6525MHz Straddle 6.525-6.875GHz_TX

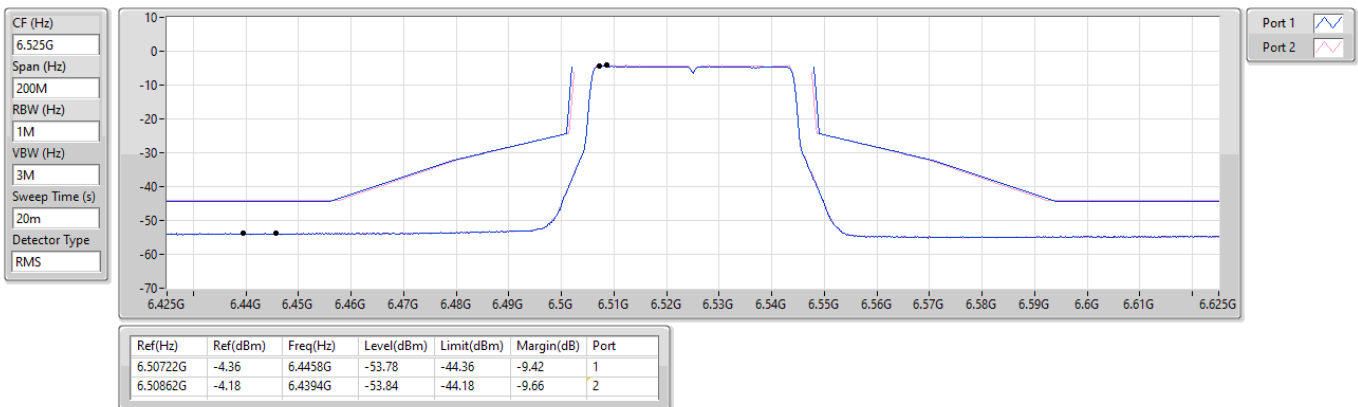

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK


6565MHz_TX

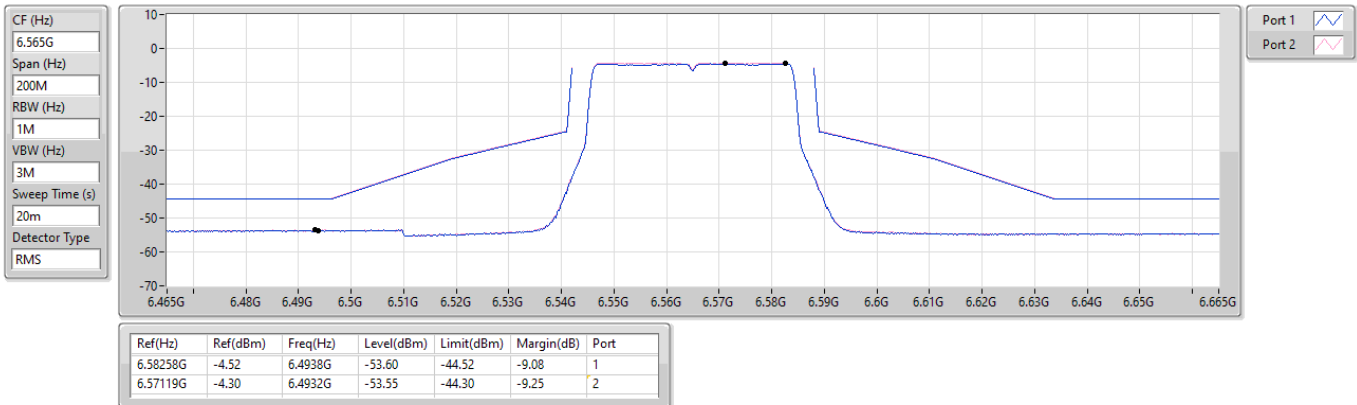

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK


6725MHz_TX

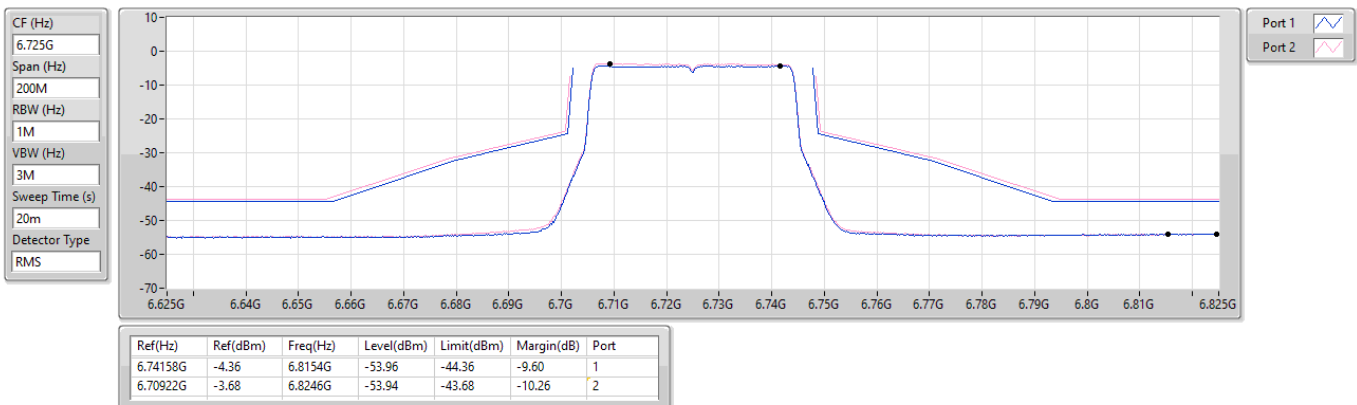

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK


6845MHz Straddle 6.525-6.875GHz_TX

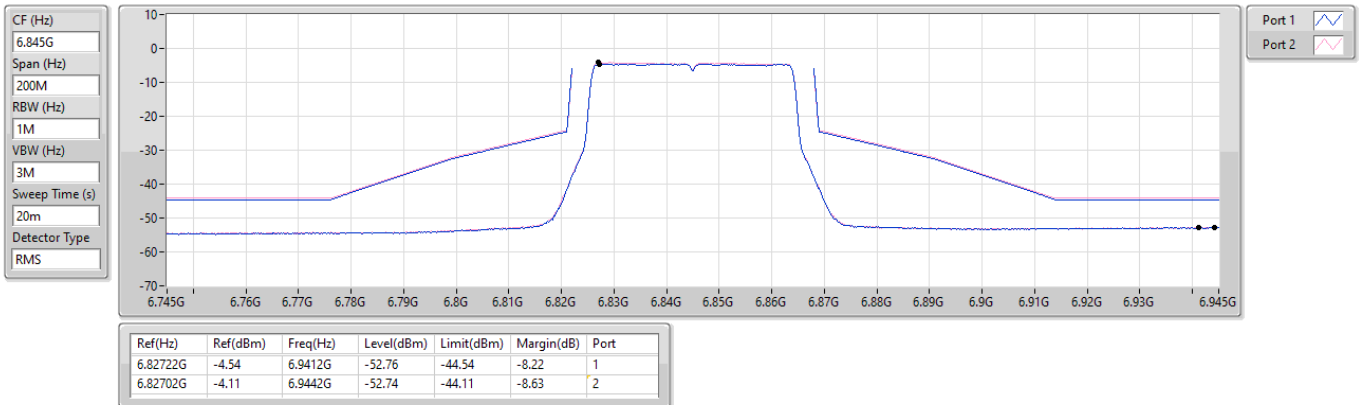

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK


6885MHz Straddle 6.875-7.125GHz_TX

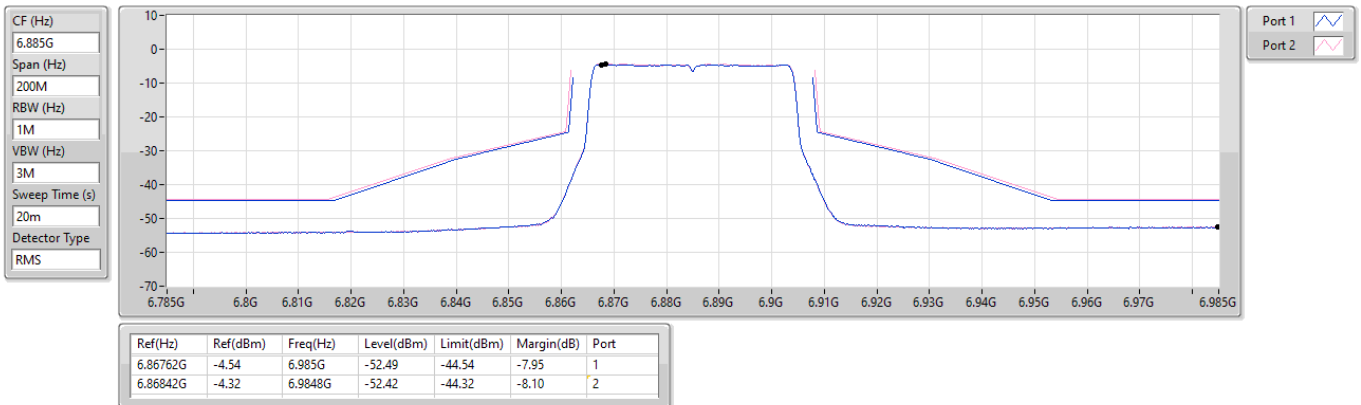

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK


6925MHz_TX

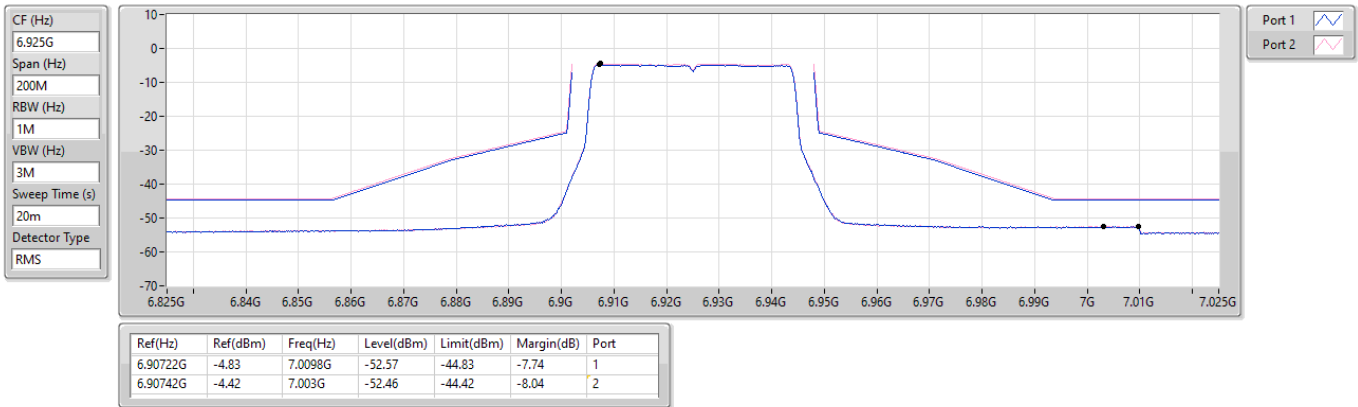

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK


7005MHz_TX

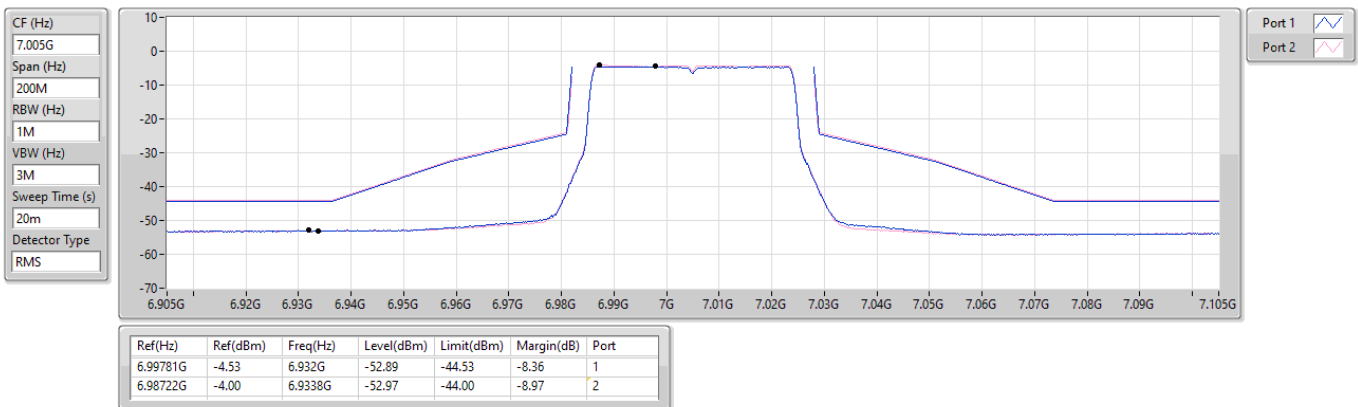

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

7085MHz_TX

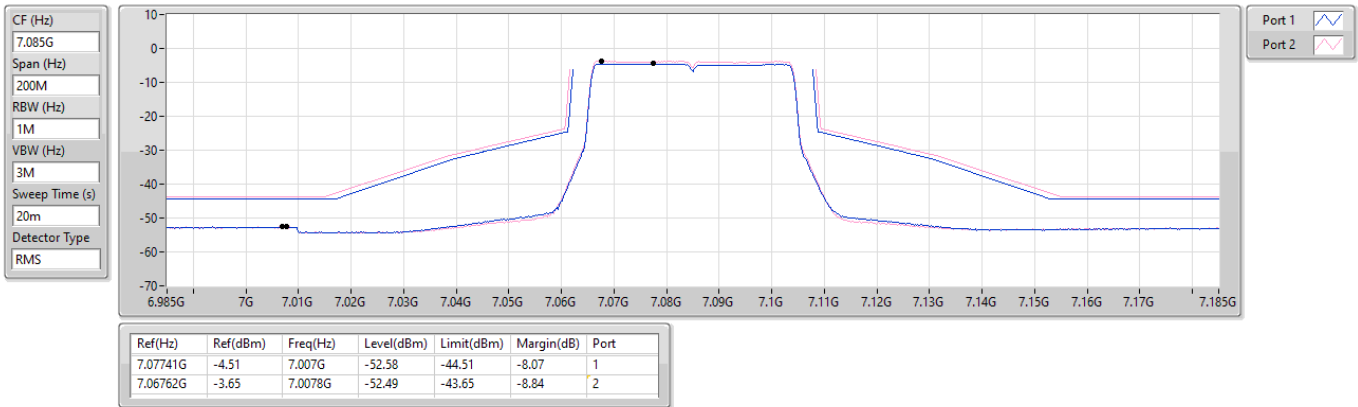

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK


5985MHz_TX



5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK


6145MHz_TX

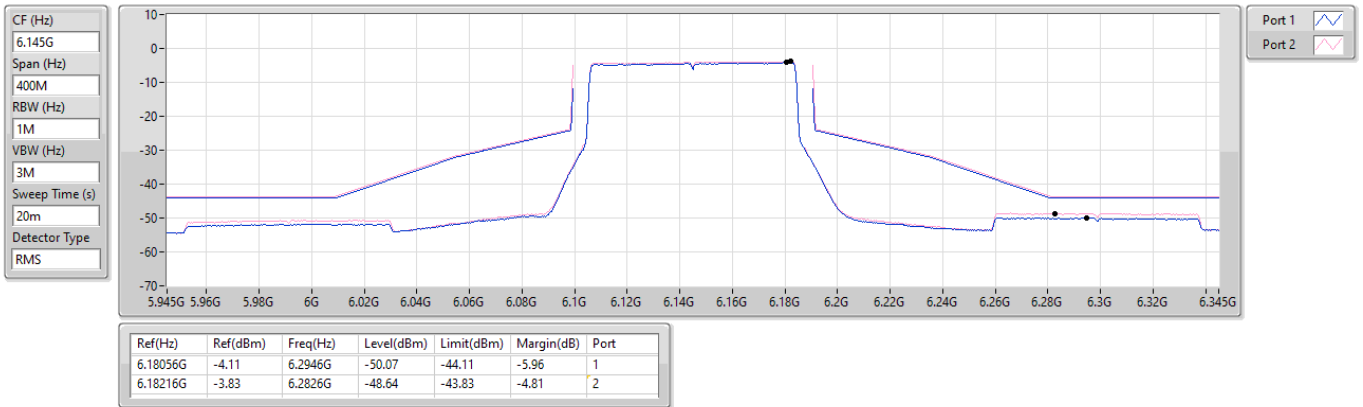

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK


6385MHz_TX

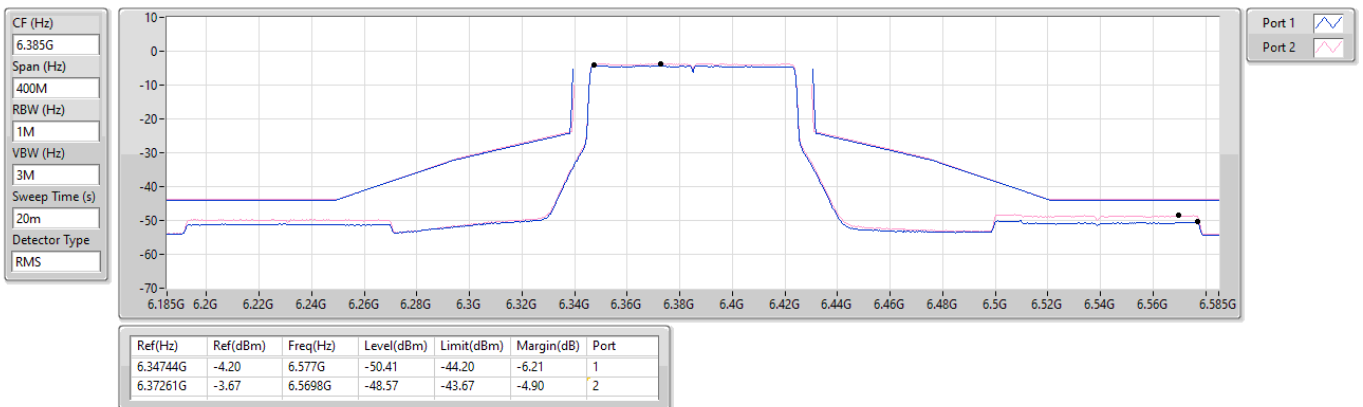

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK


6465MHz_TX

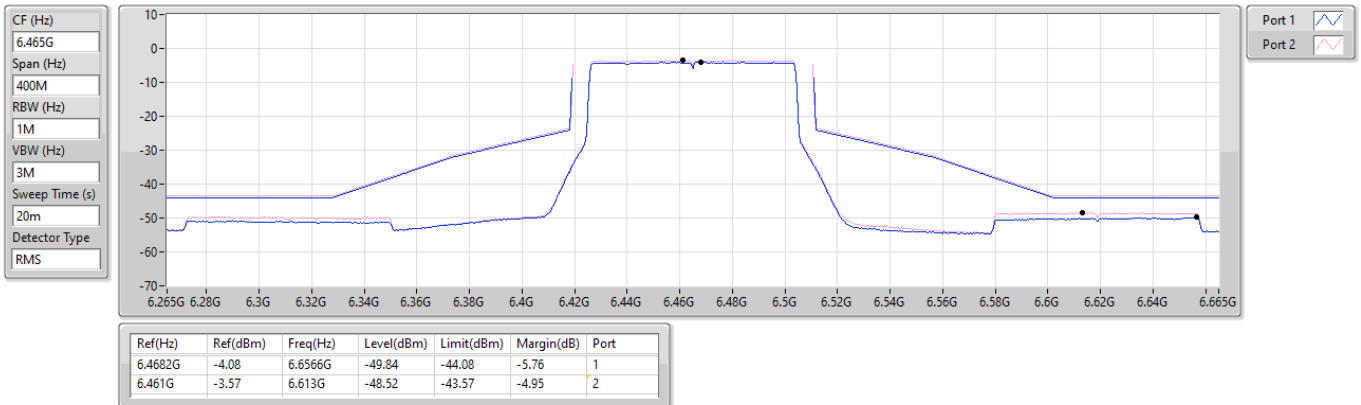

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK


6545MHz Straddle 6.525-6.875GHz_TX

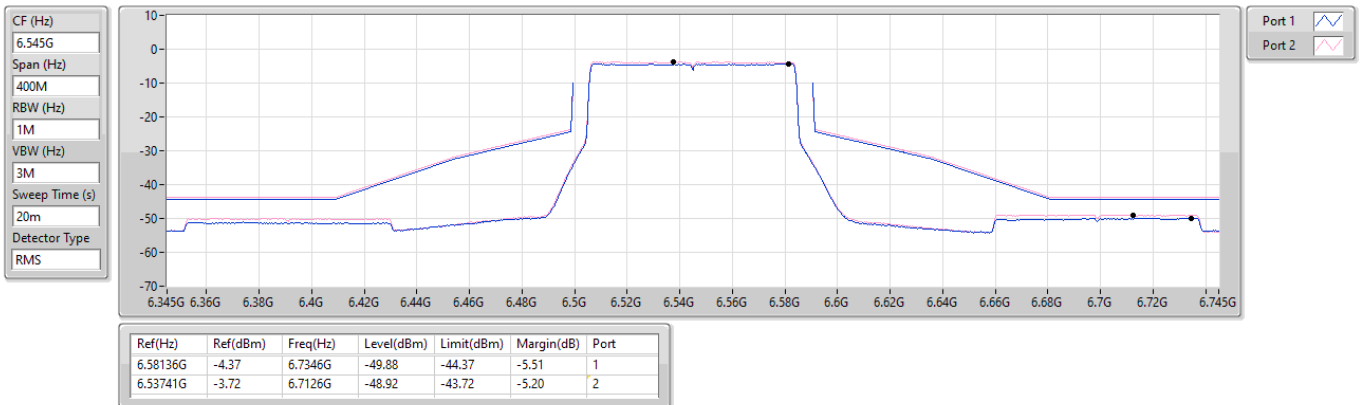

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK


6625MHz_TX

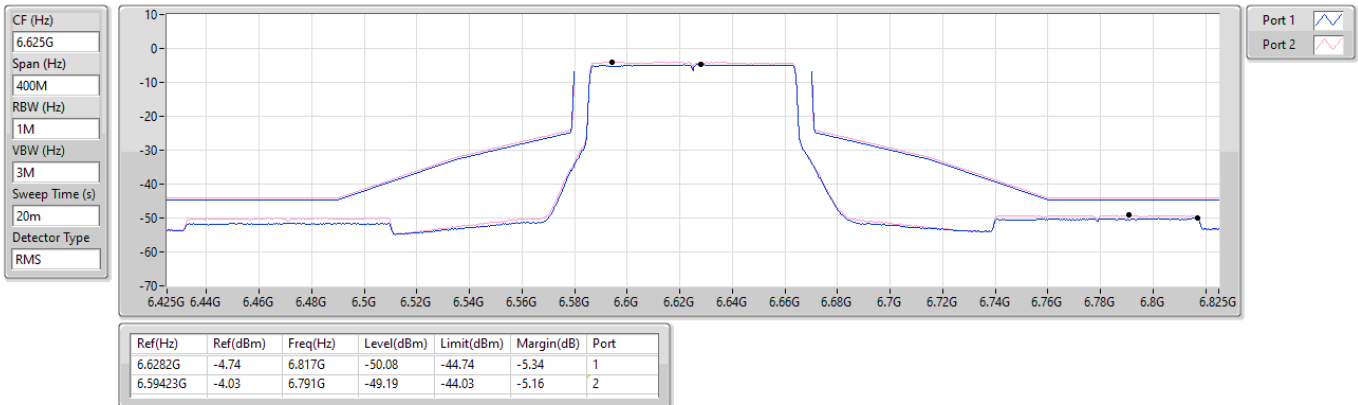

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK


6705MHz_TX

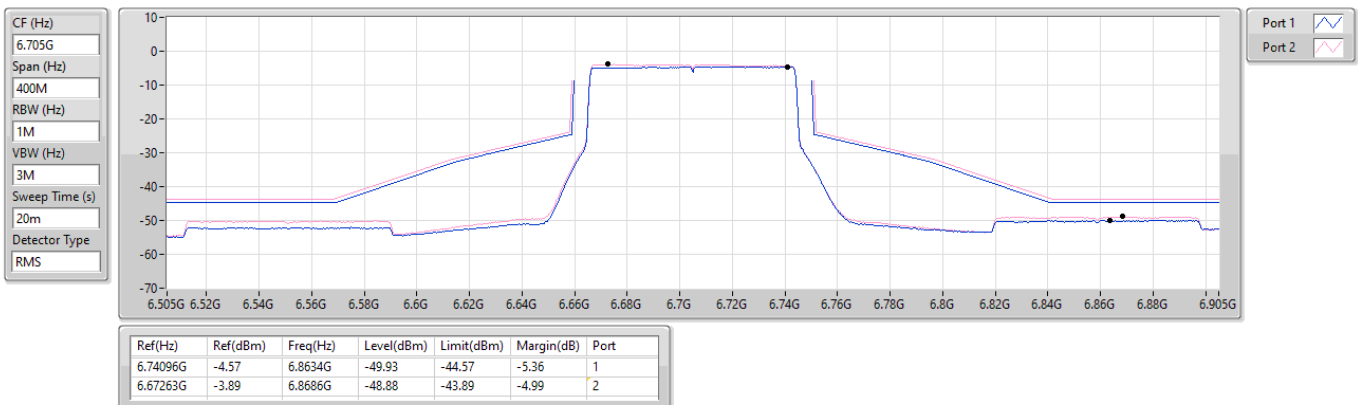

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK


6785MHz_TX

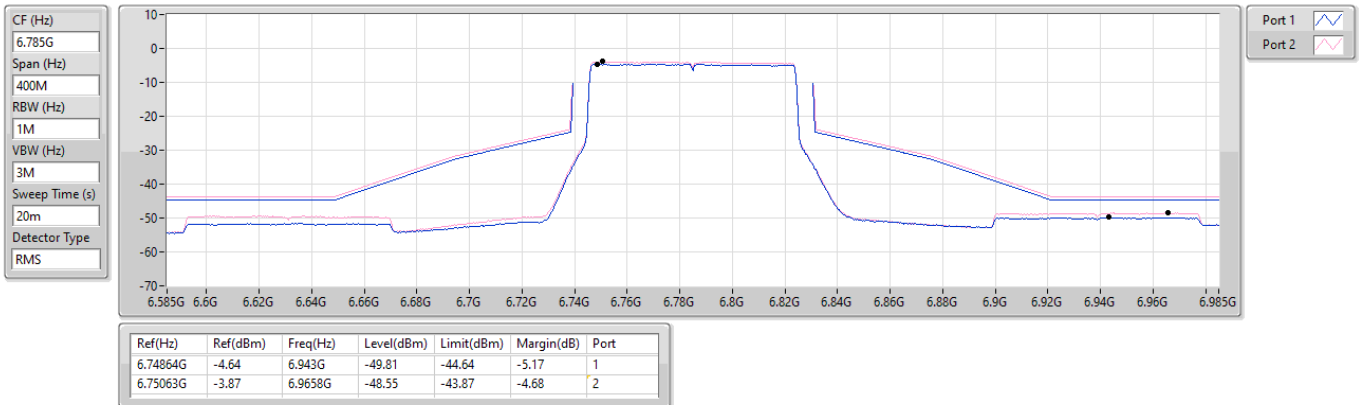

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK


6865MHz Straddle 6.875-7.125GHz_TX

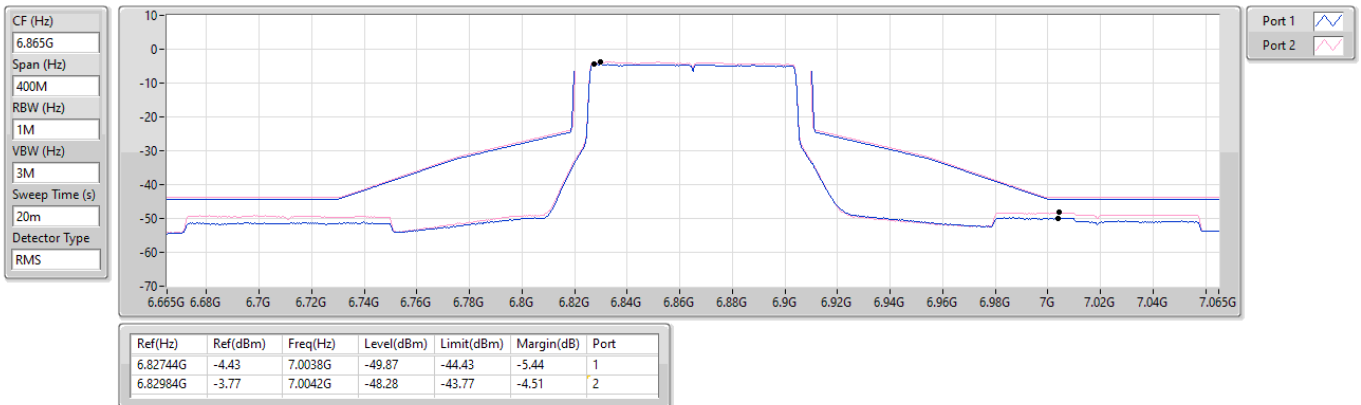

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK


6945MHz_TX

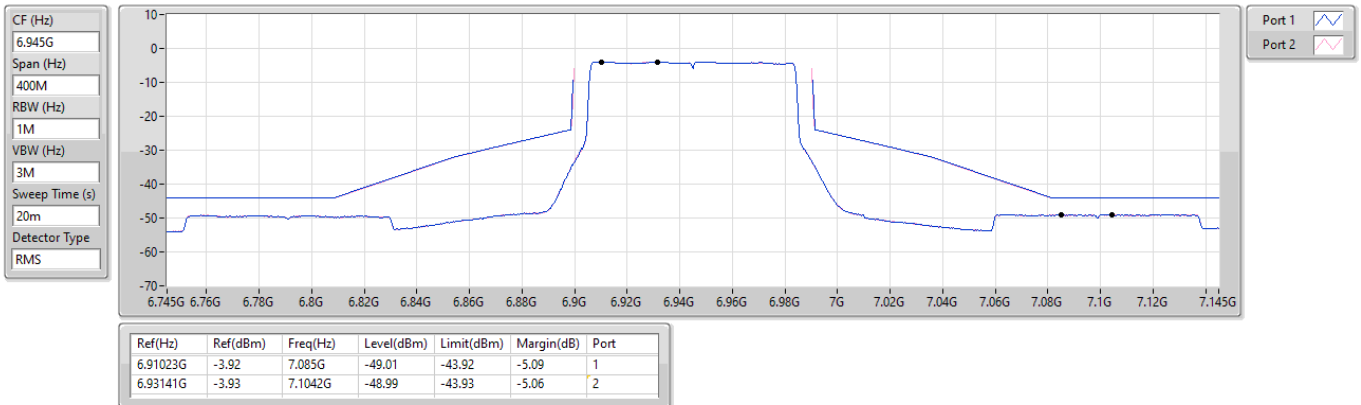

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

7025MHz_TX

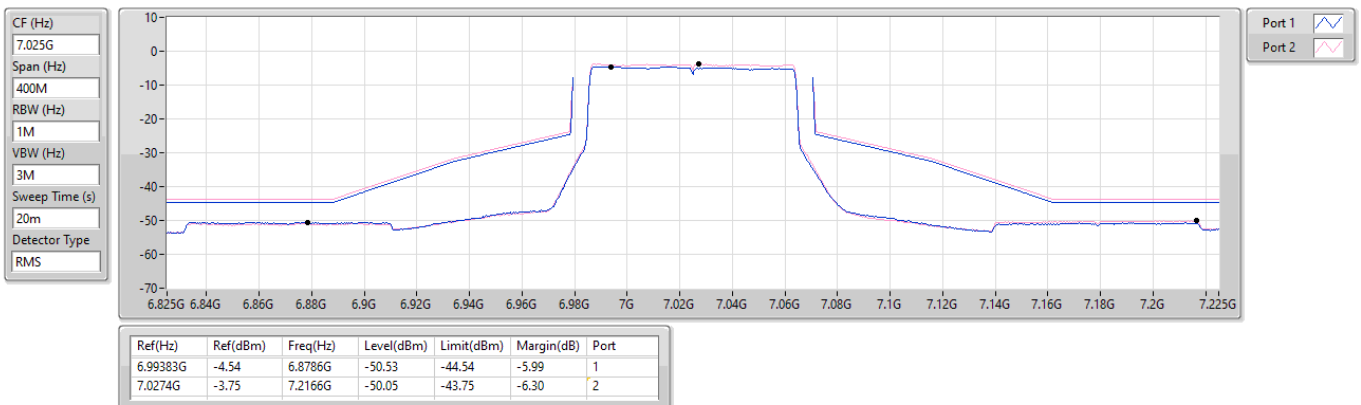




5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK


6025MHz_TX

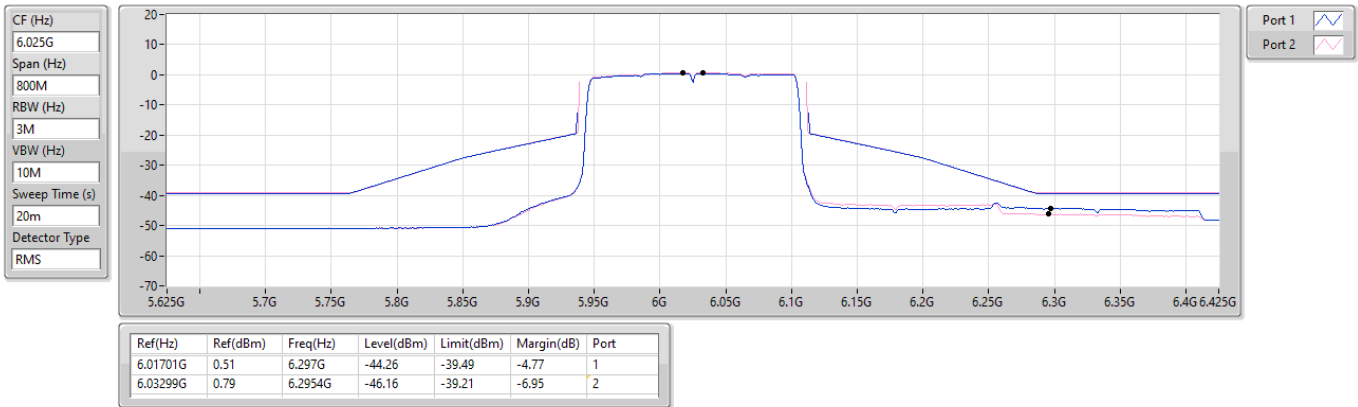

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK

6185MHz_TX

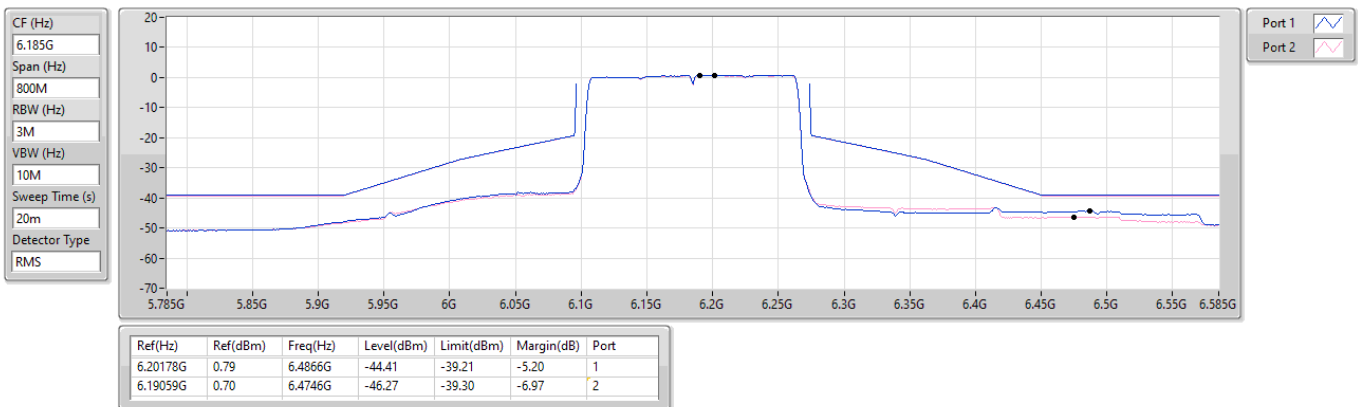




5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK


6345MHz_TX

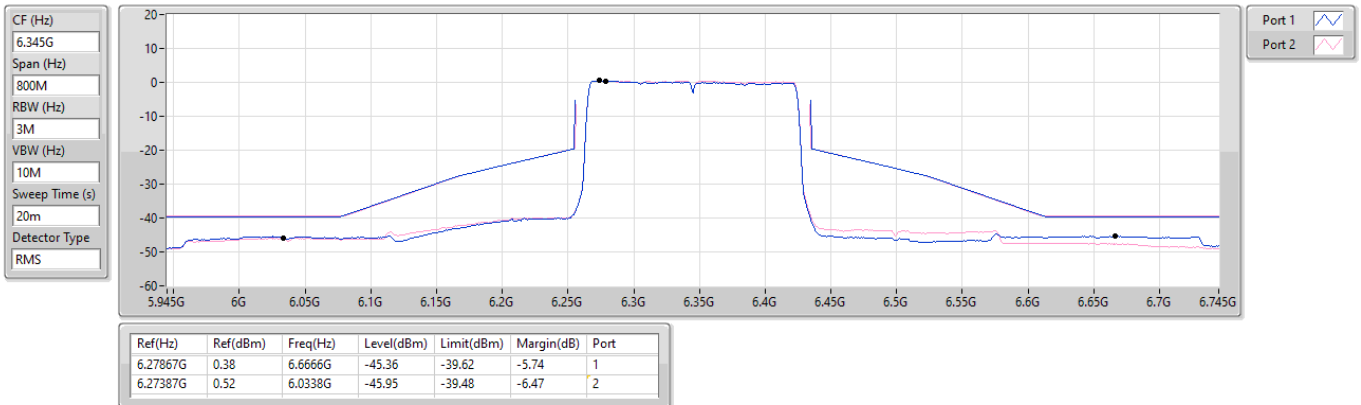

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK


6505MHz Straddle 6.525-6.875GHz_TX

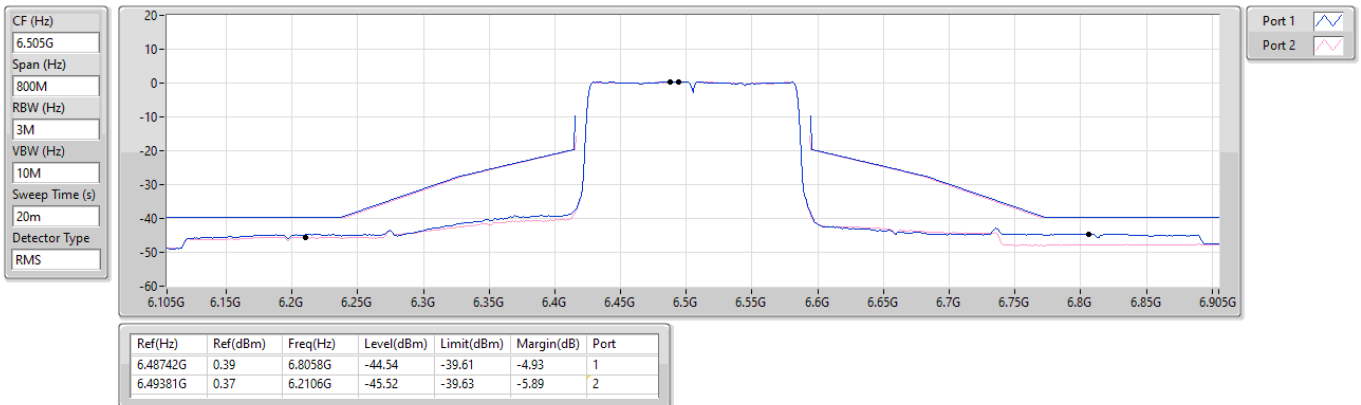

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK


6665MHz_TX

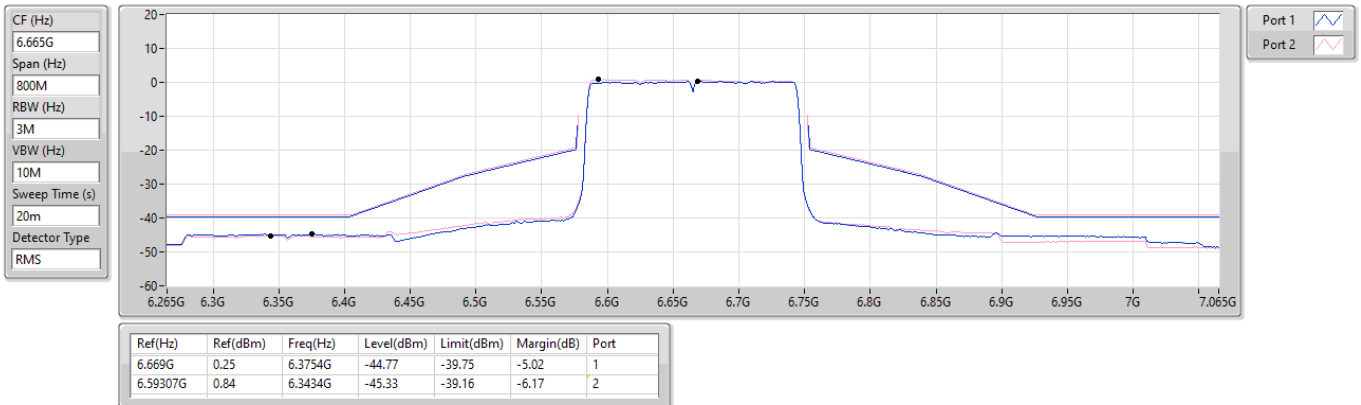

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK


6825MHz Straddle 6.875-7.125GHz_TX

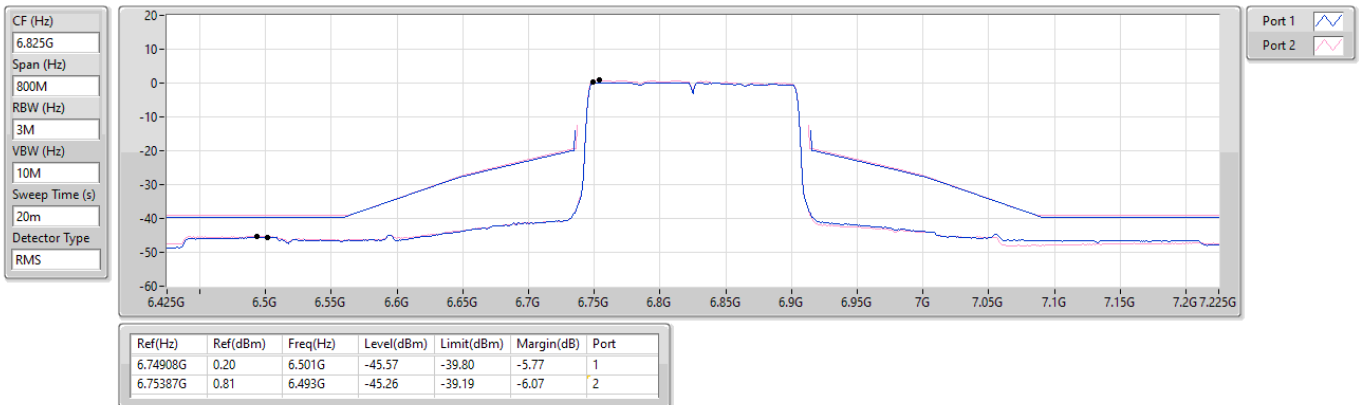

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK


6985MHz_TX

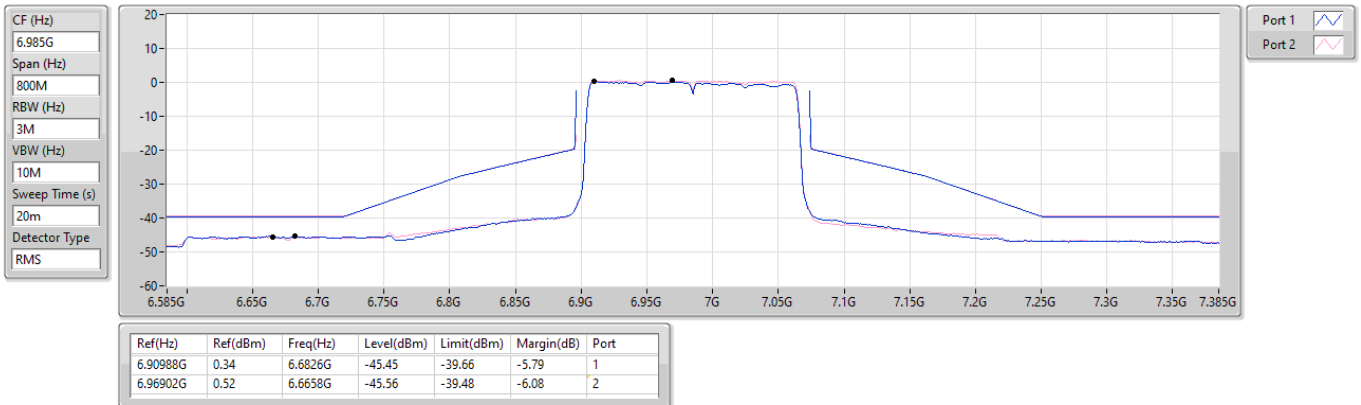

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

MASK

6105MHz_TX

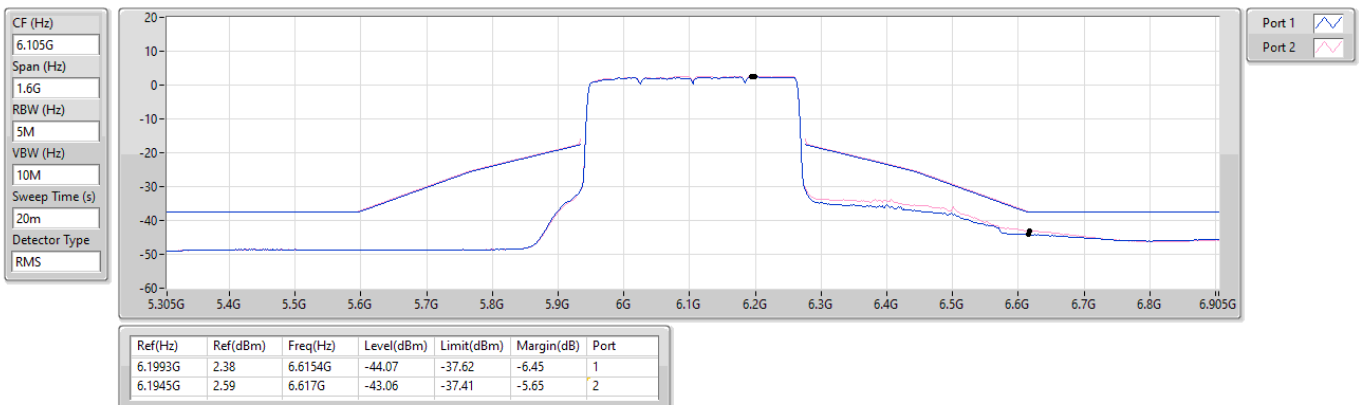




5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

MASK


6265MHz_TX

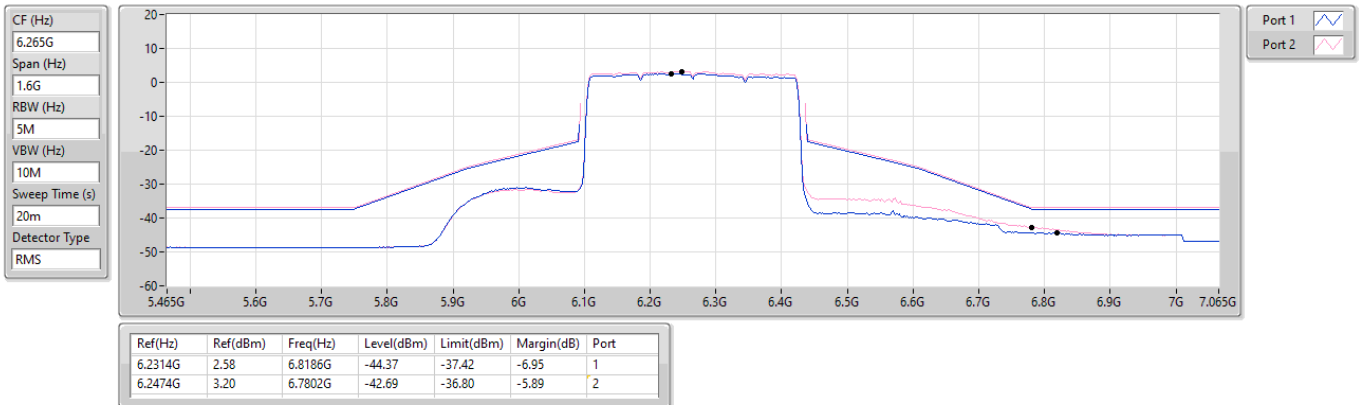

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_2TX

MASK

6425MHz Straddle 6.525-6.875GHz_TX

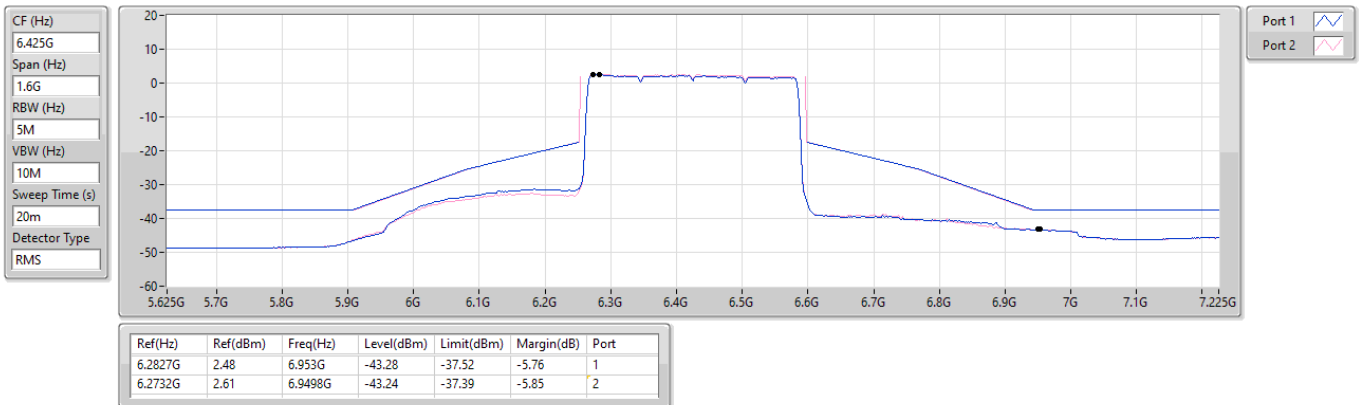




6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_2TX

MASK


6585MHz Straddle 6.525-6.875GHz_TX

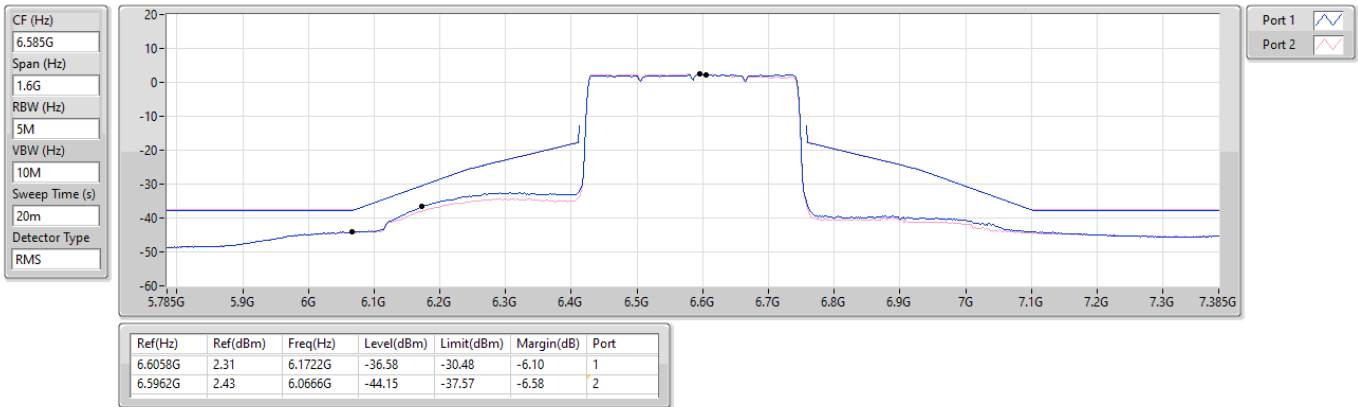

6.875-7.125GHz_802.11be EHT320_Nss1,(MCS0)_2TX

MASK

6745MHz Straddle 6.875-7.125GHz_TX

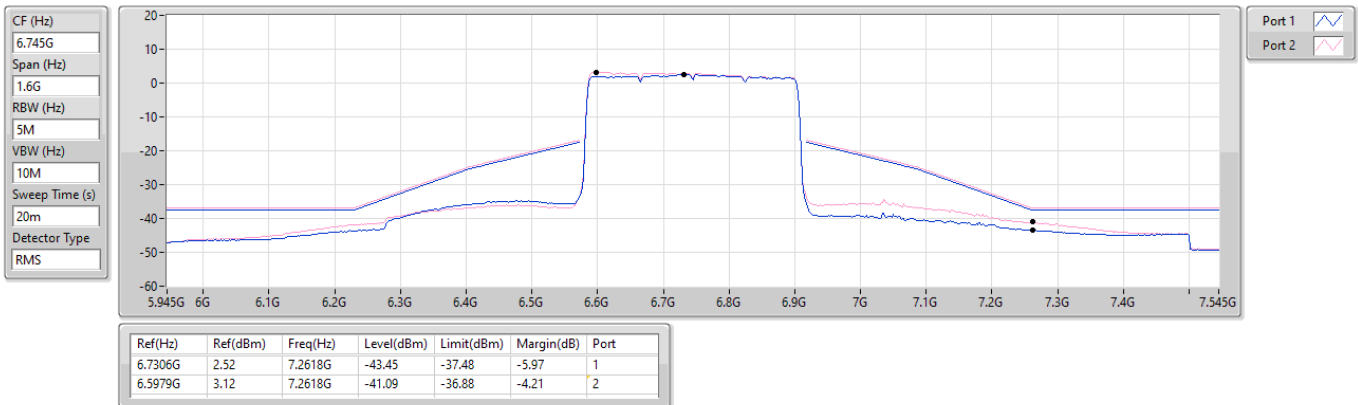




6.875-7.125GHz_802.11be EHT320_Nss1,(MCS0)_2TX

MASK

6905MHz Straddle 6.875-7.125GHz_TX

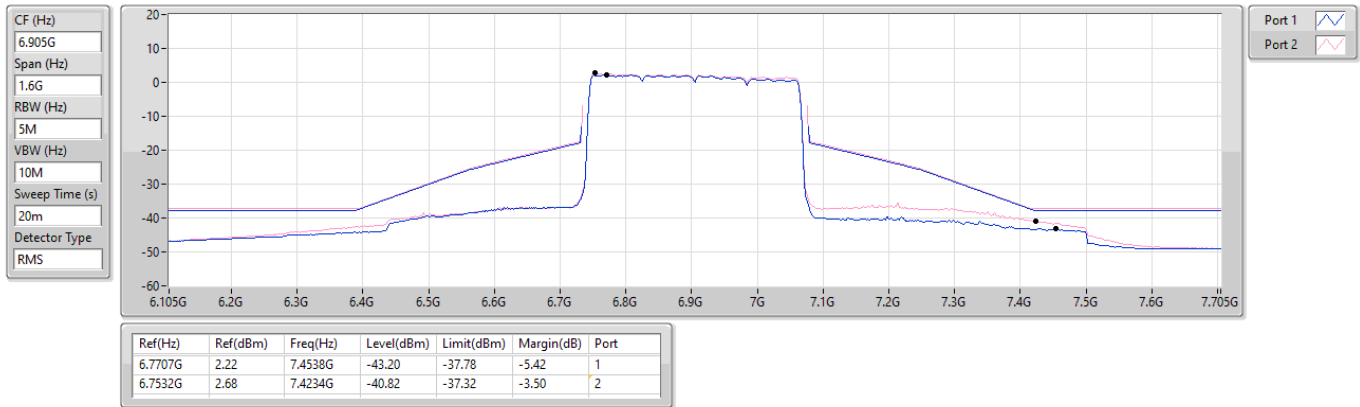



Frequency: 6475 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	-0.63	-0.72	-0.80	-0.45
T20°CVmin	-0.13	0.00	0.29	0.46
T40°CVnom	3.98	4.38	3.55	3.88
T30°CVnom	0.42	0.49	0.76	0.63
T20°CVnom	-0.52	-0.47	-0.17	-0.37
T10°CVnom	0.16	-0.16	0.36	0.00
T0°CVnom	3.01	2.97	3.34	3.08
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	

Frequency: 7015 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	-0.55	-0.48	-0.69	-0.49
T20°CVmin	-0.35	-0.01	-0.25	-0.57
T40°CVnom	3.26	3.33	3.66	3.41
T30°CVnom	0.41	0.79	0.95	0.92
T20°CVnom	-0.45	-0.38	-0.07	-0.58
T10°CVnom	0.31	0.40	0.26	0.10
T0°CVnom	2.75	3.00	2.80	2.95
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna gain With path Loss (dBi)	Adjusted Power (dBm)	Detection limit (dBm)	EUT Tx Status
be EHT20	5	6195	6194	-68.84	3.55	-72.39	-62	Ceased
				-70.84	3.55	-74.39	-62	Minimal
				-88.84	3.55	-92.39	-62	Normal
	6	6475	6474	-69.67	3.53	-73.2	-62	Ceased
				-71.67	3.53	-75.2	-62	Minimal
				-89.67	3.53	-93.2	-62	Normal
	7	6695	6694	-69.25	3.63	-72.88	-62	Ceased
				-71.25	3.63	-74.88	-62	Minimal
				-89.25	3.63	-92.88	-62	Normal
	8	6995	6994	-68.99	3.35	-72.34	-62	Ceased
				-70.99	3.35	-74.34	-62	Minimal
				-88.99	3.35	-92.34	-62	Normal

Note: Adjusted Power = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna gain with path Loss (dBi)	Adjusted Power (dBm)	Detection limit (dBm)	EUT Tx Status
be EHT320	5	6105	6260	-66.43	3.55	-69.98	-62	Ceased
				-68.43	3.55	-71.98	-62	Minimal
				-86.43	3.55	-89.98	-62	Normal
	5 / 6 / 7	6425	6270	-65.5	3.53	-69.03	-62	Ceased
				-69.5	3.53	-73.03	-62	Minimal
				-87.5	3.53	-91.03	-62	Normal
	7 / 8	6905	6750	-68.22	3.35	-71.57	-62	Ceased
				-70.22	3.35	-73.57	-62	Minimal
				-88.22	3.35	-91.57	-62	Normal


Note: Adjusted Power = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)
be EHT20	5	6195	6194	-68.84	-72.39	V	V	V	V	V	V	V	V	V	V	100	90
	6	6475	6474	-69.67	-73.2	V	V	V	V	V	V	V	V	V	V	100	90
	7	6695	6694	-69.25	-72.88	V	V	V	V	V	V	V	V	V	V	100	90
	8	6995	6994	-68.99	-72.34	V	V	V	V	V	V	V	V	V	V	100	90

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)
be EHT320	5	6105	5950	-67.94	-71.49	V	V	V	V	V	V	V	X	V	V	90	90
			6100	-68.77	-72.32	V	V	V	V	V	V	V	V	V	V	100	90
			6260	-66.43	-69.98	V	V	V	V	V	V	V	V	X	V	90	90
	5/6/7	6425	6270	-65.5	-69.03	V	V	V	V	V	V	V	X	V	V	90	90
			6420	-66.74	-70.27	V	V	V	V	V	V	V	V	V	V	100	90
			6580	-67.56	-71.09	V	V	V	V	V	V	V	V	V	X	90	90
	7 / 8	6905	6750	-68.22	-71.57	V	V	V	V	V	V	V	V	X	V	90	90
			6900	-69.93	-73.28	V	V	V	V	V	V	V	V	V	V	100	90
			7060	-69.16	-72.51	V	V	V	V	V	V	V	V	V	V	100	90

Test plot of Incumbent signal


BW: 20 MHz / Frequency: 6194 MHz

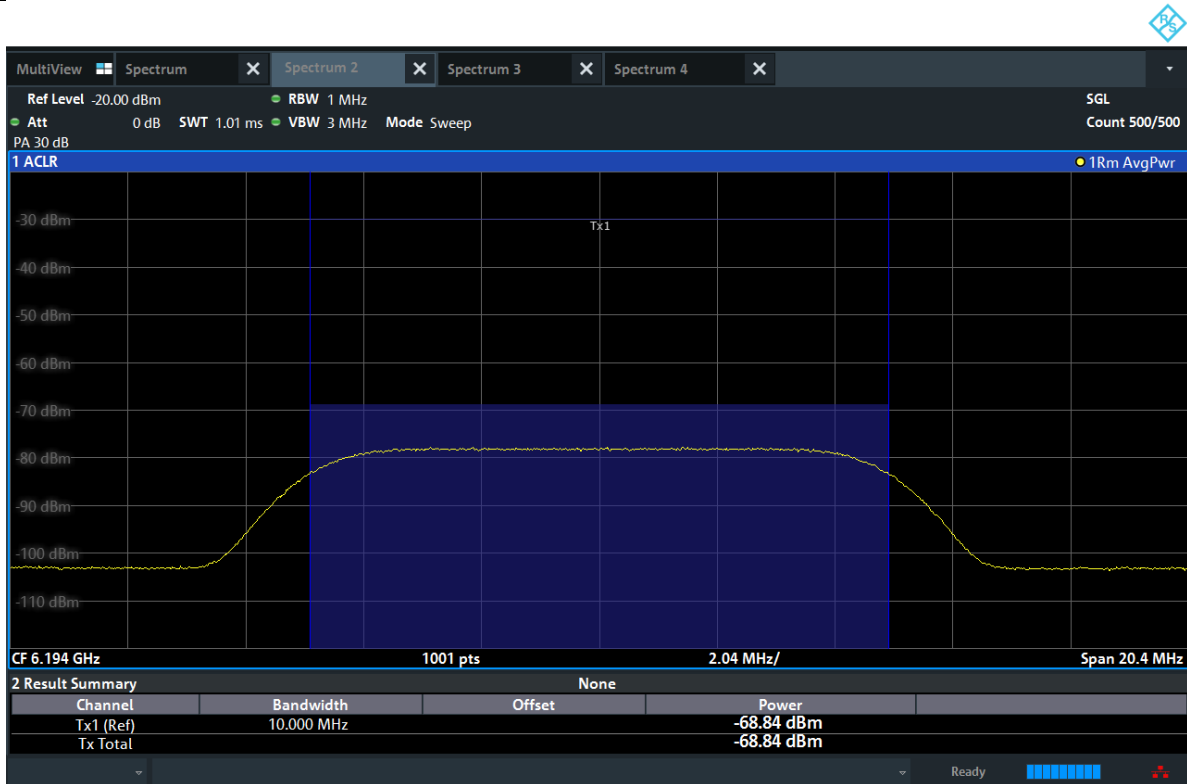


BW: 20 MHz / Frequency: 6474 MHz




BW: 20 MHz / Frequency: 6694 MHz

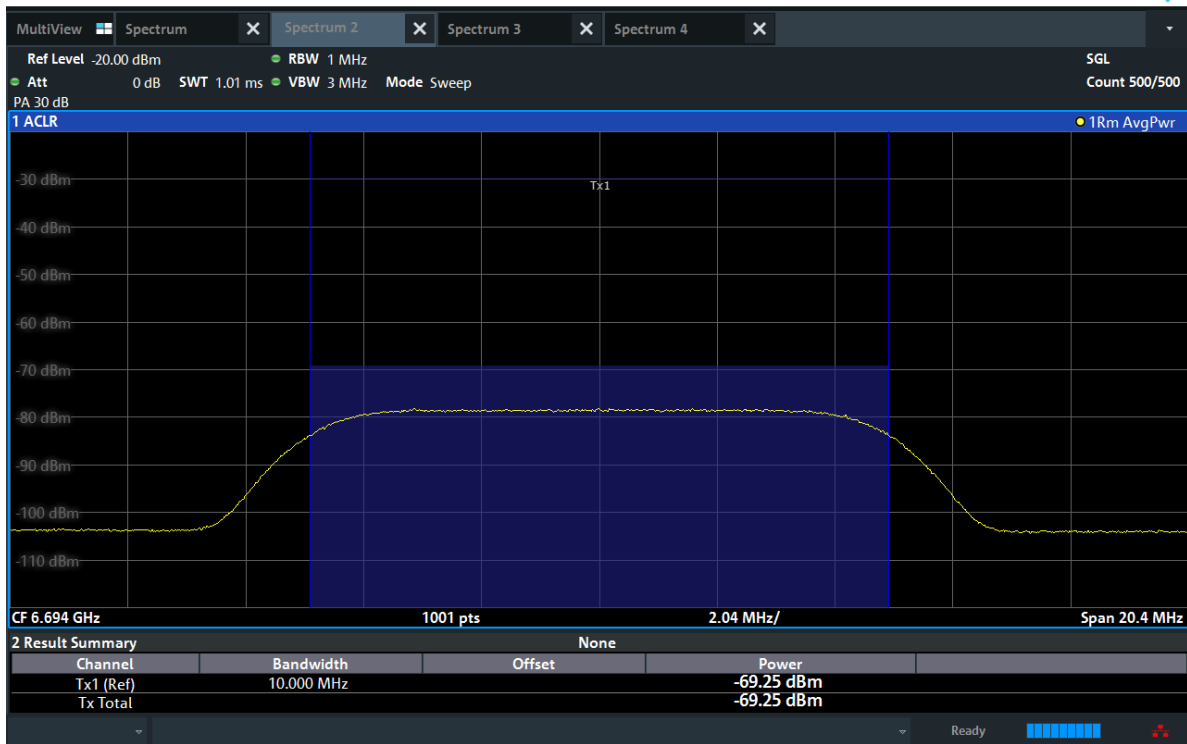


BW: 20 MHz / Frequency: 6994 MHz

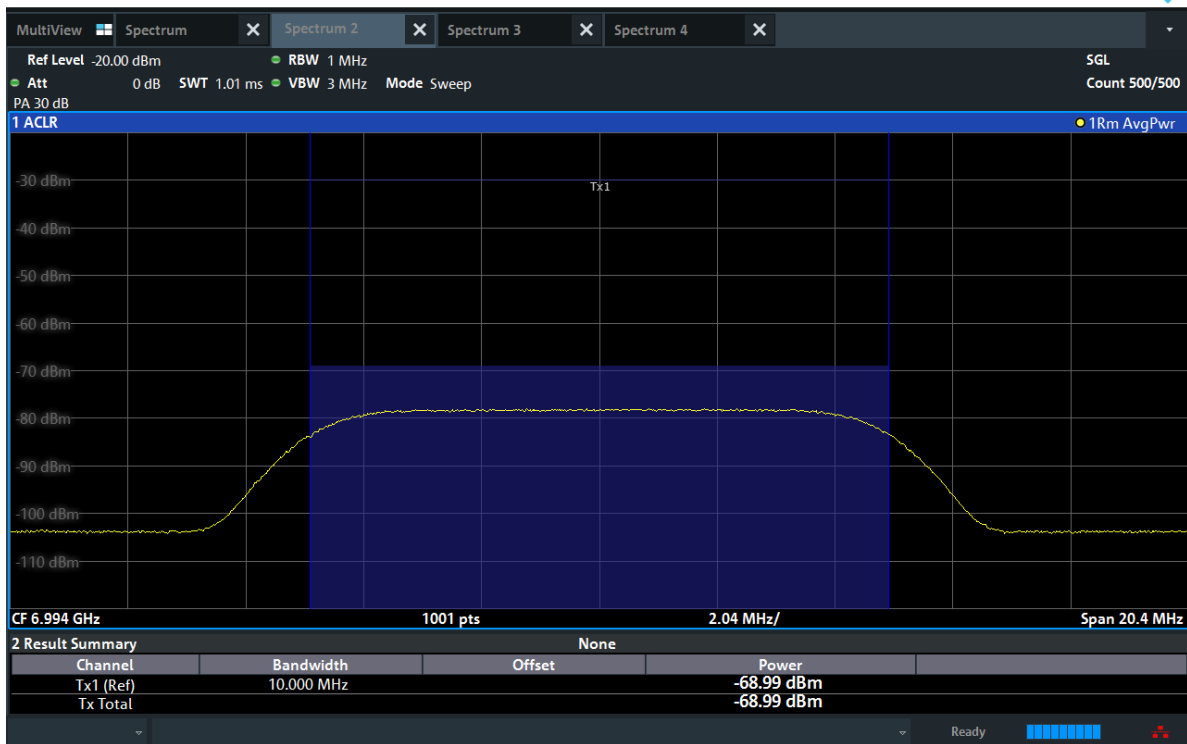


BW: 320 MHz / Frequency: 5950 MHz

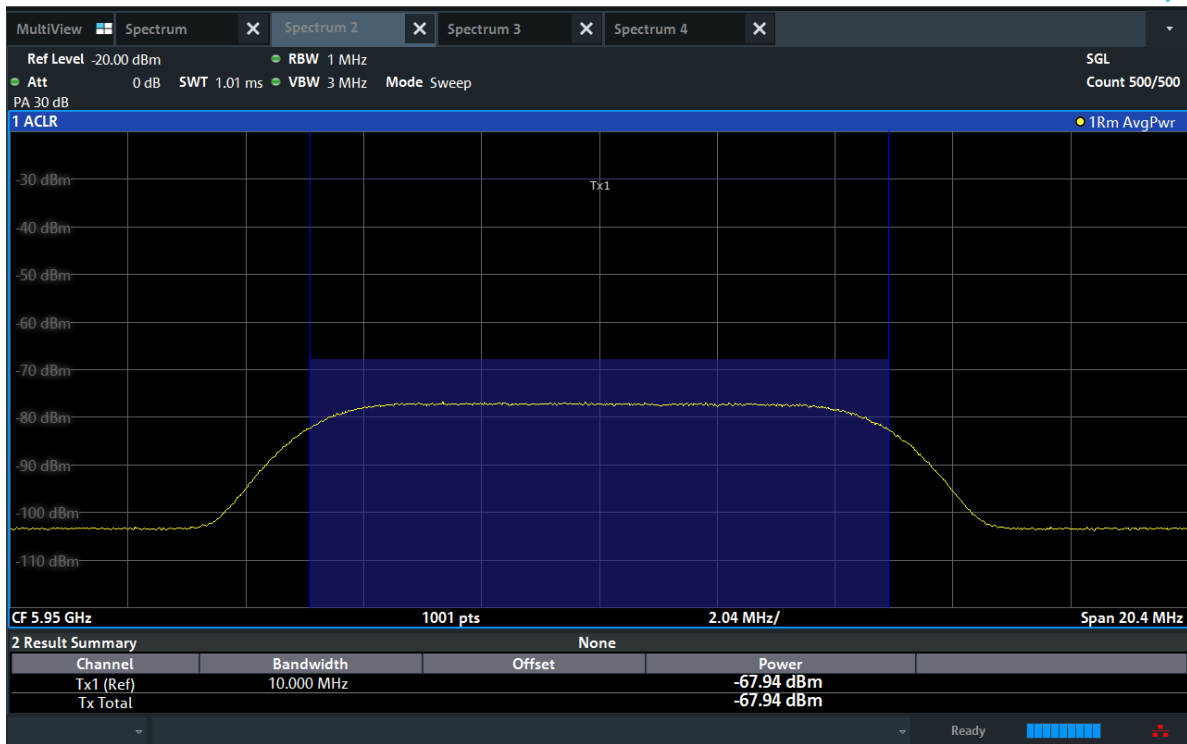


BW: 320 MHz / Frequency: 6100 MHz

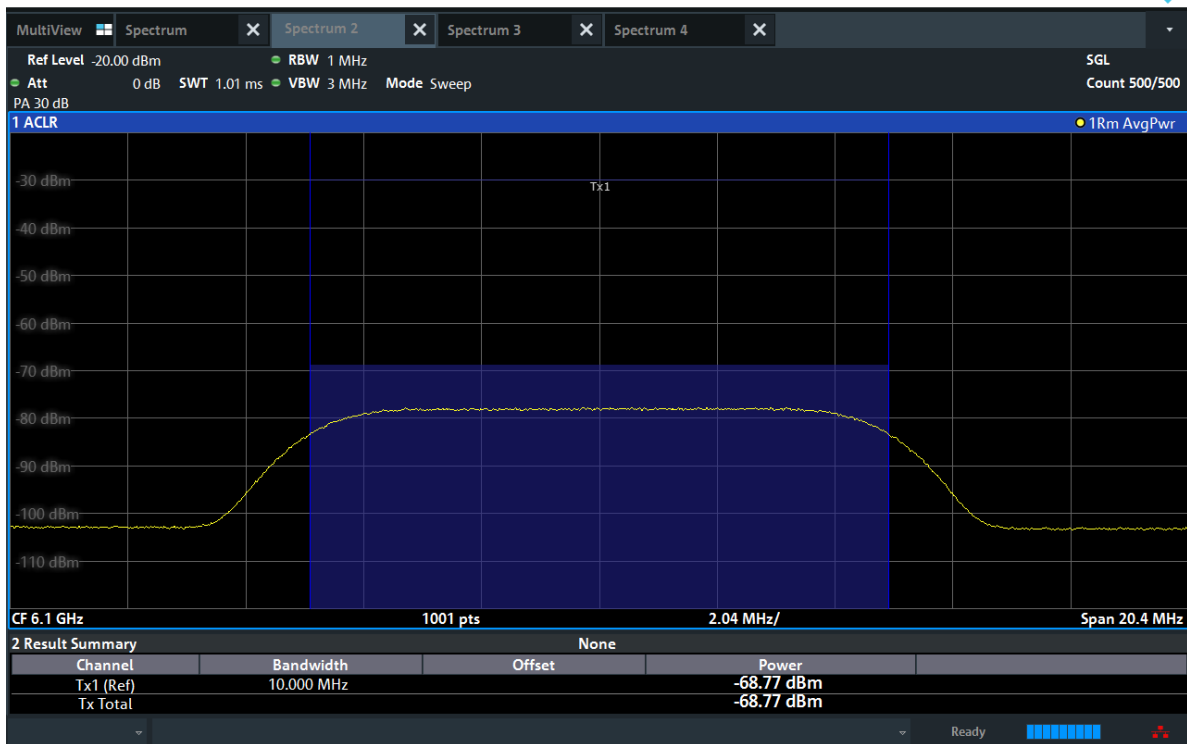


BW: 320 MHz / Frequency: 6260 MHz

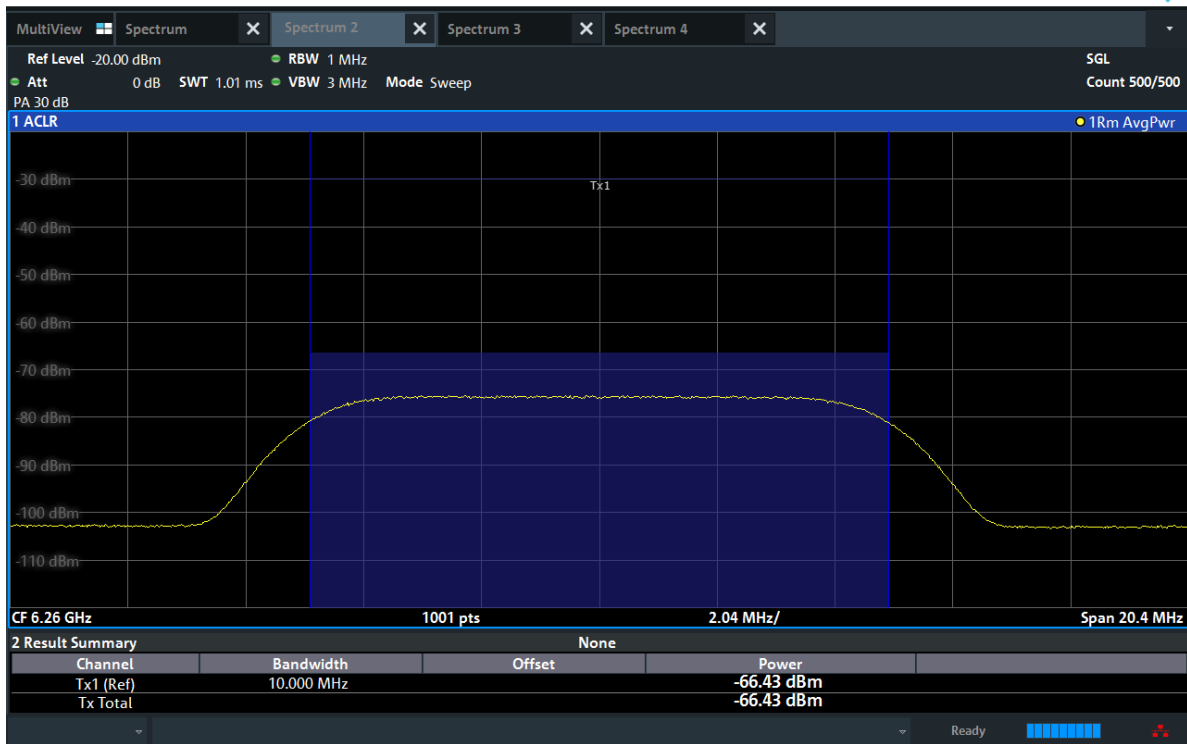


BW: 320 MHz / Frequency: 6270 MHz

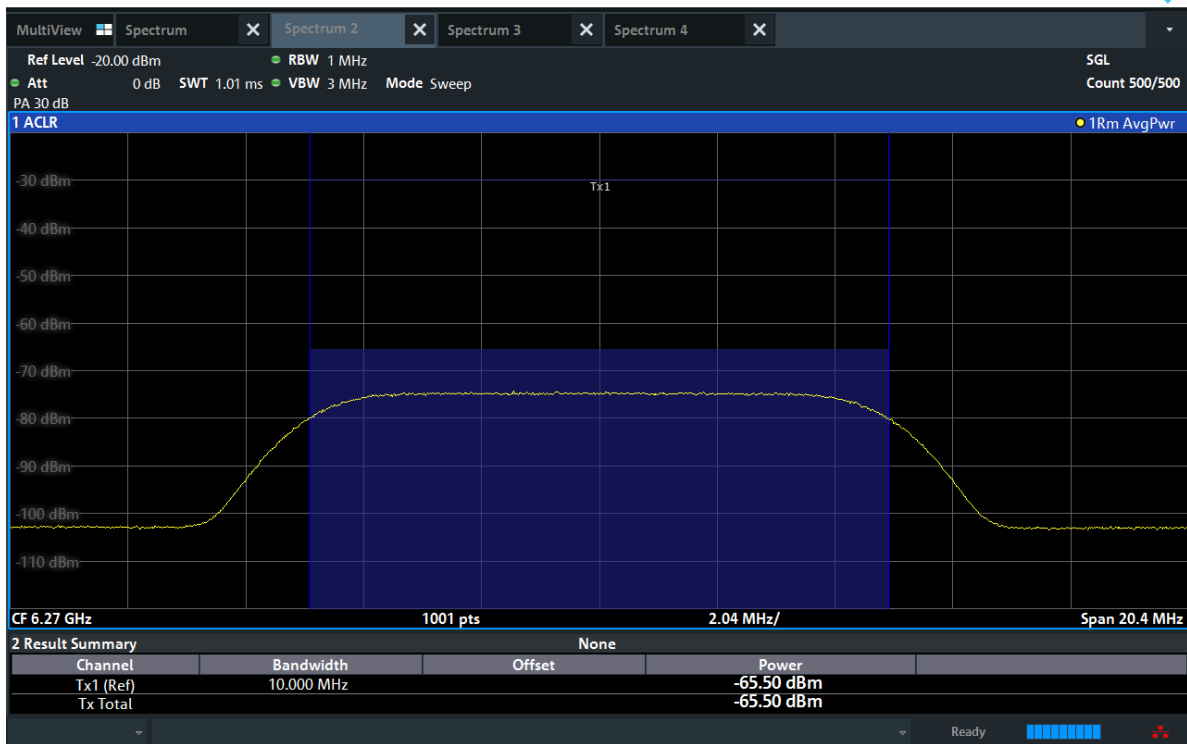


BW: 320 MHz / Frequency: 6420 MHz

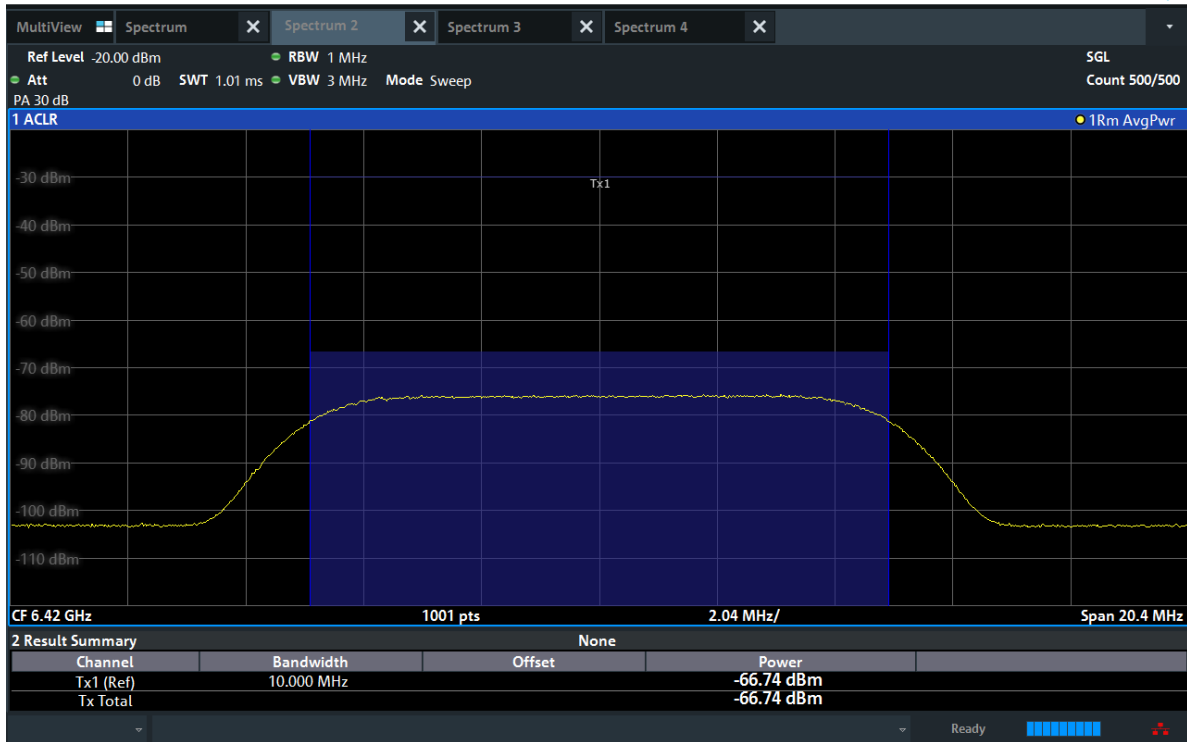


BW: 320 MHz / Frequency: 6580 MHz

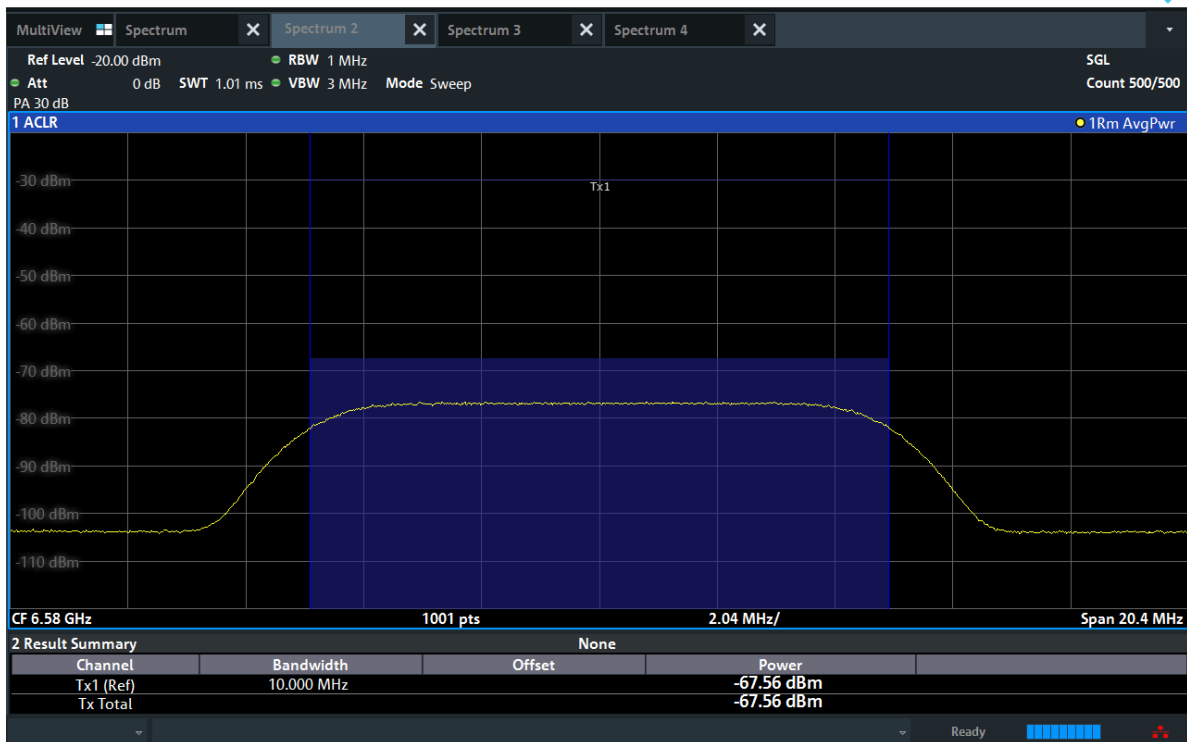


BW: 320 MHz / Frequency: 6750 MHz

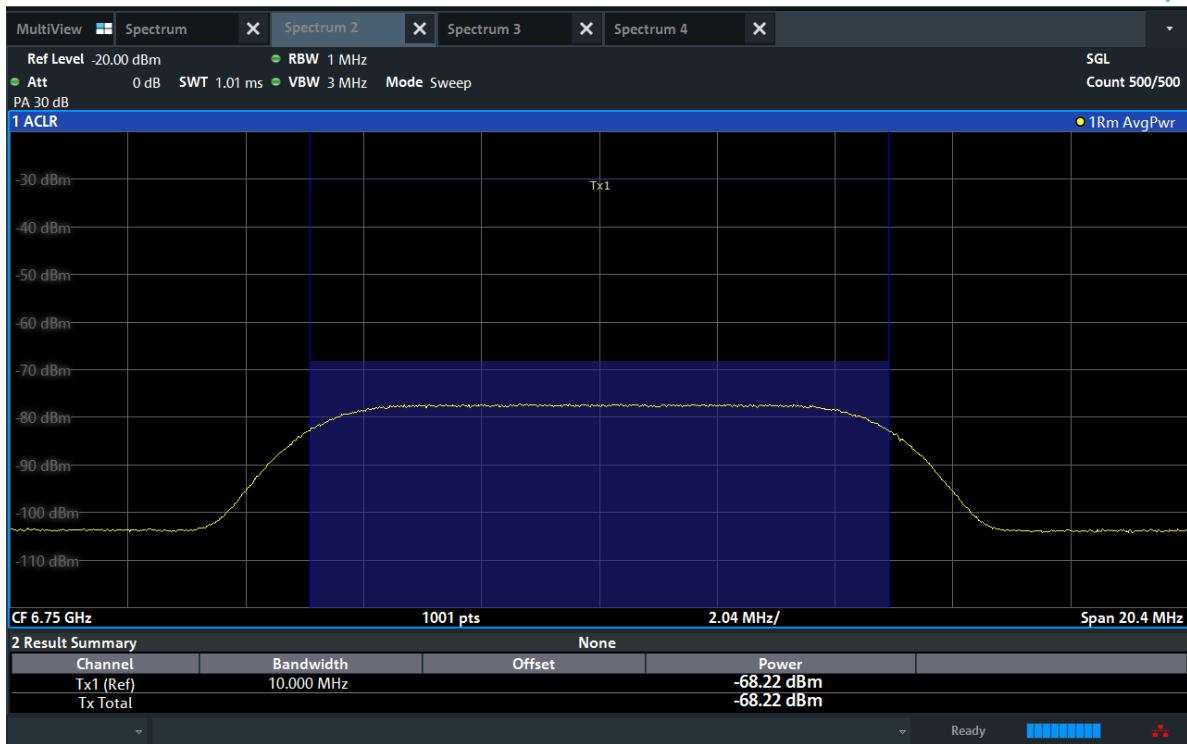

BW: 320 MHz / Frequency: 6900 MHz

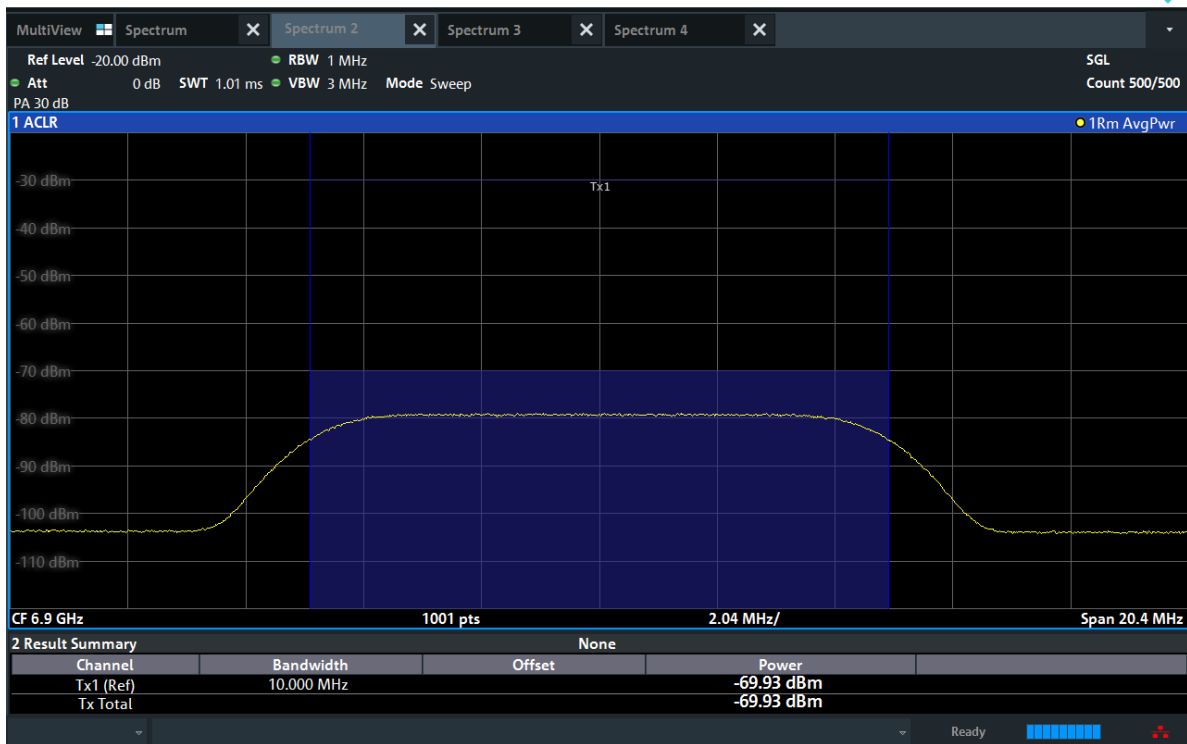


BW: 320 MHz / Frequency: 7060 MHz

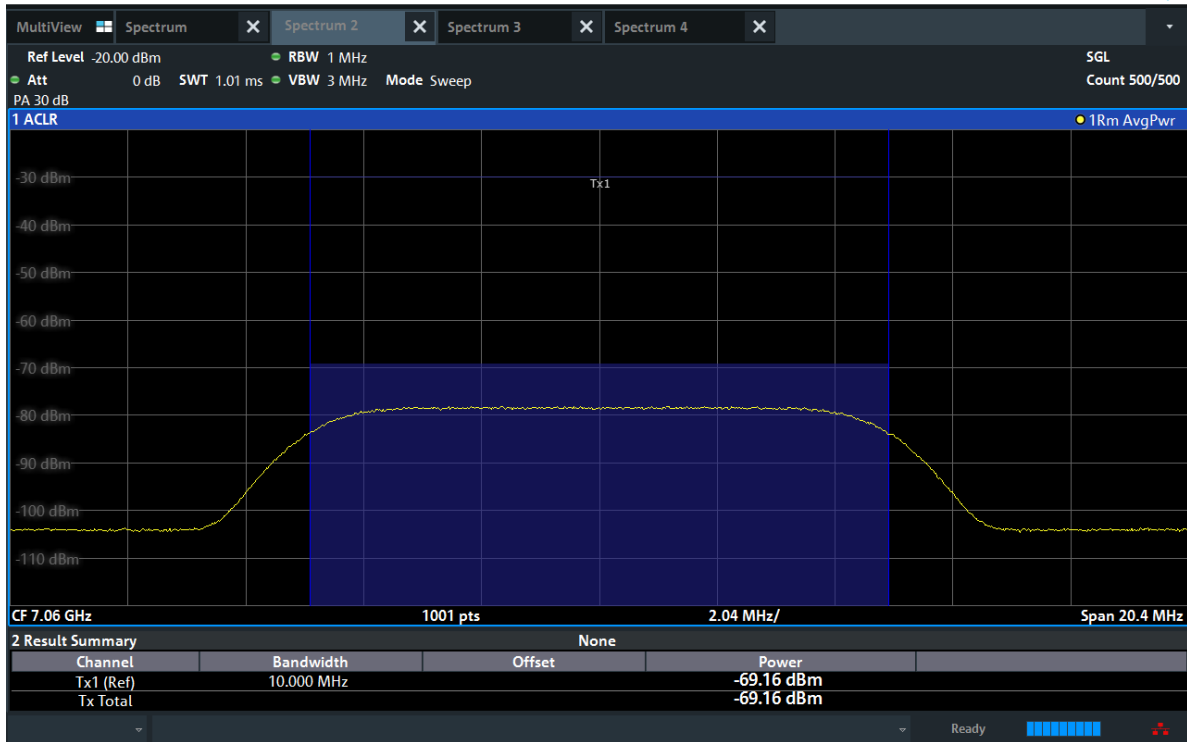


Test plot of Contention Based Protocol EUT Normal transmission


BW: 20 MHz / Frequency: 6194 MHz

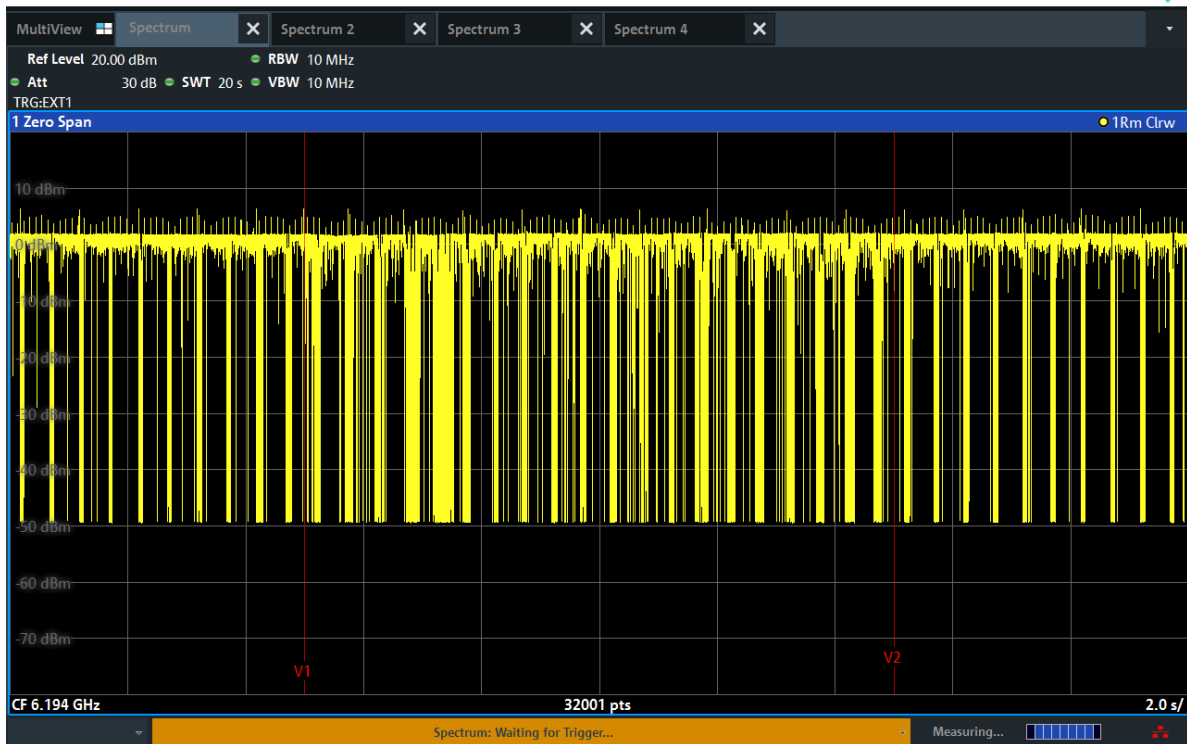


BW: 20 MHz / Frequency: 6474 MHz

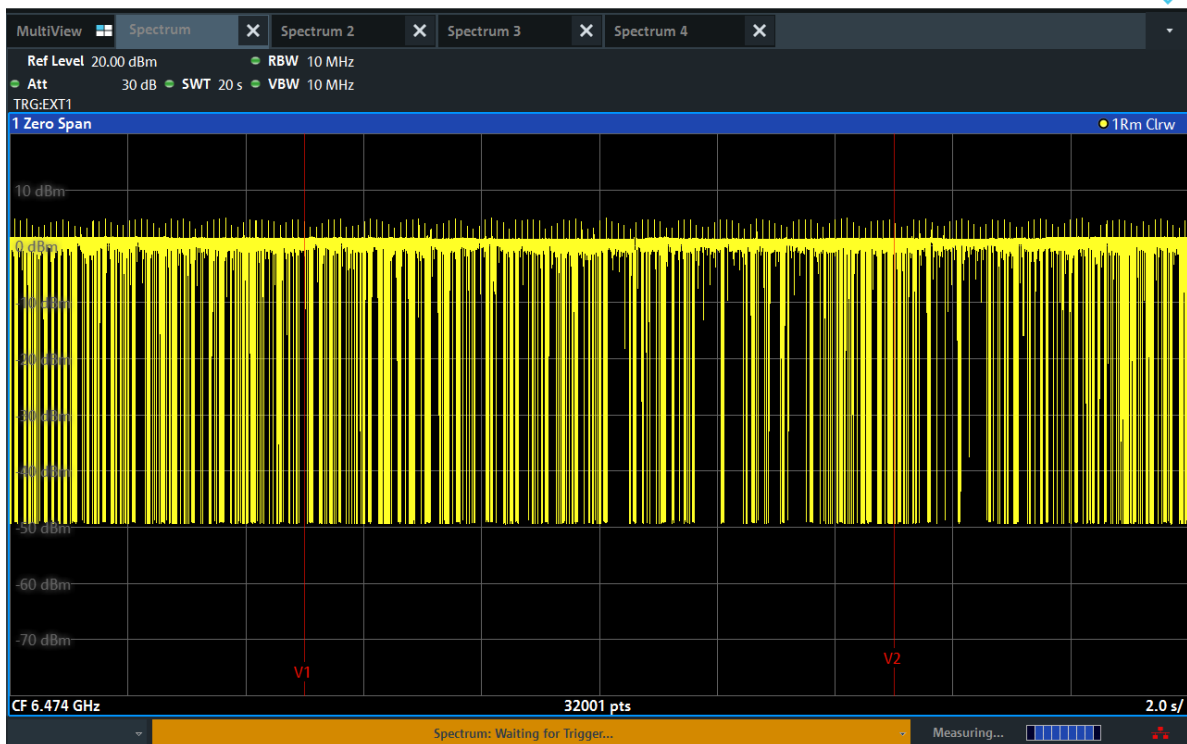


BW: 20 MHz / Frequency: 6694 MHz

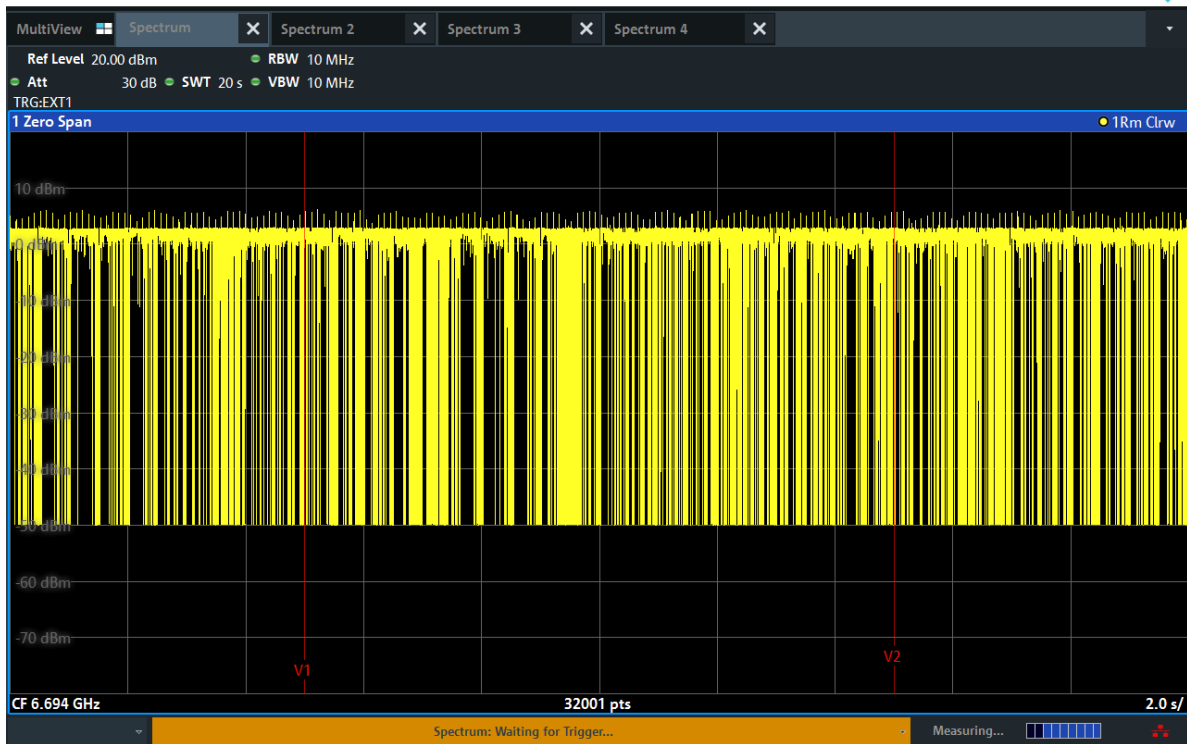


BW: 20 MHz / Frequency: 6994 MHz

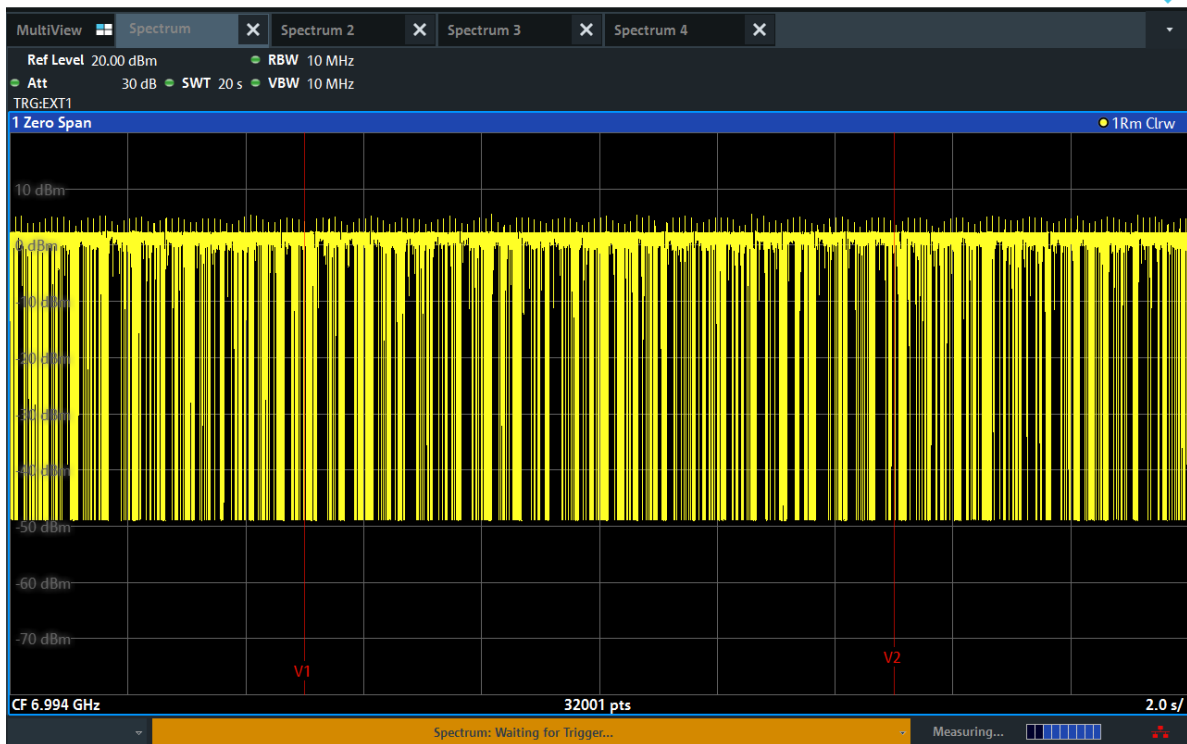


BW: 320 MHz / Frequency: 6260 MHz

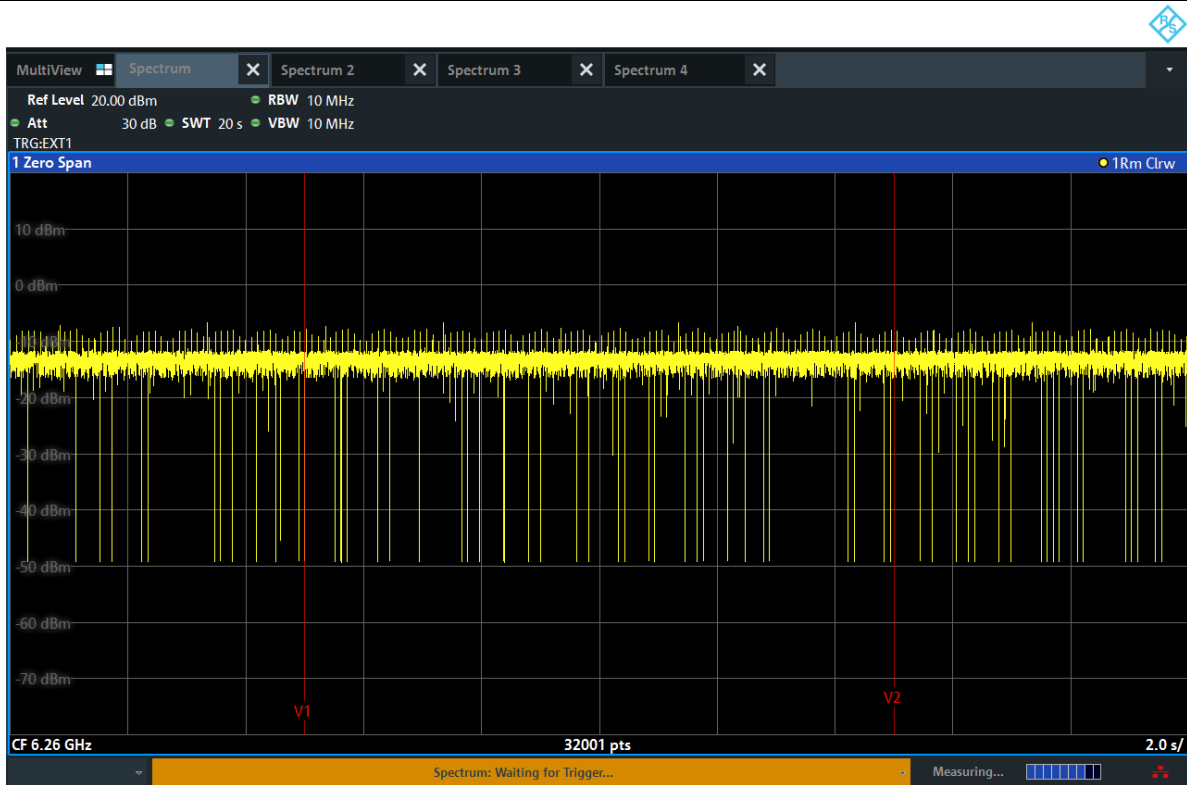

BW: 320 MHz / Frequency: 6270 MHz

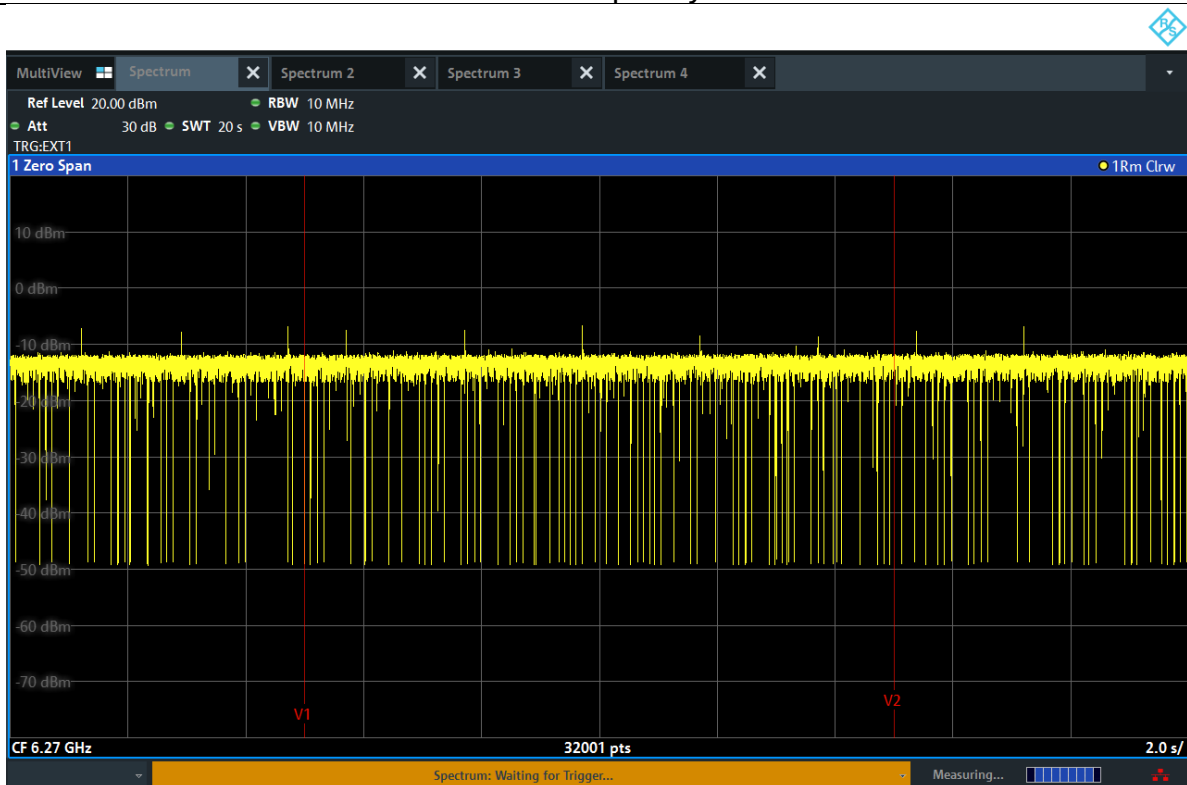


BW: 320 MHz / Frequency: 6750 MHz

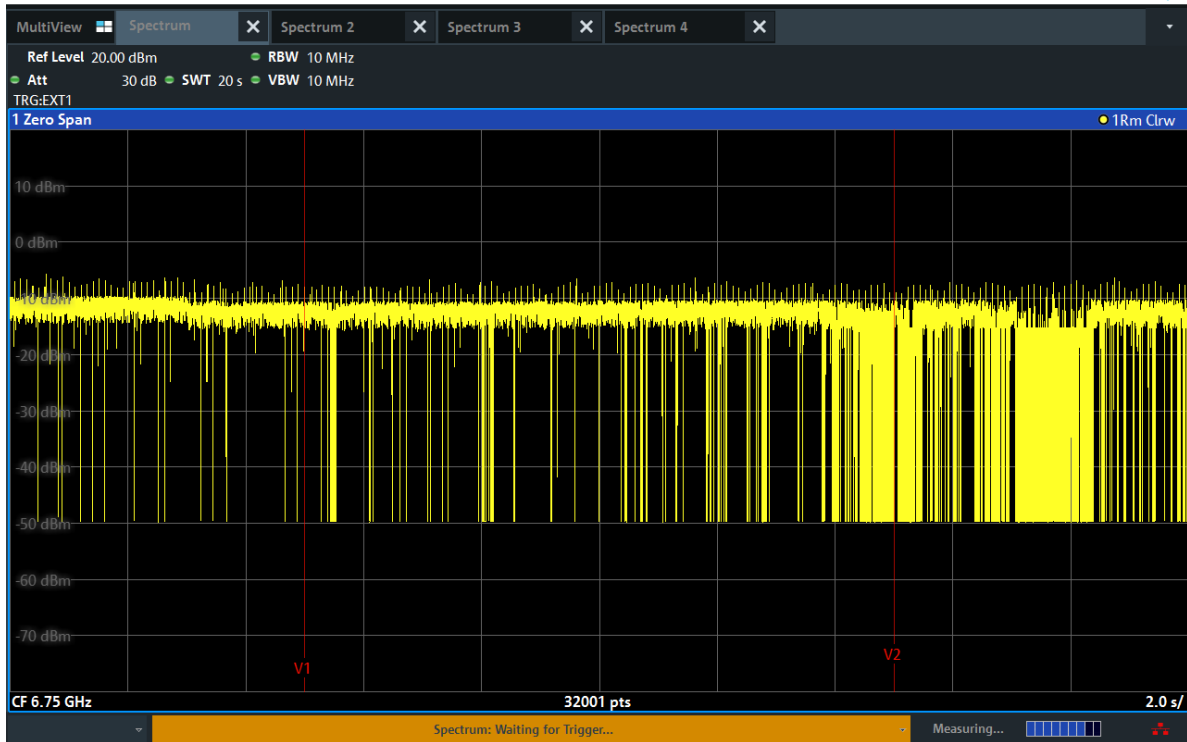


EUT Minimal transmission


BW: 20 MHz / Frequency: 6194 MHz

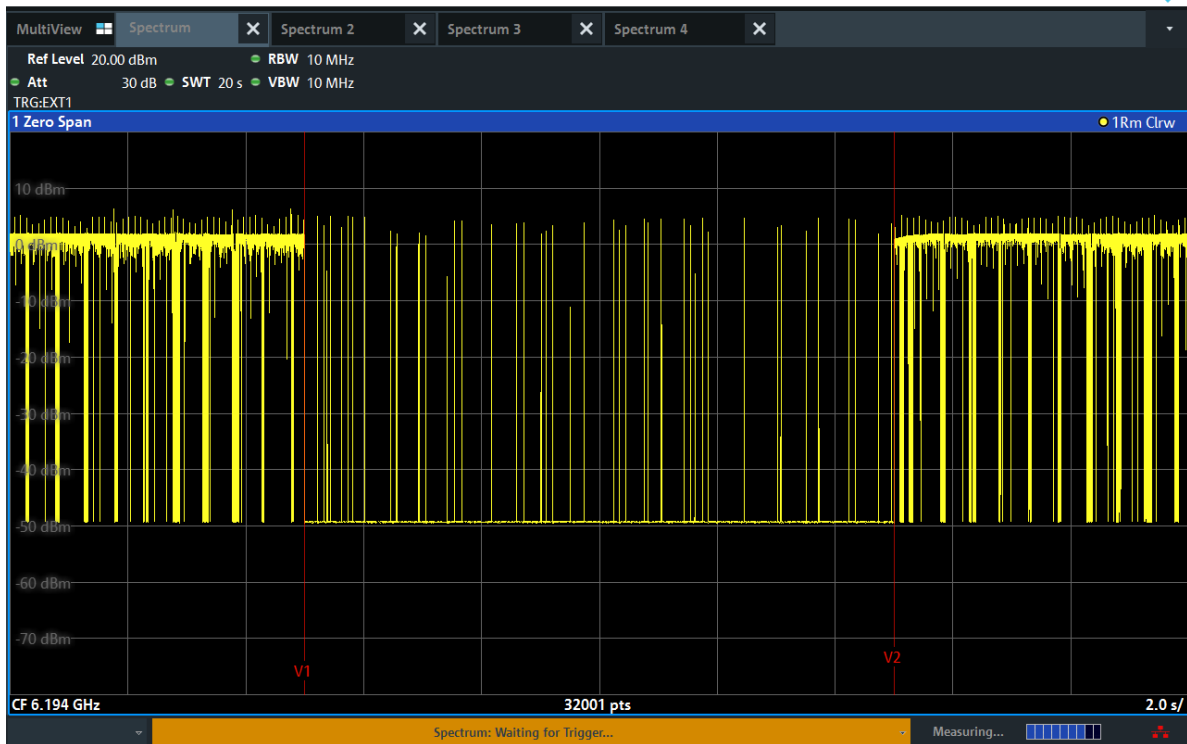


BW: 20 MHz / Frequency: 6474 MHz

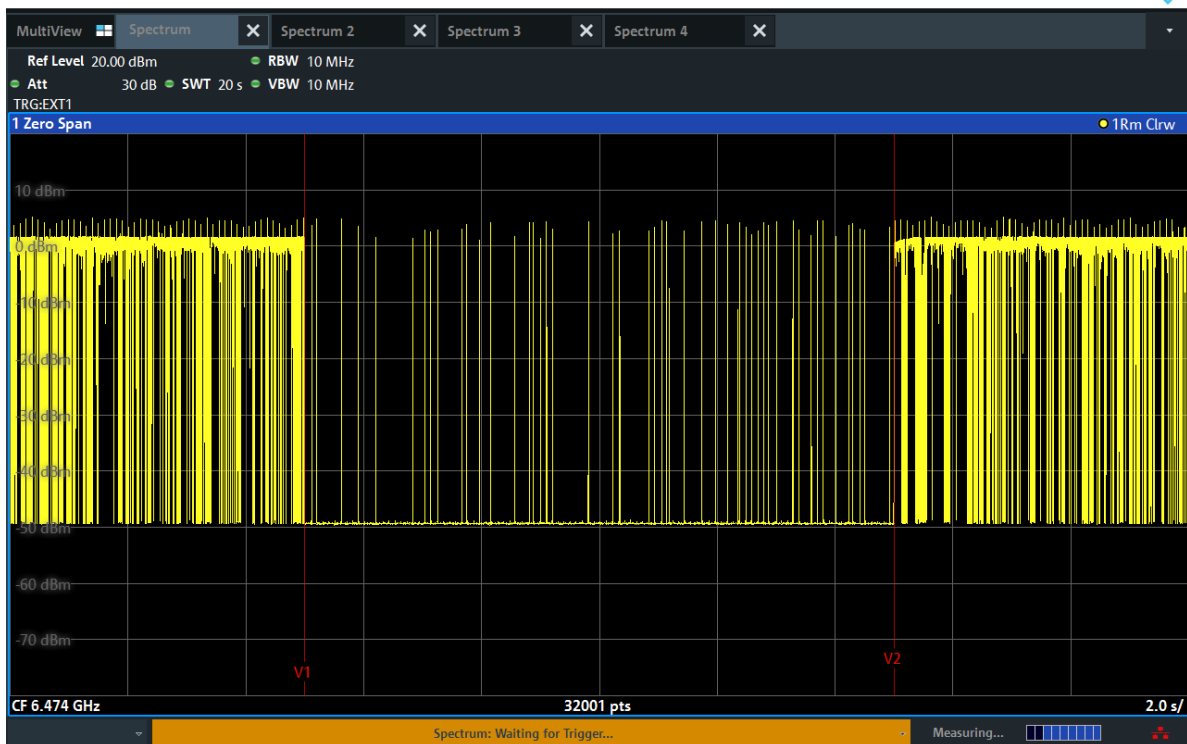

BW: 20 MHz / Frequency: 6694 MHz

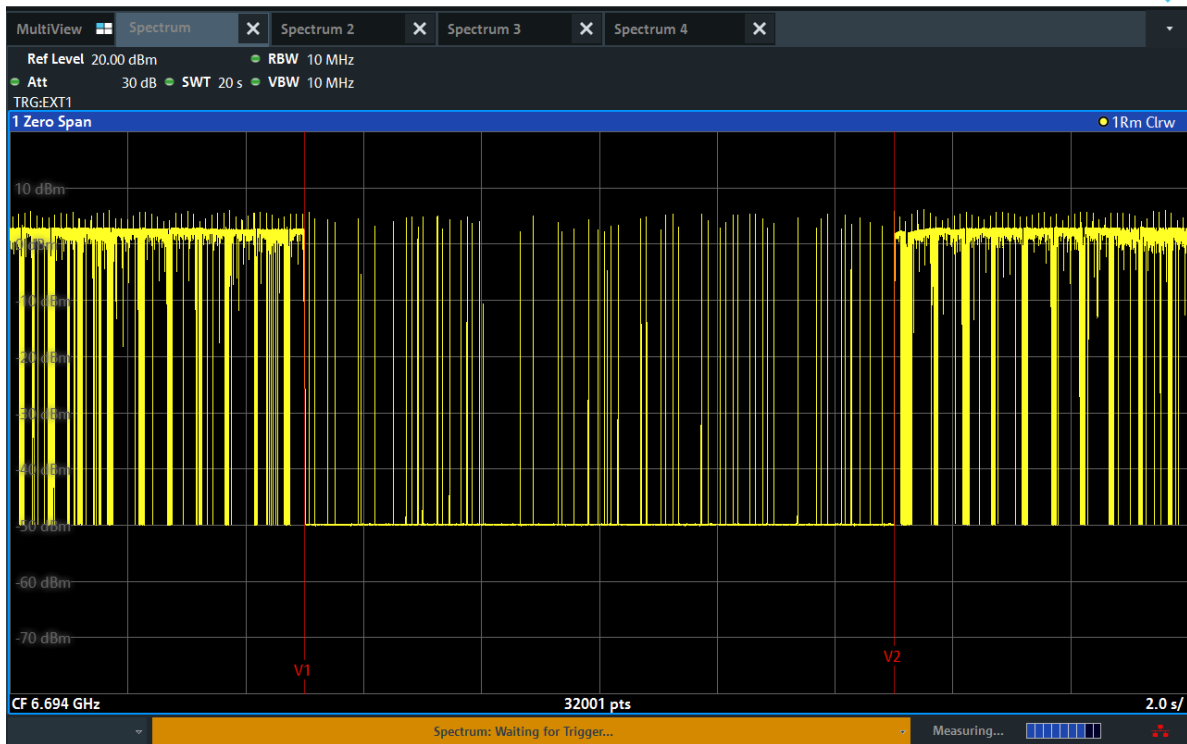


BW: 20 MHz / Frequency: 6994 MHz

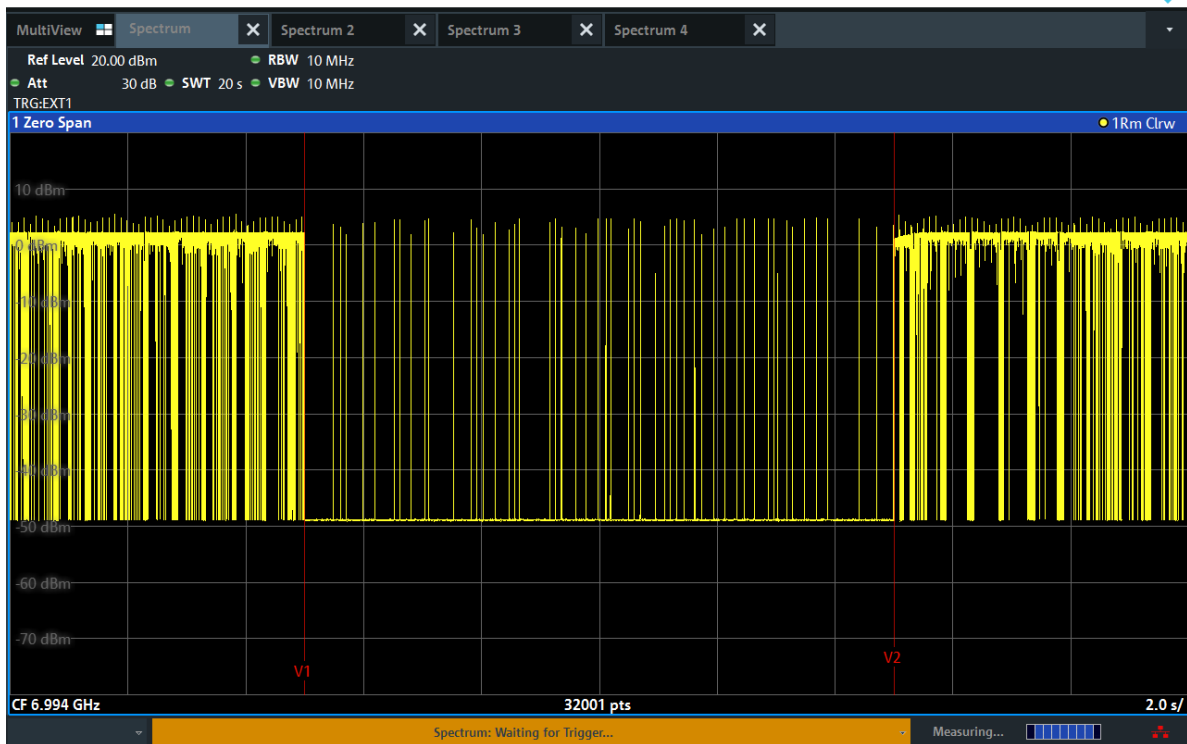


BW: 320 MHz / Frequency: 6260 MHz



BW: 320 MHz / Frequency: 6270 MHz

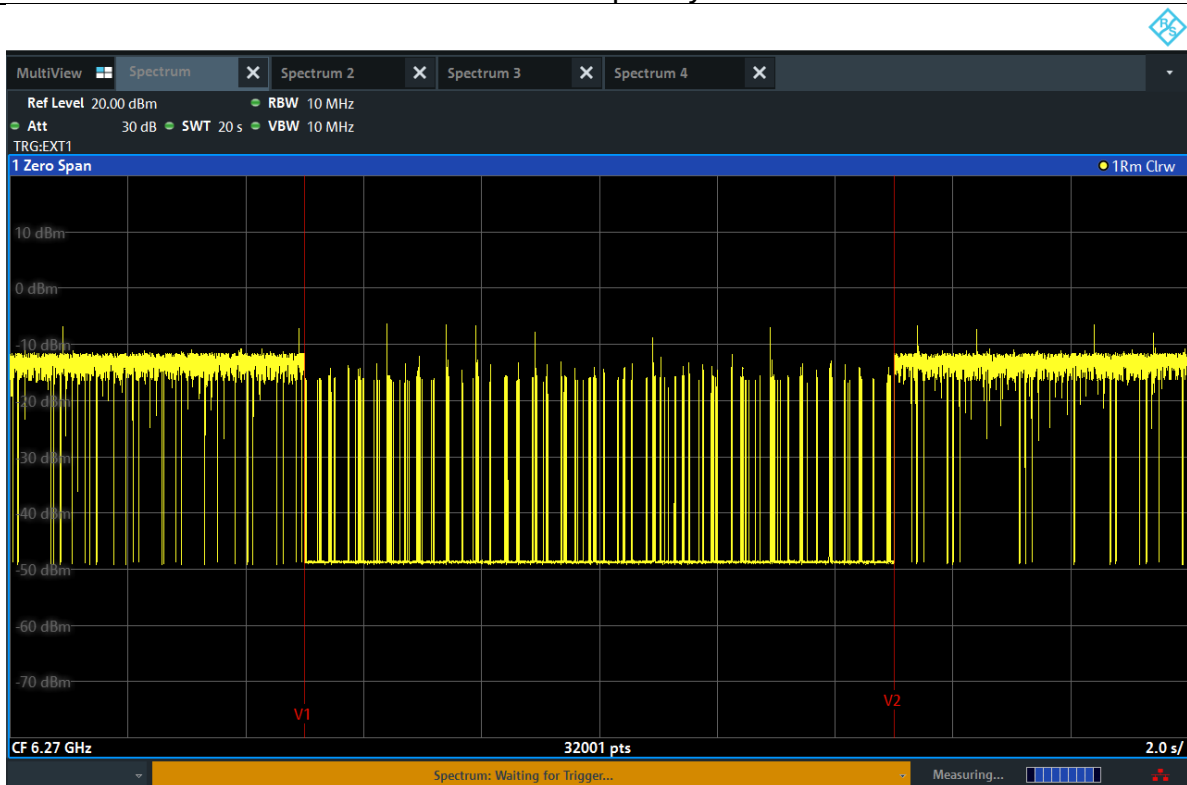


BW: 320 MHz / Frequency: 6750 MHz

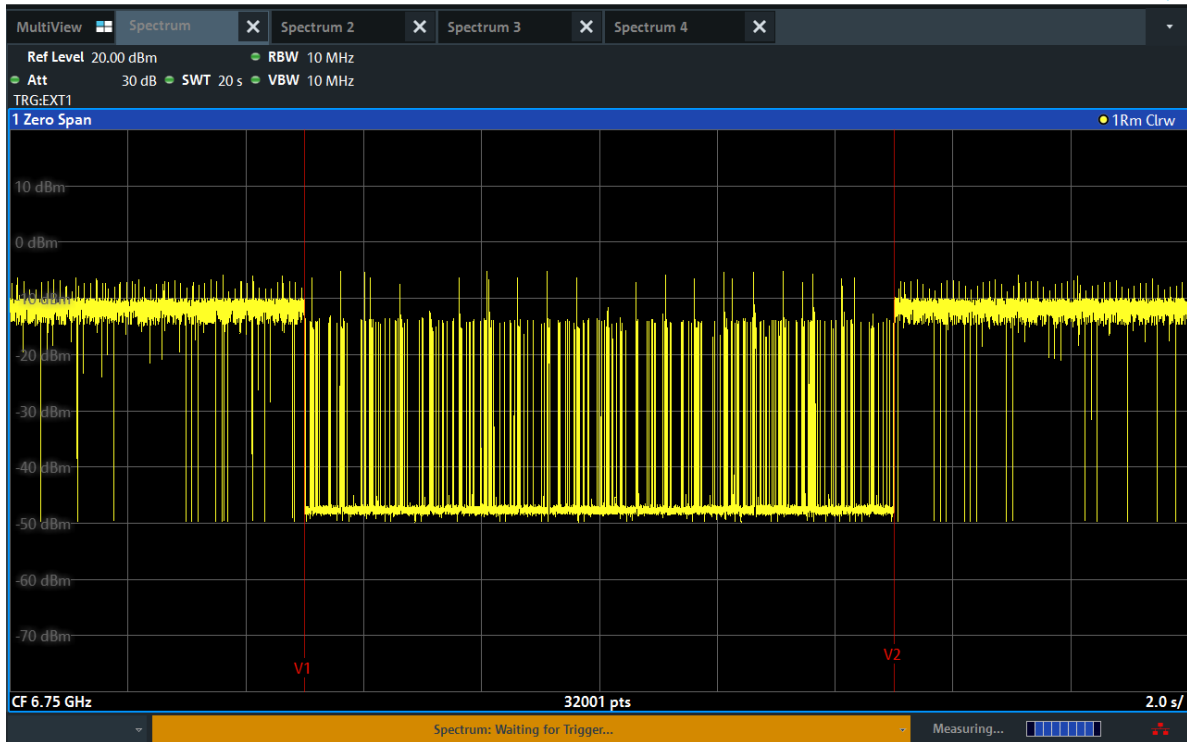


EUT ceased transmission

BW: 20 MHz / Frequency: 6194 MHz

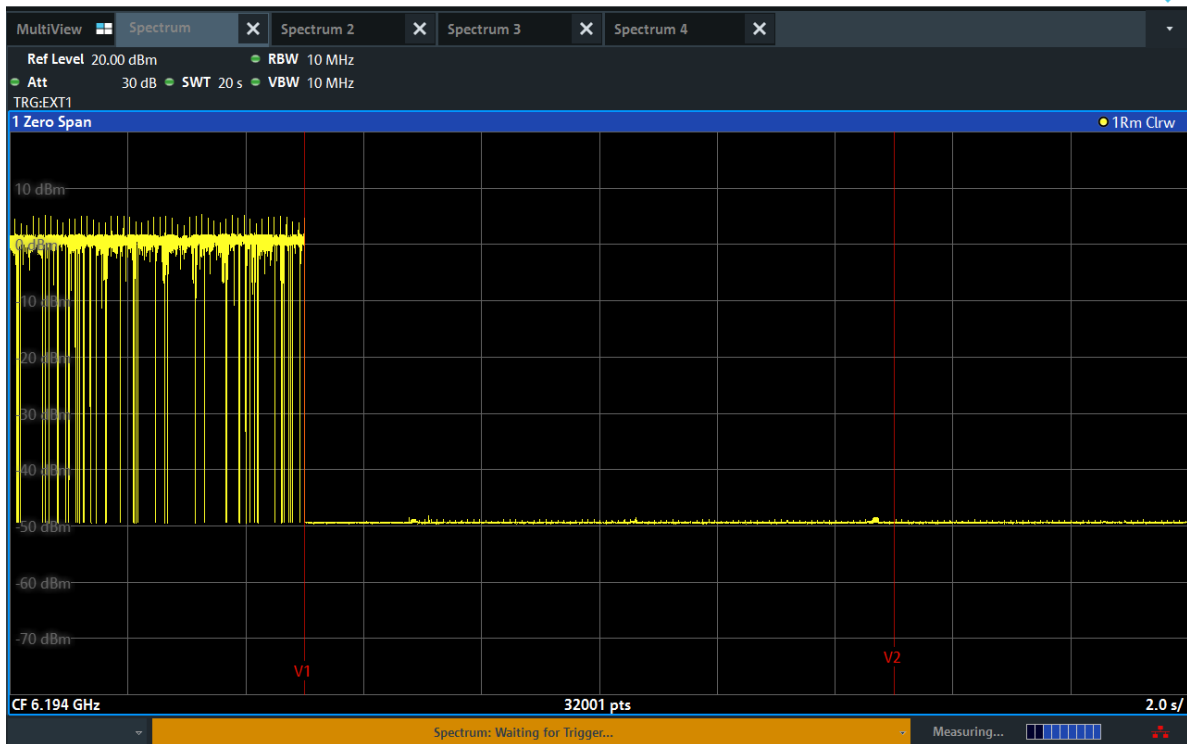


BW: 20 MHz / Frequency: 6474 MHz

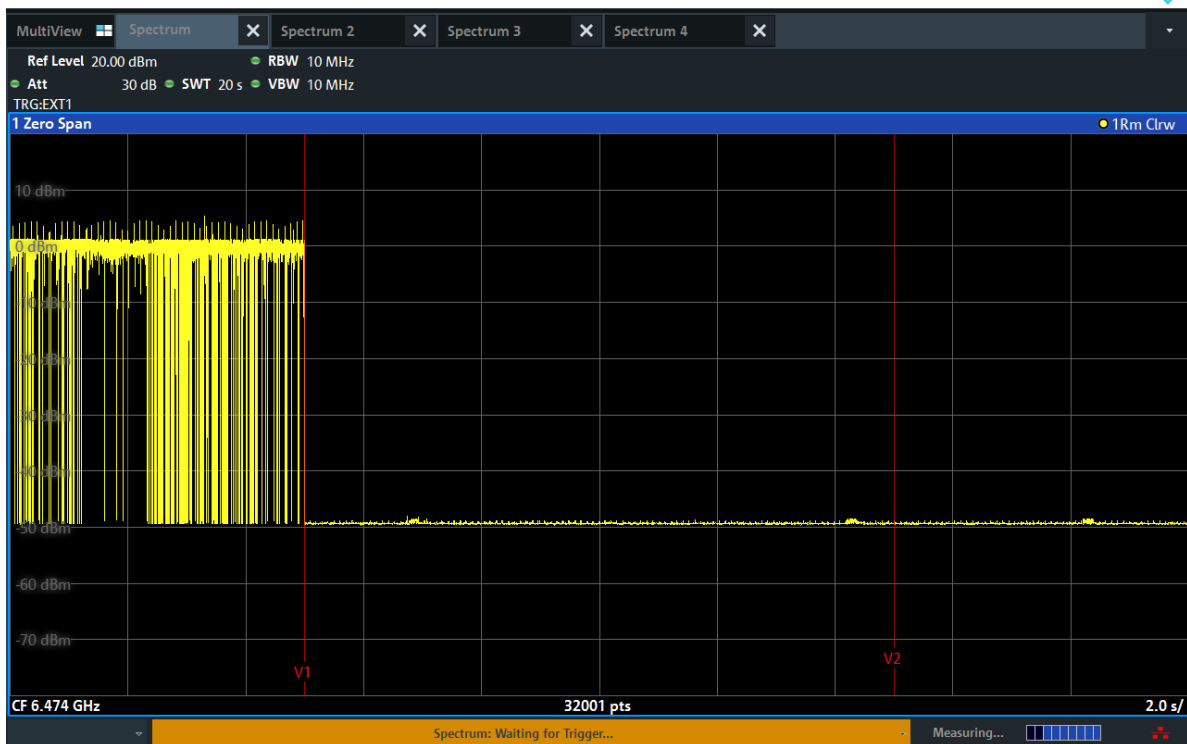


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

BW: 20 MHz / Frequency: 6694 MHz

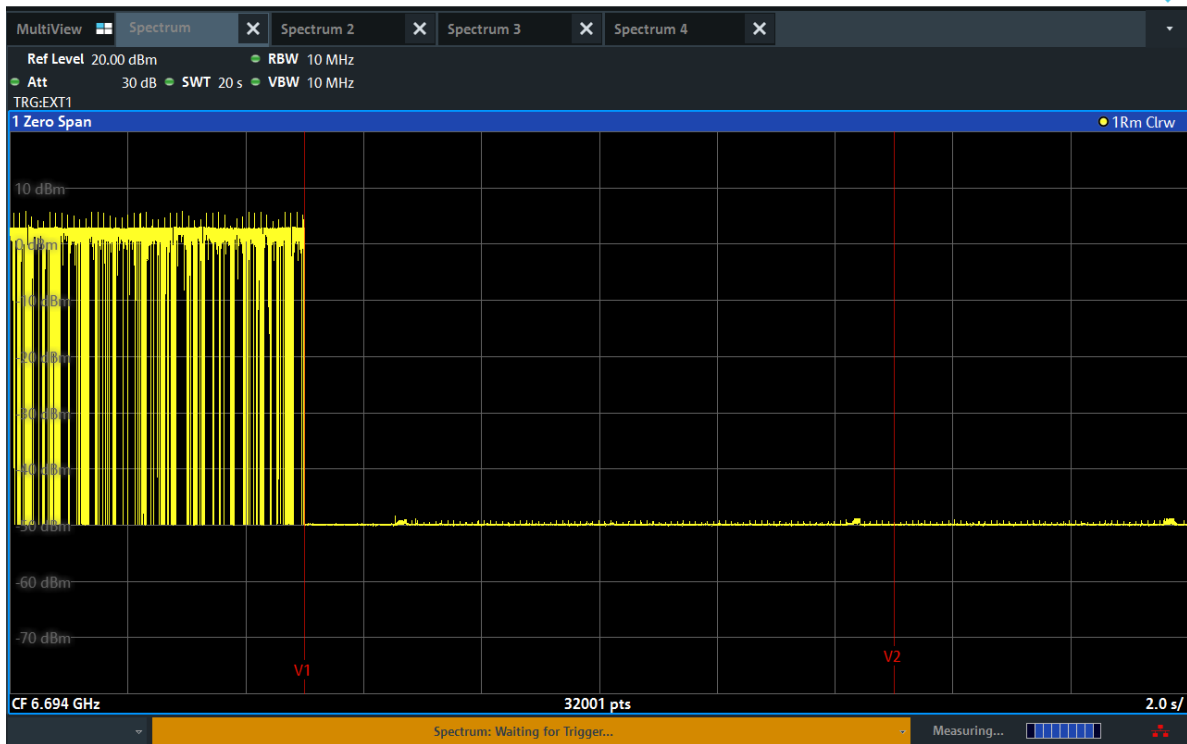


BW: 20 MHz / Frequency: 6994 MHz

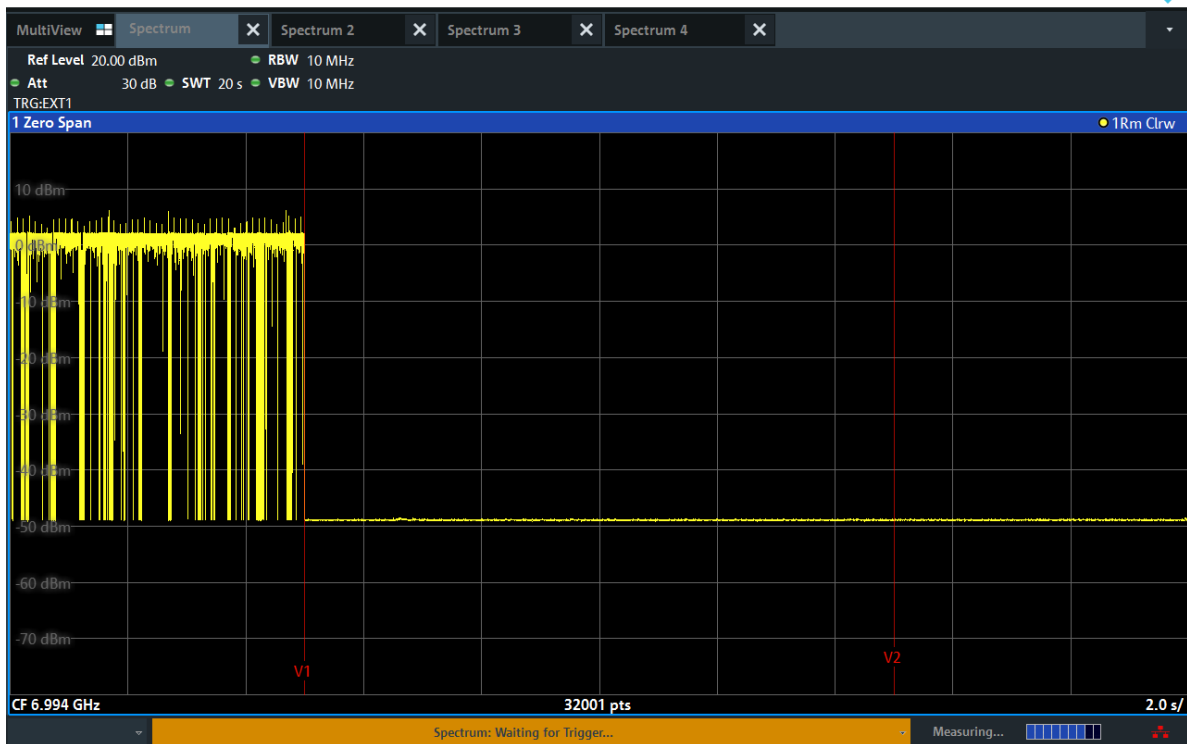


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

BW: 320 MHz / Frequency: 5950 MHz

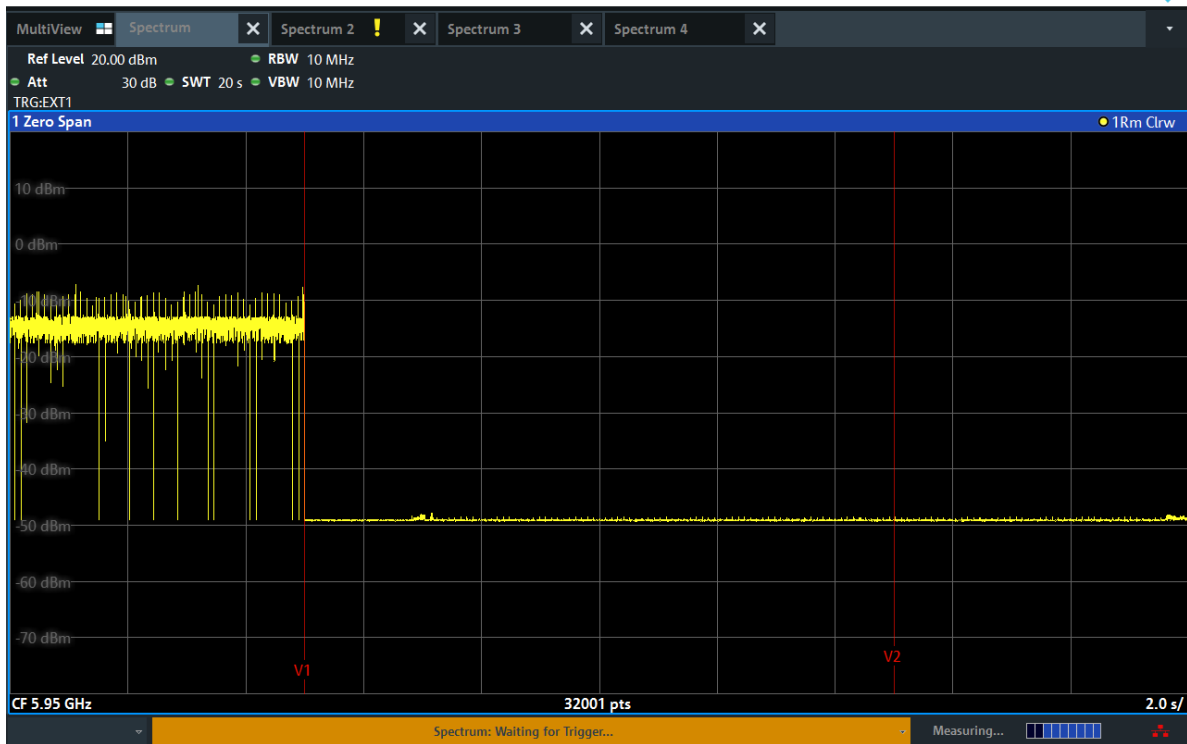


BW: 320 MHz / Frequency: 6100 MHz

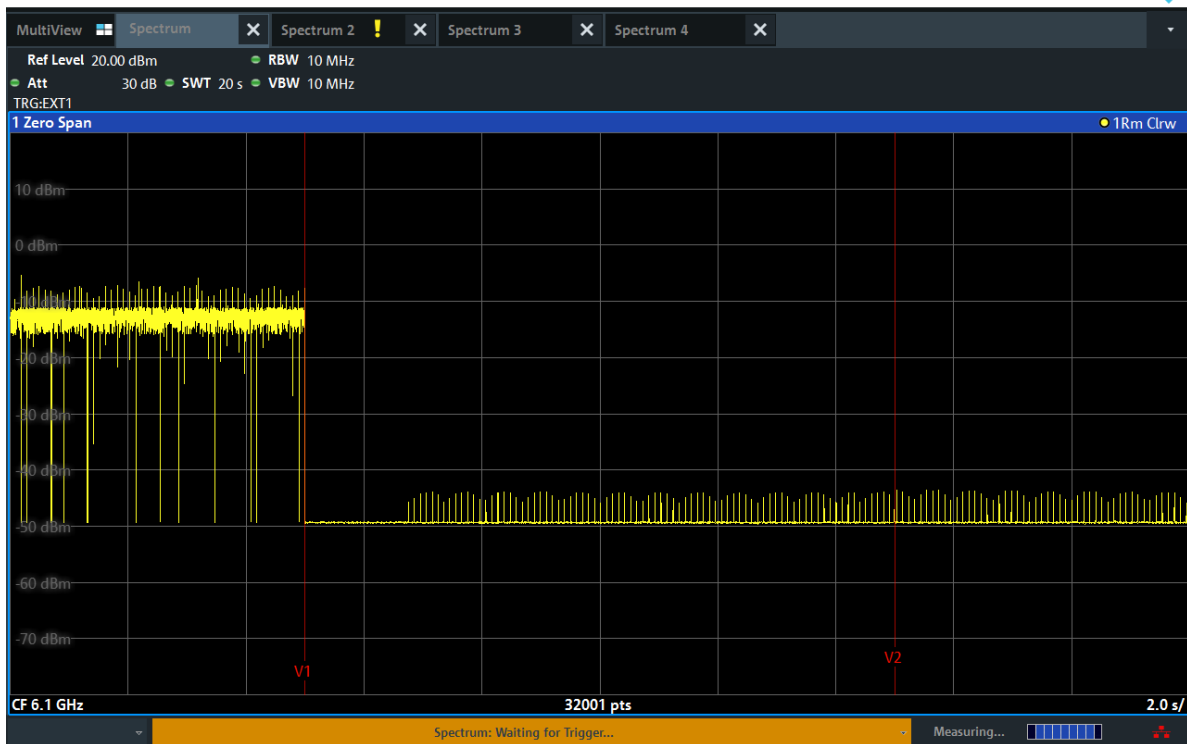


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

BW: 320 MHz / Frequency: 6260 MHz

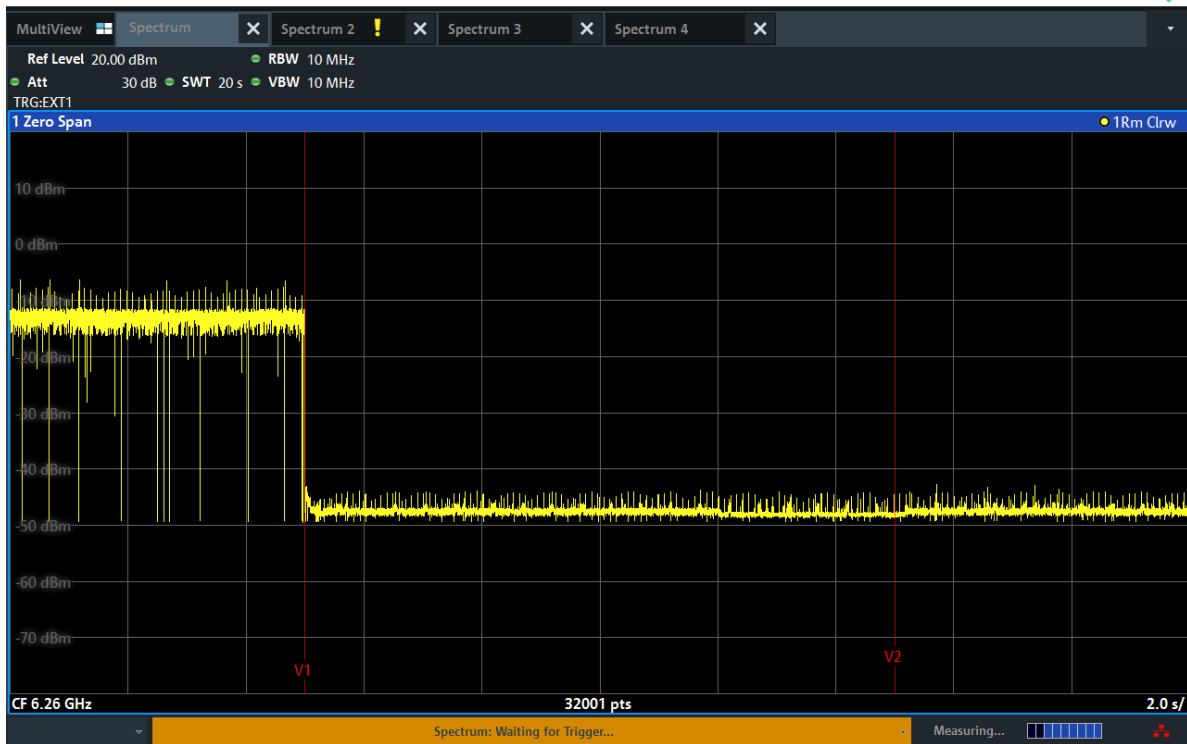


BW: 320 MHz / Frequency: 6270 MHz

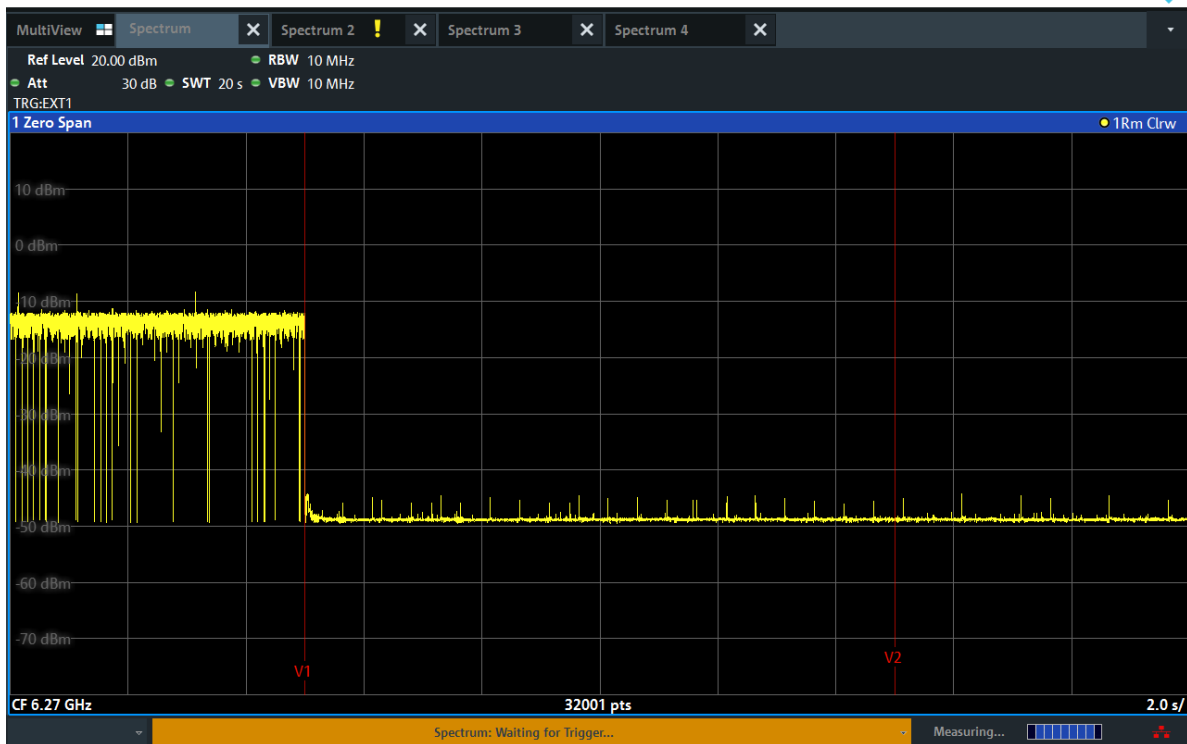


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

BW: 320 MHz / Frequency: 6420 MHz

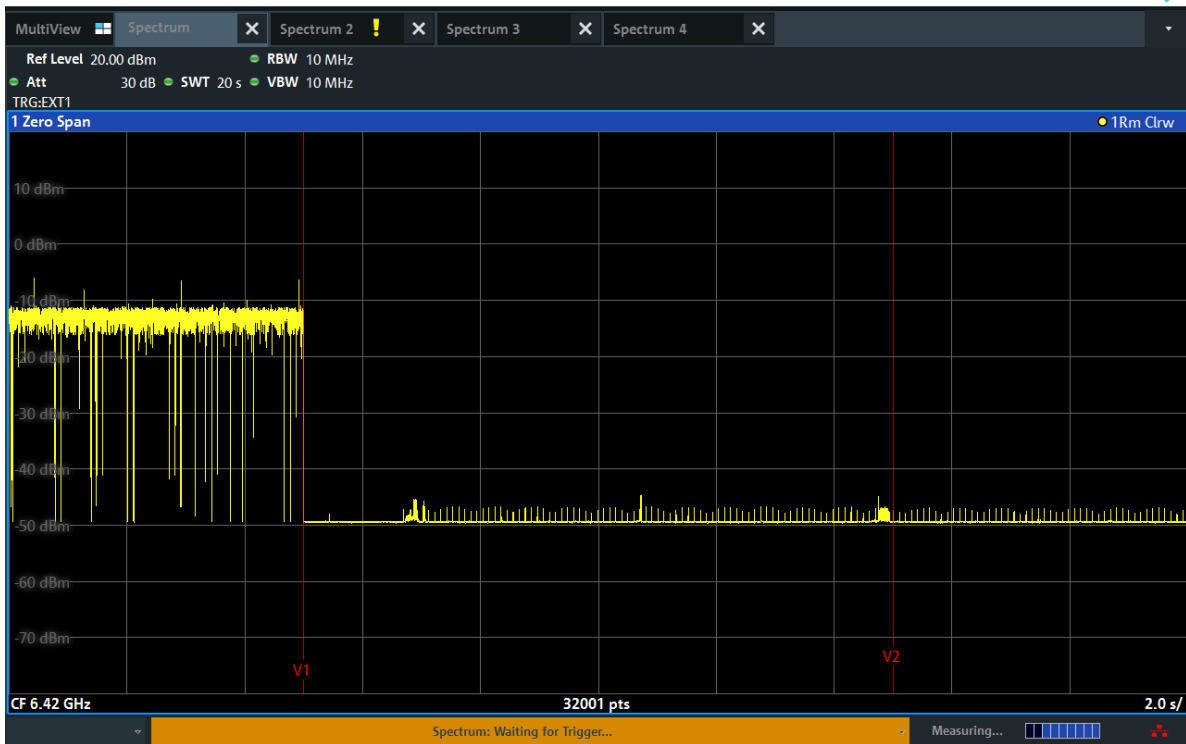


BW: 320 MHz / Frequency: 6580 MHz

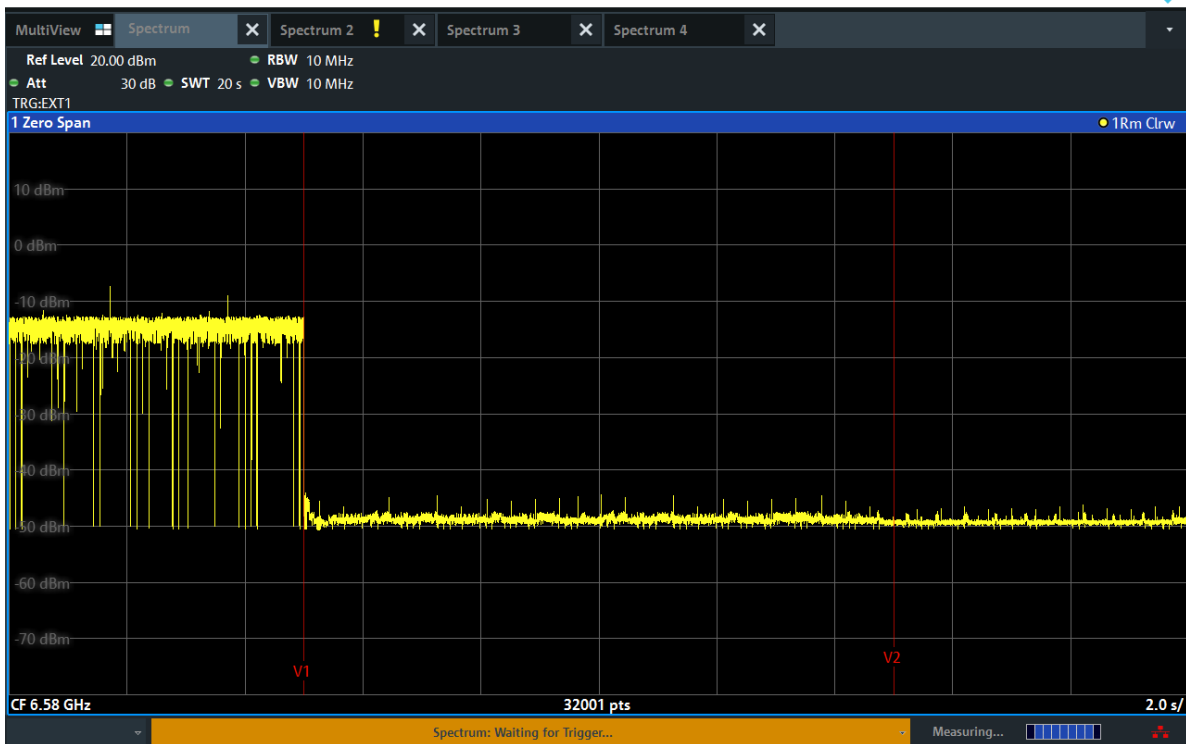


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.


BW: 320 MHz / Frequency: 6750 MHz

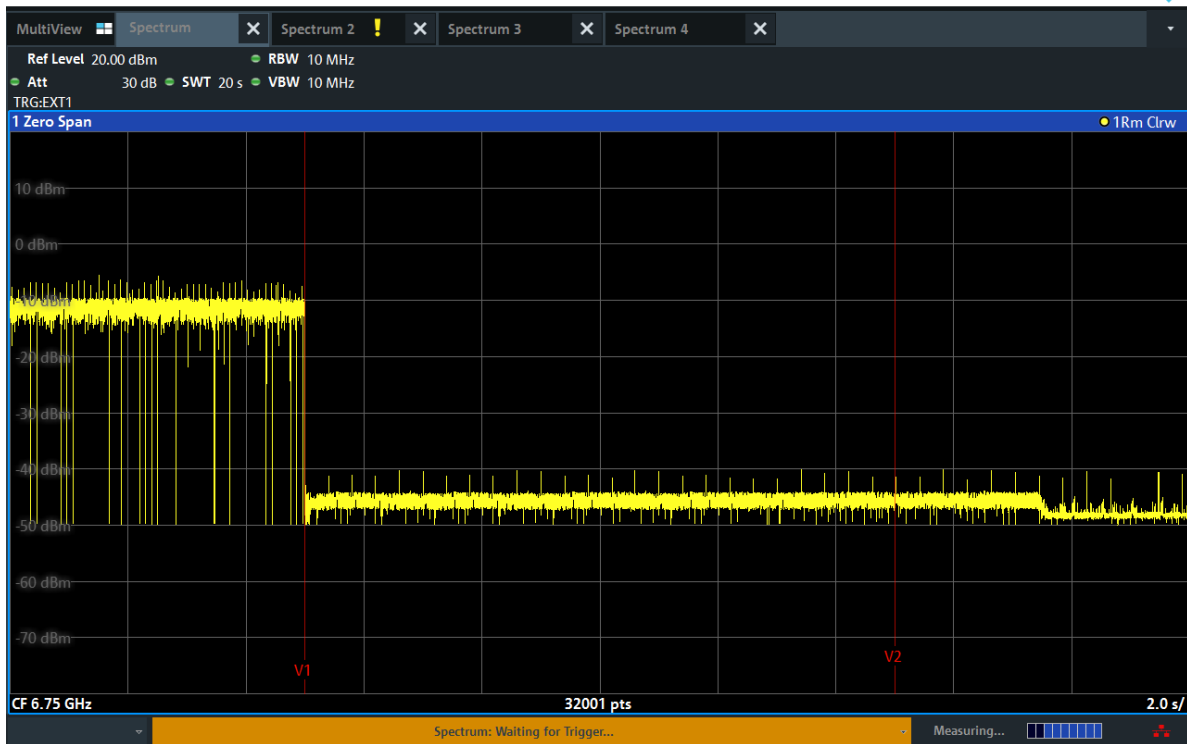

BW: 320 MHz / Frequency: 6900 MHz

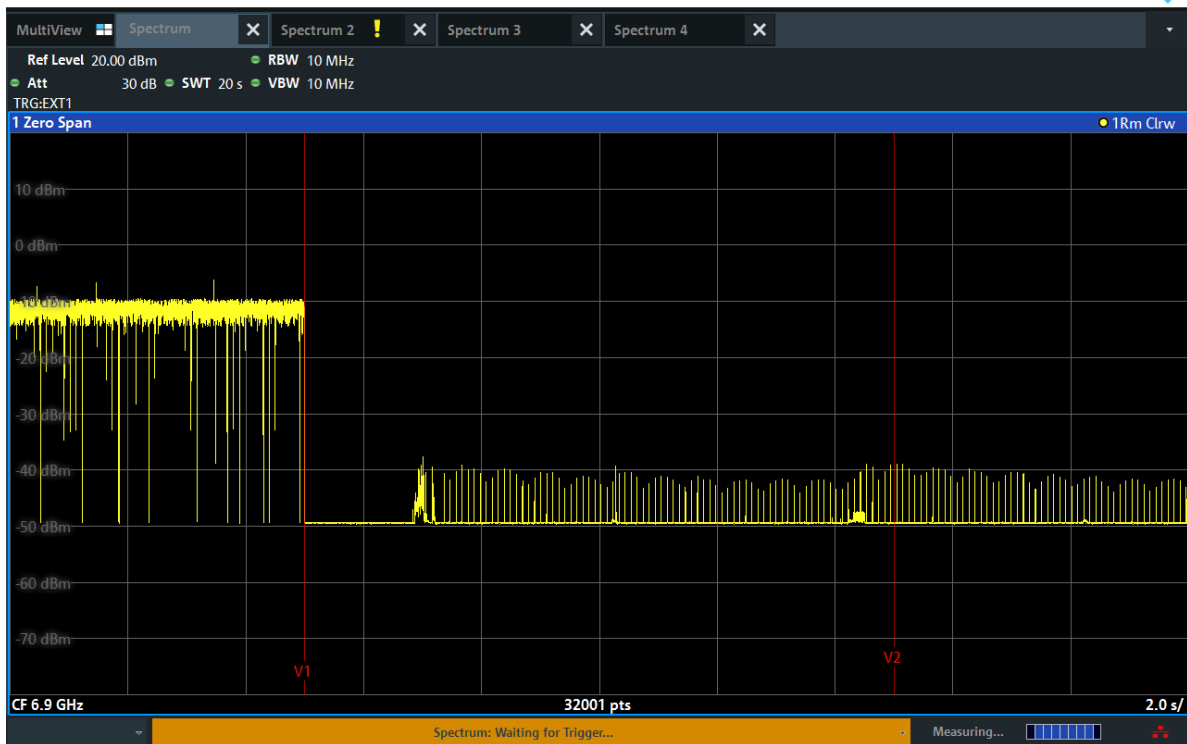

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

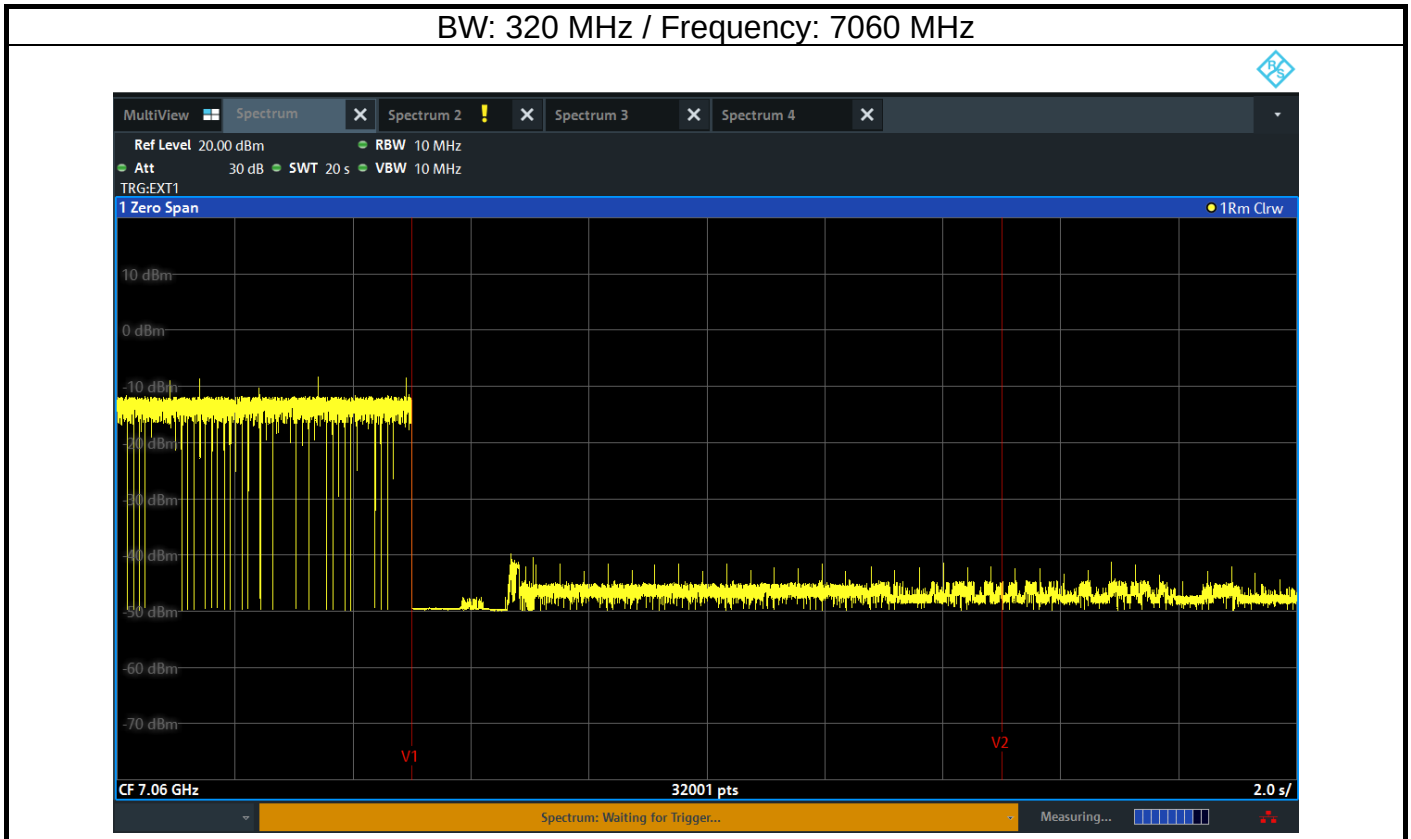

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.




Modulation Mode	be EHT320	Test Freq. (MHz)	6585
Power Phase	Line		

Test by : Joe Liao

Temperature: 24°C

Humidity: 64%

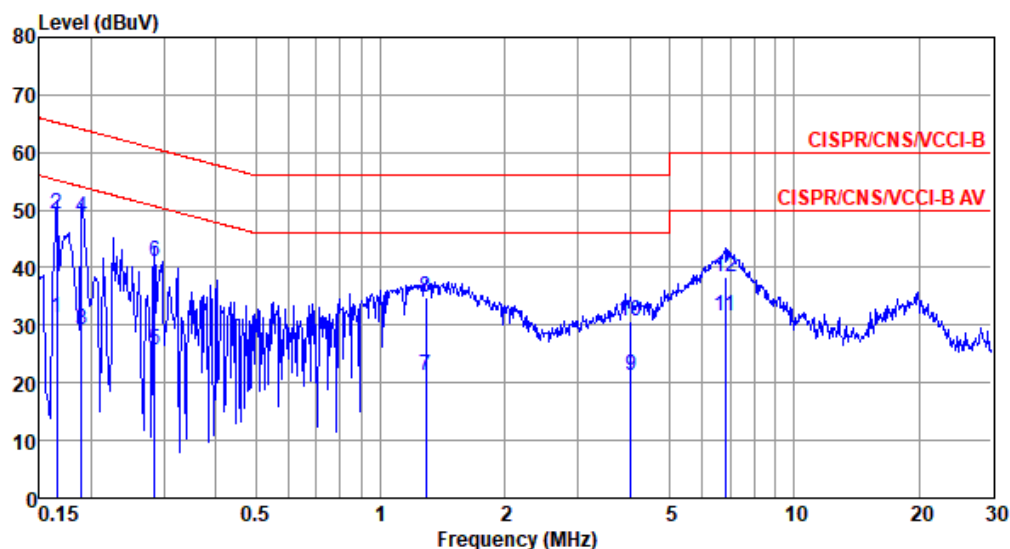

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	Remark
			dBuV	dB	dBuV		dB		
1	0.165	31.41	55.21	-23.80	21.63	9.75	0.03	0.00	Average
2	0.165	49.19	65.21	-16.02	39.41	9.75	0.03	0.00	QP
3	0.189	29.22	54.06	-24.84	19.43	9.75	0.04	0.00	Average
4*	0.189	48.81	64.06	-15.25	39.02	9.75	0.04	0.00	QP
5	0.285	25.59	50.68	-25.09	15.80	9.75	0.04	0.00	Average
6	0.285	41.15	60.68	-19.53	31.36	9.75	0.04	0.00	QP
7	1.289	21.12	46.00	-24.88	11.26	9.79	0.07	0.00	Average
8	1.289	34.77	56.00	-21.23	24.91	9.79	0.07	0.00	QP
9	4.027	21.38	46.00	-24.62	11.37	9.86	0.15	0.00	Average
10	4.027	30.72	56.00	-25.28	20.71	9.86	0.15	0.00	QP
11	6.805	31.44	50.00	-18.56	21.28	9.96	0.20	0.00	Average
12	6.805	38.48	60.00	-21.52	28.32	9.96	0.20	0.00	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).




Modulation Mode	be EHT320	Test Freq. (MHz)	6585
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 24°C

Humidity: 64%

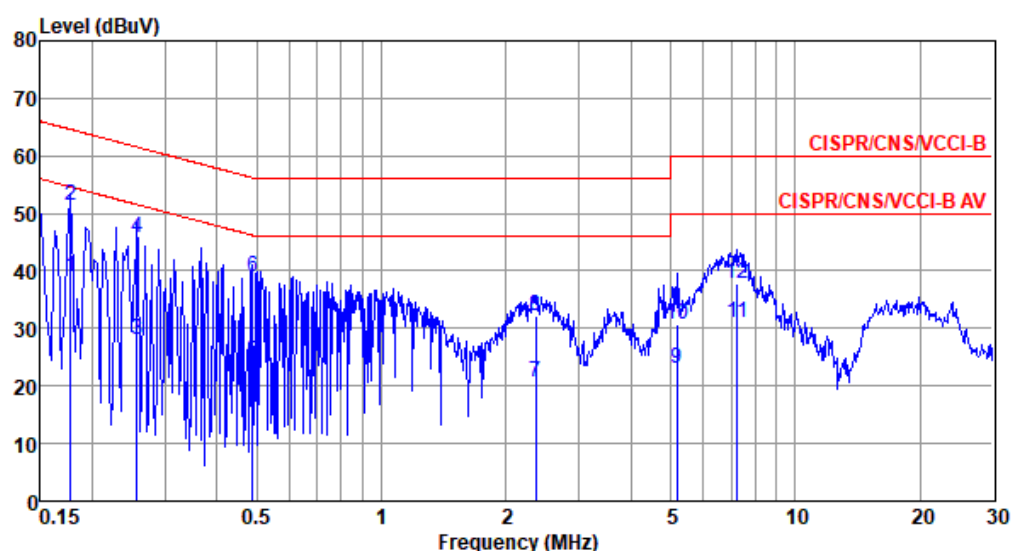

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.178	38.90	54.59	-15.69	29.12	9.74	0.04	0.00	Average
2*	0.178	51.26	64.59	-13.33	41.48	9.74	0.04	0.00	QP
3	0.256	28.09	51.56	-23.47	18.31	9.74	0.04	0.00	Average
4	0.256	45.81	61.56	-15.75	36.03	9.74	0.04	0.00	QP
5	0.489	24.33	46.19	-21.86	14.53	9.76	0.04	0.00	Average
6	0.489	38.85	56.19	-17.34	29.05	9.76	0.04	0.00	QP
7	2.358	20.62	46.00	-25.38	10.69	9.83	0.10	0.00	Average
8	2.358	32.04	56.00	-23.96	22.11	9.83	0.10	0.00	QP
9	5.166	23.11	50.00	-26.89	12.99	9.95	0.17	0.00	Average
10	5.166	30.60	60.00	-29.40	20.48	9.95	0.17	0.00	QP
11	7.252	30.93	50.00	-19.07	20.68	10.05	0.20	0.00	Average
12	7.252	37.85	60.00	-22.15	27.60	10.05	0.20	0.00	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).