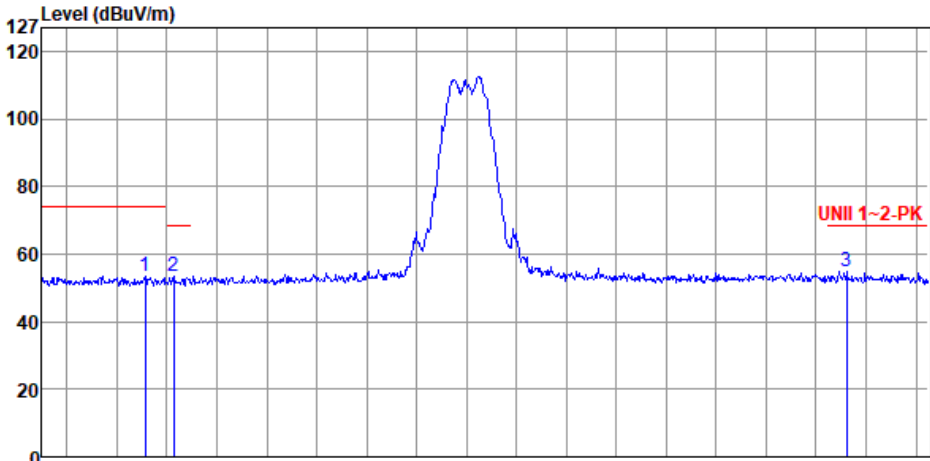




Band Edge measurement

Appendix D.2

Modulation	11a	Test Freq. (MHz)	5580																																																												
Polarization	Horizontal-Peak																																																														
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																															
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5451.18</td><td>53.48</td><td>74.00</td><td>-20.52</td><td>52.82</td><td>0.66</td><td>Peak</td><td>324</td><td>265</td></tr><tr><td>2</td><td>5462.90</td><td>53.47</td><td>68.20</td><td>-14.73</td><td>52.77</td><td>0.70</td><td>Peak</td><td>318</td><td>259</td></tr><tr><td>3</td><td>5732.34</td><td>54.90</td><td>68.20</td><td>-13.30</td><td>53.78</td><td>1.12</td><td>Peak</td><td>318</td><td>259</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5451.18	53.48	74.00	-20.52	52.82	0.66	Peak	324	265	2	5462.90	53.47	68.20	-14.73	52.77	0.70	Peak	318	259	3	5732.34	54.90	68.20	-13.30	53.78	1.12	Peak	318	259
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																						
		dBuV/m			dBuV			cm	deg																																																						
1	5451.18	53.48	74.00	-20.52	52.82	0.66	Peak	324	265																																																						
2	5462.90	53.47	68.20	-14.73	52.77	0.70	Peak	318	259																																																						
3	5732.34	54.90	68.20	-13.30	53.78	1.12	Peak	318	259																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															



Band Edge measurement

Appendix D.2

Modulation	11a	Test Freq. (MHz)	5580																			
Polarization	Horizontal-Average																					
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																						
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5410.71</td><td>41.28</td><td>54.00</td><td>-12.72</td><td>40.81</td><td>0.47</td><td>Average</td><td>324</td><td>265</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).				Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5410.71	41.28	54.00	-12.72	40.81	0.47	Average	324	265
Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5410.71	41.28	54.00	-12.72	40.81	0.47	Average	324	265													



Band Edge measurement

Appendix D.2

Modulation	11a	Test Freq. (MHz)	5580																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBUV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5444.44</td><td>54.69</td><td>74.00</td><td>-19.31</td><td>54.05</td><td>0.64</td><td>Peak</td><td>243</td><td>20</td></tr><tr><td>2</td><td>5465.74</td><td>54.32</td><td>68.20</td><td>-13.88</td><td>53.61</td><td>0.71</td><td>Peak</td><td>255</td><td>35</td></tr><tr><td>3</td><td>5736.25</td><td>55.21</td><td>68.20</td><td>-12.99</td><td>54.08</td><td>1.13</td><td>Peak</td><td>255</td><td>35</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5444.44	54.69	74.00	-19.31	54.05	0.64	Peak	243	20	2	5465.74	54.32	68.20	-13.88	53.61	0.71	Peak	255	35	3	5736.25	55.21	68.20	-12.99	54.08	1.13	Peak	255	35
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5444.44	54.69	74.00	-19.31	54.05	0.64	Peak	243	20																																		
2	5465.74	54.32	68.20	-13.88	53.61	0.71	Peak	255	35																																		
3	5736.25	55.21	68.20	-12.99	54.08	1.13	Peak	255	35																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

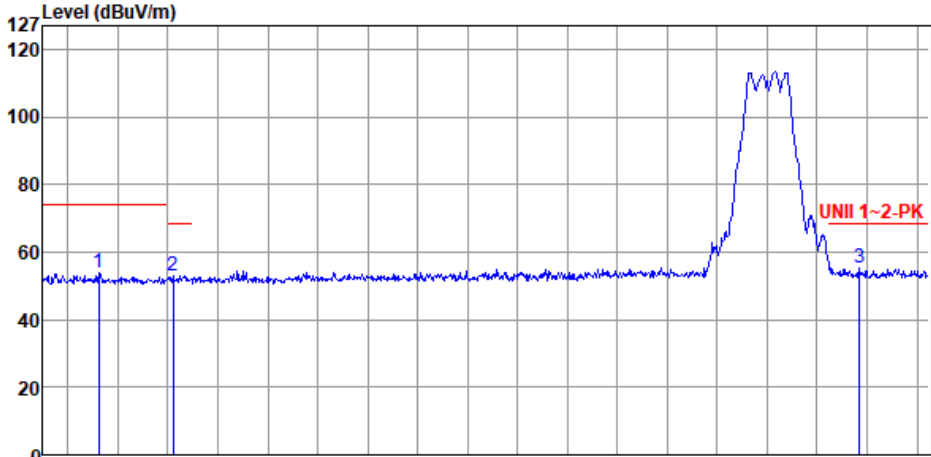
Appendix D.2

Modulation	11a	Test Freq. (MHz)	5580																											
Polarization	Vertical-Average																													
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																														
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5419.23</td><td>42.33</td><td>54.00</td><td>-11.67</td><td>41.81</td><td>0.52</td><td>Average</td><td>243</td><td>20</td></tr></tbody></table>				Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1 5419.23	42.33	54.00	-11.67	41.81	0.52	Average	243	20
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																						
MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																						
1 5419.23	42.33	54.00	-11.67	41.81	0.52	Average	243	20																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																														



Band Edge measurement

Appendix D.2

Modulation	11a	Test Freq. (MHz)	5700																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5432.37</td><td>53.72</td><td>74.00</td><td>-20.28</td><td>53.14</td><td>0.58</td><td>Peak</td><td>248</td><td>242</td></tr><tr><td>2</td><td>5462.19</td><td>52.99</td><td>68.20</td><td>-15.21</td><td>52.30</td><td>0.69</td><td>Peak</td><td>248</td><td>242</td></tr><tr><td>3</td><td>5736.96</td><td>55.44</td><td>68.20</td><td>-12.76</td><td>54.31</td><td>1.13</td><td>Peak</td><td>248</td><td>242</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5432.37	53.72	74.00	-20.28	53.14	0.58	Peak	248	242	2	5462.19	52.99	68.20	-15.21	52.30	0.69	Peak	248	242	3	5736.96	55.44	68.20	-12.76	54.31	1.13	Peak	248	242
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5432.37	53.72	74.00	-20.28	53.14	0.58	Peak	248	242																																		
2	5462.19	52.99	68.20	-15.21	52.30	0.69	Peak	248	242																																		
3	5736.96	55.44	68.20	-12.76	54.31	1.13	Peak	248	242																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

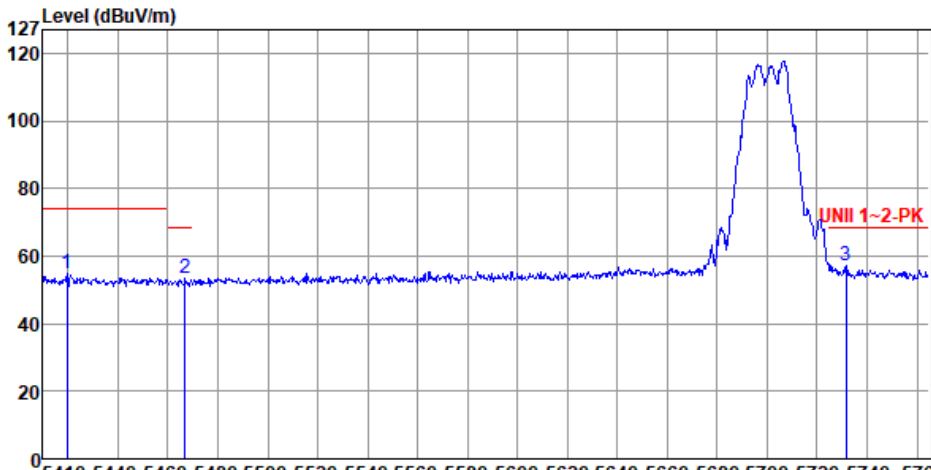
Appendix D.2

Modulation	11a	Test Freq. (MHz)	5700																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m) 1 Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5444.08</td><td>41.30</td><td>54.00</td><td>-12.70</td><td>40.66</td><td>0.64</td><td>Average</td><td>248</td><td>242</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	5444.08	41.30	54.00	-12.70	40.66	0.64	Average	248	242
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																								
1	5444.08	41.30	54.00	-12.70	40.66	0.64	Average	248	242																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	11a	Test Freq. (MHz)	5700																																																		
Polarization	Vertical-Peak																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5419.59</td><td>54.65</td><td>74.00</td><td>-19.35</td><td>54.13</td><td>0.52</td><td>Peak</td><td>246</td><td>28</td></tr><tr><td>2</td><td>5466.80</td><td>53.29</td><td>68.20</td><td>-14.91</td><td>52.58</td><td>0.71</td><td>Peak</td><td>246</td><td>28</td></tr><tr><td>3</td><td>5731.63</td><td>57.16</td><td>68.20</td><td>-11.04</td><td>56.04</td><td>1.12</td><td>Peak</td><td>246</td><td>28</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	5419.59	54.65	74.00	-19.35	54.13	0.52	Peak	246	28	2	5466.80	53.29	68.20	-14.91	52.58	0.71	Peak	246	28	3	5731.63	57.16	68.20	-11.04	56.04	1.12	Peak	246	28
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																																												
1	5419.59	54.65	74.00	-19.35	54.13	0.52	Peak	246	28																																												
2	5466.80	53.29	68.20	-14.91	52.58	0.71	Peak	246	28																																												
3	5731.63	57.16	68.20	-11.04	56.04	1.12	Peak	246	28																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

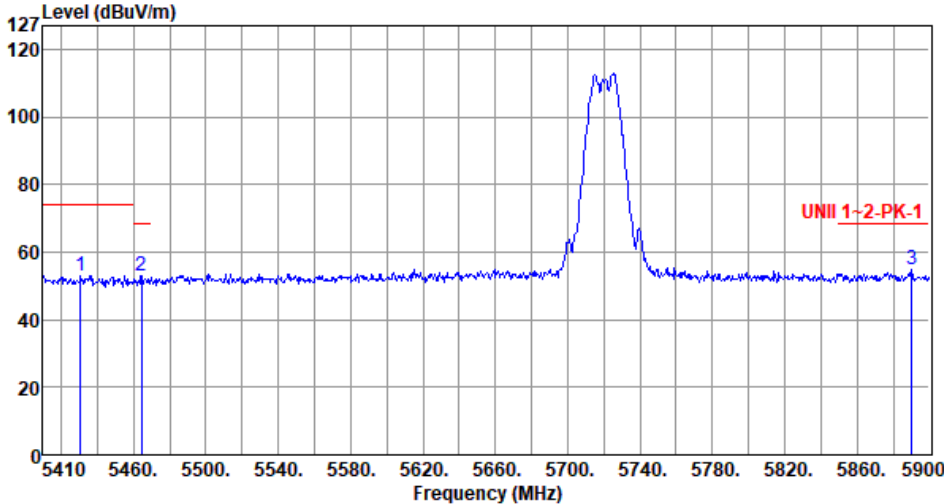
Appendix D.2

Modulation	11a	Test Freq. (MHz)	5700						
Polarization	Vertical-Average								
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64									
Level (dBuV/m) 1 Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5421.72	42.11	54.00	-11.89	41.58	0.53	Average	246	28
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Band Edge measurement

Appendix D.2

Modulation	11a	Test Freq. (MHz)	5720																																																		
Polarization	Horizontal-Peak																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5430.58</td><td>53.10</td><td>74.00</td><td>-20.90</td><td>52.53</td><td>0.57</td><td>Peak</td><td>307</td><td>261</td></tr><tr><td>2</td><td>5464.39</td><td>52.76</td><td>68.20</td><td>-15.44</td><td>52.06</td><td>0.70</td><td>Peak</td><td>307</td><td>261</td></tr><tr><td>3</td><td>5890.20</td><td>54.68</td><td>68.20</td><td>-13.52</td><td>53.09</td><td>1.59</td><td>Peak</td><td>307</td><td>261</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5430.58	53.10	74.00	-20.90	52.53	0.57	Peak	307	261	2	5464.39	52.76	68.20	-15.44	52.06	0.70	Peak	307	261	3	5890.20	54.68	68.20	-13.52	53.09	1.59	Peak	307	261
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																												
1	5430.58	53.10	74.00	-20.90	52.53	0.57	Peak	307	261																																												
2	5464.39	52.76	68.20	-15.44	52.06	0.70	Peak	307	261																																												
3	5890.20	54.68	68.20	-13.52	53.09	1.59	Peak	307	261																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

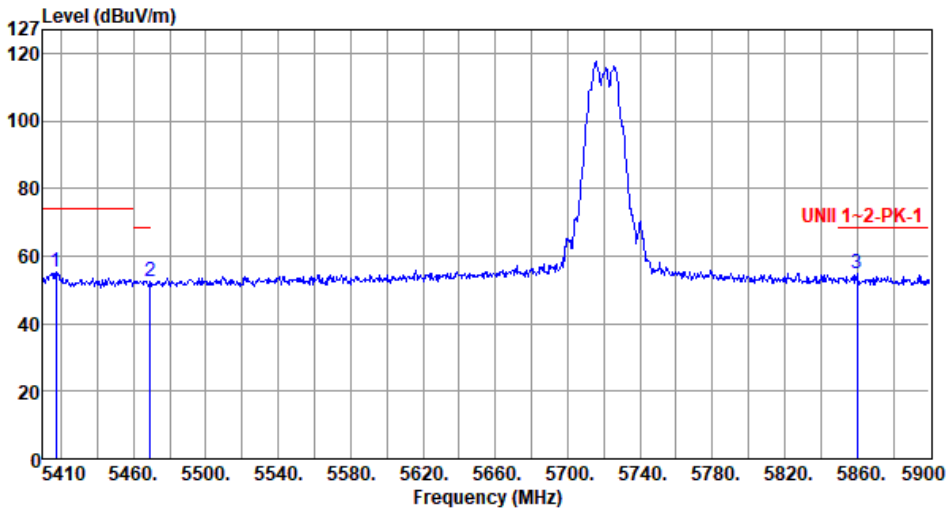
Appendix D.2

Modulation	11a	Test Freq. (MHz)	5720
Polarization	Horizontal-Average		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) <			



Band Edge measurement

Appendix D.2

Modulation	11a	Test Freq. (MHz)	5720																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5417.35</td><td>55.46</td><td>74.00</td><td>-18.54</td><td>54.95</td><td>0.51</td><td>Peak</td><td>234</td><td>20</td></tr><tr><td>2</td><td>5469.29</td><td>52.65</td><td>68.20</td><td>-15.55</td><td>51.93</td><td>0.72</td><td>Peak</td><td>234</td><td>20</td></tr><tr><td>3</td><td>5859.82</td><td>54.78</td><td>68.20</td><td>-13.42</td><td>53.31</td><td>1.47</td><td>Peak</td><td>234</td><td>20</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5417.35	55.46	74.00	-18.54	54.95	0.51	Peak	234	20	2	5469.29	52.65	68.20	-15.55	51.93	0.72	Peak	234	20	3	5859.82	54.78	68.20	-13.42	53.31	1.47	Peak	234	20
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5417.35	55.46	74.00	-18.54	54.95	0.51	Peak	234	20																																		
2	5469.29	52.65	68.20	-15.55	51.93	0.72	Peak	234	20																																		
3	5859.82	54.78	68.20	-13.42	53.31	1.47	Peak	234	20																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D.2

Modulation	11a	Test Freq. (MHz)	5720																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																							
Level (dBuV/m) 1 Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5417.84</td><td>43.41</td><td>54.00</td><td>-10.59</td><td>42.90</td><td>0.51</td><td>Average</td><td>234</td><td>20</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5417.84	43.41	54.00	-10.59	42.90	0.51	Average	234	20
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5417.84	43.41	54.00	-10.59	42.90	0.51	Average	234	20														



Band Edge measurement

Appendix D.2

Modulation	11a	Test Freq. (MHz)	5745																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5645.75</td><td>55.79</td><td>68.20</td><td>-12.41</td><td>54.88</td><td>0.91</td><td>Peak</td><td>293</td><td>275</td></tr><tr><td>2</td><td>5945.38</td><td>55.05</td><td>68.20</td><td>-13.15</td><td>53.38</td><td>1.67</td><td>Peak</td><td>293</td><td>275</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5645.75	55.79	68.20	-12.41	54.88	0.91	Peak	293	275	2	5945.38	55.05	68.20	-13.15	53.38	1.67	Peak	293	275
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5645.75	55.79	68.20	-12.41	54.88	0.91	Peak	293	275																								
2	5945.38	55.05	68.20	-13.15	53.38	1.67	Peak	293	275																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

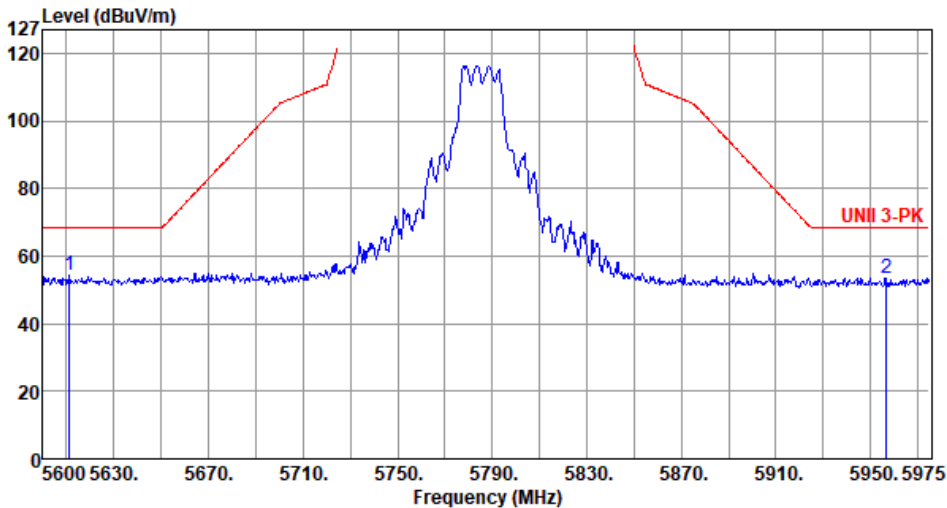
Appendix D.2

Modulation	11a	Test Freq. (MHz)	5745																																																		
Polarization	Vertical-Peak																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5639.38</td><td>58.02</td><td>68.20</td><td>-10.18</td><td>57.13</td><td>0.89</td><td>Peak</td><td>251</td><td>27</td></tr><tr><td>2</td><td>5955.88</td><td>54.07</td><td>68.20</td><td>-14.13</td><td>52.39</td><td>1.68</td><td>Peak</td><td>251</td><td>27</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5639.38	58.02	68.20	-10.18	57.13	0.89	Peak	251	27	2	5955.88	54.07	68.20	-14.13	52.39	1.68	Peak	251	27
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5639.38	58.02	68.20	-10.18	57.13	0.89	Peak	251	27																																												
2	5955.88	54.07	68.20	-14.13	52.39	1.68	Peak	251	27																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

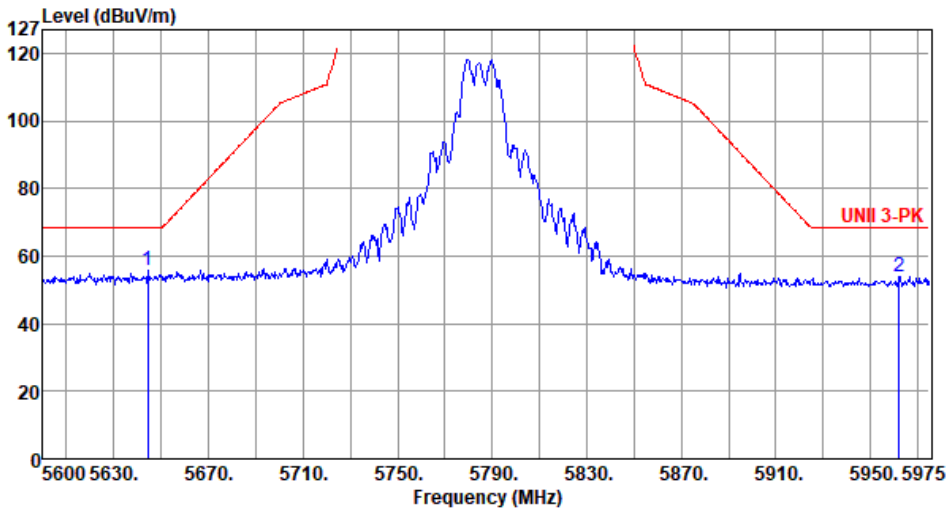
Appendix D.2

Modulation	11a	Test Freq. (MHz)	5785																																																		
Polarization	Horizontal-Peak																																																				
Test By :Brad Wu_ Temperature(°C):22 Humidity(%):66																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5611.25</td><td>54.49</td><td>68.20</td><td>-13.71</td><td>53.66</td><td>0.83</td><td>Peak</td><td>303</td><td>233</td></tr><tr><td>2</td><td>5956.63</td><td>53.56</td><td>68.20</td><td>-14.64</td><td>51.88</td><td>1.68</td><td>Peak</td><td>303</td><td>233</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5611.25	54.49	68.20	-13.71	53.66	0.83	Peak	303	233	2	5956.63	53.56	68.20	-14.64	51.88	1.68	Peak	303	233
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
		dBUV/m			dBUV			cm	deg																																												
1	5611.25	54.49	68.20	-13.71	53.66	0.83	Peak	303	233																																												
2	5956.63	53.56	68.20	-14.64	51.88	1.68	Peak	303	233																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D.2

Modulation	11a	Test Freq. (MHz)	5785																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):22 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5644.25</td><td>55.75</td><td>68.20</td><td>-12.45</td><td>54.84</td><td>0.91</td><td>Peak</td><td>224</td><td>9</td></tr><tr><td>2</td><td>5962.25</td><td>53.90</td><td>68.20</td><td>-14.30</td><td>52.21</td><td>1.69</td><td>Peak</td><td>224</td><td>9</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5644.25	55.75	68.20	-12.45	54.84	0.91	Peak	224	9	2	5962.25	53.90	68.20	-14.30	52.21	1.69	Peak	224	9
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5644.25	55.75	68.20	-12.45	54.84	0.91	Peak	224	9																								
2	5962.25	53.90	68.20	-14.30	52.21	1.69	Peak	224	9																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	11a	Test Freq. (MHz)	5825
Polarization	Horizontal-Peak		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) Freq. Emission Limit Margin SA Factor Remark ANT Turn level dBUV/m dBUV/m dB reading dB/m MHz dBUV/m 1 5623.63 55.80 68.20 -12.40 54.94 0.86 Peak 328 271 2 5957.75 54.10 68.20 -14.10 52.41 1.69 Peak 328 271			
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).			



Band Edge measurement

Appendix D.2

Modulation	11a	Test Freq. (MHz)	5825
Polarization	Vertical-Peak		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) UNII 3-PK Freq. Emission Limit Margin SA Factor Remark ANT Turn level dBUV/m dBUV/m dB reading MHz dBUV dB/m 1 5621.00 55.98 68.20 -12.22 55.13 0.85 Peak 239 21 2 5934.13 54.69 68.20 -13.51 53.03 1.66 Peak 239 21			
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).			



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5180																																																		
Polarization	Horizontal-Peak																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.90</td><td>65.93</td><td>74.00</td><td>-8.07</td><td>64.83</td><td>1.10</td><td>Peak</td><td>192</td><td>90</td></tr><tr><td>2</td><td>5352.30</td><td>54.37</td><td>74.00</td><td>-19.63</td><td>54.05</td><td>0.32</td><td>Peak</td><td>192</td><td>90</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5148.90	65.93	74.00	-8.07	64.83	1.10	Peak	192	90	2	5352.30	54.37	74.00	-19.63	54.05	0.32	Peak	192	90
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
		dBUV/m			dBUV			cm	deg																																												
1	5148.90	65.93	74.00	-8.07	64.83	1.10	Peak	192	90																																												
2	5352.30	54.37	74.00	-19.63	54.05	0.32	Peak	192	90																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5180																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m) 127 120 100 80 60 40 20 0 5100 5130 5150 5170 5190 5210 5230 5250 5270 5290 5310 5330 5350 5370 5400 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.50</td><td>52.81</td><td>54.00</td><td>-1.19</td><td>51.71</td><td>1.10</td><td>Average</td><td>192</td><td>90</td></tr><tr><td>2</td><td>5351.40</td><td>41.41</td><td>54.00</td><td>-12.59</td><td>41.09</td><td>0.32</td><td>Average</td><td>192</td><td>90</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.50	52.81	54.00	-1.19	51.71	1.10	Average	192	90	2	5351.40	41.41	54.00	-12.59	41.09	0.32	Average	192	90
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.50	52.81	54.00	-1.19	51.71	1.10	Average	192	90																								
2	5351.40	41.41	54.00	-12.59	41.09	0.32	Average	192	90																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5180																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m) UNII 1-2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.20</td><td>65.76</td><td>74.00</td><td>-8.24</td><td>64.66</td><td>1.10</td><td>Peak</td><td>186</td><td>32</td></tr><tr><td>2</td><td>5372.70</td><td>54.41</td><td>74.00</td><td>-19.59</td><td>54.04</td><td>0.37</td><td>Peak</td><td>186</td><td>32</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.20	65.76	74.00	-8.24	64.66	1.10	Peak	186	32	2	5372.70	54.41	74.00	-19.59	54.04	0.37	Peak	186	32
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.20	65.76	74.00	-8.24	64.66	1.10	Peak	186	32																								
2	5372.70	54.41	74.00	-19.59	54.04	0.37	Peak	186	32																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5180																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.80</td><td>53.62</td><td>54.00</td><td>-0.38</td><td>52.52</td><td>1.10</td><td>Average</td><td>186</td><td>32</td></tr><tr><td>2</td><td>5355.60</td><td>42.28</td><td>54.00</td><td>-11.72</td><td>41.95</td><td>0.33</td><td>Average</td><td>186</td><td>32</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	53.62	54.00	-0.38	52.52	1.10	Average	186	32	2	5355.60	42.28	54.00	-11.72	41.95	0.33	Average	186	32
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	53.62	54.00	-0.38	52.52	1.10	Average	186	32																								
2	5355.60	42.28	54.00	-11.72	41.95	0.33	Average	186	32																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5200																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.20</td><td>63.91</td><td>74.00</td><td>-10.09</td><td>62.81</td><td>1.10</td><td>Peak</td><td>187</td><td>90</td></tr><tr><td>2</td><td>5375.70</td><td>53.86</td><td>74.00</td><td>-20.14</td><td>53.49</td><td>0.37</td><td>Peak</td><td>187</td><td>90</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5149.20	63.91	74.00	-10.09	62.81	1.10	Peak	187	90	2	5375.70	53.86	74.00	-20.14	53.49	0.37	Peak	187	90
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5149.20	63.91	74.00	-10.09	62.81	1.10	Peak	187	90																																		
2	5375.70	53.86	74.00	-20.14	53.49	0.37	Peak	187	90																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5200																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m) UNII 1~2-AV 2 Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.80</td><td>48.93</td><td>54.00</td><td>-5.07</td><td>47.83</td><td>1.10</td><td>Average</td><td>187</td><td>90</td></tr><tr><td>2</td><td>5366.40</td><td>41.35</td><td>54.00</td><td>-12.65</td><td>40.99</td><td>0.36</td><td>Average</td><td>187</td><td>90</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	48.93	54.00	-5.07	47.83	1.10	Average	187	90	2	5366.40	41.35	54.00	-12.65	40.99	0.36	Average	187	90
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	48.93	54.00	-5.07	47.83	1.10	Average	187	90																								
2	5366.40	41.35	54.00	-12.65	40.99	0.36	Average	187	90																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

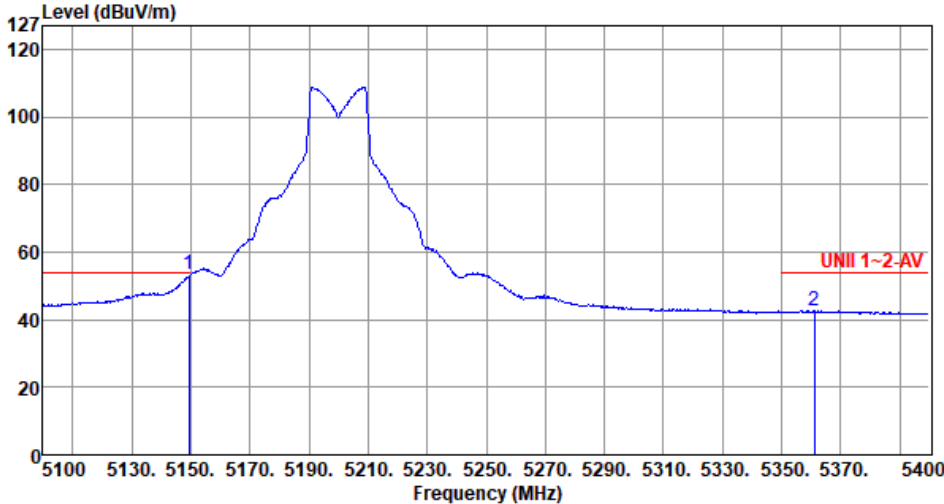
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5200																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m) UNII 1-2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5147.40</td><td>68.13</td><td>74.00</td><td>-5.87</td><td>67.04</td><td>1.09</td><td>Peak</td><td>185</td><td>34</td></tr><tr><td>2</td><td>5367.90</td><td>54.97</td><td>74.00</td><td>-19.03</td><td>54.60</td><td>0.37</td><td>Peak</td><td>185</td><td>34</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5147.40	68.13	74.00	-5.87	67.04	1.09	Peak	185	34	2	5367.90	54.97	74.00	-19.03	54.60	0.37	Peak	185	34
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5147.40	68.13	74.00	-5.87	67.04	1.09	Peak	185	34																								
2	5367.90	54.97	74.00	-19.03	54.60	0.37	Peak	185	34																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5200																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.50</td><td>53.53</td><td>54.00</td><td>-0.47</td><td>52.43</td><td>1.10</td><td>Average</td><td>185</td><td>34</td></tr><tr><td>2</td><td>5361.00</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>42.34</td><td>0.34</td><td>Average</td><td>185</td><td>34</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.50	53.53	54.00	-0.47	52.43	1.10	Average	185	34	2	5361.00	42.68	54.00	-11.32	42.34	0.34	Average	185	34
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.50	53.53	54.00	-0.47	52.43	1.10	Average	185	34																								
2	5361.00	42.68	54.00	-11.32	42.34	0.34	Average	185	34																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

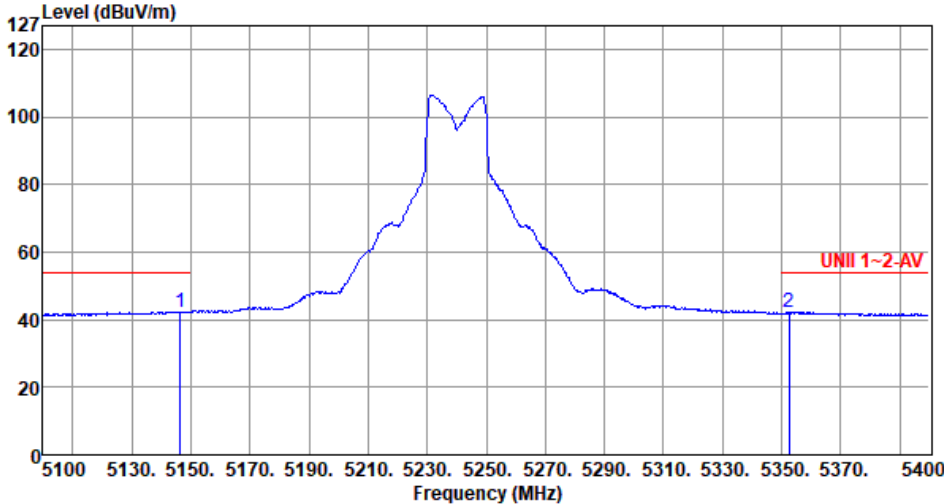
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5240																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5133.30</td><td>54.69</td><td>74.00</td><td>-19.31</td><td>53.63</td><td>1.06</td><td>Peak</td><td>180</td><td>94</td></tr><tr><td>2</td><td>5351.40</td><td>55.56</td><td>74.00</td><td>-18.44</td><td>55.24</td><td>0.32</td><td>Peak</td><td>180</td><td>94</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5133.30	54.69	74.00	-19.31	53.63	1.06	Peak	180	94	2	5351.40	55.56	74.00	-18.44	55.24	0.32	Peak	180	94
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5133.30	54.69	74.00	-19.31	53.63	1.06	Peak	180	94																								
2	5351.40	55.56	74.00	-18.44	55.24	0.32	Peak	180	94																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5240																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5146.50</td><td>42.40</td><td>54.00</td><td>-11.60</td><td>41.31</td><td>1.09</td><td>Average</td><td>180</td><td>94</td></tr><tr><td>2</td><td>5352.60</td><td>42.15</td><td>54.00</td><td>-11.85</td><td>41.82</td><td>0.33</td><td>Average</td><td>180</td><td>94</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5146.50	42.40	54.00	-11.60	41.31	1.09	Average	180	94	2	5352.60	42.15	54.00	-11.85	41.82	0.33	Average	180	94
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5146.50	42.40	54.00	-11.60	41.31	1.09	Average	180	94																								
2	5352.60	42.15	54.00	-11.85	41.82	0.33	Average	180	94																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5240																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5112.60</td><td>55.36</td><td>74.00</td><td>-18.64</td><td>54.35</td><td>1.01</td><td>Peak</td><td>179</td><td>29</td></tr><tr><td>2</td><td>5392.20</td><td>56.09</td><td>74.00</td><td>-17.91</td><td>55.69</td><td>0.40</td><td>Peak</td><td>179</td><td>29</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5112.60	55.36	74.00	-18.64	54.35	1.01	Peak	179	29	2	5392.20	56.09	74.00	-17.91	55.69	0.40	Peak	179	29
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5112.60	55.36	74.00	-18.64	54.35	1.01	Peak	179	29																								
2	5392.20	56.09	74.00	-17.91	55.69	0.40	Peak	179	29																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5240																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m) 1 2 UNII 1~2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5146.50</td><td>43.48</td><td>54.00</td><td>-10.52</td><td>42.39</td><td>1.09</td><td>Average</td><td>179</td><td>29</td></tr><tr><td>2</td><td>5354.10</td><td>43.34</td><td>54.00</td><td>-10.66</td><td>43.01</td><td>0.33</td><td>Average</td><td>179</td><td>29</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5146.50	43.48	54.00	-10.52	42.39	1.09	Average	179	29	2	5354.10	43.34	54.00	-10.66	43.01	0.33	Average	179	29
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5146.50	43.48	54.00	-10.52	42.39	1.09	Average	179	29																								
2	5354.10	43.34	54.00	-10.66	43.01	0.33	Average	179	29																								



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5260																																																		
Polarization	Horizontal-Peak																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5118.30</td><td>54.75</td><td>74.00</td><td>-19.25</td><td>53.72</td><td>1.03</td><td>Peak</td><td>185</td><td>96</td></tr><tr><td>2</td><td>5391.00</td><td>53.70</td><td>74.00</td><td>-20.30</td><td>53.30</td><td>0.40</td><td>Peak</td><td>185</td><td>96</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5118.30	54.75	74.00	-19.25	53.72	1.03	Peak	185	96	2	5391.00	53.70	74.00	-20.30	53.30	0.40	Peak	185	96
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5118.30	54.75	74.00	-19.25	53.72	1.03	Peak	185	96																																												
2	5391.00	53.70	74.00	-20.30	53.30	0.40	Peak	185	96																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

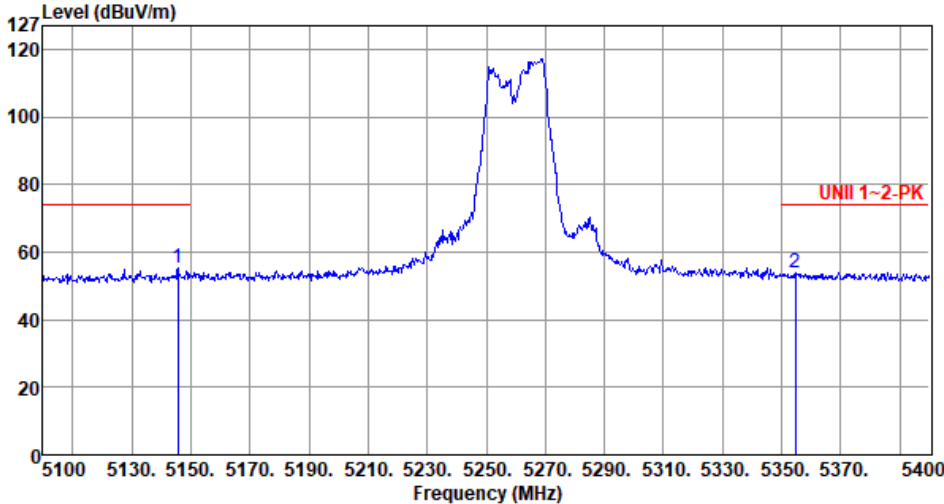
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5260																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5143.50</td><td>41.52</td><td>54.00</td><td>-12.48</td><td>40.44</td><td>1.08</td><td>Average</td><td>185</td><td>96</td></tr><tr><td>2</td><td>5362.80</td><td>41.24</td><td>54.00</td><td>-12.76</td><td>40.88</td><td>0.36</td><td>Average</td><td>185</td><td>96</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5143.50	41.52	54.00	-12.48	40.44	1.08	Average	185	96	2	5362.80	41.24	54.00	-12.76	40.88	0.36	Average	185	96
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5143.50	41.52	54.00	-12.48	40.44	1.08	Average	185	96																								
2	5362.80	41.24	54.00	-12.76	40.88	0.36	Average	185	96																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5260																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5145.60</td><td>55.42</td><td>74.00</td><td>-18.58</td><td>54.34</td><td>1.08</td><td>Peak</td><td>228</td><td>27</td></tr><tr><td>2</td><td>5354.70</td><td>53.88</td><td>74.00</td><td>-20.12</td><td>53.55</td><td>0.33</td><td>Peak</td><td>228</td><td>27</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.60	55.42	74.00	-18.58	54.34	1.08	Peak	228	27	2	5354.70	53.88	74.00	-20.12	53.55	0.33	Peak	228	27
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.60	55.42	74.00	-18.58	54.34	1.08	Peak	228	27																								
2	5354.70	53.88	74.00	-20.12	53.55	0.33	Peak	228	27																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

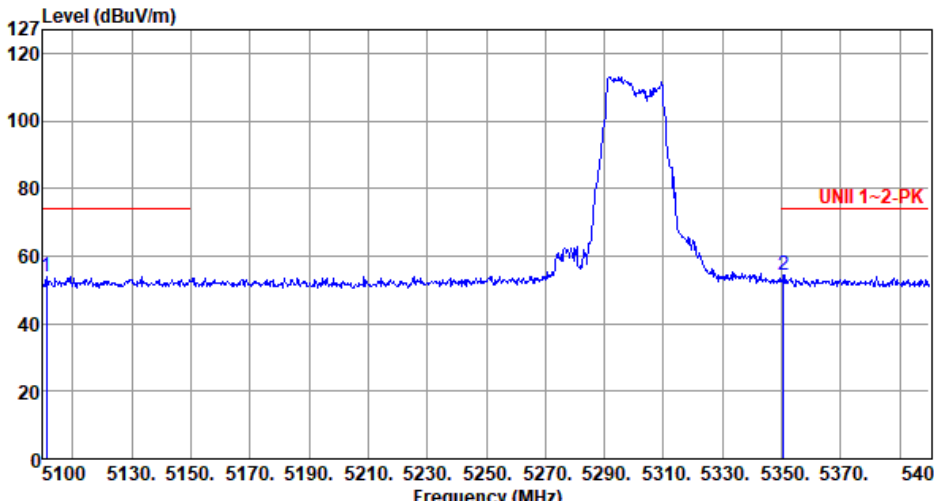
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5260
Polarization	Vertical-Average		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Band Edge measurement

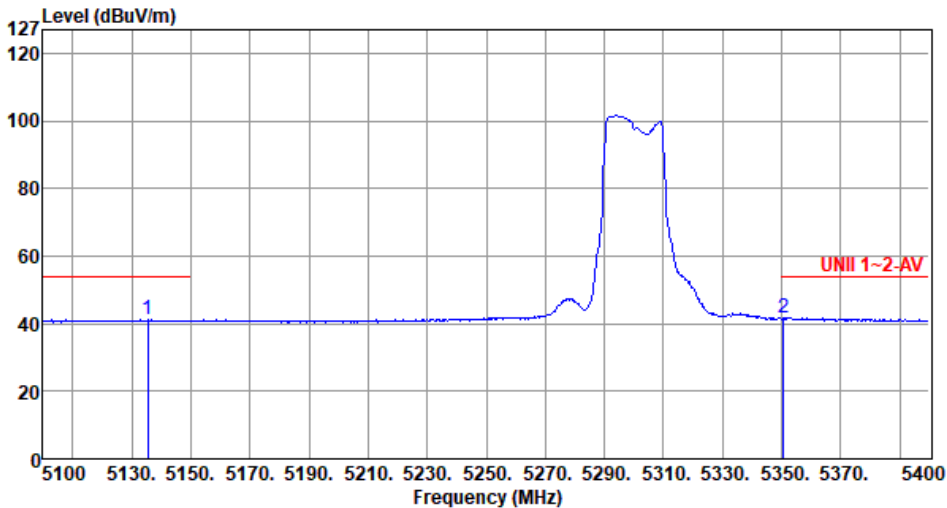
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5300																																																		
Polarization	Horizontal-Peak																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5101.20</td><td>54.11</td><td>74.00</td><td>-19.89</td><td>53.12</td><td>0.99</td><td>Peak</td><td>178</td><td>100</td></tr><tr><td>2</td><td>5350.50</td><td>54.27</td><td>74.00</td><td>-19.73</td><td>53.95</td><td>0.32</td><td>Peak</td><td>178</td><td>100</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5101.20	54.11	74.00	-19.89	53.12	0.99	Peak	178	100	2	5350.50	54.27	74.00	-19.73	53.95	0.32	Peak	178	100
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5101.20	54.11	74.00	-19.89	53.12	0.99	Peak	178	100																																												
2	5350.50	54.27	74.00	-19.73	53.95	0.32	Peak	178	100																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

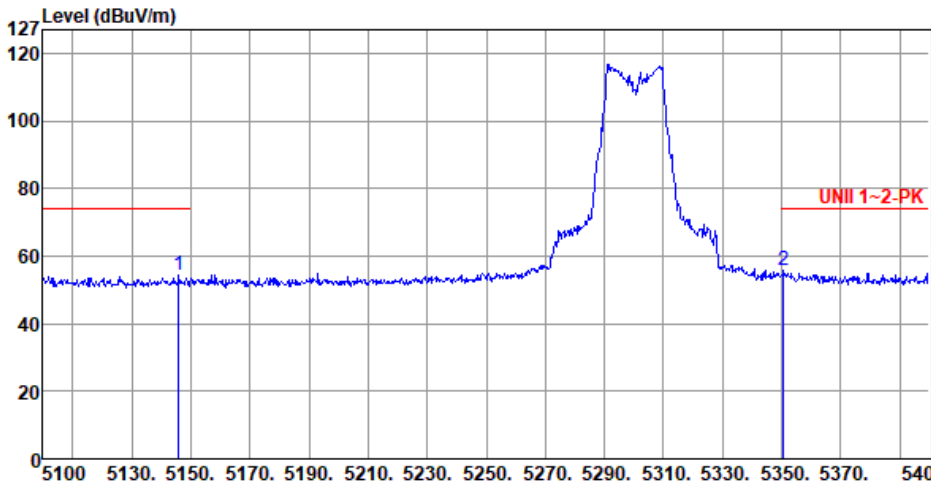
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5300																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5135.40</td><td>41.23</td><td>54.00</td><td>-12.77</td><td>40.17</td><td>1.06</td><td>Average</td><td>178</td><td>100</td></tr><tr><td>2</td><td>5350.50</td><td>41.68</td><td>54.00</td><td>-12.32</td><td>41.36</td><td>0.32</td><td>Average</td><td>178</td><td>100</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5135.40	41.23	54.00	-12.77	40.17	1.06	Average	178	100	2	5350.50	41.68	54.00	-12.32	41.36	0.32	Average	178	100
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5135.40	41.23	54.00	-12.77	40.17	1.06	Average	178	100																								
2	5350.50	41.68	54.00	-12.32	41.36	0.32	Average	178	100																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5300																																																		
Polarization	Vertical-Peak																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5145.90</td><td>54.47</td><td>74.00</td><td>-19.53</td><td>53.39</td><td>1.08</td><td>Peak</td><td>183</td><td>33</td></tr><tr><td>2</td><td>5350.50</td><td>55.58</td><td>74.00</td><td>-18.42</td><td>55.26</td><td>0.32</td><td>Peak</td><td>183</td><td>33</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5145.90	54.47	74.00	-19.53	53.39	1.08	Peak	183	33	2	5350.50	55.58	74.00	-18.42	55.26	0.32	Peak	183	33
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
		dBUV/m			dBUV			cm	deg																																												
1	5145.90	54.47	74.00	-19.53	53.39	1.08	Peak	183	33																																												
2	5350.50	55.58	74.00	-18.42	55.26	0.32	Peak	183	33																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5300																																																		
Polarization	Vertical-Average																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m) 1 2 UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5143.20</td><td>41.47</td><td>54.00</td><td>-12.53</td><td>40.39</td><td>1.08</td><td>Average</td><td>183</td><td>33</td></tr><tr><td>2</td><td>5350.50</td><td>43.32</td><td>54.00</td><td>-10.68</td><td>43.00</td><td>0.32</td><td>Average</td><td>183</td><td>33</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5143.20	41.47	54.00	-12.53	40.39	1.08	Average	183	33	2	5350.50	43.32	54.00	-10.68	43.00	0.32	Average	183	33
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5143.20	41.47	54.00	-12.53	40.39	1.08	Average	183	33																																												
2	5350.50	43.32	54.00	-10.68	43.00	0.32	Average	183	33																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

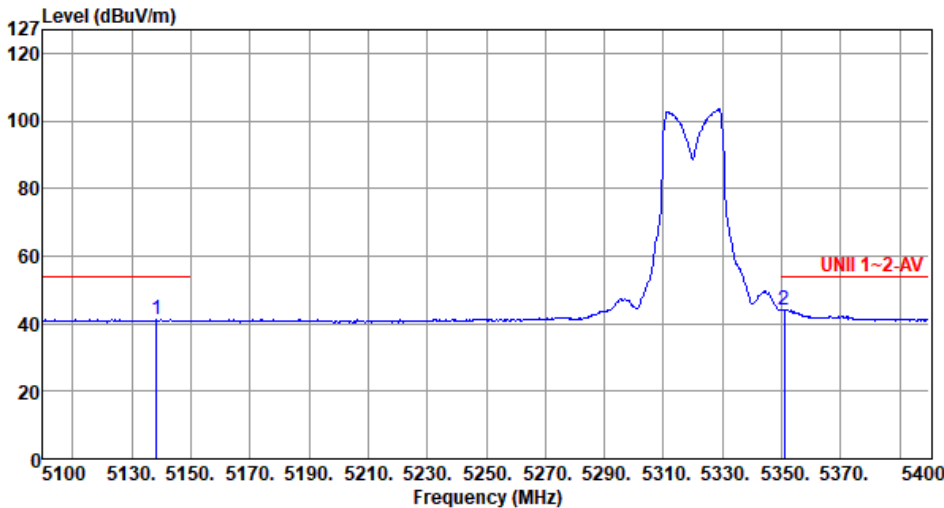
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5320
Polarization	Horizontal-Peak		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) <			



Band Edge measurement

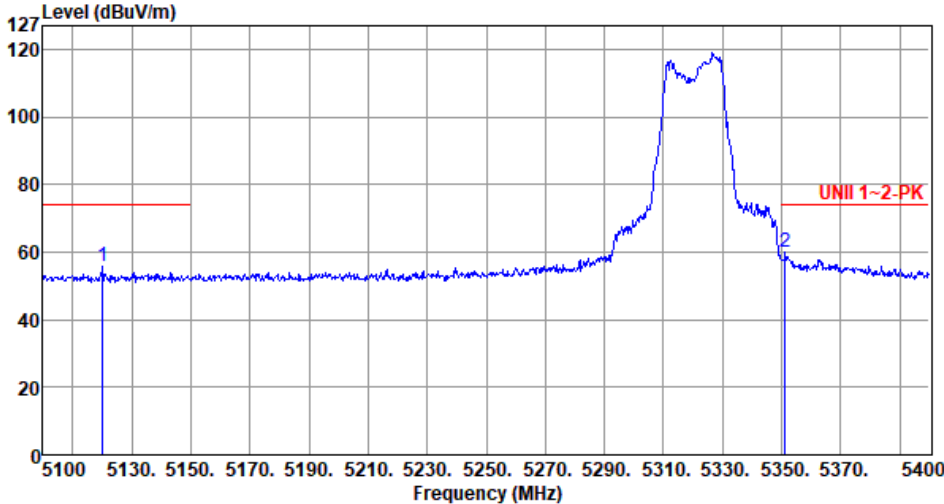
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5320																																																		
Polarization	Horizontal-Average																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5138.40</td><td>41.15</td><td>54.00</td><td>-12.85</td><td>40.08</td><td>1.07</td><td>Average</td><td>302</td><td>62</td></tr><tr><td>2</td><td>5350.80</td><td>44.20</td><td>54.00</td><td>-9.80</td><td>43.88</td><td>0.32</td><td>Average</td><td>302</td><td>62</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5138.40	41.15	54.00	-12.85	40.08	1.07	Average	302	62	2	5350.80	44.20	54.00	-9.80	43.88	0.32	Average	302	62
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
		dBUV/m			dBUV			cm	deg																																												
1	5138.40	41.15	54.00	-12.85	40.08	1.07	Average	302	62																																												
2	5350.80	44.20	54.00	-9.80	43.88	0.32	Average	302	62																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5320																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5120.10</td><td>55.63</td><td>74.00</td><td>-18.37</td><td>54.60</td><td>1.03</td><td>Peak</td><td>166</td><td>27</td></tr><tr><td>2</td><td>5351.10</td><td>59.76</td><td>74.00</td><td>-14.24</td><td>59.44</td><td>0.32</td><td>Peak</td><td>166</td><td>27</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5120.10	55.63	74.00	-18.37	54.60	1.03	Peak	166	27	2	5351.10	59.76	74.00	-14.24	59.44	0.32	Peak	166	27
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5120.10	55.63	74.00	-18.37	54.60	1.03	Peak	166	27																								
2	5351.10	59.76	74.00	-14.24	59.44	0.32	Peak	166	27																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

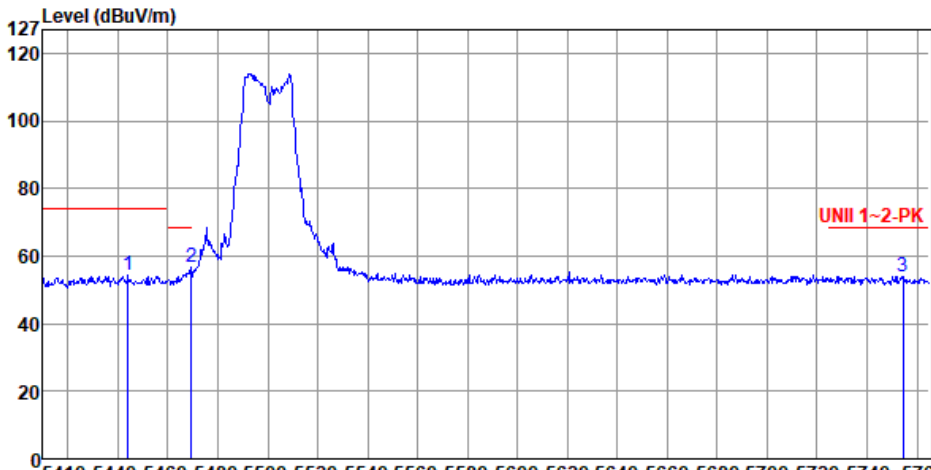
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5320
Polarization	Vertical-Average		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) </			



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5500																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5444.08</td><td>54.19</td><td>74.00</td><td>-19.81</td><td>53.55</td><td>0.64</td><td>Peak</td><td>323</td><td>240</td></tr><tr><td>2</td><td>5469.29</td><td>56.58</td><td>68.20</td><td>-11.62</td><td>55.86</td><td>0.72</td><td>Peak</td><td>323</td><td>240</td></tr><tr><td>3</td><td>5754.35</td><td>54.04</td><td>68.20</td><td>-14.16</td><td>52.86</td><td>1.18</td><td>Peak</td><td>323</td><td>240</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5444.08	54.19	74.00	-19.81	53.55	0.64	Peak	323	240	2	5469.29	56.58	68.20	-11.62	55.86	0.72	Peak	323	240	3	5754.35	54.04	68.20	-14.16	52.86	1.18	Peak	323	240
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5444.08	54.19	74.00	-19.81	53.55	0.64	Peak	323	240																																		
2	5469.29	56.58	68.20	-11.62	55.86	0.72	Peak	323	240																																		
3	5754.35	54.04	68.20	-14.16	52.86	1.18	Peak	323	240																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

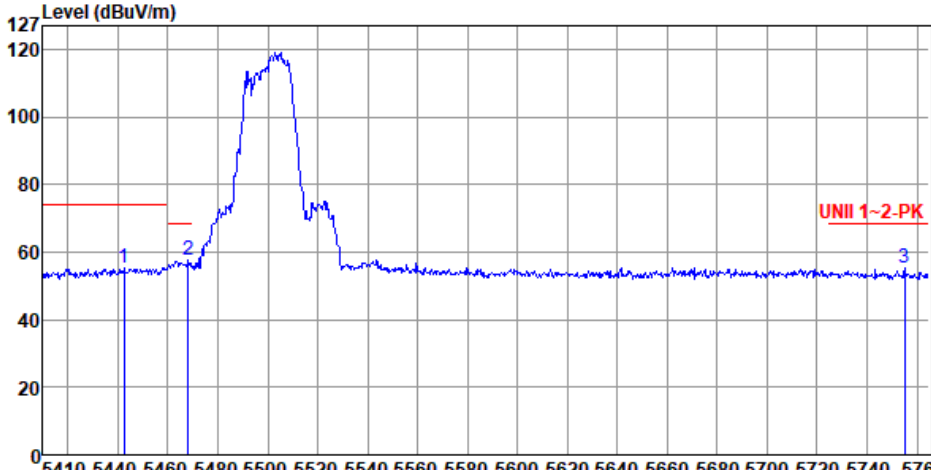
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5500																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																							
Level (dBUV/m) 1 Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5450.12</td><td>41.61</td><td>54.00</td><td>-12.39</td><td>40.95</td><td>0.66</td><td>Average</td><td>323</td><td>240</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5450.12	41.61	54.00	-12.39	40.95	0.66	Average	323	240
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5450.12	41.61	54.00	-12.39	40.95	0.66	Average	323	240														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5500																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5442.31</td><td>55.32</td><td>74.00</td><td>-18.68</td><td>54.69</td><td>0.63</td><td>Peak</td><td>224</td><td>19</td></tr><tr><td>2</td><td>5468.22</td><td>57.51</td><td>68.20</td><td>-10.69</td><td>56.79</td><td>0.72</td><td>Peak</td><td>224</td><td>19</td></tr><tr><td>3</td><td>5755.06</td><td>55.21</td><td>68.20</td><td>-12.99</td><td>54.03</td><td>1.18</td><td>Peak</td><td>224</td><td>19</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5442.31	55.32	74.00	-18.68	54.69	0.63	Peak	224	19	2	5468.22	57.51	68.20	-10.69	56.79	0.72	Peak	224	19	3	5755.06	55.21	68.20	-12.99	54.03	1.18	Peak	224	19
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5442.31	55.32	74.00	-18.68	54.69	0.63	Peak	224	19																																		
2	5468.22	57.51	68.20	-10.69	56.79	0.72	Peak	224	19																																		
3	5755.06	55.21	68.20	-12.99	54.03	1.18	Peak	224	19																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5500																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5459.70</td><td>43.83</td><td>54.00</td><td>-10.17</td><td>43.14</td><td>0.69</td><td>Average</td><td>224</td><td>19</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.70	43.83	54.00	-10.17	43.14	0.69	Average	224	19
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5459.70	43.83	54.00	-10.17	43.14	0.69	Average	224	19														



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5580																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5451.89</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>53.15</td><td>0.66</td><td>Peak</td><td>309</td><td>248</td></tr><tr><td>2</td><td>5463.25</td><td>53.40</td><td>68.20</td><td>-14.80</td><td>52.70</td><td>0.70</td><td>Peak</td><td>309</td><td>248</td></tr><tr><td>3</td><td>5744.06</td><td>54.98</td><td>68.20</td><td>-13.22</td><td>53.82</td><td>1.16</td><td>Peak</td><td>309</td><td>248</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5451.89	53.81	74.00	-20.19	53.15	0.66	Peak	309	248	2	5463.25	53.40	68.20	-14.80	52.70	0.70	Peak	309	248	3	5744.06	54.98	68.20	-13.22	53.82	1.16	Peak	309	248
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5451.89	53.81	74.00	-20.19	53.15	0.66	Peak	309	248																																		
2	5463.25	53.40	68.20	-14.80	52.70	0.70	Peak	309	248																																		
3	5744.06	54.98	68.20	-13.22	53.82	1.16	Peak	309	248																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

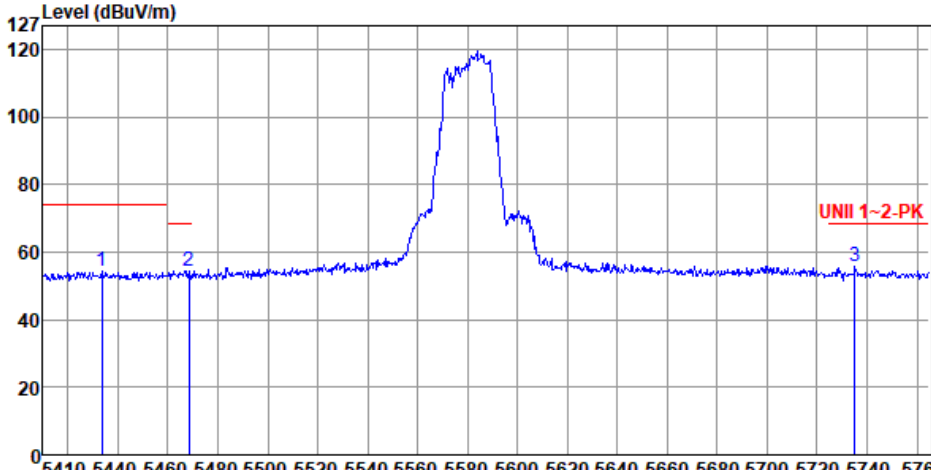
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5580
Polarization	Horizontal-Average		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) </			



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5580																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5433.43</td><td>54.42</td><td>74.00</td><td>-19.58</td><td>53.84</td><td>0.58</td><td>Peak</td><td>233</td><td>21</td></tr><tr><td>2</td><td>5468.58</td><td>54.50</td><td>68.20</td><td>-13.70</td><td>53.78</td><td>0.72</td><td>Peak</td><td>233</td><td>21</td></tr><tr><td>3</td><td>5735.18</td><td>55.54</td><td>68.20</td><td>-12.66</td><td>54.41</td><td>1.13</td><td>Peak</td><td>233</td><td>21</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5433.43	54.42	74.00	-19.58	53.84	0.58	Peak	233	21	2	5468.58	54.50	68.20	-13.70	53.78	0.72	Peak	233	21	3	5735.18	55.54	68.20	-12.66	54.41	1.13	Peak	233	21
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5433.43	54.42	74.00	-19.58	53.84	0.58	Peak	233	21																																		
2	5468.58	54.50	68.20	-13.70	53.78	0.72	Peak	233	21																																		
3	5735.18	55.54	68.20	-12.66	54.41	1.13	Peak	233	21																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

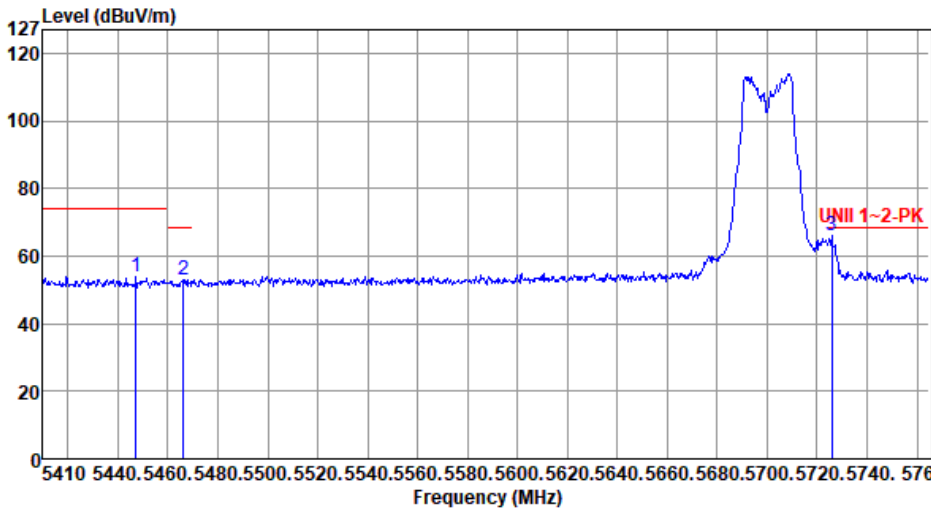
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5580						
Polarization	Vertical-Average								
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5457.93	41.91	54.00	-12.09	41.22	0.69	Average	233	21
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Band Edge measurement

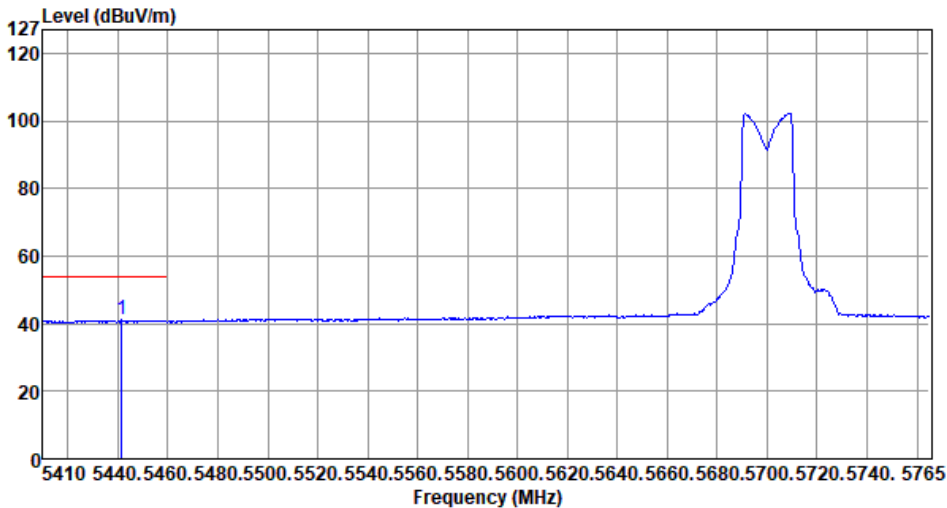
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5700																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5447.28</td><td>54.10</td><td>74.00</td><td>-19.90</td><td>53.45</td><td>0.65</td><td>Peak</td><td>308</td><td>242</td></tr><tr><td>2</td><td>5466.09</td><td>52.81</td><td>68.20</td><td>-15.39</td><td>52.10</td><td>0.71</td><td>Peak</td><td>308</td><td>242</td></tr><tr><td>3</td><td>5725.95</td><td>65.96</td><td>68.20</td><td>-2.24</td><td>64.85</td><td>1.11</td><td>Peak</td><td>308</td><td>242</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5447.28	54.10	74.00	-19.90	53.45	0.65	Peak	308	242	2	5466.09	52.81	68.20	-15.39	52.10	0.71	Peak	308	242	3	5725.95	65.96	68.20	-2.24	64.85	1.11	Peak	308	242
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5447.28	54.10	74.00	-19.90	53.45	0.65	Peak	308	242																																		
2	5466.09	52.81	68.20	-15.39	52.10	0.71	Peak	308	242																																		
3	5725.95	65.96	68.20	-2.24	64.85	1.11	Peak	308	242																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5700
Polarization	Horizontal-Average		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64			
Level (dBUV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn level MHz dBUV/m dBUV/m dB reading dB/m 1 5441.60 41.02 54.00 -12.98 40.39 0.63 Average 308 242			
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).			



Band Edge measurement

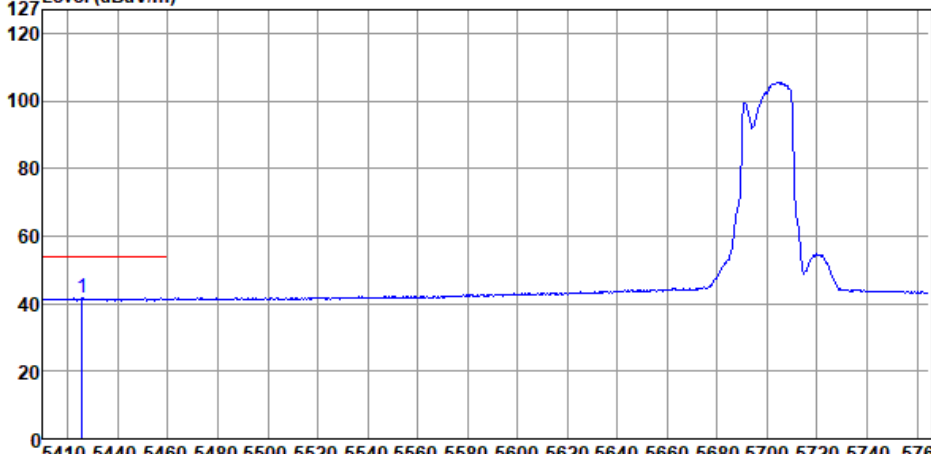
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5700																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5449.76</td><td>53.76</td><td>74.00</td><td>-20.24</td><td>53.09</td><td>0.67</td><td>Peak</td><td>229</td><td>26</td></tr><tr><td>2</td><td>5470.00</td><td>54.19</td><td>68.20</td><td>-14.01</td><td>53.47</td><td>0.72</td><td>Peak</td><td>229</td><td>26</td></tr><tr><td>3</td><td>5725.24</td><td>67.34</td><td>68.20</td><td>-0.86</td><td>66.23</td><td>1.11</td><td>Peak</td><td>229</td><td>26</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5449.76	53.76	74.00	-20.24	53.09	0.67	Peak	229	26	2	5470.00	54.19	68.20	-14.01	53.47	0.72	Peak	229	26	3	5725.24	67.34	68.20	-0.86	66.23	1.11	Peak	229	26
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5449.76	53.76	74.00	-20.24	53.09	0.67	Peak	229	26																																		
2	5470.00	54.19	68.20	-14.01	53.47	0.72	Peak	229	26																																		
3	5725.24	67.34	68.20	-0.86	66.23	1.11	Peak	229	26																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5700																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																							
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5425.62</td><td>41.65</td><td>54.00</td><td>-12.35</td><td>41.10</td><td>0.55</td><td>Average</td><td>229</td><td>26</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5425.62	41.65	54.00	-12.35	41.10	0.55	Average	229	26
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5425.62	41.65	54.00	-12.35	41.10	0.55	Average	229	26														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5720
Polarization	Horizontal-Peak		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) <			



Band Edge measurement

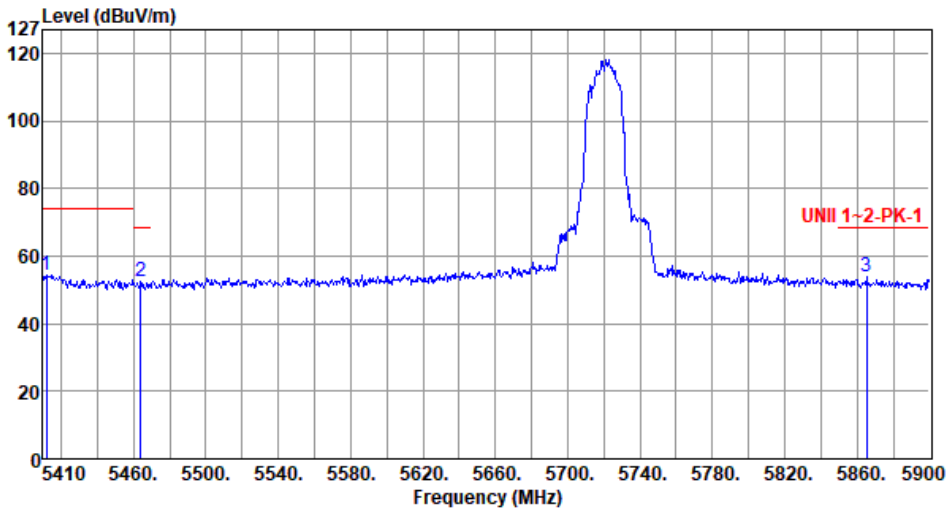
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5720
Polarization	Horizontal-Average		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64			
Level (dBUV/m)			



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5720																																																												
Polarization	Vertical-Peak																																																														
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																															
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5411.96</td><td>54.34</td><td>74.00</td><td>-19.66</td><td>53.86</td><td>0.48</td><td>Peak</td><td>238</td><td>19</td></tr><tr><td>2</td><td>5463.90</td><td>52.29</td><td>68.20</td><td>-15.91</td><td>51.59</td><td>0.70</td><td>Peak</td><td>238</td><td>19</td></tr><tr><td>3</td><td>5865.21</td><td>53.82</td><td>68.20</td><td>-14.38</td><td>52.33</td><td>1.49</td><td>Peak</td><td>238</td><td>19</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1	5411.96	54.34	74.00	-19.66	53.86	0.48	Peak	238	19	2	5463.90	52.29	68.20	-15.91	51.59	0.70	Peak	238	19	3	5865.21	53.82	68.20	-14.38	52.33	1.49	Peak	238	19
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																						
		dBUV/m			dBuV			cm	deg																																																						
1	5411.96	54.34	74.00	-19.66	53.86	0.48	Peak	238	19																																																						
2	5463.90	52.29	68.20	-15.91	51.59	0.70	Peak	238	19																																																						
3	5865.21	53.82	68.20	-14.38	52.33	1.49	Peak	238	19																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															



Band Edge measurement

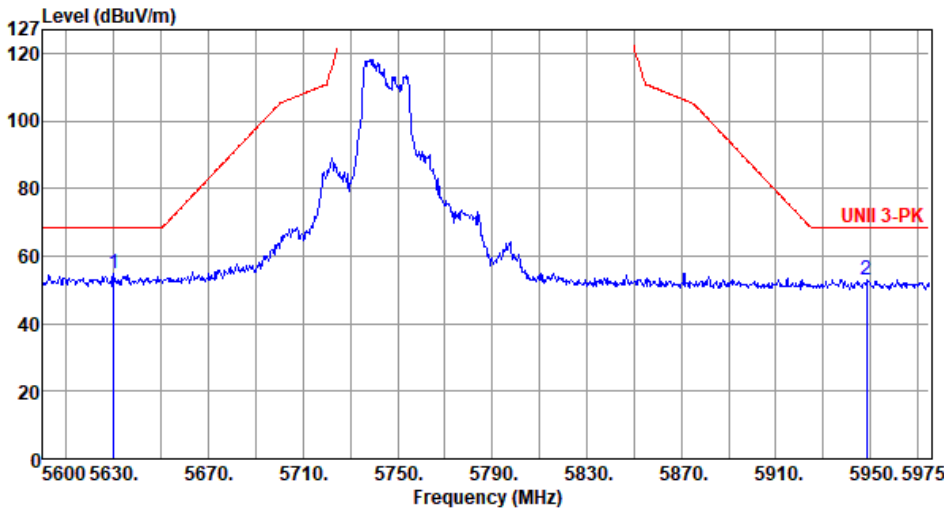
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5720						
Polarization	Vertical-Average								
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5415.39	42.97	54.00	-11.03	42.47	0.50	Average	238	19
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Band Edge measurement

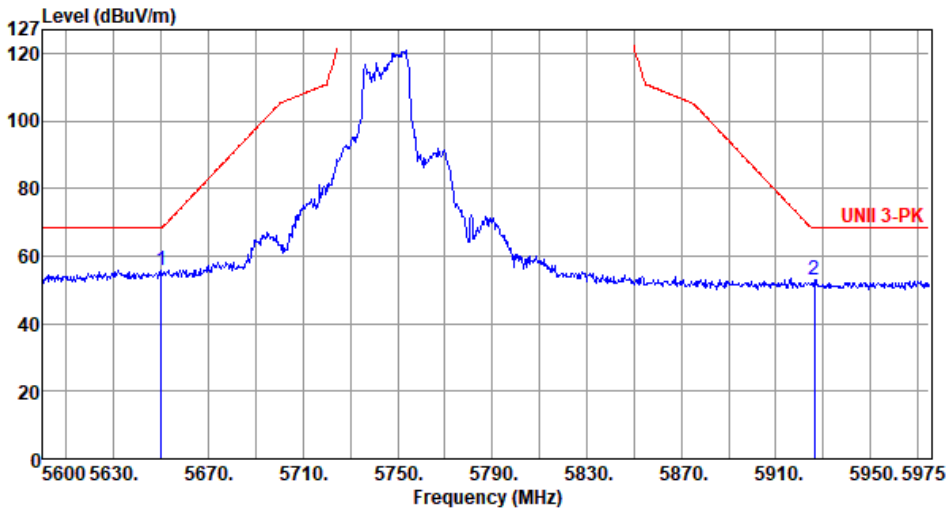
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5745																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><td>1</td><td>5630.00</td><td>54.67</td><td>68.20</td><td>-13.53</td><td>53.80</td><td>0.87</td><td>Peak</td><td>309</td><td>269</td></tr><tr><td>2</td><td>5948.38</td><td>53.03</td><td>68.20</td><td>-15.17</td><td>51.36</td><td>1.67</td><td>Peak</td><td>309</td><td>269</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table	1	5630.00	54.67	68.20	-13.53	53.80	0.87	Peak	309	269	2	5948.38	53.03	68.20	-15.17	51.36	1.67	Peak	309	269
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																		
1	5630.00	54.67	68.20	-13.53	53.80	0.87	Peak	309	269																																		
2	5948.38	53.03	68.20	-15.17	51.36	1.67	Peak	309	269																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

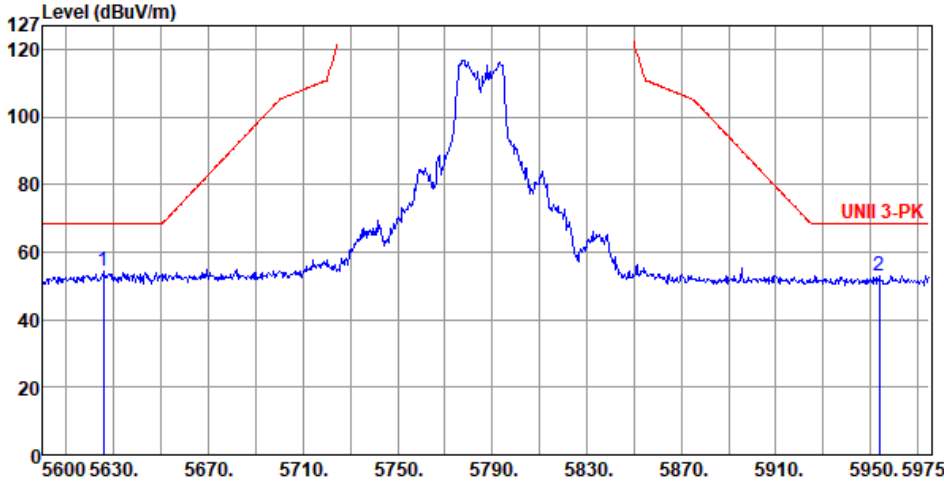
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5745																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5649.88</td><td>55.83</td><td>68.20</td><td>-12.37</td><td>54.91</td><td>0.92</td><td>Peak</td><td>239</td><td>30</td></tr><tr><td>2</td><td>5926.25</td><td>53.01</td><td>68.20</td><td>-15.19</td><td>51.35</td><td>1.66</td><td>Peak</td><td>239</td><td>30</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5649.88	55.83	68.20	-12.37	54.91	0.92	Peak	239	30	2	5926.25	53.01	68.20	-15.19	51.35	1.66	Peak	239	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5649.88	55.83	68.20	-12.37	54.91	0.92	Peak	239	30																								
2	5926.25	53.01	68.20	-15.19	51.35	1.66	Peak	239	30																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5785																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5625.50</td><td>54.27</td><td>68.20</td><td>-13.93</td><td>53.41</td><td>0.86</td><td>Peak</td><td>230</td><td>240</td></tr><tr><td>2</td><td>5953.63</td><td>53.05</td><td>68.20</td><td>-15.15</td><td>51.37</td><td>1.68</td><td>Peak</td><td>232</td><td>241</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5625.50	54.27	68.20	-13.93	53.41	0.86	Peak	230	240	2	5953.63	53.05	68.20	-15.15	51.37	1.68	Peak	232	241
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5625.50	54.27	68.20	-13.93	53.41	0.86	Peak	230	240																								
2	5953.63	53.05	68.20	-15.15	51.37	1.68	Peak	232	241																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

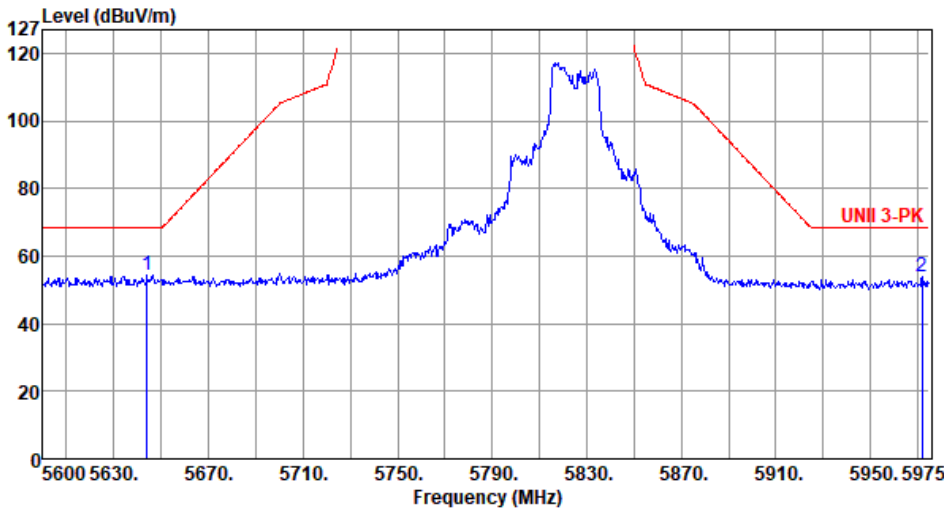
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5785																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5645.38</td><td>55.15</td><td>68.20</td><td>-13.05</td><td>54.24</td><td>0.91</td><td>Peak</td><td>230</td><td>15</td></tr><tr><td>2</td><td>5926.63</td><td>53.34</td><td>68.20</td><td>-14.86</td><td>51.68</td><td>1.66</td><td>Peak</td><td>233</td><td>17</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5645.38	55.15	68.20	-13.05	54.24	0.91	Peak	230	15	2	5926.63	53.34	68.20	-14.86	51.68	1.66	Peak	233	17
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5645.38	55.15	68.20	-13.05	54.24	0.91	Peak	230	15																								
2	5926.63	53.34	68.20	-14.86	51.68	1.66	Peak	233	17																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5825																																																		
Polarization	Horizontal-Peak																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5643.88</td><td>54.33</td><td>68.20</td><td>-13.87</td><td>53.42</td><td>0.91</td><td>Peak</td><td>241</td><td>240</td></tr><tr><td>2</td><td>5972.00</td><td>53.82</td><td>68.20</td><td>-14.38</td><td>52.11</td><td>1.71</td><td>Peak</td><td>241</td><td>240</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5643.88	54.33	68.20	-13.87	53.42	0.91	Peak	241	240	2	5972.00	53.82	68.20	-14.38	52.11	1.71	Peak	241	240
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5643.88	54.33	68.20	-13.87	53.42	0.91	Peak	241	240																																												
2	5972.00	53.82	68.20	-14.38	52.11	1.71	Peak	241	240																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

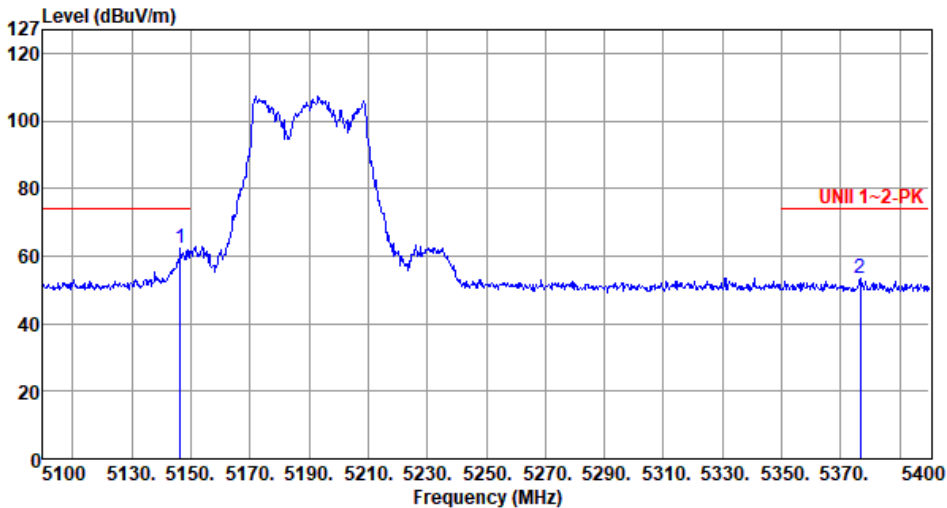
Appendix D.2

Modulation	EHT20	Test Freq. (MHz)	5825																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m) UNII 3-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5645.38</td><td>54.28</td><td>68.20</td><td>-13.92</td><td>53.37</td><td>0.91</td><td>Peak</td><td>225</td><td>27</td></tr><tr><td>2</td><td>5972.38</td><td>53.17</td><td>68.20</td><td>-15.03</td><td>51.46</td><td>1.71</td><td>Peak</td><td>225</td><td>27</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5645.38	54.28	68.20	-13.92	53.37	0.91	Peak	225	27	2	5972.38	53.17	68.20	-15.03	51.46	1.71	Peak	225	27
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5645.38	54.28	68.20	-13.92	53.37	0.91	Peak	225	27																								
2	5972.38	53.17	68.20	-15.03	51.46	1.71	Peak	225	27																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

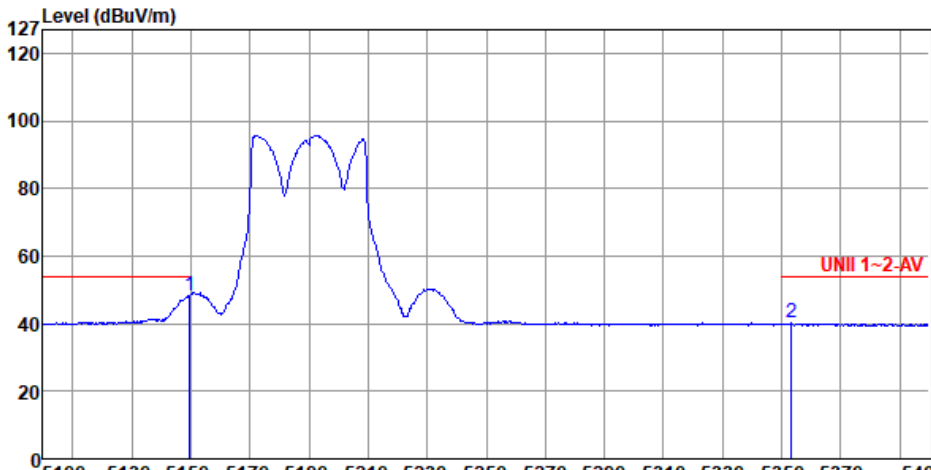
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5190																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5146.50</td><td>62.18</td><td>74.00</td><td>-11.82</td><td>61.09</td><td>1.09</td><td>Peak</td><td>191</td><td>226</td></tr><tr><td>2</td><td>5376.60</td><td>53.21</td><td>74.00</td><td>-20.79</td><td>52.84</td><td>0.37</td><td>Peak</td><td>191</td><td>226</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5146.50	62.18	74.00	-11.82	61.09	1.09	Peak	191	226	2	5376.60	53.21	74.00	-20.79	52.84	0.37	Peak	191	226
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5146.50	62.18	74.00	-11.82	61.09	1.09	Peak	191	226																								
2	5376.60	53.21	74.00	-20.79	52.84	0.37	Peak	191	226																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

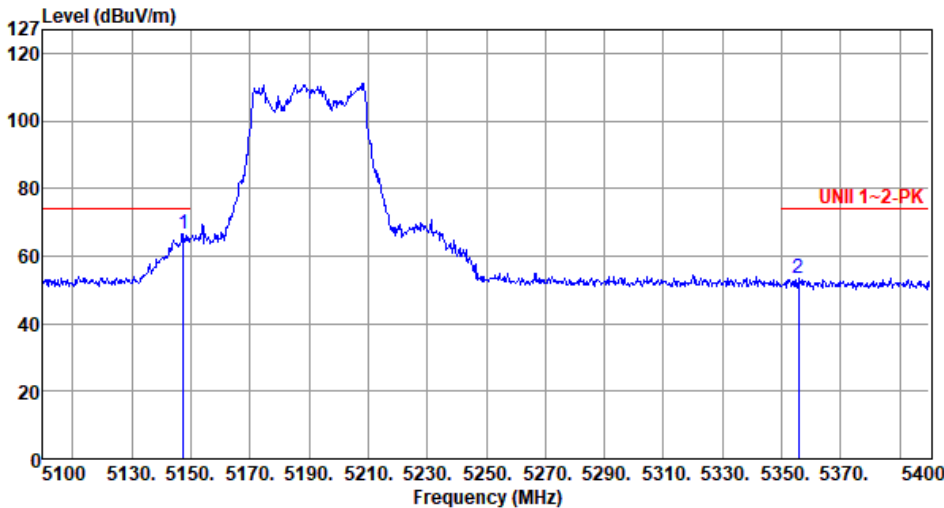
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5190																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>48.50</td><td>54.00</td><td>-5.50</td><td>47.40</td><td>1.10</td><td>Average</td><td>191</td><td>226</td></tr><tr><td>2</td><td>5353.20</td><td>40.15</td><td>54.00</td><td>-13.85</td><td>39.82</td><td>0.33</td><td>Average</td><td>191</td><td>226</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	48.50	54.00	-5.50	47.40	1.10	Average	191	226	2	5353.20	40.15	54.00	-13.85	39.82	0.33	Average	191	226
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	48.50	54.00	-5.50	47.40	1.10	Average	191	226																								
2	5353.20	40.15	54.00	-13.85	39.82	0.33	Average	191	226																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

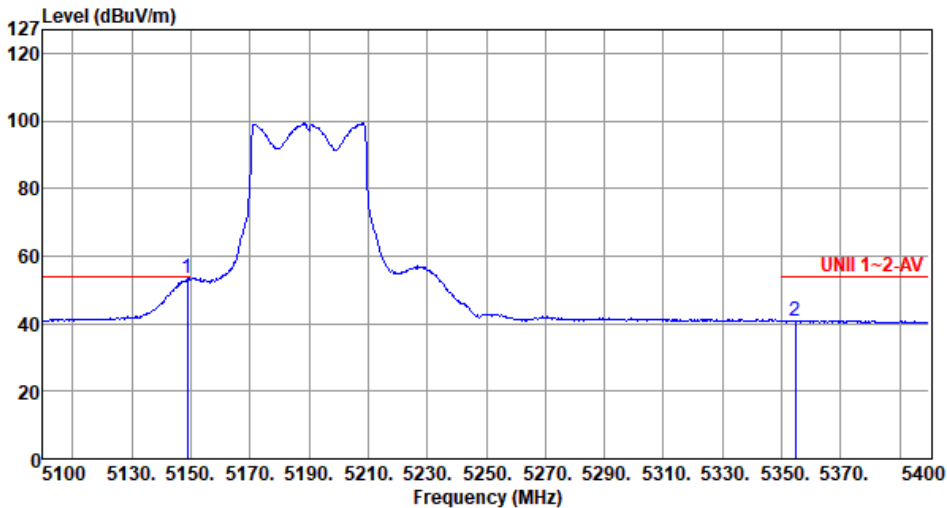
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5190																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5147.40</td><td>66.55</td><td>74.00</td><td>-7.45</td><td>65.46</td><td>1.09</td><td>Peak</td><td>171</td><td>9</td></tr><tr><td>2</td><td>5355.60</td><td>53.46</td><td>74.00</td><td>-20.54</td><td>53.13</td><td>0.33</td><td>Peak</td><td>171</td><td>9</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5147.40	66.55	74.00	-7.45	65.46	1.09	Peak	171	9	2	5355.60	53.46	74.00	-20.54	53.13	0.33	Peak	171	9
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5147.40	66.55	74.00	-7.45	65.46	1.09	Peak	171	9																								
2	5355.60	53.46	74.00	-20.54	53.13	0.33	Peak	171	9																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

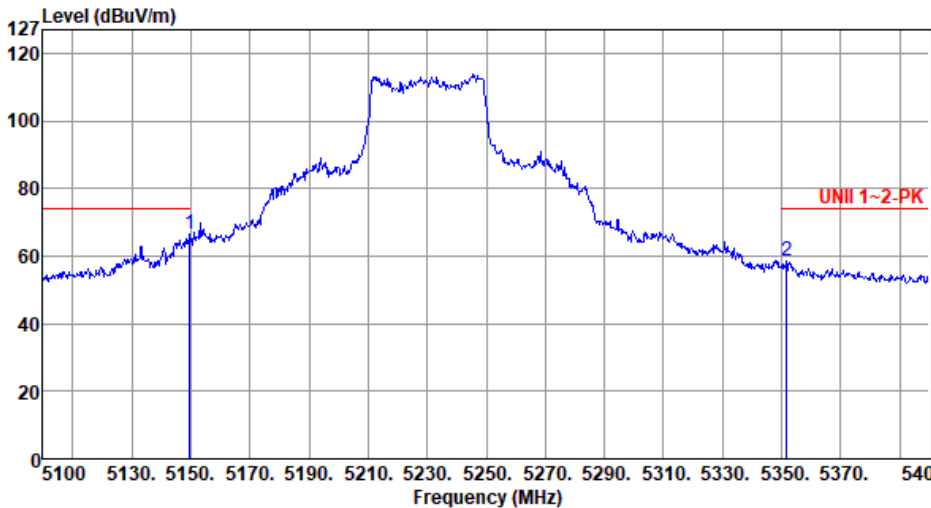
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5190																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5148.90</td><td>53.51</td><td>54.00</td><td>-0.49</td><td>52.41</td><td>1.10</td><td>Average</td><td>171</td><td>9</td></tr><tr><td>2</td><td>5354.70</td><td>40.94</td><td>54.00</td><td>-13.06</td><td>40.61</td><td>0.33</td><td>Average</td><td>171</td><td>9</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.90	53.51	54.00	-0.49	52.41	1.10	Average	171	9	2	5354.70	40.94	54.00	-13.06	40.61	0.33	Average	171	9
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.90	53.51	54.00	-0.49	52.41	1.10	Average	171	9																								
2	5354.70	40.94	54.00	-13.06	40.61	0.33	Average	171	9																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

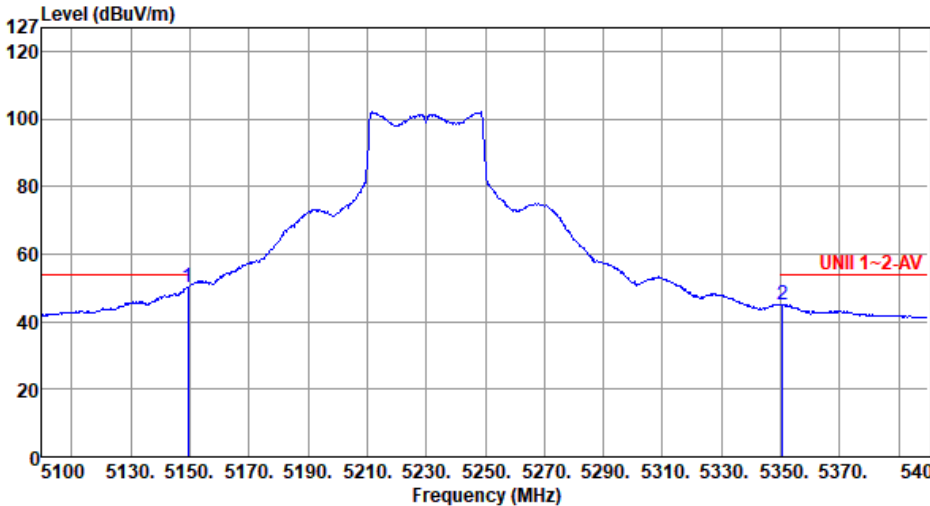
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5230																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.80</td><td>66.44</td><td>74.00</td><td>-7.56</td><td>65.34</td><td>1.10</td><td>Peak</td><td>228</td><td>82</td></tr><tr><td>2</td><td>5351.70</td><td>58.62</td><td>74.00</td><td>-15.38</td><td>58.30</td><td>0.32</td><td>Peak</td><td>166</td><td>112</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	66.44	74.00	-7.56	65.34	1.10	Peak	228	82	2	5351.70	58.62	74.00	-15.38	58.30	0.32	Peak	166	112
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	66.44	74.00	-7.56	65.34	1.10	Peak	228	82																								
2	5351.70	58.62	74.00	-15.38	58.30	0.32	Peak	166	112																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

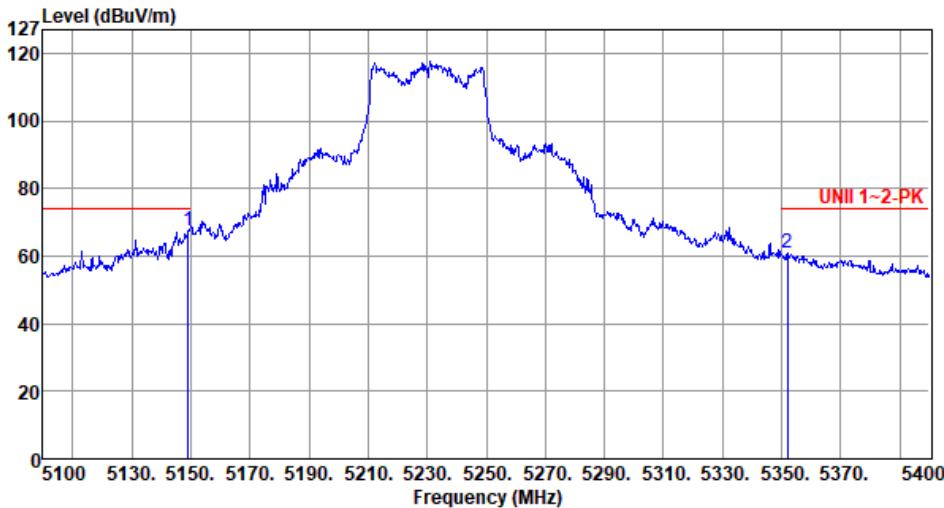
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5230																																																		
Polarization	Horizontal-Average																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.50</td><td>50.37</td><td>54.00</td><td>-3.63</td><td>49.27</td><td>1.10</td><td>Average</td><td>228</td><td>82</td></tr><tr><td>2</td><td>5350.50</td><td>45.14</td><td>54.00</td><td>-8.86</td><td>44.82</td><td>0.32</td><td>Average</td><td>166</td><td>112</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5149.50	50.37	54.00	-3.63	49.27	1.10	Average	228	82	2	5350.50	45.14	54.00	-8.86	44.82	0.32	Average	166	112
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5149.50	50.37	54.00	-3.63	49.27	1.10	Average	228	82																																												
2	5350.50	45.14	54.00	-8.86	44.82	0.32	Average	166	112																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

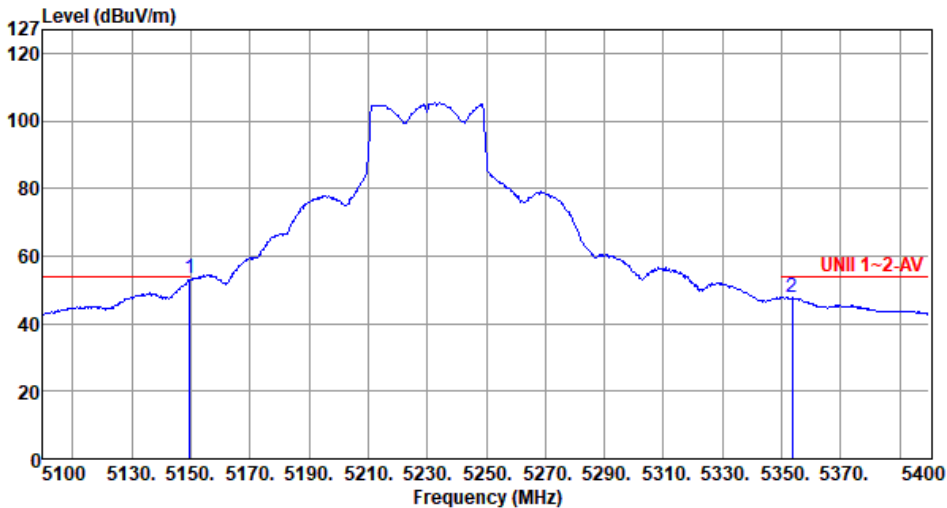
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5230																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.20</td><td>67.32</td><td>74.00</td><td>-6.68</td><td>66.22</td><td>1.10</td><td>Peak</td><td>176</td><td>13</td></tr><tr><td>2</td><td>5352.00</td><td>61.06</td><td>74.00</td><td>-12.94</td><td>60.74</td><td>0.32</td><td>Peak</td><td>128</td><td>20</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.20	67.32	74.00	-6.68	66.22	1.10	Peak	176	13	2	5352.00	61.06	74.00	-12.94	60.74	0.32	Peak	128	20
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.20	67.32	74.00	-6.68	66.22	1.10	Peak	176	13																								
2	5352.00	61.06	74.00	-12.94	60.74	0.32	Peak	128	20																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

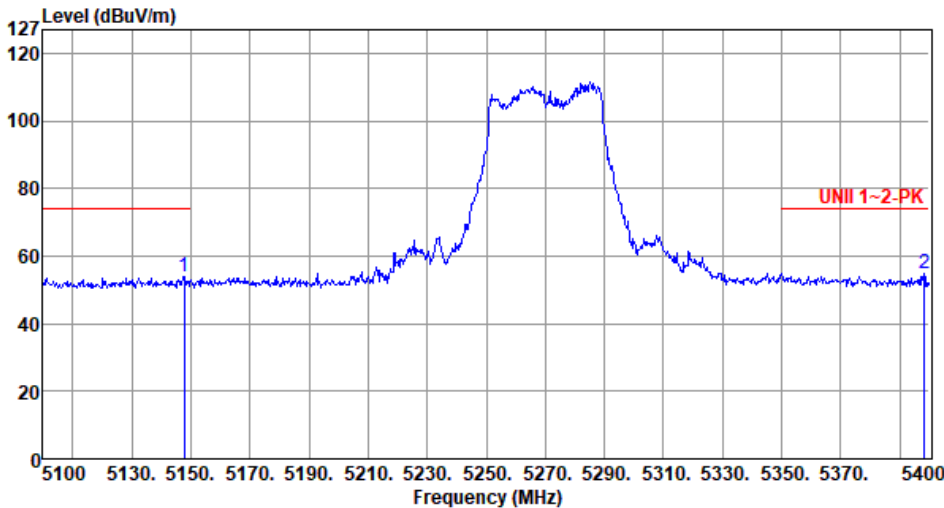
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5230																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>53.50</td><td>54.00</td><td>-0.50</td><td>52.40</td><td>1.10</td><td>Average</td><td>176</td><td>13</td></tr><tr><td>2</td><td>5353.50</td><td>47.85</td><td>54.00</td><td>-6.15</td><td>47.52</td><td>0.33</td><td>Average</td><td>128</td><td>20</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	53.50	54.00	-0.50	52.40	1.10	Average	176	13	2	5353.50	47.85	54.00	-6.15	47.52	0.33	Average	128	20
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	53.50	54.00	-0.50	52.40	1.10	Average	176	13																								
2	5353.50	47.85	54.00	-6.15	47.52	0.33	Average	128	20																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5270																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5147.70</td><td>53.85</td><td>74.00</td><td>-20.15</td><td>52.75</td><td>1.10</td><td>Peak</td><td>181</td><td>104</td></tr><tr><td>2</td><td>5398.20</td><td>54.65</td><td>74.00</td><td>-19.35</td><td>54.22</td><td>0.43</td><td>Peak</td><td>184</td><td>99</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5147.70	53.85	74.00	-20.15	52.75	1.10	Peak	181	104	2	5398.20	54.65	74.00	-19.35	54.22	0.43	Peak	184	99
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5147.70	53.85	74.00	-20.15	52.75	1.10	Peak	181	104																								
2	5398.20	54.65	74.00	-19.35	54.22	0.43	Peak	184	99																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

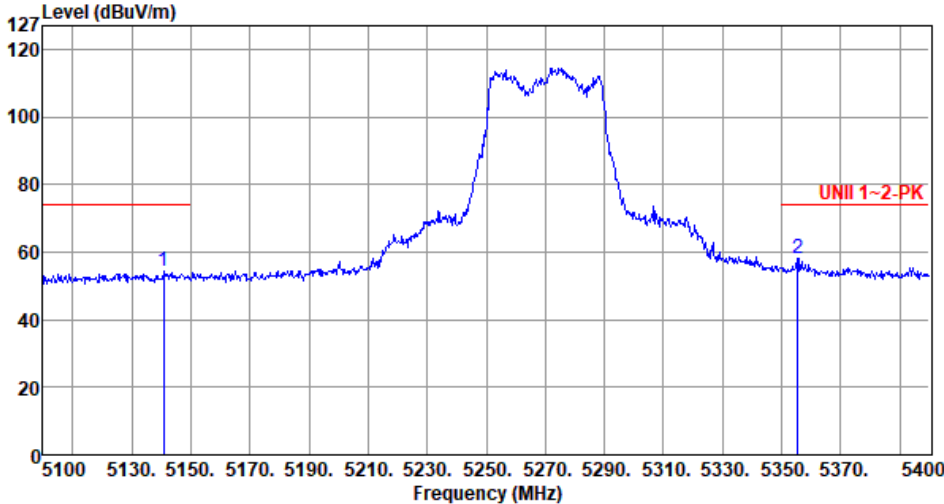
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5270																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m) 1 2 UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5147.40</td><td>41.19</td><td>54.00</td><td>-12.81</td><td>40.10</td><td>1.09</td><td>Average</td><td>181</td><td>104</td></tr><tr><td>2</td><td>5350.80</td><td>42.10</td><td>54.00</td><td>-11.90</td><td>41.78</td><td>0.32</td><td>Average</td><td>184</td><td>99</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5147.40	41.19	54.00	-12.81	40.10	1.09	Average	181	104	2	5350.80	42.10	54.00	-11.90	41.78	0.32	Average	184	99
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5147.40	41.19	54.00	-12.81	40.10	1.09	Average	181	104																								
2	5350.80	42.10	54.00	-11.90	41.78	0.32	Average	184	99																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

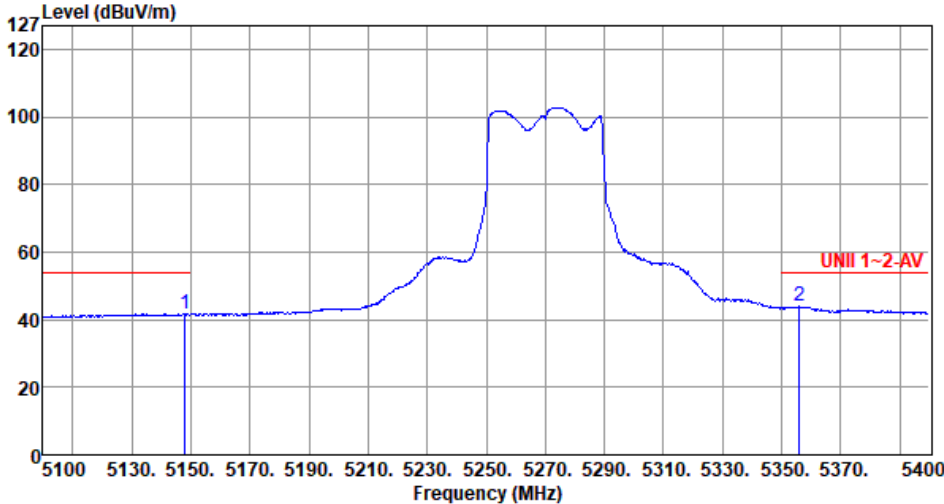
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5270																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5140.80</td><td>54.43</td><td>74.00</td><td>-19.57</td><td>53.36</td><td>1.07</td><td>Peak</td><td>151</td><td>22</td></tr><tr><td>2</td><td>5355.30</td><td>58.25</td><td>74.00</td><td>-15.75</td><td>57.92</td><td>0.33</td><td>Peak</td><td>149</td><td>21</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5140.80	54.43	74.00	-19.57	53.36	1.07	Peak	151	22	2	5355.30	58.25	74.00	-15.75	57.92	0.33	Peak	149	21
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5140.80	54.43	74.00	-19.57	53.36	1.07	Peak	151	22																								
2	5355.30	58.25	74.00	-15.75	57.92	0.33	Peak	149	21																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5270																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.00</td><td>41.84</td><td>54.00</td><td>-12.16</td><td>40.74</td><td>1.10</td><td>Average</td><td>151</td><td>22</td></tr><tr><td>2</td><td>5355.90</td><td>43.96</td><td>54.00</td><td>-10.04</td><td>43.63</td><td>0.33</td><td>Average</td><td>149</td><td>21</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.00	41.84	54.00	-12.16	40.74	1.10	Average	151	22	2	5355.90	43.96	54.00	-10.04	43.63	0.33	Average	149	21
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.00	41.84	54.00	-12.16	40.74	1.10	Average	151	22																								
2	5355.90	43.96	54.00	-10.04	43.63	0.33	Average	149	21																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5310																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5147.40</td><td>53.18</td><td>74.00</td><td>-20.82</td><td>52.09</td><td>1.09</td><td>Peak</td><td>162</td><td>78</td></tr><tr><td>2</td><td>5350.20</td><td>62.15</td><td>74.00</td><td>-11.85</td><td>61.83</td><td>0.32</td><td>Peak</td><td>162</td><td>78</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5147.40	53.18	74.00	-20.82	52.09	1.09	Peak	162	78	2	5350.20	62.15	74.00	-11.85	61.83	0.32	Peak	162	78
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5147.40	53.18	74.00	-20.82	52.09	1.09	Peak	162	78																								
2	5350.20	62.15	74.00	-11.85	61.83	0.32	Peak	162	78																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5310																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5124.00</td><td>40.39</td><td>54.00</td><td>-13.61</td><td>39.35</td><td>1.04</td><td>Average</td><td>162</td><td>78</td></tr><tr><td>2</td><td>5350.20</td><td>49.01</td><td>54.00</td><td>-4.99</td><td>48.69</td><td>0.32</td><td>Average</td><td>162</td><td>78</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5124.00	40.39	54.00	-13.61	39.35	1.04	Average	162	78	2	5350.20	49.01	54.00	-4.99	48.69	0.32	Average	162	78
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5124.00	40.39	54.00	-13.61	39.35	1.04	Average	162	78																								
2	5350.20	49.01	54.00	-4.99	48.69	0.32	Average	162	78																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

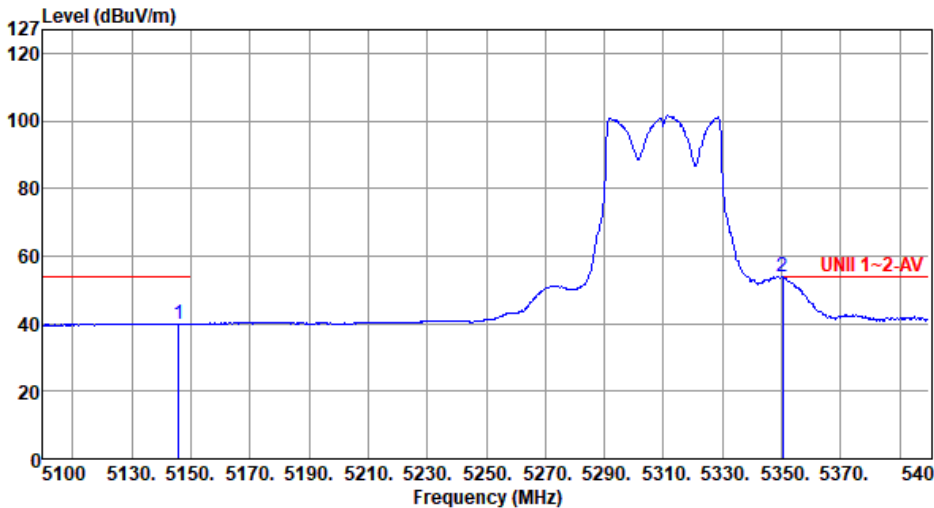
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5310																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5142.90</td><td>53.11</td><td>74.00</td><td>-20.89</td><td>52.03</td><td>1.08</td><td>Peak</td><td>259</td><td>10</td></tr><tr><td>2</td><td>5353.20</td><td>66.46</td><td>74.00</td><td>-7.54</td><td>66.13</td><td>0.33</td><td>Peak</td><td>259</td><td>10</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5142.90	53.11	74.00	-20.89	52.03	1.08	Peak	259	10	2	5353.20	66.46	74.00	-7.54	66.13	0.33	Peak	259	10
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5142.90	53.11	74.00	-20.89	52.03	1.08	Peak	259	10																								
2	5353.20	66.46	74.00	-7.54	66.13	0.33	Peak	259	10																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5310																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5145.90</td><td>40.00</td><td>54.00</td><td>-14.00</td><td>38.92</td><td>1.08</td><td>Average</td><td>259</td><td>10</td></tr><tr><td>2</td><td>5350.20</td><td>53.68</td><td>54.00</td><td>-0.32</td><td>53.36</td><td>0.32</td><td>Average</td><td>259</td><td>10</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.90	40.00	54.00	-14.00	38.92	1.08	Average	259	10	2	5350.20	53.68	54.00	-0.32	53.36	0.32	Average	259	10
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.90	40.00	54.00	-14.00	38.92	1.08	Average	259	10																								
2	5350.20	53.68	54.00	-0.32	53.36	0.32	Average	259	10																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

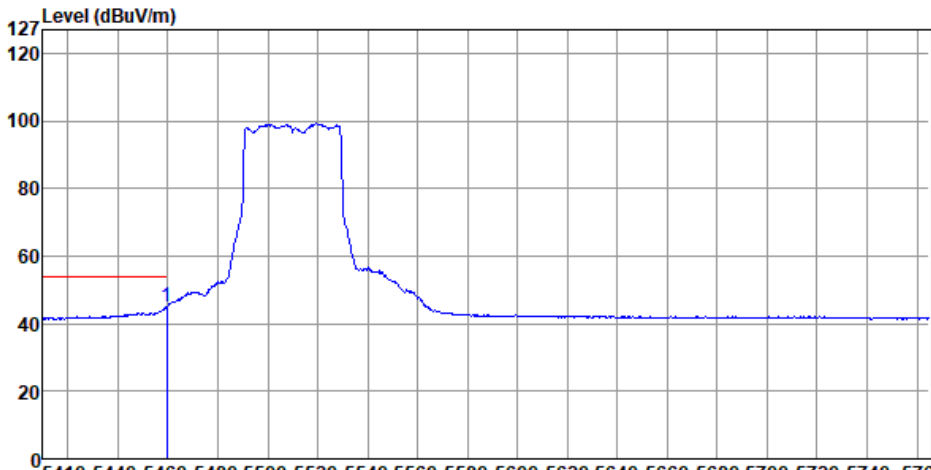
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5510																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m) UNII 1-2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5458.99</td><td>58.49</td><td>74.00</td><td>-15.51</td><td>57.80</td><td>0.69</td><td>Peak</td><td>308</td><td>246</td></tr><tr><td>2</td><td>5467.87</td><td>62.20</td><td>68.20</td><td>-6.00</td><td>61.48</td><td>0.72</td><td>Peak</td><td>176</td><td>106</td></tr><tr><td>3</td><td>5754.35</td><td>54.81</td><td>68.20</td><td>-13.39</td><td>53.63</td><td>1.18</td><td>Peak</td><td>308</td><td>246</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5458.99	58.49	74.00	-15.51	57.80	0.69	Peak	308	246	2	5467.87	62.20	68.20	-6.00	61.48	0.72	Peak	176	106	3	5754.35	54.81	68.20	-13.39	53.63	1.18	Peak	308	246
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5458.99	58.49	74.00	-15.51	57.80	0.69	Peak	308	246																																		
2	5467.87	62.20	68.20	-6.00	61.48	0.72	Peak	176	106																																		
3	5754.35	54.81	68.20	-13.39	53.63	1.18	Peak	308	246																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5510																																								
Polarization	Horizontal-Average																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.70</td><td>45.01</td><td>54.00</td><td>-8.99</td><td>44.32</td><td>0.69</td><td>Average</td><td>308</td><td>246</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5459.70	45.01	54.00	-8.99	44.32	0.69	Average	308	246
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																		
		dBuV/m			dBuV			cm	deg																																		
1	5459.70	45.01	54.00	-8.99	44.32	0.69	Average	308	246																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

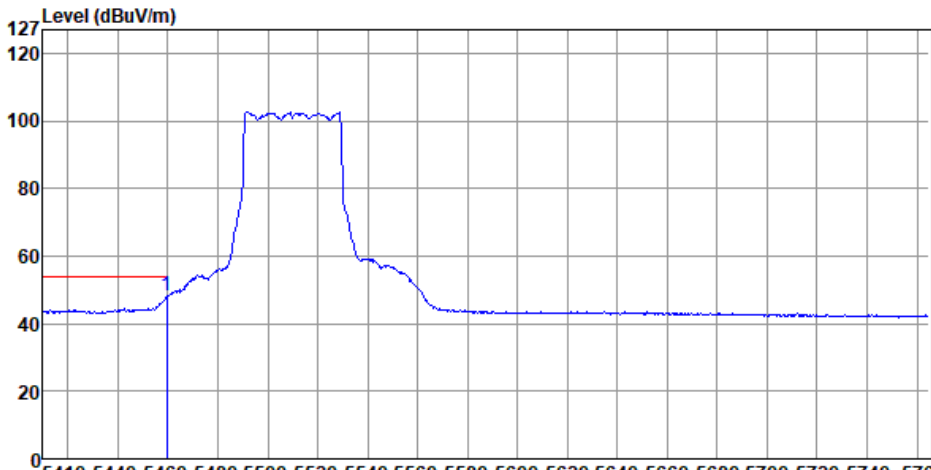
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5510																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.35</td><td>62.73</td><td>74.00</td><td>-11.27</td><td>62.04</td><td>0.69</td><td>Peak</td><td>181</td><td>37</td></tr><tr><td>2</td><td>5467.51</td><td>67.70</td><td>68.20</td><td>-0.50</td><td>66.98</td><td>0.72</td><td>Peak</td><td>227</td><td>13</td></tr><tr><td>3</td><td>5749.38</td><td>56.64</td><td>68.20</td><td>-11.56</td><td>55.47</td><td>1.17</td><td>Peak</td><td>181</td><td>37</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.35	62.73	74.00	-11.27	62.04	0.69	Peak	181	37	2	5467.51	67.70	68.20	-0.50	66.98	0.72	Peak	227	13	3	5749.38	56.64	68.20	-11.56	55.47	1.17	Peak	181	37
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5459.35	62.73	74.00	-11.27	62.04	0.69	Peak	181	37																																		
2	5467.51	67.70	68.20	-0.50	66.98	0.72	Peak	227	13																																		
3	5749.38	56.64	68.20	-11.56	55.47	1.17	Peak	181	37																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5510																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5459.70</td><td>48.12</td><td>54.00</td><td>-5.88</td><td>47.43</td><td>0.69</td><td>Average</td><td>181</td><td>37</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.70	48.12	54.00	-5.88	47.43	0.69	Average	181	37
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5459.70	48.12	54.00	-5.88	47.43	0.69	Average	181	37														



Band Edge measurement

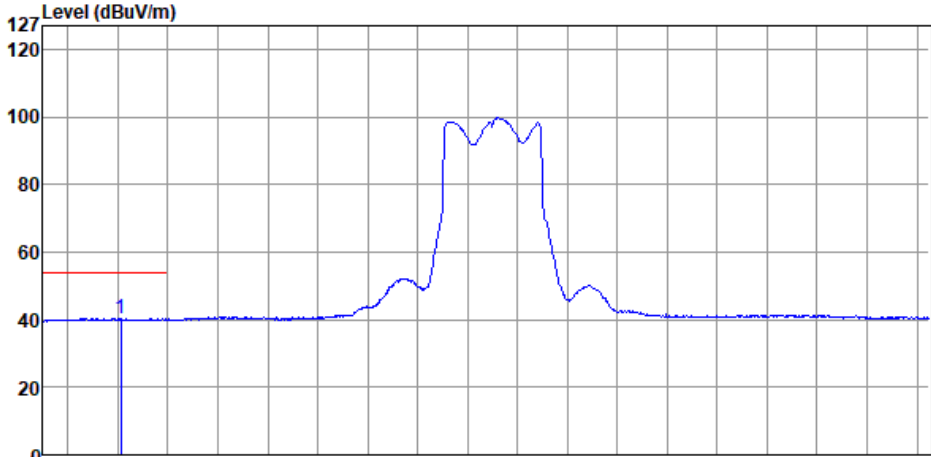
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5590																																																												
Polarization	Horizontal-Peak																																																														
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																															
Level (dBUV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5443.73</td><td>52.60</td><td>74.00</td><td>-21.40</td><td>51.97</td><td>0.63</td><td>Peak</td><td>309</td><td>258</td></tr><tr><td>2</td><td>5470.00</td><td>52.74</td><td>68.20</td><td>-15.46</td><td>52.02</td><td>0.72</td><td>Peak</td><td>307</td><td>255</td></tr><tr><td>3</td><td>5725.95</td><td>53.31</td><td>68.20</td><td>-14.89</td><td>52.20</td><td>1.11</td><td>Peak</td><td>309</td><td>258</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5443.73	52.60	74.00	-21.40	51.97	0.63	Peak	309	258	2	5470.00	52.74	68.20	-15.46	52.02	0.72	Peak	307	255	3	5725.95	53.31	68.20	-14.89	52.20	1.11	Peak	309	258
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																						
		dBuV/m			dBuV			cm	deg																																																						
1	5443.73	52.60	74.00	-21.40	51.97	0.63	Peak	309	258																																																						
2	5470.00	52.74	68.20	-15.46	52.02	0.72	Peak	307	255																																																						
3	5725.95	53.31	68.20	-14.89	52.20	1.11	Peak	309	258																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															



Band Edge measurement

Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5590																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																							
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5441.24</td><td>40.37</td><td>54.00</td><td>-13.63</td><td>39.75</td><td>0.62</td><td>Average</td><td>309</td><td>258</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5441.24	40.37	54.00	-13.63	39.75	0.62	Average	309	258
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5441.24	40.37	54.00	-13.63	39.75	0.62	Average	309	258														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

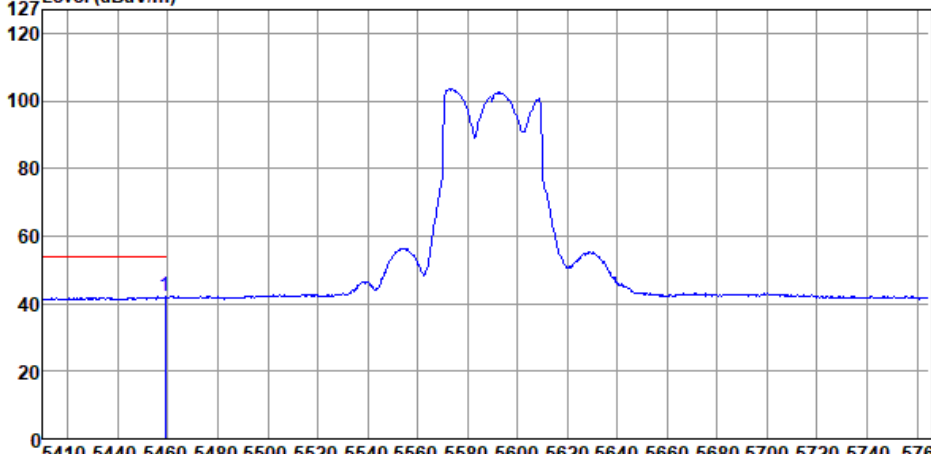
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5590																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5424.20</td><td>54.02</td><td>74.00</td><td>-19.98</td><td>53.47</td><td>0.55</td><td>Peak</td><td>232</td><td>21</td></tr><tr><td>2</td><td>5470.00</td><td>54.54</td><td>68.20</td><td>-13.66</td><td>53.82</td><td>0.72</td><td>Peak</td><td>230</td><td>19</td></tr><tr><td>3</td><td>5727.73</td><td>55.15</td><td>68.20</td><td>-13.05</td><td>54.03</td><td>1.12</td><td>Peak</td><td>232</td><td>21</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5424.20	54.02	74.00	-19.98	53.47	0.55	Peak	232	21	2	5470.00	54.54	68.20	-13.66	53.82	0.72	Peak	230	19	3	5727.73	55.15	68.20	-13.05	54.03	1.12	Peak	232	21
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5424.20	54.02	74.00	-19.98	53.47	0.55	Peak	232	21																																		
2	5470.00	54.54	68.20	-13.66	53.82	0.72	Peak	230	19																																		
3	5727.73	55.15	68.20	-13.05	54.03	1.12	Peak	232	21																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5590																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBUV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.99</td><td>42.13</td><td>54.00</td><td>-11.87</td><td>41.44</td><td>0.69</td><td>Average</td><td>232</td><td>21</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg	1	5458.99	42.13	54.00	-11.87	41.44	0.69	Average	232	21
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg																								
1	5458.99	42.13	54.00	-11.87	41.44	0.69	Average	232	21																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

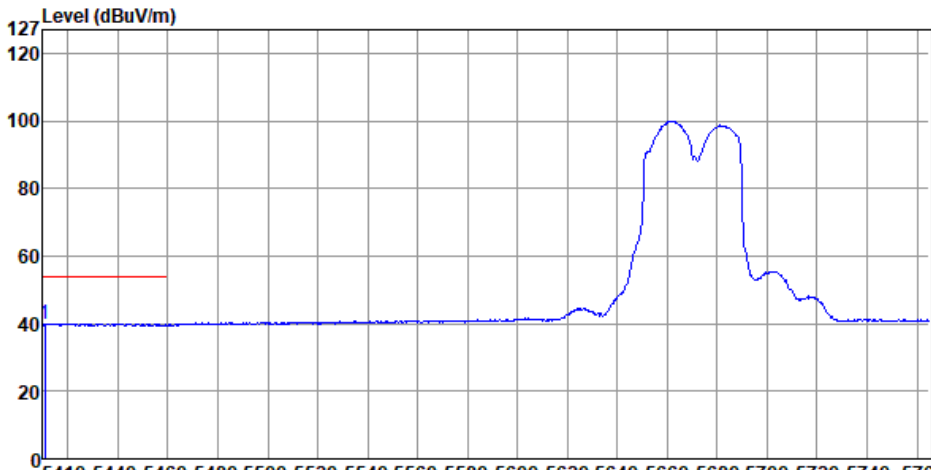
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5670																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5430.59</td><td>53.64</td><td>74.00</td><td>-20.36</td><td>53.07</td><td>0.57</td><td>Peak</td><td>239</td><td>238</td></tr><tr><td>2</td><td>5465.03</td><td>52.71</td><td>68.20</td><td>-15.49</td><td>52.01</td><td>0.70</td><td>Peak</td><td>239</td><td>238</td></tr><tr><td>3</td><td>5725.24</td><td>60.88</td><td>68.20</td><td>-7.32</td><td>59.77</td><td>1.11</td><td>Peak</td><td>239</td><td>238</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5430.59	53.64	74.00	-20.36	53.07	0.57	Peak	239	238	2	5465.03	52.71	68.20	-15.49	52.01	0.70	Peak	239	238	3	5725.24	60.88	68.20	-7.32	59.77	1.11	Peak	239	238
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5430.59	53.64	74.00	-20.36	53.07	0.57	Peak	239	238																																		
2	5465.03	52.71	68.20	-15.49	52.01	0.70	Peak	239	238																																		
3	5725.24	60.88	68.20	-7.32	59.77	1.11	Peak	239	238																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5670																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5410.71</td><td>40.04</td><td>54.00</td><td>-13.96</td><td>39.57</td><td>0.47</td><td>Average</td><td>239</td><td>238</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5410.71	40.04	54.00	-13.96	39.57	0.47	Average	239	238
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5410.71	40.04	54.00	-13.96	39.57	0.47	Average	239	238														



Band Edge measurement

Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5670																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5439.11</td><td>53.82</td><td>74.00</td><td>-20.18</td><td>53.21</td><td>0.61</td><td>Peak</td><td>212</td><td>14</td></tr><tr><td>2</td><td>5468.58</td><td>52.50</td><td>68.20</td><td>-15.70</td><td>51.78</td><td>0.72</td><td>Peak</td><td>212</td><td>14</td></tr><tr><td>3</td><td>5725.24</td><td>59.03</td><td>68.20</td><td>-9.17</td><td>57.92</td><td>1.11</td><td>Peak</td><td>212</td><td>14</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5439.11	53.82	74.00	-20.18	53.21	0.61	Peak	212	14	2	5468.58	52.50	68.20	-15.70	51.78	0.72	Peak	212	14	3	5725.24	59.03	68.20	-9.17	57.92	1.11	Peak	212	14
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5439.11	53.82	74.00	-20.18	53.21	0.61	Peak	212	14																																		
2	5468.58	52.50	68.20	-15.70	51.78	0.72	Peak	212	14																																		
3	5725.24	59.03	68.20	-9.17	57.92	1.11	Peak	212	14																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

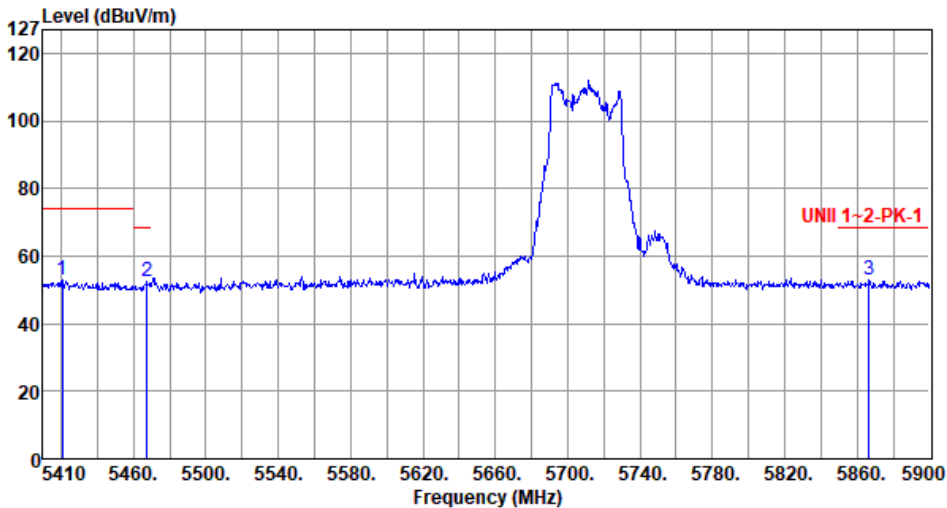
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5670						
Polarization	Vertical-Average								
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5411.78	40.57	54.00	-13.43	40.09	0.48	Average	212	14
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Band Edge measurement

Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5710																																																												
Polarization	Horizontal-Peak																																																														
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																															
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5420.78</td><td>52.76</td><td>74.00</td><td>-21.24</td><td>52.24</td><td>0.52</td><td>Peak</td><td>314</td><td>258</td></tr><tr><td>2</td><td>5467.33</td><td>52.54</td><td>68.20</td><td>-15.66</td><td>51.83</td><td>0.71</td><td>Peak</td><td>314</td><td>258</td></tr><tr><td>3</td><td>5866.68</td><td>52.77</td><td>68.20</td><td>-15.43</td><td>51.27</td><td>1.50</td><td>Peak</td><td>314</td><td>258</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5420.78	52.76	74.00	-21.24	52.24	0.52	Peak	314	258	2	5467.33	52.54	68.20	-15.66	51.83	0.71	Peak	314	258	3	5866.68	52.77	68.20	-15.43	51.27	1.50	Peak	314	258
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																						
		dBUV/m			dBUV			cm	deg																																																						
1	5420.78	52.76	74.00	-21.24	52.24	0.52	Peak	314	258																																																						
2	5467.33	52.54	68.20	-15.66	51.83	0.71	Peak	314	258																																																						
3	5866.68	52.77	68.20	-15.43	51.27	1.50	Peak	314	258																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															



Band Edge measurement

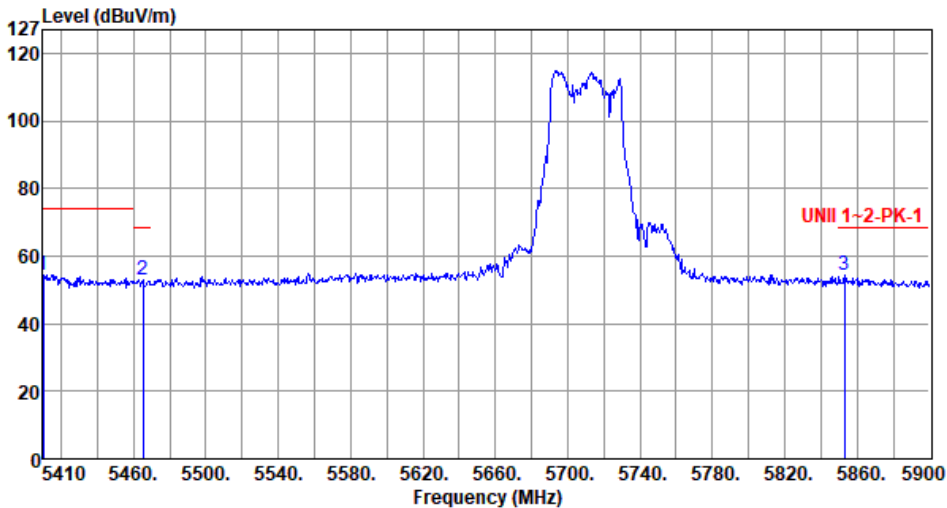
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5710																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5420.78</td><td>40.87</td><td>54.00</td><td>-13.13</td><td>40.35</td><td>0.52</td><td>Average</td><td>314</td><td>258</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5420.78	40.87	54.00	-13.13	40.35	0.52	Average	314	258
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5420.78	40.87	54.00	-13.13	40.35	0.52	Average	314	258														



Band Edge measurement

Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5710																																																												
Polarization	Vertical-Peak																																																														
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																															
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5410.00</td><td>54.45</td><td>74.00</td><td>-19.55</td><td>53.98</td><td>0.47</td><td>Peak</td><td>256</td><td>23</td></tr><tr><td>2</td><td>5465.37</td><td>52.90</td><td>68.20</td><td>-15.30</td><td>52.19</td><td>0.71</td><td>Peak</td><td>256</td><td>23</td></tr><tr><td>3</td><td>5852.96</td><td>54.29</td><td>68.20</td><td>-13.91</td><td>52.86</td><td>1.43</td><td>Peak</td><td>256</td><td>23</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5410.00	54.45	74.00	-19.55	53.98	0.47	Peak	256	23	2	5465.37	52.90	68.20	-15.30	52.19	0.71	Peak	256	23	3	5852.96	54.29	68.20	-13.91	52.86	1.43	Peak	256	23
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																						
		dBuV/m			dBuV			cm	deg																																																						
1	5410.00	54.45	74.00	-19.55	53.98	0.47	Peak	256	23																																																						
2	5465.37	52.90	68.20	-15.30	52.19	0.71	Peak	256	23																																																						
3	5852.96	54.29	68.20	-13.91	52.86	1.43	Peak	256	23																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															



Band Edge measurement

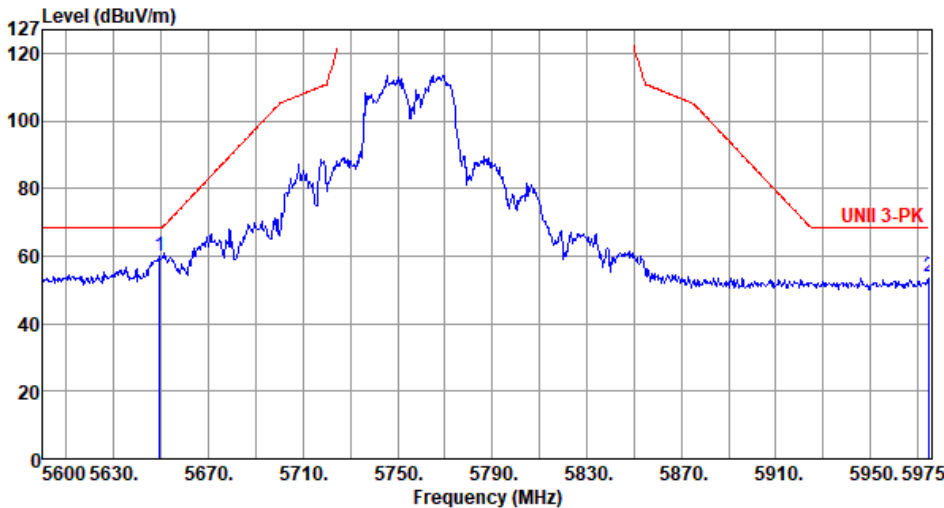
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5710
Polarization	Vertical-Average		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Band Edge measurement

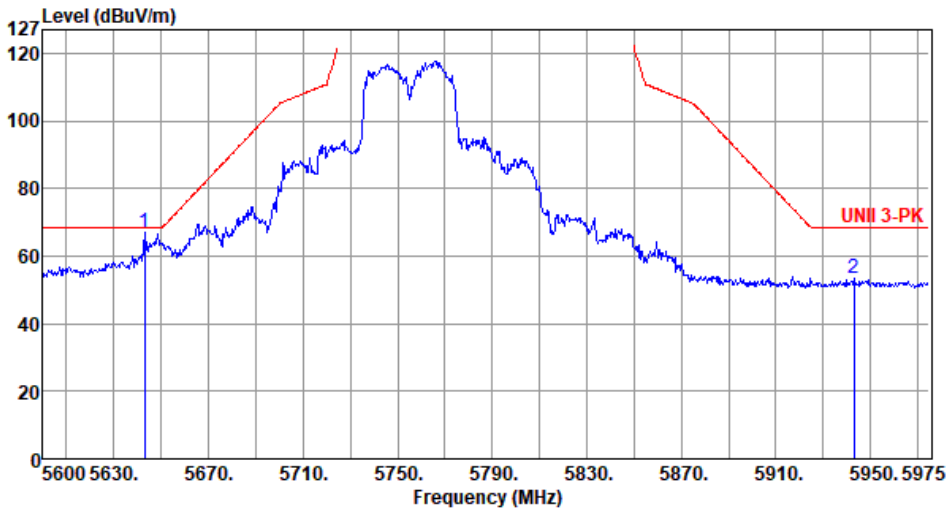
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5755																																																		
Polarization	Horizontal-Peak																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5649.50</td><td>59.83</td><td>68.20</td><td>-8.37</td><td>58.91</td><td>0.92</td><td>Peak</td><td>245</td><td>72</td></tr><tr><td>2</td><td>5975.00</td><td>54.00</td><td>68.20</td><td>-14.20</td><td>52.28</td><td>1.72</td><td>Peak</td><td>245</td><td>72</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5649.50	59.83	68.20	-8.37	58.91	0.92	Peak	245	72	2	5975.00	54.00	68.20	-14.20	52.28	1.72	Peak	245	72
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
		dBUV/m			dBUV			cm	deg																																												
1	5649.50	59.83	68.20	-8.37	58.91	0.92	Peak	245	72																																												
2	5975.00	54.00	68.20	-14.20	52.28	1.72	Peak	245	72																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

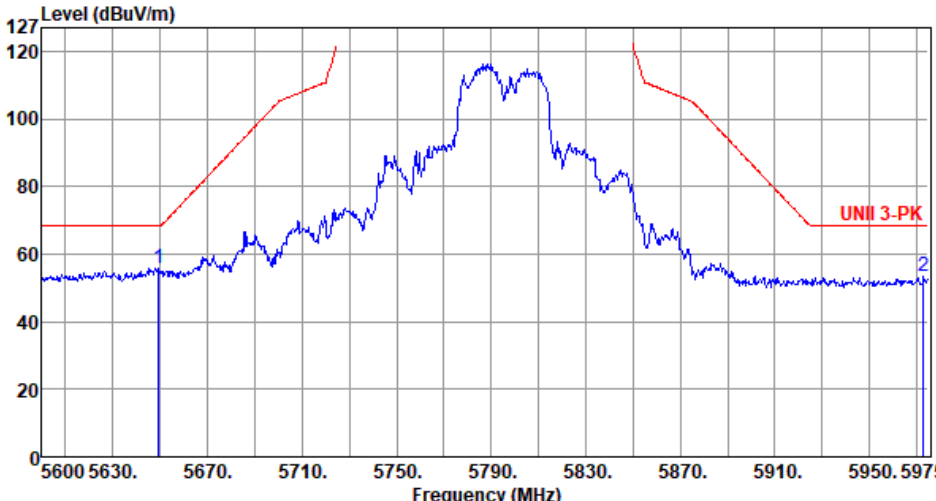
Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5755																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5643.13</td><td>67.02</td><td>68.20</td><td>-1.18</td><td>66.11</td><td>0.91</td><td>Peak</td><td>238</td><td>38</td></tr><tr><td>2</td><td>5943.13</td><td>53.43</td><td>68.20</td><td>-14.77</td><td>51.76</td><td>1.67</td><td>Peak</td><td>238</td><td>38</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5643.13	67.02	68.20	-1.18	66.11	0.91	Peak	238	38	2	5943.13	53.43	68.20	-14.77	51.76	1.67	Peak	238	38
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5643.13	67.02	68.20	-1.18	66.11	0.91	Peak	238	38																								
2	5943.13	53.43	68.20	-14.77	51.76	1.67	Peak	238	38																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5795																																																		
Polarization	Horizontal-Peak																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5649.50</td><td>55.99</td><td>68.20</td><td>-12.21</td><td>55.07</td><td>0.92</td><td>Peak</td><td>252</td><td>239</td></tr><tr><td>2</td><td>5972.75</td><td>53.34</td><td>68.20</td><td>-14.86</td><td>51.62</td><td>1.72</td><td>Peak</td><td>250</td><td>237</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5649.50	55.99	68.20	-12.21	55.07	0.92	Peak	252	239	2	5972.75	53.34	68.20	-14.86	51.62	1.72	Peak	250	237
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5649.50	55.99	68.20	-12.21	55.07	0.92	Peak	252	239																																												
2	5972.75	53.34	68.20	-14.86	51.62	1.72	Peak	250	237																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D.2

Modulation	EHT40	Test Freq. (MHz)	5795																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5641.25</td><td>57.79</td><td>68.20</td><td>-10.41</td><td>56.90</td><td>0.89</td><td>Peak</td><td>250</td><td>26</td></tr><tr><td>2</td><td>5946.13</td><td>53.43</td><td>68.20</td><td>-14.77</td><td>51.76</td><td>1.67</td><td>Peak</td><td>248</td><td>29</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5641.25	57.79	68.20	-10.41	56.90	0.89	Peak	250	26	2	5946.13	53.43	68.20	-14.77	51.76	1.67	Peak	248	29
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5641.25	57.79	68.20	-10.41	56.90	0.89	Peak	250	26																								
2	5946.13	53.43	68.20	-14.77	51.76	1.67	Peak	248	29																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

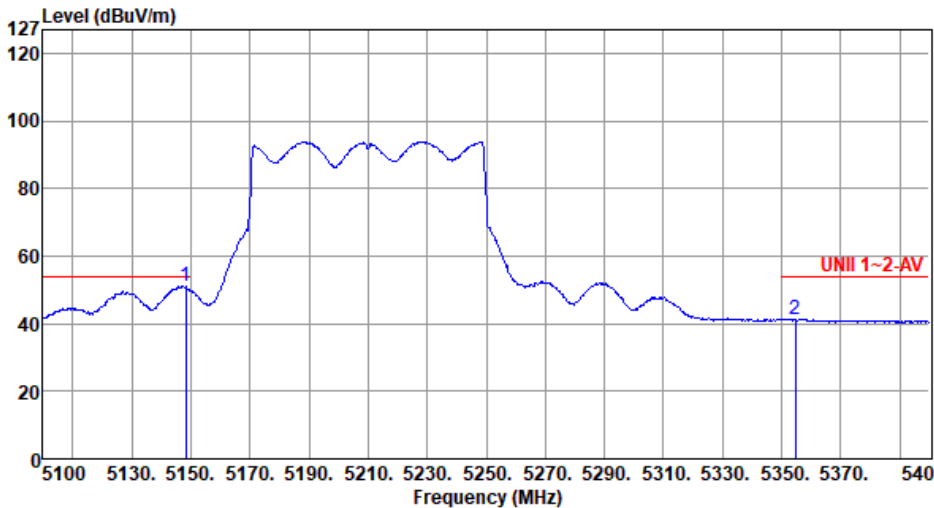
Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5210																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m) UNII 1-2-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5147.40</td><td>63.28</td><td>74.00</td><td>-10.72</td><td>62.19</td><td>1.09</td><td>Peak</td><td>229</td><td>113</td></tr><tr><td>2</td><td>5398.80</td><td>53.52</td><td>74.00</td><td>-20.48</td><td>53.09</td><td>0.43</td><td>Peak</td><td>229</td><td>113</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5147.40	63.28	74.00	-10.72	62.19	1.09	Peak	229	113	2	5398.80	53.52	74.00	-20.48	53.09	0.43	Peak	229	113
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5147.40	63.28	74.00	-10.72	62.19	1.09	Peak	229	113																								
2	5398.80	53.52	74.00	-20.48	53.09	0.43	Peak	229	113																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

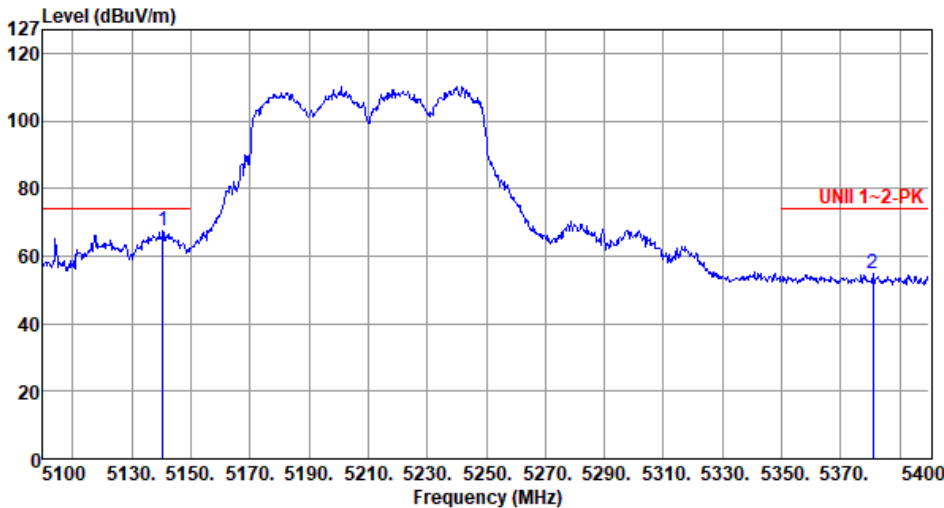
Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5210																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5148.30</td><td>50.97</td><td>54.00</td><td>-3.03</td><td>49.87</td><td>1.10</td><td>Average</td><td>229</td><td>113</td></tr><tr><td>2</td><td>5354.70</td><td>41.29</td><td>54.00</td><td>-12.71</td><td>40.96</td><td>0.33</td><td>Average</td><td>229</td><td>113</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.30	50.97	54.00	-3.03	49.87	1.10	Average	229	113	2	5354.70	41.29	54.00	-12.71	40.96	0.33	Average	229	113
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.30	50.97	54.00	-3.03	49.87	1.10	Average	229	113																								
2	5354.70	41.29	54.00	-12.71	40.96	0.33	Average	229	113																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

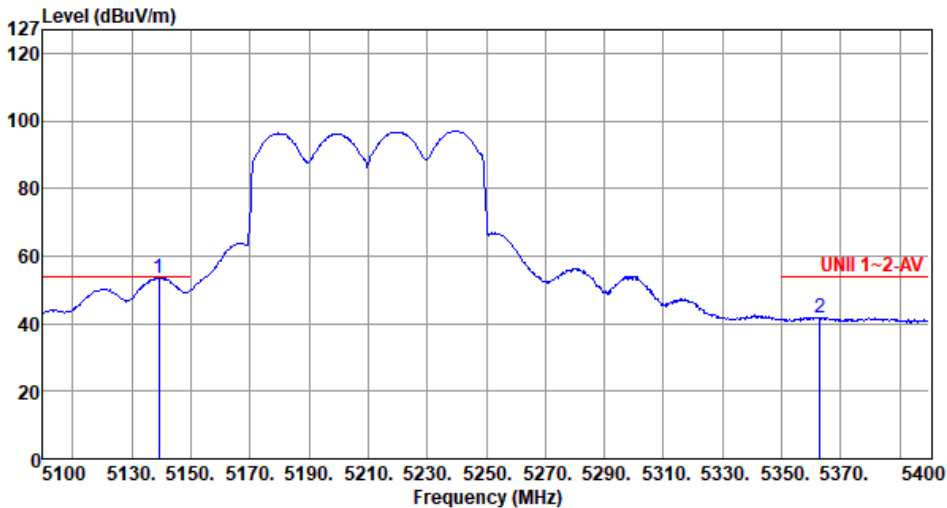
Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5210																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5140.50</td><td>67.71</td><td>74.00</td><td>-6.29</td><td>66.64</td><td>1.07</td><td>Peak</td><td>186</td><td>33</td></tr><tr><td>2</td><td>5380.80</td><td>55.06</td><td>74.00</td><td>-18.94</td><td>54.67</td><td>0.39</td><td>Peak</td><td>176</td><td>39</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5140.50	67.71	74.00	-6.29	66.64	1.07	Peak	186	33	2	5380.80	55.06	74.00	-18.94	54.67	0.39	Peak	176	39
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5140.50	67.71	74.00	-6.29	66.64	1.07	Peak	186	33																								
2	5380.80	55.06	74.00	-18.94	54.67	0.39	Peak	176	39																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

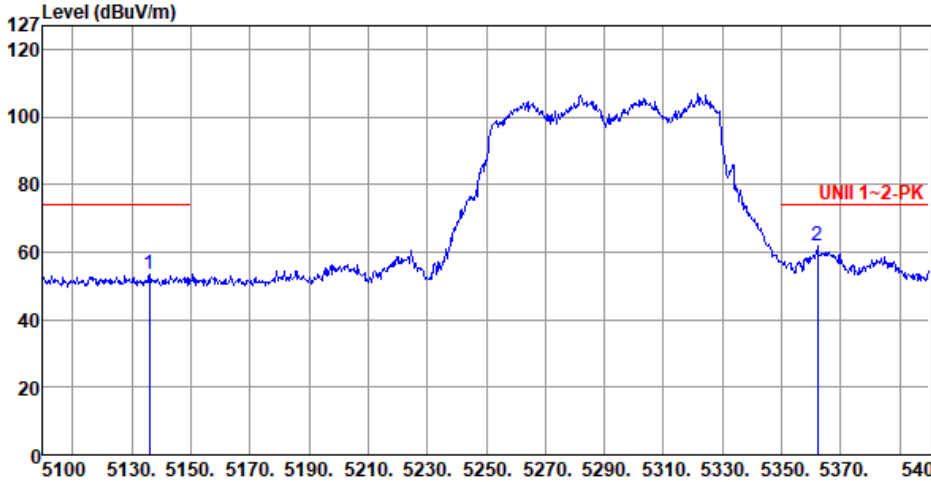
Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5210																																																		
Polarization	Vertical-Average																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5139.30</td><td>53.52</td><td>54.00</td><td>-0.48</td><td>52.45</td><td>1.07</td><td>Average</td><td>186</td><td>33</td></tr><tr><td>2</td><td>5362.80</td><td>41.94</td><td>54.00</td><td>-12.06</td><td>41.58</td><td>0.36</td><td>Average</td><td>176</td><td>39</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5139.30	53.52	54.00	-0.48	52.45	1.07	Average	186	33	2	5362.80	41.94	54.00	-12.06	41.58	0.36	Average	176	39
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5139.30	53.52	54.00	-0.48	52.45	1.07	Average	186	33																																												
2	5362.80	41.94	54.00	-12.06	41.58	0.36	Average	176	39																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5290																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5136.00</td><td>53.59</td><td>74.00</td><td>-20.41</td><td>52.53</td><td>1.06</td><td>Peak</td><td>183</td><td>94</td></tr><tr><td>2</td><td>5362.20</td><td>61.66</td><td>74.00</td><td>-12.34</td><td>61.31</td><td>0.35</td><td>Peak</td><td>179</td><td>98</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5136.00	53.59	74.00	-20.41	52.53	1.06	Peak	183	94	2	5362.20	61.66	74.00	-12.34	61.31	0.35	Peak	179	98
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5136.00	53.59	74.00	-20.41	52.53	1.06	Peak	183	94																								
2	5362.20	61.66	74.00	-12.34	61.31	0.35	Peak	179	98																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

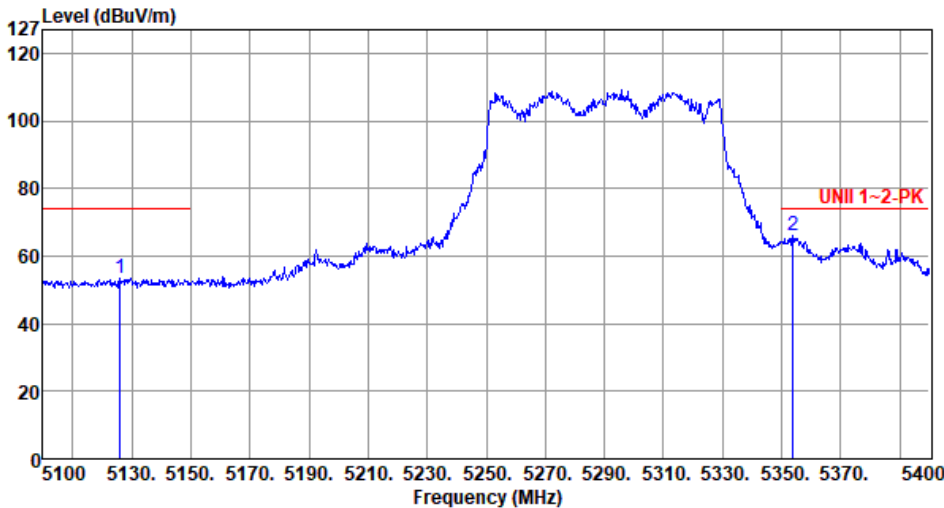
Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5290
Polarization	Horizontal-Average		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64			
Level (dBUV/m)			



Band Edge measurement

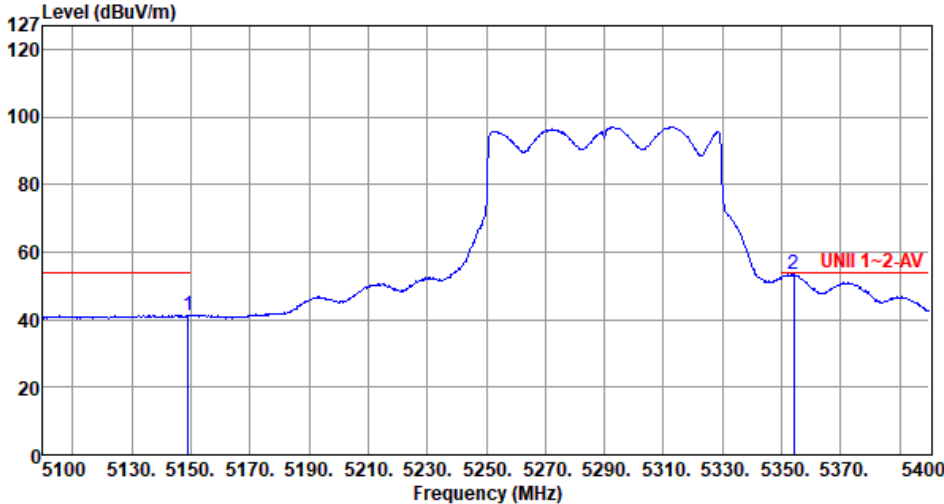
Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5290																																																		
Polarization	Vertical-Peak																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5126.10</td><td>53.33</td><td>74.00</td><td>-20.67</td><td>52.29</td><td>1.04</td><td>Peak</td><td>172</td><td>19</td></tr><tr><td>2</td><td>5353.80</td><td>66.09</td><td>74.00</td><td>-7.91</td><td>65.76</td><td>0.33</td><td>Peak</td><td>167</td><td>17</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5126.10	53.33	74.00	-20.67	52.29	1.04	Peak	172	19	2	5353.80	66.09	74.00	-7.91	65.76	0.33	Peak	167	17
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5126.10	53.33	74.00	-20.67	52.29	1.04	Peak	172	19																																												
2	5353.80	66.09	74.00	-7.91	65.76	0.33	Peak	167	17																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5290																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.20</td><td>41.24</td><td>54.00</td><td>-12.76</td><td>40.14</td><td>1.10</td><td>Average</td><td>172</td><td>19</td></tr><tr><td>2</td><td>5354.10</td><td>53.59</td><td>54.00</td><td>-0.41</td><td>53.26</td><td>0.33</td><td>Average</td><td>167</td><td>17</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.20	41.24	54.00	-12.76	40.14	1.10	Average	172	19	2	5354.10	53.59	54.00	-0.41	53.26	0.33	Average	167	17
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.20	41.24	54.00	-12.76	40.14	1.10	Average	172	19																								
2	5354.10	53.59	54.00	-0.41	53.26	0.33	Average	167	17																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5530																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m) 127 120 100 80 60 40 20 0 5410 5440.5460.5480.5500.5520.5540.5560.5580.5600.5620.5640.5660.5680.5700.5720.5740. 5765 Frequency (MHz)																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5453.31</td><td>62.57</td><td>74.00</td><td>-11.43</td><td>61.90</td><td>0.67</td><td>Peak</td><td>180</td><td>107</td></tr><tr><td>2</td><td>5470.00</td><td>62.82</td><td>68.20</td><td>-5.38</td><td>62.10</td><td>0.72</td><td>Peak</td><td>179</td><td>106</td></tr><tr><td>3</td><td>5735.89</td><td>54.11</td><td>68.20</td><td>-14.09</td><td>52.98</td><td>1.13</td><td>Peak</td><td>180</td><td>107</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5453.31	62.57	74.00	-11.43	61.90	0.67	Peak	180	107	2	5470.00	62.82	68.20	-5.38	62.10	0.72	Peak	179	106	3	5735.89	54.11	68.20	-14.09	52.98	1.13	Peak	180	107
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5453.31	62.57	74.00	-11.43	61.90	0.67	Peak	180	107																																		
2	5470.00	62.82	68.20	-5.38	62.10	0.72	Peak	179	106																																		
3	5735.89	54.11	68.20	-14.09	52.98	1.13	Peak	180	107																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5530																																								
Polarization	Horizontal-Average																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5450.12</td><td>48.62</td><td>54.00</td><td>-5.38</td><td>47.96</td><td>0.66</td><td>Average</td><td>180</td><td>107</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5450.12	48.62	54.00	-5.38	47.96	0.66	Average	180	107
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																		
		dBuV/m			dBuV			cm	deg																																		
1	5450.12	48.62	54.00	-5.38	47.96	0.66	Average	180	107																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5530																																																												
Polarization	Vertical-Peak																																																														
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																															
Level (dBUV/m) 127 120 100 80 60 40 20 0 5410 5440.5460.5480.5500.5520.5540.5560.5580.5600.5620.5640.5660.5680.5700.5720.5740. 5765 Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.35</td><td>68.07</td><td>74.00</td><td>-5.93</td><td>67.38</td><td>0.69</td><td>Peak</td><td>161</td><td>30</td></tr><tr><td>2</td><td>5460.41</td><td>67.73</td><td>68.20</td><td>-0.47</td><td>67.04</td><td>0.69</td><td>Peak</td><td>178</td><td>34</td></tr><tr><td>3</td><td>5725.95</td><td>54.97</td><td>68.20</td><td>-13.23</td><td>53.86</td><td>1.11</td><td>Peak</td><td>161</td><td>30</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5459.35	68.07	74.00	-5.93	67.38	0.69	Peak	161	30	2	5460.41	67.73	68.20	-0.47	67.04	0.69	Peak	178	34	3	5725.95	54.97	68.20	-13.23	53.86	1.11	Peak	161	30
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																						
		dBuV/m			dBuV			cm	deg																																																						
1	5459.35	68.07	74.00	-5.93	67.38	0.69	Peak	161	30																																																						
2	5460.41	67.73	68.20	-0.47	67.04	0.69	Peak	178	34																																																						
3	5725.95	54.97	68.20	-13.23	53.86	1.11	Peak	161	30																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															



Band Edge measurement

Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5530																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																							
Level (dBuV/m) 1 Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5457.22</td><td>51.96</td><td>54.00</td><td>-2.04</td><td>51.28</td><td>0.68</td><td>Average</td><td>161</td><td>30</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5457.22	51.96	54.00	-2.04	51.28	0.68	Average	161	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5457.22	51.96	54.00	-2.04	51.28	0.68	Average	161	30														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

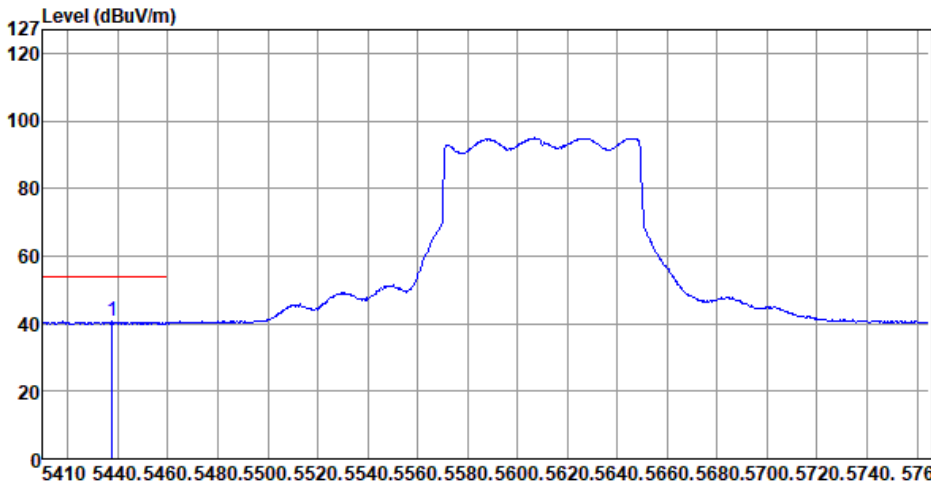
Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5610																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBUV/m) 12 3 UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5457.57</td><td>53.09</td><td>74.00</td><td>-20.91</td><td>52.40</td><td>0.69</td><td>Peak</td><td>159</td><td>104</td></tr><tr><td>2</td><td>5461.48</td><td>53.14</td><td>68.20</td><td>-15.06</td><td>52.45</td><td>0.69</td><td>Peak</td><td>157</td><td>102</td></tr><tr><td>3</td><td>5728.08</td><td>53.64</td><td>68.20</td><td>-14.56</td><td>52.52</td><td>1.12</td><td>Peak</td><td>150</td><td>107</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5457.57	53.09	74.00	-20.91	52.40	0.69	Peak	159	104	2	5461.48	53.14	68.20	-15.06	52.45	0.69	Peak	157	102	3	5728.08	53.64	68.20	-14.56	52.52	1.12	Peak	150	107
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5457.57	53.09	74.00	-20.91	52.40	0.69	Peak	159	104																																		
2	5461.48	53.14	68.20	-15.06	52.45	0.69	Peak	157	102																																		
3	5728.08	53.64	68.20	-14.56	52.52	1.12	Peak	150	107																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

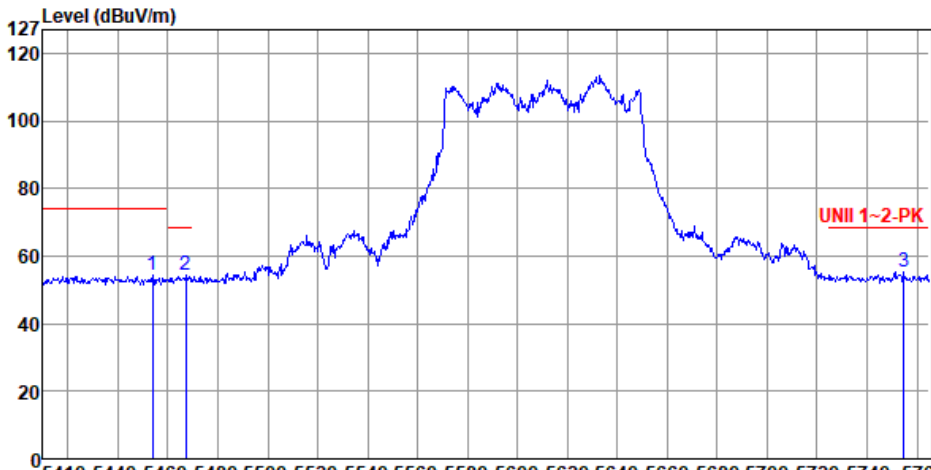
Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5610																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5437.69</td><td>40.58</td><td>54.00</td><td>-13.42</td><td>39.98</td><td>0.60</td><td>Average</td><td>159</td><td>104</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5437.69	40.58	54.00	-13.42	39.98	0.60	Average	159	104
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																								
1	5437.69	40.58	54.00	-13.42	39.98	0.60	Average	159	104																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5610																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5454.02</td><td>54.19</td><td>74.00</td><td>-19.81</td><td>53.52</td><td>0.67</td><td>Peak</td><td>248</td><td>20</td></tr><tr><td>2</td><td>5467.16</td><td>54.36</td><td>68.20</td><td>-13.84</td><td>53.65</td><td>0.71</td><td>Peak</td><td>247</td><td>19</td></tr><tr><td>3</td><td>5754.71</td><td>55.46</td><td>68.20</td><td>-12.74</td><td>54.28</td><td>1.18</td><td>Peak</td><td>240</td><td>22</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5454.02	54.19	74.00	-19.81	53.52	0.67	Peak	248	20	2	5467.16	54.36	68.20	-13.84	53.65	0.71	Peak	247	19	3	5754.71	55.46	68.20	-12.74	54.28	1.18	Peak	240	22
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5454.02	54.19	74.00	-19.81	53.52	0.67	Peak	248	20																																		
2	5467.16	54.36	68.20	-13.84	53.65	0.71	Peak	247	19																																		
3	5754.71	55.46	68.20	-12.74	54.28	1.18	Peak	240	22																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5610
Polarization	Vertical-Average		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) <			



Band Edge measurement

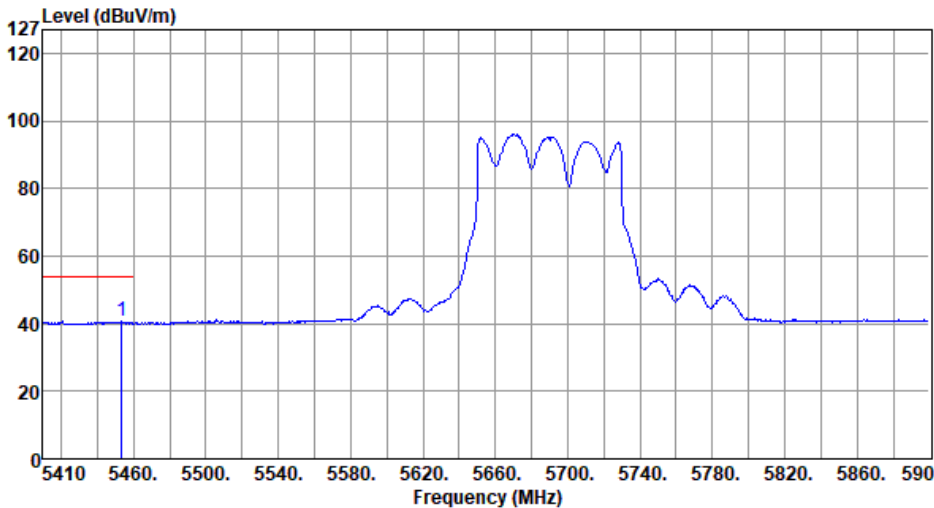
Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5690																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBUV/m) UNII 1+2-PK-1 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5450.18</td><td>53.95</td><td>74.00</td><td>-20.05</td><td>53.29</td><td>0.66</td><td>Peak</td><td>327</td><td>260</td></tr><tr><td>2</td><td>5464.39</td><td>53.02</td><td>68.20</td><td>-15.18</td><td>52.32</td><td>0.70</td><td>Peak</td><td>327</td><td>260</td></tr><tr><td>3</td><td>5865.21</td><td>53.73</td><td>68.20</td><td>-14.47</td><td>52.24</td><td>1.49</td><td>Peak</td><td>327</td><td>260</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5450.18	53.95	74.00	-20.05	53.29	0.66	Peak	327	260	2	5464.39	53.02	68.20	-15.18	52.32	0.70	Peak	327	260	3	5865.21	53.73	68.20	-14.47	52.24	1.49	Peak	327	260
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5450.18	53.95	74.00	-20.05	53.29	0.66	Peak	327	260																																		
2	5464.39	53.02	68.20	-15.18	52.32	0.70	Peak	327	260																																		
3	5865.21	53.73	68.20	-14.47	52.24	1.49	Peak	327	260																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

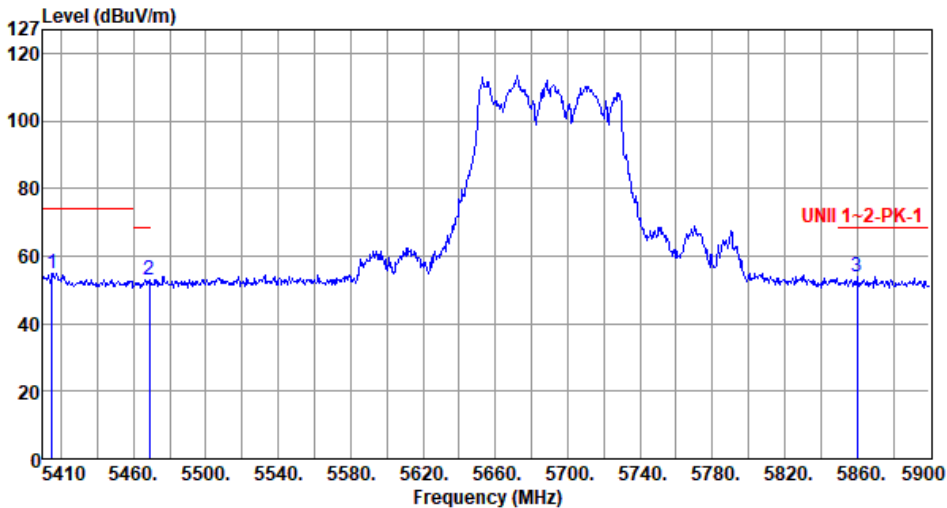
Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5690
Polarization	Horizontal-Average		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn level MHz dBuV/m dBuV/m dB reading dB/m dBuV 1 5453.61 40.61 54.00 -13.39 39.94 0.67 Average 327 260			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Band Edge measurement

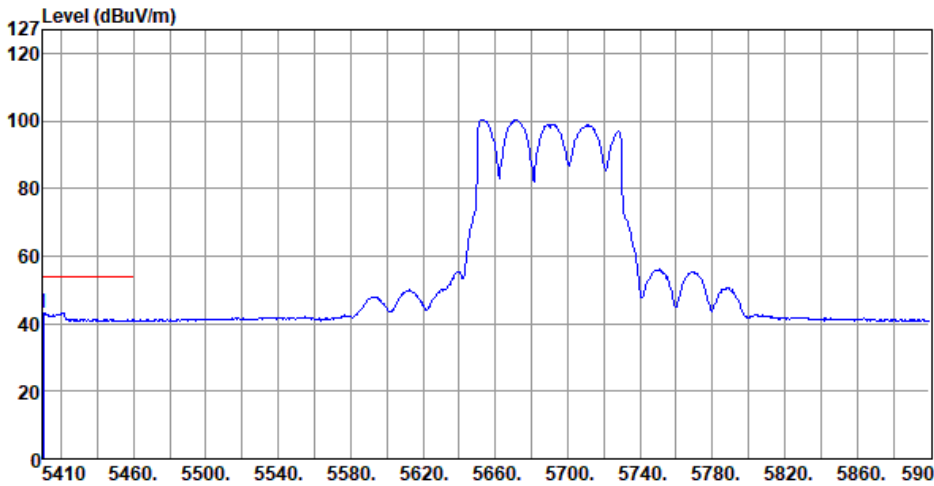
Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5690																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5414.90</td><td>55.05</td><td>74.00</td><td>-18.95</td><td>54.55</td><td>0.50</td><td>Peak</td><td>244</td><td>20</td></tr><tr><td>2</td><td>5468.80</td><td>53.14</td><td>68.20</td><td>-15.06</td><td>52.42</td><td>0.72</td><td>Peak</td><td>244</td><td>20</td></tr><tr><td>3</td><td>5859.82</td><td>53.83</td><td>68.20</td><td>-14.37</td><td>52.36</td><td>1.47</td><td>Peak</td><td>244</td><td>20</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5414.90	55.05	74.00	-18.95	54.55	0.50	Peak	244	20	2	5468.80	53.14	68.20	-15.06	52.42	0.72	Peak	244	20	3	5859.82	53.83	68.20	-14.37	52.36	1.47	Peak	244	20
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5414.90	55.05	74.00	-18.95	54.55	0.50	Peak	244	20																																		
2	5468.80	53.14	68.20	-15.06	52.42	0.72	Peak	244	20																																		
3	5859.82	53.83	68.20	-14.37	52.36	1.47	Peak	244	20																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

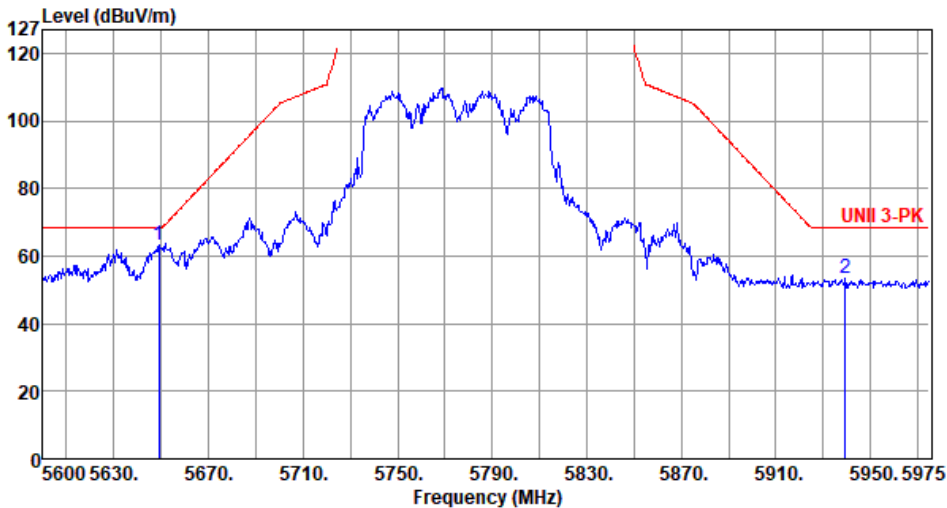
Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5690						
Polarization	Vertical-Average								
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5410.00	43.22	54.00	-10.78	42.75	0.47	Average	244	20
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Band Edge measurement

Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5775																																																		
Polarization	Horizontal-Peak																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5649.13</td><td>63.10</td><td>68.20</td><td>-5.10</td><td>62.18</td><td>0.92</td><td>Peak</td><td>294</td><td>239</td></tr><tr><td>2</td><td>5939.38</td><td>53.19</td><td>68.20</td><td>-15.01</td><td>51.53</td><td>1.66</td><td>Peak</td><td>313</td><td>251</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	5649.13	63.10	68.20	-5.10	62.18	0.92	Peak	294	239	2	5939.38	53.19	68.20	-15.01	51.53	1.66	Peak	313	251
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
								cm	deg																																												
1	5649.13	63.10	68.20	-5.10	62.18	0.92	Peak	294	239																																												
2	5939.38	53.19	68.20	-15.01	51.53	1.66	Peak	313	251																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

Appendix D.2

Modulation	EHT80	Test Freq. (MHz)	5775																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m) 1 2 UNII 3-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5646.13</td><td>67.78</td><td>68.20</td><td>-0.42</td><td>66.87</td><td>0.91</td><td>Peak</td><td>181</td><td>37</td></tr><tr><td>2</td><td>5971.63</td><td>53.79</td><td>68.20</td><td>-14.41</td><td>52.08</td><td>1.71</td><td>Peak</td><td>316</td><td>249</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5646.13	67.78	68.20	-0.42	66.87	0.91	Peak	181	37	2	5971.63	53.79	68.20	-14.41	52.08	1.71	Peak	316	249
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5646.13	67.78	68.20	-0.42	66.87	0.91	Peak	181	37																								
2	5971.63	53.79	68.20	-14.41	52.08	1.71	Peak	316	249																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

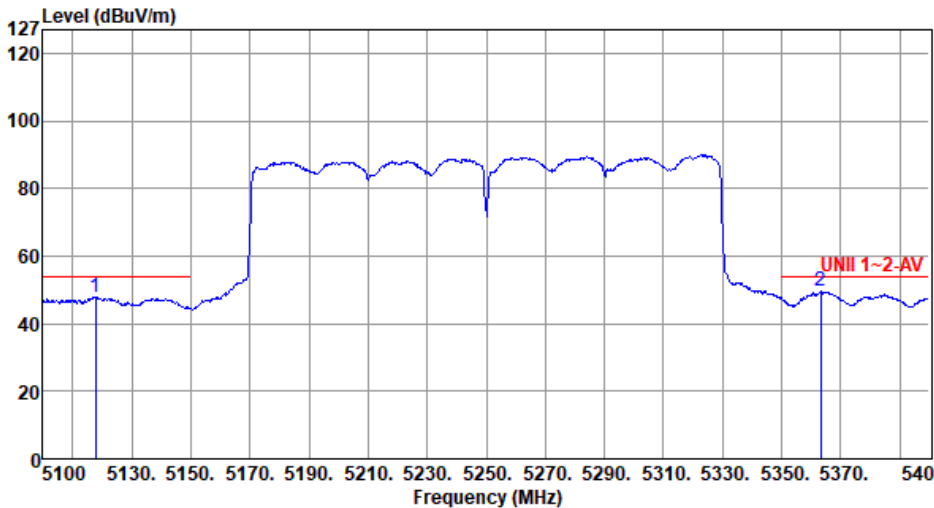
Appendix D.2

Modulation	EHT160	Test Freq. (MHz)	5250																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m) UNIT 1~2-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5118.00</td><td>62.94</td><td>74.00</td><td>-11.06</td><td>61.91</td><td>1.03</td><td>Peak</td><td>307</td><td>63</td></tr><tr><td>2</td><td>5363.40</td><td>62.25</td><td>74.00</td><td>-11.75</td><td>61.89</td><td>0.36</td><td>Peak</td><td>179</td><td>99</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5118.00	62.94	74.00	-11.06	61.91	1.03	Peak	307	63	2	5363.40	62.25	74.00	-11.75	61.89	0.36	Peak	179	99
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5118.00	62.94	74.00	-11.06	61.91	1.03	Peak	307	63																								
2	5363.40	62.25	74.00	-11.75	61.89	0.36	Peak	179	99																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

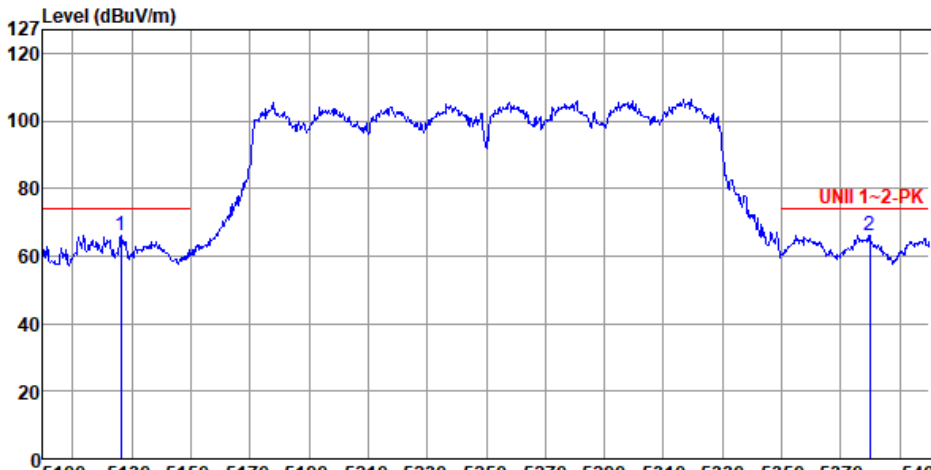
Appendix D.2

Modulation	EHT160	Test Freq. (MHz)	5250																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5117.70</td><td>47.80</td><td>54.00</td><td>-6.20</td><td>46.77</td><td>1.03</td><td>Average</td><td>307</td><td>63</td></tr><tr><td>2</td><td>5363.10</td><td>49.48</td><td>54.00</td><td>-4.52</td><td>49.12</td><td>0.36</td><td>Average</td><td>179</td><td>99</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5117.70	47.80	54.00	-6.20	46.77	1.03	Average	307	63	2	5363.10	49.48	54.00	-4.52	49.12	0.36	Average	179	99
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5117.70	47.80	54.00	-6.20	46.77	1.03	Average	307	63																								
2	5363.10	49.48	54.00	-4.52	49.12	0.36	Average	179	99																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

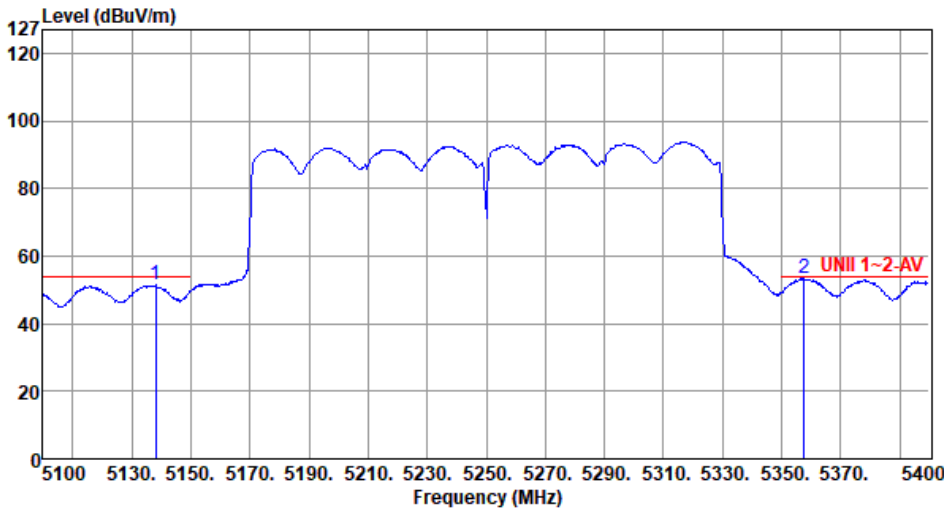
Appendix D.2

Modulation	EHT160	Test Freq. (MHz)	5250																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5126.40</td><td>66.04</td><td>74.00</td><td>-7.96</td><td>65.00</td><td>1.04</td><td>Peak</td><td>162</td><td>27</td></tr><tr><td>2</td><td>5379.90</td><td>66.08</td><td>74.00</td><td>-7.92</td><td>65.69</td><td>0.39</td><td>Peak</td><td>156</td><td>29</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5126.40	66.04	74.00	-7.96	65.00	1.04	Peak	162	27	2	5379.90	66.08	74.00	-7.92	65.69	0.39	Peak	156	29
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5126.40	66.04	74.00	-7.96	65.00	1.04	Peak	162	27																								
2	5379.90	66.08	74.00	-7.92	65.69	0.39	Peak	156	29																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT160	Test Freq. (MHz)	5250																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5138.10</td><td>51.33</td><td>54.00</td><td>-2.67</td><td>50.26</td><td>1.07</td><td>Average</td><td>162</td><td>27</td></tr><tr><td>2</td><td>5357.70</td><td>53.60</td><td>54.00</td><td>-0.40</td><td>53.26</td><td>0.34</td><td>Average</td><td>156</td><td>29</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5138.10	51.33	54.00	-2.67	50.26	1.07	Average	162	27	2	5357.70	53.60	54.00	-0.40	53.26	0.34	Average	156	29
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5138.10	51.33	54.00	-2.67	50.26	1.07	Average	162	27																								
2	5357.70	53.60	54.00	-0.40	53.26	0.34	Average	156	29																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	EHT160	Test Freq. (MHz)	5570																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5433.79</td><td>63.77</td><td>74.00</td><td>-10.23</td><td>63.18</td><td>0.59</td><td>Peak</td><td>181</td><td>102</td></tr><tr><td>2</td><td>5463.61</td><td>60.43</td><td>68.20</td><td>-7.77</td><td>59.73</td><td>0.70</td><td>Peak</td><td>310</td><td>66</td></tr><tr><td>3</td><td>5761.45</td><td>59.46</td><td>68.20</td><td>-8.74</td><td>58.26</td><td>1.20</td><td>Peak</td><td>309</td><td>99</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5433.79	63.77	74.00	-10.23	63.18	0.59	Peak	181	102	2	5463.61	60.43	68.20	-7.77	59.73	0.70	Peak	310	66	3	5761.45	59.46	68.20	-8.74	58.26	1.20	Peak	309	99
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5433.79	63.77	74.00	-10.23	63.18	0.59	Peak	181	102																																		
2	5463.61	60.43	68.20	-7.77	59.73	0.70	Peak	310	66																																		
3	5761.45	59.46	68.20	-8.74	58.26	1.20	Peak	309	99																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

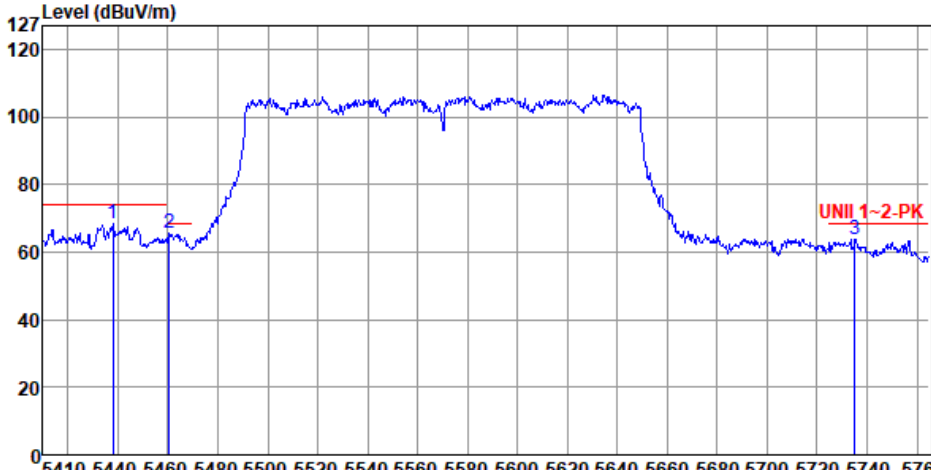
Appendix D.2

Modulation	EHT160	Test Freq. (MHz)	5570
Polarization	Horizontal-Average		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Band Edge measurement

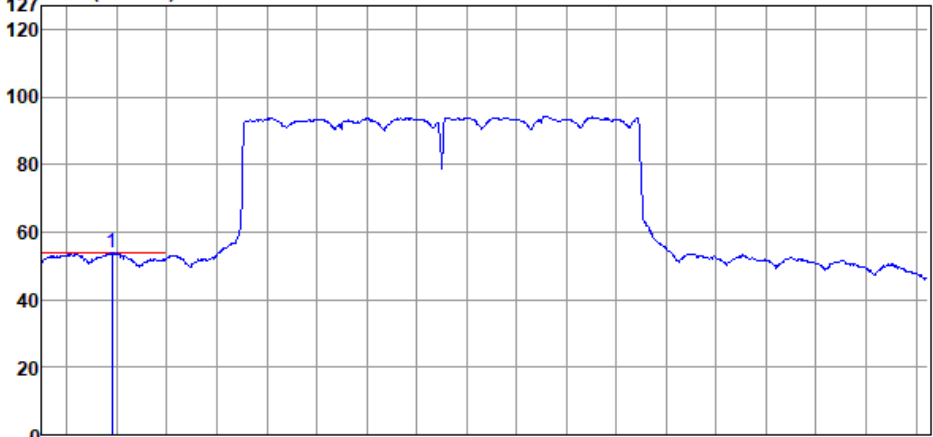
Appendix D.2

Modulation	EHT160	Test Freq. (MHz)	5570																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5438.05</td><td>68.55</td><td>74.00</td><td>-5.45</td><td>67.95</td><td>0.60</td><td>Peak</td><td>167</td><td>28</td></tr><tr><td>2</td><td>5460.41</td><td>65.50</td><td>68.20</td><td>-2.70</td><td>64.81</td><td>0.69</td><td>Peak</td><td>181</td><td>36</td></tr><tr><td>3</td><td>5735.18</td><td>63.88</td><td>68.20</td><td>-4.32</td><td>62.75</td><td>1.13</td><td>Peak</td><td>172</td><td>19</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5438.05	68.55	74.00	-5.45	67.95	0.60	Peak	167	28	2	5460.41	65.50	68.20	-2.70	64.81	0.69	Peak	181	36	3	5735.18	63.88	68.20	-4.32	62.75	1.13	Peak	172	19
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5438.05	68.55	74.00	-5.45	67.95	0.60	Peak	167	28																																		
2	5460.41	65.50	68.20	-2.70	64.81	0.69	Peak	181	36																																		
3	5735.18	63.88	68.20	-4.32	62.75	1.13	Peak	172	19																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D.2

Modulation	EHT160	Test Freq. (MHz)	5570																																								
Polarization	Vertical-Average																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):64																																											
Level (dBUV/m)  Frequency (MHz)																																											
<table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5438.05</td><td>53.89</td><td>54.00</td><td>-0.11</td><td>53.29</td><td>0.60</td><td>Average</td><td>167</td><td>28</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5438.05	53.89	54.00	-0.11	53.29	0.60	Average	167	28
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																		
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																		
		dBUV/m			dBUV			cm	deg																																		
1	5438.05	53.89	54.00	-0.11	53.29	0.60	Average	167	28																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	-0.09	0.55	0.17	0.34
T20°C Vmin	0.08	0.51	0.53	0.28
T40°C Vnom	2.97	3.31	3.31	3.55
T30°C Vnom	0.73	1.39	0.68	0.92
T20°C Vnom	0.06	0.51	0.05	0.24
T10°C Vnom	0.15	0.59	-0.29	0.41
T0°C Vnom	2.90	2.80	2.54	3.16
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	-0.08	0.22	0.52	-0.44
T20°C Vmin	0.07	0.51	-0.02	0.50
T40°C Vnom	2.72	2.52	3.13	2.92
T30°C Vnom	0.67	0.48	0.63	0.81
T20°C Vnom	0.05	-0.39	0.35	-0.14
T10°C Vnom	0.13	0.16	0.59	0.72
T0°C Vnom	2.66	3.30	2.63	3.10
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	

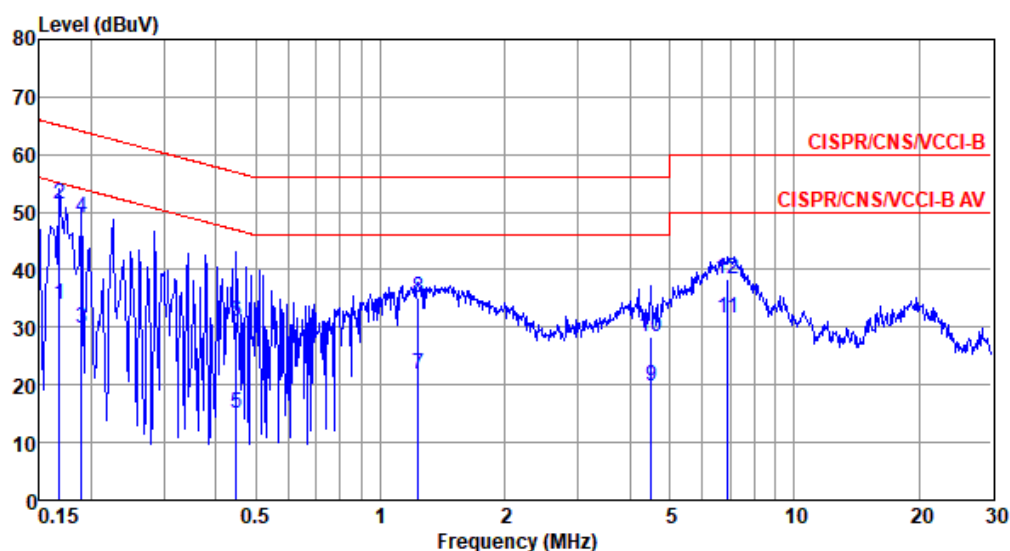


Modulation Mode	be EHT40	Test Freq. (MHz)	5795
Power Phase	Line		

Test by : Joe Liao

Temperature: 24°C

Humidity: 64%



	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	
	MHz	dBuV	Line	Limit	Level		loss		Remark
			dBuV	dB	dBuV	dB	dB	dB	
1	0.168	33.95	55.08	-21.13	24.17	9.75	0.03	0.00	Average
2*	0.168	51.27	65.08	-13.81	41.49	9.75	0.03	0.00	QP
3	0.189	29.71	54.06	-24.35	19.92	9.75	0.04	0.00	Average
4	0.189	48.87	64.06	-15.19	39.08	9.75	0.04	0.00	QP
5	0.449	15.17	46.89	-31.72	5.38	9.75	0.04	0.00	Average
6	0.449	30.96	56.89	-25.93	21.17	9.75	0.04	0.00	QP
7	1.236	21.83	46.00	-24.17	11.97	9.79	0.07	0.00	Average
8	1.236	35.21	56.00	-20.79	25.35	9.79	0.07	0.00	QP
9	4.501	19.87	46.00	-26.13	9.83	9.88	0.16	0.00	Average
10	4.501	28.43	56.00	-27.57	18.39	9.88	0.16	0.00	QP
11	6.914	31.67	50.00	-18.33	21.51	9.96	0.20	0.00	Average
12	6.914	38.44	60.00	-21.56	28.28	9.96	0.20	0.00	QP

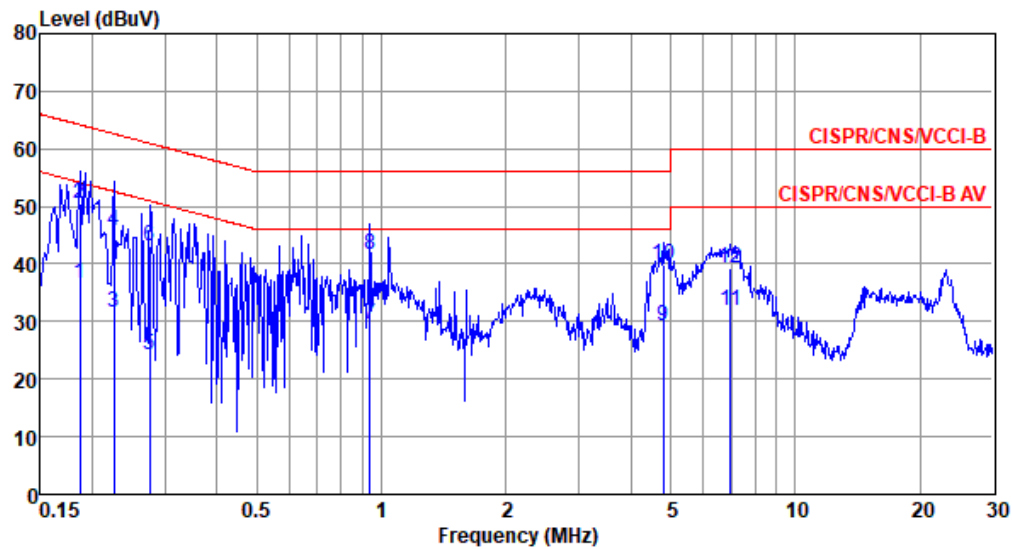
Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).



Modulation Mode	be EHT40	Test Freq. (MHz)	5795
Power Phase	Neutral		

Test by : Joe Liao Temperature: 24°C Humidity: 64%



	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.186	36.65	54.20	-17.55	26.87	9.74	0.04	0.00	Average
2*	0.186	50.51	64.20	-13.69	40.73	9.74	0.04	0.00	QP
3	0.226	31.48	52.61	-21.13	21.70	9.74	0.04	0.00	Average
4	0.226	45.66	62.61	-16.95	35.88	9.74	0.04	0.00	QP
5	0.276	24.27	50.94	-26.67	14.49	9.74	0.04	0.00	Average
6	0.276	42.98	60.94	-17.96	33.20	9.74	0.04	0.00	QP
7	0.938	29.52	46.00	-16.48	19.68	9.78	0.06	0.00	Average
8	0.938	41.62	56.00	-14.38	31.78	9.78	0.06	0.00	QP
9	4.797	29.15	46.00	-16.85	19.05	9.93	0.17	0.00	Average
10	4.797	39.80	56.00	-16.20	29.70	9.93	0.17	0.00	QP
11	6.988	31.97	50.00	-18.03	21.73	10.04	0.20	0.00	Average
12	6.988	39.17	60.00	-20.83	28.93	10.04	0.20	0.00	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).