


FCC Test Report

FCC ID : 2BV36EE6610-20
Equipment : Tri-Band Wireless BE19000 10G Ethernet Gateway
Model No. : EE6610-20
Brand Name : ZYXEL
Applicant : ZYXEL Communications Inc.
Address : 1130 N. Miller Street, Anaheim, CA 92806, USA
Standard : 47 CFR FCC Part 15.407
Equipment Class / Type : ☒ 6ID: Indoor access point
☐ 6PP: Subordinate device
☐ 6XD: Client device
Received Date : Jul. 31, 2026
Tested Date : Aug. 13 ~ Sep. 15, 2026

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Along Chen / Manager

Approved by:



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	11
1.3	Test Setup Chart	11
1.4	The Equipment List	12
1.5	Test Standards	14
1.6	Reference Guidance	14
1.7	Deviation from Test Standard and Measurement Procedure.....	14
1.8	Measurement Uncertainty	15
2	TEST CONFIGURATION.....	16
2.1	Testing Facility	16
2.2	Test Worst Modes and Channel Details.....	17
3	TRANSMITTER TEST RESULTS	18
3.1	Emission Bandwidth	18
3.2	RF Output Power.....	19
3.3	Power Spectral Density	20
3.4	Unwanted Emissions.....	21
3.5	In-Band Emissions	24
3.6	Frequency Stability.....	26
3.7	Contention Based Protocol.....	27
3.8	AC Power Line Conducted Emissions	29
4	TEST LABORATORY INFORMATION	30
Appendix A. Emission Bandwidth		
Appendix B. RF Output Power		
Appendix C. Power Spectral Density		
Appendix D. Unwanted Emissions		
Appendix E. In-Band Emissions		
Appendix F. Frequency Stability		
Appendix G. Contention Based Protocol		
Appendix H. AC Power Line Conducted Emissions		

Release Record

Report No.	Version	Description	Issued Date
FR673101AO	Rev. 01	Initial issue	Oct. 07, 2026

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.150MHz 45.66 (Margin -20.34dB) - QP	Pass
15.407(b)(5) 15.209	Unwanted Emission	[dBuV/m at 3m]: 7125.00MHz 67.99 (Margin -0.21dB) – AV	Pass
15.407(b)(6)	In-Band Emissions (Mask)	Meet the requirement of limit	Pass
15.407(a)(10)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(a)(5)	RF Output Power (e.i.r.p)	Max Power [dBm]: 5925-6425MHz: 23.79 6425-6525MHz: 23.77 6525-6875MHz: 24.17 6875-7125MHz: 22.70	Pass
15.407(a)(5)	Power Spectral Density (e.i.r.p)	Meet the requirement of limit	Pass
15.407(d)(6)	Contention Based Protocol	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
5925 ~ 7125	ax (HE20)	5955 ~ 7115	1 ~ 233 [59]	4	MCS 0-11
5925 ~ 7125	ax (HE40)	5965 ~ 7085	3 ~ 227 [29]	4	MCS 0-11
5925 ~ 7125	ax (HE80)	5985 ~ 7025	7 ~ 215 [14]	4	MCS 0-11
5925 ~ 7125	ax (HE160)	6025 ~ 6985	15 ~ 207 [7]	4	MCS 0-11
5925 ~ 7125	be (EHT20)	5955 ~ 7115	1 ~ 233 [59]	4	MCS 0-13
5925 ~ 7125	be (EHT40)	5965 ~ 7085	3 ~ 227 [29]	4	MCS 0-13
5925 ~ 7125	be (EHT80)	5985 ~ 7025	7 ~ 215 [14]	4	MCS 0-13
5925 ~ 7125	be (EHT160)	6025 ~ 6985	15 ~ 207 [7]	4	MCS 0-13
5925 ~ 7125	be (EHT320)	6105 ~ 6905	31 ~ 191 [6]	4	MCS 0-13

Note: OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM and 4096QAM modulation.

1.1.2 Antenna Details

Brand	Model	Type	Connector	Operating Frequencies (MHz) / Gain (dBi)			
				5925~6425	6425~6525	6525~6875	6875~7125
PSA	56-001-000855Z	TUBE	IPEX	3.23	3.97	4.15	3.53
PSA	56-001-000856Z	TUBE	IPEX	4.67	3.77	5.33	5.98
PSA	56-001-000857Z	TUBE	IPEX	4.08	5.89	5.21	3.96
PSA	56-001-000858Z	TUBE	IPEX	3.98	4.66	4.88	5.04

1.1.3 Configuration of Equipment under Test (EUT)

Power Supply Type	12Vdc from adapter		
Beamforming	☒ Support	☐ Not support	
RU Configuration	☒ Full RU	☐ Partial RU	
Channel Puncturing	☐ Support	☒ Not support	

1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	AC adapter	Brand: Frecom Model: F42L1-120350SPAU I/P: 100-240Vac, 50/60Hz 1.4A O/P: 12.0Vdc, 3.5A Power Line: 1.5m non-shielded without core
2	RJ45 cable	1m non-shielded without core

1.1.5 Channel List

ax HE20 / be EHT20							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5955	61	6255	121	6555	181	6855
5	5975	65	6275	125	6575	185	6875
9	5995	69	6295	129	6595	189	6895
13	6015	73	6315	133	6615	193	6915
17	6035	77	6335	137	6635	197	6935
21	6055	81	6355	141	6655	201	6955
25	6075	85	6375	145	6675	205	6975
29	6095	89	6395	149	6695	209	6995
33	6115	93	6415	153	6715	213	7015
37	6135	97	6435	157	6735	217	7035
41	6155	101	6455	161	6755	221	7055
45	6175	105	6475	165	6775	225	7075
49	6195	109	6495	169	6795	229	7095
53	6215	113	6515	173	6815	233	7115
57	6235	117	6535	177	6835	---	---

ax HE40 / be EHT40							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	5965	67	6285	131	6605	195	6925
11	6005	75	6325	139	6645	203	6965
19	6045	83	6365	147	6685	211	7005
27	6085	91	6405	155	6725	219	7045
35	6125	99	6445	163	6765	227	7085
43	6165	107	6485	171	6805	---	---
51	6205	115	6525	179	6845	---	---
59	6245	123	6565	187	6885	---	---


ax HE80 / be EHT80							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
7	5985	71	6305	135	6625	199	6945
23	6065	87	6385	151	6705	215	7025
39	6145	103	6465	167	6785	---	---
55	6225	119	6545	183	6865	---	---


ax HE160 / be EHT160							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
15	6025	79	6345	143	6665	207	6985
47	6185	111	6505	175	6825	---	---

be EHT320							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	---	---
31	6105	95	6425	159	6745	---	---
63	6265	127	6585	191	6905	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	QSPR x86, Version: 6.00.00267.3		
Duty Cycle and Duty Factor	Mode	Duty Cycle (%)	Duty Factor (dB)
	be EHT20	98.43%	0.07
	be EHT40	97.17%	0.12
	be EHT80	97.70%	0.10
	be EHT160	97.83%	0.10
	be EHT320	98.36%	0.07

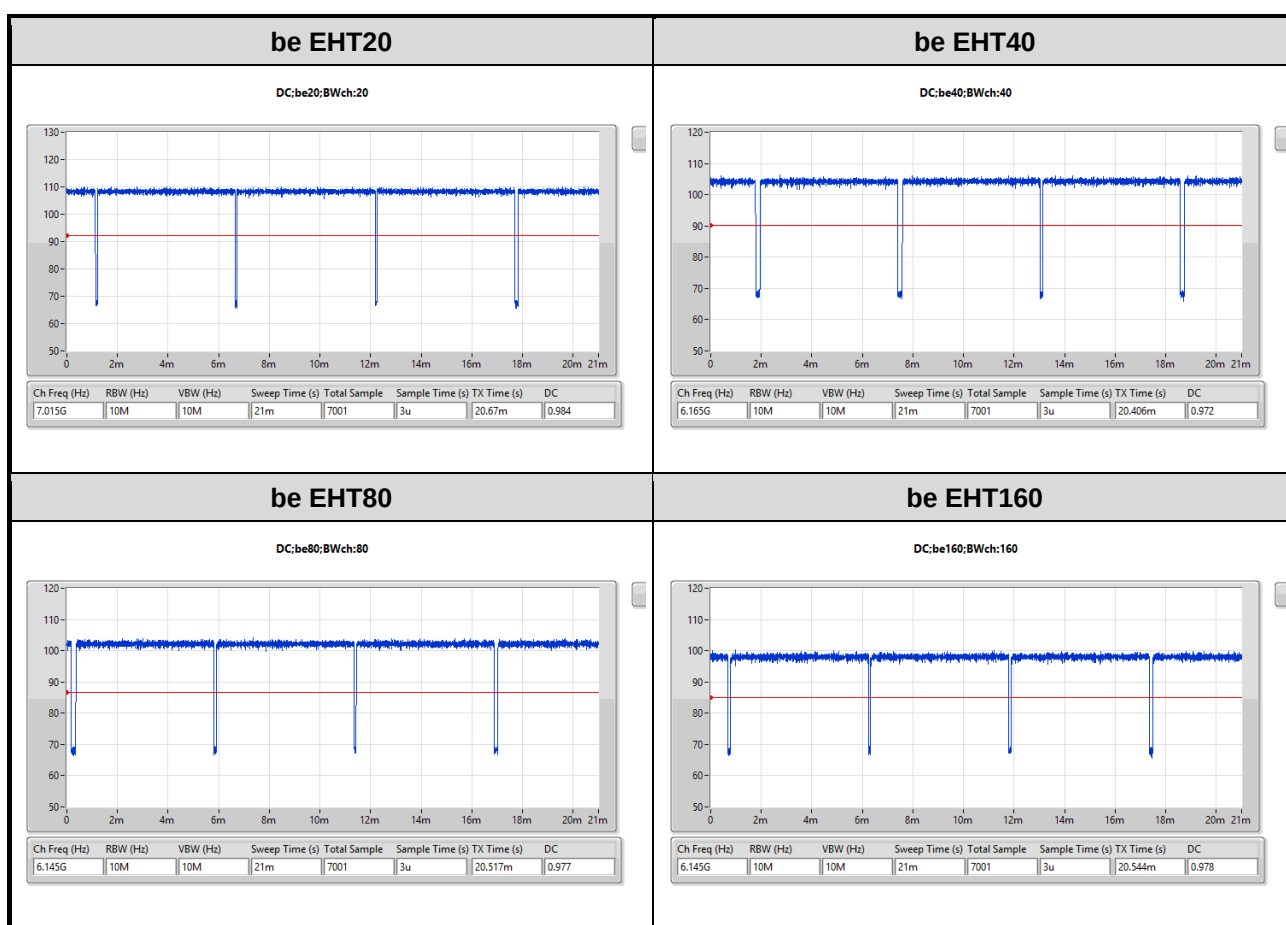

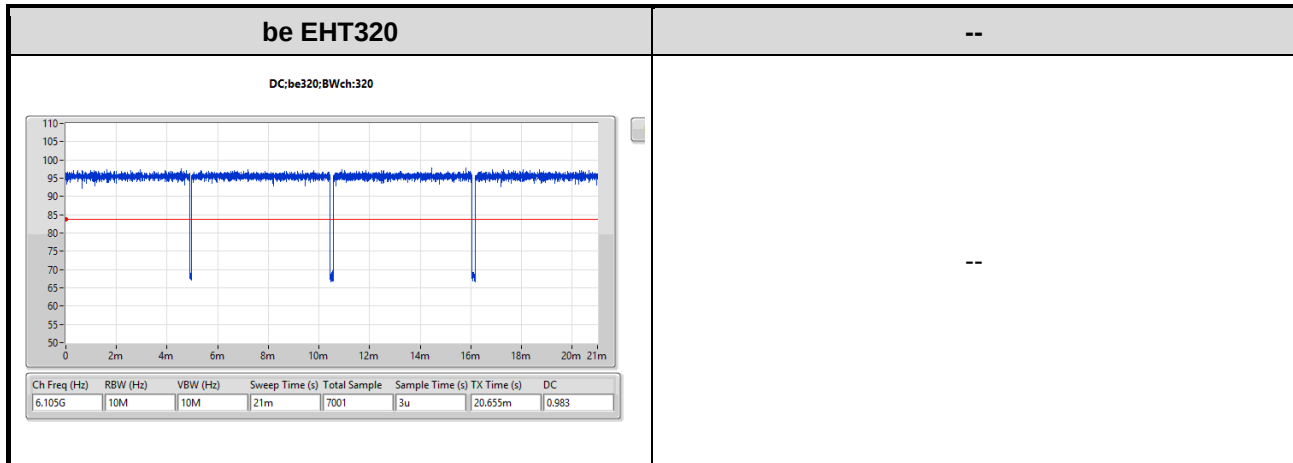

1.1.7 Power Index of Test Tool


Modulation Mode	Test Frequency (MHz)	Power Index
be EHT20	5955	5.5
be EHT20	6175	5.5
be EHT20	6415	6
be EHT20	6435	6
be EHT20	6475	6
be EHT20	6515	5.5
be EHT20	6535	6
be EHT20	6715	5
be EHT20	6855	5
be EHT20	6875	5
be EHT20	6895	5
be EHT20	7015	5.5
be EHT20	7095	5
be EHT20	7115	-1.5
be EHT40	5965	8.5
be EHT40	6165	8.5
be EHT40	6405	8.5
be EHT40	6445	8.5
be EHT40	6485	8.5
be EHT40	6525	8.5
be EHT40	6565	7.5
be EHT40	6725	7.5
be EHT40	6845	7
be EHT40	6885	7.5

be EHT40	6925	7.5
be EHT40	7005	7.5
be EHT40	7085	7.5
be EHT80	5985	10.5
be EHT80	6145	11
be EHT80	6385	11.5
be EHT80	6465	12
be EHT80	6545	11.5
be EHT80	6625	11
be EHT80	6705	11
be EHT80	6785	11
be EHT80	6865	11
be EHT80	6945	11
be EHT80	7025	11
be EHT160	6025	13.5
be EHT160	6185	13.5
be EHT160	6345	13
be EHT160	6505	14
be EHT160	6665	13.5
be EHT160	6825	13
be EHT160	6985	13.5
be EHT320	6105	16.5
be EHT320	6265	16
be EHT320	6425	17
be EHT320	6585	17
be EHT320	6745	16
be EHT320	6905	14

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Laptop	DELL	Latitude 3440	DoC	---
2	Laptop	DELL	Latitude E5470	DoC	---
3	USB Flash	Kingston(USB 3.2)	DTKN128GB	---	---
4	RJ45 Load	ICC	---	---	---

1.3 Test Setup Chart

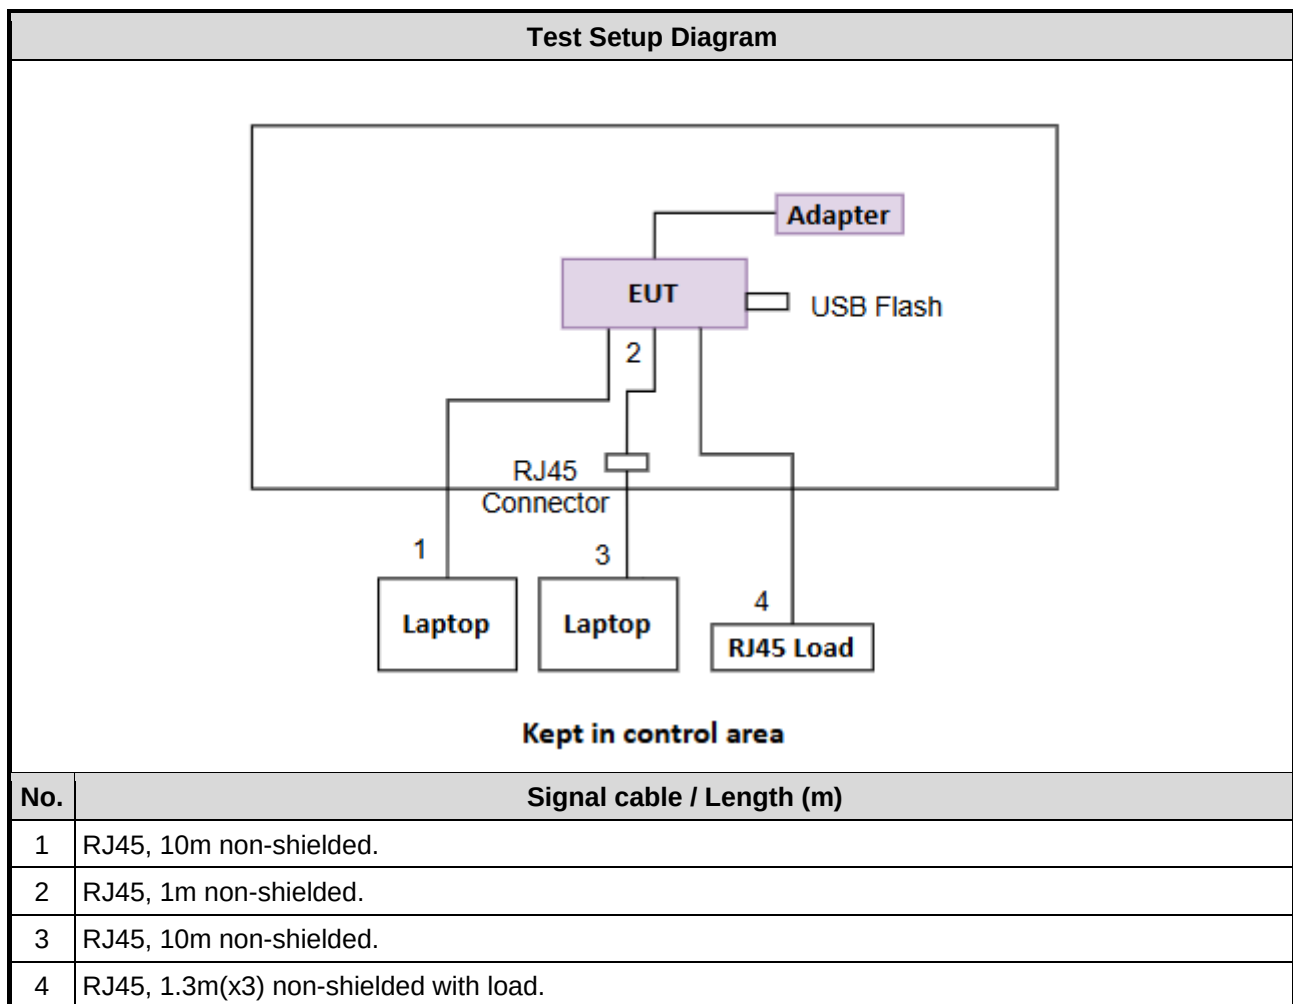

1.4 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber3 / (03CH03-WS)				
Tested Date	Aug. 13 ~ Aug. 18, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Apr. 02, 2026	Apr. 01, 2027
Spectrum Analyzer	R&S	FSV40	101499	Apr. 13, 2026	Apr. 12, 2027
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 17, 2025	Nov. 16, 2026
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Jul. 17, 2026	Jul. 16, 2027
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Jan. 23, 2026	Jan. 22, 2027
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 28, 2025	Nov. 27, 2026
Preamplifier	EMC	EMC02325	980187	Jun. 26, 2026	Jun. 25, 2027
Preamplifier	EMC	EMC118A45SE	980897	Aug. 06, 2026	Aug. 05, 2027
Preamplifier	EMC	EMC184045SE	980903	Aug. 06, 2026	Aug. 05, 2027
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 01, 2025	Sep. 30, 2026
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Sep. 19, 2025	Sep. 18, 2026
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Sep. 19, 2025	Sep. 18, 2026
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Sep. 19, 2025	Sep. 18, 2026
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 19, 2025	Sep. 18, 2026
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Sep. 19, 2025	Sep. 18, 2026
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Sep. 19, 2025	Sep. 18, 2026
Attenuator	Pasternack	PE7005-10	10-3	Sep. 19, 2025	Sep. 18, 2026
HIGHPASS FILTER 7.5-18G	STI	STI15-9722	STI-HP7.5G-B	Sep. 19, 2025	Sep. 18, 2026
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Aug. 14 ~ Aug. 22, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV3044	101516	Jun. 06, 2026	Jun. 05, 2027
Power Meter	Anritsu	ML2495A	1241002	Nov. 21, 2025	Nov. 20, 2026
Power Sensor	Anritsu	MA2411B	1207366	Nov. 21, 2025	Nov. 20, 2026
Attenuator	Pasternack	PE7005-10	10-2	Oct. 03, 2025	Oct. 02, 2026
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Jun. 25, 2026	Jun. 24, 2027
AC POWER SOURCE	APC	AFC-500W	F312060012	Jan. 08, 2026	Jan. 07, 2027
Measurement Software	Sporton	SENSE-15407_NII	V5.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Aug. 21, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101659	Apr. 29, 2026	Apr. 28, 2027
LISN	R&S	ENV216	101579	May. 18, 2026	May. 17, 2027
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Apr. 12, 2026	Apr. 11, 2027
RF Cable-CON	EMC	EMCCFD300-BM-B M-6000	50821	Oct. 07, 2025	Oct. 06, 2026
50 ohm terminal	NA	50	03	Jun. 23, 2026	Jun. 22, 2027
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Contention Based Protocol				
Test Site	(TH01-WS)				
Tested Date	Sep. 14 ~ Sep. 15, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV3044	101747	Apr. 04, 2026	Apr. 03, 2027
AWGN Signal Generator	R&S	SMW200A	109619	Aug. 11, 2026	Aug. 10, 2027
Combiner(1X2)	woken	0120A02201801O	DOM2AEW1A23	Oct. 11, 2025	Oct. 10, 2026
Directional Coupler	Marvelous Microwave	MVE4514-20	20	Oct. 09, 2025	Oct. 08, 2026
RF CABLE	EMC	EMC105SFF-SM-S M-2000	210816	Oct. 09, 2025	Oct. 08, 2026
RF CABLE	woken	woken-S05	S/N:S05-141231-102	Oct. 09, 2025	Oct. 08, 2026
RF CABLE	woken	woken-S05	S/N:S05-141231-105	Oct. 09, 2025	Oct. 08, 2026
RF CABLE	woken	woken-S05	S/N:S05-141231-106	Oct. 09, 2025	Oct. 08, 2026
Attenuator	woken	PE7013-10	10-1	Oct. 11, 2025	Oct. 10, 2026
Attenuator	woken	PE7013-20	20-1	Oct. 11, 2025	Oct. 10, 2026
Measurement Software	NA	NA	NA	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.407

ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024

ANSI C63.4-2014 + C63.4a-2017

1.6 Reference Guidance

FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03

FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
Conducted power	± 0.808 dB
Frequency error	$\pm 1 \times 10^{-9}$
Power density	± 0.583 dB
Conducted emission	± 2.715 dB
AC conducted emission	± 2.92 dB
Unwanted Emission ≤ 1 GHz	± 3.96 dB
Unwanted Emission > 1 GHz	± 4.51 dB
Time	$\pm 0.1\%$
Temperature	± 0.4 °C

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)
Test Site	03CH03-WS
Address of Test Site	No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISED#: 10807C
- CAB identifier: TW2732

2.2 Test Worst Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions	be EHT320	6585	MCS 0	---
Unwanted Emissions ≤1GHz	be EHT320	6585	MCS 0	---
Unwanted Emissions >1GHz RF Output Power Emission Bandwidth Power Spectral Density In-Band Emissions	be EHT20	5955 / 6175 / 6415 / 6435 / 6475 / 6515 / 6535 / 6715 / 6855 / 6875 / 6895 / 7015 / 7095 / 7115	MCS 0	---
	be EHT40	5965 / 6165 / 6405 / 6445 / 6485 / 6525 / 6565 / 6725 / 6845 / 6885 / 6925 / 7005 / 7085	MCS 0	
	be EHT80	5985 / 6145 / 6385 / 6465 / 6545 / 6625 / 6705 / 6785 / 6865 / 6945 / 7025	MCS 0	
	be EHT160	6025 / 6185 / 6345 / 6505 / 6665 / 6825 / 6985	MCS 0	
	be EHT320	6105 / 6265 / 6425 / 6585 / 6745 / 6905	MCS 0	
Contention Based Protocol	be EHT20	6195 / 6475 / 6695 / 6995	MCS 0	---
	be EHT320	6105 / 6425 / 6905	MCS 0	
Frequency Stability	Un-modulation	6475 / 7015	---	---
NOTE: 1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Z-plane results were found as the worst case and were shown in this report. 2. For non-beamforming and beamforming mode had been covered during the pretest. The worst mode was found at non-beamforming mode, thus the test results came out from this. Non-beamforming and beamforming power is same.				

3 Transmitter Test Results

3.1 Emission Bandwidth

3.1.1 Limit

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

3.1.2 Test Procedures


26dB Bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Occupied Bandwidth

1. Set RBW = 1 % to 5 % of the OBW.
2. Set VBW $\geq$ 3 RBW.
3. Sample detection and single sweep mode shall be used.
4. Use the 99 % power bandwidth function of the instrument.

3.1.3 Test Setup



3.1.4 Test Result

Ambient Condition	22-25°C / 61-66%	Tested By	Roger Lu
-------------------	------------------	-----------	----------

Refer to Appendix A.

3.2 RF Output Power

3.2.1 Limit

Frequency Band	Operating Mode	Maximum EIRP Limit
5925 ~ 7125 MHz	☒ Indoor access point	30 dBm
	☐ Subordinate device	30 dBm
	☐ Client devices	24 dBm

3.2.2 Test Procedures


Method PM-G (Measurement using a gated RF average power meter)

1. Measurements is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
2. $EIRP = \text{Measured conducted power} + \text{Antenna gain}$

Spectrum analyzer (For channel that extends across the 6.525 / 6.875 GHz boundary)

1. Set RBW = 1MHz, VBW = 3MHz, Sweep time = Auto, Detector = RMS.
2. Trace average at least 100 traces in power averaging mode.
3. Compute power by integrating the spectrum across the 26 dB EBW.
4. Add $10 \log(1/X, X:\text{duty cycle})$ if duty cycle is <98%.
5. $EIRP = \text{Measured conducted power} + \text{Antenna gain}$

3.2.3 Test Setup

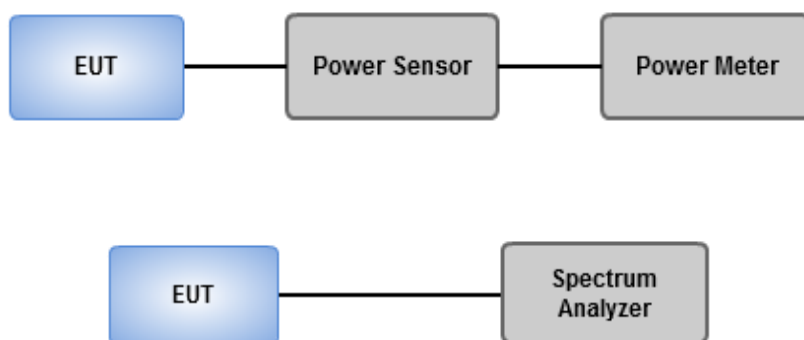

3.2.4 Test Result

Ambient Condition	22-25°C / 61-66%	Tested By	Roger Lu
-------------------	------------------	-----------	----------

Refer to Appendix B.

3.3 Power Spectral Density

3.3.1 Limit

Frequency Band	Operating Mode	Limit
5925 ~ 7125 MHz	☒ Indoor access point	EIRP: 5 dBm / 1 MHz
	☐ Subordinate device	EIRP: 5 dBm / 1 MHz
	☐ Client devices	EIRP: -1 dBm / 1 MHz

3.3.2 Test Procedures


Duty cycle $\geq$ 98 %

1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.
4. EIRP PSD = Measured conducted power density + Antenna gain

Duty cycle < 98 %

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
2. Set sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (total on/off period of the transmitted signal).
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log(1/x)$, where x is the duty cycle.
6. EIRP PSD = Measured conducted power density + Antenna gain

3.3.3 Test Setup



3.3.4 Test Result

Ambient Condition	22-25°C / 61-66%	Tested By	Roger Lu
-------------------	------------------	-----------	----------

Refer to Appendix C.

3.4 Unwanted Emissions

3.4.1 Limit of Unwanted Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit		
Operating Band	PK Limit	AV Limit
5.925 – 7.125 GHz	e.i.r.p. -7 dBm [88.2 dBuV/m@3m]	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.4.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.4.3 Test Setup

Radiated Emissions below 1 GHz

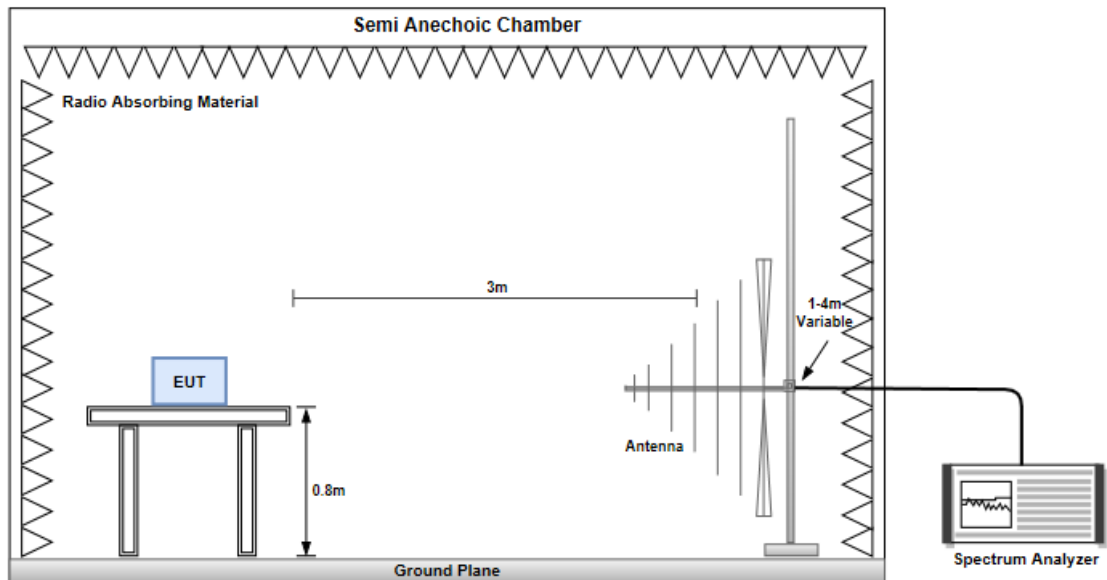

Radiated Emissions above 1 GHz

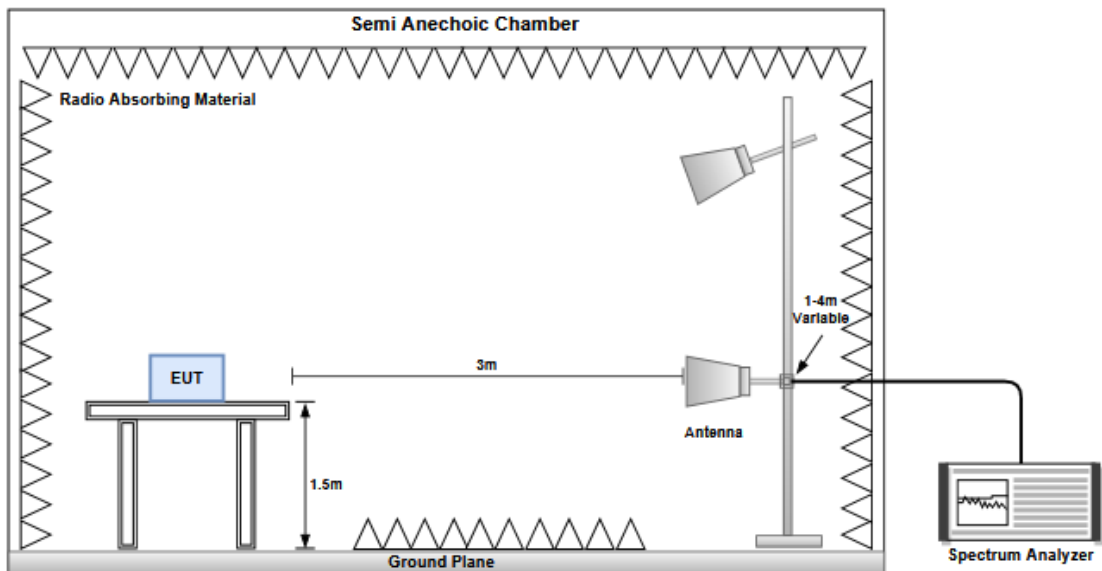


3.4.4 Test Results

Refer to Appendix D.

3.5 In-Band Emissions

3.5.1 Limit


Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

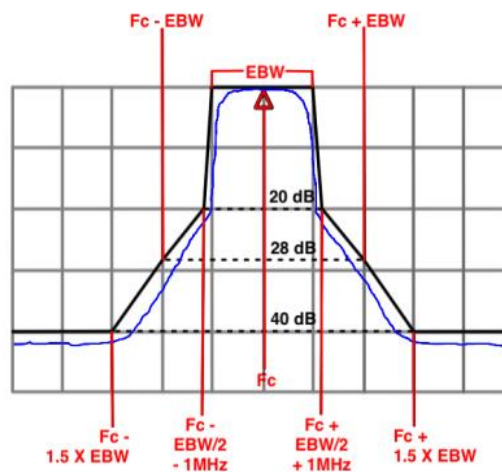

3.5.2 Test Procedures

1. Connect output of the antenna port to a spectrum analyzer
2. Set the reference level of the measuring equipment
3. Measure the 26 dB EBW
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW
6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask

3.5.3 Test Setup



3.5.4 Test Results

Ambient Condition	22-25°C / 61-66%	Tested By	Roger Lu
--------------------------	------------------	------------------	----------

Refer to Appendix E.

3.6 Frequency Stability


3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.6.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 20 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under normal and extreme condition for temperature and voltage.

3.6.3 Test Setup

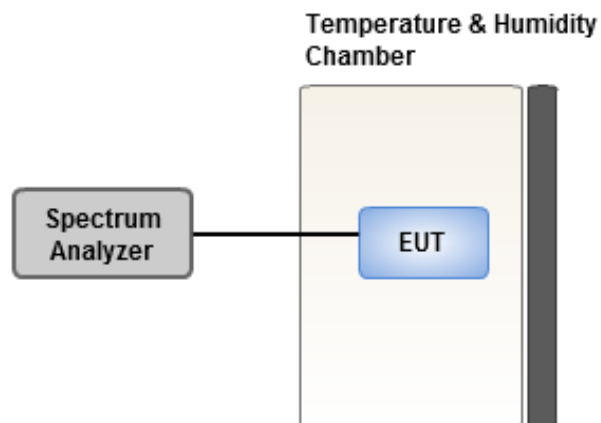

3.6.4 Test Result of Frequency Stability

Ambient Condition	22-25°C / 61-66%	Tested By	Roger Lu
-------------------	------------------	-----------	----------

Refer to Appendix F.

3.7 Contention Based Protocol


3.7.1 Limit

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty

3.7.2 Test Procedure

1. Configure the EUT to transmit with a constant duty cycle
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer, as shown in Figure. Ensure that the attenuator 1 provides enough attenuation to not overload the signal analyzer receiver.
4. Monitoring the signal analyzer, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 of KDB 987594 D02 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a splitter, to the signal analyzer and the EUT as shown in Figure.
7. Transmit the AWGN signal (RF ON) at the EUT's antenna port and verify its characteristics and signal power level on the signal analyzer.
8. Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

3.7.3 Test Setup

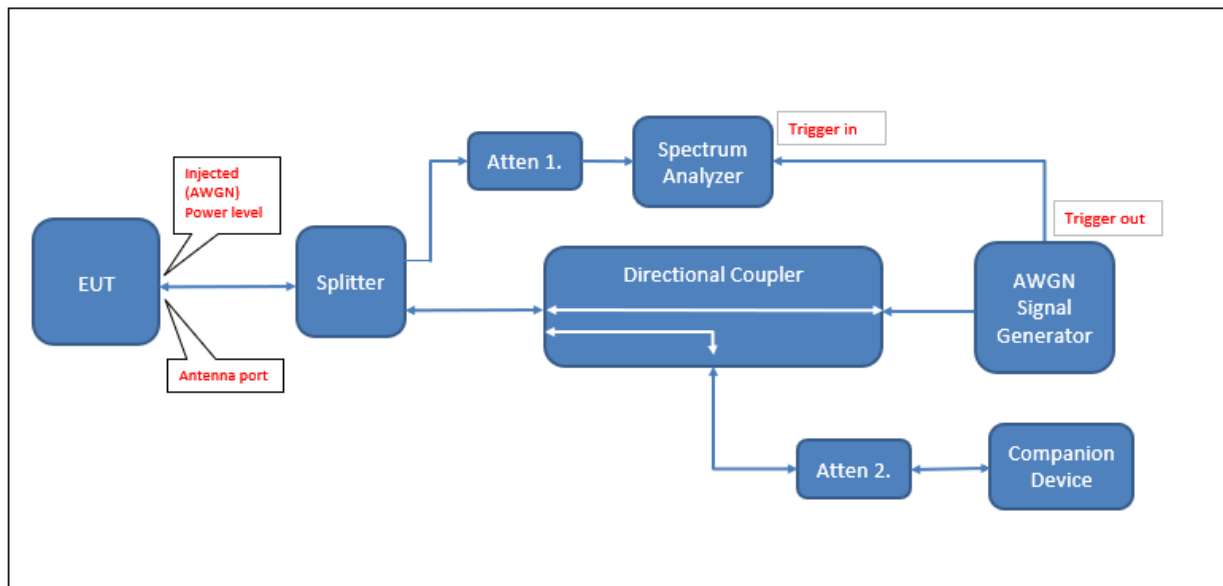

3.7.4 Test Result

Ambient Condition	24°C / 67%	Tested By	Jack Li
EUT FW version	V6.83(ACSS.0)b3		

Refer to Appendix G.

3.8 AC Power Line Conducted Emissions

3.8.1 Limit of AC Power Line Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.8.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.8.3 Test Setup

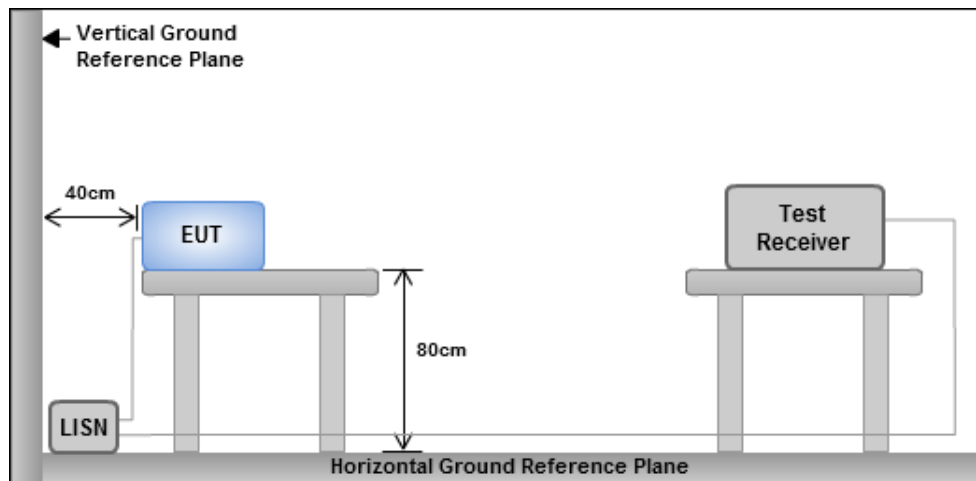

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.8.4 Test Result

Refer to Appendix H.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <https://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Zhonghe

Tel: 886-2-2222-0288

1F, No. 6, Jiankang Road, Zhonghe
District, New Taipei City 235045,
Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw

==END==

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	24.64M	19.198M	19M2D1D	23.1M	19.147M
802.11be EHT40_Nss1,(MCS0)_4TX	46.09M	38.701M	38M7D1D	44.88M	38.525M
802.11be EHT80_Nss1,(MCS0)_4TX	91.08M	78.022M	78M0D1D	88.22M	77.693M
802.11be EHT160_Nss1,(MCS0)_4TX	177.76M	158.269M	158MD1D	173.36M	156.974M
802.11be EHT320_Nss1,(MCS0)_4TX	344.96M	317.012M	317MD1D	338.8M	315.105M
6.425-6.525GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	24.75M	19.195M	19M2D1D	22.99M	19.145M
802.11be EHT40_Nss1,(MCS0)_4TX	46.31M	38.61M	38M6D1D	44.99M	38.492M
802.11be EHT80_Nss1,(MCS0)_4TX	91.3M	78.022M	78M0D1D	89.54M	77.891M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	24.31M	19.235M	19M2D1D	23.21M	19.137M
802.11be EHT40_Nss1,(MCS0)_4TX	46.42M	38.684M	38M7D1D	44.99M	38.498M
802.11be EHT80_Nss1,(MCS0)_4TX	92.62M	78.015M	78M0D1D	88.22M	77.76M
802.11be EHT160_Nss1,(MCS0)_4TX	177.76M	158.249M	158MD1D	174.24M	157.71M
802.11be EHT320_Nss1,(MCS0)_4TX	344.08M	317.35M	317MD1D	340.56M	316.055M
6.875-7.125GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	24.695M	19.234M	19M2D1D	22.715M	19.147M
802.11be EHT40_Nss1,(MCS0)_4TX	45.87M	38.653M	38M7D1D	44.99M	38.498M
802.11be EHT80_Nss1,(MCS0)_4TX	92.4M	77.998M	78M0D1D	88.66M	77.789M
802.11be EHT160_Nss1,(MCS0)_4TX	178.2M	158.14M	158MD1D	172.92M	157.736M

Max-N dB = Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	Inf	23.1M	19.195M	23.21M	19.172M	23.925M	19.171M	23.76M	19.19M
6175MHz	Pass	Inf	23.155M	19.188M	23.54M	19.194M	23.76M	19.186M	24.64M	19.198M
6415MHz	Pass	Inf	23.32M	19.175M	23.265M	19.147M	23.76M	19.182M	23.65M	19.166M
6435MHz	Pass	Inf	23.43M	19.195M	23.43M	19.145M	23.705M	19.173M	24.75M	19.146M
6475MHz	Pass	Inf	22.99M	19.156M	23.375M	19.152M	23.925M	19.149M	23.54M	19.151M
6515MHz	Pass	Inf	23.705M	19.193M	23.32M	19.156M	23.76M	19.171M	24.035M	19.177M
6535MHz	Pass	Inf	23.485M	19.174M	23.375M	19.137M	23.87M	19.186M	23.925M	19.161M
6715MHz	Pass	Inf	23.43M	19.155M	23.43M	19.235M	23.98M	19.159M	23.65M	19.197M
6855MHz	Pass	Inf	23.21M	19.19M	23.32M	19.196M	24.035M	19.178M	23.815M	19.178M
6875MHz Straddle 6.525-6.875GHz	Pass	Inf	23.32M	19.229M	23.485M	19.191M	24.31M	19.159M	23.87M	19.198M
6895MHz	Pass	Inf	22.715M	19.2M	23.595M	19.176M	23.485M	19.16M	24.695M	19.234M
7015MHz	Pass	Inf	22.99M	19.147M	23.54M	19.164M	23.815M	19.174M	23.43M	19.165M
7095MHz	Pass	Inf	23.32M	19.157M	23.65M	19.155M	23.925M	19.202M	23.815M	19.177M
7115MHz	Pass	Inf	23.265M	19.202M	23.21M	19.209M	23.65M	19.21M	23.76M	19.191M
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	Inf	45.32M	38.605M	45.87M	38.615M	45.87M	38.633M	45.87M	38.562M
6165MHz	Pass	Inf	46.09M	38.701M	45.54M	38.645M	45.43M	38.614M	45.43M	38.595M
6405MHz	Pass	Inf	45.87M	38.639M	45.98M	38.546M	45.1M	38.558M	44.88M	38.525M
6445MHz	Pass	Inf	45.98M	38.558M	45.54M	38.538M	46.31M	38.592M	45.43M	38.492M
6485MHz	Pass	Inf	44.99M	38.533M	45.54M	38.61M	44.99M	38.571M	45.65M	38.569M
6525MHz Straddle 6.525-6.875GHz	Pass	Inf	46.42M	38.684M	45.65M	38.539M	45.76M	38.597M	45.76M	38.568M
6565MHz	Pass	Inf	46.2M	38.606M	46.09M	38.539M	44.99M	38.614M	45.21M	38.545M
6725MHz	Pass	Inf	45.76M	38.522M	45.1M	38.612M	45.1M	38.612M	45.54M	38.582M
6845MHz	Pass	Inf	46.09M	38.617M	45.1M	38.604M	46.31M	38.563M	45.54M	38.59M
6885MHz Straddle 6.525-6.875GHz	Pass	Inf	45.65M	38.579M	44.99M	38.523M	46.2M	38.498M	45.54M	38.547M
6925MHz	Pass	Inf	45.76M	38.511M	45.76M	38.539M	44.99M	38.586M	45.87M	38.498M
7005MHz	Pass	Inf	45.87M	38.614M	45.43M	38.61M	45.76M	38.653M	45.1M	38.558M
7085MHz	Pass	Inf	45.65M	38.635M	45.65M	38.618M	45.43M	38.577M	45.1M	38.607M
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	Inf	89.76M	77.71M	88.22M	77.789M	91.08M	77.723M	88.88M	77.693M
6145MHz	Pass	Inf	90.42M	77.96M	89.32M	77.937M	90.2M	77.958M	91.08M	77.82M
6385MHz	Pass	Inf	90.64M	77.913M	90.86M	77.924M	90.86M	78.022M	89.1M	77.995M
6465MHz	Pass	Inf	89.98M	77.95M	91.08M	77.99M	91.3M	78.022M	89.54M	77.891M
6545MHz Straddle 6.525-6.875GHz	Pass	Inf	90.42M	77.994M	89.1M	77.846M	90.86M	77.839M	91.96M	78.015M
6625MHz	Pass	Inf	90.2M	77.92M	92.18M	77.838M	92.62M	78.015M	90.64M	77.921M
6705MHz	Pass	Inf	90.2M	78.007M	88.22M	77.825M	89.98M	77.888M	90.64M	77.926M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
6785MHz	Pass	Inf	91.52M	77.839M	88.66M	77.8M	91.08M	77.935M	90.42M	77.947M
6865MHz Straddle 6.525-6.875GHz	Pass	Inf	90.64M	77.961M	91.3M	77.825M	90.86M	77.876M	90.86M	77.76M
6945MHz	Pass	Inf	89.98M	77.97M	88.66M	77.789M	92.4M	77.974M	90.2M	77.984M
7025MHz	Pass	Inf	89.98M	77.929M	90.42M	77.903M	90.42M	77.998M	89.98M	77.82M
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	Inf	175.12M	157.254M	174.68M	157.579M	173.36M	157.179M	173.8M	156.974M
6185MHz	Pass	Inf	177.76M	158.079M	173.8M	157.919M	175.12M	157.659M	174.68M	158.064M
6345MHz	Pass	Inf	177.76M	158.269M	176M	157.829M	173.36M	158.03M	173.8M	157.77M
6505MHz Straddle 6.525-6.875GHz	Pass	Inf	176.44M	157.922M	175.56M	157.935M	176.44M	157.8M	175.12M	157.88M
6665MHz	Pass	Inf	177.32M	158.249M	174.24M	157.71M	176.88M	157.899M	175.12M	157.781M
6825MHz Straddle 6.525-6.875GHz	Pass	Inf	177.76M	158.136M	177.32M	157.716M	176M	157.826M	176.44M	158.013M
6985MHz	Pass	Inf	178.2M	158.14M	174.24M	157.929M	174.68M	157.902M	172.92M	157.736M
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	320M	342.32M	315.726M	339.68M	315.805M	340.56M	315.105M	340.56M	315.78M
6265MHz	Pass	320M	342.32M	316.66M	338.8M	316.052M	342.32M	316.218M	339.68M	316.673M
6425MHz Straddle 5.925-6.425GHz	Fail	320M	344.96M	317.012M	341.44M	316.67M	343.2M	316.997M	343.2M	316.493M
6585MHz Straddle 6.525-6.875GHz	Pass	320M	342.32M	317.139M	341.44M	316.561M	343.2M	316.718M	343.2M	316.055M
6745MHz Straddle 6.525-6.875GHz	Pass	320M	342.32M	317.35M	340.56M	316.334M	340.56M	316.316M	342.32M	316.946M
6905MHz Straddle 6.525-6.875GHz	Pass	320M	344.08M	316.454M	340.56M	316.505M	341.44M	316.098M	343.2M	316.106M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band


Port X-OBW = Port X 99% occupied bandwidth



5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


5955MHz

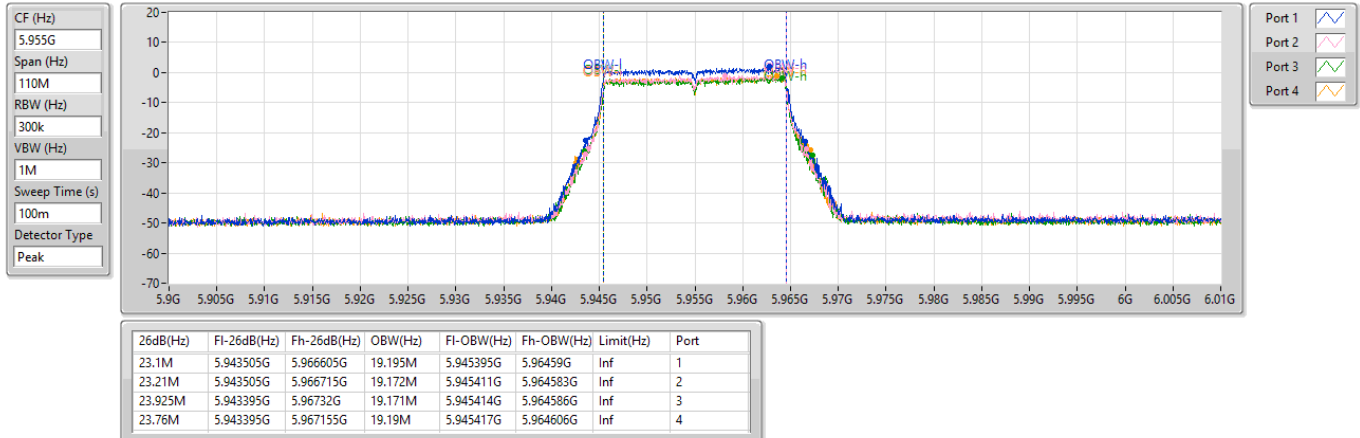

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6175MHz

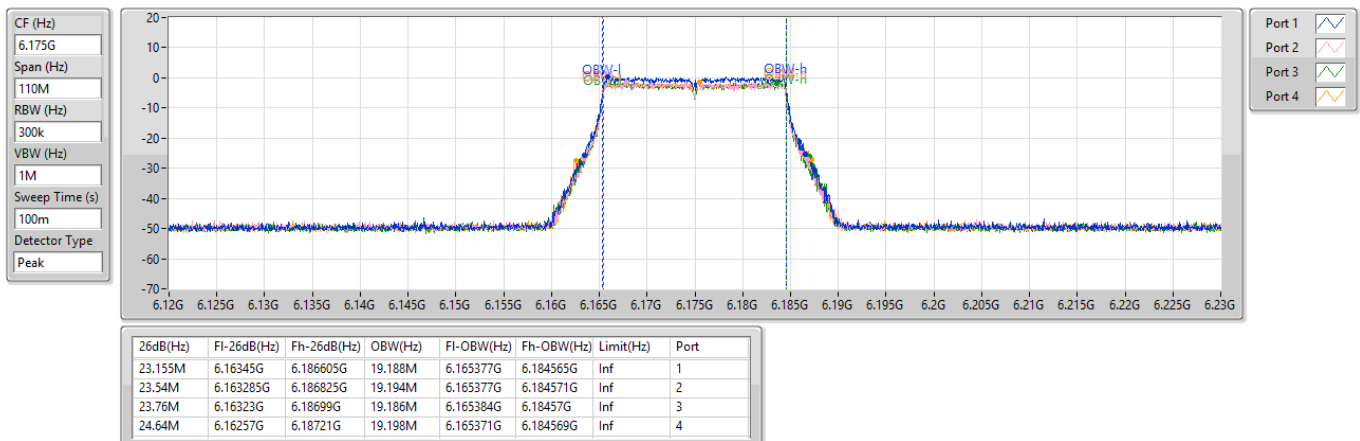




5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


6415MHz

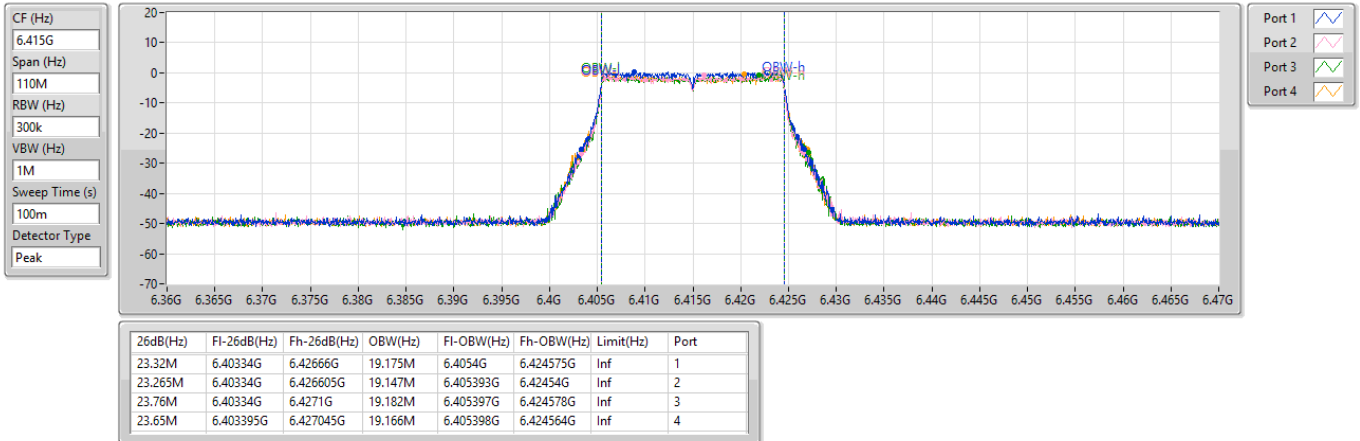

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6435MHz

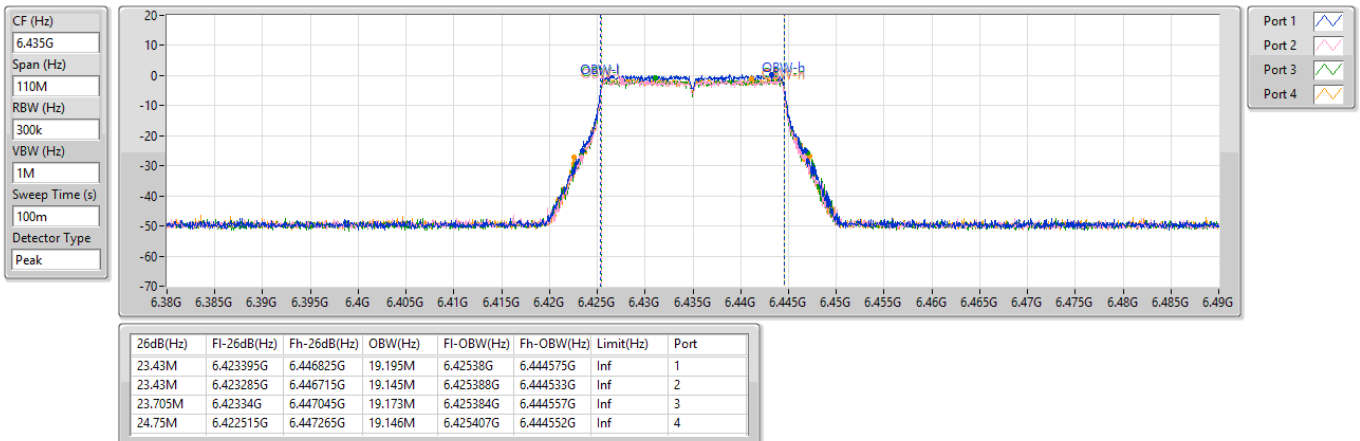




6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6475MHz

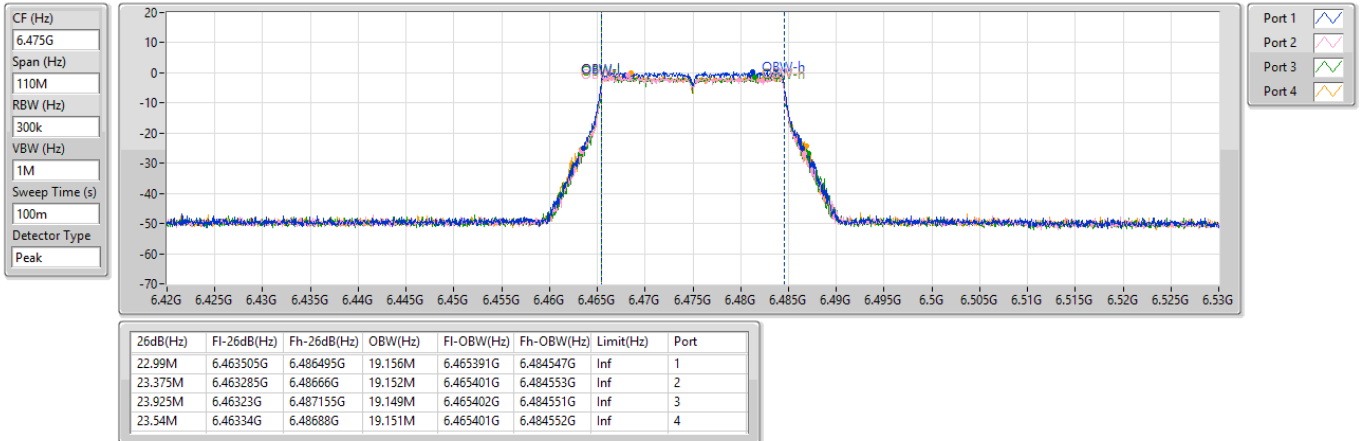

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6515MHz






6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


6535MHz

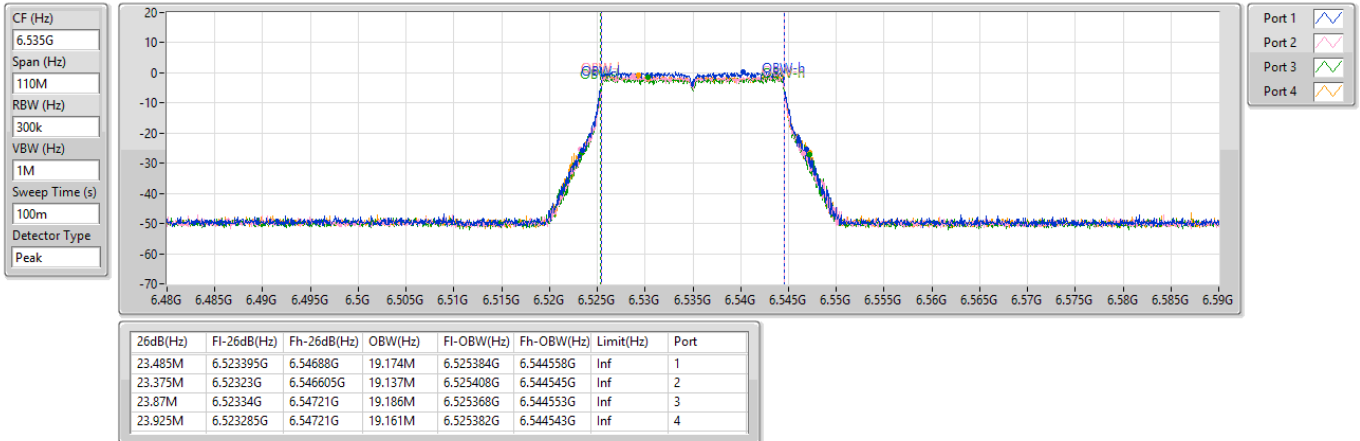

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6715MHz

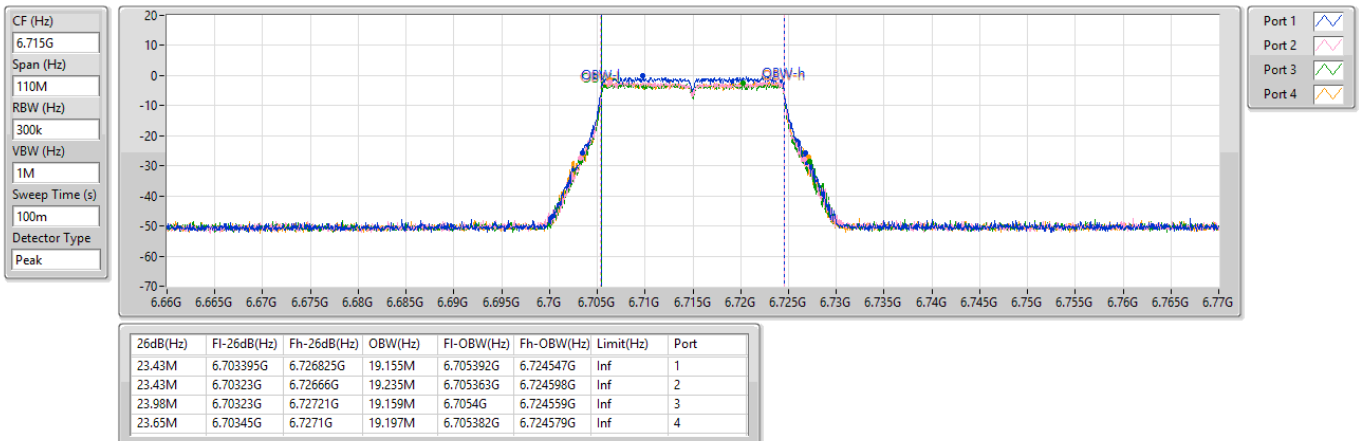




6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


6855MHz

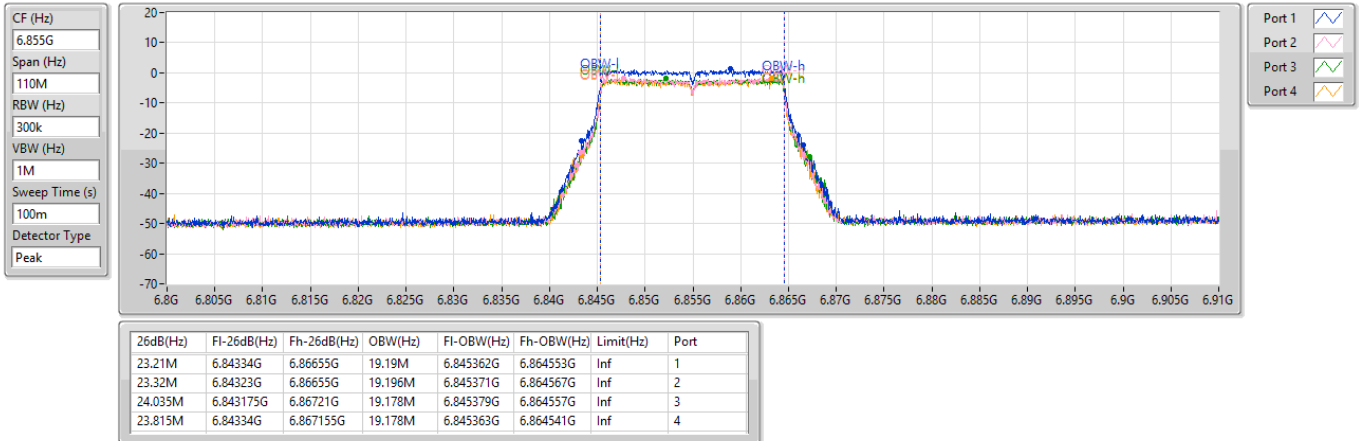

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6875MHz Straddle 6.525-6.875GHz

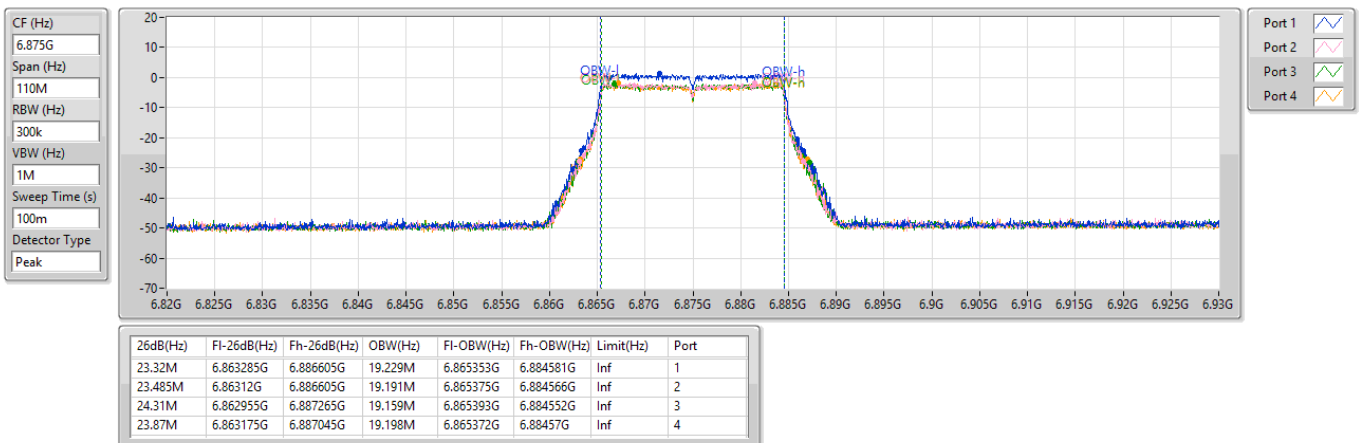




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


6895MHz

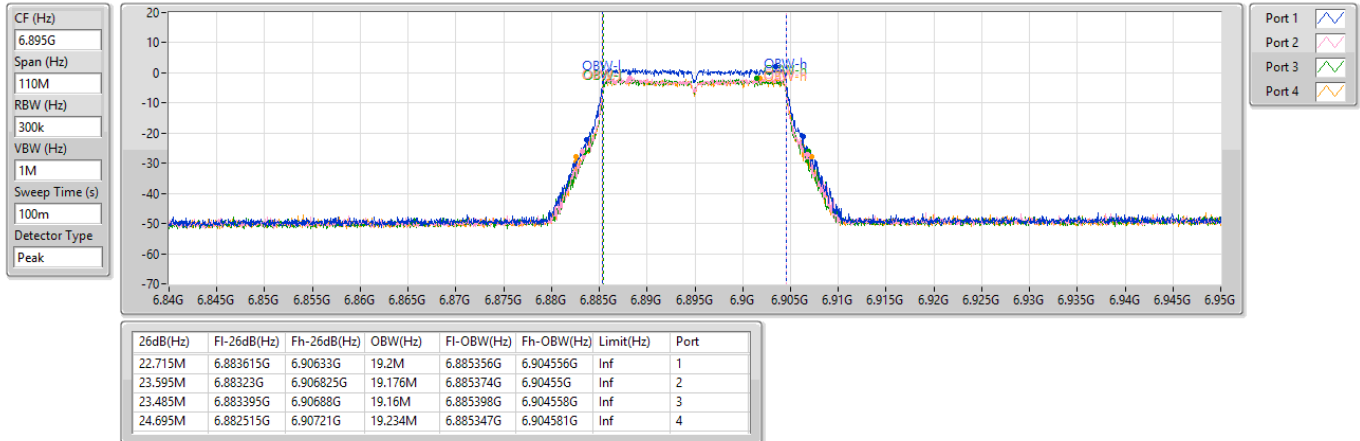

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

7015MHz

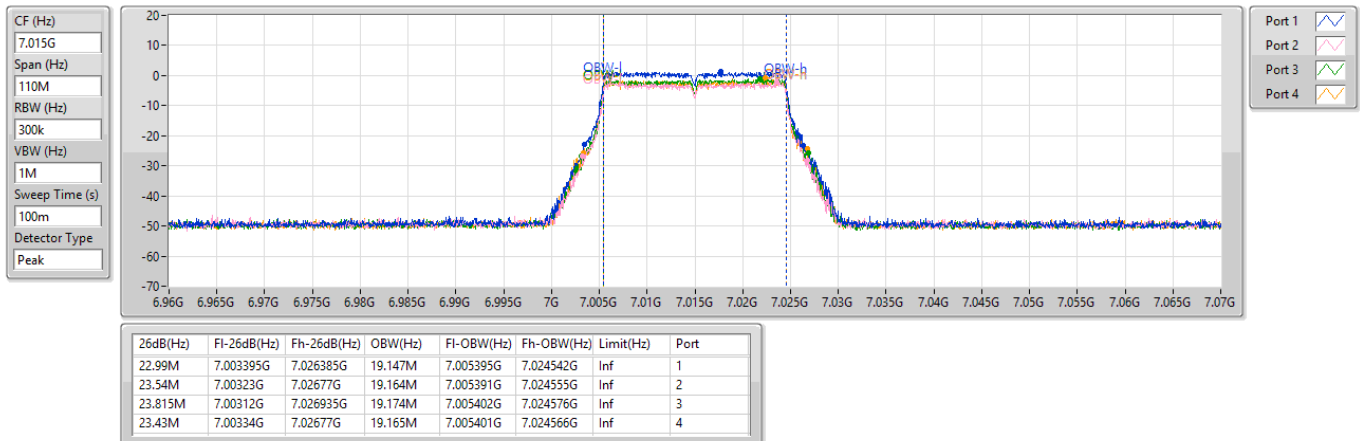




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


7095MHz

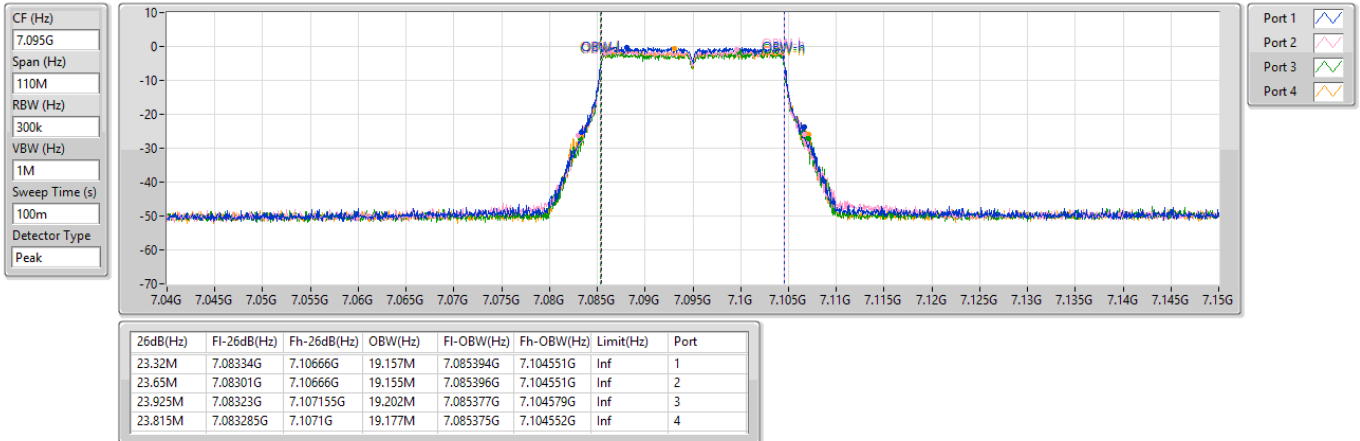

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

7115MHz

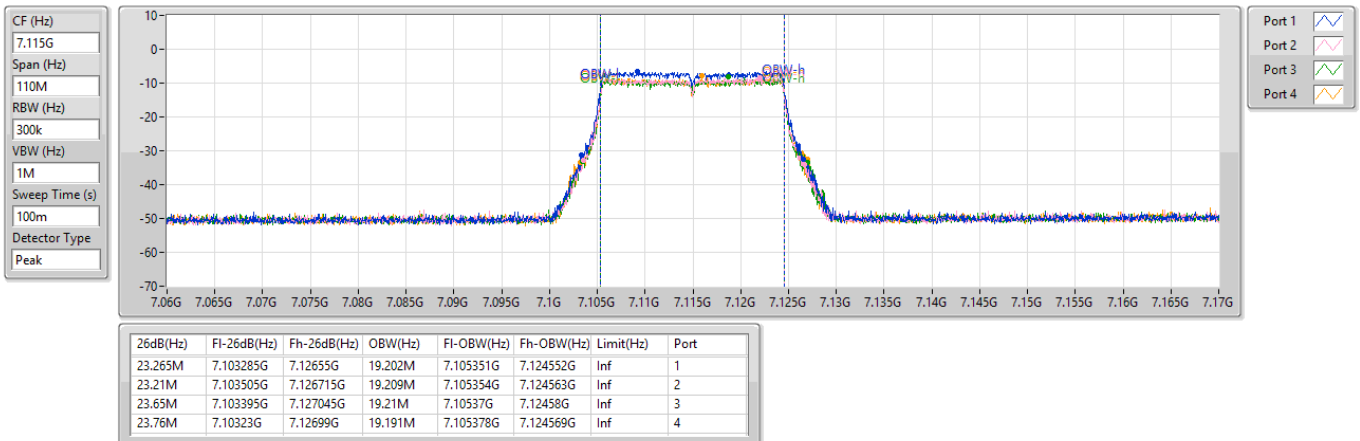




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


5965MHz

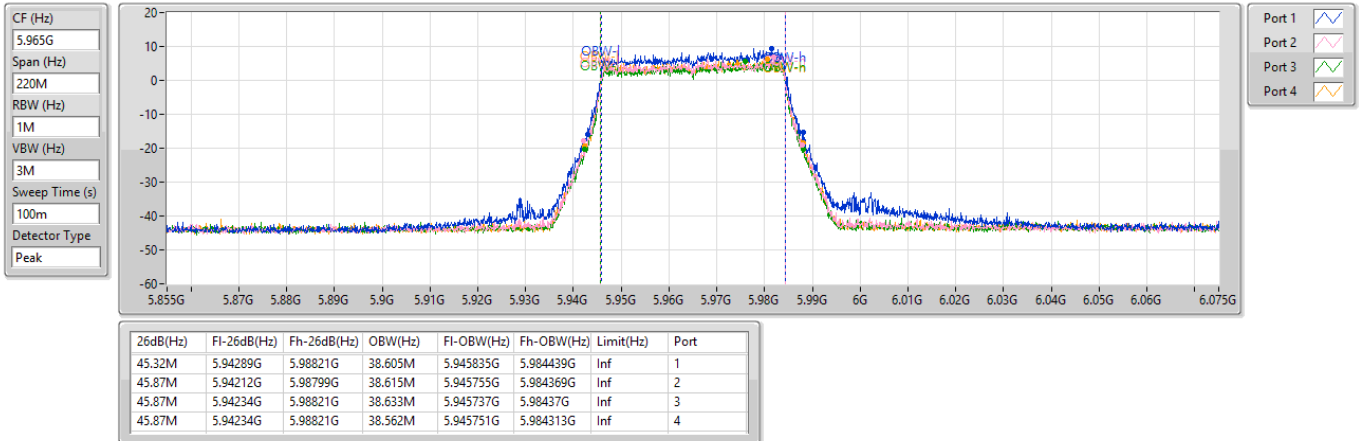

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6165MHz

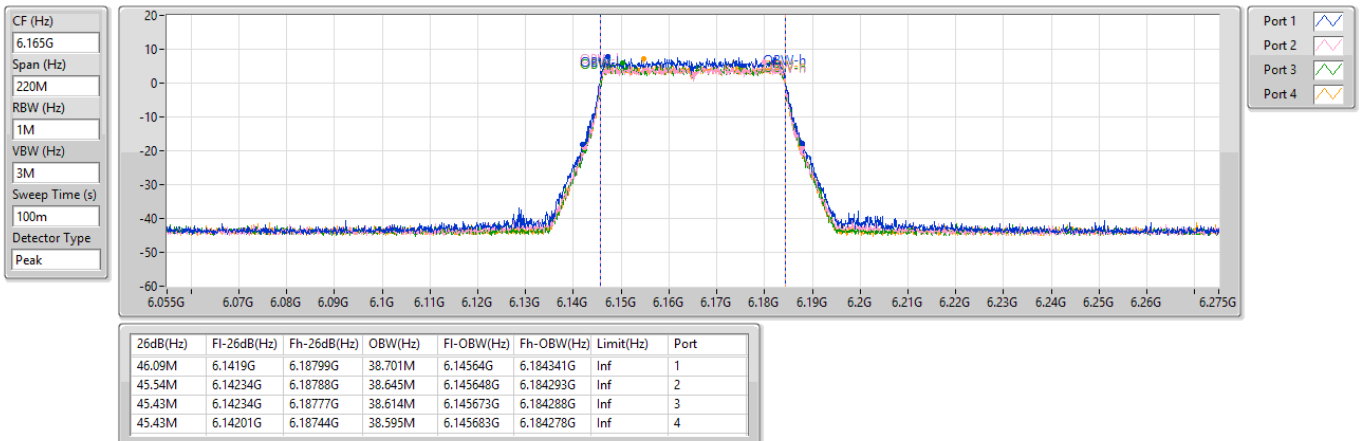




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


6405MHz

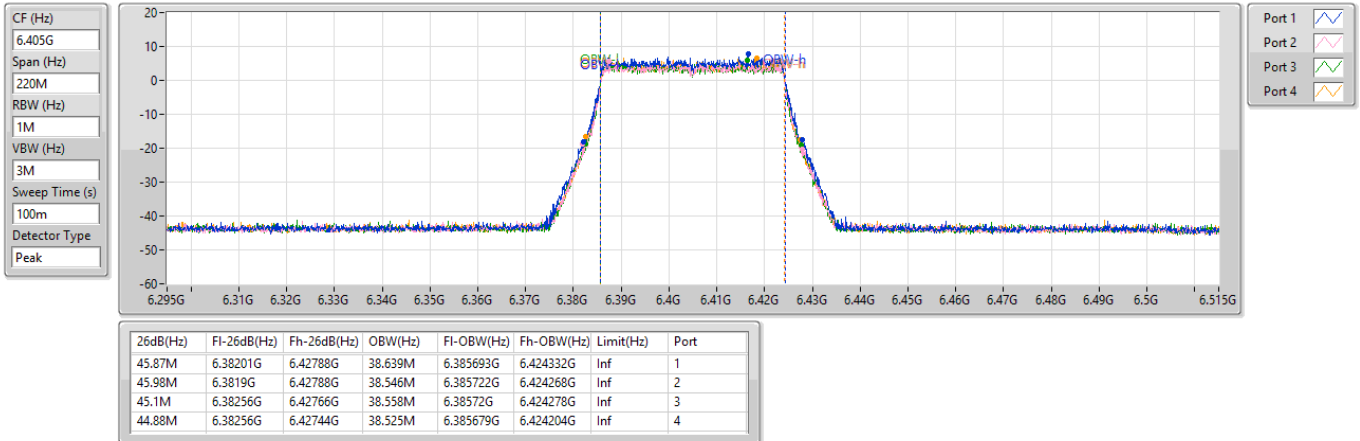

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6445MHz

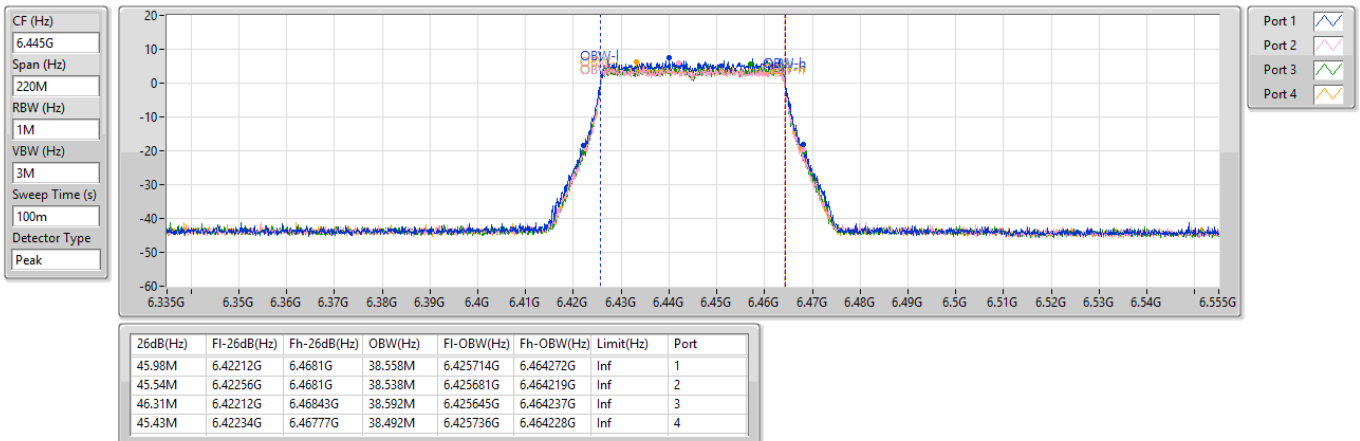




6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


6485MHz

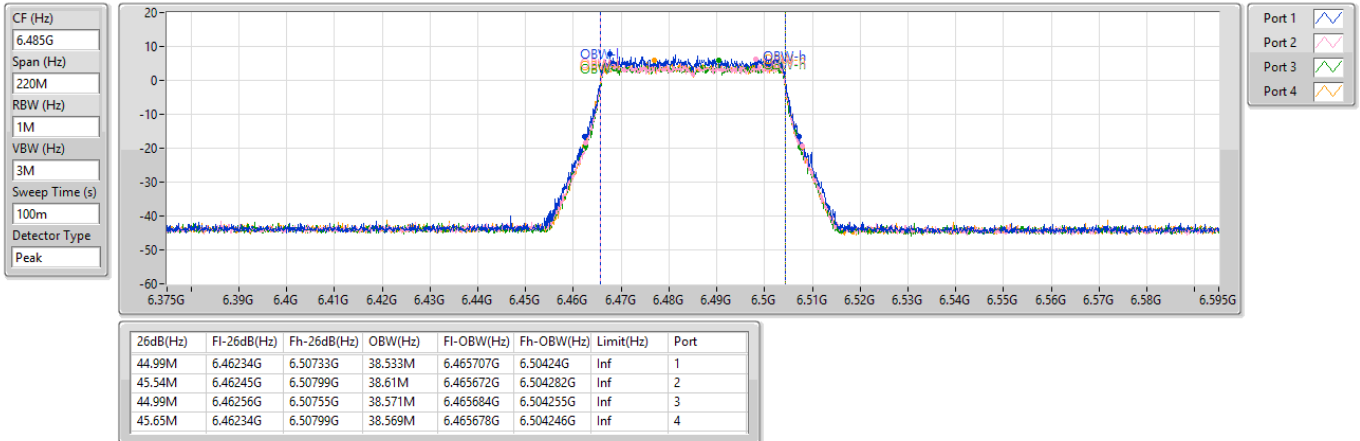

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6525MHz Straddle 6.525-6.875GHz

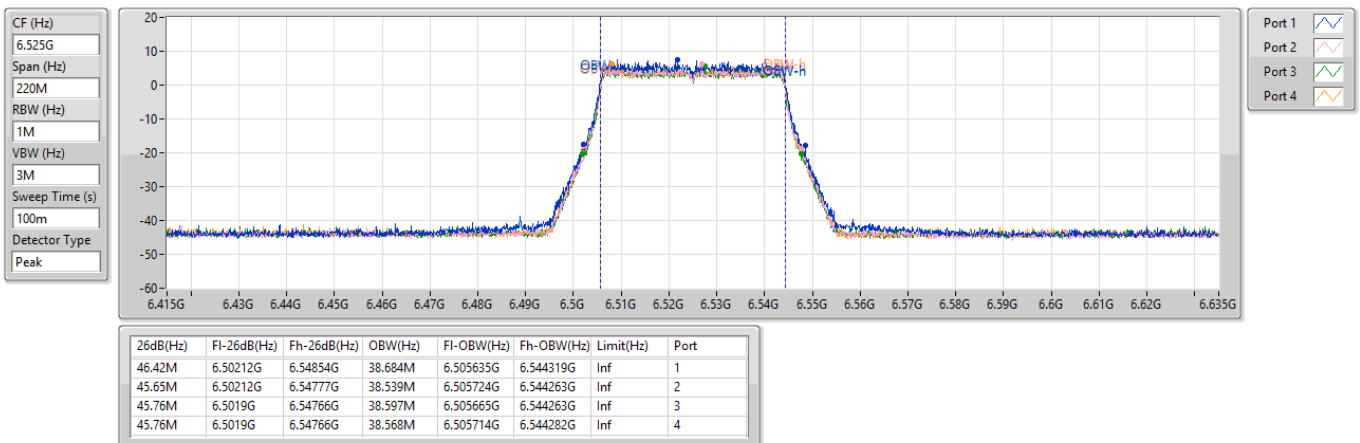




6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


6565MHz

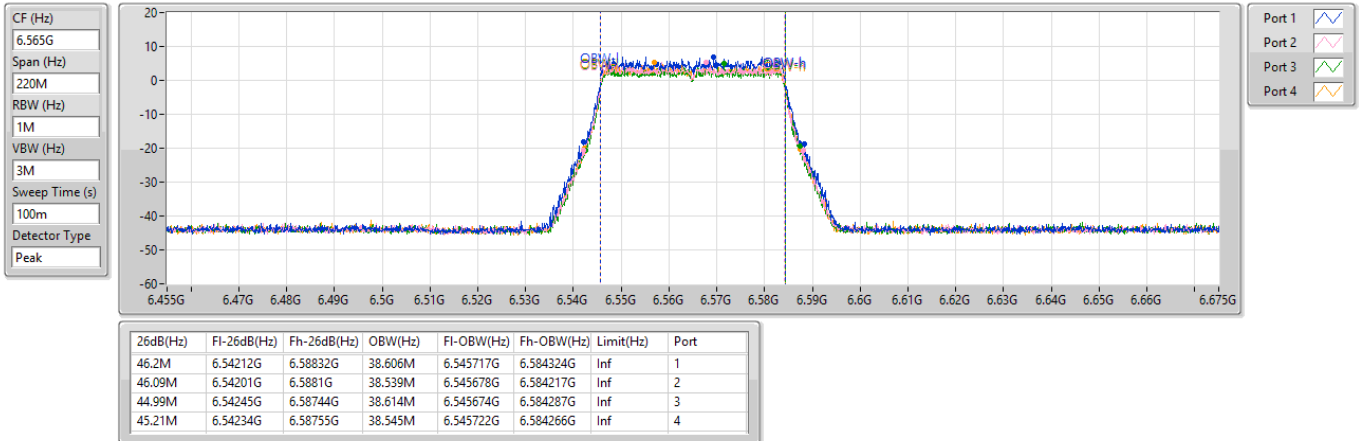

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6725MHz

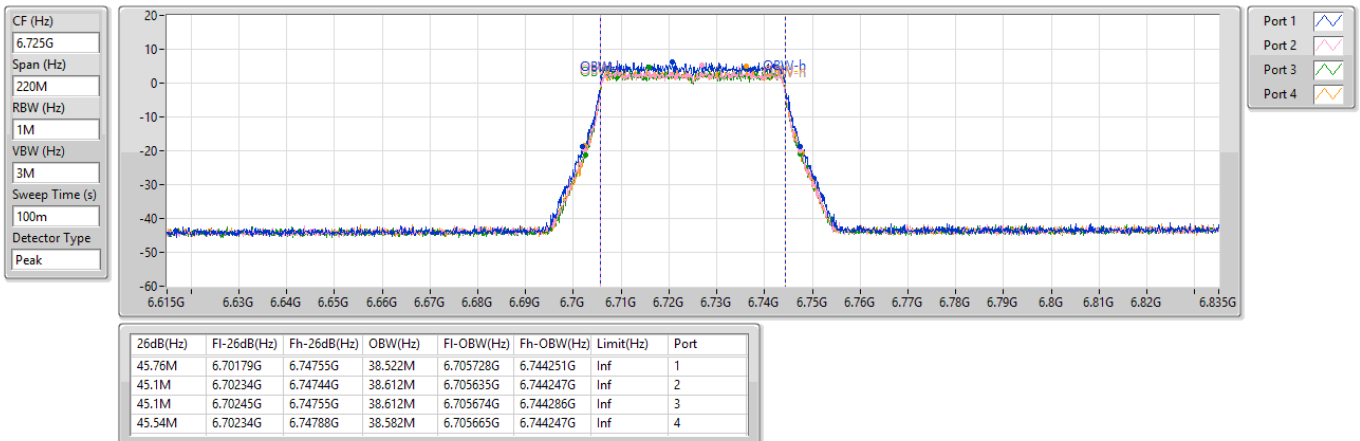




6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


6845MHz

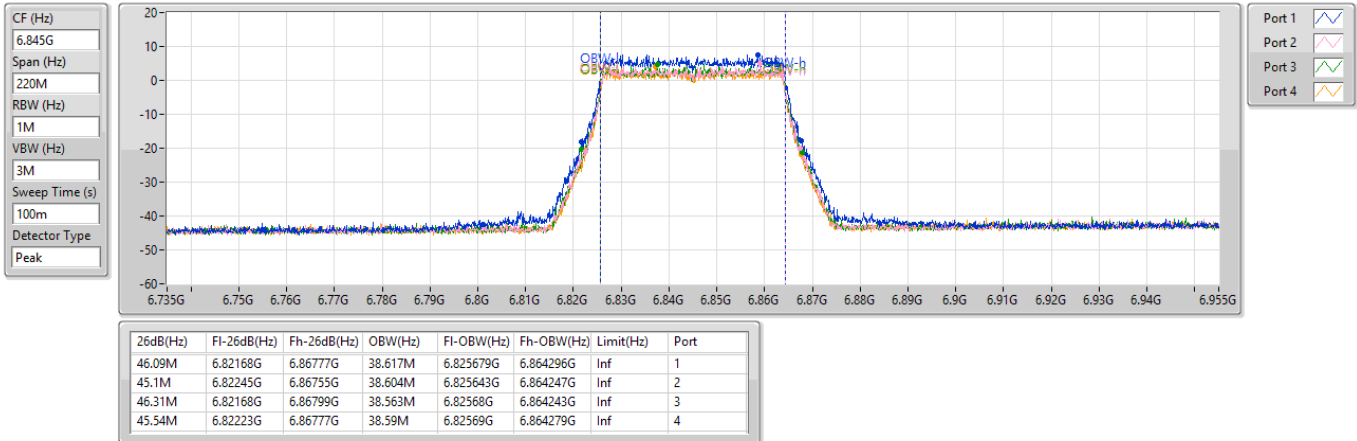

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6885MHz Straddle 6.525-6.875GHz

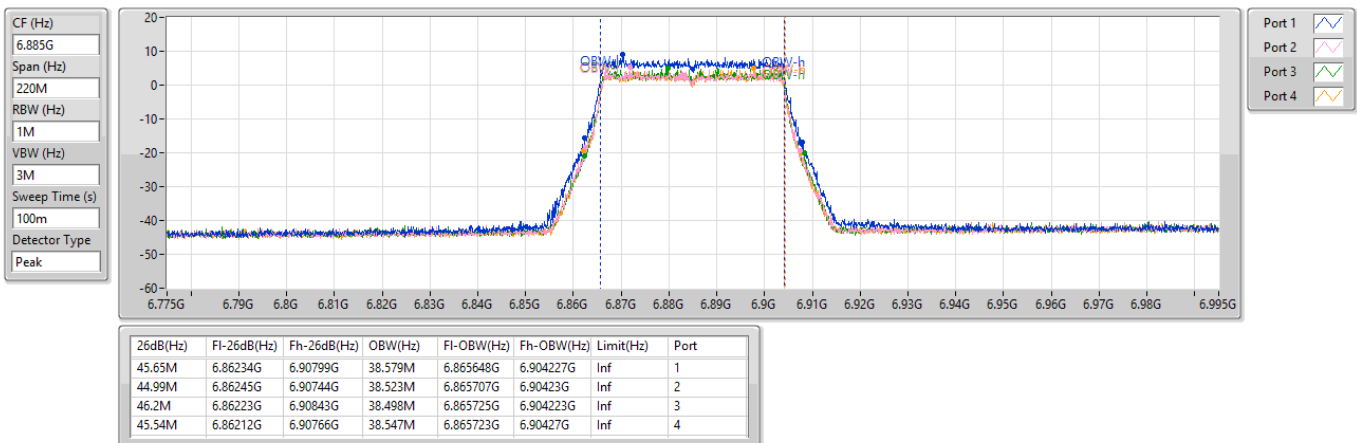




6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


6925MHz

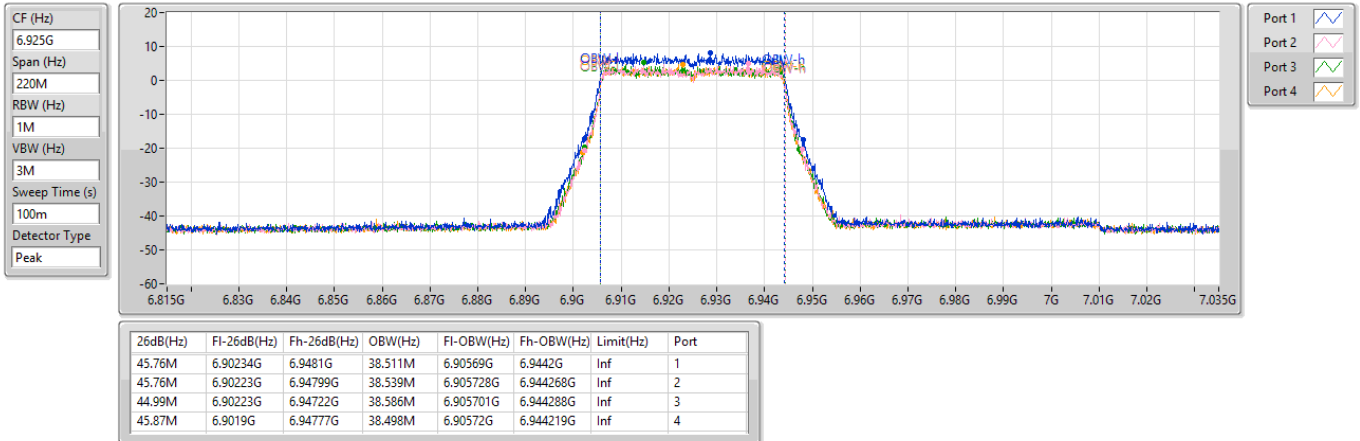

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

7005MHz

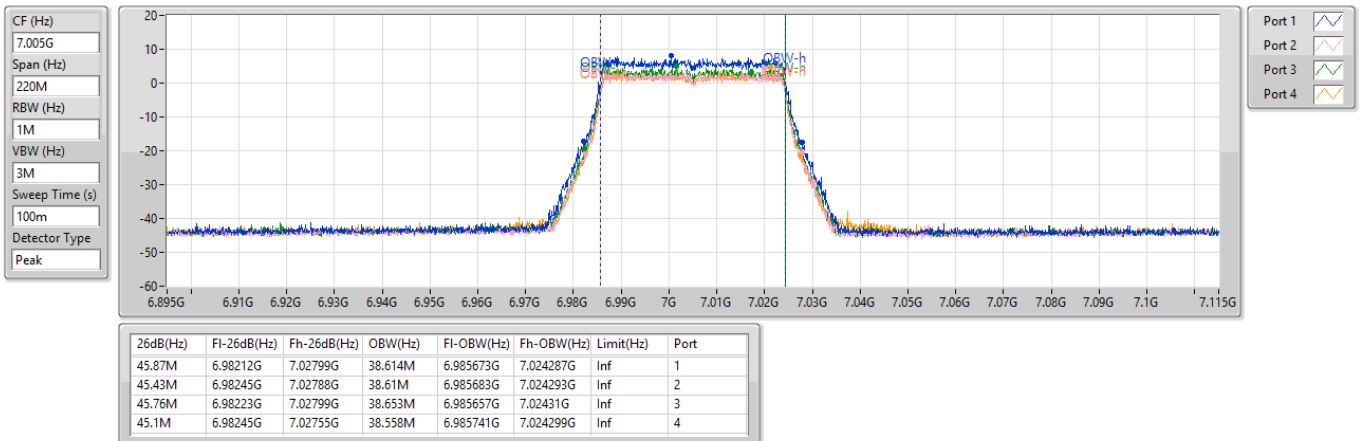




6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


7085MHz

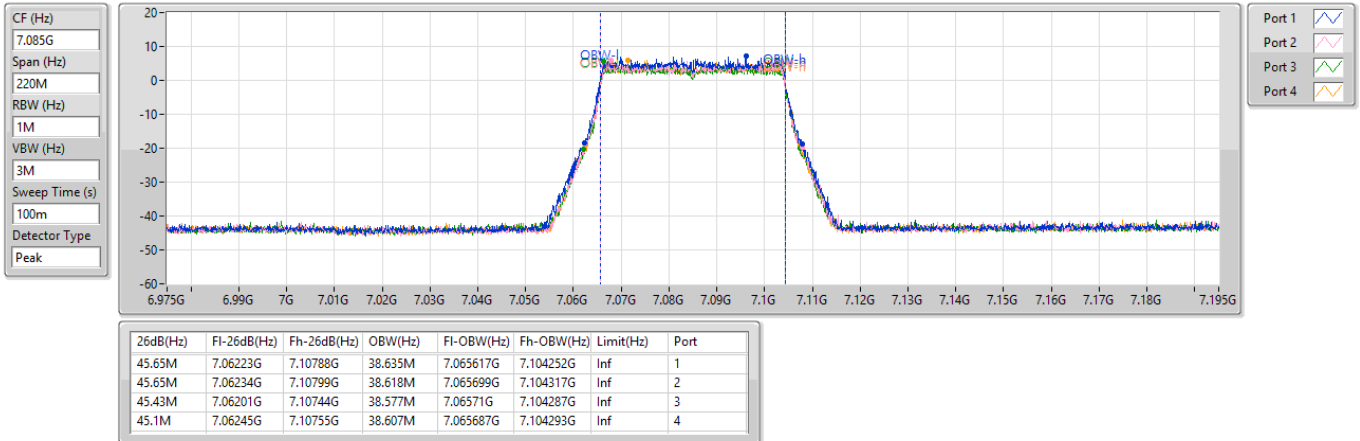

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5985MHz

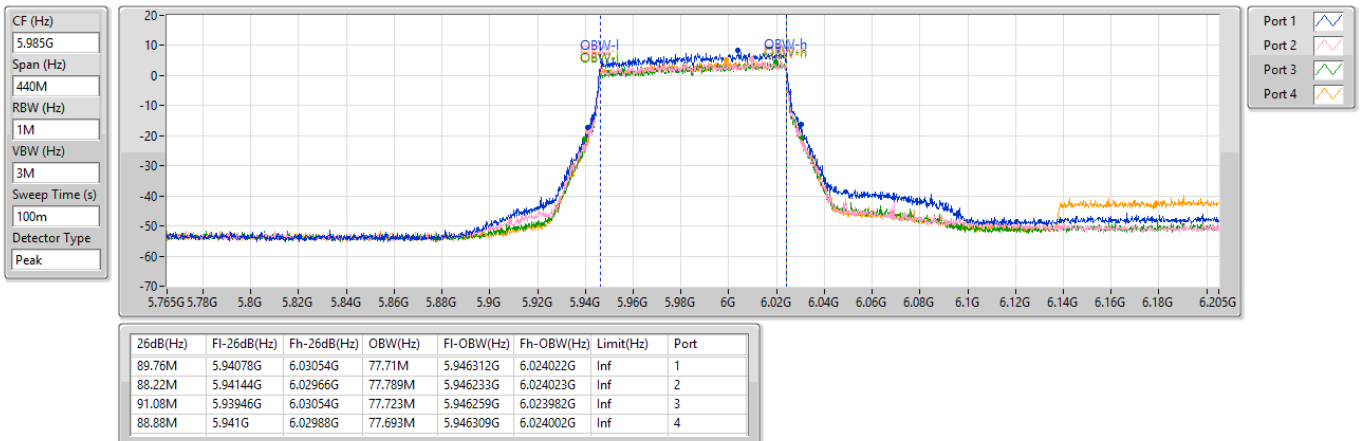




5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW


6145MHz

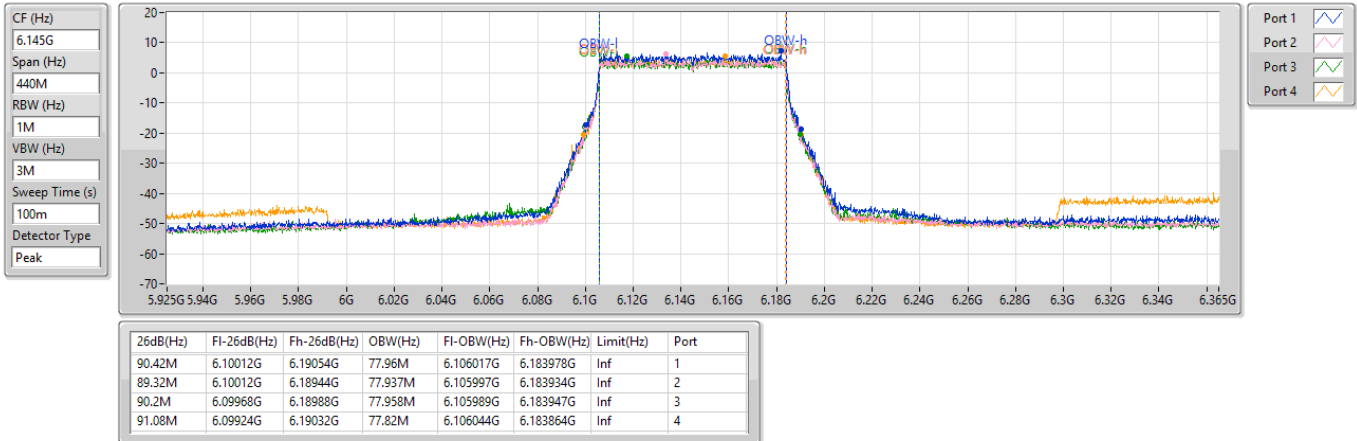

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6385MHz

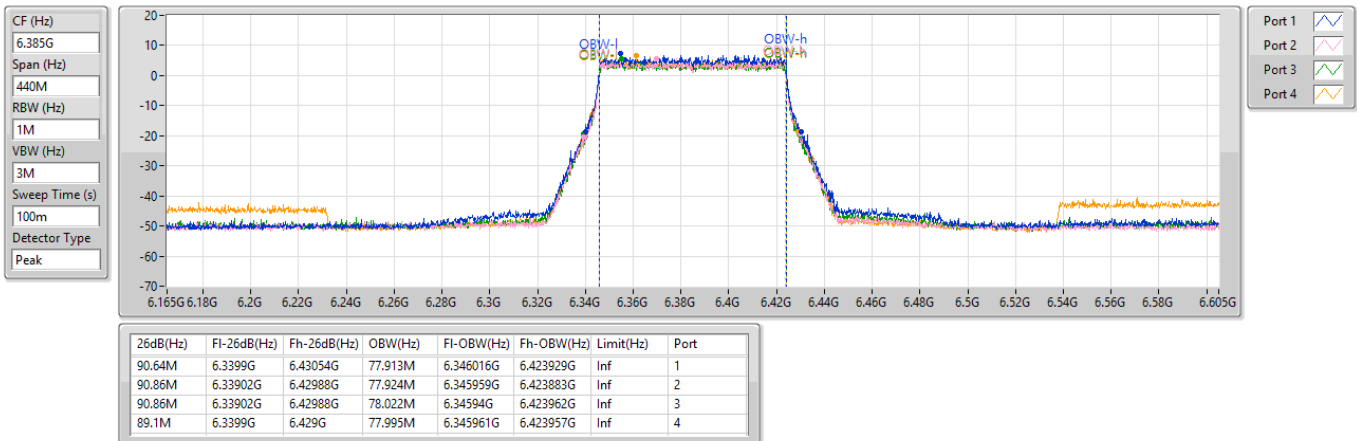




6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW


6465MHz

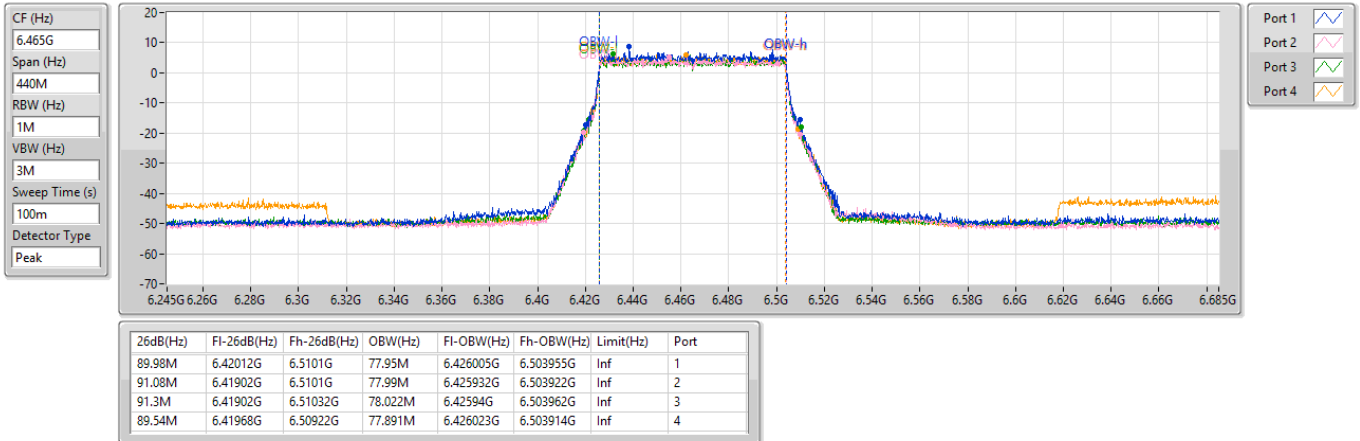

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6545MHz Straddle 6.525-6.875GHz

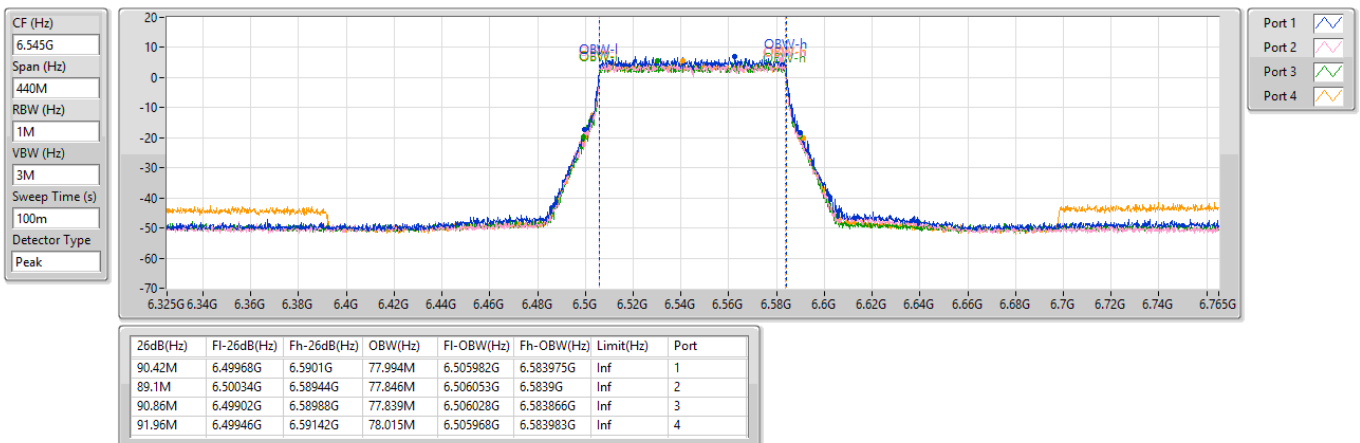




6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW


6625MHz

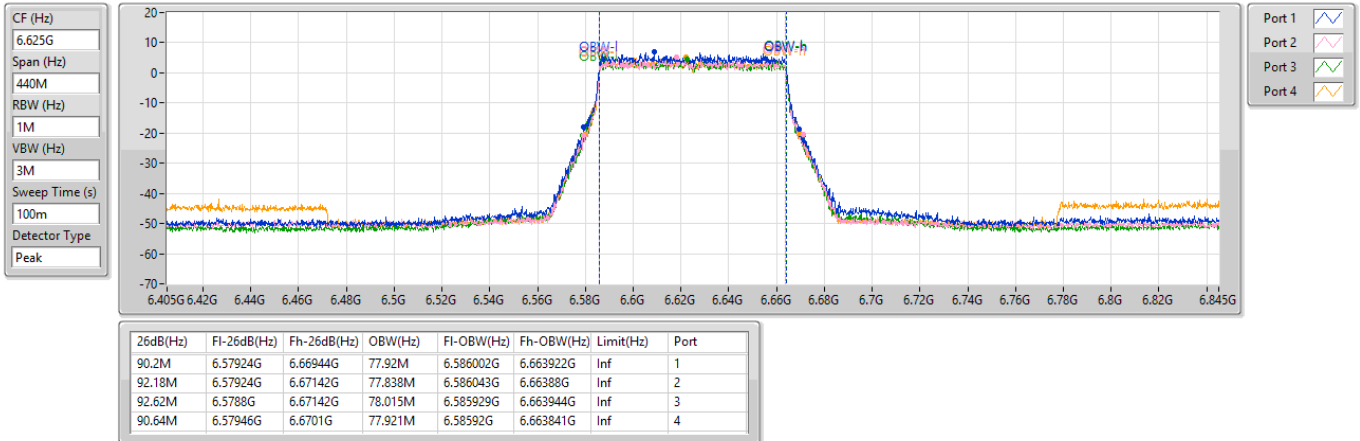

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6705MHz

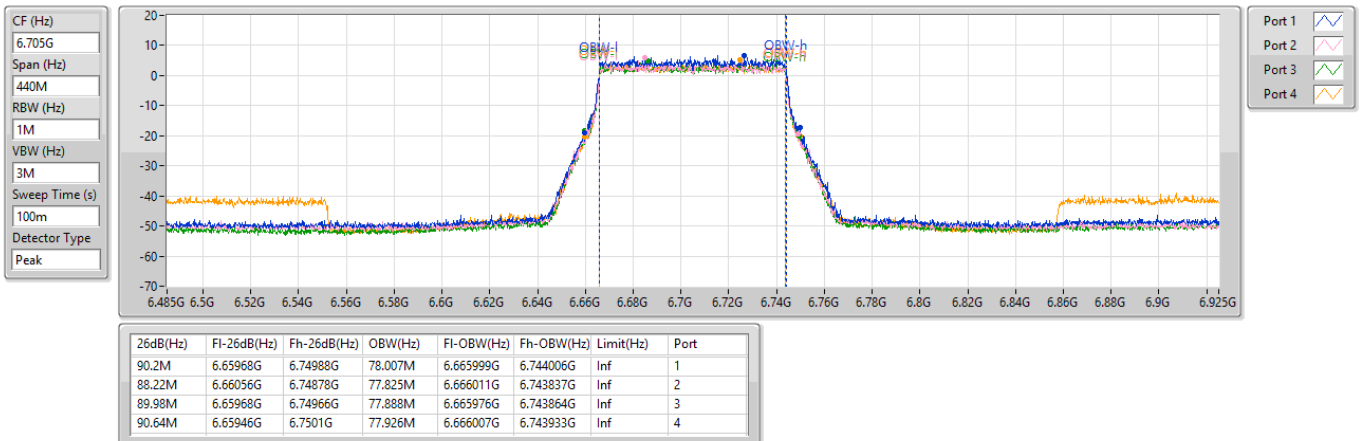




6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW


6785MHz

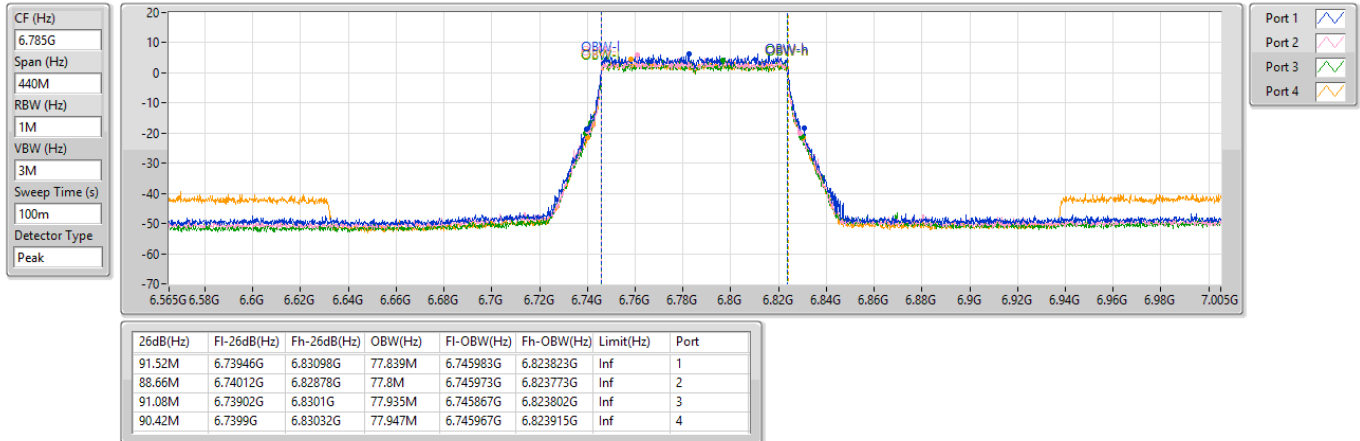

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6865MHz Straddle 6.525-6.875GHz

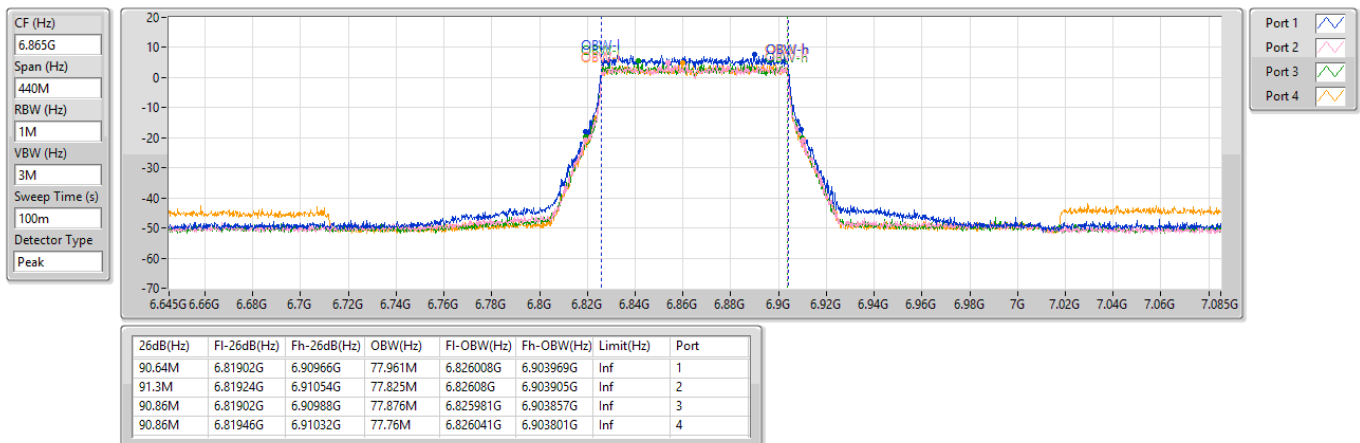




6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW


6945MHz

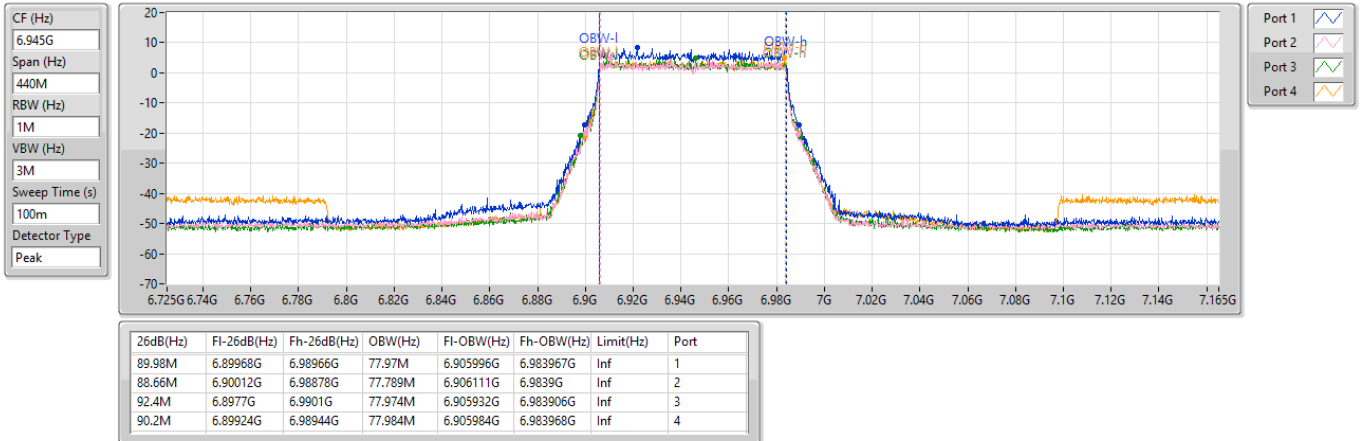

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

7025MHz

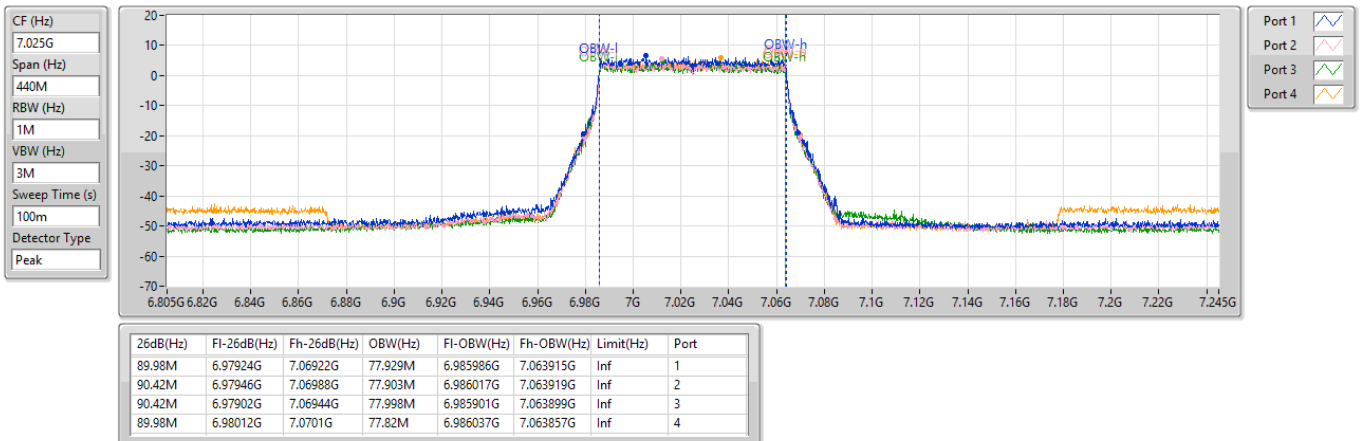




5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW


6025MHz

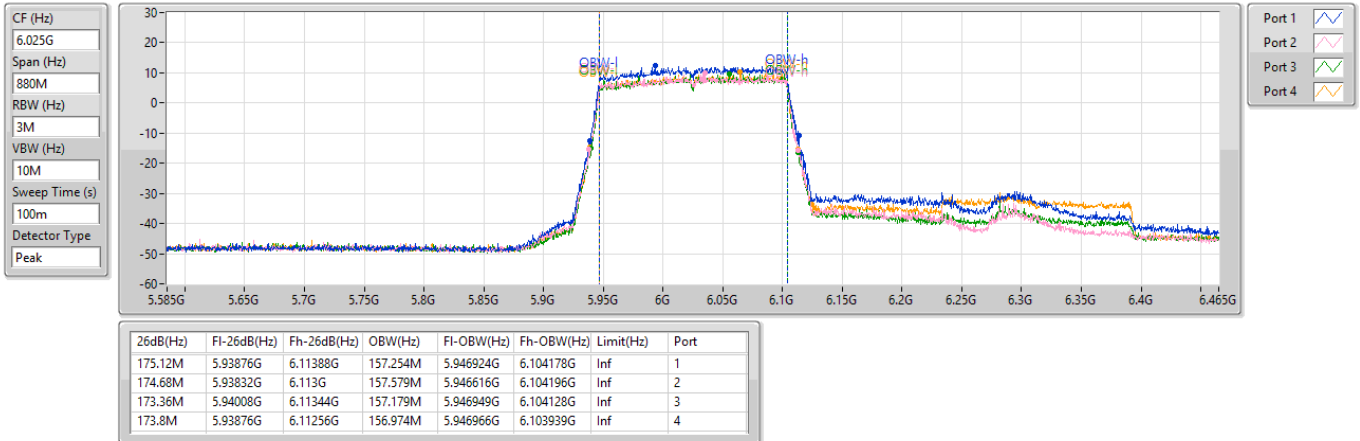

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6185MHz

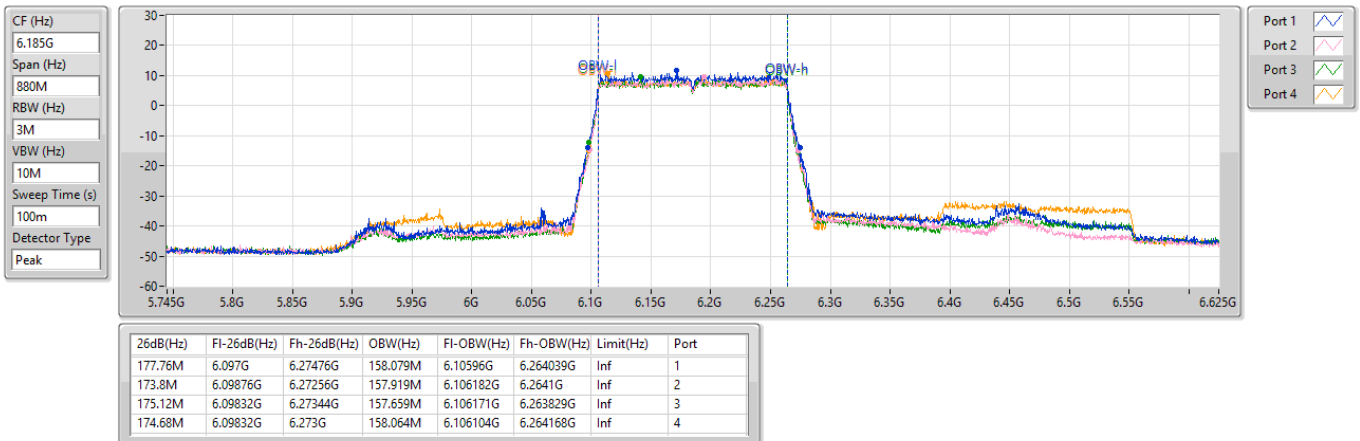




5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW


6345MHz

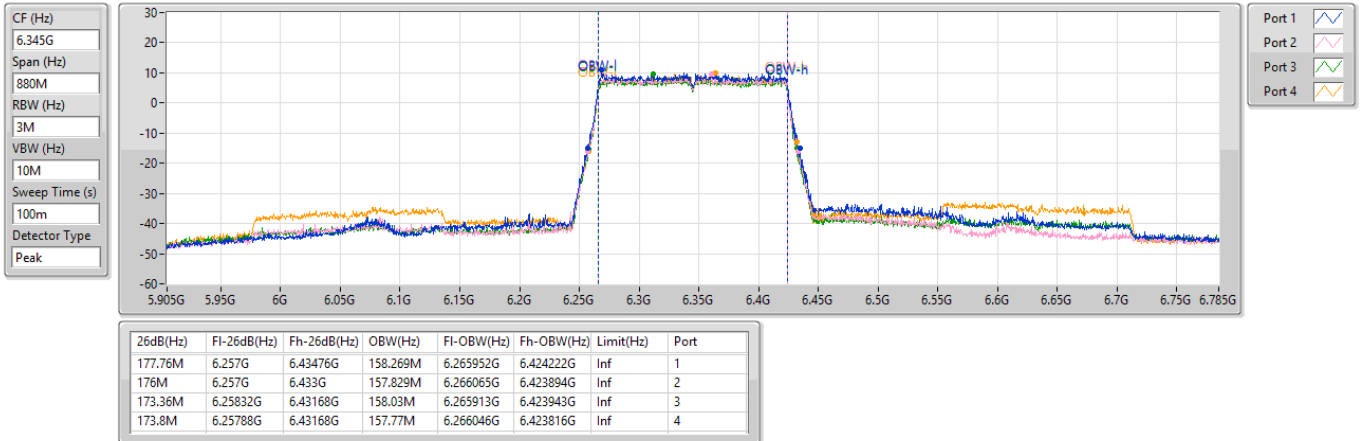

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6505MHz Straddle 6.525-6.875GHz

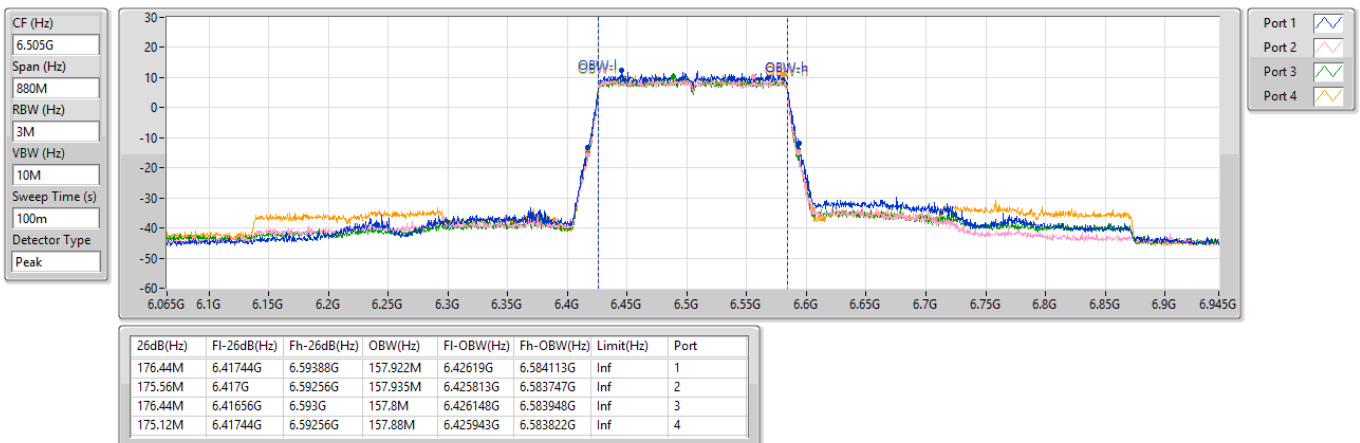




6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW


6665MHz

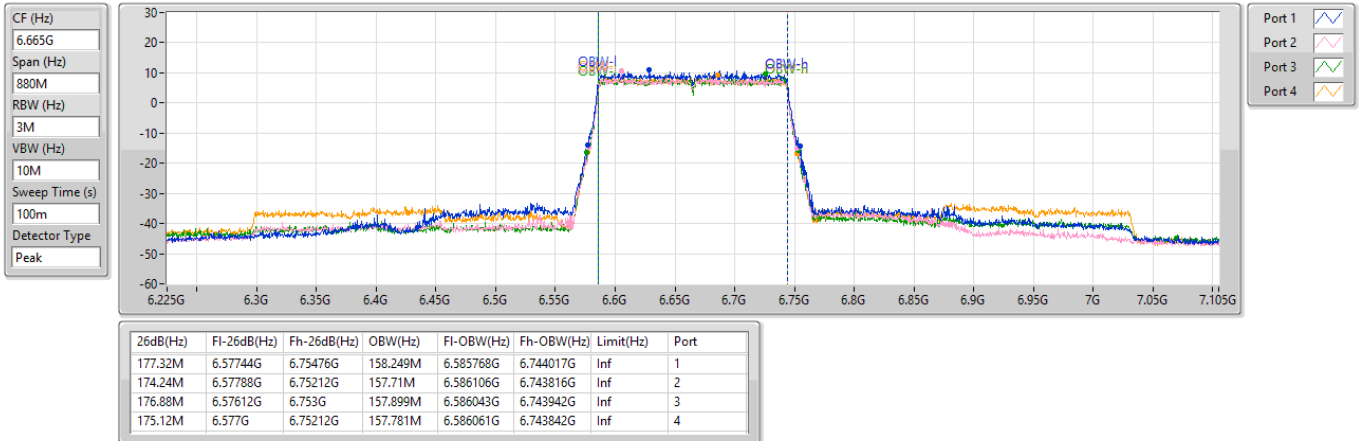

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6825MHz Straddle 6.525-6.875GHz

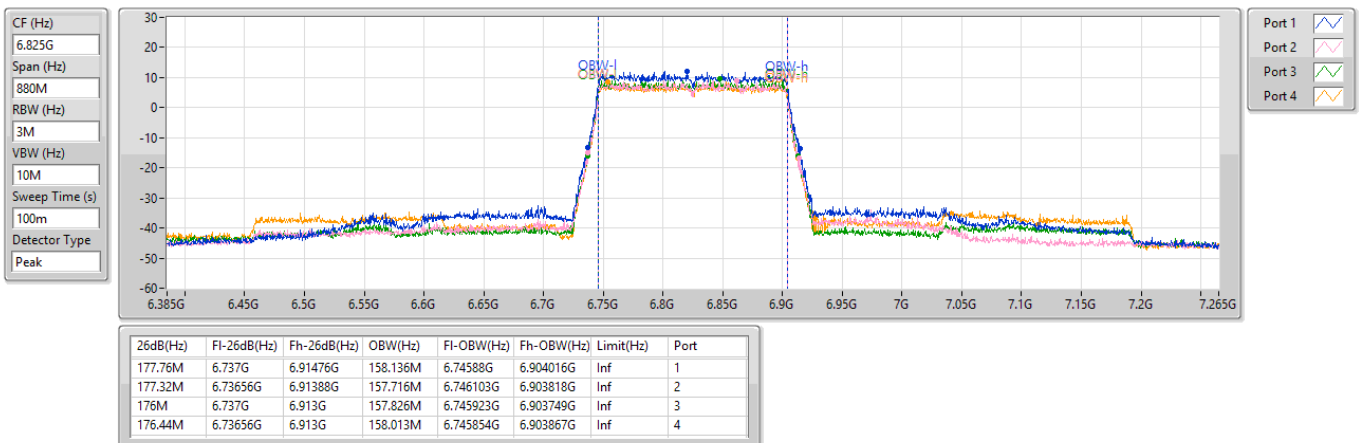




6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW


6985MHz

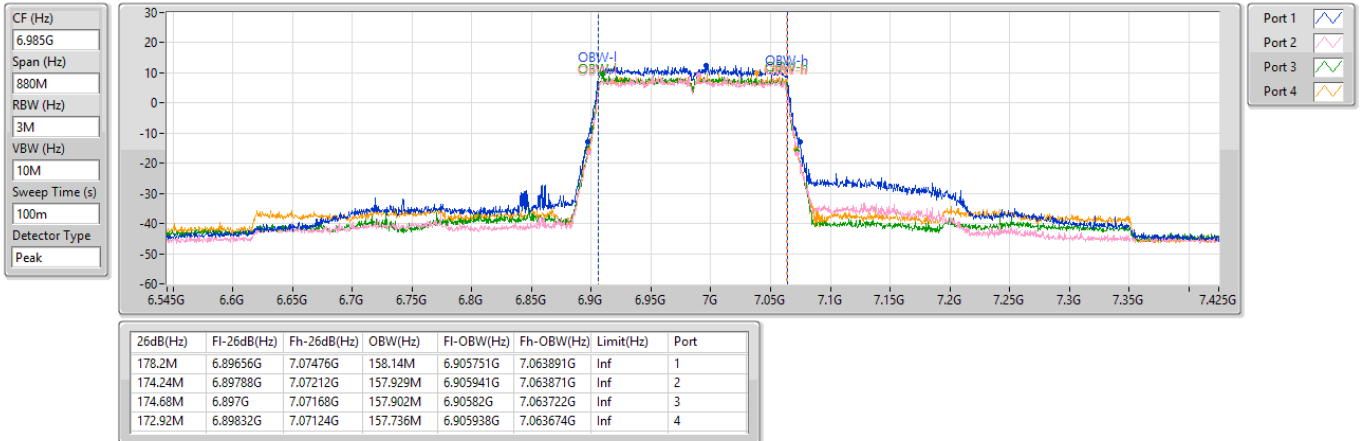

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6105MHz

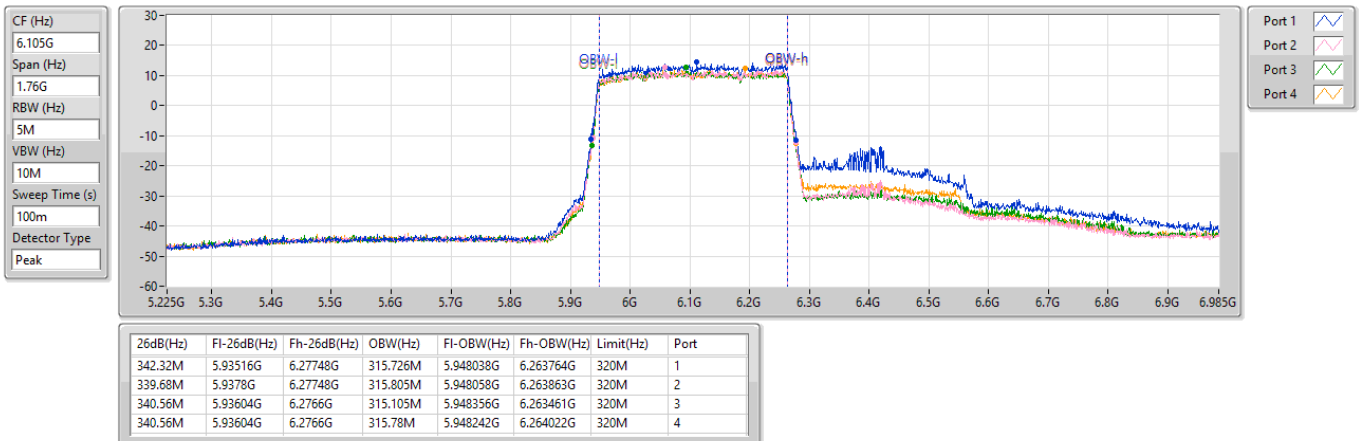




5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW


6265MHz

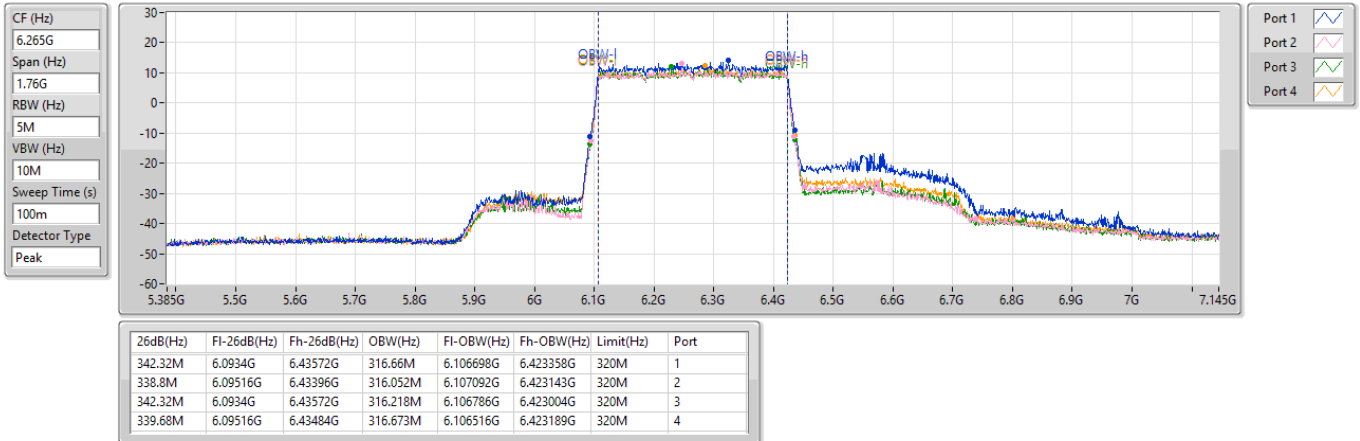

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6425MHz Straddle 5.925-6.425GHz

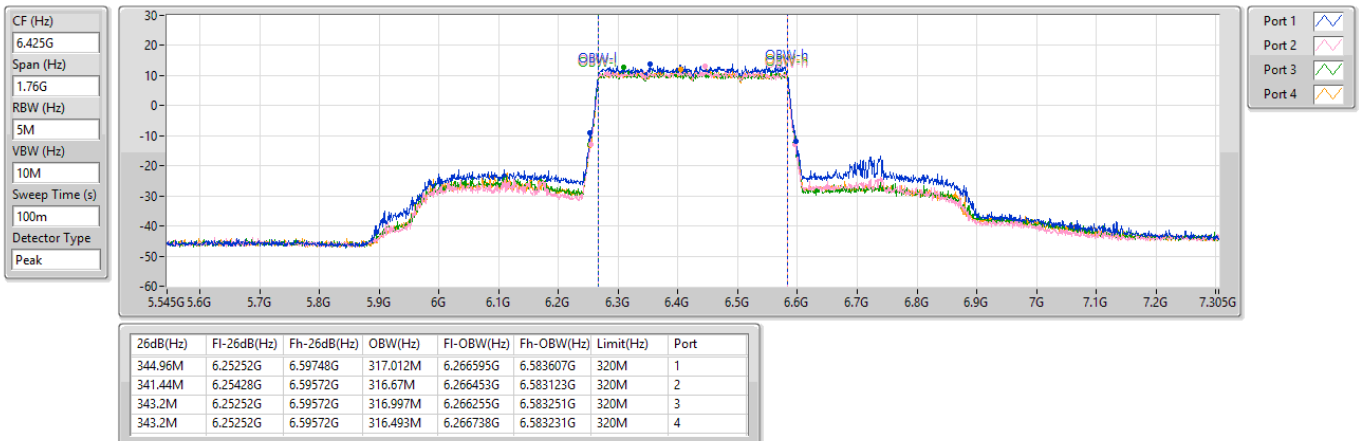




6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW


6585MHz Straddle 6.525-6.875GHz

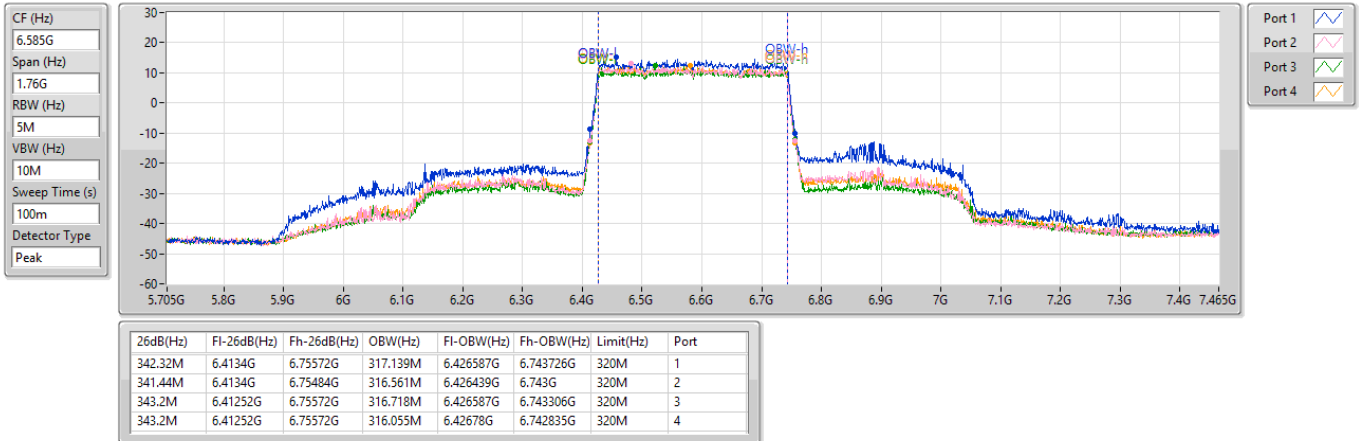

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6745MHz Straddle 6.525-6.875GHz

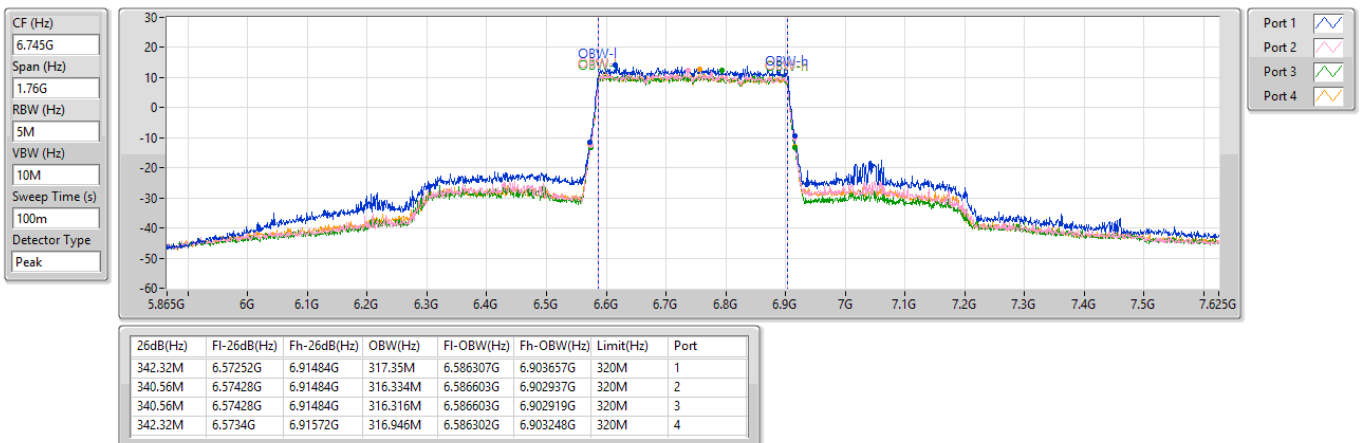




6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6905MHz Straddle 6.525-6.875GHz

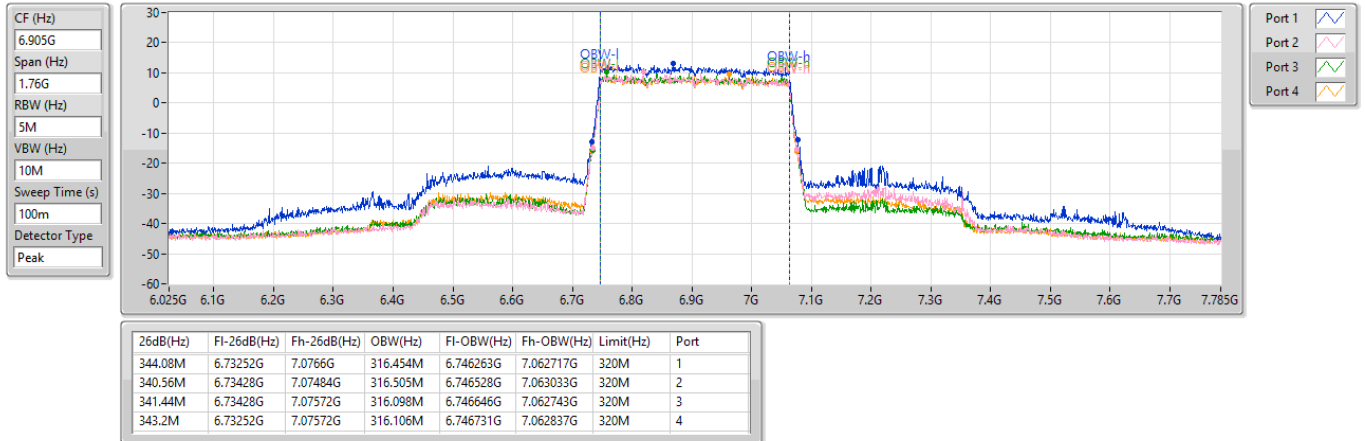



Mode	Freq MHz	CH	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP (dBm)	Limit (dBm)	Verdict
EHT20	5955	1	106	1.69	0.07	107.76	12.56	30.00	Pass
EHT20	6175	45	105.62	2.3	0.07	107.99	12.79	30.00	Pass
EHT20	6415	93	105.2	3.35	0.07	108.62	13.42	30.00	Pass
EHT20	6435	97	104.06	3.45	0.07	107.58	12.38	30.00	Pass
EHT20	6475	105	104.53	3.71	0.07	108.31	13.11	30.00	Pass
EHT20	6515	113	103.81	3.96	0.07	107.84	12.64	30.00	Pass
EHT20	6535	117	104.61	4.05	0.07	108.73	13.53	30.00	Pass
EHT20	6715	153	103.87	4.2	0.07	108.14	12.94	30.00	Pass
EHT20	6855	181	104.14	4.54	0.07	108.75	13.55	30.00	Pass
EHT20	6875	185	104.29	4.57	0.07	108.93	13.73	30.00	Pass
EHT20	6895	189	104.17	4.61	0.07	108.85	13.65	30.00	Pass
EHT20	7015	213	103.44	5.19	0.07	108.7	13.50	30.00	Pass
EHT20	7095	229	102.93	5.64	0.07	108.64	13.44	30.00	Pass
EHT20	7115	233	96.02	5.69	0.07	101.78	6.58	30.00	Pass

Mode	Freq MHz	CH	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP (dBm)	Limit (dBm)	Verdict
EHT40	5965	3	109.28	1.72	0.12	111.12	15.92	30.00	Pass
EHT40	6165	43	108.04	2.25	0.12	110.41	15.21	30.00	Pass
EHT40	6405	91	107.94	3.3	0.12	111.36	16.16	30.00	Pass
EHT40	6445	99	107.06	3.51	0.12	110.69	15.49	30.00	Pass
EHT40	6485	107	107.25	3.78	0.12	111.15	15.95	30.00	Pass
EHT40	6525	115	107.08	4	0.12	111.2	16.00	30.00	Pass
EHT40	6565	123	107.08	4.18	0.12	111.38	16.18	30.00	Pass
EHT40	6725	155	106.51	4.18	0.12	110.81	15.61	30.00	Pass
EHT40	6845	179	106.06	4.5	0.12	110.68	15.48	30.00	Pass
EHT40	6885	187	106.06	4.59	0.12	110.77	15.57	30.00	Pass
EHT40	6925	195	106.73	4.81	0.12	111.66	16.46	30.00	Pass
EHT40	7005	211	105.72	5.13	0.12	110.97	15.77	30.00	Pass
EHT40	7085	227	105	5.58	0.12	110.7	15.50	30.00	Pass

Note:

EIRP(dBm) = Final Level(dBuV/m) - 95.2

Final Level(dBuV/m) = Read Level (dBuV) + Path Loss(dB/m) + DT Factor(dB)

Path Loss = Antenna Factor(dBuV/m) + Cable Loss(dB) - Preamp Factor(dB)



Mode	Freq MHz	CH	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP (dBm)	Limit (dBm)	Verdict
EHT80	5985	7	112.15	1.77	0.1	114.02	18.82	30.00	Pass
EHT80	6145	39	112.05	2.16	0.1	114.31	19.11	30.00	Pass
EHT80	6385	87	110.4	3.2	0.1	113.7	18.50	30.00	Pass
EHT80	6465	103	110.5	3.64	0.1	114.24	19.04	30.00	Pass
EHT80	6545	119	109.71	4.09	0.1	113.9	18.70	30.00	Pass
EHT80	6625	135	109.59	4.39	0.1	114.08	18.88	30.00	Pass
EHT80	6705	151	110.03	4.22	0.1	114.35	19.15	30.00	Pass
EHT80	6785	167	109.57	4.27	0.1	113.94	18.74	30.00	Pass
EHT80	6865	183	109.48	4.55	0.1	114.13	18.93	30.00	Pass
EHT80	6945	199	109.18	4.97	0.1	114.25	19.05	30.00	Pass
EHT80	7025	215	108.55	5.25	0.1	113.9	18.70	30.00	Pass

Mode	Freq MHz	CH	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP (dBm)	Limit (dBm)	Verdict
EHT160	6025	15	114.35	1.84	0.1	116.29	21.09	30.00	Pass
EHT160	6185	47	114.62	2.35	0.1	117.07	21.87	30.00	Pass
EHT160	6345	79	113.51	3.02	0.1	116.63	21.43	30.00	Pass
EHT160	6505	111	112.92	3.92	0.1	116.94	21.74	30.00	Pass
EHT160	6665	143	112.27	4.37	0.1	116.74	21.54	30.00	Pass
EHT160	6825	175	112.13	4.43	0.1	116.66	21.46	30.00	Pass
EHT160	6985	207	111.76	5.07	0.1	116.93	21.73	30.00	Pass


Mode	Freq MHz	CH	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP (dBm)	Limit (dBm)	Verdict
EHT320	6105	31	116.88	2.04	0.07	118.99	23.79	30.00	Pass
EHT320	6265	63	115.53	2.71	0.07	118.31	23.11	30.00	Pass
EHT320	6425	95	115.5	3.4	0.07	118.97	23.77	30.00	Pass
EHT320	6585	127	115.04	4.26	0.07	119.37	24.17	30.00	Pass
EHT320	6745	159	115.09	4.14	0.07	119.3	24.10	30.00	Pass
EHT320	6905	191	113.18	4.65	0.07	117.9	22.70	30.00	Pass


Note:


EIRP(dBm) = Final Level(dBuV/m) - 95.2


Final Level(dBuV/m) = Read Level (dBuV) + Path Loss(dB/m) + DT Factor(dB)


Path Loss = Antenna Factor(dBuV/m) + Cable Loss(dB) - Preamp Factor(dB)

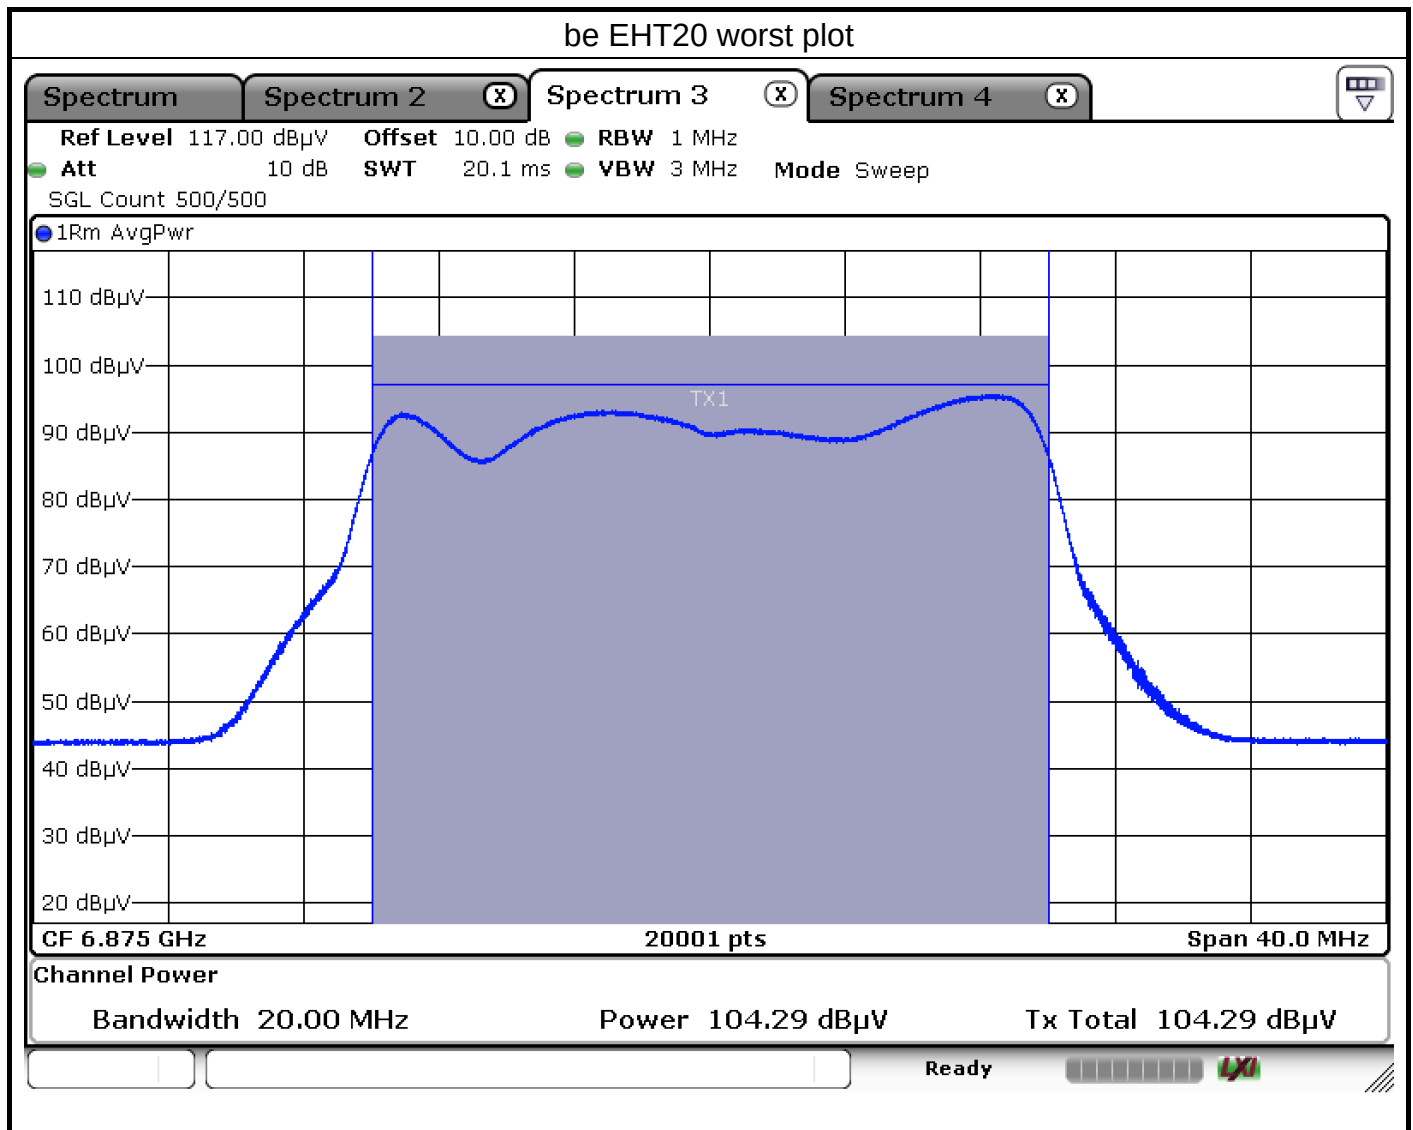

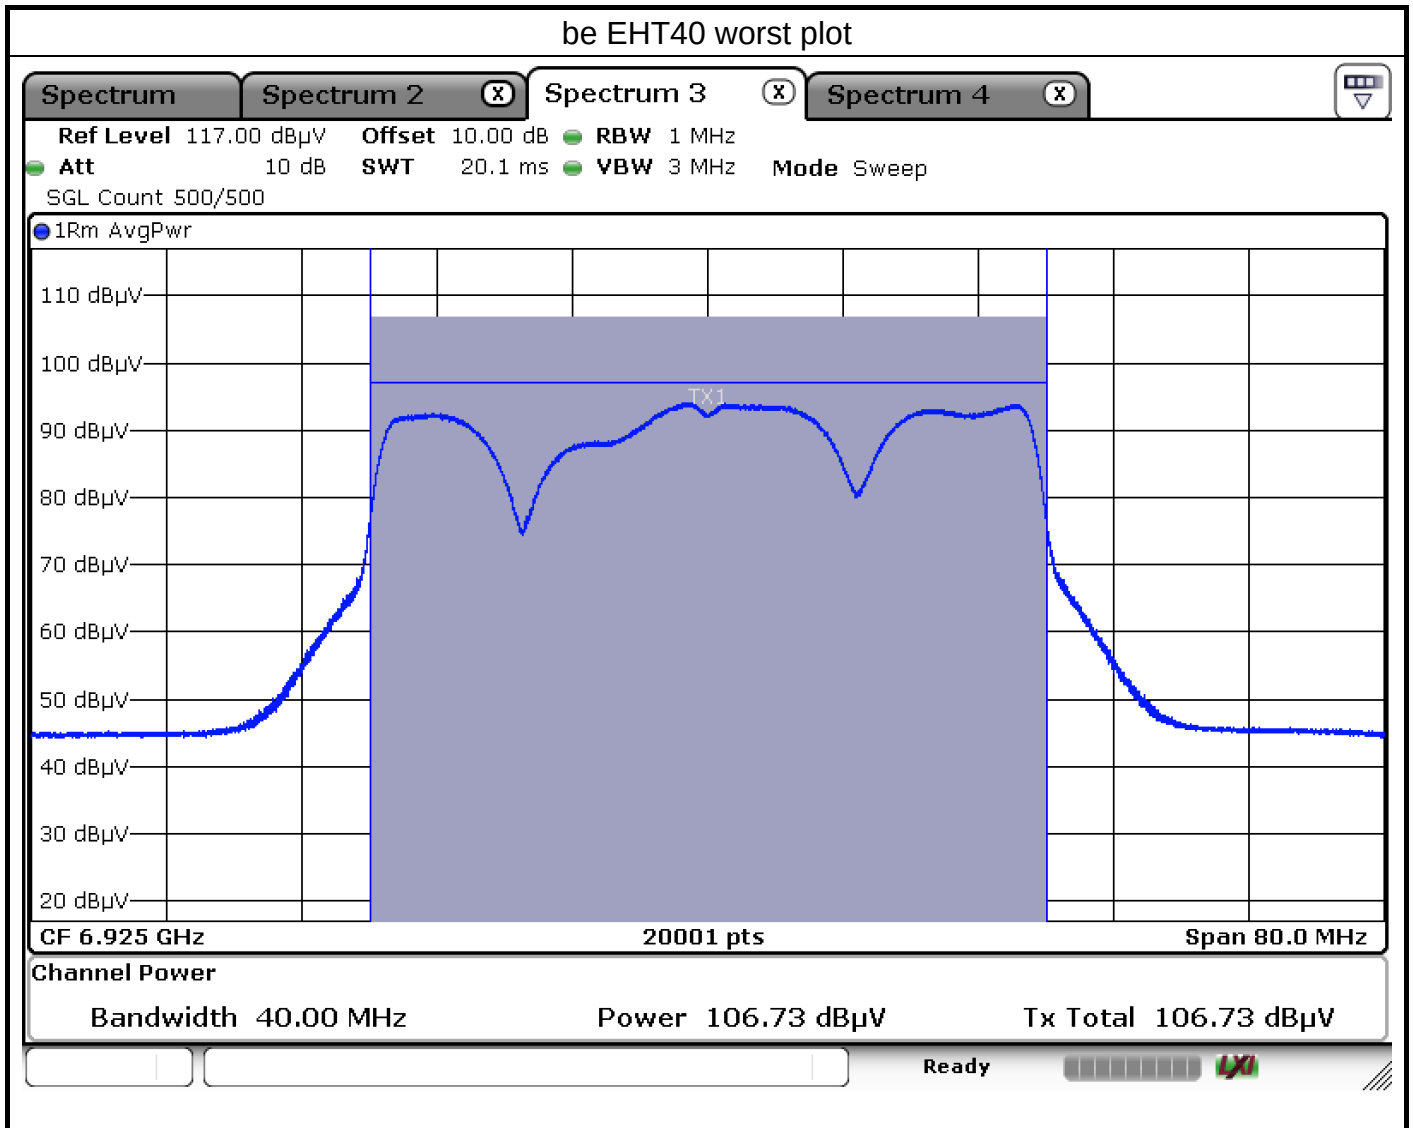

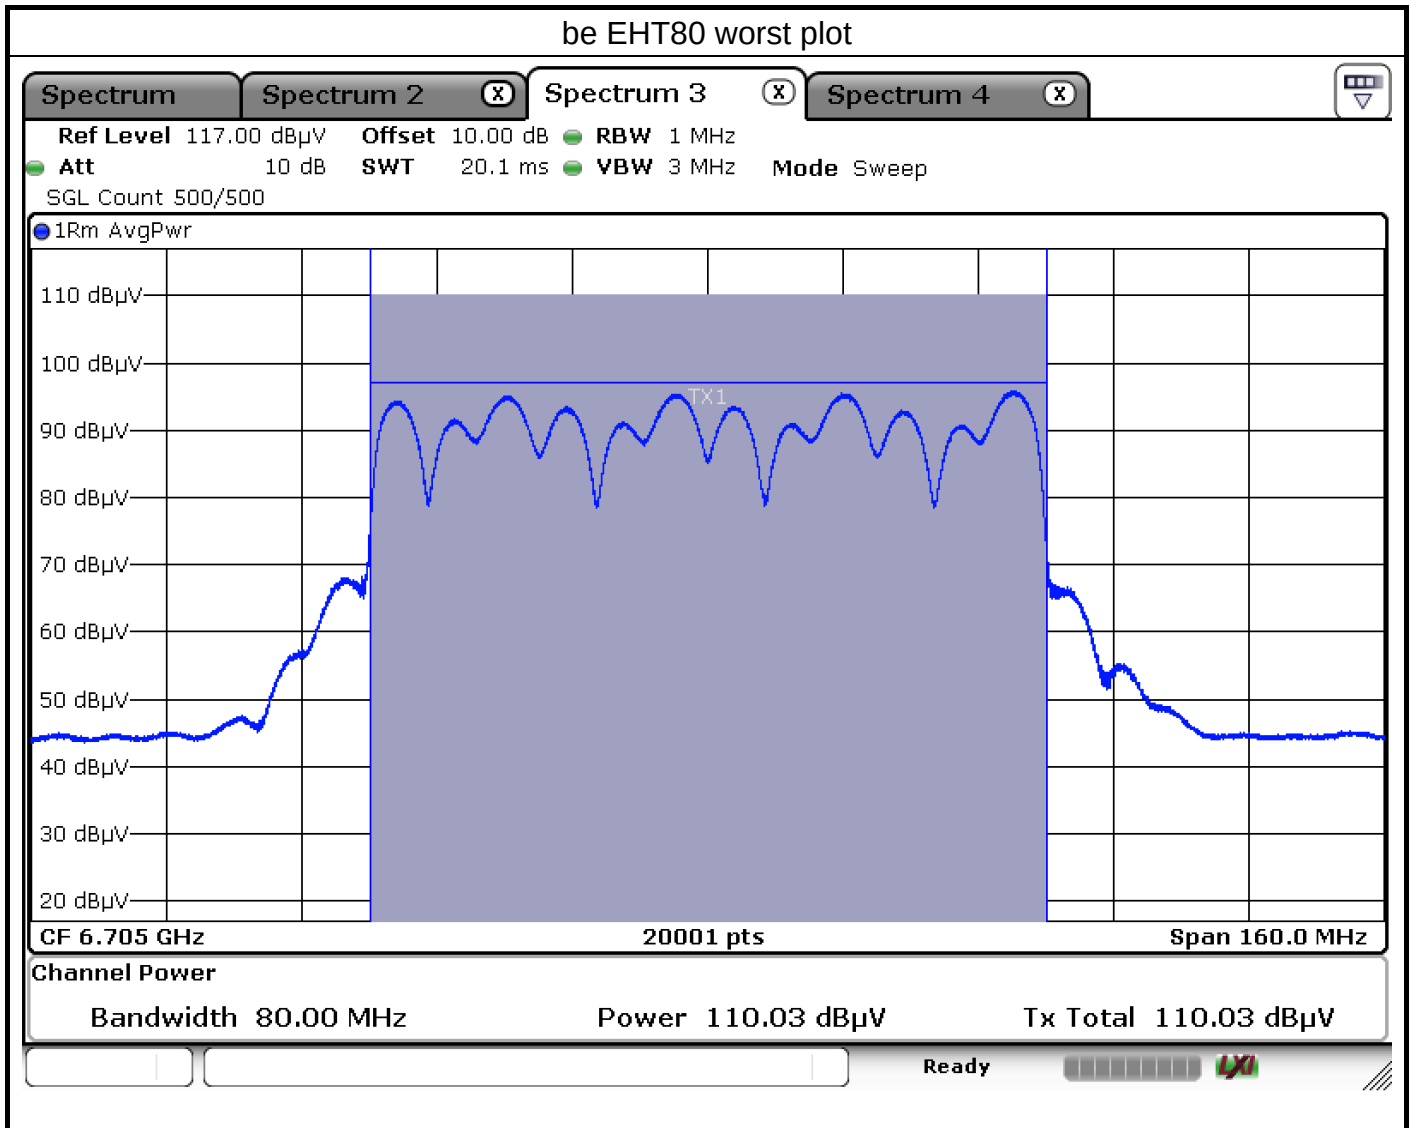

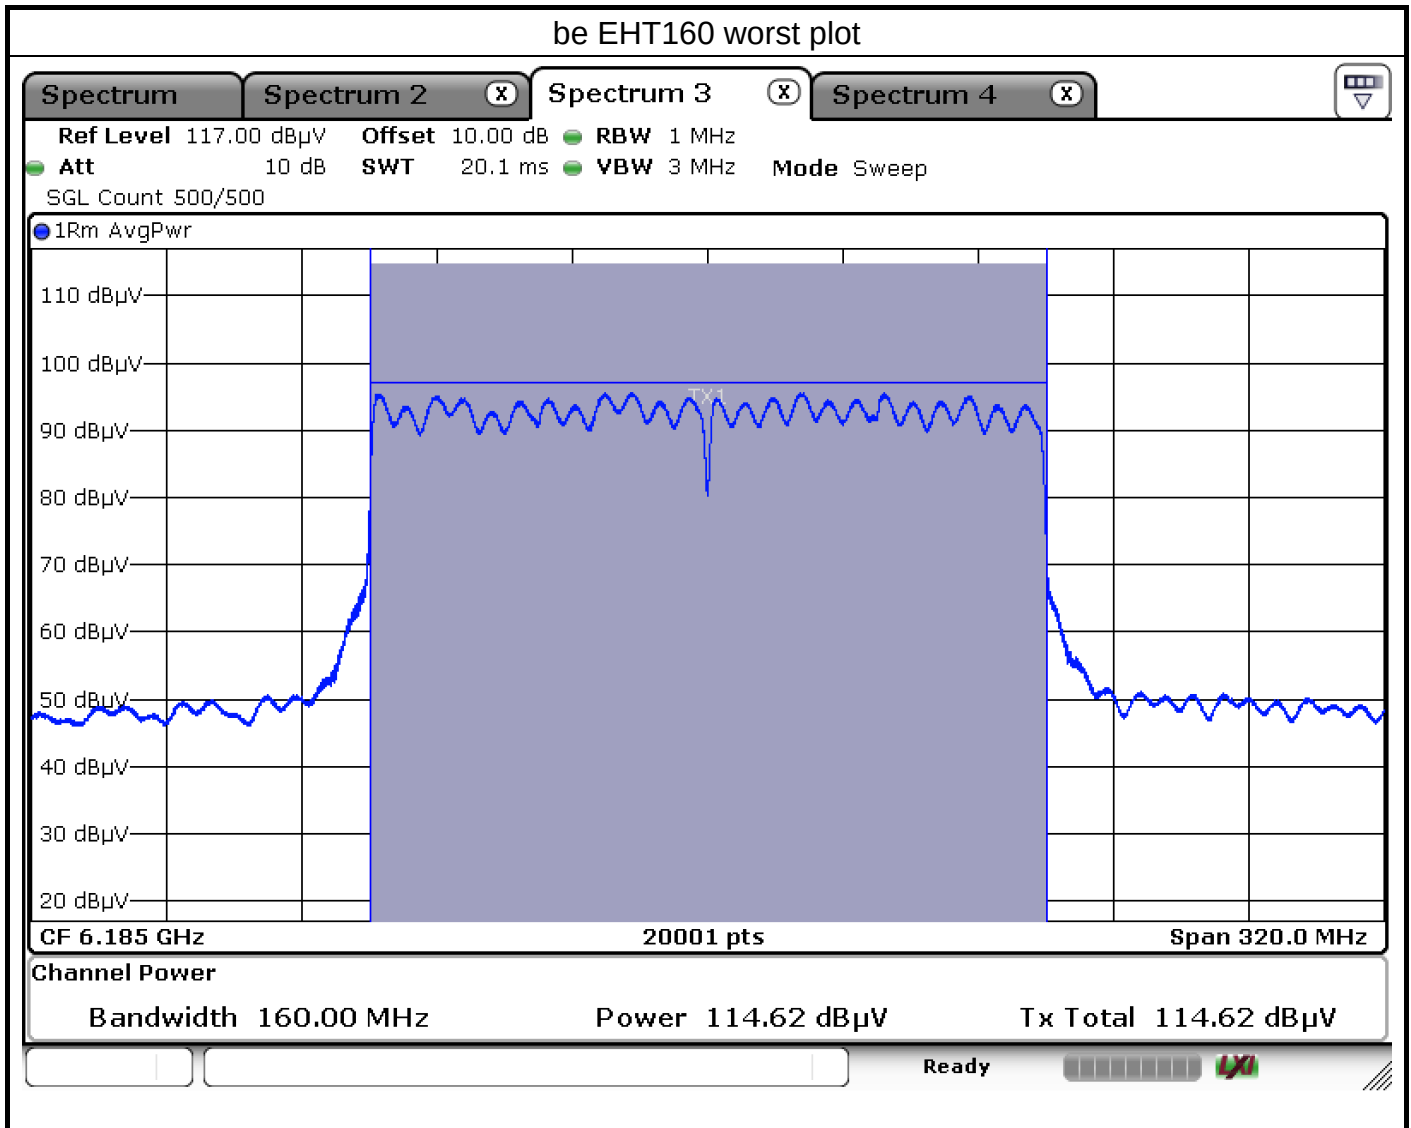

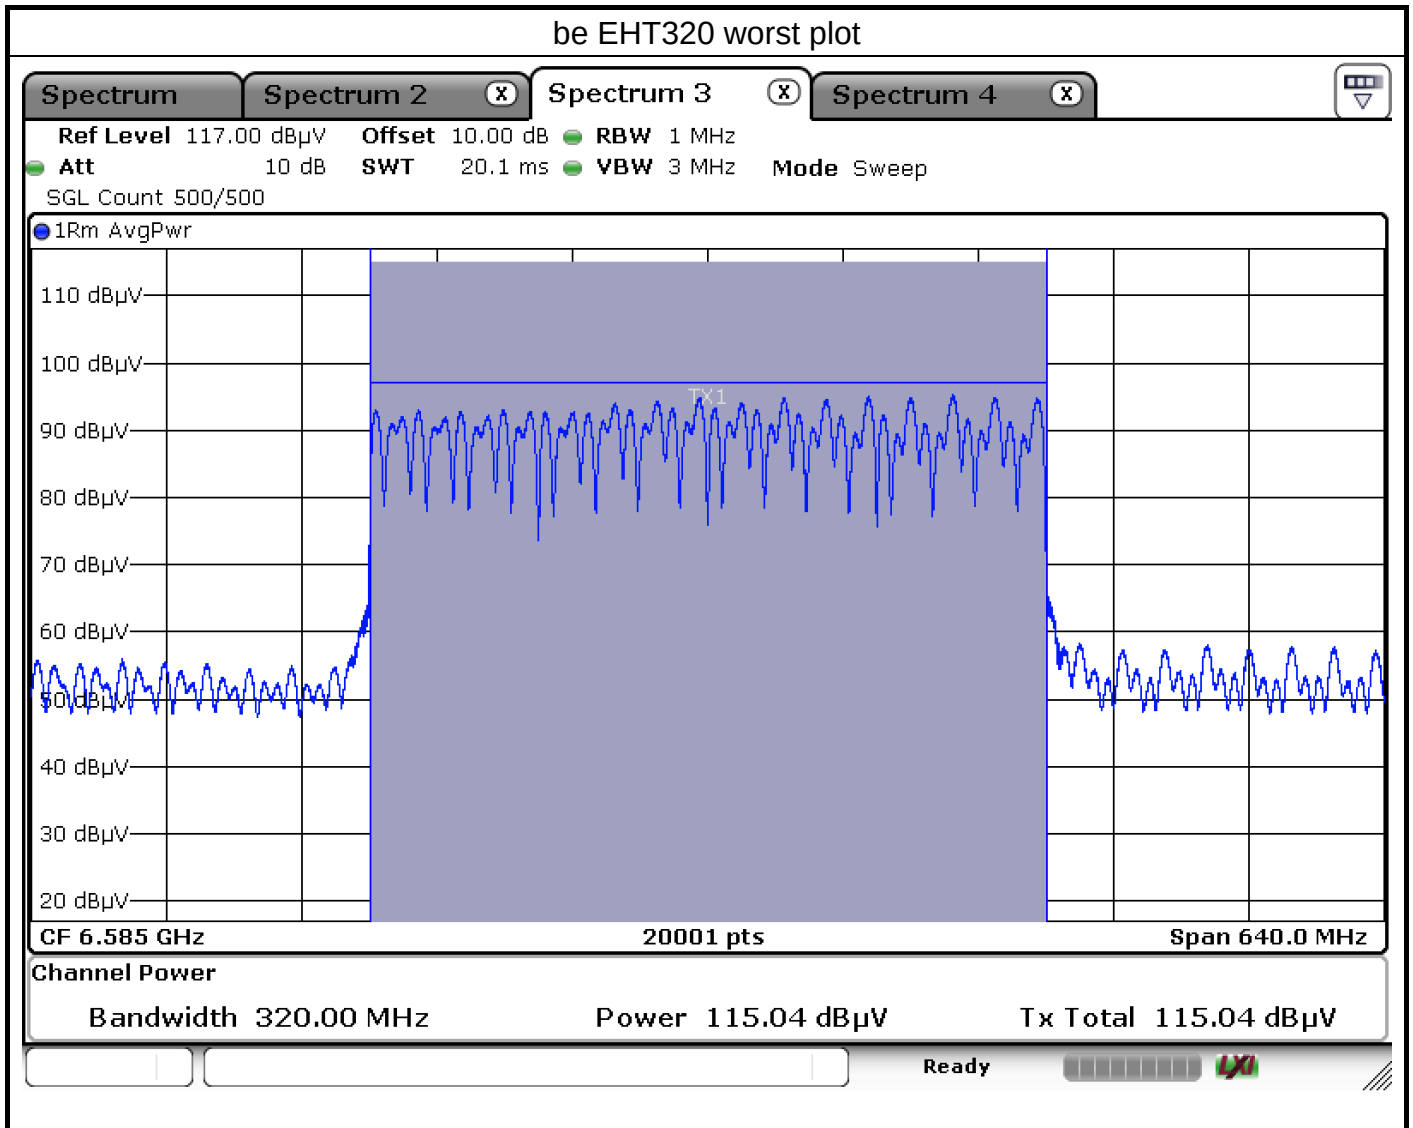



Mode	Freq MHz	Channel	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
be EHT20	5955	1	97.97	1.69	0.07	99.73	4.53	5.00	Pass
be EHT20	6175	45	97.47	2.3	0.07	99.84	4.64	5.00	Pass
be EHT20	6415	93	96.5	3.35	0.07	99.92	4.72	5.00	Pass
be EHT20	6435	97	96.22	3.45	0.07	99.74	4.54	5.00	Pass
be EHT20	6475	105	96.02	3.71	0.07	99.80	4.60	5.00	Pass
be EHT20	6515	113	95.72	3.96	0.07	99.75	4.55	5.00	Pass
be EHT20	6535	117	95.64	4.05	0.07	99.76	4.56	5.00	Pass
be EHT20	6715	153	95.48	4.2	0.07	99.75	4.55	5.00	Pass
be EHT20	6855	181	95.3	4.54	0.07	99.91	4.71	5.00	Pass
be EHT20	6875	185	95.36	4.57	0.07	100.00	4.80	5.00	Pass
be EHT20	6895	189	95.32	4.61	0.07	100.00	4.80	5.00	Pass
be EHT20	7015	213	94.75	5.19	0.07	100.01	4.81	5.00	Pass
be EHT20	7095	229	94.31	5.64	0.07	100.02	4.82	5.00	Pass

Mode	Freq MHz	Channel	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
be EHT40	5965	3	98.18	1.72	0.12	100.02	4.82	5.00	Pass
be EHT40	6165	43	97.58	2.25	0.12	99.95	4.75	5.00	Pass
be EHT40	6405	91	96.54	3.3	0.12	99.96	4.76	5.00	Pass
be EHT40	6445	99	96.45	3.51	0.12	100.08	4.88	5.00	Pass
be EHT40	6485	107	95.87	3.78	0.12	99.77	4.57	5.00	Pass
be EHT40	6525	115	95.83	4	0.12	99.95	4.75	5.00	Pass
be EHT40	6565	123	95.53	4.18	0.12	99.83	4.63	5.00	Pass
be EHT40	6725	155	95.78	4.18	0.12	100.08	4.88	5.00	Pass
be EHT40	6845	179	95.16	4.5	0.12	99.78	4.58	5.00	Pass
be EHT40	6885	187	95.01	4.59	0.12	99.72	4.52	5.00	Pass
be EHT40	6925	195	95.1	4.81	0.12	100.03	4.83	5.00	Pass
be EHT40	7005	211	94.52	5.13	0.12	99.77	4.57	5.00	Pass
be EHT40	7085	227	94.12	5.58	0.12	99.82	4.62	5.00	Pass

Note:
$$\text{EIRP(dBm)} = \text{Final Level(dBuV/m)} - 95.2$$
$$\text{Final Level(dBuV/m)} = \text{Read Level (dBuV)} + \text{Path Loss(dB/m)} + \text{DT Factor(dB)}$$
$$\text{Path Loss} = \text{Antenna Factor(dBuV/m)} + \text{Cable Loss(dB)} - \text{Preamp Factor(dB)}$$





Mode	Freq MHz	Channel	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
EHT80	5985	7	98.13	1.77	0.10	100.00	4.80	5.00	Pass
EHT80	6145	39	97.62	2.16	0.10	99.88	4.68	5.00	Pass
EHT80	6385	87	96.67	3.2	0.10	99.97	4.77	5.00	Pass
EHT80	6465	103	96.16	3.64	0.10	99.90	4.70	5.00	Pass
EHT80	6545	119	95.57	4.09	0.10	99.76	4.56	5.00	Pass
EHT80	6625	135	95.32	4.39	0.10	99.81	4.61	5.00	Pass
EHT80	6705	151	95.5	4.22	0.10	99.82	4.62	5.00	Pass
EHT80	6785	167	95.55	4.27	0.10	99.92	4.72	5.00	Pass
EHT80	6865	183	95.31	4.55	0.10	99.96	4.76	5.00	Pass
EHT80	6945	199	94.9	4.97	0.10	99.97	4.77	5.00	Pass
EHT80	7025	215	94.53	5.25	0.10	99.88	4.68	5.00	Pass


Mode	Freq MHz	Channel	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
EHT160	6025	15	97.87	1.84	0.10	99.81	4.61	5.00	Pass
EHT160	6185	47	97.62	2.35	0.10	100.07	4.87	5.00	Pass
EHT160	6345	79	96.74	3.02	0.10	99.86	4.66	5.00	Pass
EHT160	6505	111	96.05	3.92	0.10	100.07	4.87	5.00	Pass
EHT160	6665	143	95.49	4.37	0.10	99.96	4.76	5.00	Pass
EHT160	6825	175	95.23	4.43	0.10	99.76	4.56	5.00	Pass
EHT160	6985	207	94.8	5.07	0.10	99.97	4.77	5.00	Pass


Mode	Freq MHz	Channel	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
EHT320	6105	31	97.63	2.04	0.07	99.74	4.54	5.00	Pass
EHT320	6265	63	97.19	2.71	0.07	99.97	4.77	5.00	Pass
EHT320	6425	95	96.52	3.4	0.07	99.99	4.79	5.00	Pass
EHT320	6585	127	95.55	4.26	0.07	99.88	4.68	5.00	Pass
EHT320	6745	159	95.56	4.14	0.07	99.77	4.57	5.00	Pass
EHT320	6905	191	94.08	4.65	0.07	98.80	3.60	5.00	Pass


Note:
$$\text{EIRP(dBm)} = \text{Final Level(dBuV/m)} - 95.2$$
$$\text{Final Level(dBuV/m)} = \text{Read Level (dBuV)} + \text{Path Loss(dB/m)} + \text{DT Factor(dB)}$$
$$\text{Path Loss} = \text{Antenna Factor(dBuV/m)} + \text{Cable Loss(dB)} - \text{Preamp Factor(dB)}$$

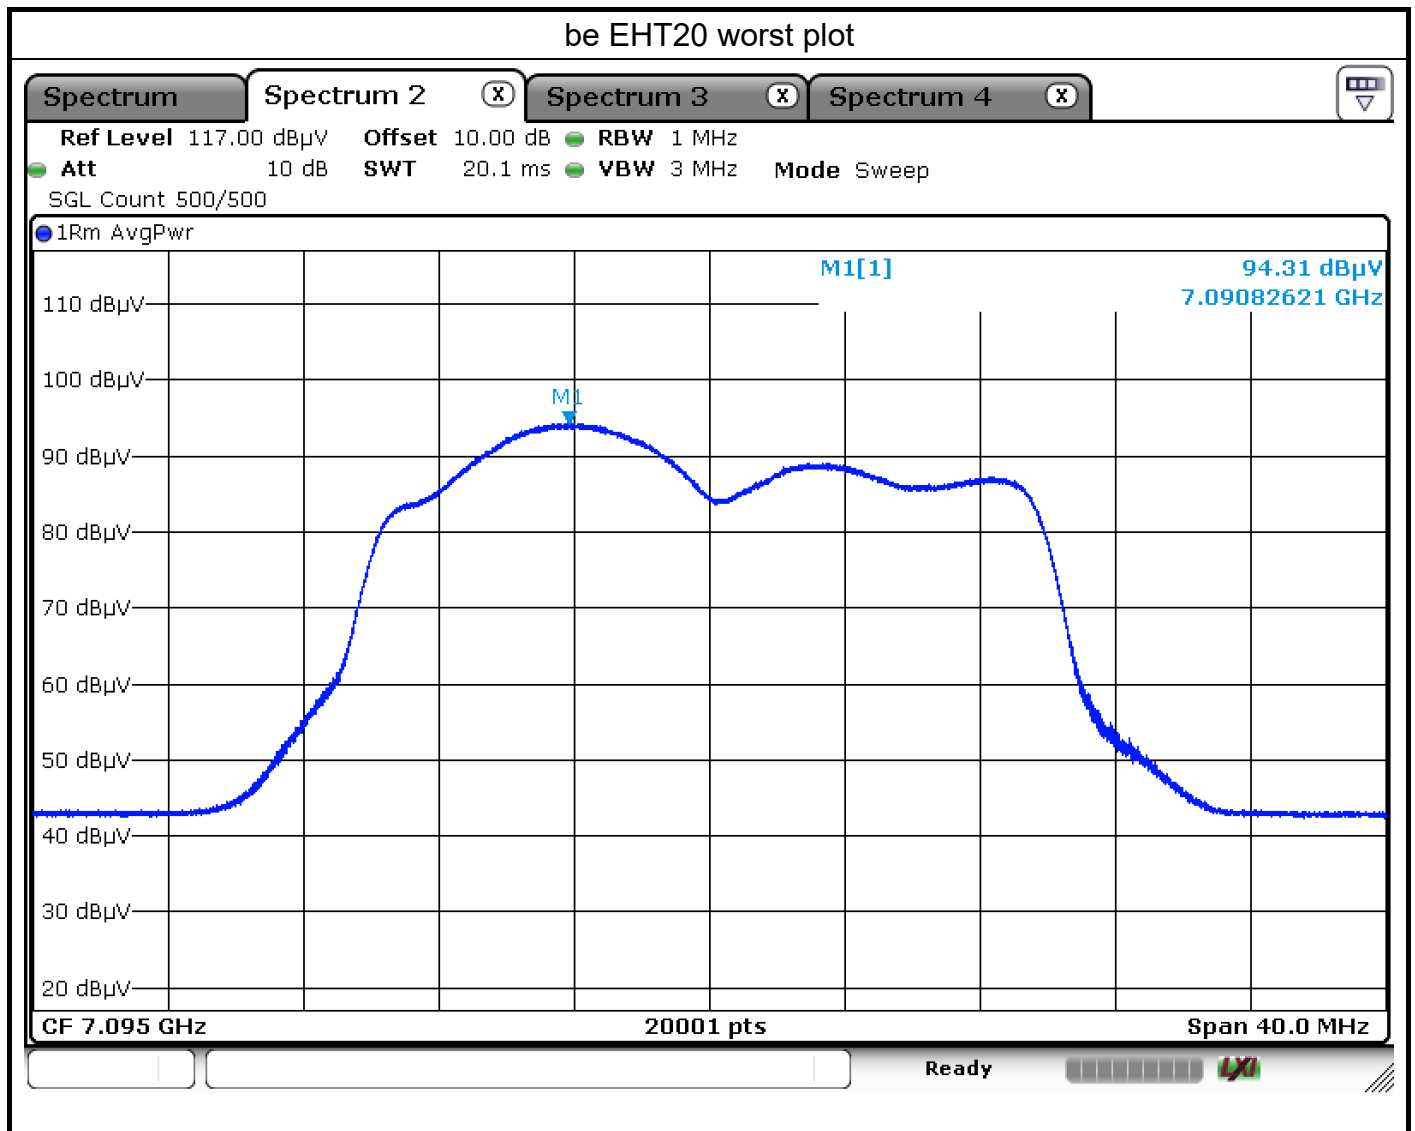

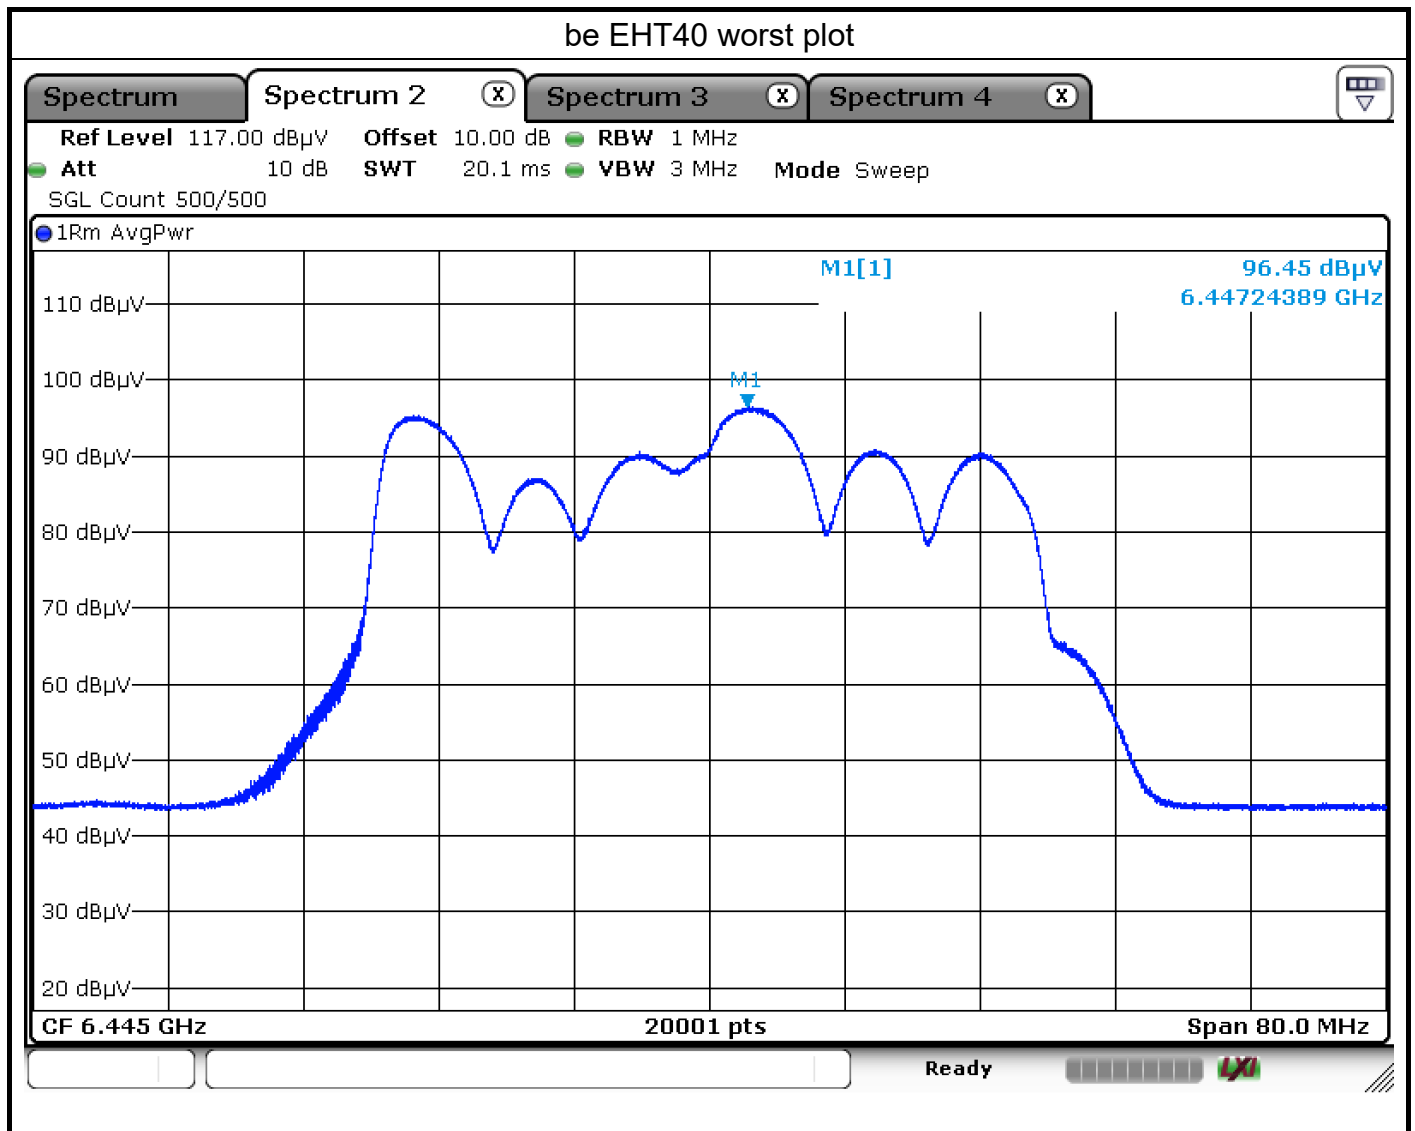

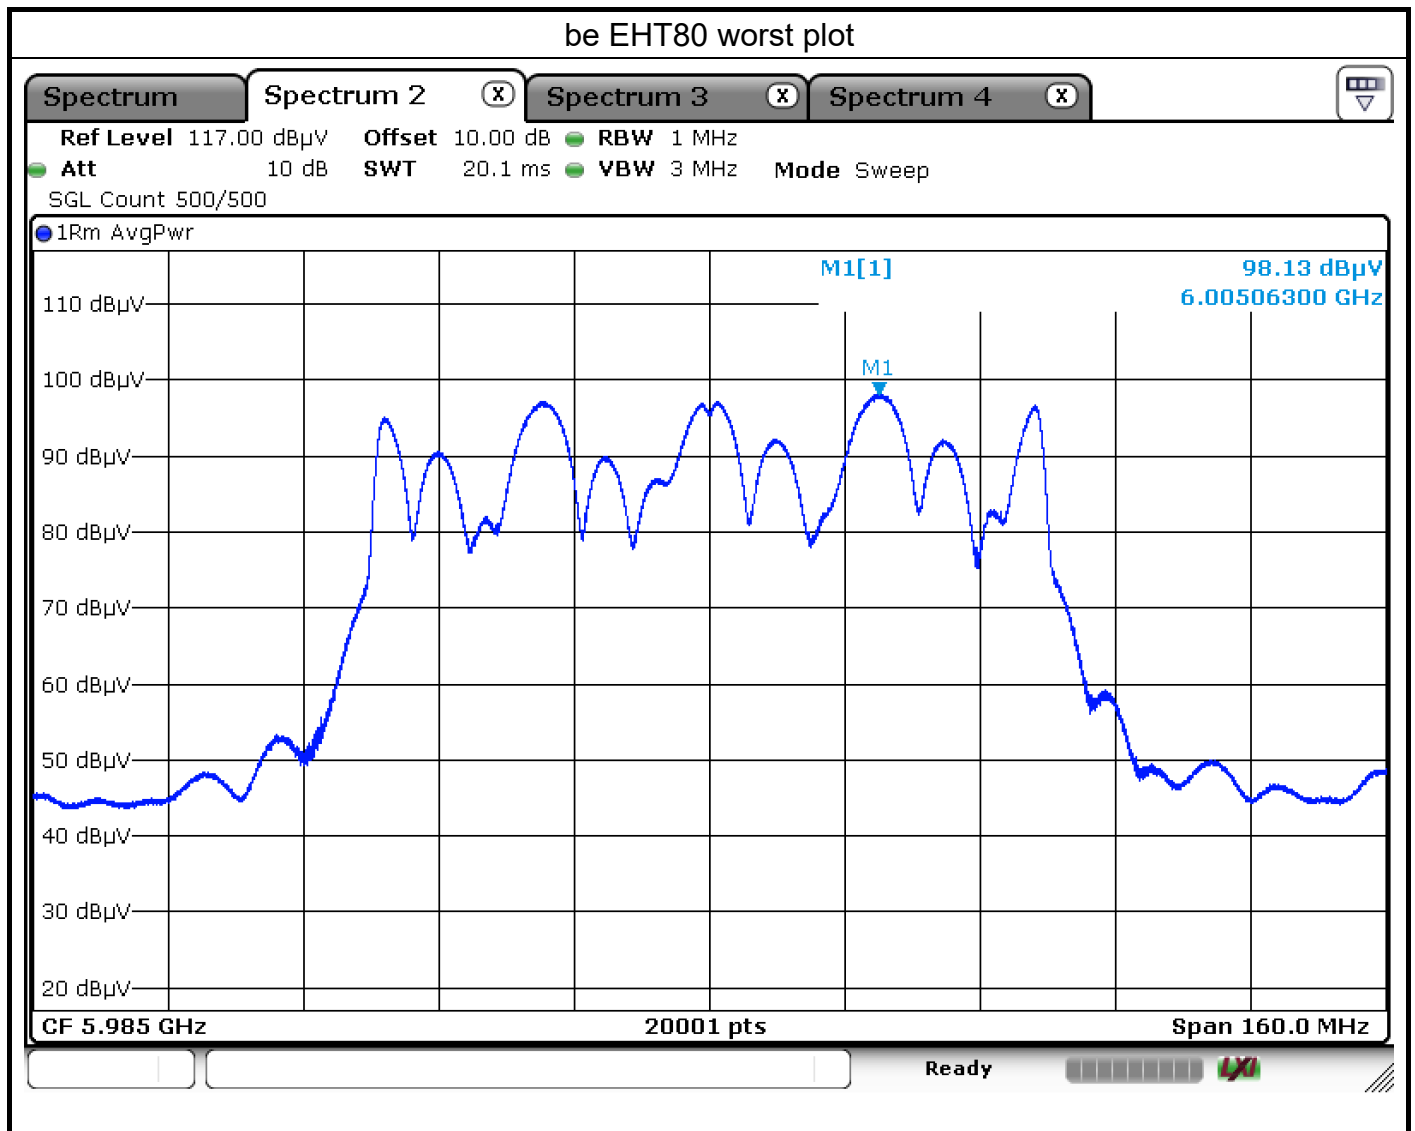

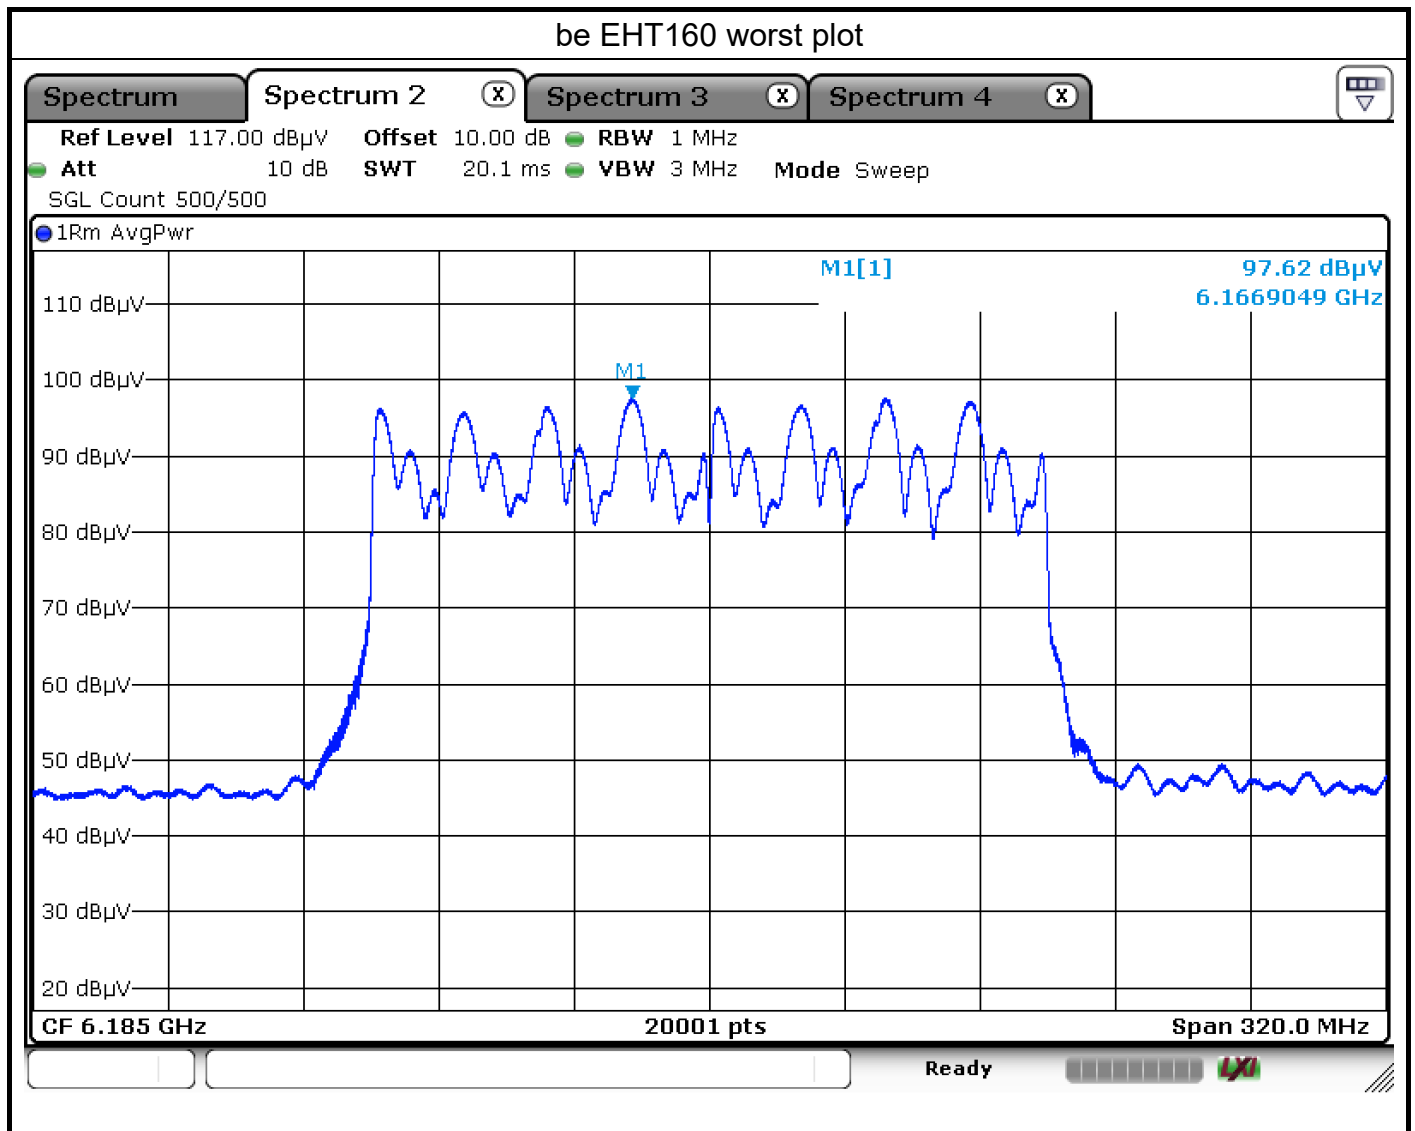

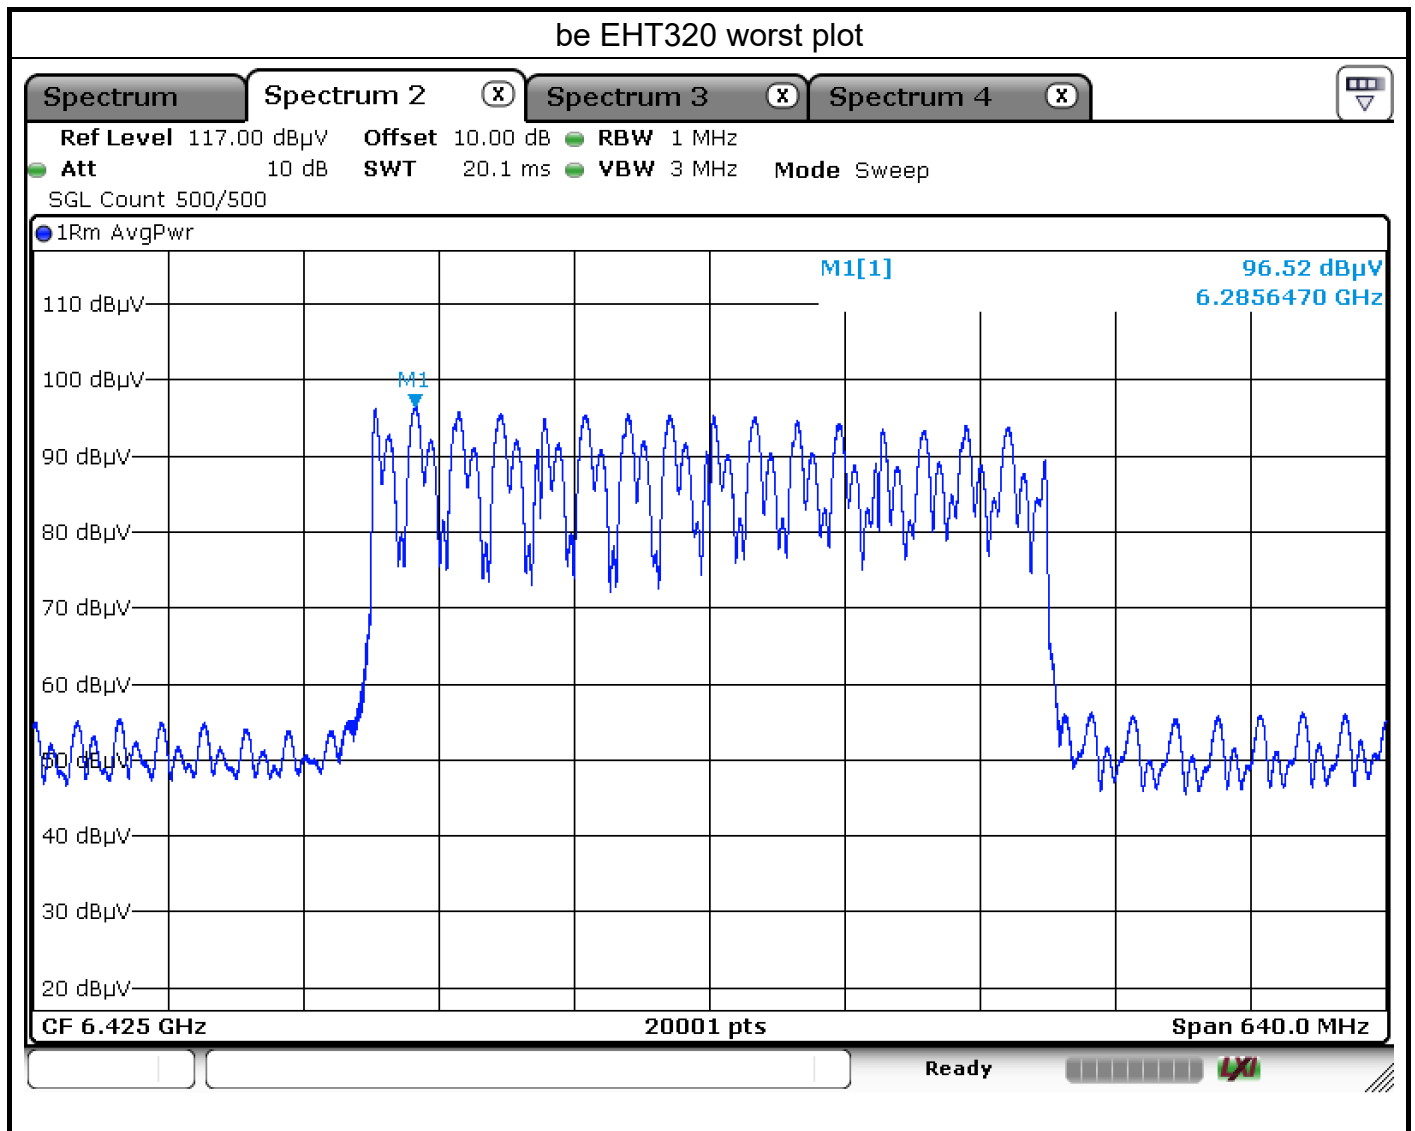



Unwanted Emissions (Below 1GHz)

Modulation	be EHT320		Test Freq. (MHz)		6585																																																																							
Polarization	Horizontal																																																																											
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):65																																																																												
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>48.43</td><td>27.46</td><td>40.00</td><td>-12.54</td><td>35.85</td><td>-8.39</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>103.72</td><td>25.65</td><td>43.50</td><td>-17.85</td><td>38.46</td><td>-12.81</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>208.48</td><td>28.22</td><td>43.50</td><td>-15.28</td><td>40.13</td><td>-11.91</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>216.24</td><td>28.30</td><td>46.00</td><td>-17.70</td><td>40.22</td><td>-11.92</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>481.05</td><td>31.61</td><td>46.00</td><td>-14.39</td><td>34.42</td><td>-2.81</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>682.81</td><td>36.26</td><td>46.00</td><td>-9.74</td><td>34.66</td><td>1.60</td><td>Peak</td><td>---</td><td>---</td></tr></table>								Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	48.43	27.46	40.00	-12.54	35.85	-8.39	Peak	---	---	2	103.72	25.65	43.50	-17.85	38.46	-12.81	Peak	---	---	3	208.48	28.22	43.50	-15.28	40.13	-11.91	Peak	---	---	4	216.24	28.30	46.00	-17.70	40.22	-11.92	Peak	---	---	5	481.05	31.61	46.00	-14.39	34.42	-2.81	Peak	---	---	6	682.81	36.26	46.00	-9.74	34.66	1.60	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																			
1	48.43	27.46	40.00	-12.54	35.85	-8.39	Peak	---	---																																																																			
2	103.72	25.65	43.50	-17.85	38.46	-12.81	Peak	---	---																																																																			
3	208.48	28.22	43.50	-15.28	40.13	-11.91	Peak	---	---																																																																			
4	216.24	28.30	46.00	-17.70	40.22	-11.92	Peak	---	---																																																																			
5	481.05	31.61	46.00	-14.39	34.42	-2.81	Peak	---	---																																																																			
6	682.81	36.26	46.00	-9.74	34.66	1.60	Peak	---	---																																																																			
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																												



Modulation	be EHT320	Test Freq. (MHz)	6585																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):65																																																																									
Level (dBuV/m) CLASS-B Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>45.52</td><td>36.08</td><td>40.00</td><td>-3.92</td><td>44.64</td><td>-8.56</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>94.99</td><td>30.12</td><td>43.50</td><td>-13.38</td><td>44.45</td><td>-14.33</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>179.38</td><td>25.34</td><td>43.50</td><td>-18.16</td><td>35.53</td><td>-10.19</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>361.74</td><td>29.49</td><td>46.00</td><td>-16.51</td><td>35.92</td><td>-6.43</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>543.13</td><td>32.64</td><td>46.00</td><td>-13.36</td><td>34.05</td><td>-1.41</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>682.81</td><td>35.97</td><td>46.00</td><td>-10.03</td><td>34.37</td><td>1.60</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	45.52	36.08	40.00	-3.92	44.64	-8.56	Peak	---	---	2	94.99	30.12	43.50	-13.38	44.45	-14.33	Peak	---	---	3	179.38	25.34	43.50	-18.16	35.53	-10.19	Peak	---	---	4	361.74	29.49	46.00	-16.51	35.92	-6.43	Peak	---	---	5	543.13	32.64	46.00	-13.36	34.05	-1.41	Peak	---	---	6	682.81	35.97	46.00	-10.03	34.37	1.60	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	45.52	36.08	40.00	-3.92	44.64	-8.56	Peak	---	---																																																																
2	94.99	30.12	43.50	-13.38	44.45	-14.33	Peak	---	---																																																																
3	179.38	25.34	43.50	-18.16	35.53	-10.19	Peak	---	---																																																																
4	361.74	29.49	46.00	-16.51	35.92	-6.43	Peak	---	---																																																																
5	543.13	32.64	46.00	-13.36	34.05	-1.41	Peak	---	---																																																																
6	682.81	35.97	46.00	-10.03	34.37	1.60	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									




Unwanted Emissions (Above 1GHz)

Modulation	be EHT20		Test Freq. (MHz)		5955																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																																																			
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.59</td><td>54.00</td><td>-29.41</td><td>32.12</td><td>-7.53</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>2</td><td>1131.00</td><td>37.92</td><td>74.00</td><td>-36.08</td><td>45.45</td><td>-7.53</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>3</td><td>7940.00</td><td>38.33</td><td>68.20</td><td>-29.87</td><td>31.67</td><td>6.66</td><td>Average</td><td>100</td><td>274</td></tr><tr><td>4</td><td>7940.00</td><td>51.61</td><td>88.20</td><td>-36.59</td><td>44.95</td><td>6.66</td><td>Peak</td><td>100</td><td>274</td></tr><tr><td>5</td><td>11910.00</td><td>39.59</td><td>54.00</td><td>-14.41</td><td>31.49</td><td>8.10</td><td>Average</td><td>100</td><td>167</td></tr><tr><td>6</td><td>11910.00</td><td>52.39</td><td>74.00</td><td>-21.61</td><td>44.29</td><td>8.10</td><td>Peak</td><td>100</td><td>167</td></tr></tbody></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	1131.00	24.59	54.00	-29.41	32.12	-7.53	Average	100	27	2	1131.00	37.92	74.00	-36.08	45.45	-7.53	Peak	100	27	3	7940.00	38.33	68.20	-29.87	31.67	6.66	Average	100	274	4	7940.00	51.61	88.20	-36.59	44.95	6.66	Peak	100	274	5	11910.00	39.59	54.00	-14.41	31.49	8.10	Average	100	167	6	11910.00	52.39	74.00	-21.61	44.29	8.10	Peak	100	167
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level			reading			High	Table																																																																																										
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																										
1	1131.00	24.59	54.00	-29.41	32.12	-7.53	Average	100	27																																																																																										
2	1131.00	37.92	74.00	-36.08	45.45	-7.53	Peak	100	27																																																																																										
3	7940.00	38.33	68.20	-29.87	31.67	6.66	Average	100	274																																																																																										
4	7940.00	51.61	88.20	-36.59	44.95	6.66	Peak	100	274																																																																																										
5	11910.00	39.59	54.00	-14.41	31.49	8.10	Average	100	167																																																																																										
6	11910.00	52.39	74.00	-21.61	44.29	8.10	Peak	100	167																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			



Modulation	be EHT20	Test Freq. (MHz)	5955																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>23.89</td><td>54.00</td><td>-30.11</td><td>31.42</td><td>-7.53</td><td>Average</td><td>100</td><td>120</td></tr><tr><td>2</td><td>1131.00</td><td>36.86</td><td>74.00</td><td>-37.14</td><td>44.39</td><td>-7.53</td><td>Peak</td><td>100</td><td>120</td></tr><tr><td>3</td><td>7940.00</td><td>37.20</td><td>68.20</td><td>-31.00</td><td>30.54</td><td>6.66</td><td>Average</td><td>100</td><td>132</td></tr><tr><td>4</td><td>7940.00</td><td>49.79</td><td>88.20</td><td>-38.41</td><td>43.13</td><td>6.66</td><td>Peak</td><td>100</td><td>132</td></tr><tr><td>5</td><td>11910.00</td><td>38.44</td><td>54.00</td><td>-15.56</td><td>30.34</td><td>8.10</td><td>Average</td><td>100</td><td>210</td></tr><tr><td>6</td><td>11910.00</td><td>51.73</td><td>74.00</td><td>-22.27</td><td>43.63</td><td>8.10</td><td>Peak</td><td>100</td><td>210</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.89	54.00	-30.11	31.42	-7.53	Average	100	120	2	1131.00	36.86	74.00	-37.14	44.39	-7.53	Peak	100	120	3	7940.00	37.20	68.20	-31.00	30.54	6.66	Average	100	132	4	7940.00	49.79	88.20	-38.41	43.13	6.66	Peak	100	132	5	11910.00	38.44	54.00	-15.56	30.34	8.10	Average	100	210	6	11910.00	51.73	74.00	-22.27	43.63	8.10	Peak	100	210
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.89	54.00	-30.11	31.42	-7.53	Average	100	120																																																																
2	1131.00	36.86	74.00	-37.14	44.39	-7.53	Peak	100	120																																																																
3	7940.00	37.20	68.20	-31.00	30.54	6.66	Average	100	132																																																																
4	7940.00	49.79	88.20	-38.41	43.13	6.66	Peak	100	132																																																																
5	11910.00	38.44	54.00	-15.56	30.34	8.10	Average	100	210																																																																
6	11910.00	51.73	74.00	-22.27	43.63	8.10	Peak	100	210																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

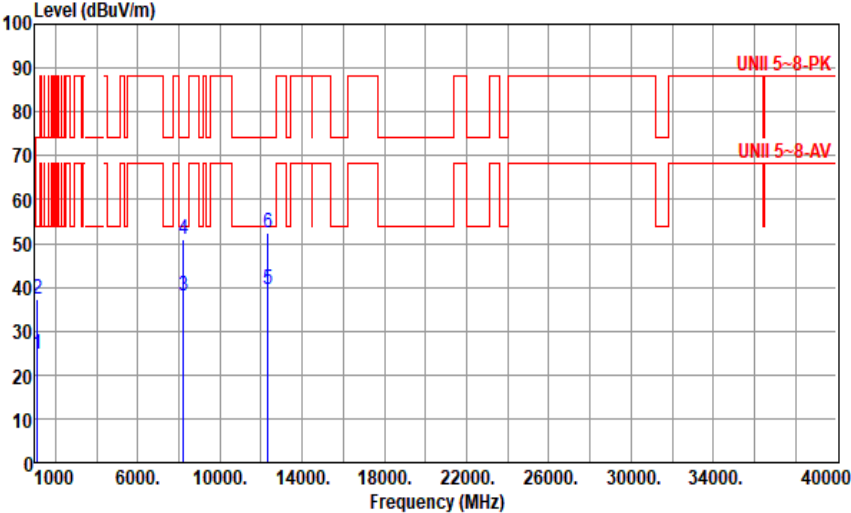

Modulation	be EHT20	Test Freq. (MHz)	6175																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.90</td><td>54.00</td><td>-29.10</td><td>32.43</td><td>-7.53</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>2</td><td>1131.00</td><td>37.43</td><td>74.00</td><td>-36.57</td><td>44.96</td><td>-7.53</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>3</td><td>8233.33</td><td>37.92</td><td>54.00</td><td>-16.08</td><td>31.43</td><td>6.49</td><td>Average</td><td>100</td><td>256</td></tr><tr><td>4</td><td>8233.33</td><td>50.75</td><td>74.00</td><td>-23.25</td><td>44.26</td><td>6.49</td><td>Peak</td><td>100</td><td>256</td></tr><tr><td>5</td><td>12350.00</td><td>39.52</td><td>54.00</td><td>-14.48</td><td>31.87</td><td>7.65</td><td>Average</td><td>100</td><td>314</td></tr><tr><td>6</td><td>12350.00</td><td>52.58</td><td>74.00</td><td>-21.42</td><td>44.93</td><td>7.65</td><td>Peak</td><td>100</td><td>314</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.90	54.00	-29.10	32.43	-7.53	Average	100	177	2	1131.00	37.43	74.00	-36.57	44.96	-7.53	Peak	100	177	3	8233.33	37.92	54.00	-16.08	31.43	6.49	Average	100	256	4	8233.33	50.75	74.00	-23.25	44.26	6.49	Peak	100	256	5	12350.00	39.52	54.00	-14.48	31.87	7.65	Average	100	314	6	12350.00	52.58	74.00	-21.42	44.93	7.65	Peak	100	314
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.90	54.00	-29.10	32.43	-7.53	Average	100	177																																																																
2	1131.00	37.43	74.00	-36.57	44.96	-7.53	Peak	100	177																																																																
3	8233.33	37.92	54.00	-16.08	31.43	6.49	Average	100	256																																																																
4	8233.33	50.75	74.00	-23.25	44.26	6.49	Peak	100	256																																																																
5	12350.00	39.52	54.00	-14.48	31.87	7.65	Average	100	314																																																																
6	12350.00	52.58	74.00	-21.42	44.93	7.65	Peak	100	314																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT20	Test Freq. (MHz)	6175																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.13</td><td>54.00</td><td>-29.87</td><td>31.66</td><td>-7.53</td><td>Average</td><td>100</td><td>223</td></tr><tr><td>2</td><td>1131.00</td><td>36.23</td><td>74.00</td><td>-37.77</td><td>43.76</td><td>-7.53</td><td>Peak</td><td>100</td><td>223</td></tr><tr><td>3</td><td>8233.33</td><td>36.76</td><td>54.00</td><td>-17.24</td><td>30.27</td><td>6.49</td><td>Average</td><td>100</td><td>214</td></tr><tr><td>4</td><td>8233.33</td><td>49.75</td><td>74.00</td><td>-24.25</td><td>43.26</td><td>6.49</td><td>Peak</td><td>100</td><td>214</td></tr><tr><td>5</td><td>12350.00</td><td>37.83</td><td>54.00</td><td>-16.17</td><td>30.18</td><td>7.65</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>6</td><td>12350.00</td><td>51.32</td><td>74.00</td><td>-22.68</td><td>43.67</td><td>7.65</td><td>Peak</td><td>100</td><td>162</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.13	54.00	-29.87	31.66	-7.53	Average	100	223	2	1131.00	36.23	74.00	-37.77	43.76	-7.53	Peak	100	223	3	8233.33	36.76	54.00	-17.24	30.27	6.49	Average	100	214	4	8233.33	49.75	74.00	-24.25	43.26	6.49	Peak	100	214	5	12350.00	37.83	54.00	-16.17	30.18	7.65	Average	100	162	6	12350.00	51.32	74.00	-22.68	43.67	7.65	Peak	100	162
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.13	54.00	-29.87	31.66	-7.53	Average	100	223																																																																
2	1131.00	36.23	74.00	-37.77	43.76	-7.53	Peak	100	223																																																																
3	8233.33	36.76	54.00	-17.24	30.27	6.49	Average	100	214																																																																
4	8233.33	49.75	74.00	-24.25	43.26	6.49	Peak	100	214																																																																
5	12350.00	37.83	54.00	-16.17	30.18	7.65	Average	100	162																																																																
6	12350.00	51.32	74.00	-22.68	43.67	7.65	Peak	100	162																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT20	Test Freq. (MHz)	6415																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.70</td><td>54.00</td><td>-29.30</td><td>32.23</td><td>-7.53</td><td>Average</td><td>100</td><td>49</td></tr><tr><td>2</td><td>1131.00</td><td>38.22</td><td>74.00</td><td>-35.78</td><td>45.75</td><td>-7.53</td><td>Peak</td><td>100</td><td>49</td></tr><tr><td>3</td><td>8553.33</td><td>38.45</td><td>68.20</td><td>-29.75</td><td>31.69</td><td>6.76</td><td>Average</td><td>100</td><td>358</td></tr><tr><td>4</td><td>8553.33</td><td>51.47</td><td>88.20</td><td>-36.73</td><td>44.71</td><td>6.76</td><td>Peak</td><td>100</td><td>358</td></tr><tr><td>5</td><td>12830.00</td><td>39.78</td><td>68.20</td><td>-28.42</td><td>31.71</td><td>8.07</td><td>Average</td><td>100</td><td>68</td></tr><tr><td>6</td><td>12830.00</td><td>52.46</td><td>88.20</td><td>-35.74</td><td>44.39</td><td>8.07</td><td>Peak</td><td>100</td><td>68</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.70	54.00	-29.30	32.23	-7.53	Average	100	49	2	1131.00	38.22	74.00	-35.78	45.75	-7.53	Peak	100	49	3	8553.33	38.45	68.20	-29.75	31.69	6.76	Average	100	358	4	8553.33	51.47	88.20	-36.73	44.71	6.76	Peak	100	358	5	12830.00	39.78	68.20	-28.42	31.71	8.07	Average	100	68	6	12830.00	52.46	88.20	-35.74	44.39	8.07	Peak	100	68
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.70	54.00	-29.30	32.23	-7.53	Average	100	49																																																																
2	1131.00	38.22	74.00	-35.78	45.75	-7.53	Peak	100	49																																																																
3	8553.33	38.45	68.20	-29.75	31.69	6.76	Average	100	358																																																																
4	8553.33	51.47	88.20	-36.73	44.71	6.76	Peak	100	358																																																																
5	12830.00	39.78	68.20	-28.42	31.71	8.07	Average	100	68																																																																
6	12830.00	52.46	88.20	-35.74	44.39	8.07	Peak	100	68																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT20	Test Freq. (MHz)	6415																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.11</td><td>54.00</td><td>-29.89</td><td>31.64</td><td>-7.53</td><td>Average</td><td>100</td><td>141</td></tr><tr><td>2</td><td>1131.00</td><td>36.59</td><td>74.00</td><td>-37.41</td><td>44.12</td><td>-7.53</td><td>Peak</td><td>100</td><td>141</td></tr><tr><td>3</td><td>8553.33</td><td>37.17</td><td>68.20</td><td>-31.03</td><td>30.41</td><td>6.76</td><td>Average</td><td>100</td><td>186</td></tr><tr><td>4</td><td>8553.33</td><td>50.02</td><td>88.20</td><td>-38.18</td><td>43.26</td><td>6.76</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>5</td><td>12830.00</td><td>38.35</td><td>68.20</td><td>-29.85</td><td>30.28</td><td>8.07</td><td>Average</td><td>100</td><td>284</td></tr><tr><td>6</td><td>12830.00</td><td>51.25</td><td>88.20</td><td>-36.95</td><td>43.18</td><td>8.07</td><td>Peak</td><td>100</td><td>284</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.11	54.00	-29.89	31.64	-7.53	Average	100	141	2	1131.00	36.59	74.00	-37.41	44.12	-7.53	Peak	100	141	3	8553.33	37.17	68.20	-31.03	30.41	6.76	Average	100	186	4	8553.33	50.02	88.20	-38.18	43.26	6.76	Peak	100	186	5	12830.00	38.35	68.20	-29.85	30.28	8.07	Average	100	284	6	12830.00	51.25	88.20	-36.95	43.18	8.07	Peak	100	284
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.11	54.00	-29.89	31.64	-7.53	Average	100	141																																																																
2	1131.00	36.59	74.00	-37.41	44.12	-7.53	Peak	100	141																																																																
3	8553.33	37.17	68.20	-31.03	30.41	6.76	Average	100	186																																																																
4	8553.33	50.02	88.20	-38.18	43.26	6.76	Peak	100	186																																																																
5	12830.00	38.35	68.20	-29.85	30.28	8.07	Average	100	284																																																																
6	12830.00	51.25	88.20	-36.95	43.18	8.07	Peak	100	284																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT20	Test Freq. (MHz)	6435																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
Level (dBuV/m) UNII 5~8-PK UNII 5~8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.93</td><td>54.00</td><td>-29.07</td><td>32.46</td><td>-7.53</td><td>Average</td><td>100</td><td>337</td></tr><tr><td>2</td><td>1131.00</td><td>37.52</td><td>74.00</td><td>-36.48</td><td>45.05</td><td>-7.53</td><td>Peak</td><td>100</td><td>337</td></tr><tr><td>3</td><td>8580.00</td><td>38.79</td><td>68.20</td><td>-29.41</td><td>31.92</td><td>6.87</td><td>Average</td><td>100</td><td>315</td></tr><tr><td>4</td><td>8580.00</td><td>51.20</td><td>88.20</td><td>-37.00</td><td>44.33</td><td>6.87</td><td>Peak</td><td>100</td><td>315</td></tr><tr><td>5</td><td>12870.00</td><td>39.81</td><td>68.20</td><td>-28.39</td><td>31.79</td><td>8.02</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>6</td><td>12870.00</td><td>52.64</td><td>88.20</td><td>-35.56</td><td>44.62</td><td>8.02</td><td>Peak</td><td>100</td><td>218</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.93	54.00	-29.07	32.46	-7.53	Average	100	337	2	1131.00	37.52	74.00	-36.48	45.05	-7.53	Peak	100	337	3	8580.00	38.79	68.20	-29.41	31.92	6.87	Average	100	315	4	8580.00	51.20	88.20	-37.00	44.33	6.87	Peak	100	315	5	12870.00	39.81	68.20	-28.39	31.79	8.02	Average	100	218	6	12870.00	52.64	88.20	-35.56	44.62	8.02	Peak	100	218
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.93	54.00	-29.07	32.46	-7.53	Average	100	337																																																																
2	1131.00	37.52	74.00	-36.48	45.05	-7.53	Peak	100	337																																																																
3	8580.00	38.79	68.20	-29.41	31.92	6.87	Average	100	315																																																																
4	8580.00	51.20	88.20	-37.00	44.33	6.87	Peak	100	315																																																																
5	12870.00	39.81	68.20	-28.39	31.79	8.02	Average	100	218																																																																
6	12870.00	52.64	88.20	-35.56	44.62	8.02	Peak	100	218																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT20	Test Freq. (MHz)	6435																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.28</td><td>54.00</td><td>-29.72</td><td>31.81</td><td>-7.53</td><td>Average</td><td>100</td><td>323</td></tr><tr><td>2</td><td>1131.00</td><td>36.15</td><td>74.00</td><td>-37.85</td><td>43.68</td><td>-7.53</td><td>Peak</td><td>100</td><td>323</td></tr><tr><td>3</td><td>8580.00</td><td>37.42</td><td>68.20</td><td>-30.78</td><td>30.55</td><td>6.87</td><td>Average</td><td>100</td><td>71</td></tr><tr><td>4</td><td>8580.00</td><td>50.62</td><td>88.20</td><td>-37.58</td><td>43.75</td><td>6.87</td><td>Peak</td><td>100</td><td>71</td></tr><tr><td>5</td><td>12870.00</td><td>38.57</td><td>68.20</td><td>-29.63</td><td>30.55</td><td>8.02</td><td>Average</td><td>100</td><td>345</td></tr><tr><td>6</td><td>12870.00</td><td>51.87</td><td>88.20</td><td>-36.33</td><td>43.85</td><td>8.02</td><td>Peak</td><td>100</td><td>345</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.28	54.00	-29.72	31.81	-7.53	Average	100	323	2	1131.00	36.15	74.00	-37.85	43.68	-7.53	Peak	100	323	3	8580.00	37.42	68.20	-30.78	30.55	6.87	Average	100	71	4	8580.00	50.62	88.20	-37.58	43.75	6.87	Peak	100	71	5	12870.00	38.57	68.20	-29.63	30.55	8.02	Average	100	345	6	12870.00	51.87	88.20	-36.33	43.85	8.02	Peak	100	345
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.28	54.00	-29.72	31.81	-7.53	Average	100	323																																																																
2	1131.00	36.15	74.00	-37.85	43.68	-7.53	Peak	100	323																																																																
3	8580.00	37.42	68.20	-30.78	30.55	6.87	Average	100	71																																																																
4	8580.00	50.62	88.20	-37.58	43.75	6.87	Peak	100	71																																																																
5	12870.00	38.57	68.20	-29.63	30.55	8.02	Average	100	345																																																																
6	12870.00	51.87	88.20	-36.33	43.85	8.02	Peak	100	345																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT20	Test Freq. (MHz)	6475																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
Level (dBuV/m) UNII 5~8-PK UNII 5~8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.19</td><td>54.00</td><td>-29.81</td><td>31.72</td><td>-7.53</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>2</td><td>1131.00</td><td>37.52</td><td>74.00</td><td>-36.48</td><td>45.05</td><td>-7.53</td><td>Peak</td><td>100</td><td>65</td></tr><tr><td>3</td><td>8633.33</td><td>38.59</td><td>68.20</td><td>-29.61</td><td>31.47</td><td>7.12</td><td>Average</td><td>100</td><td>329</td></tr><tr><td>4</td><td>8633.33</td><td>51.85</td><td>88.20</td><td>-36.35</td><td>44.73</td><td>7.12</td><td>Peak</td><td>100</td><td>329</td></tr><tr><td>5</td><td>12950.00</td><td>39.50</td><td>68.20</td><td>-28.70</td><td>31.47</td><td>8.03</td><td>Average</td><td>100</td><td>92</td></tr><tr><td>6</td><td>12950.00</td><td>52.16</td><td>88.20</td><td>-36.04</td><td>44.13</td><td>8.03</td><td>Peak</td><td>100</td><td>92</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.19	54.00	-29.81	31.72	-7.53	Average	100	65	2	1131.00	37.52	74.00	-36.48	45.05	-7.53	Peak	100	65	3	8633.33	38.59	68.20	-29.61	31.47	7.12	Average	100	329	4	8633.33	51.85	88.20	-36.35	44.73	7.12	Peak	100	329	5	12950.00	39.50	68.20	-28.70	31.47	8.03	Average	100	92	6	12950.00	52.16	88.20	-36.04	44.13	8.03	Peak	100	92
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.19	54.00	-29.81	31.72	-7.53	Average	100	65																																																																
2	1131.00	37.52	74.00	-36.48	45.05	-7.53	Peak	100	65																																																																
3	8633.33	38.59	68.20	-29.61	31.47	7.12	Average	100	329																																																																
4	8633.33	51.85	88.20	-36.35	44.73	7.12	Peak	100	329																																																																
5	12950.00	39.50	68.20	-28.70	31.47	8.03	Average	100	92																																																																
6	12950.00	52.16	88.20	-36.04	44.13	8.03	Peak	100	92																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

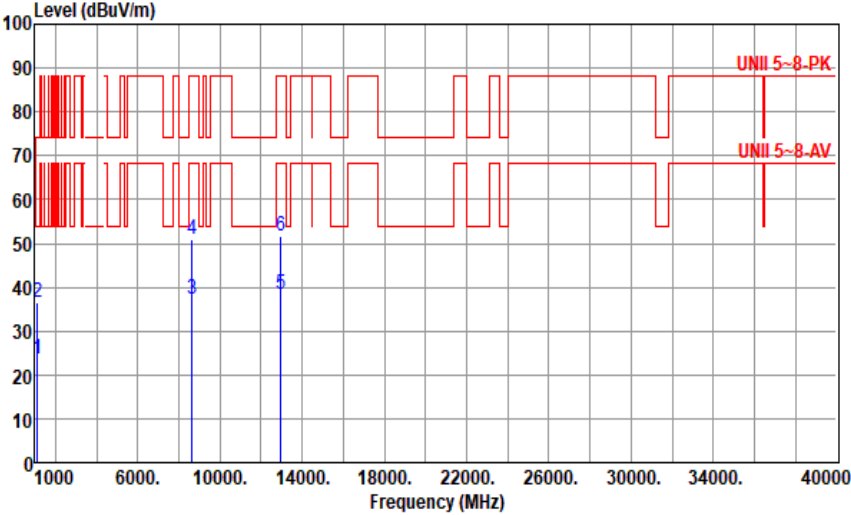

Modulation	be EHT20	Test Freq. (MHz)	6475																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>23.59</td><td>54.00</td><td>-30.41</td><td>31.12</td><td>-7.53</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>2</td><td>1131.00</td><td>36.36</td><td>74.00</td><td>-37.64</td><td>43.89</td><td>-7.53</td><td>Peak</td><td>100</td><td>122</td></tr><tr><td>3</td><td>8633.33</td><td>37.36</td><td>68.20</td><td>-30.84</td><td>30.24</td><td>7.12</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>4</td><td>8633.33</td><td>50.74</td><td>88.20</td><td>-37.46</td><td>43.62</td><td>7.12</td><td>Peak</td><td>100</td><td>148</td></tr><tr><td>5</td><td>12950.00</td><td>38.45</td><td>68.20</td><td>-29.75</td><td>30.42</td><td>8.03</td><td>Average</td><td>100</td><td>267</td></tr><tr><td>6</td><td>12950.00</td><td>51.51</td><td>88.20</td><td>-36.69</td><td>43.48</td><td>8.03</td><td>Peak</td><td>100</td><td>267</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.59	54.00	-30.41	31.12	-7.53	Average	100	122	2	1131.00	36.36	74.00	-37.64	43.89	-7.53	Peak	100	122	3	8633.33	37.36	68.20	-30.84	30.24	7.12	Average	100	148	4	8633.33	50.74	88.20	-37.46	43.62	7.12	Peak	100	148	5	12950.00	38.45	68.20	-29.75	30.42	8.03	Average	100	267	6	12950.00	51.51	88.20	-36.69	43.48	8.03	Peak	100	267
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.59	54.00	-30.41	31.12	-7.53	Average	100	122																																																																
2	1131.00	36.36	74.00	-37.64	43.89	-7.53	Peak	100	122																																																																
3	8633.33	37.36	68.20	-30.84	30.24	7.12	Average	100	148																																																																
4	8633.33	50.74	88.20	-37.46	43.62	7.12	Peak	100	148																																																																
5	12950.00	38.45	68.20	-29.75	30.42	8.03	Average	100	267																																																																
6	12950.00	51.51	88.20	-36.69	43.48	8.03	Peak	100	267																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

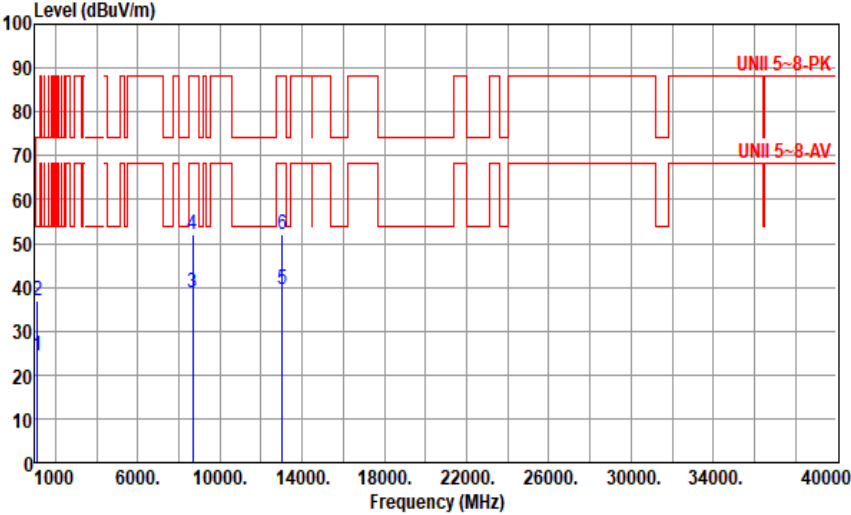

Modulation	be EHT20	Test Freq. (MHz)	6515																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.50</td><td>54.00</td><td>-29.50</td><td>32.03</td><td>-7.53</td><td>Average</td><td>100</td><td>184</td></tr><tr><td>2</td><td>1131.00</td><td>37.07</td><td>74.00</td><td>-36.93</td><td>44.60</td><td>-7.53</td><td>Peak</td><td>100</td><td>184</td></tr><tr><td>3</td><td>8686.67</td><td>38.83</td><td>68.20</td><td>-29.37</td><td>31.49</td><td>7.34</td><td>Average</td><td>100</td><td>315</td></tr><tr><td>4</td><td>8686.67</td><td>51.97</td><td>88.20</td><td>-36.23</td><td>44.63</td><td>7.34</td><td>Peak</td><td>100</td><td>315</td></tr><tr><td>5</td><td>13030.00</td><td>39.45</td><td>68.20</td><td>-28.75</td><td>31.59</td><td>7.86</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>6</td><td>13030.00</td><td>52.18</td><td>88.20</td><td>-36.02</td><td>44.32</td><td>7.86</td><td>Peak</td><td>100</td><td>117</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.50	54.00	-29.50	32.03	-7.53	Average	100	184	2	1131.00	37.07	74.00	-36.93	44.60	-7.53	Peak	100	184	3	8686.67	38.83	68.20	-29.37	31.49	7.34	Average	100	315	4	8686.67	51.97	88.20	-36.23	44.63	7.34	Peak	100	315	5	13030.00	39.45	68.20	-28.75	31.59	7.86	Average	100	117	6	13030.00	52.18	88.20	-36.02	44.32	7.86	Peak	100	117
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.50	54.00	-29.50	32.03	-7.53	Average	100	184																																																																
2	1131.00	37.07	74.00	-36.93	44.60	-7.53	Peak	100	184																																																																
3	8686.67	38.83	68.20	-29.37	31.49	7.34	Average	100	315																																																																
4	8686.67	51.97	88.20	-36.23	44.63	7.34	Peak	100	315																																																																
5	13030.00	39.45	68.20	-28.75	31.59	7.86	Average	100	117																																																																
6	13030.00	52.18	88.20	-36.02	44.32	7.86	Peak	100	117																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT20	Test Freq. (MHz)	6515																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>23.70</td><td>54.00</td><td>-30.30</td><td>31.23</td><td>-7.53</td><td>Average</td><td>100</td><td>239</td></tr><tr><td>2</td><td>1131.00</td><td>35.83</td><td>74.00</td><td>-38.17</td><td>43.36</td><td>-7.53</td><td>Peak</td><td>100</td><td>239</td></tr><tr><td>3</td><td>8686.67</td><td>38.09</td><td>68.20</td><td>-30.11</td><td>30.75</td><td>7.34</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>4</td><td>8686.67</td><td>50.63</td><td>88.20</td><td>-37.57</td><td>43.29</td><td>7.34</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>5</td><td>13030.00</td><td>38.41</td><td>68.20</td><td>-29.79</td><td>30.55</td><td>7.86</td><td>Average</td><td>100</td><td>165</td></tr><tr><td>6</td><td>13030.00</td><td>51.57</td><td>88.20</td><td>-36.63</td><td>43.71</td><td>7.86</td><td>Peak</td><td>100</td><td>165</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.70	54.00	-30.30	31.23	-7.53	Average	100	239	2	1131.00	35.83	74.00	-38.17	43.36	-7.53	Peak	100	239	3	8686.67	38.09	68.20	-30.11	30.75	7.34	Average	100	211	4	8686.67	50.63	88.20	-37.57	43.29	7.34	Peak	100	211	5	13030.00	38.41	68.20	-29.79	30.55	7.86	Average	100	165	6	13030.00	51.57	88.20	-36.63	43.71	7.86	Peak	100	165
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.70	54.00	-30.30	31.23	-7.53	Average	100	239																																																																
2	1131.00	35.83	74.00	-38.17	43.36	-7.53	Peak	100	239																																																																
3	8686.67	38.09	68.20	-30.11	30.75	7.34	Average	100	211																																																																
4	8686.67	50.63	88.20	-37.57	43.29	7.34	Peak	100	211																																																																
5	13030.00	38.41	68.20	-29.79	30.55	7.86	Average	100	165																																																																
6	13030.00	51.57	88.20	-36.63	43.71	7.86	Peak	100	165																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT20	Test Freq. (MHz)	6535																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
Level (dBuV/m) UNII 5~8-PK UNII 5~8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.57</td><td>54.00</td><td>-29.43</td><td>32.10</td><td>-7.53</td><td>Average</td><td>100</td><td>43</td></tr><tr><td>2</td><td>1131.00</td><td>37.82</td><td>74.00</td><td>-36.18</td><td>45.35</td><td>-7.53</td><td>Peak</td><td>100</td><td>43</td></tr><tr><td>3</td><td>8713.33</td><td>39.14</td><td>68.20</td><td>-29.06</td><td>31.77</td><td>7.37</td><td>Average</td><td>100</td><td>282</td></tr><tr><td>4</td><td>8713.33</td><td>51.85</td><td>88.20</td><td>-36.35</td><td>44.48</td><td>7.37</td><td>Peak</td><td>100</td><td>282</td></tr><tr><td>5</td><td>13070.00</td><td>39.19</td><td>68.20</td><td>-29.01</td><td>31.46</td><td>7.73</td><td>Average</td><td>100</td><td>168</td></tr><tr><td>6</td><td>13070.00</td><td>52.09</td><td>88.20</td><td>-36.11</td><td>44.36</td><td>7.73</td><td>Peak</td><td>100</td><td>168</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.57	54.00	-29.43	32.10	-7.53	Average	100	43	2	1131.00	37.82	74.00	-36.18	45.35	-7.53	Peak	100	43	3	8713.33	39.14	68.20	-29.06	31.77	7.37	Average	100	282	4	8713.33	51.85	88.20	-36.35	44.48	7.37	Peak	100	282	5	13070.00	39.19	68.20	-29.01	31.46	7.73	Average	100	168	6	13070.00	52.09	88.20	-36.11	44.36	7.73	Peak	100	168
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.57	54.00	-29.43	32.10	-7.53	Average	100	43																																																																
2	1131.00	37.82	74.00	-36.18	45.35	-7.53	Peak	100	43																																																																
3	8713.33	39.14	68.20	-29.06	31.77	7.37	Average	100	282																																																																
4	8713.33	51.85	88.20	-36.35	44.48	7.37	Peak	100	282																																																																
5	13070.00	39.19	68.20	-29.01	31.46	7.73	Average	100	168																																																																
6	13070.00	52.09	88.20	-36.11	44.36	7.73	Peak	100	168																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT20	Test Freq. (MHz)	6535																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>23.71</td><td>54.00</td><td>-30.29</td><td>31.24</td><td>-7.53</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>2</td><td>1131.00</td><td>36.19</td><td>74.00</td><td>-37.81</td><td>43.72</td><td>-7.53</td><td>Peak</td><td>100</td><td>115</td></tr><tr><td>3</td><td>8713.33</td><td>38.19</td><td>68.20</td><td>-30.01</td><td>30.82</td><td>7.37</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>4</td><td>8713.33</td><td>51.32</td><td>88.20</td><td>-36.88</td><td>43.95</td><td>7.37</td><td>Peak</td><td>100</td><td>176</td></tr><tr><td>5</td><td>13070.00</td><td>38.35</td><td>68.20</td><td>-29.85</td><td>30.62</td><td>7.73</td><td>Average</td><td>100</td><td>214</td></tr><tr><td>6</td><td>13070.00</td><td>50.99</td><td>88.20</td><td>-37.21</td><td>43.26</td><td>7.73</td><td>Peak</td><td>100</td><td>214</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.71	54.00	-30.29	31.24	-7.53	Average	100	115	2	1131.00	36.19	74.00	-37.81	43.72	-7.53	Peak	100	115	3	8713.33	38.19	68.20	-30.01	30.82	7.37	Average	100	176	4	8713.33	51.32	88.20	-36.88	43.95	7.37	Peak	100	176	5	13070.00	38.35	68.20	-29.85	30.62	7.73	Average	100	214	6	13070.00	50.99	88.20	-37.21	43.26	7.73	Peak	100	214
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.71	54.00	-30.29	31.24	-7.53	Average	100	115																																																																
2	1131.00	36.19	74.00	-37.81	43.72	-7.53	Peak	100	115																																																																
3	8713.33	38.19	68.20	-30.01	30.82	7.37	Average	100	176																																																																
4	8713.33	51.32	88.20	-36.88	43.95	7.37	Peak	100	176																																																																
5	13070.00	38.35	68.20	-29.85	30.62	7.73	Average	100	214																																																																
6	13070.00	50.99	88.20	-37.21	43.26	7.73	Peak	100	214																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

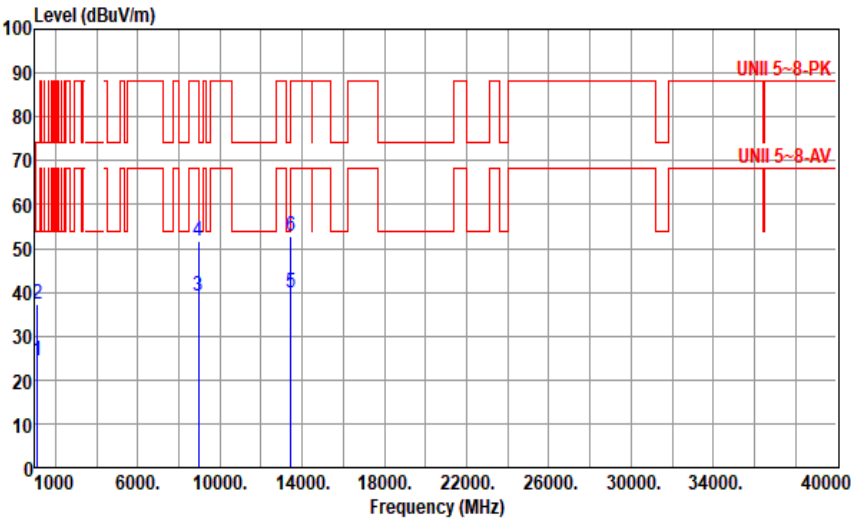

Modulation	be EHT20	Test Freq. (MHz)	6715																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.53</td><td>54.00</td><td>-29.47</td><td>32.06</td><td>-7.53</td><td>Average</td><td>100</td><td>314</td></tr><tr><td>2</td><td>1131.00</td><td>37.12</td><td>74.00</td><td>-36.88</td><td>44.65</td><td>-7.53</td><td>Peak</td><td>100</td><td>314</td></tr><tr><td>3</td><td>8953.33</td><td>39.04</td><td>68.20</td><td>-29.16</td><td>31.81</td><td>7.23</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>4</td><td>8953.33</td><td>51.59</td><td>88.20</td><td>-36.61</td><td>44.36</td><td>7.23</td><td>Peak</td><td>100</td><td>35</td></tr><tr><td>5</td><td>13430.00</td><td>40.03</td><td>68.20</td><td>-28.17</td><td>31.93</td><td>8.10</td><td>Average</td><td>100</td><td>306</td></tr><tr><td>6</td><td>13430.00</td><td>52.61</td><td>88.20</td><td>-35.59</td><td>44.51</td><td>8.10</td><td>Peak</td><td>100</td><td>306</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.53	54.00	-29.47	32.06	-7.53	Average	100	314	2	1131.00	37.12	74.00	-36.88	44.65	-7.53	Peak	100	314	3	8953.33	39.04	68.20	-29.16	31.81	7.23	Average	100	35	4	8953.33	51.59	88.20	-36.61	44.36	7.23	Peak	100	35	5	13430.00	40.03	68.20	-28.17	31.93	8.10	Average	100	306	6	13430.00	52.61	88.20	-35.59	44.51	8.10	Peak	100	306
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.53	54.00	-29.47	32.06	-7.53	Average	100	314																																																																
2	1131.00	37.12	74.00	-36.88	44.65	-7.53	Peak	100	314																																																																
3	8953.33	39.04	68.20	-29.16	31.81	7.23	Average	100	35																																																																
4	8953.33	51.59	88.20	-36.61	44.36	7.23	Peak	100	35																																																																
5	13430.00	40.03	68.20	-28.17	31.93	8.10	Average	100	306																																																																
6	13430.00	52.61	88.20	-35.59	44.51	8.10	Peak	100	306																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

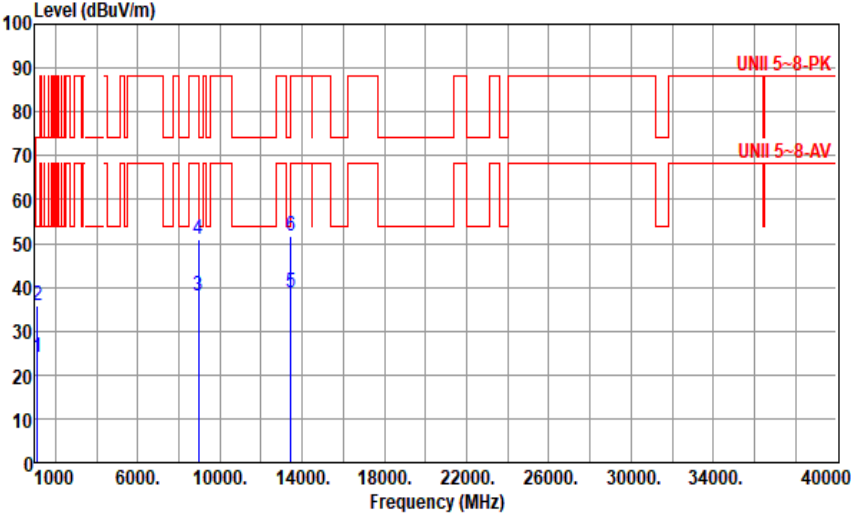

Modulation	be EHT20	Test Freq. (MHz)	6715																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>23.88</td><td>54.00</td><td>-30.12</td><td>31.41</td><td>-7.53</td><td>Average</td><td>100</td><td>296</td></tr><tr><td>2</td><td>1131.00</td><td>35.75</td><td>74.00</td><td>-38.25</td><td>43.28</td><td>-7.53</td><td>Peak</td><td>100</td><td>296</td></tr><tr><td>3</td><td>8953.33</td><td>37.98</td><td>68.20</td><td>-30.22</td><td>30.75</td><td>7.23</td><td>Average</td><td>100</td><td>309</td></tr><tr><td>4</td><td>8953.33</td><td>50.89</td><td>88.20</td><td>-37.31</td><td>43.66</td><td>7.23</td><td>Peak</td><td>100</td><td>309</td></tr><tr><td>5</td><td>13430.00</td><td>38.63</td><td>68.20</td><td>-29.57</td><td>30.53</td><td>8.10</td><td>Average</td><td>100</td><td>142</td></tr><tr><td>6</td><td>13430.00</td><td>51.55</td><td>88.20</td><td>-36.65</td><td>43.45</td><td>8.10</td><td>Peak</td><td>100</td><td>142</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.88	54.00	-30.12	31.41	-7.53	Average	100	296	2	1131.00	35.75	74.00	-38.25	43.28	-7.53	Peak	100	296	3	8953.33	37.98	68.20	-30.22	30.75	7.23	Average	100	309	4	8953.33	50.89	88.20	-37.31	43.66	7.23	Peak	100	309	5	13430.00	38.63	68.20	-29.57	30.53	8.10	Average	100	142	6	13430.00	51.55	88.20	-36.65	43.45	8.10	Peak	100	142
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.88	54.00	-30.12	31.41	-7.53	Average	100	296																																																																
2	1131.00	35.75	74.00	-38.25	43.28	-7.53	Peak	100	296																																																																
3	8953.33	37.98	68.20	-30.22	30.75	7.23	Average	100	309																																																																
4	8953.33	50.89	88.20	-37.31	43.66	7.23	Peak	100	309																																																																
5	13430.00	38.63	68.20	-29.57	30.53	8.10	Average	100	142																																																																
6	13430.00	51.55	88.20	-36.65	43.45	8.10	Peak	100	142																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT20	Test Freq. (MHz)	6855																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.49</td><td>54.00</td><td>-29.51</td><td>32.02</td><td>-7.53</td><td>Average</td><td>100</td><td>19</td></tr><tr><td>2</td><td>1131.00</td><td>37.82</td><td>74.00</td><td>-36.18</td><td>45.35</td><td>-7.53</td><td>Peak</td><td>100</td><td>19</td></tr><tr><td>3</td><td>9140.00</td><td>39.45</td><td>54.00</td><td>-14.55</td><td>31.80</td><td>7.65</td><td>Average</td><td>100</td><td>348</td></tr><tr><td>4</td><td>9140.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>44.40</td><td>7.65</td><td>Peak</td><td>100</td><td>348</td></tr><tr><td>5</td><td>13710.00</td><td>39.76</td><td>68.20</td><td>-28.44</td><td>31.63</td><td>8.13</td><td>Average</td><td>100</td><td>185</td></tr><tr><td>6</td><td>13710.00</td><td>52.74</td><td>88.20</td><td>-35.46</td><td>44.61</td><td>8.13</td><td>Peak</td><td>100</td><td>185</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.49	54.00	-29.51	32.02	-7.53	Average	100	19	2	1131.00	37.82	74.00	-36.18	45.35	-7.53	Peak	100	19	3	9140.00	39.45	54.00	-14.55	31.80	7.65	Average	100	348	4	9140.00	52.05	74.00	-21.95	44.40	7.65	Peak	100	348	5	13710.00	39.76	68.20	-28.44	31.63	8.13	Average	100	185	6	13710.00	52.74	88.20	-35.46	44.61	8.13	Peak	100	185
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.49	54.00	-29.51	32.02	-7.53	Average	100	19																																																																
2	1131.00	37.82	74.00	-36.18	45.35	-7.53	Peak	100	19																																																																
3	9140.00	39.45	54.00	-14.55	31.80	7.65	Average	100	348																																																																
4	9140.00	52.05	74.00	-21.95	44.40	7.65	Peak	100	348																																																																
5	13710.00	39.76	68.20	-28.44	31.63	8.13	Average	100	185																																																																
6	13710.00	52.74	88.20	-35.46	44.61	8.13	Peak	100	185																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT20	Test Freq. (MHz)	6855																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>23.89</td><td>54.00</td><td>-30.11</td><td>31.42</td><td>-7.53</td><td>Average</td><td>100</td><td>118</td></tr><tr><td>2</td><td>1131.00</td><td>36.76</td><td>74.00</td><td>-37.24</td><td>44.29</td><td>-7.53</td><td>Peak</td><td>100</td><td>118</td></tr><tr><td>3</td><td>9140.00</td><td>38.13</td><td>54.00</td><td>-15.87</td><td>30.48</td><td>7.65</td><td>Average</td><td>100</td><td>64</td></tr><tr><td>4</td><td>9140.00</td><td>51.26</td><td>74.00</td><td>-22.74</td><td>43.61</td><td>7.65</td><td>Peak</td><td>100</td><td>64</td></tr><tr><td>5</td><td>13710.00</td><td>39.07</td><td>68.20</td><td>-29.13</td><td>30.94</td><td>8.13</td><td>Average</td><td>100</td><td>206</td></tr><tr><td>6</td><td>13710.00</td><td>51.38</td><td>88.20</td><td>-36.82</td><td>43.25</td><td>8.13</td><td>Peak</td><td>100</td><td>206</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.89	54.00	-30.11	31.42	-7.53	Average	100	118	2	1131.00	36.76	74.00	-37.24	44.29	-7.53	Peak	100	118	3	9140.00	38.13	54.00	-15.87	30.48	7.65	Average	100	64	4	9140.00	51.26	74.00	-22.74	43.61	7.65	Peak	100	64	5	13710.00	39.07	68.20	-29.13	30.94	8.13	Average	100	206	6	13710.00	51.38	88.20	-36.82	43.25	8.13	Peak	100	206
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.89	54.00	-30.11	31.42	-7.53	Average	100	118																																																																
2	1131.00	36.76	74.00	-37.24	44.29	-7.53	Peak	100	118																																																																
3	9140.00	38.13	54.00	-15.87	30.48	7.65	Average	100	64																																																																
4	9140.00	51.26	74.00	-22.74	43.61	7.65	Peak	100	64																																																																
5	13710.00	39.07	68.20	-29.13	30.94	8.13	Average	100	206																																																																
6	13710.00	51.38	88.20	-36.82	43.25	8.13	Peak	100	206																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT20		Test Freq. (MHz)		6875																																																																										
Polarization	Horizontal																																																																														
Test By :Akun Chung_			Temperature(°C):21			Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.80</td><td>54.00</td><td>-29.20</td><td>32.33</td><td>-7.53</td><td>Average</td><td>100</td><td>169</td></tr><tr><td>2</td><td>1131.00</td><td>37.37</td><td>74.00</td><td>-36.63</td><td>44.90</td><td>-7.53</td><td>Peak</td><td>100</td><td>169</td></tr><tr><td>3</td><td>9166.67</td><td>39.52</td><td>54.00</td><td>-14.48</td><td>31.76</td><td>7.76</td><td>Average</td><td>100</td><td>318</td></tr><tr><td>4</td><td>9166.67</td><td>52.15</td><td>74.00</td><td>-21.85</td><td>44.39</td><td>7.76</td><td>Peak</td><td>100</td><td>318</td></tr><tr><td>5</td><td>13750.00</td><td>39.77</td><td>68.20</td><td>-28.43</td><td>31.69</td><td>8.08</td><td>Average</td><td>100</td><td>147</td></tr><tr><td>6</td><td>13750.00</td><td>52.71</td><td>88.20</td><td>-35.49</td><td>44.63</td><td>8.08</td><td>Peak</td><td>100</td><td>147</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.80	54.00	-29.20	32.33	-7.53	Average	100	169	2	1131.00	37.37	74.00	-36.63	44.90	-7.53	Peak	100	169	3	9166.67	39.52	54.00	-14.48	31.76	7.76	Average	100	318	4	9166.67	52.15	74.00	-21.85	44.39	7.76	Peak	100	318	5	13750.00	39.77	68.20	-28.43	31.69	8.08	Average	100	147	6	13750.00	52.71	88.20	-35.49	44.63	8.08	Peak	100	147
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	24.80	54.00	-29.20	32.33	-7.53	Average	100	169																																																																						
2	1131.00	37.37	74.00	-36.63	44.90	-7.53	Peak	100	169																																																																						
3	9166.67	39.52	54.00	-14.48	31.76	7.76	Average	100	318																																																																						
4	9166.67	52.15	74.00	-21.85	44.39	7.76	Peak	100	318																																																																						
5	13750.00	39.77	68.20	-28.43	31.69	8.08	Average	100	147																																																																						
6	13750.00	52.71	88.20	-35.49	44.63	8.08	Peak	100	147																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															



Modulation	be EHT20	Test Freq. (MHz)	6875																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.03</td><td>54.00</td><td>-29.97</td><td>31.56</td><td>-7.53</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>2</td><td>1131.00</td><td>39.13</td><td>74.00</td><td>-34.87</td><td>46.66</td><td>-7.53</td><td>Peak</td><td>100</td><td>213</td></tr><tr><td>3</td><td>9166.67</td><td>38.48</td><td>54.00</td><td>-15.52</td><td>30.72</td><td>7.76</td><td>Average</td><td>100</td><td>284</td></tr><tr><td>4</td><td>9166.67</td><td>51.43</td><td>74.00</td><td>-22.57</td><td>43.67</td><td>7.76</td><td>Peak</td><td>100</td><td>284</td></tr><tr><td>5</td><td>13750.00</td><td>38.28</td><td>68.20</td><td>-29.92</td><td>30.20</td><td>8.08</td><td>Average</td><td>100</td><td>86</td></tr><tr><td>6</td><td>13750.00</td><td>51.49</td><td>88.20</td><td>-36.71</td><td>43.41</td><td>8.08</td><td>Peak</td><td>100</td><td>86</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.03	54.00	-29.97	31.56	-7.53	Average	100	213	2	1131.00	39.13	74.00	-34.87	46.66	-7.53	Peak	100	213	3	9166.67	38.48	54.00	-15.52	30.72	7.76	Average	100	284	4	9166.67	51.43	74.00	-22.57	43.67	7.76	Peak	100	284	5	13750.00	38.28	68.20	-29.92	30.20	8.08	Average	100	86	6	13750.00	51.49	88.20	-36.71	43.41	8.08	Peak	100	86
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.03	54.00	-29.97	31.56	-7.53	Average	100	213																																																																
2	1131.00	39.13	74.00	-34.87	46.66	-7.53	Peak	100	213																																																																
3	9166.67	38.48	54.00	-15.52	30.72	7.76	Average	100	284																																																																
4	9166.67	51.43	74.00	-22.57	43.67	7.76	Peak	100	284																																																																
5	13750.00	38.28	68.20	-29.92	30.20	8.08	Average	100	86																																																																
6	13750.00	51.49	88.20	-36.71	43.41	8.08	Peak	100	86																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT20	Test Freq. (MHz)	6895																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.87</td><td>54.00</td><td>-29.13</td><td>32.40</td><td>-7.53</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>2</td><td>1131.00</td><td>38.02</td><td>74.00</td><td>-35.98</td><td>45.55</td><td>-7.53</td><td>Peak</td><td>100</td><td>25</td></tr><tr><td>3</td><td>9193.33</td><td>39.30</td><td>54.00</td><td>-14.70</td><td>31.44</td><td>7.86</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>4</td><td>9193.33</td><td>52.48</td><td>74.00</td><td>-21.52</td><td>44.62</td><td>7.86</td><td>Peak</td><td>100</td><td>34</td></tr><tr><td>5</td><td>13790.00</td><td>39.67</td><td>68.20</td><td>-28.53</td><td>31.55</td><td>8.12</td><td>Average</td><td>100</td><td>317</td></tr><tr><td>6</td><td>13790.00</td><td>52.84</td><td>88.20</td><td>-35.36</td><td>44.72</td><td>8.12</td><td>Peak</td><td>100</td><td>317</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.87	54.00	-29.13	32.40	-7.53	Average	100	25	2	1131.00	38.02	74.00	-35.98	45.55	-7.53	Peak	100	25	3	9193.33	39.30	54.00	-14.70	31.44	7.86	Average	100	34	4	9193.33	52.48	74.00	-21.52	44.62	7.86	Peak	100	34	5	13790.00	39.67	68.20	-28.53	31.55	8.12	Average	100	317	6	13790.00	52.84	88.20	-35.36	44.72	8.12	Peak	100	317
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.87	54.00	-29.13	32.40	-7.53	Average	100	25																																																																
2	1131.00	38.02	74.00	-35.98	45.55	-7.53	Peak	100	25																																																																
3	9193.33	39.30	54.00	-14.70	31.44	7.86	Average	100	34																																																																
4	9193.33	52.48	74.00	-21.52	44.62	7.86	Peak	100	34																																																																
5	13790.00	39.67	68.20	-28.53	31.55	8.12	Average	100	317																																																																
6	13790.00	52.84	88.20	-35.36	44.72	8.12	Peak	100	317																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT20	Test Freq. (MHz)	6895																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.01</td><td>54.00</td><td>-29.99</td><td>31.54</td><td>-7.53</td><td>Average</td><td>100</td><td>134</td></tr><tr><td>2</td><td>1131.00</td><td>36.49</td><td>74.00</td><td>-37.51</td><td>44.02</td><td>-7.53</td><td>Peak</td><td>100</td><td>134</td></tr><tr><td>3</td><td>9193.33</td><td>38.14</td><td>54.00</td><td>-15.86</td><td>30.28</td><td>7.86</td><td>Average</td><td>100</td><td>167</td></tr><tr><td>4</td><td>9193.33</td><td>51.25</td><td>74.00</td><td>-22.75</td><td>43.39</td><td>7.86</td><td>Peak</td><td>100</td><td>167</td></tr><tr><td>5</td><td>13790.00</td><td>38.44</td><td>68.20</td><td>-29.76</td><td>30.32</td><td>8.12</td><td>Average</td><td>100</td><td>92</td></tr><tr><td>6</td><td>13790.00</td><td>51.83</td><td>88.20</td><td>-36.37</td><td>43.71</td><td>8.12</td><td>Peak</td><td>100</td><td>92</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.01	54.00	-29.99	31.54	-7.53	Average	100	134	2	1131.00	36.49	74.00	-37.51	44.02	-7.53	Peak	100	134	3	9193.33	38.14	54.00	-15.86	30.28	7.86	Average	100	167	4	9193.33	51.25	74.00	-22.75	43.39	7.86	Peak	100	167	5	13790.00	38.44	68.20	-29.76	30.32	8.12	Average	100	92	6	13790.00	51.83	88.20	-36.37	43.71	8.12	Peak	100	92
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.01	54.00	-29.99	31.54	-7.53	Average	100	134																																																																
2	1131.00	36.49	74.00	-37.51	44.02	-7.53	Peak	100	134																																																																
3	9193.33	38.14	54.00	-15.86	30.28	7.86	Average	100	167																																																																
4	9193.33	51.25	74.00	-22.75	43.39	7.86	Peak	100	167																																																																
5	13790.00	38.44	68.20	-29.76	30.32	8.12	Average	100	92																																																																
6	13790.00	51.83	88.20	-36.37	43.71	8.12	Peak	100	92																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT20	Test Freq. (MHz)	7015																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.83</td><td>54.00</td><td>-29.17</td><td>32.36</td><td>-7.53</td><td>Average</td><td>100</td><td>216</td></tr><tr><td>2</td><td>1131.00</td><td>37.42</td><td>74.00</td><td>-36.58</td><td>44.95</td><td>-7.53</td><td>Peak</td><td>100</td><td>216</td></tr><tr><td>3</td><td>9353.33</td><td>40.07</td><td>54.00</td><td>-13.93</td><td>31.59</td><td>8.48</td><td>Average</td><td>100</td><td>304</td></tr><tr><td>4</td><td>9353.33</td><td>52.76</td><td>74.00</td><td>-21.24</td><td>44.28</td><td>8.48</td><td>Peak</td><td>100</td><td>304</td></tr><tr><td>5</td><td>14030.00</td><td>40.10</td><td>68.20</td><td>-28.10</td><td>31.62</td><td>8.48</td><td>Average</td><td>100</td><td>58</td></tr><tr><td>6</td><td>14030.00</td><td>52.79</td><td>88.20</td><td>-35.41</td><td>44.31</td><td>8.48</td><td>Peak</td><td>100</td><td>58</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.83	54.00	-29.17	32.36	-7.53	Average	100	216	2	1131.00	37.42	74.00	-36.58	44.95	-7.53	Peak	100	216	3	9353.33	40.07	54.00	-13.93	31.59	8.48	Average	100	304	4	9353.33	52.76	74.00	-21.24	44.28	8.48	Peak	100	304	5	14030.00	40.10	68.20	-28.10	31.62	8.48	Average	100	58	6	14030.00	52.79	88.20	-35.41	44.31	8.48	Peak	100	58
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.83	54.00	-29.17	32.36	-7.53	Average	100	216																																																																
2	1131.00	37.42	74.00	-36.58	44.95	-7.53	Peak	100	216																																																																
3	9353.33	40.07	54.00	-13.93	31.59	8.48	Average	100	304																																																																
4	9353.33	52.76	74.00	-21.24	44.28	8.48	Peak	100	304																																																																
5	14030.00	40.10	68.20	-28.10	31.62	8.48	Average	100	58																																																																
6	14030.00	52.79	88.20	-35.41	44.31	8.48	Peak	100	58																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT20	Test Freq. (MHz)	7015
Polarization	Vertical		
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62			
Level (dBUV/m)			



Modulation	be EHT20	Test Freq. (MHz)	7095																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
Level (dBUV/m) UNII 5~8-PK UNII 5~8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.29</td><td>54.00</td><td>-29.71</td><td>31.82</td><td>-7.53</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>2</td><td>1131.00</td><td>37.62</td><td>74.00</td><td>-36.38</td><td>45.15</td><td>-7.53</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>3</td><td>9460.00</td><td>39.70</td><td>54.00</td><td>-14.30</td><td>31.50</td><td>8.20</td><td>Average</td><td>100</td><td>340</td></tr><tr><td>4</td><td>9460.00</td><td>53.06</td><td>74.00</td><td>-20.94</td><td>44.86</td><td>8.20</td><td>Peak</td><td>100</td><td>340</td></tr><tr><td>5</td><td>14190.00</td><td>40.31</td><td>68.20</td><td>-27.89</td><td>31.42</td><td>8.89</td><td>Average</td><td>100</td><td>184</td></tr><tr><td>6</td><td>14190.00</td><td>53.62</td><td>88.20</td><td>-34.58</td><td>44.73</td><td>8.89</td><td>Peak</td><td>100</td><td>184</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.29	54.00	-29.71	31.82	-7.53	Average	100	55	2	1131.00	37.62	74.00	-36.38	45.15	-7.53	Peak	100	55	3	9460.00	39.70	54.00	-14.30	31.50	8.20	Average	100	340	4	9460.00	53.06	74.00	-20.94	44.86	8.20	Peak	100	340	5	14190.00	40.31	68.20	-27.89	31.42	8.89	Average	100	184	6	14190.00	53.62	88.20	-34.58	44.73	8.89	Peak	100	184
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.29	54.00	-29.71	31.82	-7.53	Average	100	55																																																																
2	1131.00	37.62	74.00	-36.38	45.15	-7.53	Peak	100	55																																																																
3	9460.00	39.70	54.00	-14.30	31.50	8.20	Average	100	340																																																																
4	9460.00	53.06	74.00	-20.94	44.86	8.20	Peak	100	340																																																																
5	14190.00	40.31	68.20	-27.89	31.42	8.89	Average	100	184																																																																
6	14190.00	53.62	88.20	-34.58	44.73	8.89	Peak	100	184																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT20	Test Freq. (MHz)	7095																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>23.69</td><td>54.00</td><td>-30.31</td><td>31.22</td><td>-7.53</td><td>Average</td><td>100</td><td>146</td></tr><tr><td>2</td><td>1131.00</td><td>36.56</td><td>74.00</td><td>-37.44</td><td>44.09</td><td>-7.53</td><td>Peak</td><td>100</td><td>146</td></tr><tr><td>3</td><td>9460.00</td><td>38.74</td><td>54.00</td><td>-15.26</td><td>30.54</td><td>8.20</td><td>Average</td><td>100</td><td>351</td></tr><tr><td>4</td><td>9460.00</td><td>51.81</td><td>74.00</td><td>-22.19</td><td>43.61</td><td>8.20</td><td>Peak</td><td>100</td><td>351</td></tr><tr><td>5</td><td>14190.00</td><td>39.08</td><td>68.20</td><td>-29.12</td><td>30.19</td><td>8.89</td><td>Average</td><td>100</td><td>201</td></tr><tr><td>6</td><td>14190.00</td><td>52.80</td><td>88.20</td><td>-35.40</td><td>43.91</td><td>8.89</td><td>Peak</td><td>100</td><td>201</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.69	54.00	-30.31	31.22	-7.53	Average	100	146	2	1131.00	36.56	74.00	-37.44	44.09	-7.53	Peak	100	146	3	9460.00	38.74	54.00	-15.26	30.54	8.20	Average	100	351	4	9460.00	51.81	74.00	-22.19	43.61	8.20	Peak	100	351	5	14190.00	39.08	68.20	-29.12	30.19	8.89	Average	100	201	6	14190.00	52.80	88.20	-35.40	43.91	8.89	Peak	100	201
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.69	54.00	-30.31	31.22	-7.53	Average	100	146																																																																
2	1131.00	36.56	74.00	-37.44	44.09	-7.53	Peak	100	146																																																																
3	9460.00	38.74	54.00	-15.26	30.54	8.20	Average	100	351																																																																
4	9460.00	51.81	74.00	-22.19	43.61	8.20	Peak	100	351																																																																
5	14190.00	39.08	68.20	-29.12	30.19	8.89	Average	100	201																																																																
6	14190.00	52.80	88.20	-35.40	43.91	8.89	Peak	100	201																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT20	Test Freq. (MHz)	7115
Polarization	Horizontal		
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62			
Level (dBUV/m)			

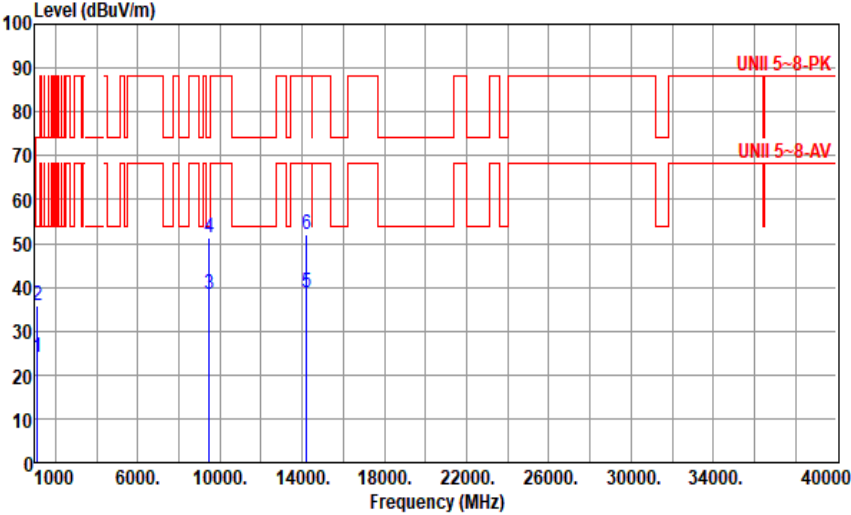


Modulation	be EHT20	Test Freq. (MHz)	7115																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>23.83</td><td>54.00</td><td>-30.17</td><td>31.36</td><td>-7.53</td><td>Average</td><td>100</td><td>235</td></tr><tr><td>2</td><td>1131.00</td><td>35.93</td><td>74.00</td><td>-38.07</td><td>43.46</td><td>-7.53</td><td>Peak</td><td>100</td><td>235</td></tr><tr><td>3</td><td>9486.67</td><td>38.26</td><td>54.00</td><td>-15.74</td><td>30.23</td><td>8.03</td><td>Average</td><td>100</td><td>18</td></tr><tr><td>4</td><td>9486.67</td><td>51.39</td><td>74.00</td><td>-22.61</td><td>43.36</td><td>8.03</td><td>Peak</td><td>100</td><td>18</td></tr><tr><td>5</td><td>14230.00</td><td>38.92</td><td>68.20</td><td>-29.28</td><td>30.04</td><td>8.88</td><td>Average</td><td>100</td><td>224</td></tr><tr><td>6</td><td>14230.00</td><td>52.04</td><td>88.20</td><td>-36.16</td><td>43.16</td><td>8.88</td><td>Peak</td><td>100</td><td>224</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.83	54.00	-30.17	31.36	-7.53	Average	100	235	2	1131.00	35.93	74.00	-38.07	43.46	-7.53	Peak	100	235	3	9486.67	38.26	54.00	-15.74	30.23	8.03	Average	100	18	4	9486.67	51.39	74.00	-22.61	43.36	8.03	Peak	100	18	5	14230.00	38.92	68.20	-29.28	30.04	8.88	Average	100	224	6	14230.00	52.04	88.20	-36.16	43.16	8.88	Peak	100	224
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.83	54.00	-30.17	31.36	-7.53	Average	100	235																																																																
2	1131.00	35.93	74.00	-38.07	43.46	-7.53	Peak	100	235																																																																
3	9486.67	38.26	54.00	-15.74	30.23	8.03	Average	100	18																																																																
4	9486.67	51.39	74.00	-22.61	43.36	8.03	Peak	100	18																																																																
5	14230.00	38.92	68.20	-29.28	30.04	8.88	Average	100	224																																																																
6	14230.00	52.04	88.20	-36.16	43.16	8.88	Peak	100	224																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT40	Test Freq. (MHz)	5965																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.67</td><td>54.00</td><td>-29.33</td><td>32.20</td><td>-7.53</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>2</td><td>1131.00</td><td>37.82</td><td>74.00</td><td>-36.18</td><td>45.35</td><td>-7.53</td><td>Peak</td><td>100</td><td>45</td></tr><tr><td>3</td><td>7953.33</td><td>38.50</td><td>68.20</td><td>-29.70</td><td>31.79</td><td>6.71</td><td>Average</td><td>100</td><td>103</td></tr><tr><td>4</td><td>7953.33</td><td>51.45</td><td>88.20</td><td>-36.75</td><td>44.74</td><td>6.71</td><td>Peak</td><td>100</td><td>103</td></tr><tr><td>5</td><td>11930.00</td><td>39.56</td><td>54.00</td><td>-14.44</td><td>31.41</td><td>8.15</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>6</td><td>11930.00</td><td>52.46</td><td>74.00</td><td>-21.54</td><td>44.31</td><td>8.15</td><td>Peak</td><td>100</td><td>213</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.67	54.00	-29.33	32.20	-7.53	Average	100	45	2	1131.00	37.82	74.00	-36.18	45.35	-7.53	Peak	100	45	3	7953.33	38.50	68.20	-29.70	31.79	6.71	Average	100	103	4	7953.33	51.45	88.20	-36.75	44.74	6.71	Peak	100	103	5	11930.00	39.56	54.00	-14.44	31.41	8.15	Average	100	213	6	11930.00	52.46	74.00	-21.54	44.31	8.15	Peak	100	213
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.67	54.00	-29.33	32.20	-7.53	Average	100	45																																																																
2	1131.00	37.82	74.00	-36.18	45.35	-7.53	Peak	100	45																																																																
3	7953.33	38.50	68.20	-29.70	31.79	6.71	Average	100	103																																																																
4	7953.33	51.45	88.20	-36.75	44.74	6.71	Peak	100	103																																																																
5	11930.00	39.56	54.00	-14.44	31.41	8.15	Average	100	213																																																																
6	11930.00	52.46	74.00	-21.54	44.31	8.15	Peak	100	213																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

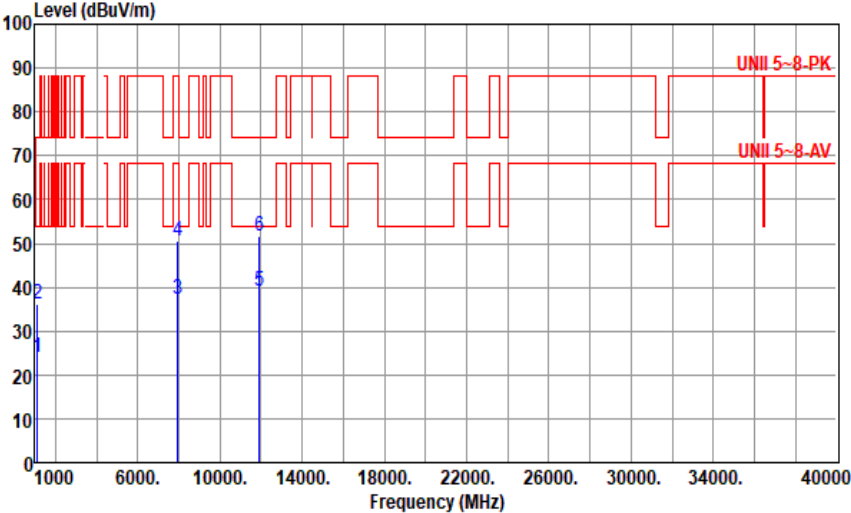


Modulation	be EHT40	Test Freq. (MHz)	5965																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>23.81</td><td>54.00</td><td>-30.19</td><td>31.34</td><td>-7.53</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>2</td><td>1131.00</td><td>36.29</td><td>74.00</td><td>-37.71</td><td>43.82</td><td>-7.53</td><td>Peak</td><td>100</td><td>124</td></tr><tr><td>3</td><td>7953.33</td><td>37.23</td><td>68.20</td><td>-30.97</td><td>30.52</td><td>6.71</td><td>Average</td><td>100</td><td>161</td></tr><tr><td>4</td><td>7953.33</td><td>50.42</td><td>88.20</td><td>-37.78</td><td>43.71</td><td>6.71</td><td>Peak</td><td>100</td><td>161</td></tr><tr><td>5</td><td>11930.00</td><td>39.07</td><td>54.00</td><td>-14.93</td><td>30.92</td><td>8.15</td><td>Average</td><td>100</td><td>300</td></tr><tr><td>6</td><td>11930.00</td><td>51.66</td><td>74.00</td><td>-22.34</td><td>43.51</td><td>8.15</td><td>Peak</td><td>100</td><td>300</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.81	54.00	-30.19	31.34	-7.53	Average	100	124	2	1131.00	36.29	74.00	-37.71	43.82	-7.53	Peak	100	124	3	7953.33	37.23	68.20	-30.97	30.52	6.71	Average	100	161	4	7953.33	50.42	88.20	-37.78	43.71	6.71	Peak	100	161	5	11930.00	39.07	54.00	-14.93	30.92	8.15	Average	100	300	6	11930.00	51.66	74.00	-22.34	43.51	8.15	Peak	100	300
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.81	54.00	-30.19	31.34	-7.53	Average	100	124																																																																
2	1131.00	36.29	74.00	-37.71	43.82	-7.53	Peak	100	124																																																																
3	7953.33	37.23	68.20	-30.97	30.52	6.71	Average	100	161																																																																
4	7953.33	50.42	88.20	-37.78	43.71	6.71	Peak	100	161																																																																
5	11930.00	39.07	54.00	-14.93	30.92	8.15	Average	100	300																																																																
6	11930.00	51.66	74.00	-22.34	43.51	8.15	Peak	100	300																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT40	Test Freq. (MHz)	6165
Polarization	Horizontal		
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62			
Level (dBuV/m)			

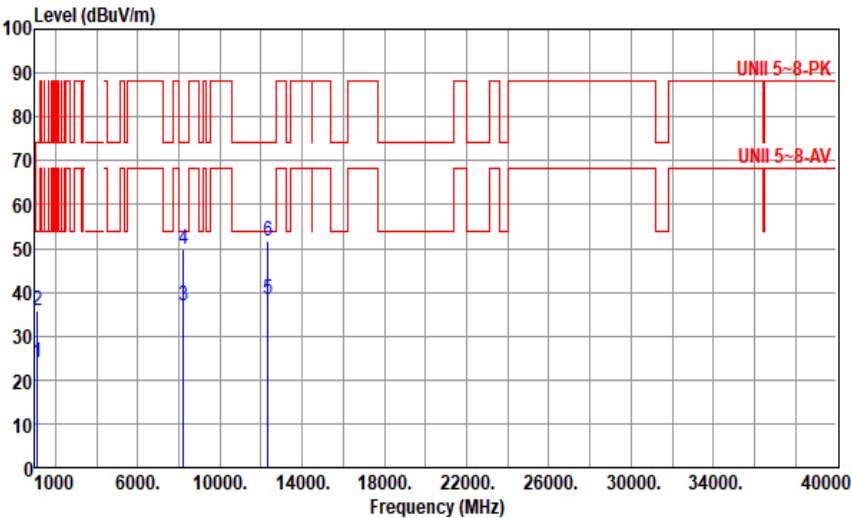


Modulation	be EHT40	Test Freq. (MHz)	6165																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>23.98</td><td>54.00</td><td>-30.02</td><td>31.51</td><td>-7.53</td><td>Average</td><td>100</td><td>306</td></tr><tr><td>2</td><td>1131.00</td><td>35.85</td><td>74.00</td><td>-38.15</td><td>43.38</td><td>-7.53</td><td>Peak</td><td>100</td><td>306</td></tr><tr><td>3</td><td>8220.00</td><td>37.03</td><td>54.00</td><td>-16.97</td><td>30.51</td><td>6.52</td><td>Average</td><td>100</td><td>311</td></tr><tr><td>4</td><td>8220.00</td><td>49.92</td><td>74.00</td><td>-24.08</td><td>43.40</td><td>6.52</td><td>Peak</td><td>100</td><td>311</td></tr><tr><td>5</td><td>12330.00</td><td>38.28</td><td>54.00</td><td>-15.72</td><td>30.54</td><td>7.74</td><td>Average</td><td>100</td><td>145</td></tr><tr><td>6</td><td>12330.00</td><td>51.52</td><td>74.00</td><td>-22.48</td><td>43.78</td><td>7.74</td><td>Peak</td><td>100</td><td>145</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.98	54.00	-30.02	31.51	-7.53	Average	100	306	2	1131.00	35.85	74.00	-38.15	43.38	-7.53	Peak	100	306	3	8220.00	37.03	54.00	-16.97	30.51	6.52	Average	100	311	4	8220.00	49.92	74.00	-24.08	43.40	6.52	Peak	100	311	5	12330.00	38.28	54.00	-15.72	30.54	7.74	Average	100	145	6	12330.00	51.52	74.00	-22.48	43.78	7.74	Peak	100	145
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.98	54.00	-30.02	31.51	-7.53	Average	100	306																																																																
2	1131.00	35.85	74.00	-38.15	43.38	-7.53	Peak	100	306																																																																
3	8220.00	37.03	54.00	-16.97	30.51	6.52	Average	100	311																																																																
4	8220.00	49.92	74.00	-24.08	43.40	6.52	Peak	100	311																																																																
5	12330.00	38.28	54.00	-15.72	30.54	7.74	Average	100	145																																																																
6	12330.00	51.52	74.00	-22.48	43.78	7.74	Peak	100	145																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT40	Test Freq. (MHz)	6405																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.54</td><td>54.00</td><td>-29.46</td><td>32.07</td><td>-7.53</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>2</td><td>1131.00</td><td>37.87</td><td>74.00</td><td>-36.13</td><td>45.40</td><td>-7.53</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>3</td><td>8540.00</td><td>38.31</td><td>68.20</td><td>-29.89</td><td>31.60</td><td>6.71</td><td>Average</td><td>100</td><td>3</td></tr><tr><td>4</td><td>8540.00</td><td>51.31</td><td>88.20</td><td>-36.89</td><td>44.60</td><td>6.71</td><td>Peak</td><td>100</td><td>3</td></tr><tr><td>5</td><td>12810.00</td><td>39.92</td><td>68.20</td><td>-28.28</td><td>31.84</td><td>8.08</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>6</td><td>12810.00</td><td>52.73</td><td>88.20</td><td>-35.47</td><td>44.65</td><td>8.08</td><td>Peak</td><td>100</td><td>31</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.54	54.00	-29.46	32.07	-7.53	Average	100	126	2	1131.00	37.87	74.00	-36.13	45.40	-7.53	Peak	100	126	3	8540.00	38.31	68.20	-29.89	31.60	6.71	Average	100	3	4	8540.00	51.31	88.20	-36.89	44.60	6.71	Peak	100	3	5	12810.00	39.92	68.20	-28.28	31.84	8.08	Average	100	31	6	12810.00	52.73	88.20	-35.47	44.65	8.08	Peak	100	31
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.54	54.00	-29.46	32.07	-7.53	Average	100	126																																																																
2	1131.00	37.87	74.00	-36.13	45.40	-7.53	Peak	100	126																																																																
3	8540.00	38.31	68.20	-29.89	31.60	6.71	Average	100	3																																																																
4	8540.00	51.31	88.20	-36.89	44.60	6.71	Peak	100	3																																																																
5	12810.00	39.92	68.20	-28.28	31.84	8.08	Average	100	31																																																																
6	12810.00	52.73	88.20	-35.47	44.65	8.08	Peak	100	31																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

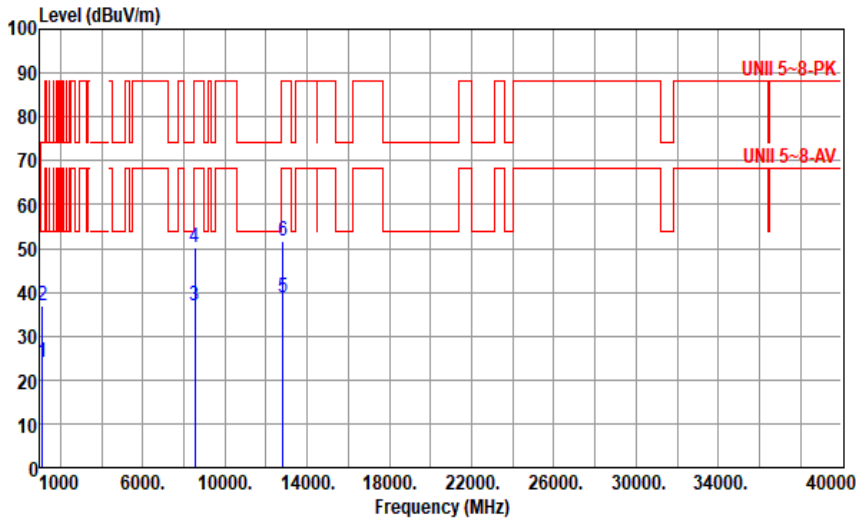


Modulation	be EHT40		Test Freq. (MHz)		6405																																																																							
Polarization	Vertical																																																																											
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																												
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>23.94</td><td>54.00</td><td>-30.06</td><td>31.47</td><td>-7.53</td><td>Average</td><td>100</td><td>135</td></tr><tr><td>2</td><td>1131.00</td><td>36.81</td><td>74.00</td><td>-37.19</td><td>44.34</td><td>-7.53</td><td>Peak</td><td>100</td><td>135</td></tr><tr><td>3</td><td>8540.00</td><td>36.85</td><td>68.20</td><td>-31.35</td><td>30.14</td><td>6.71</td><td>Average</td><td>100</td><td>141</td></tr><tr><td>4</td><td>8540.00</td><td>50.22</td><td>88.20</td><td>-37.98</td><td>43.51</td><td>6.71</td><td>Peak</td><td>100</td><td>141</td></tr><tr><td>5</td><td>12810.00</td><td>38.93</td><td>68.20</td><td>-29.27</td><td>30.85</td><td>8.08</td><td>Average</td><td>100</td><td>289</td></tr><tr><td>6</td><td>12810.00</td><td>51.55</td><td>88.20</td><td>-36.65</td><td>43.47</td><td>8.08</td><td>Peak</td><td>100</td><td>289</td></tr></table>								Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.94	54.00	-30.06	31.47	-7.53	Average	100	135	2	1131.00	36.81	74.00	-37.19	44.34	-7.53	Peak	100	135	3	8540.00	36.85	68.20	-31.35	30.14	6.71	Average	100	141	4	8540.00	50.22	88.20	-37.98	43.51	6.71	Peak	100	141	5	12810.00	38.93	68.20	-29.27	30.85	8.08	Average	100	289	6	12810.00	51.55	88.20	-36.65	43.47	8.08	Peak	100	289
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																			
1	1131.00	23.94	54.00	-30.06	31.47	-7.53	Average	100	135																																																																			
2	1131.00	36.81	74.00	-37.19	44.34	-7.53	Peak	100	135																																																																			
3	8540.00	36.85	68.20	-31.35	30.14	6.71	Average	100	141																																																																			
4	8540.00	50.22	88.20	-37.98	43.51	6.71	Peak	100	141																																																																			
5	12810.00	38.93	68.20	-29.27	30.85	8.08	Average	100	289																																																																			
6	12810.00	51.55	88.20	-36.65	43.47	8.08	Peak	100	289																																																																			
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																												



Modulation	be EHT40	Test Freq. (MHz)	6445
Polarization	Horizontal		
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62			
Level (dBuV/m)			

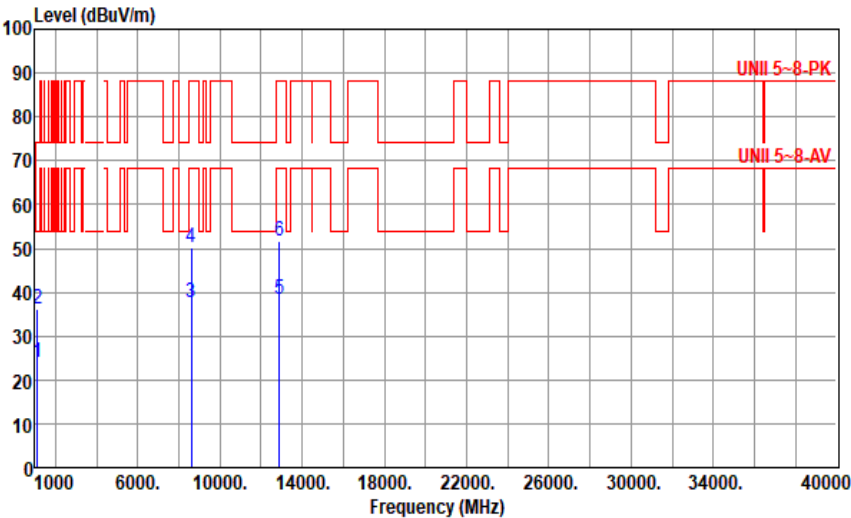


Modulation	be EHT40	Test Freq. (MHz)	6445																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.08</td><td>54.00</td><td>-29.92</td><td>31.61</td><td>-7.53</td><td>Average</td><td>100</td><td>216</td></tr><tr><td>2</td><td>1131.00</td><td>36.18</td><td>74.00</td><td>-37.82</td><td>43.71</td><td>-7.53</td><td>Peak</td><td>100</td><td>216</td></tr><tr><td>3</td><td>8593.33</td><td>37.54</td><td>68.20</td><td>-30.66</td><td>30.63</td><td>6.91</td><td>Average</td><td>100</td><td>332</td></tr><tr><td>4</td><td>8593.33</td><td>50.06</td><td>88.20</td><td>-38.14</td><td>43.15</td><td>6.91</td><td>Peak</td><td>100</td><td>332</td></tr><tr><td>5</td><td>12890.00</td><td>38.42</td><td>68.20</td><td>-29.78</td><td>30.45</td><td>7.97</td><td>Average</td><td>100</td><td>345</td></tr><tr><td>6</td><td>12890.00</td><td>51.77</td><td>88.20</td><td>-36.43</td><td>43.80</td><td>7.97</td><td>Peak</td><td>100</td><td>345</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.08	54.00	-29.92	31.61	-7.53	Average	100	216	2	1131.00	36.18	74.00	-37.82	43.71	-7.53	Peak	100	216	3	8593.33	37.54	68.20	-30.66	30.63	6.91	Average	100	332	4	8593.33	50.06	88.20	-38.14	43.15	6.91	Peak	100	332	5	12890.00	38.42	68.20	-29.78	30.45	7.97	Average	100	345	6	12890.00	51.77	88.20	-36.43	43.80	7.97	Peak	100	345
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.08	54.00	-29.92	31.61	-7.53	Average	100	216																																																																
2	1131.00	36.18	74.00	-37.82	43.71	-7.53	Peak	100	216																																																																
3	8593.33	37.54	68.20	-30.66	30.63	6.91	Average	100	332																																																																
4	8593.33	50.06	88.20	-38.14	43.15	6.91	Peak	100	332																																																																
5	12890.00	38.42	68.20	-29.78	30.45	7.97	Average	100	345																																																																
6	12890.00	51.77	88.20	-36.43	43.80	7.97	Peak	100	345																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT40	Test Freq. (MHz)	6485																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.92</td><td>54.00</td><td>-29.08</td><td>32.45</td><td>-7.53</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>2</td><td>1131.00</td><td>38.07</td><td>74.00</td><td>-35.93</td><td>45.60</td><td>-7.53</td><td>Peak</td><td>100</td><td>127</td></tr><tr><td>3</td><td>8646.67</td><td>38.87</td><td>68.20</td><td>-29.33</td><td>31.67</td><td>7.20</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>4</td><td>8646.67</td><td>51.99</td><td>88.20</td><td>-36.21</td><td>44.79</td><td>7.20</td><td>Peak</td><td>100</td><td>31</td></tr><tr><td>5</td><td>12970.00</td><td>39.58</td><td>68.20</td><td>-28.62</td><td>31.56</td><td>8.02</td><td>Average</td><td>100</td><td>333</td></tr><tr><td>6</td><td>12970.00</td><td>52.42</td><td>88.20</td><td>-35.78</td><td>44.40</td><td>8.02</td><td>Peak</td><td>100</td><td>333</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.92	54.00	-29.08	32.45	-7.53	Average	100	127	2	1131.00	38.07	74.00	-35.93	45.60	-7.53	Peak	100	127	3	8646.67	38.87	68.20	-29.33	31.67	7.20	Average	100	31	4	8646.67	51.99	88.20	-36.21	44.79	7.20	Peak	100	31	5	12970.00	39.58	68.20	-28.62	31.56	8.02	Average	100	333	6	12970.00	52.42	88.20	-35.78	44.40	8.02	Peak	100	333
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.92	54.00	-29.08	32.45	-7.53	Average	100	127																																																																
2	1131.00	38.07	74.00	-35.93	45.60	-7.53	Peak	100	127																																																																
3	8646.67	38.87	68.20	-29.33	31.67	7.20	Average	100	31																																																																
4	8646.67	51.99	88.20	-36.21	44.79	7.20	Peak	100	31																																																																
5	12970.00	39.58	68.20	-28.62	31.56	8.02	Average	100	333																																																																
6	12970.00	52.42	88.20	-35.78	44.40	8.02	Peak	100	333																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

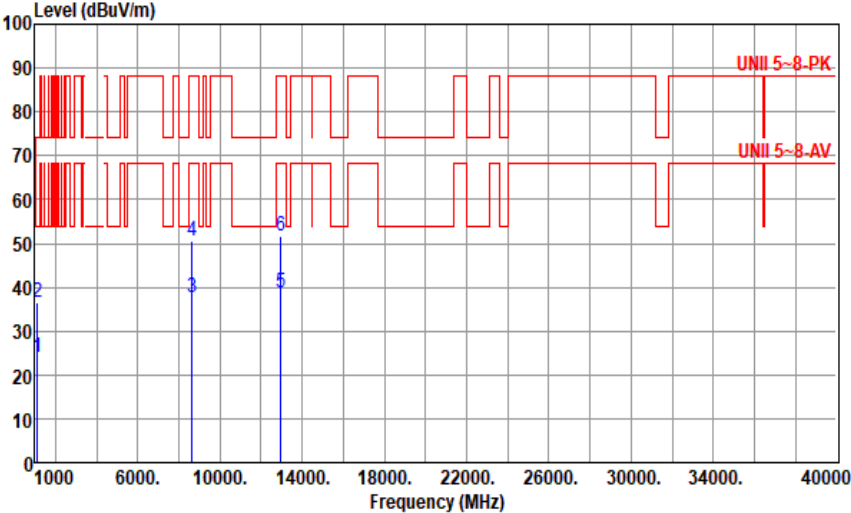


Modulation	be EHT40	Test Freq. (MHz)	6485																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.06</td><td>54.00</td><td>-29.94</td><td>31.59</td><td>-7.53</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>2</td><td>1131.00</td><td>36.54</td><td>74.00</td><td>-37.46</td><td>44.07</td><td>-7.53</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>3</td><td>8646.67</td><td>37.67</td><td>68.20</td><td>-30.53</td><td>30.47</td><td>7.20</td><td>Average</td><td>100</td><td>4</td></tr><tr><td>4</td><td>8646.67</td><td>50.65</td><td>88.20</td><td>-37.55</td><td>43.45</td><td>7.20</td><td>Peak</td><td>100</td><td>4</td></tr><tr><td>5</td><td>12970.00</td><td>38.87</td><td>68.20</td><td>-29.33</td><td>30.85</td><td>8.02</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>6</td><td>12970.00</td><td>51.77</td><td>88.20</td><td>-36.43</td><td>43.75</td><td>8.02</td><td>Peak</td><td>100</td><td>45</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.06	54.00	-29.94	31.59	-7.53	Average	100	123	2	1131.00	36.54	74.00	-37.46	44.07	-7.53	Peak	100	123	3	8646.67	37.67	68.20	-30.53	30.47	7.20	Average	100	4	4	8646.67	50.65	88.20	-37.55	43.45	7.20	Peak	100	4	5	12970.00	38.87	68.20	-29.33	30.85	8.02	Average	100	45	6	12970.00	51.77	88.20	-36.43	43.75	8.02	Peak	100	45
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.06	54.00	-29.94	31.59	-7.53	Average	100	123																																																																
2	1131.00	36.54	74.00	-37.46	44.07	-7.53	Peak	100	123																																																																
3	8646.67	37.67	68.20	-30.53	30.47	7.20	Average	100	4																																																																
4	8646.67	50.65	88.20	-37.55	43.45	7.20	Peak	100	4																																																																
5	12970.00	38.87	68.20	-29.33	30.85	8.02	Average	100	45																																																																
6	12970.00	51.77	88.20	-36.43	43.75	8.02	Peak	100	45																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

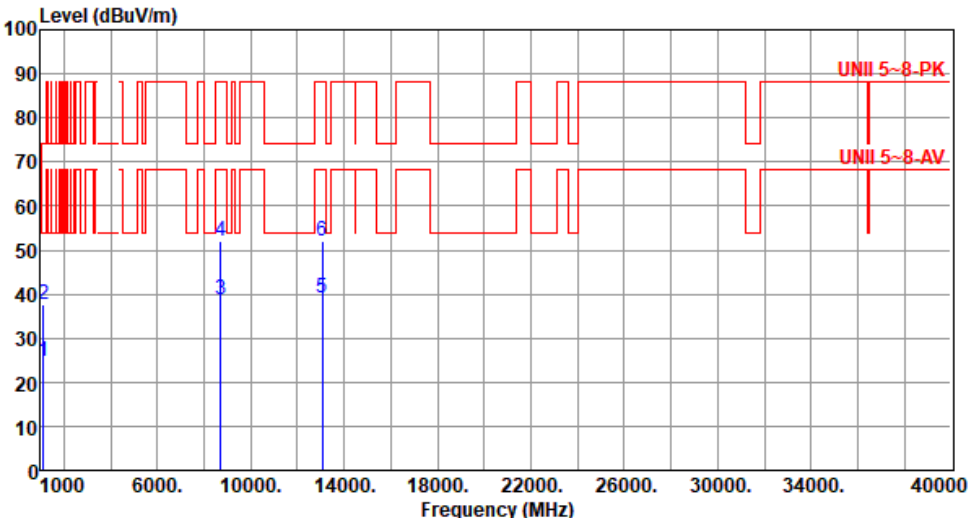

Modulation	be EHT40	Test Freq. (MHz)	6525																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.88</td><td>54.00</td><td>-29.12</td><td>32.41</td><td>-7.53</td><td>Average</td><td>100</td><td>346</td></tr><tr><td>2</td><td>1131.00</td><td>37.47</td><td>74.00</td><td>-36.53</td><td>45.00</td><td>-7.53</td><td>Peak</td><td>100</td><td>346</td></tr><tr><td>3</td><td>8700.00</td><td>38.68</td><td>68.20</td><td>-29.52</td><td>31.30</td><td>7.38</td><td>Average</td><td>100</td><td>97</td></tr><tr><td>4</td><td>8700.00</td><td>52.08</td><td>88.20</td><td>-36.12</td><td>44.70</td><td>7.38</td><td>Peak</td><td>100</td><td>97</td></tr><tr><td>5</td><td>13050.00</td><td>39.17</td><td>68.20</td><td>-29.03</td><td>31.42</td><td>7.75</td><td>Average</td><td>100</td><td>317</td></tr><tr><td>6</td><td>13050.00</td><td>52.21</td><td>88.20</td><td>-35.99</td><td>44.46</td><td>7.75</td><td>Peak</td><td>100</td><td>317</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.88	54.00	-29.12	32.41	-7.53	Average	100	346	2	1131.00	37.47	74.00	-36.53	45.00	-7.53	Peak	100	346	3	8700.00	38.68	68.20	-29.52	31.30	7.38	Average	100	97	4	8700.00	52.08	88.20	-36.12	44.70	7.38	Peak	100	97	5	13050.00	39.17	68.20	-29.03	31.42	7.75	Average	100	317	6	13050.00	52.21	88.20	-35.99	44.46	7.75	Peak	100	317
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.88	54.00	-29.12	32.41	-7.53	Average	100	346																																																																
2	1131.00	37.47	74.00	-36.53	45.00	-7.53	Peak	100	346																																																																
3	8700.00	38.68	68.20	-29.52	31.30	7.38	Average	100	97																																																																
4	8700.00	52.08	88.20	-36.12	44.70	7.38	Peak	100	97																																																																
5	13050.00	39.17	68.20	-29.03	31.42	7.75	Average	100	317																																																																
6	13050.00	52.21	88.20	-35.99	44.46	7.75	Peak	100	317																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

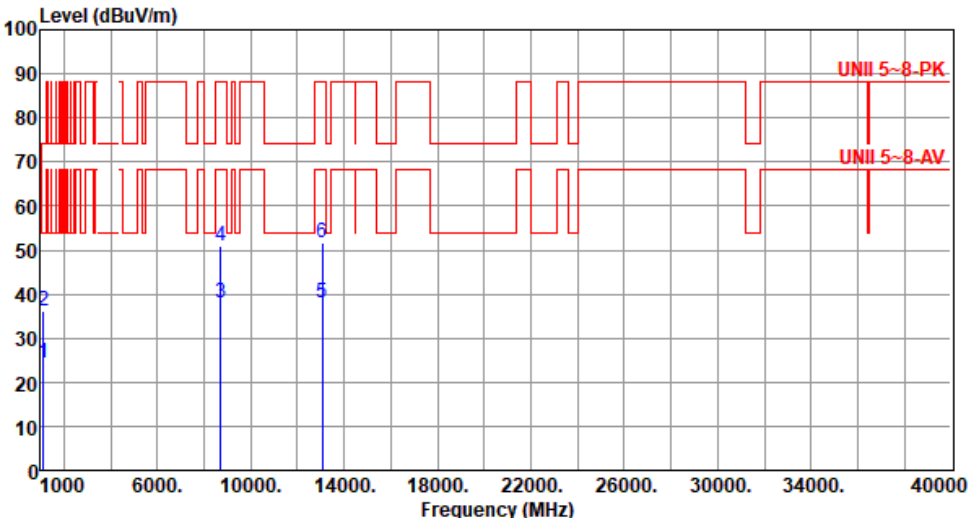

Modulation	be EHT40		Test Freq. (MHz)		6525																																																																										
Polarization	Vertical																																																																														
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.23</td><td>54.00</td><td>-29.77</td><td>31.76</td><td>-7.53</td><td>Average</td><td>100</td><td>227</td></tr><tr><td>2</td><td>1131.00</td><td>36.08</td><td>74.00</td><td>-37.92</td><td>43.61</td><td>-7.53</td><td>Peak</td><td>100</td><td>227</td></tr><tr><td>3</td><td>8700.00</td><td>37.87</td><td>68.20</td><td>-30.33</td><td>30.49</td><td>7.38</td><td>Average</td><td>100</td><td>348</td></tr><tr><td>4</td><td>8700.00</td><td>51.07</td><td>88.20</td><td>-37.13</td><td>43.69</td><td>7.38</td><td>Peak</td><td>100</td><td>348</td></tr><tr><td>5</td><td>13050.00</td><td>38.07</td><td>68.20</td><td>-30.13</td><td>30.32</td><td>7.75</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>6</td><td>13050.00</td><td>51.62</td><td>88.20</td><td>-36.58</td><td>43.87</td><td>7.75</td><td>Peak</td><td>100</td><td>31</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.23	54.00	-29.77	31.76	-7.53	Average	100	227	2	1131.00	36.08	74.00	-37.92	43.61	-7.53	Peak	100	227	3	8700.00	37.87	68.20	-30.33	30.49	7.38	Average	100	348	4	8700.00	51.07	88.20	-37.13	43.69	7.38	Peak	100	348	5	13050.00	38.07	68.20	-30.13	30.32	7.75	Average	100	31	6	13050.00	51.62	88.20	-36.58	43.87	7.75	Peak	100	31
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	24.23	54.00	-29.77	31.76	-7.53	Average	100	227																																																																						
2	1131.00	36.08	74.00	-37.92	43.61	-7.53	Peak	100	227																																																																						
3	8700.00	37.87	68.20	-30.33	30.49	7.38	Average	100	348																																																																						
4	8700.00	51.07	88.20	-37.13	43.69	7.38	Peak	100	348																																																																						
5	13050.00	38.07	68.20	-30.13	30.32	7.75	Average	100	31																																																																						
6	13050.00	51.62	88.20	-36.58	43.87	7.75	Peak	100	31																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															



Modulation	be EHT40	Test Freq. (MHz)	6565																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.24</td><td>54.00</td><td>-29.76</td><td>31.77</td><td>-7.53</td><td>Average</td><td>100</td><td>129</td></tr><tr><td>2</td><td>1131.00</td><td>37.57</td><td>74.00</td><td>-36.43</td><td>45.10</td><td>-7.53</td><td>Peak</td><td>100</td><td>129</td></tr><tr><td>3</td><td>8753.33</td><td>38.73</td><td>68.20</td><td>-29.47</td><td>31.39</td><td>7.34</td><td>Average</td><td>100</td><td>64</td></tr><tr><td>4</td><td>8753.33</td><td>52.21</td><td>88.20</td><td>-35.99</td><td>44.87</td><td>7.34</td><td>Peak</td><td>100</td><td>64</td></tr><tr><td>5</td><td>13130.00</td><td>39.28</td><td>68.20</td><td>-28.92</td><td>31.50</td><td>7.78</td><td>Average</td><td>100</td><td>343</td></tr><tr><td>6</td><td>13130.00</td><td>52.76</td><td>88.20</td><td>-35.44</td><td>44.98</td><td>7.78</td><td>Peak</td><td>100</td><td>343</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.24	54.00	-29.76	31.77	-7.53	Average	100	129	2	1131.00	37.57	74.00	-36.43	45.10	-7.53	Peak	100	129	3	8753.33	38.73	68.20	-29.47	31.39	7.34	Average	100	64	4	8753.33	52.21	88.20	-35.99	44.87	7.34	Peak	100	64	5	13130.00	39.28	68.20	-28.92	31.50	7.78	Average	100	343	6	13130.00	52.76	88.20	-35.44	44.98	7.78	Peak	100	343
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.24	54.00	-29.76	31.77	-7.53	Average	100	129																																																																
2	1131.00	37.57	74.00	-36.43	45.10	-7.53	Peak	100	129																																																																
3	8753.33	38.73	68.20	-29.47	31.39	7.34	Average	100	64																																																																
4	8753.33	52.21	88.20	-35.99	44.87	7.34	Peak	100	64																																																																
5	13130.00	39.28	68.20	-28.92	31.50	7.78	Average	100	343																																																																
6	13130.00	52.76	88.20	-35.44	44.98	7.78	Peak	100	343																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT40	Test Freq. (MHz)	6565																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>23.64</td><td>54.00</td><td>-30.36</td><td>31.17</td><td>-7.53</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>2</td><td>1131.00</td><td>36.50</td><td>74.00</td><td>-37.50</td><td>44.03</td><td>-7.53</td><td>Peak</td><td>100</td><td>105</td></tr><tr><td>3</td><td>8753.33</td><td>38.10</td><td>68.20</td><td>-30.10</td><td>30.76</td><td>7.34</td><td>Average</td><td>100</td><td>186</td></tr><tr><td>4</td><td>8753.33</td><td>50.73</td><td>88.20</td><td>-37.47</td><td>43.39</td><td>7.34</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>5</td><td>13130.00</td><td>38.35</td><td>68.20</td><td>-29.85</td><td>30.57</td><td>7.78</td><td>Average</td><td>100</td><td>23</td></tr><tr><td>6</td><td>13130.00</td><td>51.56</td><td>88.20</td><td>-36.64</td><td>43.78</td><td>7.78</td><td>Peak</td><td>100</td><td>23</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.64	54.00	-30.36	31.17	-7.53	Average	100	105	2	1131.00	36.50	74.00	-37.50	44.03	-7.53	Peak	100	105	3	8753.33	38.10	68.20	-30.10	30.76	7.34	Average	100	186	4	8753.33	50.73	88.20	-37.47	43.39	7.34	Peak	100	186	5	13130.00	38.35	68.20	-29.85	30.57	7.78	Average	100	23	6	13130.00	51.56	88.20	-36.64	43.78	7.78	Peak	100	23
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.64	54.00	-30.36	31.17	-7.53	Average	100	105																																																																
2	1131.00	36.50	74.00	-37.50	44.03	-7.53	Peak	100	105																																																																
3	8753.33	38.10	68.20	-30.10	30.76	7.34	Average	100	186																																																																
4	8753.33	50.73	88.20	-37.47	43.39	7.34	Peak	100	186																																																																
5	13130.00	38.35	68.20	-29.85	30.57	7.78	Average	100	23																																																																
6	13130.00	51.56	88.20	-36.64	43.78	7.78	Peak	100	23																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT40	Test Freq. (MHz)	6725																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
Level (dBUV/m) UNII 5~8-PK UNII 5~8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.55</td><td>54.00</td><td>-29.45</td><td>32.08</td><td>-7.53</td><td>Average</td><td>100</td><td>171</td></tr><tr><td>2</td><td>1131.00</td><td>37.12</td><td>74.00</td><td>-36.88</td><td>44.65</td><td>-7.53</td><td>Peak</td><td>100</td><td>171</td></tr><tr><td>3</td><td>8966.67</td><td>38.78</td><td>68.20</td><td>-29.42</td><td>31.50</td><td>7.28</td><td>Average</td><td>100</td><td>322</td></tr><tr><td>4</td><td>8966.67</td><td>52.14</td><td>88.20</td><td>-36.06</td><td>44.86</td><td>7.28</td><td>Peak</td><td>100</td><td>322</td></tr><tr><td>5</td><td>13450.00</td><td>39.62</td><td>68.20</td><td>-28.58</td><td>31.42</td><td>8.20</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>6</td><td>13450.00</td><td>52.90</td><td>88.20</td><td>-35.30</td><td>44.70</td><td>8.20</td><td>Peak</td><td>100</td><td>66</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.55	54.00	-29.45	32.08	-7.53	Average	100	171	2	1131.00	37.12	74.00	-36.88	44.65	-7.53	Peak	100	171	3	8966.67	38.78	68.20	-29.42	31.50	7.28	Average	100	322	4	8966.67	52.14	88.20	-36.06	44.86	7.28	Peak	100	322	5	13450.00	39.62	68.20	-28.58	31.42	8.20	Average	100	66	6	13450.00	52.90	88.20	-35.30	44.70	8.20	Peak	100	66
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.55	54.00	-29.45	32.08	-7.53	Average	100	171																																																																
2	1131.00	37.12	74.00	-36.88	44.65	-7.53	Peak	100	171																																																																
3	8966.67	38.78	68.20	-29.42	31.50	7.28	Average	100	322																																																																
4	8966.67	52.14	88.20	-36.06	44.86	7.28	Peak	100	322																																																																
5	13450.00	39.62	68.20	-28.58	31.42	8.20	Average	100	66																																																																
6	13450.00	52.90	88.20	-35.30	44.70	8.20	Peak	100	66																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT40	Test Freq. (MHz)	6725																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																																																																									
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>23.78</td><td>54.00</td><td>-30.22</td><td>31.31</td><td>-7.53</td><td>Average</td><td>100</td><td>233</td></tr><tr><td>2</td><td>1131.00</td><td>35.58</td><td>74.00</td><td>-38.42</td><td>43.11</td><td>-7.53</td><td>Peak</td><td>100</td><td>233</td></tr><tr><td>3</td><td>8966.67</td><td>37.98</td><td>68.20</td><td>-30.22</td><td>30.70</td><td>7.28</td><td>Average</td><td>100</td><td>317</td></tr><tr><td>4</td><td>8966.67</td><td>51.08</td><td>88.20</td><td>-37.12</td><td>43.80</td><td>7.28</td><td>Peak</td><td>100</td><td>317</td></tr><tr><td>5</td><td>13450.00</td><td>39.12</td><td>68.20</td><td>-29.08</td><td>30.92</td><td>8.20</td><td>Average</td><td>100</td><td>161</td></tr><tr><td>6</td><td>13450.00</td><td>51.66</td><td>88.20</td><td>-36.54</td><td>43.46</td><td>8.20</td><td>Peak</td><td>100</td><td>161</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.78	54.00	-30.22	31.31	-7.53	Average	100	233	2	1131.00	35.58	74.00	-38.42	43.11	-7.53	Peak	100	233	3	8966.67	37.98	68.20	-30.22	30.70	7.28	Average	100	317	4	8966.67	51.08	88.20	-37.12	43.80	7.28	Peak	100	317	5	13450.00	39.12	68.20	-29.08	30.92	8.20	Average	100	161	6	13450.00	51.66	88.20	-36.54	43.46	8.20	Peak	100	161
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.78	54.00	-30.22	31.31	-7.53	Average	100	233																																																																
2	1131.00	35.58	74.00	-38.42	43.11	-7.53	Peak	100	233																																																																
3	8966.67	37.98	68.20	-30.22	30.70	7.28	Average	100	317																																																																
4	8966.67	51.08	88.20	-37.12	43.80	7.28	Peak	100	317																																																																
5	13450.00	39.12	68.20	-29.08	30.92	8.20	Average	100	161																																																																
6	13450.00	51.66	88.20	-36.54	43.46	8.20	Peak	100	161																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT40	Test Freq. (MHz)	6845																																																																						
Polarization	Horizontal																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
Level (dBUV/m) UNII 5~8-PK UNII 5~8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>23.62</td><td>54.00</td><td>-30.38</td><td>31.15</td><td>-7.53</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>2</td><td>1131.00</td><td>37.77</td><td>74.00</td><td>-36.23</td><td>45.30</td><td>-7.53</td><td>Peak</td><td>100</td><td>31</td></tr><tr><td>3</td><td>9126.67</td><td>38.86</td><td>54.00</td><td>-15.14</td><td>31.26</td><td>7.60</td><td>Average</td><td>100</td><td>168</td></tr><tr><td>4</td><td>9126.67</td><td>51.76</td><td>74.00</td><td>-22.24</td><td>44.16</td><td>7.60</td><td>Peak</td><td>100</td><td>168</td></tr><tr><td>5</td><td>13690.00</td><td>39.38</td><td>68.20</td><td>-28.82</td><td>31.27</td><td>8.11</td><td>Average</td><td>100</td><td>244</td></tr><tr><td>6</td><td>13690.00</td><td>52.76</td><td>88.20</td><td>-35.44</td><td>44.65</td><td>8.11</td><td>Peak</td><td>100</td><td>244</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.62	54.00	-30.38	31.15	-7.53	Average	100	31	2	1131.00	37.77	74.00	-36.23	45.30	-7.53	Peak	100	31	3	9126.67	38.86	54.00	-15.14	31.26	7.60	Average	100	168	4	9126.67	51.76	74.00	-22.24	44.16	7.60	Peak	100	168	5	13690.00	39.38	68.20	-28.82	31.27	8.11	Average	100	244	6	13690.00	52.76	88.20	-35.44	44.65	8.11	Peak	100	244
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.62	54.00	-30.38	31.15	-7.53	Average	100	31																																																																
2	1131.00	37.77	74.00	-36.23	45.30	-7.53	Peak	100	31																																																																
3	9126.67	38.86	54.00	-15.14	31.26	7.60	Average	100	168																																																																
4	9126.67	51.76	74.00	-22.24	44.16	7.60	Peak	100	168																																																																
5	13690.00	39.38	68.20	-28.82	31.27	8.11	Average	100	244																																																																
6	13690.00	52.76	88.20	-35.44	44.65	8.11	Peak	100	244																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT40		Test Freq. (MHz)		6845																																																																										
Polarization	Vertical																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>23.76</td><td>54.00</td><td>-30.24</td><td>31.29</td><td>-7.53</td><td>Average</td><td>100</td><td>19</td></tr><tr><td>2</td><td>1131.00</td><td>36.24</td><td>74.00</td><td>-37.76</td><td>43.77</td><td>-7.53</td><td>Peak</td><td>100</td><td>19</td></tr><tr><td>3</td><td>9126.67</td><td>37.81</td><td>54.00</td><td>-16.19</td><td>30.21</td><td>7.60</td><td>Average</td><td>100</td><td>143</td></tr><tr><td>4</td><td>9126.67</td><td>50.84</td><td>74.00</td><td>-23.16</td><td>43.24</td><td>7.60</td><td>Peak</td><td>100</td><td>143</td></tr><tr><td>5</td><td>13690.00</td><td>38.38</td><td>68.20</td><td>-29.82</td><td>30.27</td><td>8.11</td><td>Average</td><td>100</td><td>203</td></tr><tr><td>6</td><td>13690.00</td><td>51.55</td><td>88.20</td><td>-36.65</td><td>43.44</td><td>8.11</td><td>Peak</td><td>100</td><td>203</td></tr></tbody></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.76	54.00	-30.24	31.29	-7.53	Average	100	19	2	1131.00	36.24	74.00	-37.76	43.77	-7.53	Peak	100	19	3	9126.67	37.81	54.00	-16.19	30.21	7.60	Average	100	143	4	9126.67	50.84	74.00	-23.16	43.24	7.60	Peak	100	143	5	13690.00	38.38	68.20	-29.82	30.27	8.11	Average	100	203	6	13690.00	51.55	88.20	-36.65	43.44	8.11	Peak	100	203
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	23.76	54.00	-30.24	31.29	-7.53	Average	100	19																																																																						
2	1131.00	36.24	74.00	-37.76	43.77	-7.53	Peak	100	19																																																																						
3	9126.67	37.81	54.00	-16.19	30.21	7.60	Average	100	143																																																																						
4	9126.67	50.84	74.00	-23.16	43.24	7.60	Peak	100	143																																																																						
5	13690.00	38.38	68.20	-29.82	30.27	8.11	Average	100	203																																																																						
6	13690.00	51.55	88.20	-36.65	43.44	8.11	Peak	100	203																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															



Modulation	be EHT40		Test Freq. (MHz)		6885																																																																										
Polarization	Horizontal																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.56</td><td>54.00</td><td>-29.44</td><td>32.09</td><td>-7.53</td><td>Average</td><td>100</td><td>314</td></tr><tr><td>2</td><td>1131.00</td><td>37.17</td><td>74.00</td><td>-36.83</td><td>44.70</td><td>-7.53</td><td>Peak</td><td>100</td><td>314</td></tr><tr><td>3</td><td>9180.00</td><td>39.13</td><td>54.00</td><td>-14.87</td><td>31.32</td><td>7.81</td><td>Average</td><td>100</td><td>113</td></tr><tr><td>4</td><td>9180.00</td><td>52.47</td><td>74.00</td><td>-21.53</td><td>44.66</td><td>7.81</td><td>Peak</td><td>100</td><td>113</td></tr><tr><td>5</td><td>13770.00</td><td>39.68</td><td>68.20</td><td>-28.52</td><td>31.57</td><td>8.11</td><td>Average</td><td>100</td><td>343</td></tr><tr><td>6</td><td>13770.00</td><td>52.44</td><td>88.20</td><td>-35.76</td><td>44.33</td><td>8.11</td><td>Peak</td><td>100</td><td>343</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.56	54.00	-29.44	32.09	-7.53	Average	100	314	2	1131.00	37.17	74.00	-36.83	44.70	-7.53	Peak	100	314	3	9180.00	39.13	54.00	-14.87	31.32	7.81	Average	100	113	4	9180.00	52.47	74.00	-21.53	44.66	7.81	Peak	100	113	5	13770.00	39.68	68.20	-28.52	31.57	8.11	Average	100	343	6	13770.00	52.44	88.20	-35.76	44.33	8.11	Peak	100	343
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	24.56	54.00	-29.44	32.09	-7.53	Average	100	314																																																																						
2	1131.00	37.17	74.00	-36.83	44.70	-7.53	Peak	100	314																																																																						
3	9180.00	39.13	54.00	-14.87	31.32	7.81	Average	100	113																																																																						
4	9180.00	52.47	74.00	-21.53	44.66	7.81	Peak	100	113																																																																						
5	13770.00	39.68	68.20	-28.52	31.57	8.11	Average	100	343																																																																						
6	13770.00	52.44	88.20	-35.76	44.33	8.11	Peak	100	343																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															



Modulation	be EHT40		Test Freq. (MHz)		6885																																																																										
Polarization	Vertical																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>23.93</td><td>54.00</td><td>-30.07</td><td>31.46</td><td>-7.53</td><td>Average</td><td>100</td><td>308</td></tr><tr><td>2</td><td>1131.00</td><td>35.80</td><td>74.00</td><td>-38.20</td><td>43.33</td><td>-7.53</td><td>Peak</td><td>100</td><td>308</td></tr><tr><td>3</td><td>9180.00</td><td>38.30</td><td>54.00</td><td>-15.70</td><td>30.49</td><td>7.81</td><td>Average</td><td>100</td><td>168</td></tr><tr><td>4</td><td>9180.00</td><td>51.68</td><td>74.00</td><td>-22.32</td><td>43.87</td><td>7.81</td><td>Peak</td><td>100</td><td>168</td></tr><tr><td>5</td><td>13770.00</td><td>38.79</td><td>68.20</td><td>-29.41</td><td>30.68</td><td>8.11</td><td>Average</td><td>100</td><td>234</td></tr><tr><td>6</td><td>13770.00</td><td>51.65</td><td>88.20</td><td>-36.55</td><td>43.54</td><td>8.11</td><td>Peak</td><td>100</td><td>234</td></tr></tbody></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.93	54.00	-30.07	31.46	-7.53	Average	100	308	2	1131.00	35.80	74.00	-38.20	43.33	-7.53	Peak	100	308	3	9180.00	38.30	54.00	-15.70	30.49	7.81	Average	100	168	4	9180.00	51.68	74.00	-22.32	43.87	7.81	Peak	100	168	5	13770.00	38.79	68.20	-29.41	30.68	8.11	Average	100	234	6	13770.00	51.65	88.20	-36.55	43.54	8.11	Peak	100	234
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	23.93	54.00	-30.07	31.46	-7.53	Average	100	308																																																																						
2	1131.00	35.80	74.00	-38.20	43.33	-7.53	Peak	100	308																																																																						
3	9180.00	38.30	54.00	-15.70	30.49	7.81	Average	100	168																																																																						
4	9180.00	51.68	74.00	-22.32	43.87	7.81	Peak	100	168																																																																						
5	13770.00	38.79	68.20	-29.41	30.68	8.11	Average	100	234																																																																						
6	13770.00	51.65	88.20	-36.55	43.54	8.11	Peak	100	234																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															



Modulation	be EHT40	Test Freq. (MHz)	6925																																																																						
Polarization	Horizontal																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.69</td><td>54.00</td><td>-29.31</td><td>32.22</td><td>-7.53</td><td>Average</td><td>100</td><td>131</td></tr><tr><td>2</td><td>1131.00</td><td>38.02</td><td>74.00</td><td>-35.98</td><td>45.55</td><td>-7.53</td><td>Peak</td><td>100</td><td>131</td></tr><tr><td>3</td><td>9233.33</td><td>39.61</td><td>68.20</td><td>-28.59</td><td>31.45</td><td>8.16</td><td>Average</td><td>100</td><td>118</td></tr><tr><td>4</td><td>9233.33</td><td>52.74</td><td>88.20</td><td>-35.46</td><td>44.58</td><td>8.16</td><td>Peak</td><td>100</td><td>118</td></tr><tr><td>5</td><td>13850.00</td><td>39.43</td><td>68.20</td><td>-28.77</td><td>31.35</td><td>8.08</td><td>Average</td><td>100</td><td>240</td></tr><tr><td>6</td><td>13850.00</td><td>52.70</td><td>88.20</td><td>-35.50</td><td>44.62</td><td>8.08</td><td>Peak</td><td>100</td><td>240</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.69	54.00	-29.31	32.22	-7.53	Average	100	131	2	1131.00	38.02	74.00	-35.98	45.55	-7.53	Peak	100	131	3	9233.33	39.61	68.20	-28.59	31.45	8.16	Average	100	118	4	9233.33	52.74	88.20	-35.46	44.58	8.16	Peak	100	118	5	13850.00	39.43	68.20	-28.77	31.35	8.08	Average	100	240	6	13850.00	52.70	88.20	-35.50	44.62	8.08	Peak	100	240
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.69	54.00	-29.31	32.22	-7.53	Average	100	131																																																																
2	1131.00	38.02	74.00	-35.98	45.55	-7.53	Peak	100	131																																																																
3	9233.33	39.61	68.20	-28.59	31.45	8.16	Average	100	118																																																																
4	9233.33	52.74	88.20	-35.46	44.58	8.16	Peak	100	118																																																																
5	13850.00	39.43	68.20	-28.77	31.35	8.08	Average	100	240																																																																
6	13850.00	52.70	88.20	-35.50	44.62	8.08	Peak	100	240																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT40		Test Freq. (MHz)		6925																																																																						
Polarization	Vertical																																																																										
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																											
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.09</td><td>54.00</td><td>-29.91</td><td>31.62</td><td>-7.53</td><td>Average</td><td>100</td><td>111</td></tr><tr><td>2</td><td>1131.00</td><td>36.96</td><td>74.00</td><td>-37.04</td><td>44.49</td><td>-7.53</td><td>Peak</td><td>100</td><td>111</td></tr><tr><td>3</td><td>9233.33</td><td>38.46</td><td>68.20</td><td>-29.74</td><td>30.30</td><td>8.16</td><td>Average</td><td>100</td><td>138</td></tr><tr><td>4</td><td>9233.33</td><td>51.64</td><td>88.20</td><td>-36.56</td><td>43.48</td><td>8.16</td><td>Peak</td><td>100</td><td>138</td></tr><tr><td>5</td><td>13850.00</td><td>38.30</td><td>68.20</td><td>-29.90</td><td>30.22</td><td>8.08</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>6</td><td>13850.00</td><td>51.39</td><td>88.20</td><td>-36.81</td><td>43.31</td><td>8.08</td><td>Peak</td><td>100</td><td>213</td></tr></tbody></table>							Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.09	54.00	-29.91	31.62	-7.53	Average	100	111	2	1131.00	36.96	74.00	-37.04	44.49	-7.53	Peak	100	111	3	9233.33	38.46	68.20	-29.74	30.30	8.16	Average	100	138	4	9233.33	51.64	88.20	-36.56	43.48	8.16	Peak	100	138	5	13850.00	38.30	68.20	-29.90	30.22	8.08	Average	100	213	6	13850.00	51.39	88.20	-36.81	43.31	8.08	Peak	100	213
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																		
1	1131.00	24.09	54.00	-29.91	31.62	-7.53	Average	100	111																																																																		
2	1131.00	36.96	74.00	-37.04	44.49	-7.53	Peak	100	111																																																																		
3	9233.33	38.46	68.20	-29.74	30.30	8.16	Average	100	138																																																																		
4	9233.33	51.64	88.20	-36.56	43.48	8.16	Peak	100	138																																																																		
5	13850.00	38.30	68.20	-29.90	30.22	8.08	Average	100	213																																																																		
6	13850.00	51.39	88.20	-36.81	43.31	8.08	Peak	100	213																																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																											




Modulation	be EHT40		Test Freq. (MHz)		7005																																																																							
Polarization	Horizontal																																																																											
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																												
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>25.00</td><td>54.00</td><td>-29.00</td><td>32.53</td><td>-7.53</td><td>Average</td><td>100</td><td>174</td></tr><tr><td>2</td><td>1131.00</td><td>37.57</td><td>74.00</td><td>-36.43</td><td>45.10</td><td>-7.53</td><td>Peak</td><td>100</td><td>174</td></tr><tr><td>3</td><td>9340.00</td><td>39.95</td><td>54.00</td><td>-14.05</td><td>31.47</td><td>8.48</td><td>Average</td><td>100</td><td>136</td></tr><tr><td>4</td><td>9340.00</td><td>53.06</td><td>74.00</td><td>-20.94</td><td>44.58</td><td>8.48</td><td>Peak</td><td>100</td><td>136</td></tr><tr><td>5</td><td>14010.00</td><td>39.69</td><td>68.20</td><td>-28.51</td><td>31.25</td><td>8.44</td><td>Average</td><td>100</td><td>298</td></tr><tr><td>6</td><td>14010.00</td><td>53.10</td><td>88.20</td><td>-35.10</td><td>44.66</td><td>8.44</td><td>Peak</td><td>100</td><td>298</td></tr></table>								Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	25.00	54.00	-29.00	32.53	-7.53	Average	100	174	2	1131.00	37.57	74.00	-36.43	45.10	-7.53	Peak	100	174	3	9340.00	39.95	54.00	-14.05	31.47	8.48	Average	100	136	4	9340.00	53.06	74.00	-20.94	44.58	8.48	Peak	100	136	5	14010.00	39.69	68.20	-28.51	31.25	8.44	Average	100	298	6	14010.00	53.10	88.20	-35.10	44.66	8.44	Peak	100	298
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																			
1	1131.00	25.00	54.00	-29.00	32.53	-7.53	Average	100	174																																																																			
2	1131.00	37.57	74.00	-36.43	45.10	-7.53	Peak	100	174																																																																			
3	9340.00	39.95	54.00	-14.05	31.47	8.48	Average	100	136																																																																			
4	9340.00	53.06	74.00	-20.94	44.58	8.48	Peak	100	136																																																																			
5	14010.00	39.69	68.20	-28.51	31.25	8.44	Average	100	298																																																																			
6	14010.00	53.10	88.20	-35.10	44.66	8.44	Peak	100	298																																																																			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																												



Modulation	be EHT40	Test Freq. (MHz)	7005																																																																						
Polarization	Vertical																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.23</td><td>54.00</td><td>-29.77</td><td>31.76</td><td>-7.53</td><td>Average</td><td>100</td><td>228</td></tr><tr><td>2</td><td>1131.00</td><td>36.33</td><td>74.00</td><td>-37.67</td><td>43.86</td><td>-7.53</td><td>Peak</td><td>100</td><td>228</td></tr><tr><td>3</td><td>9340.00</td><td>38.90</td><td>54.00</td><td>-15.10</td><td>30.42</td><td>8.48</td><td>Average</td><td>100</td><td>113</td></tr><tr><td>4</td><td>9340.00</td><td>52.06</td><td>74.00</td><td>-21.94</td><td>43.58</td><td>8.48</td><td>Peak</td><td>100</td><td>113</td></tr><tr><td>5</td><td>14010.00</td><td>38.73</td><td>68.20</td><td>-29.47</td><td>30.29</td><td>8.44</td><td>Average</td><td>100</td><td>236</td></tr><tr><td>6</td><td>14010.00</td><td>52.06</td><td>88.20</td><td>-36.14</td><td>43.62</td><td>8.44</td><td>Peak</td><td>100</td><td>236</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.23	54.00	-29.77	31.76	-7.53	Average	100	228	2	1131.00	36.33	74.00	-37.67	43.86	-7.53	Peak	100	228	3	9340.00	38.90	54.00	-15.10	30.42	8.48	Average	100	113	4	9340.00	52.06	74.00	-21.94	43.58	8.48	Peak	100	113	5	14010.00	38.73	68.20	-29.47	30.29	8.44	Average	100	236	6	14010.00	52.06	88.20	-36.14	43.62	8.44	Peak	100	236
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.23	54.00	-29.77	31.76	-7.53	Average	100	228																																																																
2	1131.00	36.33	74.00	-37.67	43.86	-7.53	Peak	100	228																																																																
3	9340.00	38.90	54.00	-15.10	30.42	8.48	Average	100	113																																																																
4	9340.00	52.06	74.00	-21.94	43.58	8.48	Peak	100	113																																																																
5	14010.00	38.73	68.20	-29.47	30.29	8.44	Average	100	236																																																																
6	14010.00	52.06	88.20	-36.14	43.62	8.44	Peak	100	236																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

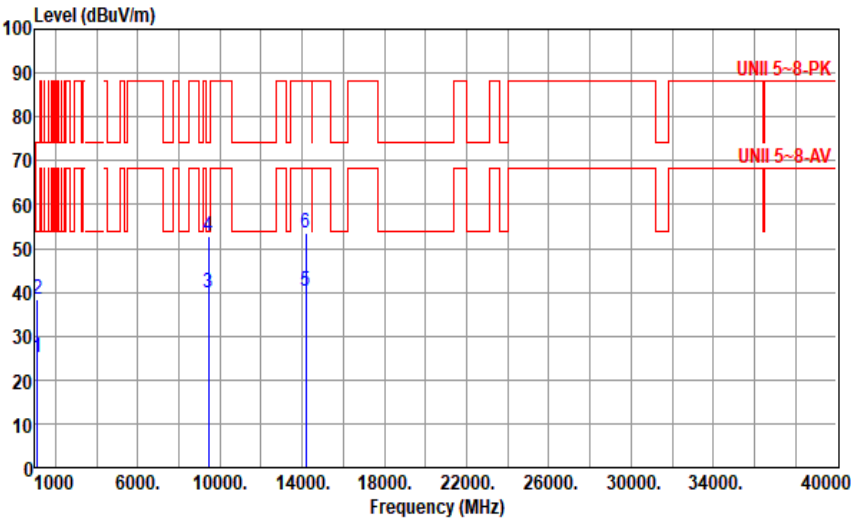

Modulation	be EHT40	Test Freq. (MHz)	7085																																																																						
Polarization	Horizontal																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>25.07</td><td>54.00</td><td>-28.93</td><td>32.60</td><td>-7.53</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>2</td><td>1131.00</td><td>38.22</td><td>74.00</td><td>-35.78</td><td>45.75</td><td>-7.53</td><td>Peak</td><td>100</td><td>77</td></tr><tr><td>3</td><td>9446.67</td><td>39.70</td><td>54.00</td><td>-14.30</td><td>31.43</td><td>8.27</td><td>Average</td><td>100</td><td>155</td></tr><tr><td>4</td><td>9446.67</td><td>52.93</td><td>74.00</td><td>-21.07</td><td>44.66</td><td>8.27</td><td>Peak</td><td>100</td><td>155</td></tr><tr><td>5</td><td>14170.00</td><td>40.39</td><td>68.20</td><td>-27.81</td><td>31.50</td><td>8.89</td><td>Average</td><td>100</td><td>233</td></tr><tr><td>6</td><td>14170.00</td><td>53.33</td><td>88.20</td><td>-34.87</td><td>44.44</td><td>8.89</td><td>Peak</td><td>100</td><td>233</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	25.07	54.00	-28.93	32.60	-7.53	Average	100	77	2	1131.00	38.22	74.00	-35.78	45.75	-7.53	Peak	100	77	3	9446.67	39.70	54.00	-14.30	31.43	8.27	Average	100	155	4	9446.67	52.93	74.00	-21.07	44.66	8.27	Peak	100	155	5	14170.00	40.39	68.20	-27.81	31.50	8.89	Average	100	233	6	14170.00	53.33	88.20	-34.87	44.44	8.89	Peak	100	233
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	25.07	54.00	-28.93	32.60	-7.53	Average	100	77																																																																
2	1131.00	38.22	74.00	-35.78	45.75	-7.53	Peak	100	77																																																																
3	9446.67	39.70	54.00	-14.30	31.43	8.27	Average	100	155																																																																
4	9446.67	52.93	74.00	-21.07	44.66	8.27	Peak	100	155																																																																
5	14170.00	40.39	68.20	-27.81	31.50	8.89	Average	100	233																																																																
6	14170.00	53.33	88.20	-34.87	44.44	8.89	Peak	100	233																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT40		Test Freq. (MHz)		7085																																																																										
Polarization	Vertical																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.21</td><td>54.00</td><td>-29.79</td><td>31.74</td><td>-7.53</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>2</td><td>1131.00</td><td>36.59</td><td>74.00</td><td>-37.41</td><td>44.12</td><td>-7.53</td><td>Peak</td><td>100</td><td>48</td></tr><tr><td>3</td><td>9446.67</td><td>38.31</td><td>54.00</td><td>-15.69</td><td>30.04</td><td>8.27</td><td>Average</td><td>100</td><td>121</td></tr><tr><td>4</td><td>9446.67</td><td>52.10</td><td>74.00</td><td>-21.90</td><td>43.83</td><td>8.27</td><td>Peak</td><td>100</td><td>121</td></tr><tr><td>5</td><td>14170.00</td><td>40.30</td><td>68.20</td><td>-27.90</td><td>31.41</td><td>8.89</td><td>Average</td><td>100</td><td>259</td></tr><tr><td>6</td><td>14170.00</td><td>52.66</td><td>88.20</td><td>-35.54</td><td>43.77</td><td>8.89</td><td>Peak</td><td>100</td><td>259</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.21	54.00	-29.79	31.74	-7.53	Average	100	48	2	1131.00	36.59	74.00	-37.41	44.12	-7.53	Peak	100	48	3	9446.67	38.31	54.00	-15.69	30.04	8.27	Average	100	121	4	9446.67	52.10	74.00	-21.90	43.83	8.27	Peak	100	121	5	14170.00	40.30	68.20	-27.90	31.41	8.89	Average	100	259	6	14170.00	52.66	88.20	-35.54	43.77	8.89	Peak	100	259
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	24.21	54.00	-29.79	31.74	-7.53	Average	100	48																																																																						
2	1131.00	36.59	74.00	-37.41	44.12	-7.53	Peak	100	48																																																																						
3	9446.67	38.31	54.00	-15.69	30.04	8.27	Average	100	121																																																																						
4	9446.67	52.10	74.00	-21.90	43.83	8.27	Peak	100	121																																																																						
5	14170.00	40.30	68.20	-27.90	31.41	8.89	Average	100	259																																																																						
6	14170.00	52.66	88.20	-35.54	43.77	8.89	Peak	100	259																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															



Modulation	be EHT80		Test Freq. (MHz)		5985																																																																										
Polarization	Horizontal																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>25.03</td><td>54.00</td><td>-28.97</td><td>32.56</td><td>-7.53</td><td>Average</td><td>100</td><td>305</td></tr><tr><td>2</td><td>1131.00</td><td>37.62</td><td>74.00</td><td>-36.38</td><td>45.15</td><td>-7.53</td><td>Peak</td><td>100</td><td>305</td></tr><tr><td>3</td><td>7980.00</td><td>38.07</td><td>68.20</td><td>-30.13</td><td>31.24</td><td>6.83</td><td>Average</td><td>100</td><td>138</td></tr><tr><td>4</td><td>7980.00</td><td>51.16</td><td>88.20</td><td>-37.04</td><td>44.33</td><td>6.83</td><td>Peak</td><td>100</td><td>138</td></tr><tr><td>5</td><td>11970.00</td><td>39.68</td><td>54.00</td><td>-14.32</td><td>31.49</td><td>8.19</td><td>Average</td><td>100</td><td>228</td></tr><tr><td>6</td><td>11970.00</td><td>52.94</td><td>74.00</td><td>-21.06</td><td>44.75</td><td>8.19</td><td>Peak</td><td>100</td><td>228</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	25.03	54.00	-28.97	32.56	-7.53	Average	100	305	2	1131.00	37.62	74.00	-36.38	45.15	-7.53	Peak	100	305	3	7980.00	38.07	68.20	-30.13	31.24	6.83	Average	100	138	4	7980.00	51.16	88.20	-37.04	44.33	6.83	Peak	100	138	5	11970.00	39.68	54.00	-14.32	31.49	8.19	Average	100	228	6	11970.00	52.94	74.00	-21.06	44.75	8.19	Peak	100	228
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	25.03	54.00	-28.97	32.56	-7.53	Average	100	305																																																																						
2	1131.00	37.62	74.00	-36.38	45.15	-7.53	Peak	100	305																																																																						
3	7980.00	38.07	68.20	-30.13	31.24	6.83	Average	100	138																																																																						
4	7980.00	51.16	88.20	-37.04	44.33	6.83	Peak	100	138																																																																						
5	11970.00	39.68	54.00	-14.32	31.49	8.19	Average	100	228																																																																						
6	11970.00	52.94	74.00	-21.06	44.75	8.19	Peak	100	228																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															



Modulation	be EHT80	Test Freq. (MHz)	5985																																																																						
Polarization	Vertical																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.38</td><td>54.00</td><td>-29.62</td><td>31.91</td><td>-7.53</td><td>Average</td><td>100</td><td>310</td></tr><tr><td>2</td><td>1131.00</td><td>36.25</td><td>74.00</td><td>-37.75</td><td>43.78</td><td>-7.53</td><td>Peak</td><td>100</td><td>310</td></tr><tr><td>3</td><td>7980.00</td><td>37.02</td><td>68.20</td><td>-31.18</td><td>30.19</td><td>6.83</td><td>Average</td><td>100</td><td>174</td></tr><tr><td>4</td><td>7980.00</td><td>50.01</td><td>88.20</td><td>-38.19</td><td>43.18</td><td>6.83</td><td>Peak</td><td>100</td><td>174</td></tr><tr><td>5</td><td>11970.00</td><td>38.48</td><td>54.00</td><td>-15.52</td><td>30.29</td><td>8.19</td><td>Average</td><td>100</td><td>261</td></tr><tr><td>6</td><td>11970.00</td><td>51.56</td><td>74.00</td><td>-22.44</td><td>43.37</td><td>8.19</td><td>Peak</td><td>100</td><td>261</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.38	54.00	-29.62	31.91	-7.53	Average	100	310	2	1131.00	36.25	74.00	-37.75	43.78	-7.53	Peak	100	310	3	7980.00	37.02	68.20	-31.18	30.19	6.83	Average	100	174	4	7980.00	50.01	88.20	-38.19	43.18	6.83	Peak	100	174	5	11970.00	38.48	54.00	-15.52	30.29	8.19	Average	100	261	6	11970.00	51.56	74.00	-22.44	43.37	8.19	Peak	100	261
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.38	54.00	-29.62	31.91	-7.53	Average	100	310																																																																
2	1131.00	36.25	74.00	-37.75	43.78	-7.53	Peak	100	310																																																																
3	7980.00	37.02	68.20	-31.18	30.19	6.83	Average	100	174																																																																
4	7980.00	50.01	88.20	-38.19	43.18	6.83	Peak	100	174																																																																
5	11970.00	38.48	54.00	-15.52	30.29	8.19	Average	100	261																																																																
6	11970.00	51.56	74.00	-22.44	43.37	8.19	Peak	100	261																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT80		Test Freq. (MHz)		6145																																																																										
Polarization	Horizontal																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.09</td><td>54.00</td><td>-29.91</td><td>31.62</td><td>-7.53</td><td>Average</td><td>100</td><td>167</td></tr><tr><td>2</td><td>1131.00</td><td>37.42</td><td>74.00</td><td>-36.58</td><td>44.95</td><td>-7.53</td><td>Peak</td><td>100</td><td>167</td></tr><tr><td>3</td><td>8193.33</td><td>38.17</td><td>54.00</td><td>-15.83</td><td>31.58</td><td>6.59</td><td>Average</td><td>100</td><td>138</td></tr><tr><td>4</td><td>8193.33</td><td>50.76</td><td>74.00</td><td>-23.24</td><td>44.17</td><td>6.59</td><td>Peak</td><td>100</td><td>138</td></tr><tr><td>5</td><td>12290.00</td><td>39.41</td><td>54.00</td><td>-14.59</td><td>31.49</td><td>7.92</td><td>Average</td><td>100</td><td>254</td></tr><tr><td>6</td><td>12290.00</td><td>52.15</td><td>74.00</td><td>-21.85</td><td>44.23</td><td>7.92</td><td>Peak</td><td>100</td><td>254</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.09	54.00	-29.91	31.62	-7.53	Average	100	167	2	1131.00	37.42	74.00	-36.58	44.95	-7.53	Peak	100	167	3	8193.33	38.17	54.00	-15.83	31.58	6.59	Average	100	138	4	8193.33	50.76	74.00	-23.24	44.17	6.59	Peak	100	138	5	12290.00	39.41	54.00	-14.59	31.49	7.92	Average	100	254	6	12290.00	52.15	74.00	-21.85	44.23	7.92	Peak	100	254
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	24.09	54.00	-29.91	31.62	-7.53	Average	100	167																																																																						
2	1131.00	37.42	74.00	-36.58	44.95	-7.53	Peak	100	167																																																																						
3	8193.33	38.17	54.00	-15.83	31.58	6.59	Average	100	138																																																																						
4	8193.33	50.76	74.00	-23.24	44.17	6.59	Peak	100	138																																																																						
5	12290.00	39.41	54.00	-14.59	31.49	7.92	Average	100	254																																																																						
6	12290.00	52.15	74.00	-21.85	44.23	7.92	Peak	100	254																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															



Modulation	be EHT80	Test Freq. (MHz)	6145																																																																						
Polarization	Vertical																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>23.49</td><td>54.00</td><td>-30.51</td><td>31.02</td><td>-7.53</td><td>Average</td><td>100</td><td>146</td></tr><tr><td>2</td><td>1131.00</td><td>36.36</td><td>74.00</td><td>-37.64</td><td>43.89</td><td>-7.53</td><td>Peak</td><td>100</td><td>146</td></tr><tr><td>3</td><td>8193.33</td><td>36.83</td><td>54.00</td><td>-17.17</td><td>30.24</td><td>6.59</td><td>Average</td><td>100</td><td>133</td></tr><tr><td>4</td><td>8193.33</td><td>50.34</td><td>74.00</td><td>-23.66</td><td>43.75</td><td>6.59</td><td>Peak</td><td>100</td><td>133</td></tr><tr><td>5</td><td>12290.00</td><td>38.57</td><td>54.00</td><td>-15.43</td><td>30.65</td><td>7.92</td><td>Average</td><td>100</td><td>311</td></tr><tr><td>6</td><td>12290.00</td><td>51.58</td><td>74.00</td><td>-22.42</td><td>43.66</td><td>7.92</td><td>Peak</td><td>100</td><td>311</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.49	54.00	-30.51	31.02	-7.53	Average	100	146	2	1131.00	36.36	74.00	-37.64	43.89	-7.53	Peak	100	146	3	8193.33	36.83	54.00	-17.17	30.24	6.59	Average	100	133	4	8193.33	50.34	74.00	-23.66	43.75	6.59	Peak	100	133	5	12290.00	38.57	54.00	-15.43	30.65	7.92	Average	100	311	6	12290.00	51.58	74.00	-22.42	43.66	7.92	Peak	100	311
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.49	54.00	-30.51	31.02	-7.53	Average	100	146																																																																
2	1131.00	36.36	74.00	-37.64	43.89	-7.53	Peak	100	146																																																																
3	8193.33	36.83	54.00	-17.17	30.24	6.59	Average	100	133																																																																
4	8193.33	50.34	74.00	-23.66	43.75	6.59	Peak	100	133																																																																
5	12290.00	38.57	54.00	-15.43	30.65	7.92	Average	100	311																																																																
6	12290.00	51.58	74.00	-22.42	43.66	7.92	Peak	100	311																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT80	Test Freq. (MHz)	6385																																																																						
Polarization	Horizontal																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.40</td><td>54.00</td><td>-29.60</td><td>31.93</td><td>-7.53</td><td>Average</td><td>100</td><td>197</td></tr><tr><td>2</td><td>1131.00</td><td>36.97</td><td>74.00</td><td>-37.03</td><td>44.50</td><td>-7.53</td><td>Peak</td><td>100</td><td>197</td></tr><tr><td>3</td><td>8513.33</td><td>38.07</td><td>68.20</td><td>-30.13</td><td>31.46</td><td>6.61</td><td>Average</td><td>100</td><td>129</td></tr><tr><td>4</td><td>8513.33</td><td>50.99</td><td>88.20</td><td>-37.21</td><td>44.38</td><td>6.61</td><td>Peak</td><td>100</td><td>129</td></tr><tr><td>5</td><td>12770.00</td><td>39.43</td><td>68.20</td><td>-28.77</td><td>31.52</td><td>7.91</td><td>Average</td><td>100</td><td>281</td></tr><tr><td>6</td><td>12770.00</td><td>52.35</td><td>88.20</td><td>-35.85</td><td>44.44</td><td>7.91</td><td>Peak</td><td>100</td><td>281</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.40	54.00	-29.60	31.93	-7.53	Average	100	197	2	1131.00	36.97	74.00	-37.03	44.50	-7.53	Peak	100	197	3	8513.33	38.07	68.20	-30.13	31.46	6.61	Average	100	129	4	8513.33	50.99	88.20	-37.21	44.38	6.61	Peak	100	129	5	12770.00	39.43	68.20	-28.77	31.52	7.91	Average	100	281	6	12770.00	52.35	88.20	-35.85	44.44	7.91	Peak	100	281
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.40	54.00	-29.60	31.93	-7.53	Average	100	197																																																																
2	1131.00	36.97	74.00	-37.03	44.50	-7.53	Peak	100	197																																																																
3	8513.33	38.07	68.20	-30.13	31.46	6.61	Average	100	129																																																																
4	8513.33	50.99	88.20	-37.21	44.38	6.61	Peak	100	129																																																																
5	12770.00	39.43	68.20	-28.77	31.52	7.91	Average	100	281																																																																
6	12770.00	52.35	88.20	-35.85	44.44	7.91	Peak	100	281																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT80	Test Freq. (MHz)	6385																																																																						
Polarization	Vertical																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>23.63</td><td>54.00</td><td>-30.37</td><td>31.16</td><td>-7.53</td><td>Average</td><td>100</td><td>234</td></tr><tr><td>2</td><td>1131.00</td><td>35.73</td><td>74.00</td><td>-38.27</td><td>43.26</td><td>-7.53</td><td>Peak</td><td>100</td><td>234</td></tr><tr><td>3</td><td>8513.33</td><td>36.90</td><td>68.20</td><td>-31.30</td><td>30.29</td><td>6.61</td><td>Average</td><td>100</td><td>118</td></tr><tr><td>4</td><td>8513.33</td><td>49.90</td><td>88.20</td><td>-38.30</td><td>43.29</td><td>6.61</td><td>Peak</td><td>100</td><td>118</td></tr><tr><td>5</td><td>12770.00</td><td>38.13</td><td>68.20</td><td>-30.07</td><td>30.22</td><td>7.91</td><td>Average</td><td>100</td><td>285</td></tr><tr><td>6</td><td>12770.00</td><td>51.41</td><td>88.20</td><td>-36.79</td><td>43.50</td><td>7.91</td><td>Peak</td><td>100</td><td>285</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.63	54.00	-30.37	31.16	-7.53	Average	100	234	2	1131.00	35.73	74.00	-38.27	43.26	-7.53	Peak	100	234	3	8513.33	36.90	68.20	-31.30	30.29	6.61	Average	100	118	4	8513.33	49.90	88.20	-38.30	43.29	6.61	Peak	100	118	5	12770.00	38.13	68.20	-30.07	30.22	7.91	Average	100	285	6	12770.00	51.41	88.20	-36.79	43.50	7.91	Peak	100	285
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.63	54.00	-30.37	31.16	-7.53	Average	100	234																																																																
2	1131.00	35.73	74.00	-38.27	43.26	-7.53	Peak	100	234																																																																
3	8513.33	36.90	68.20	-31.30	30.29	6.61	Average	100	118																																																																
4	8513.33	49.90	88.20	-38.30	43.29	6.61	Peak	100	118																																																																
5	12770.00	38.13	68.20	-30.07	30.22	7.91	Average	100	285																																																																
6	12770.00	51.41	88.20	-36.79	43.50	7.91	Peak	100	285																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT80	Test Freq. (MHz)	6465																																																																						
Polarization	Horizontal																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.47</td><td>54.00</td><td>-29.53</td><td>32.00</td><td>-7.53</td><td>Average</td><td>100</td><td>47</td></tr><tr><td>2</td><td>1131.00</td><td>37.62</td><td>74.00</td><td>-36.38</td><td>45.15</td><td>-7.53</td><td>Peak</td><td>100</td><td>47</td></tr><tr><td>3</td><td>8620.00</td><td>38.18</td><td>68.20</td><td>-30.02</td><td>31.13</td><td>7.05</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>4</td><td>8620.00</td><td>51.38</td><td>88.20</td><td>-36.82</td><td>44.33</td><td>7.05</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>5</td><td>12930.00</td><td>39.19</td><td>68.20</td><td>-29.01</td><td>31.19</td><td>8.00</td><td>Average</td><td>100</td><td>300</td></tr><tr><td>6</td><td>12930.00</td><td>52.65</td><td>88.20</td><td>-35.55</td><td>44.65</td><td>8.00</td><td>Peak</td><td>100</td><td>300</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.47	54.00	-29.53	32.00	-7.53	Average	100	47	2	1131.00	37.62	74.00	-36.38	45.15	-7.53	Peak	100	47	3	8620.00	38.18	68.20	-30.02	31.13	7.05	Average	100	108	4	8620.00	51.38	88.20	-36.82	44.33	7.05	Peak	100	108	5	12930.00	39.19	68.20	-29.01	31.19	8.00	Average	100	300	6	12930.00	52.65	88.20	-35.55	44.65	8.00	Peak	100	300
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.47	54.00	-29.53	32.00	-7.53	Average	100	47																																																																
2	1131.00	37.62	74.00	-36.38	45.15	-7.53	Peak	100	47																																																																
3	8620.00	38.18	68.20	-30.02	31.13	7.05	Average	100	108																																																																
4	8620.00	51.38	88.20	-36.82	44.33	7.05	Peak	100	108																																																																
5	12930.00	39.19	68.20	-29.01	31.19	8.00	Average	100	300																																																																
6	12930.00	52.65	88.20	-35.55	44.65	8.00	Peak	100	300																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT80		Test Freq. (MHz)		6465																																																																										
Polarization	Vertical																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>23.61</td><td>54.00</td><td>-30.39</td><td>31.14</td><td>-7.53</td><td>Average</td><td>100</td><td>56</td></tr><tr><td>2</td><td>1131.00</td><td>36.09</td><td>74.00</td><td>-37.91</td><td>43.62</td><td>-7.53</td><td>Peak</td><td>100</td><td>56</td></tr><tr><td>3</td><td>8620.00</td><td>37.28</td><td>68.20</td><td>-30.92</td><td>30.23</td><td>7.05</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>4</td><td>8620.00</td><td>50.24</td><td>88.20</td><td>-37.96</td><td>43.19</td><td>7.05</td><td>Peak</td><td>100</td><td>124</td></tr><tr><td>5</td><td>12930.00</td><td>38.49</td><td>68.20</td><td>-29.71</td><td>30.49</td><td>8.00</td><td>Average</td><td>100</td><td>303</td></tr><tr><td>6</td><td>12930.00</td><td>51.47</td><td>88.20</td><td>-36.73</td><td>43.47</td><td>8.00</td><td>Peak</td><td>100</td><td>303</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.61	54.00	-30.39	31.14	-7.53	Average	100	56	2	1131.00	36.09	74.00	-37.91	43.62	-7.53	Peak	100	56	3	8620.00	37.28	68.20	-30.92	30.23	7.05	Average	100	124	4	8620.00	50.24	88.20	-37.96	43.19	7.05	Peak	100	124	5	12930.00	38.49	68.20	-29.71	30.49	8.00	Average	100	303	6	12930.00	51.47	88.20	-36.73	43.47	8.00	Peak	100	303
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	23.61	54.00	-30.39	31.14	-7.53	Average	100	56																																																																						
2	1131.00	36.09	74.00	-37.91	43.62	-7.53	Peak	100	56																																																																						
3	8620.00	37.28	68.20	-30.92	30.23	7.05	Average	100	124																																																																						
4	8620.00	50.24	88.20	-37.96	43.19	7.05	Peak	100	124																																																																						
5	12930.00	38.49	68.20	-29.71	30.49	8.00	Average	100	303																																																																						
6	12930.00	51.47	88.20	-36.73	43.47	8.00	Peak	100	303																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															



Modulation	be EHT80		Test Freq. (MHz)		6545																																																																										
Polarization	Horizontal																																																																														
Test By :Tim Chan			Temperature(°C):23			Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.43</td><td>54.00</td><td>-29.57</td><td>31.96</td><td>-7.53</td><td>Average</td><td>100</td><td>347</td></tr><tr><td>2</td><td>1131.00</td><td>37.02</td><td>74.00</td><td>-36.98</td><td>44.55</td><td>-7.53</td><td>Peak</td><td>100</td><td>347</td></tr><tr><td>3</td><td>8726.67</td><td>38.97</td><td>68.20</td><td>-29.23</td><td>31.61</td><td>7.36</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>4</td><td>8726.67</td><td>51.86</td><td>88.20</td><td>-36.34</td><td>44.50</td><td>7.36</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>5</td><td>13090.00</td><td>39.22</td><td>68.20</td><td>-28.98</td><td>31.51</td><td>7.71</td><td>Average</td><td>100</td><td>359</td></tr><tr><td>6</td><td>13090.00</td><td>52.26</td><td>88.20</td><td>-35.94</td><td>44.55</td><td>7.71</td><td>Peak</td><td>100</td><td>359</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.43	54.00	-29.57	31.96	-7.53	Average	100	347	2	1131.00	37.02	74.00	-36.98	44.55	-7.53	Peak	100	347	3	8726.67	38.97	68.20	-29.23	31.61	7.36	Average	100	123	4	8726.67	51.86	88.20	-36.34	44.50	7.36	Peak	100	123	5	13090.00	39.22	68.20	-28.98	31.51	7.71	Average	100	359	6	13090.00	52.26	88.20	-35.94	44.55	7.71	Peak	100	359
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	24.43	54.00	-29.57	31.96	-7.53	Average	100	347																																																																						
2	1131.00	37.02	74.00	-36.98	44.55	-7.53	Peak	100	347																																																																						
3	8726.67	38.97	68.20	-29.23	31.61	7.36	Average	100	123																																																																						
4	8726.67	51.86	88.20	-36.34	44.50	7.36	Peak	100	123																																																																						
5	13090.00	39.22	68.20	-28.98	31.51	7.71	Average	100	359																																																																						
6	13090.00	52.26	88.20	-35.94	44.55	7.71	Peak	100	359																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

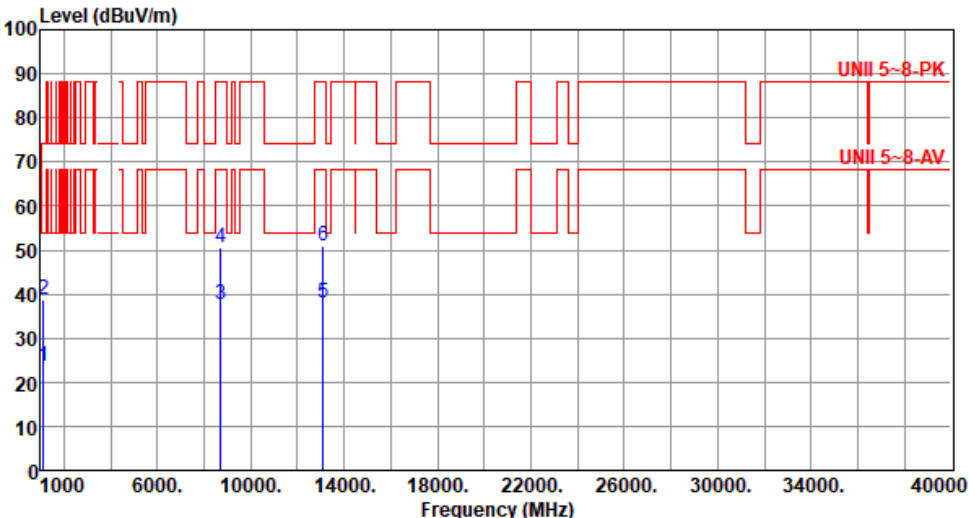

Modulation	be EHT80		Test Freq. (MHz)		6545																																																																										
Polarization	Vertical																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>23.78</td><td>54.00</td><td>-30.22</td><td>31.31</td><td>-7.53</td><td>Average</td><td>100</td><td>298</td></tr><tr><td>2</td><td>1131.00</td><td>38.65</td><td>74.00</td><td>-35.35</td><td>46.18</td><td>-7.53</td><td>Peak</td><td>100</td><td>298</td></tr><tr><td>3</td><td>8726.67</td><td>37.62</td><td>68.20</td><td>-30.58</td><td>30.26</td><td>7.36</td><td>Average</td><td>100</td><td>101</td></tr><tr><td>4</td><td>8726.67</td><td>50.71</td><td>88.20</td><td>-37.49</td><td>43.35</td><td>7.36</td><td>Peak</td><td>100</td><td>101</td></tr><tr><td>5</td><td>13090.00</td><td>38.01</td><td>68.20</td><td>-30.19</td><td>30.30</td><td>7.71</td><td>Average</td><td>100</td><td>352</td></tr><tr><td>6</td><td>13090.00</td><td>51.10</td><td>88.20</td><td>-37.10</td><td>43.39</td><td>7.71</td><td>Peak</td><td>100</td><td>352</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.78	54.00	-30.22	31.31	-7.53	Average	100	298	2	1131.00	38.65	74.00	-35.35	46.18	-7.53	Peak	100	298	3	8726.67	37.62	68.20	-30.58	30.26	7.36	Average	100	101	4	8726.67	50.71	88.20	-37.49	43.35	7.36	Peak	100	101	5	13090.00	38.01	68.20	-30.19	30.30	7.71	Average	100	352	6	13090.00	51.10	88.20	-37.10	43.39	7.71	Peak	100	352
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	23.78	54.00	-30.22	31.31	-7.53	Average	100	298																																																																						
2	1131.00	38.65	74.00	-35.35	46.18	-7.53	Peak	100	298																																																																						
3	8726.67	37.62	68.20	-30.58	30.26	7.36	Average	100	101																																																																						
4	8726.67	50.71	88.20	-37.49	43.35	7.36	Peak	100	101																																																																						
5	13090.00	38.01	68.20	-30.19	30.30	7.71	Average	100	352																																																																						
6	13090.00	51.10	88.20	-37.10	43.39	7.71	Peak	100	352																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															



Modulation	be EHT80	Test Freq. (MHz)	6625																																																																						
Polarization	Horizontal																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.57</td><td>54.00</td><td>-29.43</td><td>32.10</td><td>-7.53</td><td>Average</td><td>100</td><td>134</td></tr><tr><td>2</td><td>1131.00</td><td>37.90</td><td>74.00</td><td>-36.10</td><td>45.43</td><td>-7.53</td><td>Peak</td><td>100</td><td>134</td></tr><tr><td>3</td><td>8833.33</td><td>38.53</td><td>68.20</td><td>-29.67</td><td>31.26</td><td>7.27</td><td>Average</td><td>100</td><td>196</td></tr><tr><td>4</td><td>8833.33</td><td>51.65</td><td>88.20</td><td>-36.55</td><td>44.38</td><td>7.27</td><td>Peak</td><td>100</td><td>196</td></tr><tr><td>5</td><td>13250.00</td><td>38.97</td><td>54.00</td><td>-15.03</td><td>31.25</td><td>7.72</td><td>Average</td><td>100</td><td>222</td></tr><tr><td>6</td><td>13250.00</td><td>52.12</td><td>74.00</td><td>-21.88</td><td>44.40</td><td>7.72</td><td>Peak</td><td>100</td><td>222</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.57	54.00	-29.43	32.10	-7.53	Average	100	134	2	1131.00	37.90	74.00	-36.10	45.43	-7.53	Peak	100	134	3	8833.33	38.53	68.20	-29.67	31.26	7.27	Average	100	196	4	8833.33	51.65	88.20	-36.55	44.38	7.27	Peak	100	196	5	13250.00	38.97	54.00	-15.03	31.25	7.72	Average	100	222	6	13250.00	52.12	74.00	-21.88	44.40	7.72	Peak	100	222
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.57	54.00	-29.43	32.10	-7.53	Average	100	134																																																																
2	1131.00	37.90	74.00	-36.10	45.43	-7.53	Peak	100	134																																																																
3	8833.33	38.53	68.20	-29.67	31.26	7.27	Average	100	196																																																																
4	8833.33	51.65	88.20	-36.55	44.38	7.27	Peak	100	196																																																																
5	13250.00	38.97	54.00	-15.03	31.25	7.72	Average	100	222																																																																
6	13250.00	52.12	74.00	-21.88	44.40	7.72	Peak	100	222																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT80		Test Freq. (MHz)		6625																																																																						
Polarization	Vertical																																																																										
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																											
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>23.97</td><td>54.00</td><td>-30.03</td><td>31.50</td><td>-7.53</td><td>Average</td><td>100</td><td>136</td></tr><tr><td>2</td><td>1131.00</td><td>36.84</td><td>74.00</td><td>-37.16</td><td>44.37</td><td>-7.53</td><td>Peak</td><td>100</td><td>136</td></tr><tr><td>3</td><td>8833.33</td><td>37.63</td><td>68.20</td><td>-30.57</td><td>30.36</td><td>7.27</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>4</td><td>8833.33</td><td>50.43</td><td>88.20</td><td>-37.77</td><td>43.16</td><td>7.27</td><td>Peak</td><td>100</td><td>148</td></tr><tr><td>5</td><td>13250.00</td><td>38.22</td><td>54.00</td><td>-15.78</td><td>30.50</td><td>7.72</td><td>Average</td><td>100</td><td>285</td></tr><tr><td>6</td><td>13250.00</td><td>51.10</td><td>74.00</td><td>-22.90</td><td>43.38</td><td>7.72</td><td>Peak</td><td>100</td><td>285</td></tr></tbody></table>							Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.97	54.00	-30.03	31.50	-7.53	Average	100	136	2	1131.00	36.84	74.00	-37.16	44.37	-7.53	Peak	100	136	3	8833.33	37.63	68.20	-30.57	30.36	7.27	Average	100	148	4	8833.33	50.43	88.20	-37.77	43.16	7.27	Peak	100	148	5	13250.00	38.22	54.00	-15.78	30.50	7.72	Average	100	285	6	13250.00	51.10	74.00	-22.90	43.38	7.72	Peak	100	285
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																		
1	1131.00	23.97	54.00	-30.03	31.50	-7.53	Average	100	136																																																																		
2	1131.00	36.84	74.00	-37.16	44.37	-7.53	Peak	100	136																																																																		
3	8833.33	37.63	68.20	-30.57	30.36	7.27	Average	100	148																																																																		
4	8833.33	50.43	88.20	-37.77	43.16	7.27	Peak	100	148																																																																		
5	13250.00	38.22	54.00	-15.78	30.50	7.72	Average	100	285																																																																		
6	13250.00	51.10	74.00	-22.90	43.38	7.72	Peak	100	285																																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																											



Modulation	be EHT80		Test Freq. (MHz)		6705																																																																										
Polarization	Horizontal																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.88</td><td>54.00</td><td>-29.12</td><td>32.41</td><td>-7.53</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>2</td><td>1131.00</td><td>37.45</td><td>74.00</td><td>-36.55</td><td>44.98</td><td>-7.53</td><td>Peak</td><td>100</td><td>158</td></tr><tr><td>3</td><td>8940.00</td><td>38.63</td><td>68.20</td><td>-29.57</td><td>31.40</td><td>7.23</td><td>Average</td><td>100</td><td>134</td></tr><tr><td>4</td><td>8940.00</td><td>51.39</td><td>88.20</td><td>-36.81</td><td>44.16</td><td>7.23</td><td>Peak</td><td>100</td><td>134</td></tr><tr><td>5</td><td>13410.00</td><td>39.37</td><td>68.20</td><td>-28.83</td><td>31.36</td><td>8.01</td><td>Average</td><td>100</td><td>276</td></tr><tr><td>6</td><td>13410.00</td><td>52.55</td><td>88.20</td><td>-35.65</td><td>44.54</td><td>8.01</td><td>Peak</td><td>100</td><td>276</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.88	54.00	-29.12	32.41	-7.53	Average	100	158	2	1131.00	37.45	74.00	-36.55	44.98	-7.53	Peak	100	158	3	8940.00	38.63	68.20	-29.57	31.40	7.23	Average	100	134	4	8940.00	51.39	88.20	-36.81	44.16	7.23	Peak	100	134	5	13410.00	39.37	68.20	-28.83	31.36	8.01	Average	100	276	6	13410.00	52.55	88.20	-35.65	44.54	8.01	Peak	100	276
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	24.88	54.00	-29.12	32.41	-7.53	Average	100	158																																																																						
2	1131.00	37.45	74.00	-36.55	44.98	-7.53	Peak	100	158																																																																						
3	8940.00	38.63	68.20	-29.57	31.40	7.23	Average	100	134																																																																						
4	8940.00	51.39	88.20	-36.81	44.16	7.23	Peak	100	134																																																																						
5	13410.00	39.37	68.20	-28.83	31.36	8.01	Average	100	276																																																																						
6	13410.00	52.55	88.20	-35.65	44.54	8.01	Peak	100	276																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															



Modulation	be EHT80	Test Freq. (MHz)	6705																																																																						
Polarization	Vertical																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.11</td><td>54.00</td><td>-29.89</td><td>31.64</td><td>-7.53</td><td>Average</td><td>100</td><td>256</td></tr><tr><td>2</td><td>1131.00</td><td>36.18</td><td>74.00</td><td>-37.82</td><td>43.71</td><td>-7.53</td><td>Peak</td><td>100</td><td>256</td></tr><tr><td>3</td><td>8940.00</td><td>37.44</td><td>68.20</td><td>-30.76</td><td>30.21</td><td>7.23</td><td>Average</td><td>100</td><td>134</td></tr><tr><td>4</td><td>8940.00</td><td>50.42</td><td>88.20</td><td>-37.78</td><td>43.19</td><td>7.23</td><td>Peak</td><td>100</td><td>134</td></tr><tr><td>5</td><td>13410.00</td><td>38.44</td><td>68.20</td><td>-29.76</td><td>30.43</td><td>8.01</td><td>Average</td><td>100</td><td>299</td></tr><tr><td>6</td><td>13410.00</td><td>51.25</td><td>88.20</td><td>-36.95</td><td>43.24</td><td>8.01</td><td>Peak</td><td>100</td><td>299</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.11	54.00	-29.89	31.64	-7.53	Average	100	256	2	1131.00	36.18	74.00	-37.82	43.71	-7.53	Peak	100	256	3	8940.00	37.44	68.20	-30.76	30.21	7.23	Average	100	134	4	8940.00	50.42	88.20	-37.78	43.19	7.23	Peak	100	134	5	13410.00	38.44	68.20	-29.76	30.43	8.01	Average	100	299	6	13410.00	51.25	88.20	-36.95	43.24	8.01	Peak	100	299
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.11	54.00	-29.89	31.64	-7.53	Average	100	256																																																																
2	1131.00	36.18	74.00	-37.82	43.71	-7.53	Peak	100	256																																																																
3	8940.00	37.44	68.20	-30.76	30.21	7.23	Average	100	134																																																																
4	8940.00	50.42	88.20	-37.78	43.19	7.23	Peak	100	134																																																																
5	13410.00	38.44	68.20	-29.76	30.43	8.01	Average	100	299																																																																
6	13410.00	51.25	88.20	-36.95	43.24	8.01	Peak	100	299																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT80	Test Freq. (MHz)	6785																																																																						
Polarization	Horizontal																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.95</td><td>54.00</td><td>-29.05</td><td>32.48</td><td>-7.53</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>2</td><td>1131.00</td><td>38.08</td><td>74.00</td><td>-35.92</td><td>45.61</td><td>-7.53</td><td>Peak</td><td>100</td><td>41</td></tr><tr><td>3</td><td>9046.67</td><td>38.78</td><td>54.00</td><td>-15.22</td><td>31.39</td><td>7.39</td><td>Average</td><td>100</td><td>130</td></tr><tr><td>4</td><td>9046.67</td><td>51.80</td><td>74.00</td><td>-22.20</td><td>44.41</td><td>7.39</td><td>Peak</td><td>100</td><td>130</td></tr><tr><td>5</td><td>13570.00</td><td>39.52</td><td>68.20</td><td>-28.68</td><td>31.28</td><td>8.24</td><td>Average</td><td>100</td><td>305</td></tr><tr><td>6</td><td>13570.00</td><td>52.80</td><td>88.20</td><td>-35.40</td><td>44.56</td><td>8.24</td><td>Peak</td><td>100</td><td>305</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.95	54.00	-29.05	32.48	-7.53	Average	100	41	2	1131.00	38.08	74.00	-35.92	45.61	-7.53	Peak	100	41	3	9046.67	38.78	54.00	-15.22	31.39	7.39	Average	100	130	4	9046.67	51.80	74.00	-22.20	44.41	7.39	Peak	100	130	5	13570.00	39.52	68.20	-28.68	31.28	8.24	Average	100	305	6	13570.00	52.80	88.20	-35.40	44.56	8.24	Peak	100	305
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.95	54.00	-29.05	32.48	-7.53	Average	100	41																																																																
2	1131.00	38.08	74.00	-35.92	45.61	-7.53	Peak	100	41																																																																
3	9046.67	38.78	54.00	-15.22	31.39	7.39	Average	100	130																																																																
4	9046.67	51.80	74.00	-22.20	44.41	7.39	Peak	100	130																																																																
5	13570.00	39.52	68.20	-28.68	31.28	8.24	Average	100	305																																																																
6	13570.00	52.80	88.20	-35.40	44.56	8.24	Peak	100	305																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT80		Test Freq. (MHz)		6785																																																																										
Polarization	Vertical																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.09</td><td>54.00</td><td>-29.91</td><td>31.62</td><td>-7.53</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>2</td><td>1131.00</td><td>36.67</td><td>74.00</td><td>-37.33</td><td>44.20</td><td>-7.53</td><td>Peak</td><td>100</td><td>41</td></tr><tr><td>3</td><td>9046.67</td><td>37.50</td><td>54.00</td><td>-16.50</td><td>30.11</td><td>7.39</td><td>Average</td><td>100</td><td>112</td></tr><tr><td>4</td><td>9046.67</td><td>50.80</td><td>74.00</td><td>-23.20</td><td>43.41</td><td>7.39</td><td>Peak</td><td>100</td><td>112</td></tr><tr><td>5</td><td>13570.00</td><td>38.62</td><td>68.20</td><td>-29.58</td><td>30.38</td><td>8.24</td><td>Average</td><td>100</td><td>315</td></tr><tr><td>6</td><td>13570.00</td><td>51.52</td><td>88.20</td><td>-36.68</td><td>43.28</td><td>8.24</td><td>Peak</td><td>100</td><td>315</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.09	54.00	-29.91	31.62	-7.53	Average	100	41	2	1131.00	36.67	74.00	-37.33	44.20	-7.53	Peak	100	41	3	9046.67	37.50	54.00	-16.50	30.11	7.39	Average	100	112	4	9046.67	50.80	74.00	-23.20	43.41	7.39	Peak	100	112	5	13570.00	38.62	68.20	-29.58	30.38	8.24	Average	100	315	6	13570.00	51.52	88.20	-36.68	43.28	8.24	Peak	100	315
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	24.09	54.00	-29.91	31.62	-7.53	Average	100	41																																																																						
2	1131.00	36.67	74.00	-37.33	44.20	-7.53	Peak	100	41																																																																						
3	9046.67	37.50	54.00	-16.50	30.11	7.39	Average	100	112																																																																						
4	9046.67	50.80	74.00	-23.20	43.41	7.39	Peak	100	112																																																																						
5	13570.00	38.62	68.20	-29.58	30.38	8.24	Average	100	315																																																																						
6	13570.00	51.52	88.20	-36.68	43.28	8.24	Peak	100	315																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															



Modulation	be EHT80	Test Freq. (MHz)	6865
Polarization	Horizontal		
Test By :Tim Chan Temperature(°C):23 Humidity(%):63			
Level (dBUV/m)			



Modulation	be EHT80		Test Freq. (MHz)		6865																																																																										
Polarization	Vertical																																																																														
Test By :Tim Chan			Temperature(°C):23			Humidity(%):63																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.26</td><td>54.00</td><td>-29.74</td><td>31.79</td><td>-7.53</td><td>Average</td><td>100</td><td>316</td></tr><tr><td>2</td><td>1131.00</td><td>36.13</td><td>74.00</td><td>-37.87</td><td>43.66</td><td>-7.53</td><td>Peak</td><td>100</td><td>316</td></tr><tr><td>3</td><td>9153.33</td><td>38.07</td><td>54.00</td><td>-15.93</td><td>30.37</td><td>7.70</td><td>Average</td><td>100</td><td>134</td></tr><tr><td>4</td><td>9153.33</td><td>51.56</td><td>74.00</td><td>-22.44</td><td>43.86</td><td>7.70</td><td>Peak</td><td>100</td><td>134</td></tr><tr><td>5</td><td>13730.00</td><td>39.57</td><td>68.20</td><td>-28.63</td><td>31.47</td><td>8.10</td><td>Average</td><td>100</td><td>233</td></tr><tr><td>6</td><td>13730.00</td><td>51.75</td><td>88.20</td><td>-36.45</td><td>43.65</td><td>8.10</td><td>Peak</td><td>100</td><td>233</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.26	54.00	-29.74	31.79	-7.53	Average	100	316	2	1131.00	36.13	74.00	-37.87	43.66	-7.53	Peak	100	316	3	9153.33	38.07	54.00	-15.93	30.37	7.70	Average	100	134	4	9153.33	51.56	74.00	-22.44	43.86	7.70	Peak	100	134	5	13730.00	39.57	68.20	-28.63	31.47	8.10	Average	100	233	6	13730.00	51.75	88.20	-36.45	43.65	8.10	Peak	100	233
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	24.26	54.00	-29.74	31.79	-7.53	Average	100	316																																																																						
2	1131.00	36.13	74.00	-37.87	43.66	-7.53	Peak	100	316																																																																						
3	9153.33	38.07	54.00	-15.93	30.37	7.70	Average	100	134																																																																						
4	9153.33	51.56	74.00	-22.44	43.86	7.70	Peak	100	134																																																																						
5	13730.00	39.57	68.20	-28.63	31.47	8.10	Average	100	233																																																																						
6	13730.00	51.75	88.20	-36.45	43.65	8.10	Peak	100	233																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															




Modulation	be EHT80		Test Freq. (MHz)		6945																																																																										
Polarization	Horizontal																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.21</td><td>54.00</td><td>-29.79</td><td>31.74</td><td>-7.53</td><td>Average</td><td>100</td><td>137</td></tr><tr><td>2</td><td>1131.00</td><td>37.50</td><td>74.00</td><td>-36.50</td><td>45.03</td><td>-7.53</td><td>Peak</td><td>100</td><td>137</td></tr><tr><td>3</td><td>9260.00</td><td>39.55</td><td>68.20</td><td>-28.65</td><td>31.22</td><td>8.33</td><td>Average</td><td>100</td><td>164</td></tr><tr><td>4</td><td>9260.00</td><td>52.86</td><td>88.20</td><td>-35.34</td><td>44.53</td><td>8.33</td><td>Peak</td><td>100</td><td>164</td></tr><tr><td>5</td><td>13890.00</td><td>39.87</td><td>68.20</td><td>-28.33</td><td>31.59</td><td>8.28</td><td>Average</td><td>100</td><td>268</td></tr><tr><td>6</td><td>13890.00</td><td>53.00</td><td>88.20</td><td>-35.20</td><td>44.72</td><td>8.28</td><td>Peak</td><td>100</td><td>268</td></tr></tbody></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.21	54.00	-29.79	31.74	-7.53	Average	100	137	2	1131.00	37.50	74.00	-36.50	45.03	-7.53	Peak	100	137	3	9260.00	39.55	68.20	-28.65	31.22	8.33	Average	100	164	4	9260.00	52.86	88.20	-35.34	44.53	8.33	Peak	100	164	5	13890.00	39.87	68.20	-28.33	31.59	8.28	Average	100	268	6	13890.00	53.00	88.20	-35.20	44.72	8.28	Peak	100	268
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	24.21	54.00	-29.79	31.74	-7.53	Average	100	137																																																																						
2	1131.00	37.50	74.00	-36.50	45.03	-7.53	Peak	100	137																																																																						
3	9260.00	39.55	68.20	-28.65	31.22	8.33	Average	100	164																																																																						
4	9260.00	52.86	88.20	-35.34	44.53	8.33	Peak	100	164																																																																						
5	13890.00	39.87	68.20	-28.33	31.59	8.28	Average	100	268																																																																						
6	13890.00	53.00	88.20	-35.20	44.72	8.28	Peak	100	268																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															



Modulation	be EHT80		Test Freq. (MHz)		6945																																																																						
Polarization	Vertical																																																																										
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																											
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>23.61</td><td>54.00</td><td>-30.39</td><td>31.14</td><td>-7.53</td><td>Average</td><td>100</td><td>119</td></tr><tr><td>2</td><td>1131.00</td><td>36.48</td><td>74.00</td><td>-37.52</td><td>44.01</td><td>-7.53</td><td>Peak</td><td>100</td><td>119</td></tr><tr><td>3</td><td>9260.00</td><td>38.79</td><td>68.20</td><td>-29.41</td><td>30.46</td><td>8.33</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>4</td><td>9260.00</td><td>52.02</td><td>88.20</td><td>-36.18</td><td>43.69</td><td>8.33</td><td>Peak</td><td>100</td><td>127</td></tr><tr><td>5</td><td>13890.00</td><td>38.68</td><td>68.20</td><td>-29.52</td><td>30.40</td><td>8.28</td><td>Average</td><td>100</td><td>288</td></tr><tr><td>6</td><td>13890.00</td><td>51.80</td><td>88.20</td><td>-36.40</td><td>43.52</td><td>8.28</td><td>Peak</td><td>100</td><td>288</td></tr></tbody></table>							Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.61	54.00	-30.39	31.14	-7.53	Average	100	119	2	1131.00	36.48	74.00	-37.52	44.01	-7.53	Peak	100	119	3	9260.00	38.79	68.20	-29.41	30.46	8.33	Average	100	127	4	9260.00	52.02	88.20	-36.18	43.69	8.33	Peak	100	127	5	13890.00	38.68	68.20	-29.52	30.40	8.28	Average	100	288	6	13890.00	51.80	88.20	-36.40	43.52	8.28	Peak	100	288
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																		
1	1131.00	23.61	54.00	-30.39	31.14	-7.53	Average	100	119																																																																		
2	1131.00	36.48	74.00	-37.52	44.01	-7.53	Peak	100	119																																																																		
3	9260.00	38.79	68.20	-29.41	30.46	8.33	Average	100	127																																																																		
4	9260.00	52.02	88.20	-36.18	43.69	8.33	Peak	100	127																																																																		
5	13890.00	38.68	68.20	-29.52	30.40	8.28	Average	100	288																																																																		
6	13890.00	51.80	88.20	-36.40	43.52	8.28	Peak	100	288																																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																											

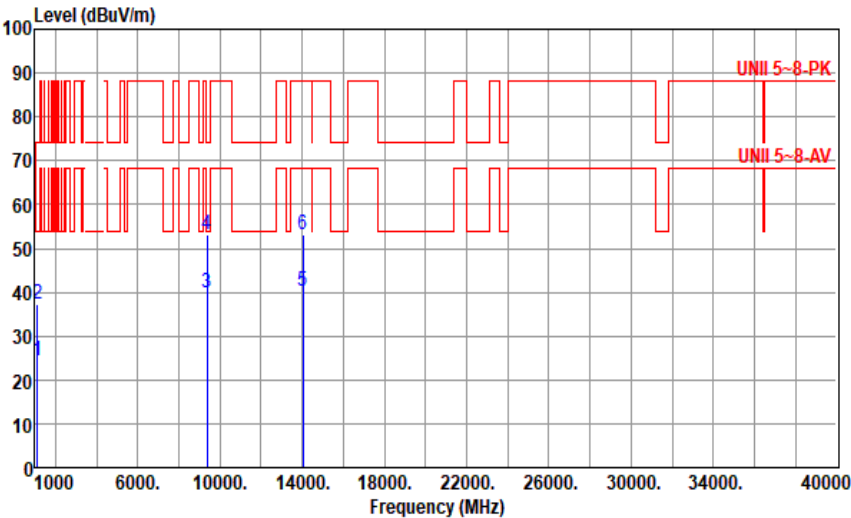

Modulation	be EHT80		Test Freq. (MHz)		7025																																																																							
Polarization	Horizontal																																																																											
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																												
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.52</td><td>54.00</td><td>-29.48</td><td>32.05</td><td>-7.53</td><td>Average</td><td>100</td><td>170</td></tr><tr><td>2</td><td>1131.00</td><td>37.09</td><td>74.00</td><td>-36.91</td><td>44.62</td><td>-7.53</td><td>Peak</td><td>100</td><td>170</td></tr><tr><td>3</td><td>9366.67</td><td>39.81</td><td>54.00</td><td>-14.19</td><td>31.33</td><td>8.48</td><td>Average</td><td>100</td><td>131</td></tr><tr><td>4</td><td>9366.67</td><td>53.07</td><td>74.00</td><td>-20.93</td><td>44.59</td><td>8.48</td><td>Peak</td><td>100</td><td>131</td></tr><tr><td>5</td><td>14050.00</td><td>40.07</td><td>68.20</td><td>-28.13</td><td>31.56</td><td>8.51</td><td>Average</td><td>100</td><td>287</td></tr><tr><td>6</td><td>14050.00</td><td>53.25</td><td>88.20</td><td>-34.95</td><td>44.74</td><td>8.51</td><td>Peak</td><td>100</td><td>287</td></tr></table>								Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.52	54.00	-29.48	32.05	-7.53	Average	100	170	2	1131.00	37.09	74.00	-36.91	44.62	-7.53	Peak	100	170	3	9366.67	39.81	54.00	-14.19	31.33	8.48	Average	100	131	4	9366.67	53.07	74.00	-20.93	44.59	8.48	Peak	100	131	5	14050.00	40.07	68.20	-28.13	31.56	8.51	Average	100	287	6	14050.00	53.25	88.20	-34.95	44.74	8.51	Peak	100	287
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																			
1	1131.00	24.52	54.00	-29.48	32.05	-7.53	Average	100	170																																																																			
2	1131.00	37.09	74.00	-36.91	44.62	-7.53	Peak	100	170																																																																			
3	9366.67	39.81	54.00	-14.19	31.33	8.48	Average	100	131																																																																			
4	9366.67	53.07	74.00	-20.93	44.59	8.48	Peak	100	131																																																																			
5	14050.00	40.07	68.20	-28.13	31.56	8.51	Average	100	287																																																																			
6	14050.00	53.25	88.20	-34.95	44.74	8.51	Peak	100	287																																																																			
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																												



Modulation	be EHT80	Test Freq. (MHz)	7025																																																																						
Polarization	Vertical																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>23.75</td><td>54.00</td><td>-30.25</td><td>31.28</td><td>-7.53</td><td>Average</td><td>100</td><td>200</td></tr><tr><td>2</td><td>1131.00</td><td>35.85</td><td>74.00</td><td>-38.15</td><td>43.38</td><td>-7.53</td><td>Peak</td><td>100</td><td>200</td></tr><tr><td>3</td><td>9366.67</td><td>39.10</td><td>54.00</td><td>-14.90</td><td>30.62</td><td>8.48</td><td>Average</td><td>100</td><td>149</td></tr><tr><td>4</td><td>9366.67</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>43.57</td><td>8.48</td><td>Peak</td><td>100</td><td>149</td></tr><tr><td>5</td><td>14050.00</td><td>39.21</td><td>68.20</td><td>-28.99</td><td>30.70</td><td>8.51</td><td>Average</td><td>100</td><td>275</td></tr><tr><td>6</td><td>14050.00</td><td>51.89</td><td>88.20</td><td>-36.31</td><td>43.38</td><td>8.51</td><td>Peak</td><td>100</td><td>275</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.75	54.00	-30.25	31.28	-7.53	Average	100	200	2	1131.00	35.85	74.00	-38.15	43.38	-7.53	Peak	100	200	3	9366.67	39.10	54.00	-14.90	30.62	8.48	Average	100	149	4	9366.67	52.05	74.00	-21.95	43.57	8.48	Peak	100	149	5	14050.00	39.21	68.20	-28.99	30.70	8.51	Average	100	275	6	14050.00	51.89	88.20	-36.31	43.38	8.51	Peak	100	275
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.75	54.00	-30.25	31.28	-7.53	Average	100	200																																																																
2	1131.00	35.85	74.00	-38.15	43.38	-7.53	Peak	100	200																																																																
3	9366.67	39.10	54.00	-14.90	30.62	8.48	Average	100	149																																																																
4	9366.67	52.05	74.00	-21.95	43.57	8.48	Peak	100	149																																																																
5	14050.00	39.21	68.20	-28.99	30.70	8.51	Average	100	275																																																																
6	14050.00	51.89	88.20	-36.31	43.38	8.51	Peak	100	275																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT160		Test Freq. (MHz)		6025																																																																							
Polarization	Horizontal																																																																											
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																												
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.59</td><td>54.00</td><td>-29.41</td><td>32.12</td><td>-7.53</td><td>Average</td><td>100</td><td>53</td></tr><tr><td>2</td><td>1131.00</td><td>37.74</td><td>74.00</td><td>-36.26</td><td>45.27</td><td>-7.53</td><td>Peak</td><td>100</td><td>53</td></tr><tr><td>3</td><td>8033.33</td><td>38.56</td><td>54.00</td><td>-15.44</td><td>31.59</td><td>6.97</td><td>Average</td><td>100</td><td>125</td></tr><tr><td>4</td><td>8033.33</td><td>51.65</td><td>74.00</td><td>-22.35</td><td>44.68</td><td>6.97</td><td>Peak</td><td>100</td><td>125</td></tr><tr><td>5</td><td>12050.00</td><td>40.03</td><td>54.00</td><td>-13.97</td><td>31.75</td><td>8.28</td><td>Average</td><td>100</td><td>282</td></tr><tr><td>6</td><td>12050.00</td><td>52.93</td><td>74.00</td><td>-21.07</td><td>44.65</td><td>8.28</td><td>Peak</td><td>100</td><td>282</td></tr></table>								Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.59	54.00	-29.41	32.12	-7.53	Average	100	53	2	1131.00	37.74	74.00	-36.26	45.27	-7.53	Peak	100	53	3	8033.33	38.56	54.00	-15.44	31.59	6.97	Average	100	125	4	8033.33	51.65	74.00	-22.35	44.68	6.97	Peak	100	125	5	12050.00	40.03	54.00	-13.97	31.75	8.28	Average	100	282	6	12050.00	52.93	74.00	-21.07	44.65	8.28	Peak	100	282
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																			
1	1131.00	24.59	54.00	-29.41	32.12	-7.53	Average	100	53																																																																			
2	1131.00	37.74	74.00	-36.26	45.27	-7.53	Peak	100	53																																																																			
3	8033.33	38.56	54.00	-15.44	31.59	6.97	Average	100	125																																																																			
4	8033.33	51.65	74.00	-22.35	44.68	6.97	Peak	100	125																																																																			
5	12050.00	40.03	54.00	-13.97	31.75	8.28	Average	100	282																																																																			
6	12050.00	52.93	74.00	-21.07	44.65	8.28	Peak	100	282																																																																			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																												



Modulation	be EHT160		Test Freq. (MHz)		6025																																																																										
Polarization	Vertical																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
Level (dBuV/m) 100 90 80 70 60 50 40 30 20 10 0 1000 6000. 10000. 14000. 18000. 22000. 26000. 30000. 34000. 40000 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>23.73</td><td>54.00</td><td>-30.27</td><td>31.26</td><td>-7.53</td><td>Average</td><td>100</td><td>9</td></tr><tr><td>2</td><td>1131.00</td><td>36.21</td><td>74.00</td><td>-37.79</td><td>43.74</td><td>-7.53</td><td>Peak</td><td>100</td><td>9</td></tr><tr><td>3</td><td>8033.33</td><td>37.43</td><td>54.00</td><td>-16.57</td><td>30.46</td><td>6.97</td><td>Average</td><td>100</td><td>184</td></tr><tr><td>4</td><td>8033.33</td><td>50.51</td><td>74.00</td><td>-23.49</td><td>43.54</td><td>6.97</td><td>Peak</td><td>100</td><td>184</td></tr><tr><td>5</td><td>12050.00</td><td>38.83</td><td>54.00</td><td>-15.17</td><td>30.55</td><td>8.28</td><td>Average</td><td>100</td><td>311</td></tr><tr><td>6</td><td>12050.00</td><td>51.56</td><td>74.00</td><td>-22.44</td><td>43.28</td><td>8.28</td><td>Peak</td><td>100</td><td>311</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.73	54.00	-30.27	31.26	-7.53	Average	100	9	2	1131.00	36.21	74.00	-37.79	43.74	-7.53	Peak	100	9	3	8033.33	37.43	54.00	-16.57	30.46	6.97	Average	100	184	4	8033.33	50.51	74.00	-23.49	43.54	6.97	Peak	100	184	5	12050.00	38.83	54.00	-15.17	30.55	8.28	Average	100	311	6	12050.00	51.56	74.00	-22.44	43.28	8.28	Peak	100	311
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	23.73	54.00	-30.27	31.26	-7.53	Average	100	9																																																																						
2	1131.00	36.21	74.00	-37.79	43.74	-7.53	Peak	100	9																																																																						
3	8033.33	37.43	54.00	-16.57	30.46	6.97	Average	100	184																																																																						
4	8033.33	50.51	74.00	-23.49	43.54	6.97	Peak	100	184																																																																						
5	12050.00	38.83	54.00	-15.17	30.55	8.28	Average	100	311																																																																						
6	12050.00	51.56	74.00	-22.44	43.28	8.28	Peak	100	311																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

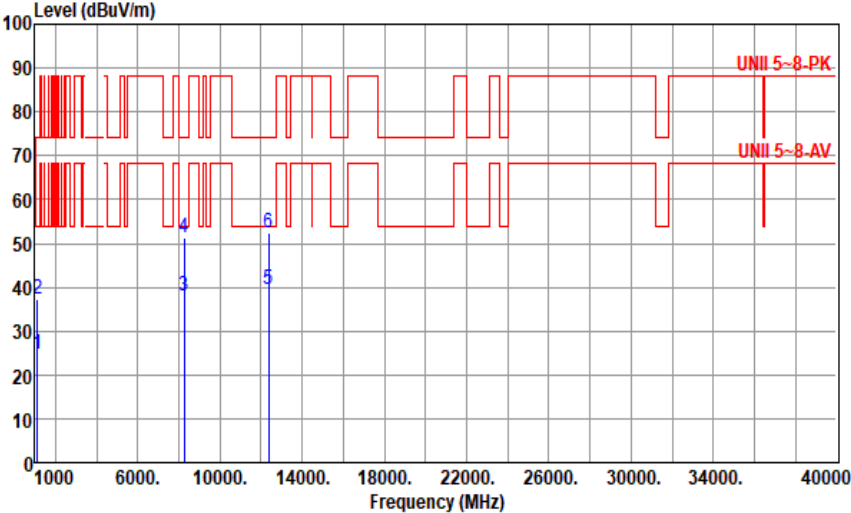

Modulation	be EHT160	Test Freq. (MHz)	6185																																																																						
Polarization	Horizontal																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.55</td><td>54.00</td><td>-29.45</td><td>32.08</td><td>-7.53</td><td>Average</td><td>100</td><td>339</td></tr><tr><td>2</td><td>1131.00</td><td>37.14</td><td>74.00</td><td>-36.86</td><td>44.67</td><td>-7.53</td><td>Peak</td><td>100</td><td>339</td></tr><tr><td>3</td><td>8246.67</td><td>38.08</td><td>54.00</td><td>-15.92</td><td>31.62</td><td>6.46</td><td>Average</td><td>100</td><td>168</td></tr><tr><td>4</td><td>8246.67</td><td>51.13</td><td>74.00</td><td>-22.87</td><td>44.67</td><td>6.46</td><td>Peak</td><td>100</td><td>168</td></tr><tr><td>5</td><td>12370.00</td><td>39.45</td><td>54.00</td><td>-14.55</td><td>31.84</td><td>7.61</td><td>Average</td><td>100</td><td>298</td></tr><tr><td>6</td><td>12370.00</td><td>52.50</td><td>74.00</td><td>-21.50</td><td>44.89</td><td>7.61</td><td>Peak</td><td>100</td><td>298</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.55	54.00	-29.45	32.08	-7.53	Average	100	339	2	1131.00	37.14	74.00	-36.86	44.67	-7.53	Peak	100	339	3	8246.67	38.08	54.00	-15.92	31.62	6.46	Average	100	168	4	8246.67	51.13	74.00	-22.87	44.67	6.46	Peak	100	168	5	12370.00	39.45	54.00	-14.55	31.84	7.61	Average	100	298	6	12370.00	52.50	74.00	-21.50	44.89	7.61	Peak	100	298
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.55	54.00	-29.45	32.08	-7.53	Average	100	339																																																																
2	1131.00	37.14	74.00	-36.86	44.67	-7.53	Peak	100	339																																																																
3	8246.67	38.08	54.00	-15.92	31.62	6.46	Average	100	168																																																																
4	8246.67	51.13	74.00	-22.87	44.67	6.46	Peak	100	168																																																																
5	12370.00	39.45	54.00	-14.55	31.84	7.61	Average	100	298																																																																
6	12370.00	52.50	74.00	-21.50	44.89	7.61	Peak	100	298																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT160	Test Freq. (MHz)	6185																																																																						
Polarization	Vertical																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>23.90</td><td>54.00</td><td>-30.10</td><td>31.43</td><td>-7.53</td><td>Average</td><td>100</td><td>313</td></tr><tr><td>2</td><td>1131.00</td><td>35.77</td><td>74.00</td><td>-38.23</td><td>43.30</td><td>-7.53</td><td>Peak</td><td>100</td><td>313</td></tr><tr><td>3</td><td>8246.67</td><td>36.55</td><td>54.00</td><td>-17.45</td><td>30.09</td><td>6.46</td><td>Average</td><td>100</td><td>144</td></tr><tr><td>4</td><td>8246.67</td><td>49.64</td><td>74.00</td><td>-24.36</td><td>43.18</td><td>6.46</td><td>Peak</td><td>100</td><td>144</td></tr><tr><td>5</td><td>12370.00</td><td>38.40</td><td>54.00</td><td>-15.60</td><td>30.79</td><td>7.61</td><td>Average</td><td>100</td><td>326</td></tr><tr><td>6</td><td>12370.00</td><td>51.18</td><td>74.00</td><td>-22.82</td><td>43.57</td><td>7.61</td><td>Peak</td><td>100</td><td>326</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.90	54.00	-30.10	31.43	-7.53	Average	100	313	2	1131.00	35.77	74.00	-38.23	43.30	-7.53	Peak	100	313	3	8246.67	36.55	54.00	-17.45	30.09	6.46	Average	100	144	4	8246.67	49.64	74.00	-24.36	43.18	6.46	Peak	100	144	5	12370.00	38.40	54.00	-15.60	30.79	7.61	Average	100	326	6	12370.00	51.18	74.00	-22.82	43.57	7.61	Peak	100	326
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.90	54.00	-30.10	31.43	-7.53	Average	100	313																																																																
2	1131.00	35.77	74.00	-38.23	43.30	-7.53	Peak	100	313																																																																
3	8246.67	36.55	54.00	-17.45	30.09	6.46	Average	100	144																																																																
4	8246.67	49.64	74.00	-24.36	43.18	6.46	Peak	100	144																																																																
5	12370.00	38.40	54.00	-15.60	30.79	7.61	Average	100	326																																																																
6	12370.00	51.18	74.00	-22.82	43.57	7.61	Peak	100	326																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT160		Test Freq. (MHz)		6345																																																																							
Polarization	Horizontal																																																																											
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																												
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.61</td><td>54.00</td><td>-29.39</td><td>32.14</td><td>-7.53</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>2</td><td>1131.00</td><td>37.94</td><td>74.00</td><td>-36.06</td><td>45.47</td><td>-7.53</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>3</td><td>8460.00</td><td>37.69</td><td>54.00</td><td>-16.31</td><td>31.45</td><td>6.24</td><td>Average</td><td>100</td><td>134</td></tr><tr><td>4</td><td>8460.00</td><td>50.92</td><td>74.00</td><td>-23.08</td><td>44.68</td><td>6.24</td><td>Peak</td><td>100</td><td>134</td></tr><tr><td>5</td><td>12690.00</td><td>39.22</td><td>54.00</td><td>-14.78</td><td>31.42</td><td>7.80</td><td>Average</td><td>100</td><td>314</td></tr><tr><td>6</td><td>12690.00</td><td>52.52</td><td>74.00</td><td>-21.48</td><td>44.72</td><td>7.80</td><td>Peak</td><td>100</td><td>314</td></tr></tbody></table>								Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.61	54.00	-29.39	32.14	-7.53	Average	100	108	2	1131.00	37.94	74.00	-36.06	45.47	-7.53	Peak	100	108	3	8460.00	37.69	54.00	-16.31	31.45	6.24	Average	100	134	4	8460.00	50.92	74.00	-23.08	44.68	6.24	Peak	100	134	5	12690.00	39.22	54.00	-14.78	31.42	7.80	Average	100	314	6	12690.00	52.52	74.00	-21.48	44.72	7.80	Peak	100	314
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																			
1	1131.00	24.61	54.00	-29.39	32.14	-7.53	Average	100	108																																																																			
2	1131.00	37.94	74.00	-36.06	45.47	-7.53	Peak	100	108																																																																			
3	8460.00	37.69	54.00	-16.31	31.45	6.24	Average	100	134																																																																			
4	8460.00	50.92	74.00	-23.08	44.68	6.24	Peak	100	134																																																																			
5	12690.00	39.22	54.00	-14.78	31.42	7.80	Average	100	314																																																																			
6	12690.00	52.52	74.00	-21.48	44.72	7.80	Peak	100	314																																																																			
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																												



Modulation	be EHT160	Test Freq. (MHz)	6345																																																																						
Polarization	Vertical																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.05</td><td>54.00</td><td>-29.95</td><td>31.58</td><td>-7.53</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>2</td><td>1131.00</td><td>36.83</td><td>74.00</td><td>-37.17</td><td>44.36</td><td>-7.53</td><td>Peak</td><td>100</td><td>114</td></tr><tr><td>3</td><td>8460.00</td><td>37.43</td><td>54.00</td><td>-16.57</td><td>31.19</td><td>6.24</td><td>Average</td><td>100</td><td>169</td></tr><tr><td>4</td><td>8460.00</td><td>49.57</td><td>74.00</td><td>-24.43</td><td>43.33</td><td>6.24</td><td>Peak</td><td>100</td><td>169</td></tr><tr><td>5</td><td>12690.00</td><td>39.41</td><td>54.00</td><td>-14.59</td><td>31.61</td><td>7.80</td><td>Average</td><td>100</td><td>345</td></tr><tr><td>6</td><td>12690.00</td><td>51.50</td><td>74.00</td><td>-22.50</td><td>43.70</td><td>7.80</td><td>Peak</td><td>100</td><td>345</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.05	54.00	-29.95	31.58	-7.53	Average	100	114	2	1131.00	36.83	74.00	-37.17	44.36	-7.53	Peak	100	114	3	8460.00	37.43	54.00	-16.57	31.19	6.24	Average	100	169	4	8460.00	49.57	74.00	-24.43	43.33	6.24	Peak	100	169	5	12690.00	39.41	54.00	-14.59	31.61	7.80	Average	100	345	6	12690.00	51.50	74.00	-22.50	43.70	7.80	Peak	100	345
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.05	54.00	-29.95	31.58	-7.53	Average	100	114																																																																
2	1131.00	36.83	74.00	-37.17	44.36	-7.53	Peak	100	114																																																																
3	8460.00	37.43	54.00	-16.57	31.19	6.24	Average	100	169																																																																
4	8460.00	49.57	74.00	-24.43	43.33	6.24	Peak	100	169																																																																
5	12690.00	39.41	54.00	-14.59	31.61	7.80	Average	100	345																																																																
6	12690.00	51.50	74.00	-22.50	43.70	7.80	Peak	100	345																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT160		Test Freq. (MHz)		6505																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Tim Chan			Temperature(°C):23			Humidity(%):63																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.50</td><td>54.00</td><td>-29.50</td><td>32.03</td><td>-7.53</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>2</td><td>1131.00</td><td>37.44</td><td>74.00</td><td>-36.56</td><td>44.97</td><td>-7.53</td><td>Peak</td><td>100</td><td>21</td></tr><tr><td>3</td><td>8673.33</td><td>38.49</td><td>68.20</td><td>-29.71</td><td>31.20</td><td>7.29</td><td>Average</td><td>100</td><td>139</td></tr><tr><td>4</td><td>8673.33</td><td>51.52</td><td>88.20</td><td>-36.68</td><td>44.23</td><td>7.29</td><td>Peak</td><td>100</td><td>139</td></tr><tr><td>5</td><td>13010.00</td><td>39.50</td><td>68.20</td><td>-28.70</td><td>31.55</td><td>7.95</td><td>Average</td><td>100</td><td>356</td></tr><tr><td>6</td><td>13010.00</td><td>52.84</td><td>88.20</td><td>-35.36</td><td>44.89</td><td>7.95</td><td>Peak</td><td>100</td><td>356</td></tr></tbody></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	1131.00	24.50	54.00	-29.50	32.03	-7.53	Average	100	21	2	1131.00	37.44	74.00	-36.56	44.97	-7.53	Peak	100	21	3	8673.33	38.49	68.20	-29.71	31.20	7.29	Average	100	139	4	8673.33	51.52	88.20	-36.68	44.23	7.29	Peak	100	139	5	13010.00	39.50	68.20	-28.70	31.55	7.95	Average	100	356	6	13010.00	52.84	88.20	-35.36	44.89	7.95	Peak	100	356
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																										
1	1131.00	24.50	54.00	-29.50	32.03	-7.53	Average	100	21																																																																																										
2	1131.00	37.44	74.00	-36.56	44.97	-7.53	Peak	100	21																																																																																										
3	8673.33	38.49	68.20	-29.71	31.20	7.29	Average	100	139																																																																																										
4	8673.33	51.52	88.20	-36.68	44.23	7.29	Peak	100	139																																																																																										
5	13010.00	39.50	68.20	-28.70	31.55	7.95	Average	100	356																																																																																										
6	13010.00	52.84	88.20	-35.36	44.89	7.95	Peak	100	356																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			



Modulation	be EHT160	Test Freq. (MHz)	6505																																																																						
Polarization	Vertical																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>23.14</td><td>54.00</td><td>-30.86</td><td>30.67</td><td>-7.53</td><td>Average</td><td>100</td><td>42</td></tr><tr><td>2</td><td>1131.00</td><td>36.10</td><td>74.00</td><td>-37.90</td><td>43.63</td><td>-7.53</td><td>Peak</td><td>100</td><td>42</td></tr><tr><td>3</td><td>8673.33</td><td>37.57</td><td>68.20</td><td>-30.63</td><td>30.28</td><td>7.29</td><td>Average</td><td>100</td><td>152</td></tr><tr><td>4</td><td>8673.33</td><td>50.48</td><td>88.20</td><td>-37.72</td><td>43.19</td><td>7.29</td><td>Peak</td><td>100</td><td>152</td></tr><tr><td>5</td><td>13010.00</td><td>38.42</td><td>68.20</td><td>-29.78</td><td>30.47</td><td>7.95</td><td>Average</td><td>100</td><td>294</td></tr><tr><td>6</td><td>13010.00</td><td>51.82</td><td>88.20</td><td>-36.38</td><td>43.87</td><td>7.95</td><td>Peak</td><td>100</td><td>294</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.14	54.00	-30.86	30.67	-7.53	Average	100	42	2	1131.00	36.10	74.00	-37.90	43.63	-7.53	Peak	100	42	3	8673.33	37.57	68.20	-30.63	30.28	7.29	Average	100	152	4	8673.33	50.48	88.20	-37.72	43.19	7.29	Peak	100	152	5	13010.00	38.42	68.20	-29.78	30.47	7.95	Average	100	294	6	13010.00	51.82	88.20	-36.38	43.87	7.95	Peak	100	294
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.14	54.00	-30.86	30.67	-7.53	Average	100	42																																																																
2	1131.00	36.10	74.00	-37.90	43.63	-7.53	Peak	100	42																																																																
3	8673.33	37.57	68.20	-30.63	30.28	7.29	Average	100	152																																																																
4	8673.33	50.48	88.20	-37.72	43.19	7.29	Peak	100	152																																																																
5	13010.00	38.42	68.20	-29.78	30.47	7.95	Average	100	294																																																																
6	13010.00	51.82	88.20	-36.38	43.87	7.95	Peak	100	294																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT160	Test Freq. (MHz)	6665																																																																						
Polarization	Horizontal																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>24.31</td><td>54.00</td><td>-29.69</td><td>31.84</td><td>-7.53</td><td>Average</td><td>100</td><td>317</td></tr><tr><td>2</td><td>1131.00</td><td>36.83</td><td>74.00</td><td>-37.17</td><td>44.36</td><td>-7.53</td><td>Peak</td><td>100</td><td>317</td></tr><tr><td>3</td><td>8886.67</td><td>38.92</td><td>68.20</td><td>-29.28</td><td>31.66</td><td>7.26</td><td>Average</td><td>100</td><td>231</td></tr><tr><td>4</td><td>8886.67</td><td>52.02</td><td>88.20</td><td>-36.18</td><td>44.76</td><td>7.26</td><td>Peak</td><td>100</td><td>231</td></tr><tr><td>5</td><td>13330.00</td><td>39.22</td><td>54.00</td><td>-14.78</td><td>31.36</td><td>7.86</td><td>Average</td><td>100</td><td>358</td></tr><tr><td>6</td><td>13330.00</td><td>52.54</td><td>74.00</td><td>-21.46</td><td>44.68</td><td>7.86</td><td>Peak</td><td>100</td><td>358</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.31	54.00	-29.69	31.84	-7.53	Average	100	317	2	1131.00	36.83	74.00	-37.17	44.36	-7.53	Peak	100	317	3	8886.67	38.92	68.20	-29.28	31.66	7.26	Average	100	231	4	8886.67	52.02	88.20	-36.18	44.76	7.26	Peak	100	231	5	13330.00	39.22	54.00	-14.78	31.36	7.86	Average	100	358	6	13330.00	52.54	74.00	-21.46	44.68	7.86	Peak	100	358
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	24.31	54.00	-29.69	31.84	-7.53	Average	100	317																																																																
2	1131.00	36.83	74.00	-37.17	44.36	-7.53	Peak	100	317																																																																
3	8886.67	38.92	68.20	-29.28	31.66	7.26	Average	100	231																																																																
4	8886.67	52.02	88.20	-36.18	44.76	7.26	Peak	100	231																																																																
5	13330.00	39.22	54.00	-14.78	31.36	7.86	Average	100	358																																																																
6	13330.00	52.54	74.00	-21.46	44.68	7.86	Peak	100	358																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT160		Test Freq. (MHz)		6665																																																																										
Polarization	Vertical																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>23.46</td><td>74.00</td><td>-50.54</td><td>30.99</td><td>-7.53</td><td>Peak</td><td>100</td><td>309</td></tr><tr><td>2</td><td>1131.00</td><td>35.99</td><td>74.00</td><td>-38.01</td><td>43.52</td><td>-7.53</td><td>Peak</td><td>100</td><td>309</td></tr><tr><td>3</td><td>8886.67</td><td>37.75</td><td>68.20</td><td>-30.45</td><td>30.49</td><td>7.26</td><td>Average</td><td>100</td><td>135</td></tr><tr><td>4</td><td>8886.67</td><td>50.43</td><td>88.20</td><td>-37.77</td><td>43.17</td><td>7.26</td><td>Peak</td><td>100</td><td>135</td></tr><tr><td>5</td><td>13330.00</td><td>38.46</td><td>54.00</td><td>-15.54</td><td>30.60</td><td>7.86</td><td>Average</td><td>100</td><td>276</td></tr><tr><td>6</td><td>13330.00</td><td>51.41</td><td>74.00</td><td>-22.59</td><td>43.55</td><td>7.86</td><td>Peak</td><td>100</td><td>276</td></tr></tbody></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.46	74.00	-50.54	30.99	-7.53	Peak	100	309	2	1131.00	35.99	74.00	-38.01	43.52	-7.53	Peak	100	309	3	8886.67	37.75	68.20	-30.45	30.49	7.26	Average	100	135	4	8886.67	50.43	88.20	-37.77	43.17	7.26	Peak	100	135	5	13330.00	38.46	54.00	-15.54	30.60	7.86	Average	100	276	6	13330.00	51.41	74.00	-22.59	43.55	7.86	Peak	100	276
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	23.46	74.00	-50.54	30.99	-7.53	Peak	100	309																																																																						
2	1131.00	35.99	74.00	-38.01	43.52	-7.53	Peak	100	309																																																																						
3	8886.67	37.75	68.20	-30.45	30.49	7.26	Average	100	135																																																																						
4	8886.67	50.43	88.20	-37.77	43.17	7.26	Peak	100	135																																																																						
5	13330.00	38.46	54.00	-15.54	30.60	7.86	Average	100	276																																																																						
6	13330.00	51.41	74.00	-22.59	43.55	7.86	Peak	100	276																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															



Modulation	be EHT160		Test Freq. (MHz)		6825																																																																										
Polarization	Horizontal																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.32</td><td>54.00</td><td>-29.68</td><td>31.85</td><td>-7.53</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>2</td><td>1131.00</td><td>36.78</td><td>74.00</td><td>-37.22</td><td>44.31</td><td>-7.53</td><td>Peak</td><td>100</td><td>124</td></tr><tr><td>3</td><td>9100.00</td><td>39.13</td><td>54.00</td><td>-14.87</td><td>31.64</td><td>7.49</td><td>Average</td><td>100</td><td>198</td></tr><tr><td>4</td><td>9100.00</td><td>51.49</td><td>74.00</td><td>-22.51</td><td>44.00</td><td>7.49</td><td>Peak</td><td>100</td><td>198</td></tr><tr><td>5</td><td>13650.00</td><td>39.64</td><td>68.20</td><td>-28.56</td><td>31.65</td><td>7.99</td><td>Average</td><td>100</td><td>280</td></tr><tr><td>6</td><td>13650.00</td><td>52.59</td><td>88.20</td><td>-35.61</td><td>44.60</td><td>7.99</td><td>Peak</td><td>100</td><td>280</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.32	54.00	-29.68	31.85	-7.53	Average	100	124	2	1131.00	36.78	74.00	-37.22	44.31	-7.53	Peak	100	124	3	9100.00	39.13	54.00	-14.87	31.64	7.49	Average	100	198	4	9100.00	51.49	74.00	-22.51	44.00	7.49	Peak	100	198	5	13650.00	39.64	68.20	-28.56	31.65	7.99	Average	100	280	6	13650.00	52.59	88.20	-35.61	44.60	7.99	Peak	100	280
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	24.32	54.00	-29.68	31.85	-7.53	Average	100	124																																																																						
2	1131.00	36.78	74.00	-37.22	44.31	-7.53	Peak	100	124																																																																						
3	9100.00	39.13	54.00	-14.87	31.64	7.49	Average	100	198																																																																						
4	9100.00	51.49	74.00	-22.51	44.00	7.49	Peak	100	198																																																																						
5	13650.00	39.64	68.20	-28.56	31.65	7.99	Average	100	280																																																																						
6	13650.00	52.59	88.20	-35.61	44.60	7.99	Peak	100	280																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															



Modulation	be EHT160		Test Freq. (MHz)		6825																																																																										
Polarization	Vertical																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1311.00</td><td>25.36</td><td>54.00</td><td>-28.64</td><td>31.08</td><td>-5.72</td><td>Average</td><td>100</td><td>107</td></tr><tr><td>2</td><td>1311.00</td><td>38.19</td><td>74.00</td><td>-35.81</td><td>43.91</td><td>-5.72</td><td>Peak</td><td>100</td><td>107</td></tr><tr><td>3</td><td>9100.00</td><td>38.08</td><td>54.00</td><td>-15.92</td><td>30.59</td><td>7.49</td><td>Average</td><td>100</td><td>111</td></tr><tr><td>4</td><td>9100.00</td><td>51.09</td><td>74.00</td><td>-22.91</td><td>43.60</td><td>7.49</td><td>Peak</td><td>100</td><td>111</td></tr><tr><td>5</td><td>13650.00</td><td>38.63</td><td>68.20</td><td>-29.57</td><td>30.64</td><td>7.99</td><td>Average</td><td>100</td><td>339</td></tr><tr><td>6</td><td>13650.00</td><td>51.69</td><td>88.20</td><td>-36.51</td><td>43.70</td><td>7.99</td><td>Peak</td><td>100</td><td>339</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1311.00	25.36	54.00	-28.64	31.08	-5.72	Average	100	107	2	1311.00	38.19	74.00	-35.81	43.91	-5.72	Peak	100	107	3	9100.00	38.08	54.00	-15.92	30.59	7.49	Average	100	111	4	9100.00	51.09	74.00	-22.91	43.60	7.49	Peak	100	111	5	13650.00	38.63	68.20	-29.57	30.64	7.99	Average	100	339	6	13650.00	51.69	88.20	-36.51	43.70	7.99	Peak	100	339
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1311.00	25.36	54.00	-28.64	31.08	-5.72	Average	100	107																																																																						
2	1311.00	38.19	74.00	-35.81	43.91	-5.72	Peak	100	107																																																																						
3	9100.00	38.08	54.00	-15.92	30.59	7.49	Average	100	111																																																																						
4	9100.00	51.09	74.00	-22.91	43.60	7.49	Peak	100	111																																																																						
5	13650.00	38.63	68.20	-29.57	30.64	7.99	Average	100	339																																																																						
6	13650.00	51.69	88.20	-36.51	43.70	7.99	Peak	100	339																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															



Modulation	be EHT160	Test Freq. (MHz)	6985																																																																						
Polarization	Horizontal																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7250.00</td><td>48.02</td><td>54.00</td><td>-5.98</td><td>42.12</td><td>5.90</td><td>Average</td><td>216</td><td>358</td></tr><tr><td>2</td><td>7250.00</td><td>61.29</td><td>74.00</td><td>-12.71</td><td>55.39</td><td>5.90</td><td>Peak</td><td>216</td><td>358</td></tr><tr><td>3</td><td>9313.33</td><td>39.95</td><td>54.00</td><td>-14.05</td><td>31.47</td><td>8.48</td><td>Average</td><td>100</td><td>182</td></tr><tr><td>4</td><td>9313.33</td><td>53.05</td><td>74.00</td><td>-20.95</td><td>44.57</td><td>8.48</td><td>Peak</td><td>100</td><td>182</td></tr><tr><td>5</td><td>13970.00</td><td>39.96</td><td>68.20</td><td>-28.24</td><td>31.57</td><td>8.39</td><td>Average</td><td>100</td><td>348</td></tr><tr><td>6</td><td>13970.00</td><td>53.14</td><td>88.20</td><td>-35.06</td><td>44.75</td><td>8.39</td><td>Peak</td><td>100</td><td>348</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	48.02	54.00	-5.98	42.12	5.90	Average	216	358	2	7250.00	61.29	74.00	-12.71	55.39	5.90	Peak	216	358	3	9313.33	39.95	54.00	-14.05	31.47	8.48	Average	100	182	4	9313.33	53.05	74.00	-20.95	44.57	8.48	Peak	100	182	5	13970.00	39.96	68.20	-28.24	31.57	8.39	Average	100	348	6	13970.00	53.14	88.20	-35.06	44.75	8.39	Peak	100	348
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7250.00	48.02	54.00	-5.98	42.12	5.90	Average	216	358																																																																
2	7250.00	61.29	74.00	-12.71	55.39	5.90	Peak	216	358																																																																
3	9313.33	39.95	54.00	-14.05	31.47	8.48	Average	100	182																																																																
4	9313.33	53.05	74.00	-20.95	44.57	8.48	Peak	100	182																																																																
5	13970.00	39.96	68.20	-28.24	31.57	8.39	Average	100	348																																																																
6	13970.00	53.14	88.20	-35.06	44.75	8.39	Peak	100	348																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT160		Test Freq. (MHz)		6985																																																																										
Polarization	Vertical																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7250.00</td><td>47.46</td><td>54.00</td><td>-6.54</td><td>41.56</td><td>5.90</td><td>Average</td><td>223</td><td>326</td></tr><tr><td>2</td><td>7250.00</td><td>60.55</td><td>74.00</td><td>-13.45</td><td>54.65</td><td>5.90</td><td>Peak</td><td>223</td><td>326</td></tr><tr><td>3</td><td>9313.33</td><td>38.88</td><td>54.00</td><td>-15.12</td><td>30.40</td><td>8.48</td><td>Average</td><td>100</td><td>141</td></tr><tr><td>4</td><td>9313.33</td><td>51.86</td><td>74.00</td><td>-22.14</td><td>43.38</td><td>8.48</td><td>Peak</td><td>100</td><td>141</td></tr><tr><td>5</td><td>13970.00</td><td>38.95</td><td>68.20</td><td>-29.25</td><td>30.56</td><td>8.39</td><td>Average</td><td>100</td><td>351</td></tr><tr><td>6</td><td>13970.00</td><td>52.24</td><td>88.20</td><td>-35.96</td><td>43.85</td><td>8.39</td><td>Peak</td><td>100</td><td>351</td></tr></tbody></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	47.46	54.00	-6.54	41.56	5.90	Average	223	326	2	7250.00	60.55	74.00	-13.45	54.65	5.90	Peak	223	326	3	9313.33	38.88	54.00	-15.12	30.40	8.48	Average	100	141	4	9313.33	51.86	74.00	-22.14	43.38	8.48	Peak	100	141	5	13970.00	38.95	68.20	-29.25	30.56	8.39	Average	100	351	6	13970.00	52.24	88.20	-35.96	43.85	8.39	Peak	100	351
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	7250.00	47.46	54.00	-6.54	41.56	5.90	Average	223	326																																																																						
2	7250.00	60.55	74.00	-13.45	54.65	5.90	Peak	223	326																																																																						
3	9313.33	38.88	54.00	-15.12	30.40	8.48	Average	100	141																																																																						
4	9313.33	51.86	74.00	-22.14	43.38	8.48	Peak	100	141																																																																						
5	13970.00	38.95	68.20	-29.25	30.56	8.39	Average	100	351																																																																						
6	13970.00	52.24	88.20	-35.96	43.85	8.39	Peak	100	351																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															



Modulation	be EHT320	Test Freq. (MHz)	6105
Polarization	Horizontal		
Test By :Tim Chan Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) </			




Modulation	be EHT320	Test Freq. (MHz)	6105																																																																						
Polarization	Vertical																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1131.00</td><td>23.01</td><td>54.00</td><td>-30.99</td><td>30.54</td><td>-7.53</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>2</td><td>1131.00</td><td>36.14</td><td>74.00</td><td>-37.86</td><td>43.67</td><td>-7.53</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>3</td><td>8140.00</td><td>37.72</td><td>54.00</td><td>-16.28</td><td>30.88</td><td>6.84</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>4</td><td>8140.00</td><td>50.33</td><td>74.00</td><td>-23.67</td><td>43.49</td><td>6.84</td><td>Peak</td><td>100</td><td>124</td></tr><tr><td>5</td><td>12210.00</td><td>39.09</td><td>54.00</td><td>-14.91</td><td>30.82</td><td>8.27</td><td>Average</td><td>100</td><td>305</td></tr><tr><td>6</td><td>12210.00</td><td>52.06</td><td>74.00</td><td>-21.94</td><td>43.79</td><td>8.27</td><td>Peak</td><td>100</td><td>305</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.01	54.00	-30.99	30.54	-7.53	Average	100	27	2	1131.00	36.14	74.00	-37.86	43.67	-7.53	Peak	100	27	3	8140.00	37.72	54.00	-16.28	30.88	6.84	Average	100	124	4	8140.00	50.33	74.00	-23.67	43.49	6.84	Peak	100	124	5	12210.00	39.09	54.00	-14.91	30.82	8.27	Average	100	305	6	12210.00	52.06	74.00	-21.94	43.79	8.27	Peak	100	305
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.01	54.00	-30.99	30.54	-7.53	Average	100	27																																																																
2	1131.00	36.14	74.00	-37.86	43.67	-7.53	Peak	100	27																																																																
3	8140.00	37.72	54.00	-16.28	30.88	6.84	Average	100	124																																																																
4	8140.00	50.33	74.00	-23.67	43.49	6.84	Peak	100	124																																																																
5	12210.00	39.09	54.00	-14.91	30.82	8.27	Average	100	305																																																																
6	12210.00	52.06	74.00	-21.94	43.79	8.27	Peak	100	305																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT320		Test Freq. (MHz)		6265																																																																										
Polarization	Horizontal																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.06</td><td>54.00</td><td>-29.94</td><td>31.59</td><td>-7.53</td><td>Average</td><td>100</td><td>300</td></tr><tr><td>2</td><td>1131.00</td><td>37.05</td><td>74.00</td><td>-36.95</td><td>44.58</td><td>-7.53</td><td>Peak</td><td>100</td><td>300</td></tr><tr><td>3</td><td>8353.33</td><td>37.69</td><td>54.00</td><td>-16.31</td><td>31.43</td><td>6.26</td><td>Average</td><td>100</td><td>184</td></tr><tr><td>4</td><td>8353.33</td><td>50.52</td><td>74.00</td><td>-23.48</td><td>44.26</td><td>6.26</td><td>Peak</td><td>100</td><td>184</td></tr><tr><td>5</td><td>12530.00</td><td>39.14</td><td>54.00</td><td>-14.86</td><td>31.62</td><td>7.52</td><td>Average</td><td>100</td><td>321</td></tr><tr><td>6</td><td>12530.00</td><td>52.25</td><td>74.00</td><td>-21.75</td><td>44.73</td><td>7.52</td><td>Peak</td><td>100</td><td>321</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.06	54.00	-29.94	31.59	-7.53	Average	100	300	2	1131.00	37.05	74.00	-36.95	44.58	-7.53	Peak	100	300	3	8353.33	37.69	54.00	-16.31	31.43	6.26	Average	100	184	4	8353.33	50.52	74.00	-23.48	44.26	6.26	Peak	100	184	5	12530.00	39.14	54.00	-14.86	31.62	7.52	Average	100	321	6	12530.00	52.25	74.00	-21.75	44.73	7.52	Peak	100	321
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	24.06	54.00	-29.94	31.59	-7.53	Average	100	300																																																																						
2	1131.00	37.05	74.00	-36.95	44.58	-7.53	Peak	100	300																																																																						
3	8353.33	37.69	54.00	-16.31	31.43	6.26	Average	100	184																																																																						
4	8353.33	50.52	74.00	-23.48	44.26	6.26	Peak	100	184																																																																						
5	12530.00	39.14	54.00	-14.86	31.62	7.52	Average	100	321																																																																						
6	12530.00	52.25	74.00	-21.75	44.73	7.52	Peak	100	321																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

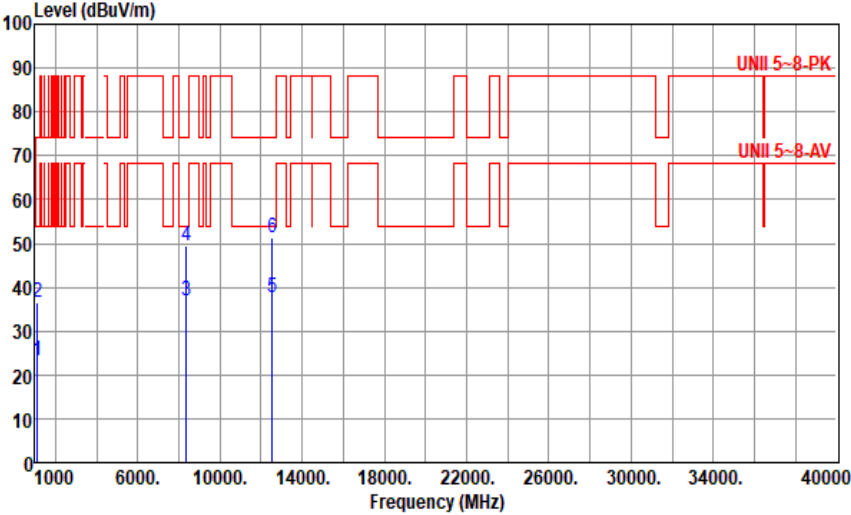

Modulation	be EHT320	Test Freq. (MHz)	6265																																																																						
Polarization	Vertical																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>23.08</td><td>54.00</td><td>-30.92</td><td>30.61</td><td>-7.53</td><td>Average</td><td>100</td><td>306</td></tr><tr><td>2</td><td>1131.00</td><td>36.36</td><td>74.00</td><td>-37.64</td><td>43.89</td><td>-7.53</td><td>Peak</td><td>100</td><td>306</td></tr><tr><td>3</td><td>8353.33</td><td>37.02</td><td>54.00</td><td>-16.98</td><td>30.76</td><td>6.26</td><td>Average</td><td>100</td><td>133</td></tr><tr><td>4</td><td>8353.33</td><td>49.53</td><td>74.00</td><td>-24.47</td><td>43.27</td><td>6.26</td><td>Peak</td><td>100</td><td>133</td></tr><tr><td>5</td><td>12530.00</td><td>37.78</td><td>54.00</td><td>-16.22</td><td>30.26</td><td>7.52</td><td>Average</td><td>100</td><td>313</td></tr><tr><td>6</td><td>12530.00</td><td>51.11</td><td>74.00</td><td>-22.89</td><td>43.59</td><td>7.52</td><td>Peak</td><td>100</td><td>313</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.08	54.00	-30.92	30.61	-7.53	Average	100	306	2	1131.00	36.36	74.00	-37.64	43.89	-7.53	Peak	100	306	3	8353.33	37.02	54.00	-16.98	30.76	6.26	Average	100	133	4	8353.33	49.53	74.00	-24.47	43.27	6.26	Peak	100	133	5	12530.00	37.78	54.00	-16.22	30.26	7.52	Average	100	313	6	12530.00	51.11	74.00	-22.89	43.59	7.52	Peak	100	313
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.08	54.00	-30.92	30.61	-7.53	Average	100	306																																																																
2	1131.00	36.36	74.00	-37.64	43.89	-7.53	Peak	100	306																																																																
3	8353.33	37.02	54.00	-16.98	30.76	6.26	Average	100	133																																																																
4	8353.33	49.53	74.00	-24.47	43.27	6.26	Peak	100	133																																																																
5	12530.00	37.78	54.00	-16.22	30.26	7.52	Average	100	313																																																																
6	12530.00	51.11	74.00	-22.89	43.59	7.52	Peak	100	313																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT320		Test Freq. (MHz)		6425																																																																										
Polarization	Horizontal																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.24</td><td>54.00</td><td>-29.76</td><td>31.77</td><td>-7.53</td><td>Average</td><td>100</td><td>192</td></tr><tr><td>2</td><td>1131.00</td><td>37.45</td><td>74.00</td><td>-36.55</td><td>44.98</td><td>-7.53</td><td>Peak</td><td>100</td><td>192</td></tr><tr><td>3</td><td>8566.67</td><td>38.40</td><td>68.20</td><td>-29.80</td><td>31.58</td><td>6.82</td><td>Average</td><td>100</td><td>143</td></tr><tr><td>4</td><td>8566.67</td><td>51.61</td><td>88.20</td><td>-36.59</td><td>44.79</td><td>6.82</td><td>Peak</td><td>100</td><td>143</td></tr><tr><td>5</td><td>12850.00</td><td>39.24</td><td>68.20</td><td>-28.96</td><td>31.18</td><td>8.06</td><td>Average</td><td>100</td><td>355</td></tr><tr><td>6</td><td>12850.00</td><td>52.72</td><td>88.20</td><td>-35.48</td><td>44.66</td><td>8.06</td><td>Peak</td><td>100</td><td>355</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.24	54.00	-29.76	31.77	-7.53	Average	100	192	2	1131.00	37.45	74.00	-36.55	44.98	-7.53	Peak	100	192	3	8566.67	38.40	68.20	-29.80	31.58	6.82	Average	100	143	4	8566.67	51.61	88.20	-36.59	44.79	6.82	Peak	100	143	5	12850.00	39.24	68.20	-28.96	31.18	8.06	Average	100	355	6	12850.00	52.72	88.20	-35.48	44.66	8.06	Peak	100	355
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	24.24	54.00	-29.76	31.77	-7.53	Average	100	192																																																																						
2	1131.00	37.45	74.00	-36.55	44.98	-7.53	Peak	100	192																																																																						
3	8566.67	38.40	68.20	-29.80	31.58	6.82	Average	100	143																																																																						
4	8566.67	51.61	88.20	-36.59	44.79	6.82	Peak	100	143																																																																						
5	12850.00	39.24	68.20	-28.96	31.18	8.06	Average	100	355																																																																						
6	12850.00	52.72	88.20	-35.48	44.66	8.06	Peak	100	355																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															




Modulation	be EHT320	Test Freq. (MHz)	6425																																																																						
Polarization	Vertical																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>23.70</td><td>54.00</td><td>-30.30</td><td>31.23</td><td>-7.53</td><td>Average</td><td>100</td><td>150</td></tr><tr><td>2</td><td>1131.00</td><td>36.57</td><td>74.00</td><td>-37.43</td><td>44.10</td><td>-7.53</td><td>Peak</td><td>100</td><td>150</td></tr><tr><td>3</td><td>8566.67</td><td>37.30</td><td>68.20</td><td>-30.90</td><td>30.48</td><td>6.82</td><td>Average</td><td>100</td><td>135</td></tr><tr><td>4</td><td>8566.67</td><td>50.65</td><td>88.20</td><td>-37.55</td><td>43.83</td><td>6.82</td><td>Peak</td><td>100</td><td>135</td></tr><tr><td>5</td><td>12850.00</td><td>38.75</td><td>68.20</td><td>-29.45</td><td>30.69</td><td>8.06</td><td>Average</td><td>100</td><td>326</td></tr><tr><td>6</td><td>12850.00</td><td>51.69</td><td>88.20</td><td>-36.51</td><td>43.63</td><td>8.06</td><td>Peak</td><td>100</td><td>326</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.70	54.00	-30.30	31.23	-7.53	Average	100	150	2	1131.00	36.57	74.00	-37.43	44.10	-7.53	Peak	100	150	3	8566.67	37.30	68.20	-30.90	30.48	6.82	Average	100	135	4	8566.67	50.65	88.20	-37.55	43.83	6.82	Peak	100	135	5	12850.00	38.75	68.20	-29.45	30.69	8.06	Average	100	326	6	12850.00	51.69	88.20	-36.51	43.63	8.06	Peak	100	326
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1131.00	23.70	54.00	-30.30	31.23	-7.53	Average	100	150																																																																
2	1131.00	36.57	74.00	-37.43	44.10	-7.53	Peak	100	150																																																																
3	8566.67	37.30	68.20	-30.90	30.48	6.82	Average	100	135																																																																
4	8566.67	50.65	88.20	-37.55	43.83	6.82	Peak	100	135																																																																
5	12850.00	38.75	68.20	-29.45	30.69	8.06	Average	100	326																																																																
6	12850.00	51.69	88.20	-36.51	43.63	8.06	Peak	100	326																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

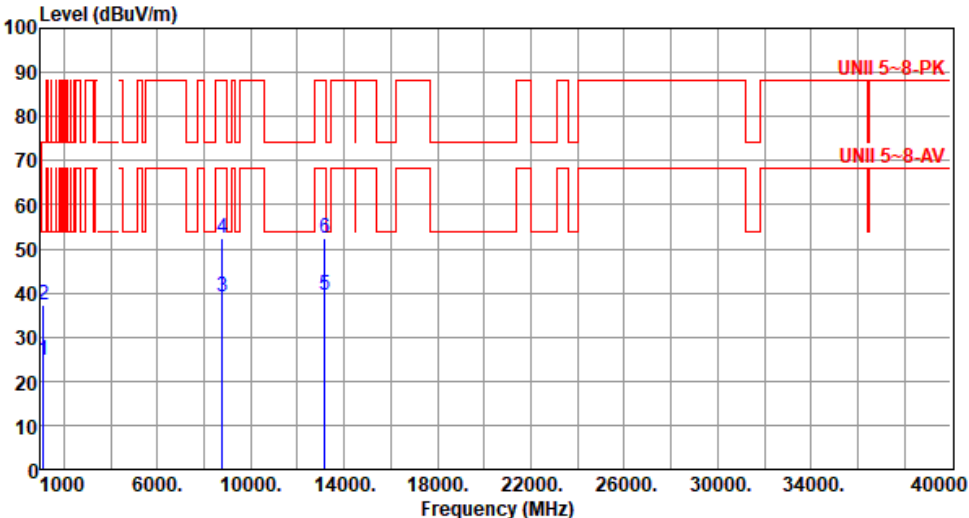

Modulation	be EHT320		Test Freq. (MHz)		6585																																																																										
Polarization	Horizontal																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>24.61</td><td>54.00</td><td>-29.39</td><td>32.14</td><td>-7.53</td><td>Average</td><td>100</td><td>196</td></tr><tr><td>2</td><td>1131.00</td><td>37.18</td><td>74.00</td><td>-36.82</td><td>44.71</td><td>-7.53</td><td>Peak</td><td>100</td><td>196</td></tr><tr><td>3</td><td>8780.00</td><td>39.15</td><td>68.20</td><td>-29.05</td><td>31.88</td><td>7.27</td><td>Average</td><td>100</td><td>187</td></tr><tr><td>4</td><td>8780.00</td><td>52.25</td><td>88.20</td><td>-35.95</td><td>44.98</td><td>7.27</td><td>Peak</td><td>100</td><td>187</td></tr><tr><td>5</td><td>13170.00</td><td>39.59</td><td>68.20</td><td>-28.61</td><td>31.82</td><td>7.77</td><td>Average</td><td>100</td><td>351</td></tr><tr><td>6</td><td>13170.00</td><td>52.56</td><td>88.20</td><td>-35.64</td><td>44.79</td><td>7.77</td><td>Peak</td><td>100</td><td>351</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	24.61	54.00	-29.39	32.14	-7.53	Average	100	196	2	1131.00	37.18	74.00	-36.82	44.71	-7.53	Peak	100	196	3	8780.00	39.15	68.20	-29.05	31.88	7.27	Average	100	187	4	8780.00	52.25	88.20	-35.95	44.98	7.27	Peak	100	187	5	13170.00	39.59	68.20	-28.61	31.82	7.77	Average	100	351	6	13170.00	52.56	88.20	-35.64	44.79	7.77	Peak	100	351
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	24.61	54.00	-29.39	32.14	-7.53	Average	100	196																																																																						
2	1131.00	37.18	74.00	-36.82	44.71	-7.53	Peak	100	196																																																																						
3	8780.00	39.15	68.20	-29.05	31.88	7.27	Average	100	187																																																																						
4	8780.00	52.25	88.20	-35.95	44.98	7.27	Peak	100	187																																																																						
5	13170.00	39.59	68.20	-28.61	31.82	7.77	Average	100	351																																																																						
6	13170.00	52.56	88.20	-35.64	44.79	7.77	Peak	100	351																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															

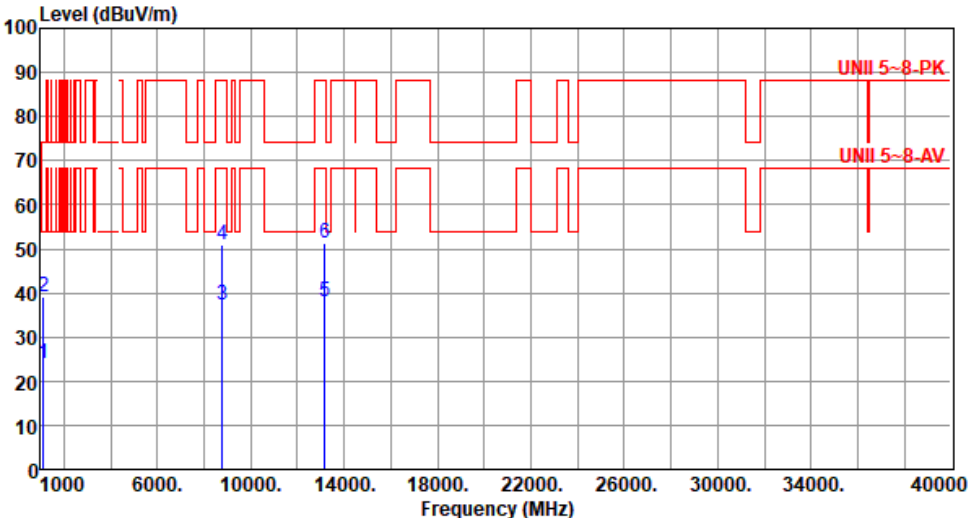

Modulation	be EHT320		Test Freq. (MHz)		6585																																																																										
Polarization	Vertical																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1131.00</td><td>23.84</td><td>54.00</td><td>-30.16</td><td>31.37</td><td>-7.53</td><td>Average</td><td>100</td><td>254</td></tr><tr><td>2</td><td>1131.00</td><td>38.94</td><td>74.00</td><td>-35.06</td><td>46.47</td><td>-7.53</td><td>Peak</td><td>100</td><td>254</td></tr><tr><td>3</td><td>8780.00</td><td>37.39</td><td>68.20</td><td>-30.81</td><td>30.12</td><td>7.27</td><td>Average</td><td>100</td><td>157</td></tr><tr><td>4</td><td>8780.00</td><td>50.96</td><td>88.20</td><td>-37.24</td><td>43.69</td><td>7.27</td><td>Peak</td><td>100</td><td>157</td></tr><tr><td>5</td><td>13170.00</td><td>38.13</td><td>68.20</td><td>-30.07</td><td>30.36</td><td>7.77</td><td>Average</td><td>100</td><td>333</td></tr><tr><td>6</td><td>13170.00</td><td>51.35</td><td>88.20</td><td>-36.85</td><td>43.58</td><td>7.77</td><td>Peak</td><td>100</td><td>333</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1131.00	23.84	54.00	-30.16	31.37	-7.53	Average	100	254	2	1131.00	38.94	74.00	-35.06	46.47	-7.53	Peak	100	254	3	8780.00	37.39	68.20	-30.81	30.12	7.27	Average	100	157	4	8780.00	50.96	88.20	-37.24	43.69	7.27	Peak	100	157	5	13170.00	38.13	68.20	-30.07	30.36	7.77	Average	100	333	6	13170.00	51.35	88.20	-36.85	43.58	7.77	Peak	100	333
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1131.00	23.84	54.00	-30.16	31.37	-7.53	Average	100	254																																																																						
2	1131.00	38.94	74.00	-35.06	46.47	-7.53	Peak	100	254																																																																						
3	8780.00	37.39	68.20	-30.81	30.12	7.27	Average	100	157																																																																						
4	8780.00	50.96	88.20	-37.24	43.69	7.27	Peak	100	157																																																																						
5	13170.00	38.13	68.20	-30.07	30.36	7.77	Average	100	333																																																																						
6	13170.00	51.35	88.20	-36.85	43.58	7.77	Peak	100	333																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															



Modulation	be EHT320		Test Freq. (MHz)		6745																																																																										
Polarization	Horizontal																																																																														
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																															
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7250.00</td><td>44.61</td><td>54.00</td><td>-9.39</td><td>38.71</td><td>5.90</td><td>Average</td><td>184</td><td>2</td></tr><tr><td>2</td><td>7250.00</td><td>57.75</td><td>74.00</td><td>-16.25</td><td>51.85</td><td>5.90</td><td>Peak</td><td>184</td><td>2</td></tr><tr><td>3</td><td>8993.33</td><td>39.08</td><td>68.20</td><td>-29.12</td><td>31.71</td><td>7.37</td><td>Average</td><td>100</td><td>144</td></tr><tr><td>4</td><td>8993.33</td><td>51.75</td><td>88.20</td><td>-36.45</td><td>44.38</td><td>7.37</td><td>Peak</td><td>100</td><td>144</td></tr><tr><td>5</td><td>13490.00</td><td>39.51</td><td>68.20</td><td>-28.69</td><td>31.27</td><td>8.24</td><td>Average</td><td>100</td><td>349</td></tr><tr><td>6</td><td>13490.00</td><td>53.08</td><td>88.20</td><td>-35.12</td><td>44.84</td><td>8.24</td><td>Peak</td><td>100</td><td>349</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	44.61	54.00	-9.39	38.71	5.90	Average	184	2	2	7250.00	57.75	74.00	-16.25	51.85	5.90	Peak	184	2	3	8993.33	39.08	68.20	-29.12	31.71	7.37	Average	100	144	4	8993.33	51.75	88.20	-36.45	44.38	7.37	Peak	100	144	5	13490.00	39.51	68.20	-28.69	31.27	8.24	Average	100	349	6	13490.00	53.08	88.20	-35.12	44.84	8.24	Peak	100	349
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	7250.00	44.61	54.00	-9.39	38.71	5.90	Average	184	2																																																																						
2	7250.00	57.75	74.00	-16.25	51.85	5.90	Peak	184	2																																																																						
3	8993.33	39.08	68.20	-29.12	31.71	7.37	Average	100	144																																																																						
4	8993.33	51.75	88.20	-36.45	44.38	7.37	Peak	100	144																																																																						
5	13490.00	39.51	68.20	-28.69	31.27	8.24	Average	100	349																																																																						
6	13490.00	53.08	88.20	-35.12	44.84	8.24	Peak	100	349																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															



Modulation	be EHT320	Test Freq. (MHz)	6745																																																																						
Polarization	Vertical																																																																								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7250.00</td><td>45.38</td><td>54.00</td><td>-8.62</td><td>39.48</td><td>5.90</td><td>Average</td><td>325</td><td>329</td></tr><tr><td>2</td><td>7250.00</td><td>59.22</td><td>74.00</td><td>-14.78</td><td>53.32</td><td>5.90</td><td>Peak</td><td>325</td><td>329</td></tr><tr><td>3</td><td>8993.33</td><td>37.52</td><td>68.20</td><td>-30.68</td><td>30.15</td><td>7.37</td><td>Average</td><td>100</td><td>110</td></tr><tr><td>4</td><td>8993.33</td><td>50.95</td><td>88.20</td><td>-37.25</td><td>43.58</td><td>7.37</td><td>Peak</td><td>100</td><td>110</td></tr><tr><td>5</td><td>13490.00</td><td>38.92</td><td>68.20</td><td>-29.28</td><td>30.68</td><td>8.24</td><td>Average</td><td>100</td><td>301</td></tr><tr><td>6</td><td>13490.00</td><td>51.72</td><td>88.20</td><td>-36.48</td><td>43.48</td><td>8.24</td><td>Peak</td><td>100</td><td>301</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	45.38	54.00	-8.62	39.48	5.90	Average	325	329	2	7250.00	59.22	74.00	-14.78	53.32	5.90	Peak	325	329	3	8993.33	37.52	68.20	-30.68	30.15	7.37	Average	100	110	4	8993.33	50.95	88.20	-37.25	43.58	7.37	Peak	100	110	5	13490.00	38.92	68.20	-29.28	30.68	8.24	Average	100	301	6	13490.00	51.72	88.20	-36.48	43.48	8.24	Peak	100	301
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7250.00	45.38	54.00	-8.62	39.48	5.90	Average	325	329																																																																
2	7250.00	59.22	74.00	-14.78	53.32	5.90	Peak	325	329																																																																
3	8993.33	37.52	68.20	-30.68	30.15	7.37	Average	100	110																																																																
4	8993.33	50.95	88.20	-37.25	43.58	7.37	Peak	100	110																																																																
5	13490.00	38.92	68.20	-29.28	30.68	8.24	Average	100	301																																																																
6	13490.00	51.72	88.20	-36.48	43.48	8.24	Peak	100	301																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT320	Test Freq. (MHz)	6905																																								
Polarization	Horizontal-Peak																																										
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7250.00</td><td>67.80</td><td>74.00</td><td>-6.20</td><td>61.90</td><td>5.90</td><td>Peak</td><td>188</td><td>80</td></tr><tr><td>2</td><td>9206.67</td><td>52.81</td><td>88.20</td><td>-35.39</td><td>44.87</td><td>7.94</td><td>Peak</td><td>100</td><td>210</td></tr><tr><td>3</td><td>13810.00</td><td>52.87</td><td>88.20</td><td>-35.33</td><td>44.75</td><td>8.12</td><td>Peak</td><td>100</td><td>308</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	67.80	74.00	-6.20	61.90	5.90	Peak	188	80	2	9206.67	52.81	88.20	-35.39	44.87	7.94	Peak	100	210	3	13810.00	52.87	88.20	-35.33	44.75	8.12	Peak	100	308
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	7250.00	67.80	74.00	-6.20	61.90	5.90	Peak	188	80																																		
2	9206.67	52.81	88.20	-35.39	44.87	7.94	Peak	100	210																																		
3	13810.00	52.87	88.20	-35.33	44.75	8.12	Peak	100	308																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT320	Test Freq. (MHz)	6905																																								
Polarization	Horizontal-Average																																										
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																											
Level (dBUV/m) UNII 5-8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7250.00</td><td>53.74</td><td>54.00</td><td>-0.26</td><td>47.84</td><td>5.90</td><td>Average</td><td>188</td><td>80</td></tr><tr><td>2</td><td>9206.67</td><td>39.22</td><td>68.20</td><td>-28.98</td><td>31.28</td><td>7.94</td><td>Average</td><td>100</td><td>210</td></tr><tr><td>3</td><td>13810.00</td><td>39.64</td><td>68.20</td><td>-28.56</td><td>31.52</td><td>8.12</td><td>Average</td><td>100</td><td>308</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	53.74	54.00	-0.26	47.84	5.90	Average	188	80	2	9206.67	39.22	68.20	-28.98	31.28	7.94	Average	100	210	3	13810.00	39.64	68.20	-28.56	31.52	8.12	Average	100	308
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	7250.00	53.74	54.00	-0.26	47.84	5.90	Average	188	80																																		
2	9206.67	39.22	68.20	-28.98	31.28	7.94	Average	100	210																																		
3	13810.00	39.64	68.20	-28.56	31.52	8.12	Average	100	308																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											

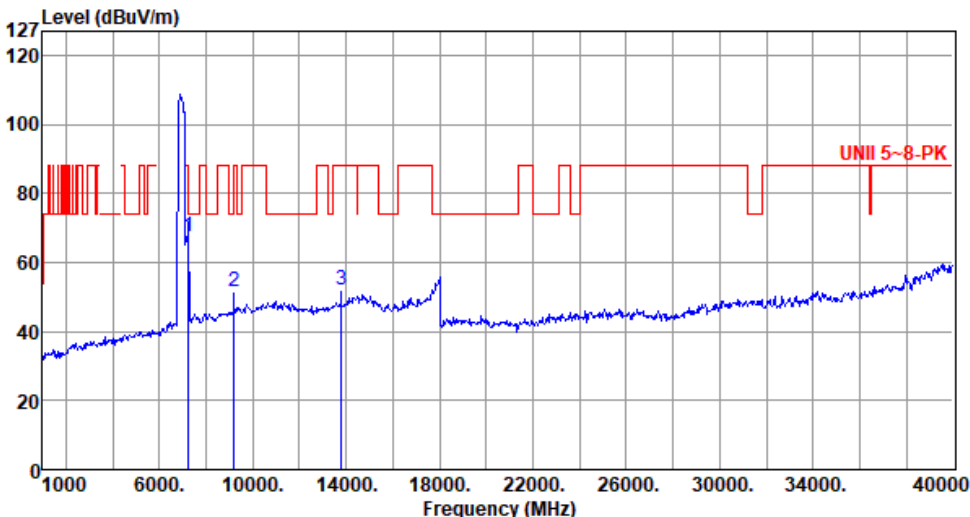

Modulation	be EHT320		Test Freq. (MHz)		6905																																												
Polarization	Vertical-Peak																																																
Test By :Tim Chan			Temperature(°C):23			Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7250.00</td><td>67.60</td><td>74.00</td><td>-6.40</td><td>61.70</td><td>5.90</td><td>Peak</td><td>309</td><td>307</td></tr><tr><td>2</td><td>9206.67</td><td>51.70</td><td>88.20</td><td>-36.50</td><td>43.76</td><td>7.94</td><td>Peak</td><td>100</td><td>115</td></tr><tr><td>3</td><td>13810.00</td><td>51.95</td><td>88.20</td><td>-36.25</td><td>43.83</td><td>8.12</td><td>Peak</td><td>100</td><td>283</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	67.60	74.00	-6.40	61.70	5.90	Peak	309	307	2	9206.67	51.70	88.20	-36.50	43.76	7.94	Peak	100	115	3	13810.00	51.95	88.20	-36.25	43.83	8.12	Peak	100	283
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																								
1	7250.00	67.60	74.00	-6.40	61.70	5.90	Peak	309	307																																								
2	9206.67	51.70	88.20	-36.50	43.76	7.94	Peak	100	115																																								
3	13810.00	51.95	88.20	-36.25	43.83	8.12	Peak	100	283																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																	




Modulation	be EHT320	Test Freq. (MHz)	6905																																								
Polarization	Vertical-Average																																										
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																											
Level (dBUV/m) UNII 5-8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7250.00</td><td>53.65</td><td>54.00</td><td>-0.35</td><td>47.75</td><td>5.90</td><td>Average</td><td>309</td><td>307</td></tr><tr><td>2</td><td>9206.67</td><td>38.93</td><td>68.20</td><td>-29.27</td><td>30.99</td><td>7.94</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>3</td><td>13810.00</td><td>38.39</td><td>68.20</td><td>-29.81</td><td>30.27</td><td>8.12</td><td>Average</td><td>100</td><td>283</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	53.65	54.00	-0.35	47.75	5.90	Average	309	307	2	9206.67	38.93	68.20	-29.27	30.99	7.94	Average	100	115	3	13810.00	38.39	68.20	-29.81	30.27	8.12	Average	100	283
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	7250.00	53.65	54.00	-0.35	47.75	5.90	Average	309	307																																		
2	9206.67	38.93	68.20	-29.27	30.99	7.94	Average	100	115																																		
3	13810.00	38.39	68.20	-29.81	30.27	8.12	Average	100	283																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement


Appendix D

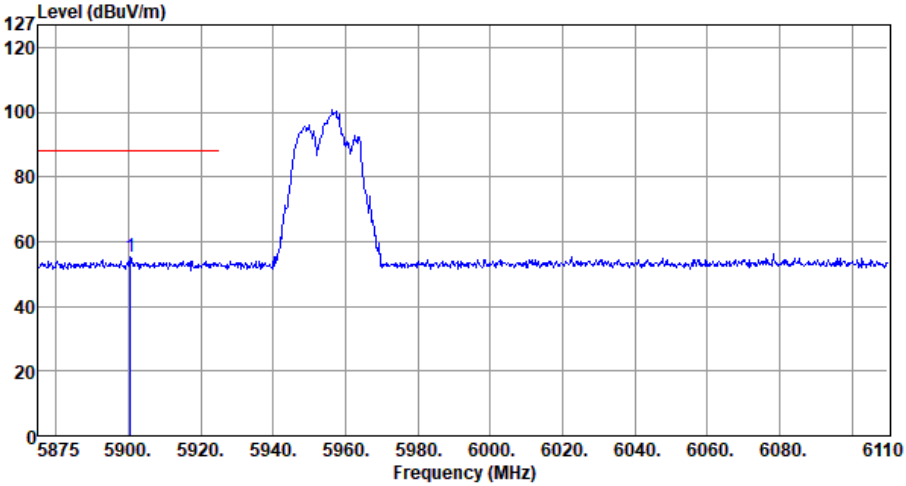Modulation	EHT20	Test Freq. (MHz)	5955																				
Polarization	Horizontal-Peak																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5900.38</td><td>55.16</td><td>88.20</td><td>-33.04</td><td>53.50</td><td>1.66</td><td>Peak</td><td>205</td><td>171</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5900.38	55.16	88.20	-33.04	53.50	1.66	Peak	205	171
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5900.38	55.16	88.20	-33.04	53.50	1.66	Peak	205	171														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

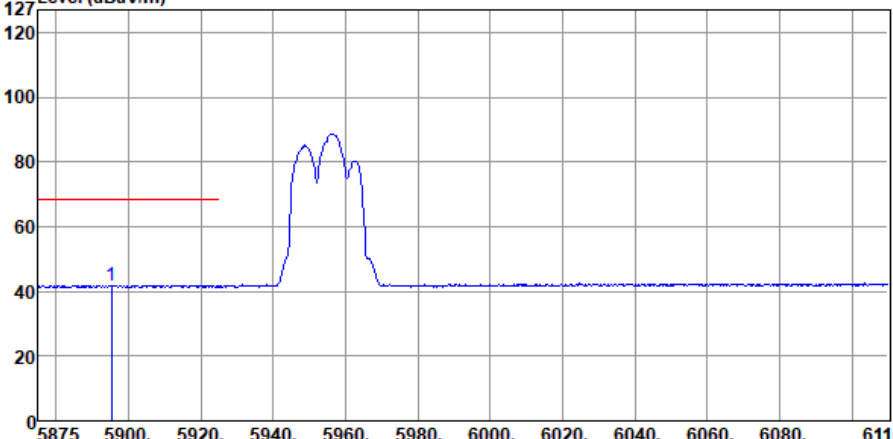Modulation	EHT20	Test Freq. (MHz)	5955																														
Polarization	Horizontal-Average																																
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.21</td><td>41.83</td><td>68.20</td><td>-26.37</td><td>40.19</td><td>1.64</td><td>Average</td><td>205</td><td>171</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5895.21	41.83	68.20	-26.37	40.19	1.64	Average	205	171
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																								
1	5895.21	41.83	68.20	-26.37	40.19	1.64	Average	205	171																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

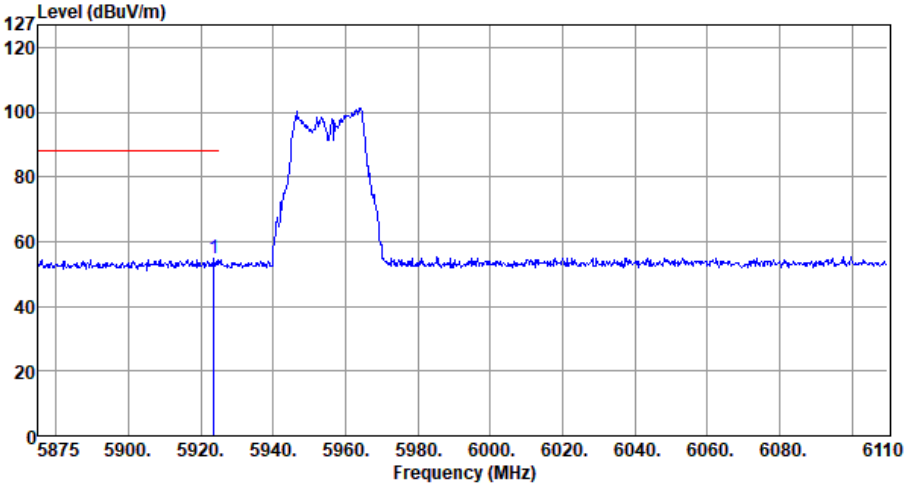Modulation	EHT20	Test Freq. (MHz)	5955																				
Polarization	Vertical-Peak																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5923.65</td><td>54.98</td><td>88.20</td><td>-33.22</td><td>53.31</td><td>1.67</td><td>Peak</td><td>226</td><td>188</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5923.65	54.98	88.20	-33.22	53.31	1.67	Peak	226	188
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5923.65	54.98	88.20	-33.22	53.31	1.67	Peak	226	188														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

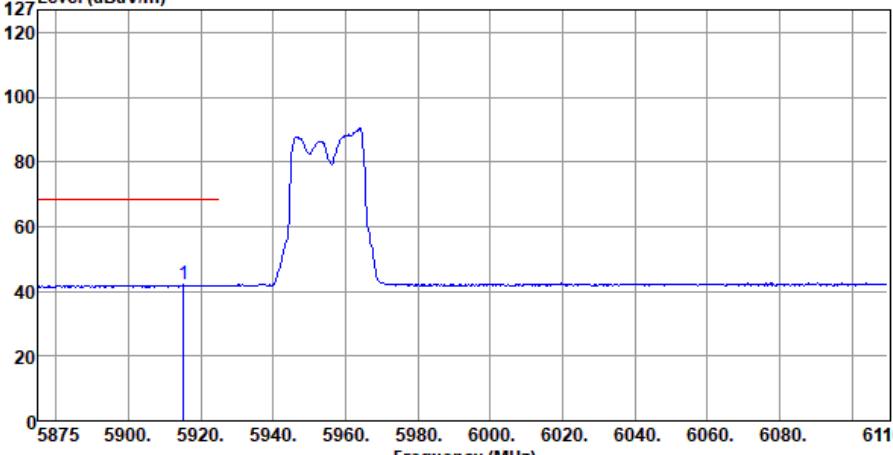Modulation	EHT20	Test Freq. (MHz)	5955																				
Polarization	Vertical-Average																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5915.19</td><td>41.95</td><td>68.20</td><td>-26.25</td><td>40.28</td><td>1.67</td><td>Average</td><td>226</td><td>188</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5915.19	41.95	68.20	-26.25	40.28	1.67	Average	226	188
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5915.19	41.95	68.20	-26.25	40.28	1.67	Average	226	188														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

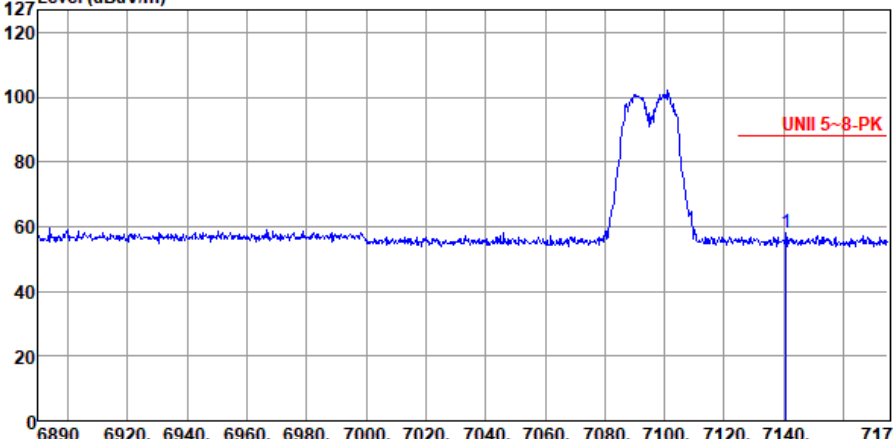Modulation	EHT20	Test Freq. (MHz)	7095																				
Polarization	Horizontal-Peak																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7140.80</td><td>57.99</td><td>88.20</td><td>-30.21</td><td>52.27</td><td>5.72</td><td>Peak</td><td>282</td><td>348</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7140.80	57.99	88.20	-30.21	52.27	5.72	Peak	282	348
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7140.80	57.99	88.20	-30.21	52.27	5.72	Peak	282	348														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

Modulation	EHT20	Test Freq. (MHz)	7095
Polarization	Horizontal-Average		
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

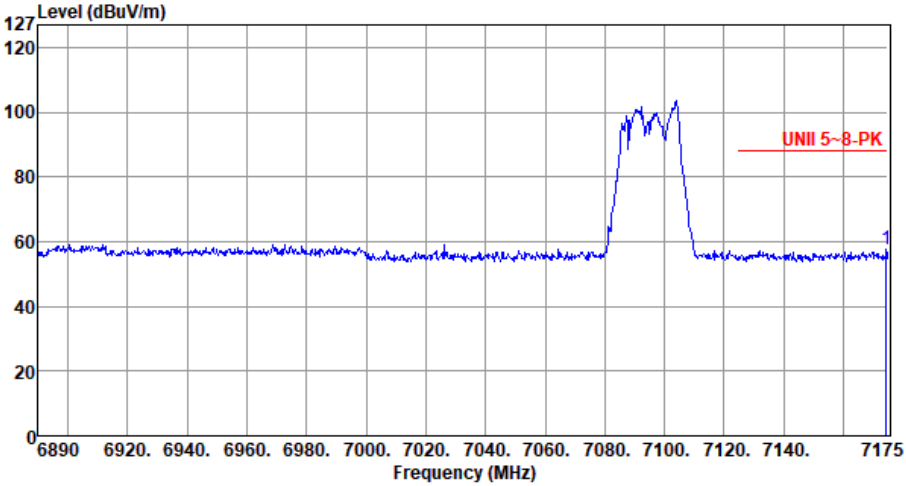Modulation	EHT20	Test Freq. (MHz)	7095																				
Polarization	Vertical-Peak																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7174.43</td><td>57.42</td><td>88.20</td><td>-30.78</td><td>51.59</td><td>5.83</td><td>Peak</td><td>201</td><td>171</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7174.43	57.42	88.20	-30.78	51.59	5.83	Peak	201	171
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7174.43	57.42	88.20	-30.78	51.59	5.83	Peak	201	171														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

Modulation	EHT20	Test Freq. (MHz)	7095																				
Polarization	Vertical-Average																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m) UNII 5-8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7130.26</td><td>45.18</td><td>68.20</td><td>-23.02</td><td>39.47</td><td>5.71</td><td>Average</td><td>201</td><td>171</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7130.26	45.18	68.20	-23.02	39.47	5.71	Average	201	171
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7130.26	45.18	68.20	-23.02	39.47	5.71	Average	201	171														



Band Edge measurement

Appendix D

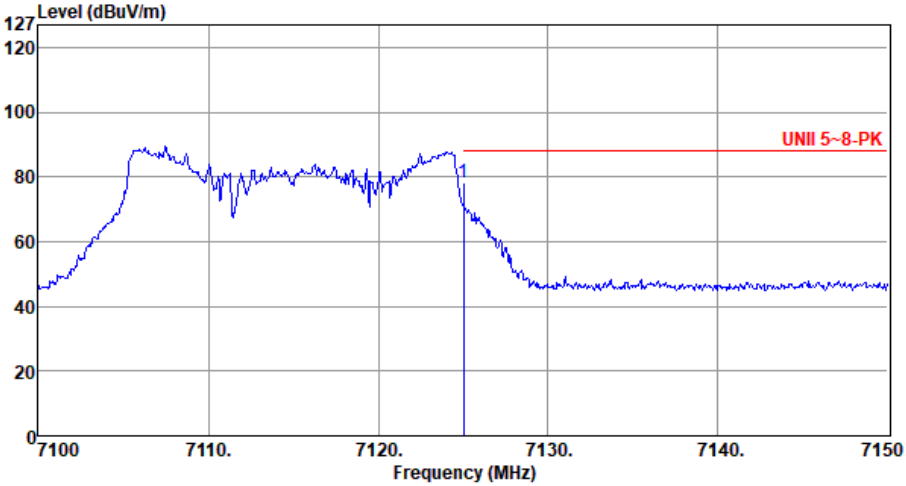Modulation	EHT20	Test Freq. (MHz)	7115																				
Polarization	Horizontal-Peak																						
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>78.19</td><td>88.20</td><td>-10.01</td><td>72.49</td><td>5.70</td><td>BP-PK</td><td>291</td><td>317</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	78.19	88.20	-10.01	72.49	5.70	BP-PK	291	317
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7125.00	78.19	88.20	-10.01	72.49	5.70	BP-PK	291	317														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

Modulation	EHT20	Test Freq. (MHz)	7115
Polarization	Horizontal-Average		
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	EHT20	Test Freq. (MHz)	7115																				
Polarization	Vertical-Peak																						
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>79.38</td><td>88.20</td><td>-8.82</td><td>73.68</td><td>5.70</td><td>BP-PK</td><td>129</td><td>281</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	79.38	88.20	-8.82	73.68	5.70	BP-PK	129	281
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7125.00	79.38	88.20	-8.82	73.68	5.70	BP-PK	129	281														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

Modulation	EHT20	Test Freq. (MHz)	7115
Polarization	Vertical-Average		
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66			
Level (dBuV/m)			



Band Edge measurement

Appendix D

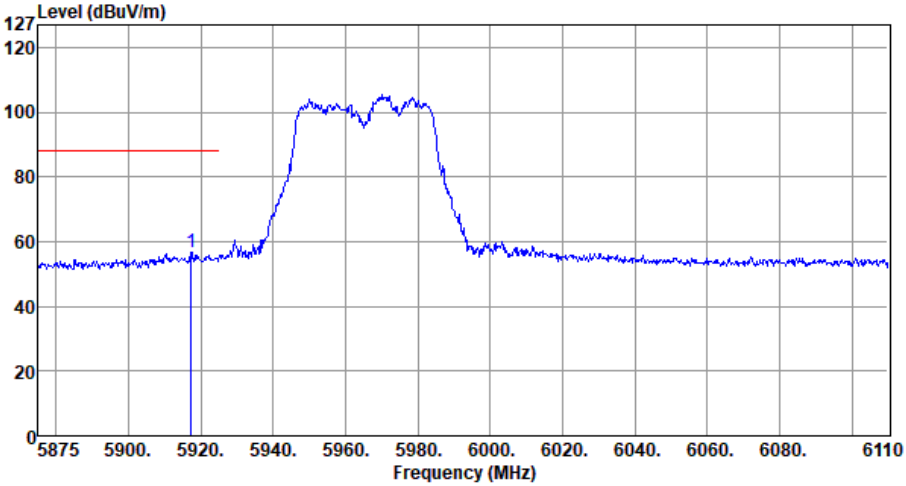Modulation	EHT40	Test Freq. (MHz)	5965																				
Polarization	Horizontal-Peak																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5917.30</td><td>56.81</td><td>88.20</td><td>-31.39</td><td>55.14</td><td>1.67</td><td>Peak</td><td>222</td><td>237</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5917.30	56.81	88.20	-31.39	55.14	1.67	Peak	222	237
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5917.30	56.81	88.20	-31.39	55.14	1.67	Peak	222	237														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

Modulation	EHT40	Test Freq. (MHz)	5965																				
Polarization	Horizontal-Average																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5917.07</td><td>43.69</td><td>68.20</td><td>-24.51</td><td>42.02</td><td>1.67</td><td>Average</td><td>222</td><td>237</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5917.07	43.69	68.20	-24.51	42.02	1.67	Average	222	237
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5917.07	43.69	68.20	-24.51	42.02	1.67	Average	222	237														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

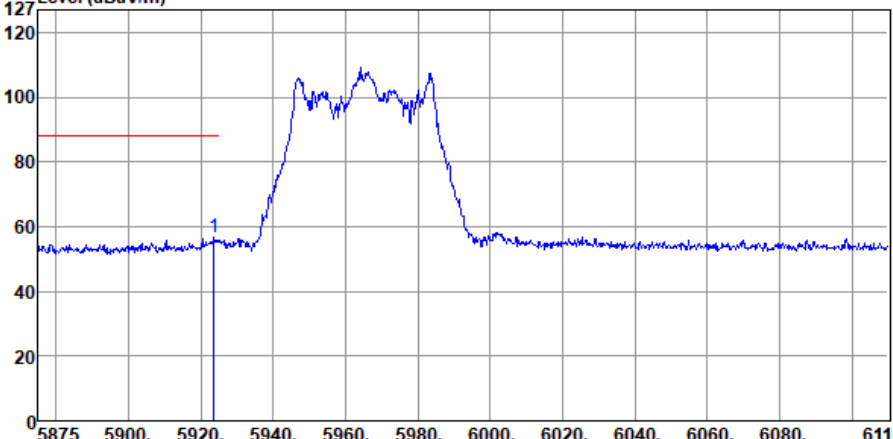Modulation	EHT40	Test Freq. (MHz)	5965																				
Polarization	Vertical-Peak																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5923.65</td><td>56.71</td><td>88.20</td><td>-31.49</td><td>55.04</td><td>1.67</td><td>Peak</td><td>244</td><td>223</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5923.65	56.71	88.20	-31.49	55.04	1.67	Peak	244	223
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5923.65	56.71	88.20	-31.49	55.04	1.67	Peak	244	223														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

Modulation	EHT40	Test Freq. (MHz)	5965																														
Polarization	Vertical-Average																																
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5923.41</td><td>44.46</td><td>68.20</td><td>-23.74</td><td>42.79</td><td>1.67</td><td>Average</td><td>244</td><td>223</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5923.41	44.46	68.20	-23.74	42.79	1.67	Average	244	223
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																								
1	5923.41	44.46	68.20	-23.74	42.79	1.67	Average	244	223																								



Band Edge measurement


Appendix D

Modulation	EHT40	Test Freq. (MHz)	7085																				
Polarization	Horizontal-Peak																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m) UNII 5~8-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7164.46</td><td>57.05</td><td>88.20</td><td>-31.15</td><td>51.25</td><td>5.80</td><td>Peak</td><td>201</td><td>160</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7164.46	57.05	88.20	-31.15	51.25	5.80	Peak	201	160
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7164.46	57.05	88.20	-31.15	51.25	5.80	Peak	201	160														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

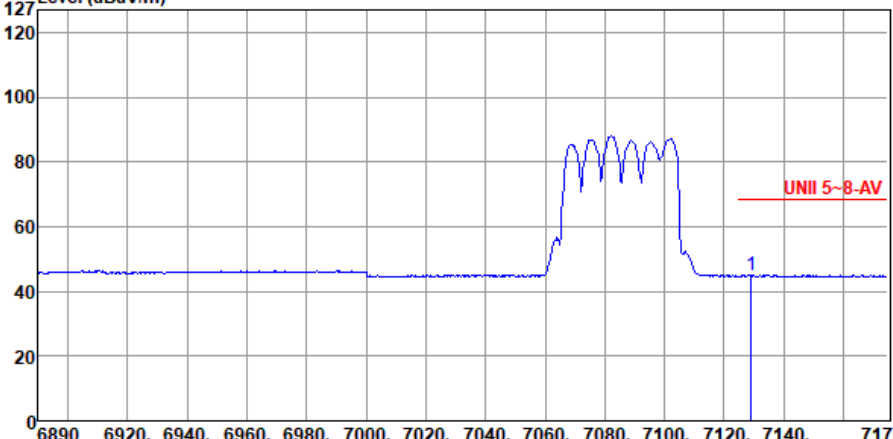Modulation	EHT40	Test Freq. (MHz)	7085																				
Polarization	Horizontal-Average																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7129.12</td><td>45.14</td><td>68.20</td><td>-23.06</td><td>39.43</td><td>5.71</td><td>Average</td><td>201</td><td>160</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7129.12	45.14	68.20	-23.06	39.43	5.71	Average	201	160
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7129.12	45.14	68.20	-23.06	39.43	5.71	Average	201	160														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

Modulation	EHT40	Test Freq. (MHz)	7085																														
Polarization	Vertical-Peak																																
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																																	
Level (dBuV/m) UNII 5~8-PK Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7168.73</td><td>57.22</td><td>88.20</td><td>-30.98</td><td>51.42</td><td>5.80</td><td>Peak</td><td>113</td><td>112</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	7168.73	57.22	88.20	-30.98	51.42	5.80	Peak	113	112
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																								
1	7168.73	57.22	88.20	-30.98	51.42	5.80	Peak	113	112																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

Modulation	EHT40	Test Freq. (MHz)	7085
Polarization	Vertical-Average		
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62			
Level (dBuV/m)			



Band Edge measurement


Appendix D

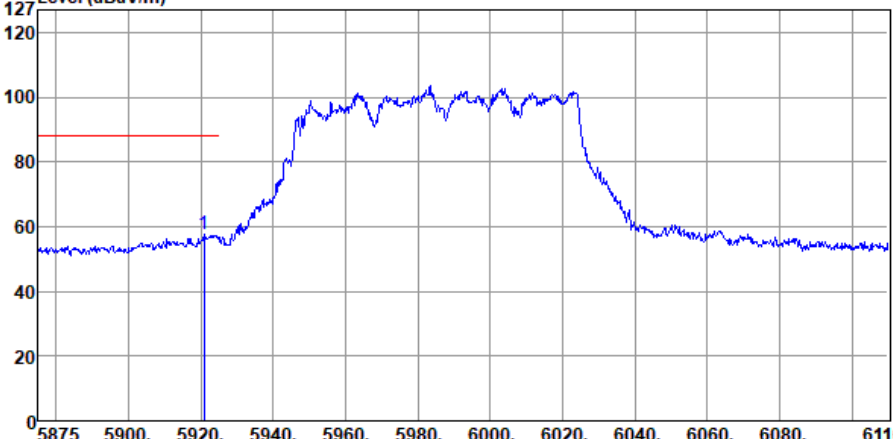Modulation	EHT80	Test Freq. (MHz)	5985																				
Polarization	Horizontal-Peak																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5920.83</td><td>57.50</td><td>88.20</td><td>-30.70</td><td>55.83</td><td>1.67</td><td>Peak</td><td>230</td><td>117</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5920.83	57.50	88.20	-30.70	55.83	1.67	Peak	230	117
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5920.83	57.50	88.20	-30.70	55.83	1.67	Peak	230	117														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

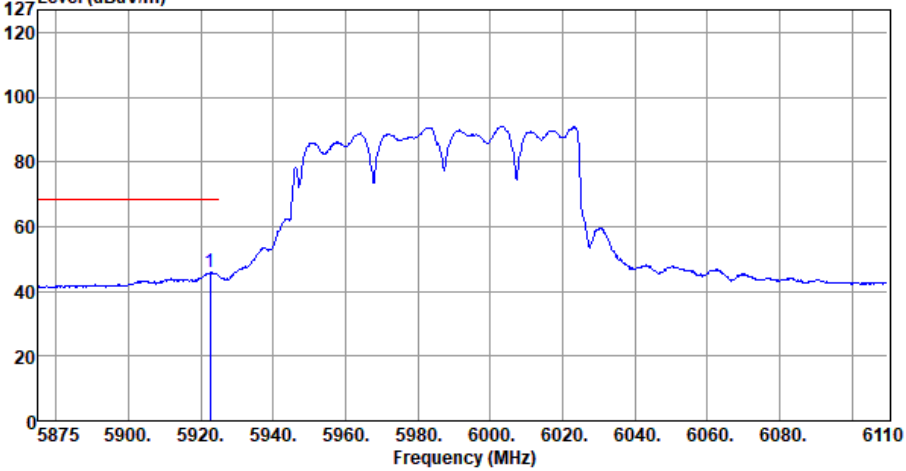Modulation	EHT80	Test Freq. (MHz)	5985																														
Polarization	Horizontal-Average																																
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5922.47</td><td>45.73</td><td>68.20</td><td>-22.47</td><td>44.06</td><td>1.67</td><td>Average</td><td>230</td><td>117</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5922.47	45.73	68.20	-22.47	44.06	1.67	Average	230	117
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																								
1	5922.47	45.73	68.20	-22.47	44.06	1.67	Average	230	117																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

Modulation	EHT80	Test Freq. (MHz)	5985																				
Polarization	Vertical-Peak																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5921.53</td><td>59.41</td><td>88.20</td><td>-28.79</td><td>57.74</td><td>1.67</td><td>Peak</td><td>156</td><td>140</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5921.53	59.41	88.20	-28.79	57.74	1.67	Peak	156	140
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5921.53	59.41	88.20	-28.79	57.74	1.67	Peak	156	140														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

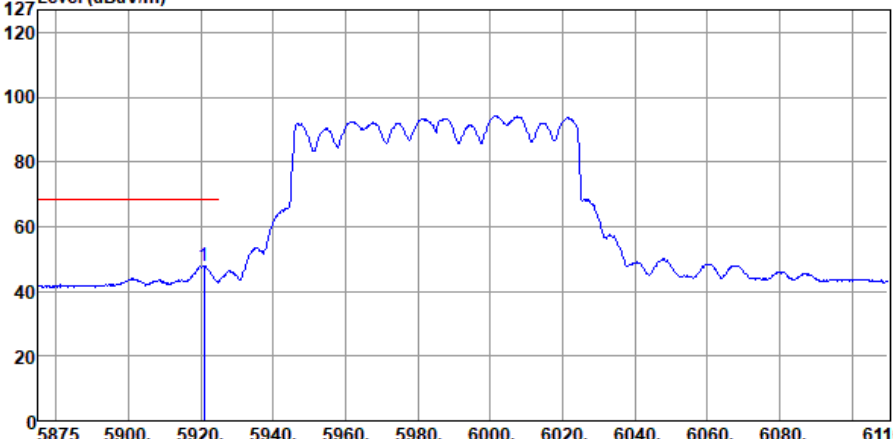Modulation	EHT80	Test Freq. (MHz)	5985																				
Polarization	Vertical-Average																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5920.83</td><td>47.84</td><td>68.20</td><td>-20.36</td><td>46.17</td><td>1.67</td><td>Average</td><td>156</td><td>140</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5920.83	47.84	68.20	-20.36	46.17	1.67	Average	156	140
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5920.83	47.84	68.20	-20.36	46.17	1.67	Average	156	140														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

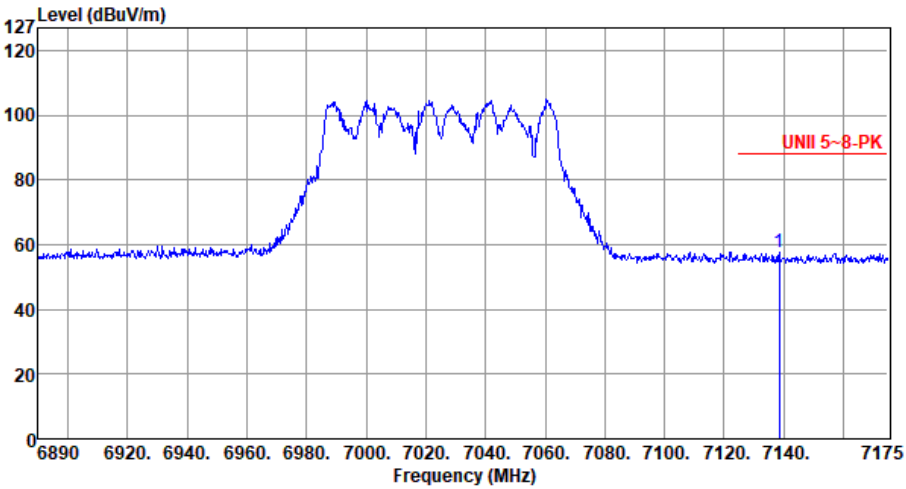Modulation	EHT80	Test Freq. (MHz)	7025																				
Polarization	Horizontal-Peak																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7138.52</td><td>57.42</td><td>88.20</td><td>-30.78</td><td>51.70</td><td>5.72</td><td>Peak</td><td>208</td><td>352</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7138.52	57.42	88.20	-30.78	51.70	5.72	Peak	208	352
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7138.52	57.42	88.20	-30.78	51.70	5.72	Peak	208	352														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

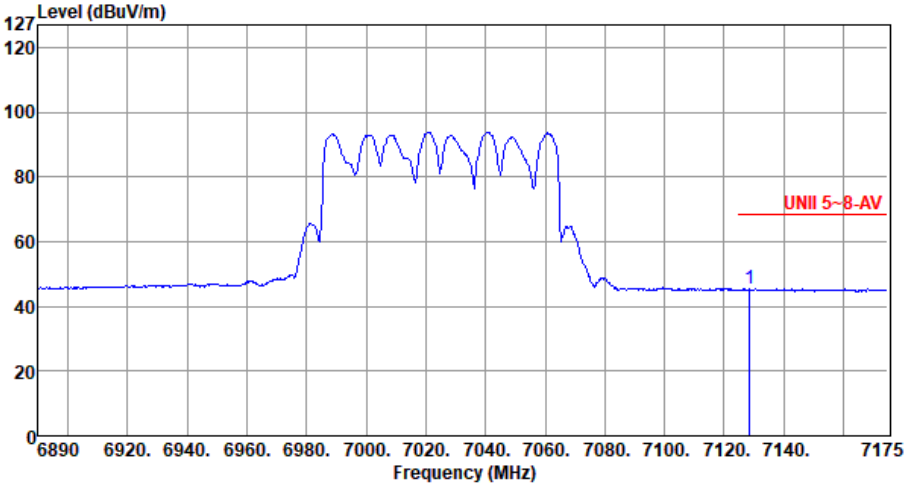Modulation	EHT80	Test Freq. (MHz)	7025																				
Polarization	Horizontal-Average																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7128.55</td><td>45.55</td><td>68.20</td><td>-22.65</td><td>39.84</td><td>5.71</td><td>Average</td><td>208</td><td>352</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7128.55	45.55	68.20	-22.65	39.84	5.71	Average	208	352
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7128.55	45.55	68.20	-22.65	39.84	5.71	Average	208	352														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

Modulation	EHT80	Test Freq. (MHz)	7025																				
Polarization	Vertical-Peak																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m) UNII 5~8-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7155.91</td><td>57.23</td><td>88.20</td><td>-30.97</td><td>51.47</td><td>5.76</td><td>Peak</td><td>228</td><td>192</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7155.91	57.23	88.20	-30.97	51.47	5.76	Peak	228	192
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7155.91	57.23	88.20	-30.97	51.47	5.76	Peak	228	192														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

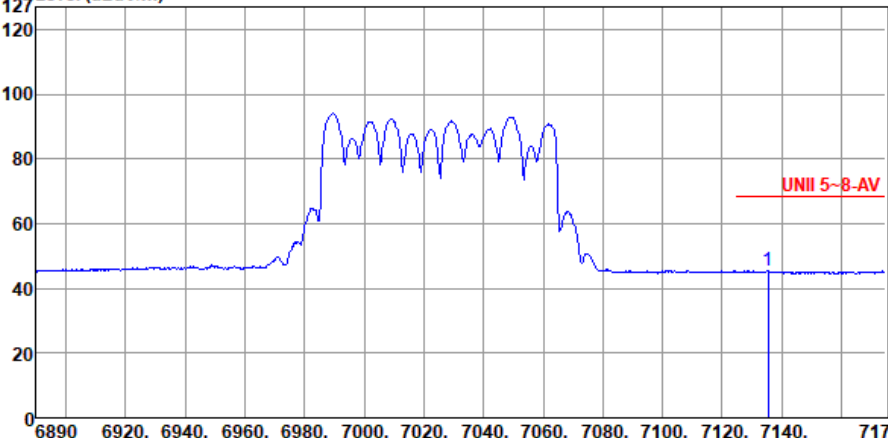Modulation	EHT80	Test Freq. (MHz)	7025																														
Polarization	Vertical-Average																																
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																																	
Level (dBuV/m)  UNII 5-8-AV 1 Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7135.39</td><td>45.52</td><td>68.20</td><td>-22.68</td><td>39.80</td><td>5.72</td><td>Average</td><td>228</td><td>192</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	7135.39	45.52	68.20	-22.68	39.80	5.72	Average	228	192
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																								
1	7135.39	45.52	68.20	-22.68	39.80	5.72	Average	228	192																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

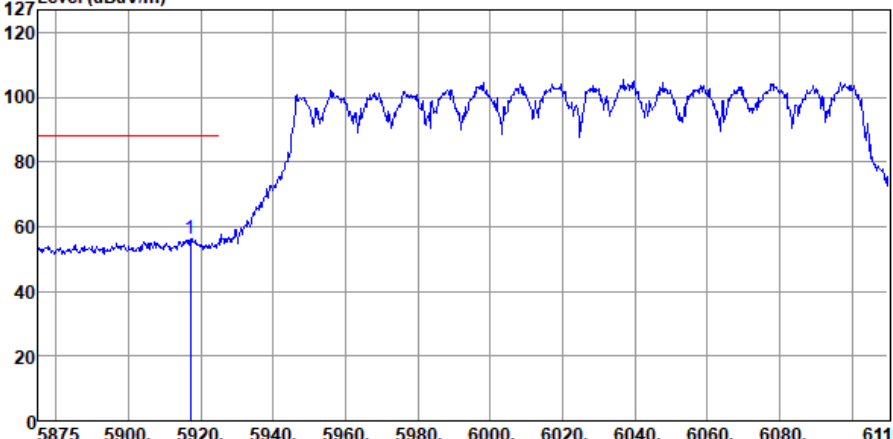Modulation	EHT160	Test Freq. (MHz)	6025																				
Polarization	Horizontal-Peak																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5917.07</td><td>56.10</td><td>88.20</td><td>-32.10</td><td>54.43</td><td>1.67</td><td>Peak</td><td>180</td><td>358</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5917.07	56.10	88.20	-32.10	54.43	1.67	Peak	180	358
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5917.07	56.10	88.20	-32.10	54.43	1.67	Peak	180	358														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

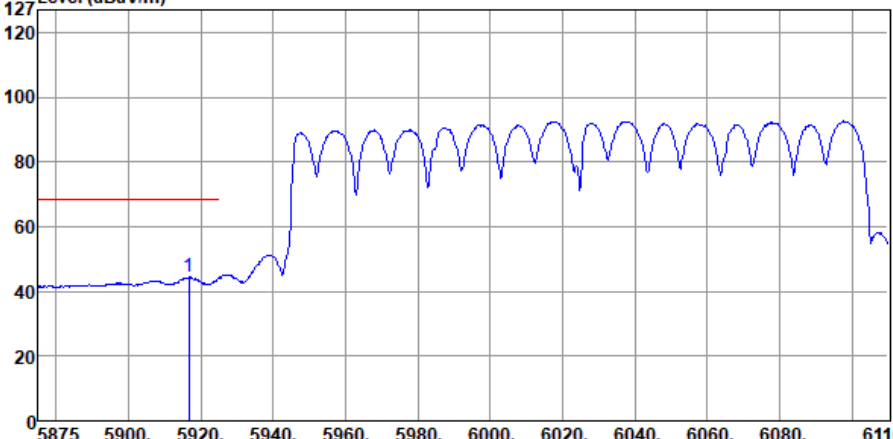Modulation	EHT160	Test Freq. (MHz)	6025																				
Polarization	Horizontal-Average																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5916.60</td><td>44.47</td><td>68.20</td><td>-23.73</td><td>42.80</td><td>1.67</td><td>Average</td><td>180</td><td>358</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5916.60	44.47	68.20	-23.73	42.80	1.67	Average	180	358
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5916.60	44.47	68.20	-23.73	42.80	1.67	Average	180	358														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

Modulation	EHT160	Test Freq. (MHz)	6025																												
Polarization	Vertical-Peak																														
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																															
Level (dBuV/m) <table><tr><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5923.18</td><td>58.46</td><td>88.20</td><td>-29.74</td><td>56.79</td><td>1.67</td><td>Peak</td><td>241</td><td>212</td></tr></table>				Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5923.18	58.46	88.20	-29.74	56.79	1.67	Peak	241	212
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																							
1	5923.18	58.46	88.20	-29.74	56.79	1.67	Peak	241	212																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																															



Band Edge measurement


Appendix D

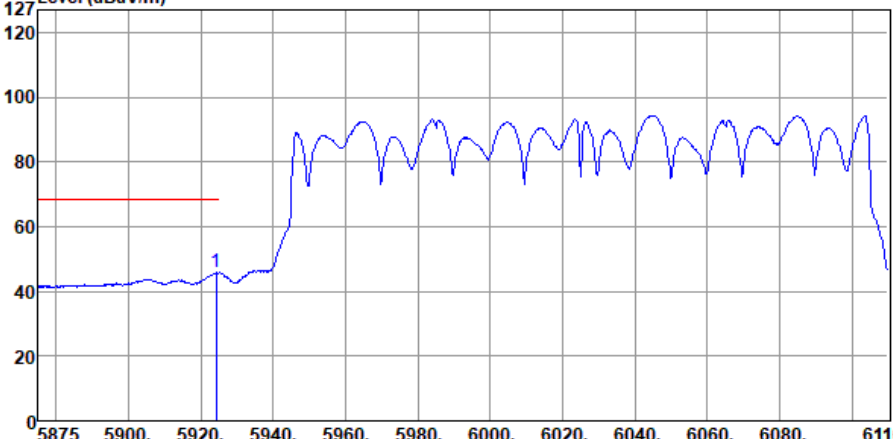Modulation	EHT160	Test Freq. (MHz)	6025																				
Polarization	Vertical-Average																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5924.12</td><td>45.97</td><td>68.20</td><td>-22.23</td><td>44.30</td><td>1.67</td><td>Average</td><td>241</td><td>212</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5924.12	45.97	68.20	-22.23	44.30	1.67	Average	241	212
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5924.12	45.97	68.20	-22.23	44.30	1.67	Average	241	212														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

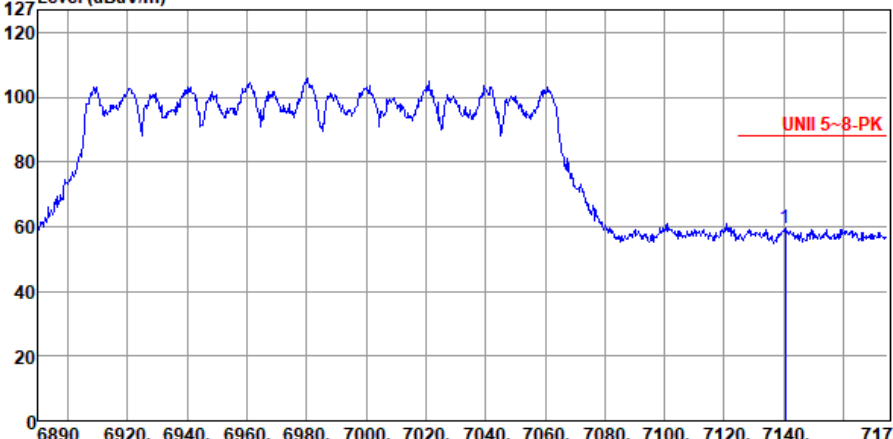Modulation	EHT160	Test Freq. (MHz)	6985																				
Polarization	Horizontal-Peak																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7140.52</td><td>59.54</td><td>88.20</td><td>-28.66</td><td>53.82</td><td>5.72</td><td>Peak</td><td>216</td><td>358</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7140.52	59.54	88.20	-28.66	53.82	5.72	Peak	216	358
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7140.52	59.54	88.20	-28.66	53.82	5.72	Peak	216	358														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

Modulation	EHT160	Test Freq. (MHz)	6985																				
Polarization	Horizontal-Average																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7141.37</td><td>48.46</td><td>68.20</td><td>-19.74</td><td>42.74</td><td>5.72</td><td>Average</td><td>216</td><td>358</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7141.37	48.46	68.20	-19.74	42.74	5.72	Average	216	358
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7141.37	48.46	68.20	-19.74	42.74	5.72	Average	216	358														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement


Appendix D

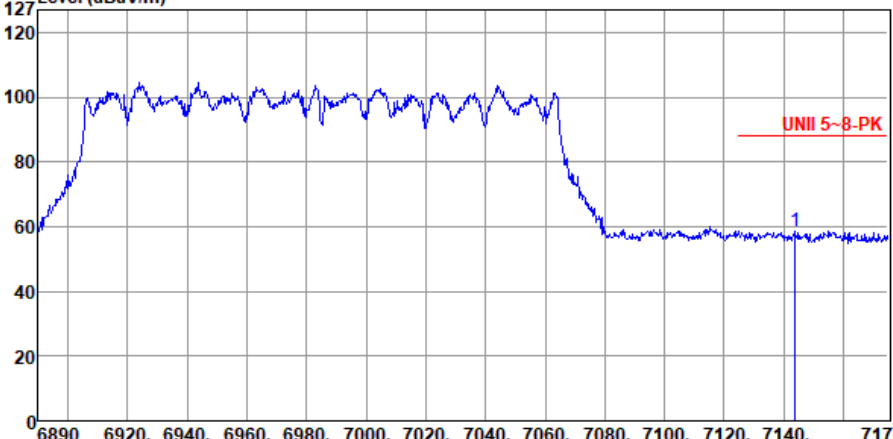Modulation	EHT160	Test Freq. (MHz)	6985																				
Polarization	Vertical-Peak																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7143.94</td><td>58.62</td><td>88.20</td><td>-29.58</td><td>52.88</td><td>5.74</td><td>Peak</td><td>223</td><td>326</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7143.94	58.62	88.20	-29.58	52.88	5.74	Peak	223	326
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7143.94	58.62	88.20	-29.58	52.88	5.74	Peak	223	326														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

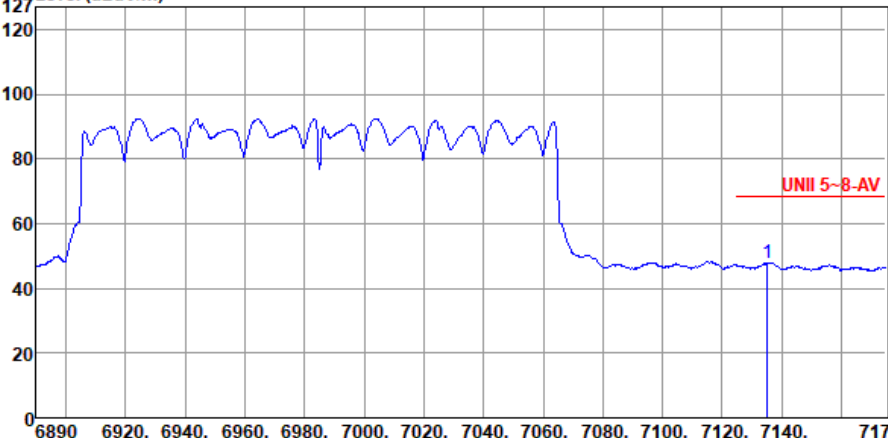Modulation	EHT160	Test Freq. (MHz)	6985																				
Polarization	Vertical-Average																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7135.10</td><td>47.99</td><td>68.20</td><td>-20.21</td><td>42.27</td><td>5.72</td><td>Average</td><td>223</td><td>326</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7135.10	47.99	68.20	-20.21	42.27	5.72	Average	223	326
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7135.10	47.99	68.20	-20.21	42.27	5.72	Average	223	326														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D

Modulation	EHT320	Test Freq. (MHz)	6105
Polarization	Horizontal-Peak		
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	EHT320	Test Freq. (MHz)	6105																				
Polarization	Horizontal-Average																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5918.00</td><td>47.14</td><td>68.20</td><td>-21.06</td><td>45.47</td><td>1.67</td><td>Average</td><td>181</td><td>357</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5918.00	47.14	68.20	-21.06	45.47	1.67	Average	181	357
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5918.00	47.14	68.20	-21.06	45.47	1.67	Average	181	357														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

Modulation	EHT320	Test Freq. (MHz)	6105
Polarization	Vertical-Peak		
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62			
Level (dBuV/m)			



Band Edge measurement


Appendix D

Modulation	EHT320	Test Freq. (MHz)	6105																				
Polarization	Vertical-Average																						
Test By :Brad Wu- Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5924.00</td><td>49.02</td><td>68.20</td><td>-19.18</td><td>47.35</td><td>1.67</td><td>Average</td><td>183</td><td>148</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5924.00	49.02	68.20	-19.18	47.35	1.67	Average	183	148
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5924.00	49.02	68.20	-19.18	47.35	1.67	Average	183	148														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

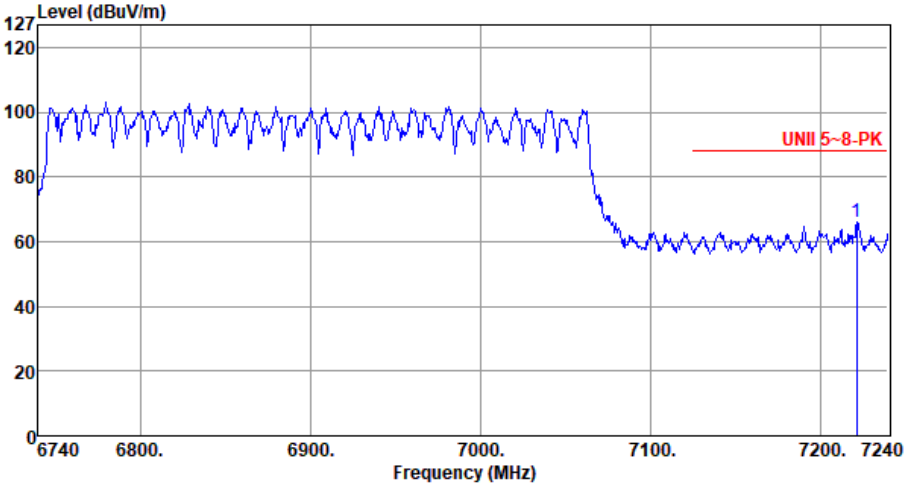Modulation	EHT320	Test Freq. (MHz)	6905																				
Polarization	Horizontal-Peak																						
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7221.50</td><td>66.27</td><td>88.20</td><td>-21.93</td><td>60.36</td><td>5.91</td><td>Peak</td><td>205</td><td>356</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7221.50	66.27	88.20	-21.93	60.36	5.91	Peak	205	356
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7221.50	66.27	88.20	-21.93	60.36	5.91	Peak	205	356														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

Modulation	EHT320	Test Freq. (MHz)	6905
Polarization	Horizontal-Average		
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62			
Level (dBuV/m) </			



Band Edge measurement


Appendix D

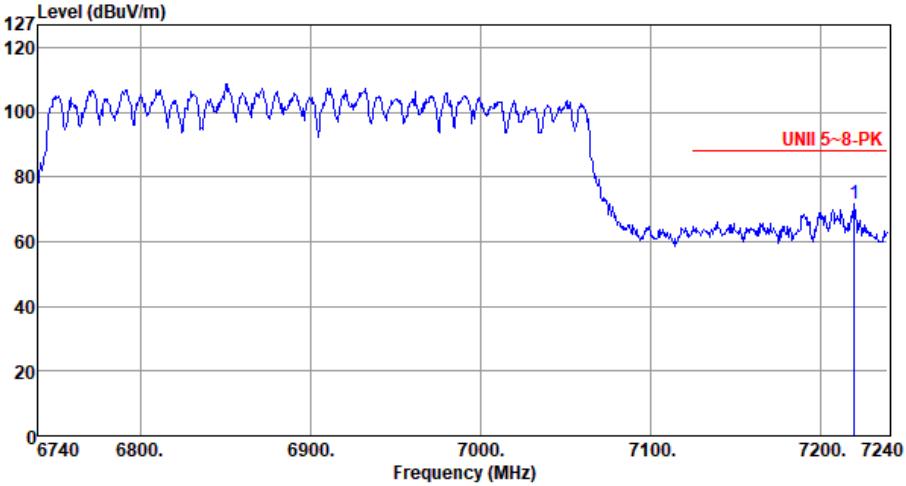Modulation	EHT320	Test Freq. (MHz)	6905																				
Polarization	Vertical-Peak																						
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7220.00</td><td>71.53</td><td>88.20</td><td>-16.67</td><td>65.62</td><td>5.91</td><td>Peak</td><td>167</td><td>7</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7220.00	71.53	88.20	-16.67	65.62	5.91	Peak	167	7
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7220.00	71.53	88.20	-16.67	65.62	5.91	Peak	167	7														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

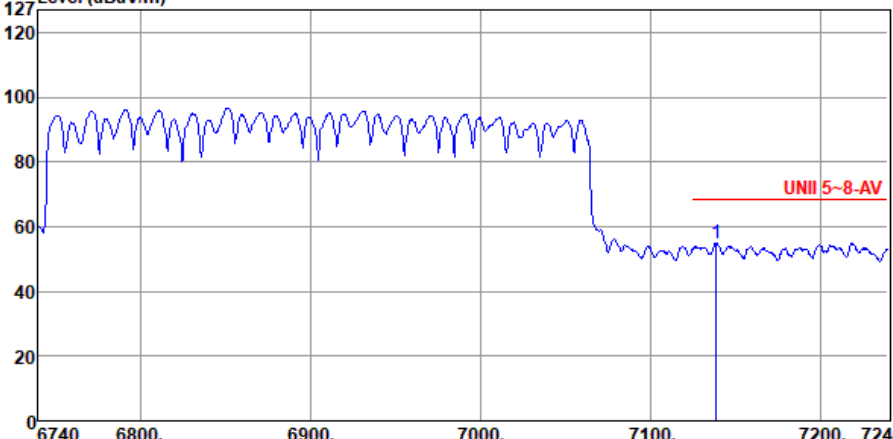Modulation	EHT320	Test Freq. (MHz)	6905																				
Polarization	Vertical-Average																						
Test By :Akun Chung_ Temperature(°C):21 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7139.00</td><td>55.05</td><td>68.20</td><td>-13.15</td><td>49.33</td><td>5.72</td><td>Average</td><td>167</td><td>7</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7139.00	55.05	68.20	-13.15	49.33	5.72	Average	167	7
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7139.00	55.05	68.20	-13.15	49.33	5.72	Average	167	7														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	5.96249G	-10.43	5.9951G	-59.06	-50.43	-8.63	2
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	6.408G	-5.87	6.3346G	-55.16	-45.87	-9.29	2
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	6.1498G	-6.40	6.3422G	-52.24	-46.40	-5.84	4
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	6.03059G	-1.86	6.293G	-42.45	-41.86	-0.59	4
802.11be EHT320_Nss1,(MCS0)_4TX	Pass	6.0922G	0.26	6.5466G	-41.24	-34.86	-6.38	4
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	6.42731G	-10.90	6.3851G	-60.31	-50.90	-9.41	2
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	6.42762G	-6.08	6.3666G	-55.30	-46.08	-9.22	2
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	6.45421G	-5.73	6.6202G	-52.57	-45.73	-6.84	4
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	6.88329G	-11.48	6.9236G	-60.00	-51.48	-8.52	3
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	6.85139G	-7.78	6.94G	-54.48	-47.78	-6.70	4
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	6.69901G	-6.96	6.893G	-51.20	-46.96	-4.24	4
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	6.51859G	-1.51	6.7674G	-44.03	-41.47	-2.56	4
802.11be EHT320_Nss1,(MCS0)_4TX	Pass	6.5722G	2.56	6.0698G	-41.97	-37.44	-4.53	1
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	7.10601G	-18.21	7.1626G	-60.67	-58.21	-2.46	3
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	7.01419G	-8.07	6.9312G	-55.08	-48.07	-7.01	4
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	6.91263G	-7.02	6.745G	-51.80	-47.02	-4.78	4
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	6.91227G	-2.73	6.7194G	-46.87	-42.73	-4.14	4

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.96299G	-7.75	5.9981G	-59.43	-47.75	-11.68	1
5955MHz	Pass	5.96249G	-10.43	5.9951G	-59.06	-50.43	-8.63	2
5955MHz	Pass	5.96419G	-11.06	5.993G	-60.16	-51.06	-9.10	3
5955MHz	Pass	5.96419G	-10.46	5.9912G	-60.07	-50.46	-9.61	4
6175MHz	Pass	6.16761G	-9.09	6.1307G	-60.10	-49.09	-11.01	1
6175MHz	Pass	6.1735G	-10.82	6.2138G	-60.21	-50.82	-9.39	2
6175MHz	Pass	6.18179G	-11.10	6.2135G	-60.57	-51.10	-9.47	3
6175MHz	Pass	6.18219G	-10.74	6.22G	-60.23	-50.74	-9.49	4
6415MHz	Pass	6.40651G	-9.06	6.3786G	-60.13	-49.06	-11.07	1
6415MHz	Pass	6.40871G	-10.42	6.3665G	-60.26	-50.42	-9.84	2
6415MHz	Pass	6.40581G	-10.59	6.3654G	-60.28	-50.59	-9.69	3
6415MHz	Pass	6.42359G	-10.33	6.3668G	-60.14	-50.33	-9.81	4
6435MHz	Pass	6.44339G	-9.04	6.4706G	-60.13	-49.04	-11.09	1
6435MHz	Pass	6.42731G	-10.90	6.3851G	-60.31	-50.90	-9.41	2
6435MHz	Pass	6.44389G	-10.77	6.3898G	-60.51	-50.77	-9.74	3
6435MHz	Pass	6.44339G	-10.36	6.3962G	-60.22	-50.36	-9.86	4
6475MHz	Pass	6.46661G	-9.02	6.5096G	-60.09	-49.02	-11.07	1
6475MHz	Pass	6.46761G	-10.63	6.4266G	-60.34	-50.63	-9.71	2
6475MHz	Pass	6.48329G	-10.69	6.4252G	-60.54	-50.69	-9.85	3
6475MHz	Pass	6.48389G	-10.22	6.4336G	-60.24	-50.22	-10.02	4
6515MHz	Pass	6.50611G	-9.45	6.4795G	-60.21	-49.40	-10.81	1
6515MHz	Pass	6.50751G	-10.81	6.4766G	-60.28	-50.81	-9.47	2
6515MHz	Pass	6.50731G	-11.22	6.4702G	-60.68	-51.22	-9.46	3
6515MHz	Pass	6.50621G	-10.88	6.4744G	-60.63	-50.88	-9.75	4
6535MHz	Pass	6.54399G	-9.04	6.4966G	-60.05	-49.04	-11.01	1
6535MHz	Pass	6.52741G	-10.32	6.4947G	-60.32	-50.32	-10.00	2
6535MHz	Pass	6.5306G	-10.93	6.4951G	-60.64	-50.93	-9.71	3
6535MHz	Pass	6.54379G	-10.16	6.4943G	-60.21	-50.16	-10.05	4
6715MHz	Pass	6.72239G	-9.79	6.7538G	-61.04	-49.79	-11.25	1
6715MHz	Pass	6.70621G	-11.33	6.758G	-61.15	-51.33	-9.82	2
6715MHz	Pass	6.70571G	-12.00	6.763G	-61.16	-52.00	-9.16	3
6715MHz	Pass	6.72269G	-11.50	6.7594G	-61.12	-51.50	-9.62	4
6855MHz	Pass	6.84771G	-8.37	6.9031G	-59.84	-48.37	-11.47	1
6855MHz	Pass	6.86409G	-10.97	6.9012G	-59.98	-50.97	-9.01	2
6855MHz	Pass	6.84671G	-11.47	6.9048G	-60.24	-51.47	-8.77	3
6855MHz	Pass	6.86359G	-11.66	6.8967G	-60.26	-51.66	-8.60	4
6875MHz Straddle 6.525-6.875GHz	Pass	6.86801G	-8.17	6.9188G	-59.56	-48.17	-11.39	1
6875MHz Straddle 6.525-6.875GHz	Pass	6.88399G	-11.04	6.9175G	-59.69	-51.04	-8.65	2
6875MHz Straddle 6.525-6.875GHz	Pass	6.88329G	-11.48	6.9236G	-60.00	-51.48	-8.52	3
6875MHz Straddle 6.525-6.875GHz	Pass	6.88249G	-11.54	6.9234G	-60.08	-51.54	-8.54	4
6895MHz	Pass	6.88641G	-8.16	6.9382G	-59.60	-48.16	-11.44	1

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6895MHz	Pass	6.88581G	-11.00	6.9398G	-59.74	-51.00	-8.74	2
6895MHz	Pass	6.88751G	-11.59	6.9421G	-60.12	-51.59	-8.53	3
6895MHz	Pass	6.88711G	-11.42	6.9385G	-60.20	-51.42	-8.78	4
7015MHz	Pass	7.0106G	-7.91	6.9754G	-59.74	-47.91	-11.83	1
7015MHz	Pass	7.02269G	-11.55	6.9787G	-59.95	-51.55	-8.40	2
7015MHz	Pass	7.02379G	-10.44	6.9675G	-60.21	-50.44	-9.77	3
7015MHz	Pass	7.00581G	-11.03	6.9688G	-60.31	-51.03	-9.28	4
7095MHz	Pass	7.08601G	-9.45	7.1306G	-60.22	-49.45	-10.77	1
7095MHz	Pass	7.08611G	-10.15	7.1426G	-60.25	-50.15	-10.10	2
7095MHz	Pass	7.10239G	-11.03	7.1417G	-60.56	-51.03	-9.53	3
7095MHz	Pass	7.08741G	-10.41	7.1324G	-60.71	-50.41	-10.30	4
7115MHz	Pass	7.10641G	-15.98	7.1627G	-60.64	-55.98	-4.66	1
7115MHz	Pass	7.10631G	-17.89	7.1606G	-60.75	-57.89	-2.86	2
7115MHz	Pass	7.10601G	-18.21	7.1626G	-60.67	-58.21	-2.46	3
7115MHz	Pass	7.10621G	-17.95	7.1637G	-60.74	-57.95	-2.79	4
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.98218G	-2.07	6.0332G	-53.70	-42.07	-11.63	1
5965MHz	Pass	5.98298G	-4.92	6.035G	-55.01	-44.92	-10.09	2
5965MHz	Pass	5.98078G	-5.65	6.043G	-55.01	-45.65	-9.36	3
5965MHz	Pass	5.98138G	-5.06	6.062G	-54.89	-45.06	-9.83	4
6165MHz	Pass	6.18298G	-3.64	6.2342G	-54.88	-43.64	-11.24	1
6165MHz	Pass	6.18238G	-5.51	6.255G	-55.22	-45.51	-9.71	2
6165MHz	Pass	6.18198G	-5.76	6.0882G	-55.14	-45.76	-9.38	3
6165MHz	Pass	6.17199G	-5.64	6.071G	-55.05	-45.64	-9.41	4
6405MHz	Pass	6.38742G	-4.36	6.3264G	-54.90	-44.36	-10.54	1
6405MHz	Pass	6.408G	-5.87	6.3346G	-55.16	-45.87	-9.29	2
6405MHz	Pass	6.38762G	-5.82	6.3282G	-55.17	-45.82	-9.35	3
6405MHz	Pass	6.42278G	-5.65	6.3128G	-55.08	-45.65	-9.43	4
6445MHz	Pass	6.46198G	-4.29	6.3486G	-55.07	-44.29	-10.78	1
6445MHz	Pass	6.42762G	-6.08	6.3666G	-55.30	-46.08	-9.22	2
6445MHz	Pass	6.46298G	-6.04	6.3656G	-55.27	-46.04	-9.23	3
6445MHz	Pass	6.46258G	-5.82	6.3468G	-55.19	-45.82	-9.37	4
6485MHz	Pass	6.50258G	-4.22	6.4096G	-55.05	-44.22	-10.83	1
6485MHz	Pass	6.46702G	-5.97	6.3978G	-55.26	-45.97	-9.29	2
6485MHz	Pass	6.46862G	-5.99	6.398G	-55.27	-45.99	-9.28	3
6485MHz	Pass	6.47821G	-5.83	6.3996G	-55.24	-45.83	-9.41	4
6525MHz Straddle 6.525-6.875GHz	Pass	6.50682G	-4.29	6.4498G	-55.08	-44.29	-10.79	1
6525MHz Straddle 6.525-6.875GHz	Pass	6.5206G	-5.83	6.4564G	-55.29	-45.83	-9.46	2
6525MHz Straddle 6.525-6.875GHz	Pass	6.50822G	-6.05	6.4364G	-55.31	-46.05	-9.26	3
6525MHz Straddle 6.525-6.875GHz	Pass	6.51861G	-5.63	6.4298G	-55.30	-45.63	-9.67	4
6565MHz	Pass	6.58218G	-4.72	6.4916G	-55.17	-44.72	-10.45	1
6565MHz	Pass	6.55061G	-6.56	6.488G	-55.42	-46.56	-8.86	2

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6565MHz	Pass	6.58118G	-7.22	6.4934G	-55.33	-47.22	-8.11	3
6565MHz	Pass	6.57839G	-6.64	6.4712G	-55.37	-46.64	-8.73	4
6725MHz	Pass	6.7284G	-4.96	6.8158G	-55.26	-44.96	-10.30	1
6725MHz	Pass	6.70782G	-7.15	6.8226G	-55.56	-47.15	-8.41	2
6725MHz	Pass	6.7228G	-7.28	6.8158G	-55.50	-47.28	-8.22	3
6725MHz	Pass	6.71861G	-7.05	6.821G	-55.46	-47.05	-8.41	4
6845MHz	Pass	6.86018G	-4.15	6.9392G	-54.30	-44.15	-10.15	1
6845MHz	Pass	6.83601G	-7.10	6.9244G	-54.51	-47.10	-7.41	2
6845MHz	Pass	6.86218G	-7.06	6.9446G	-54.44	-47.06	-7.38	3
6845MHz	Pass	6.85139G	-7.78	6.94G	-54.48	-47.78	-6.70	4
6885MHz Straddle 6.525-6.875GHz	Pass	6.86762G	-3.28	6.9724G	-53.87	-43.28	-10.59	1
6885MHz Straddle 6.525-6.875GHz	Pass	6.89399G	-6.76	6.9794G	-54.13	-46.76	-7.37	2
6885MHz Straddle 6.525-6.875GHz	Pass	6.86722G	-6.55	6.984G	-54.06	-46.55	-7.51	3
6885MHz Straddle 6.525-6.875GHz	Pass	6.89299G	-7.02	6.9758G	-54.16	-47.02	-7.14	4
6925MHz	Pass	6.90862G	-3.53	7.0096G	-53.91	-43.53	-10.38	1
6925MHz	Pass	6.91661G	-6.82	7.0086G	-54.10	-46.82	-7.28	2
6925MHz	Pass	6.90742G	-6.70	7.0096G	-54.14	-46.70	-7.44	3
6925MHz	Pass	6.90782G	-7.00	7.0094G	-54.23	-47.00	-7.23	4
7005MHz	Pass	6.98742G	-3.63	6.9352G	-54.69	-43.63	-11.06	1
7005MHz	Pass	6.99641G	-7.54	6.936G	-55.01	-47.54	-7.47	2
7005MHz	Pass	6.98822G	-6.35	6.9282G	-54.88	-46.35	-8.53	3
7005MHz	Pass	7.01419G	-8.07	6.9312G	-55.08	-48.07	-7.01	4
7085MHz	Pass	7.06742G	-4.65	7.0026G	-54.64	-44.65	-9.99	1
7085MHz	Pass	7.07581G	-6.00	7.179G	-54.72	-46.00	-8.72	2
7085MHz	Pass	7.06882G	-6.20	7.1814G	-54.90	-46.20	-8.70	3
7085MHz	Pass	7.07401G	-5.87	7.183G	-54.70	-45.87	-8.83	4
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.02256G	-3.20	6.031G	-34.31	-23.22	-11.09	1
5985MHz	Pass	6.02256G	-6.34	6.0302G	-35.56	-26.36	-9.20	2
5985MHz	Pass	6.02216G	-6.58	6.0318G	-38.04	-26.63	-11.41	3
5985MHz	Pass	6.02016G	-6.03	6.1742G	-52.26	-46.03	-6.23	4
6145MHz	Pass	6.1474G	-4.78	6.0986G	-35.66	-24.81	-10.85	1
6145MHz	Pass	6.13861G	-6.42	6.191G	-36.85	-26.48	-10.37	2
6145MHz	Pass	6.13301G	-6.76	6.1914G	-37.54	-26.81	-10.73	3
6145MHz	Pass	6.1498G	-6.40	6.3422G	-52.24	-46.40	-5.84	4
6385MHz	Pass	6.3822G	-4.58	6.3386G	-35.80	-24.59	-11.21	1
6385MHz	Pass	6.41657G	-6.04	6.3382G	-37.49	-26.11	-11.38	2
6385MHz	Pass	6.34784G	-6.36	6.3386G	-36.91	-25.76	-11.15	3
6385MHz	Pass	6.34744G	-5.91	6.563G	-52.69	-45.91	-6.78	4
6465MHz	Pass	6.47459G	-4.36	6.511G	-35.08	-24.36	-10.72	1
6465MHz	Pass	6.43383G	-5.92	6.4182G	-37.14	-25.97	-11.17	2
6465MHz	Pass	6.47579G	-6.03	6.5118G	-37.71	-26.06	-11.65	3

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6465MHz	Pass	6.45421G	-5.73	6.6202G	-52.57	-45.73	-6.84	4
6545MHz Straddle 6.525-6.875GHz	Pass	6.58096G	-4.86	6.4986G	-35.68	-24.89	-10.79	1
6545MHz Straddle 6.525-6.875GHz	Pass	6.51303G	-6.23	6.4994G	-35.96	-26.24	-9.72	2
6545MHz Straddle 6.525-6.875GHz	Pass	6.57537G	-6.51	6.5918G	-38.17	-26.58	-11.59	3
6545MHz Straddle 6.525-6.875GHz	Pass	6.5474G	-6.12	6.7358G	-53.12	-46.12	-7.00	4
6625MHz	Pass	6.58704G	-5.06	6.5786G	-36.24	-25.11	-11.13	1
6625MHz	Pass	6.59703G	-6.73	6.5778G	-38.96	-26.75	-12.21	2
6625MHz	Pass	6.623G	-6.99	6.5774G	-39.89	-27.04	-12.85	3
6625MHz	Pass	6.58864G	-6.64	6.817G	-53.62	-46.64	-6.98	4
6705MHz	Pass	6.72618G	-5.30	6.6586G	-36.41	-25.35	-11.06	1
6705MHz	Pass	6.69861G	-7.02	6.6598G	-36.27	-27.04	-9.23	2
6705MHz	Pass	6.74096G	-7.22	6.659G	-37.90	-27.22	-10.68	3
6705MHz	Pass	6.69901G	-6.96	6.893G	-51.20	-46.96	-4.24	4
6785MHz	Pass	6.75743G	-5.33	6.7382G	-36.91	-25.34	-11.57	1
6785MHz	Pass	6.77661G	-6.73	6.7394G	-36.72	-26.78	-9.94	2
6785MHz	Pass	6.74744G	-7.25	6.8318G	-38.64	-27.30	-11.34	3
6785MHz	Pass	6.74864G	-7.28	6.9718G	-51.63	-47.28	-4.35	4
6865MHz Straddle 6.525-6.875GHz	Pass	6.85821G	-4.05	6.8186G	-34.73	-24.06	-10.67	1
6865MHz Straddle 6.525-6.875GHz	Pass	6.87579G	-6.78	6.8182G	-38.63	-26.81	-11.82	2
6865MHz Straddle 6.525-6.875GHz	Pass	6.8602G	-6.84	6.9118G	-38.70	-26.91	-11.79	3
6865MHz Straddle 6.525-6.875GHz	Pass	6.87819G	-7.21	7.057G	-53.74	-47.21	-6.53	4
6945MHz	Pass	6.90904G	-4.07	6.899G	-34.59	-24.07	-10.52	1
6945MHz	Pass	6.95299G	-7.02	6.9906G	-37.16	-27.07	-10.09	2
6945MHz	Pass	6.90784G	-6.89	6.8978G	-38.78	-26.89	-11.89	3
6945MHz	Pass	6.91263G	-7.02	6.745G	-51.80	-47.02	-4.78	4
7025MHz	Pass	7.0202G	-4.90	6.979G	-35.56	-24.90	-10.66	1
7025MHz	Pass	6.99383G	-6.44	6.9786G	-37.53	-26.47	-11.06	2
7025MHz	Pass	7.00662G	-6.82	6.9786G	-37.94	-26.85	-11.09	3
7025MHz	Pass	7.01501G	-6.11	6.8326G	-53.75	-46.11	-7.64	4
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.03219G	0.76	6.2994G	-44.06	-39.24	-4.82	1
6025MHz	Pass	6.03299G	-2.39	6.293G	-49.86	-42.39	-7.47	2
6025MHz	Pass	6.03619G	-2.43	6.2986G	-48.30	-42.43	-5.87	3
6025MHz	Pass	6.03059G	-1.86	6.293G	-42.45	-41.86	-0.59	4
6185MHz	Pass	6.25213G	-0.87	6.4634G	-47.36	-40.87	-6.49	1
6185MHz	Pass	6.25693G	-2.28	6.4546G	-51.16	-42.28	-8.88	2
6185MHz	Pass	6.26092G	-2.81	6.4522G	-49.12	-42.81	-6.31	3
6185MHz	Pass	6.19059G	-2.40	6.4506G	-43.49	-42.40	-1.09	4
6345MHz	Pass	6.3402G	-1.60	6.613G	-49.77	-41.60	-8.17	1
6345MHz	Pass	6.33461G	-2.71	6.0698G	-52.09	-42.71	-9.38	2
6345MHz	Pass	6.33701G	-3.17	6.6098G	-50.25	-43.17	-7.08	3
6345MHz	Pass	6.32742G	-2.60	6.6146G	-44.44	-42.60	-1.84	4


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6505MHz Straddle 6.525-6.875GHz	Pass	6.49861G	-0.23	6.773G	-48.96	-40.23	-8.73	1
6505MHz Straddle 6.525-6.875GHz	Pass	6.5002G	-1.91	6.2402G	-50.65	-41.91	-8.74	2
6505MHz Straddle 6.525-6.875GHz	Pass	6.49461G	-2.07	6.7722G	-49.74	-42.07	-7.67	3
6505MHz Straddle 6.525-6.875GHz	Pass	6.51859G	-1.51	6.7674G	-44.03	-41.47	-2.56	4
6665MHz	Pass	6.59547G	-1.11	6.933G	-49.89	-41.11	-8.78	1
6665MHz	Pass	6.65941G	-2.79	6.397G	-51.62	-42.79	-8.83	2
6665MHz	Pass	6.60186G	-2.91	6.933G	-50.17	-42.91	-7.26	3
6665MHz	Pass	6.59707G	-2.47	6.9298G	-45.19	-42.47	-2.72	4
6825MHz Straddle 6.525-6.875GHz	Pass	6.75707G	0.00	7.0922G	-49.35	-40.00	-9.35	1
6825MHz Straddle 6.525-6.875GHz	Pass	6.75707G	-2.93	6.5546G	-51.84	-42.93	-8.91	2
6825MHz Straddle 6.525-6.875GHz	Pass	6.76106G	-2.59	7.097G	-50.53	-42.59	-7.94	3
6825MHz Straddle 6.525-6.875GHz	Pass	6.75467G	-3.46	7.0914G	-46.34	-43.46	-2.88	4
6985MHz	Pass	6.91067G	0.59	6.717G	-47.71	-39.41	-8.30	1
6985MHz	Pass	6.91307G	-2.81	6.7234G	-51.68	-42.81	-8.87	2
6985MHz	Pass	6.90908G	-2.34	7.2618G	-50.98	-42.34	-8.64	3
6985MHz	Pass	6.91227G	-2.73	6.7194G	-46.87	-42.73	-4.14	4
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.2505G	2.17	6.6314G	-45.01	-37.83	-7.18	1
6105MHz	Pass	6.2345G	0.21	6.6154G	-48.73	-39.79	-8.94	2
6105MHz	Pass	6.073G	0.03	6.6202G	-47.44	-39.97	-7.47	3
6105MHz	Pass	6.0922G	0.26	6.5466G	-41.24	-34.86	-6.38	4
6265MHz	Pass	6.273G	1.39	6.6458G	-37.05	-29.31	-7.74	1
6265MHz	Pass	6.2762G	-0.44	6.7738G	-50.52	-40.44	-10.08	2
6265MHz	Pass	6.2874G	-0.82	6.7818G	-50.98	-40.82	-10.16	3
6265MHz	Pass	6.3114G	-0.43	6.7066G	-43.01	-35.63	-7.38	4
6425MHz Straddle 5.925-6.425GHz	Pass	6.4538G	1.44	6.0298G	-37.21	-30.06	-7.15	1
6425MHz Straddle 5.925-6.425GHz	Pass	6.4314G	0.25	6.0234G	-40.75	-31.98	-8.77	2
6425MHz Straddle 5.925-6.425GHz	Pass	6.2827G	-0.10	6.0298G	-39.47	-31.74	-7.73	3
6425MHz Straddle 5.925-6.425GHz	Pass	6.4394G	-0.01	6.0106G	-40.52	-32.99	-7.53	4
6585MHz Straddle 6.525-6.875GHz	Pass	6.5722G	2.56	6.0698G	-41.97	-37.44	-4.53	1
6585MHz Straddle 6.525-6.875GHz	Pass	6.4539G	0.45	6.1834G	-40.90	-31.78	-9.12	2
6585MHz Straddle 6.525-6.875GHz	Pass	6.5754G	-0.26	6.065G	-48.72	-40.26	-8.46	3
6585MHz Straddle 6.525-6.875GHz	Pass	6.5786G	0.46	6.0714G	-47.34	-39.46	-7.88	4
6745MHz Straddle 6.525-6.875GHz	Pass	6.7274G	1.59	6.2282G	-45.48	-38.41	-7.07	1
6745MHz Straddle 6.525-6.875GHz	Pass	6.5963G	-0.15	6.3354G	-41.66	-33.02	-8.64	2
6745MHz Straddle 6.525-6.875GHz	Pass	6.5963G	-0.52	6.3274G	-42.82	-33.95	-8.87	3
6745MHz Straddle 6.525-6.875GHz	Pass	6.5963G	-0.33	6.3018G	-42.99	-35.40	-7.59	4
6905MHz Straddle 6.525-6.875GHz	Pass	6.7532G	0.97	6.3706G	-45.79	-39.03	-6.76	1
6905MHz Straddle 6.525-6.875GHz	Pass	6.8938G	-2.59	6.393G	-52.47	-42.59	-9.88	2
6905MHz Straddle 6.525-6.875GHz	Pass	6.8874G	-2.45	6.3722G	-51.13	-42.45	-8.68	3
6905MHz Straddle 6.525-6.875GHz	Pass	6.897G	-2.88	6.3802G	-50.72	-42.88	-7.84	4



5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


5955MHz_TX

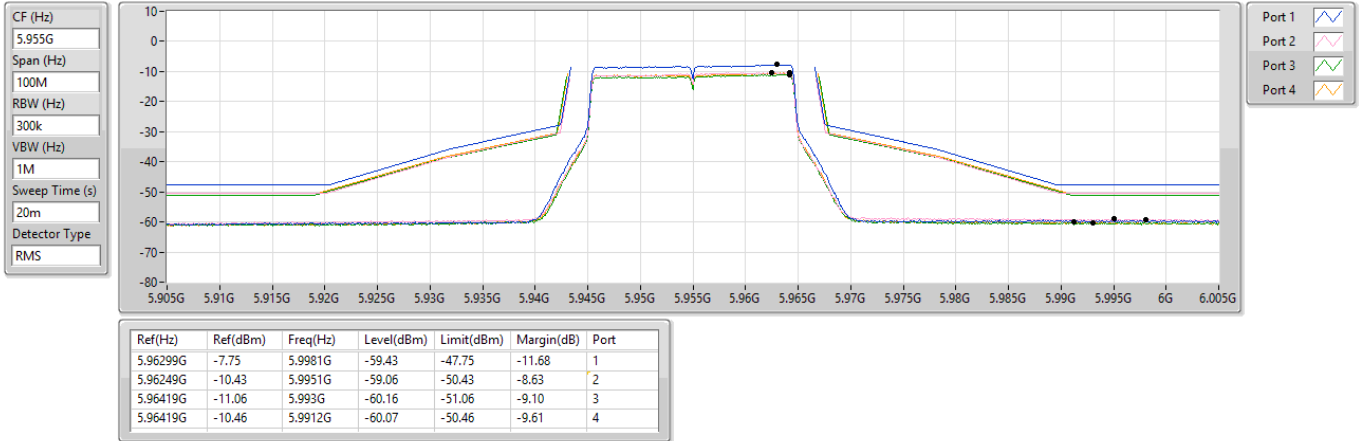

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6175MHz_TX

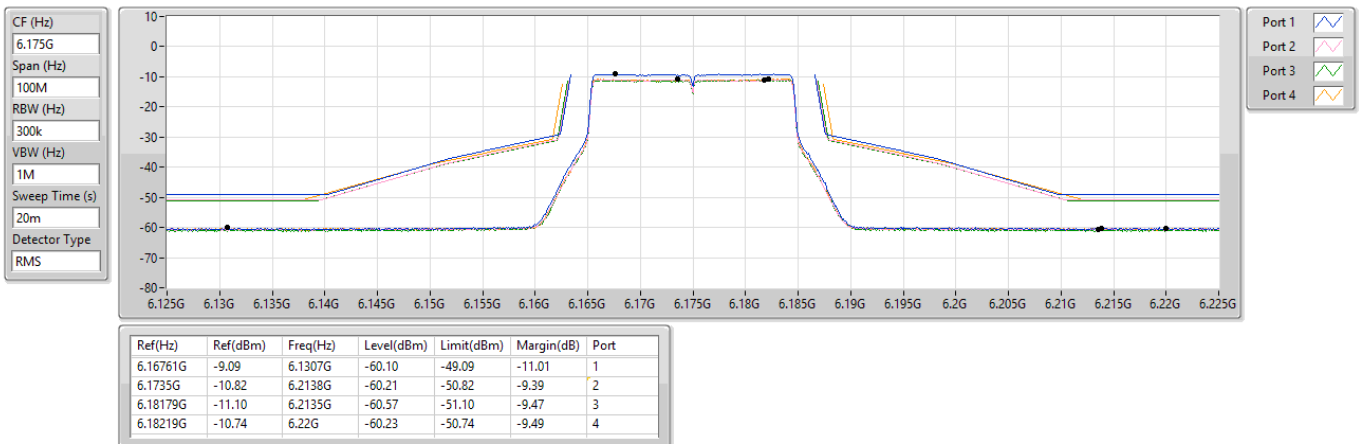

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6415MHz_TX

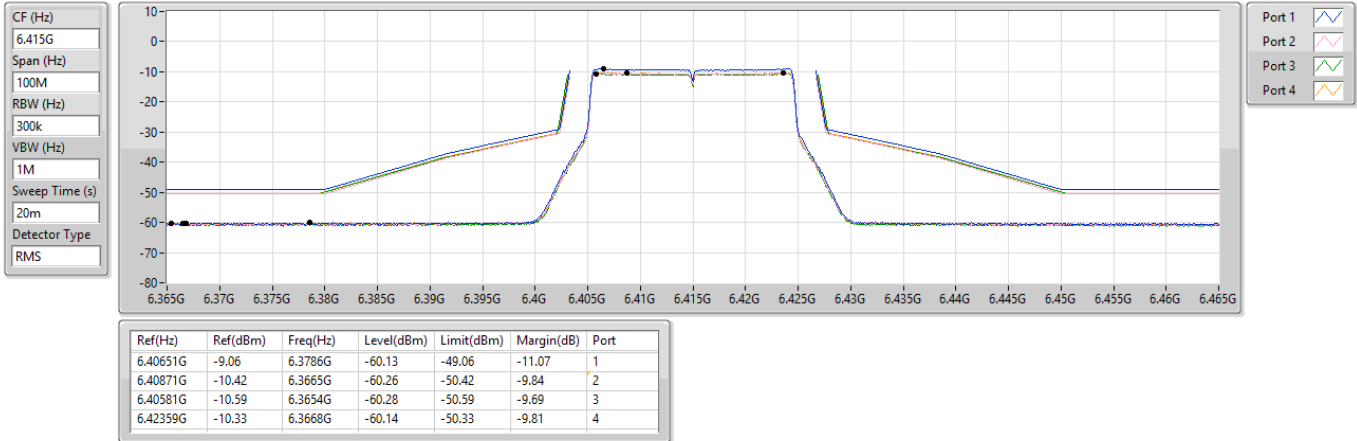

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK

6435MHz_TX

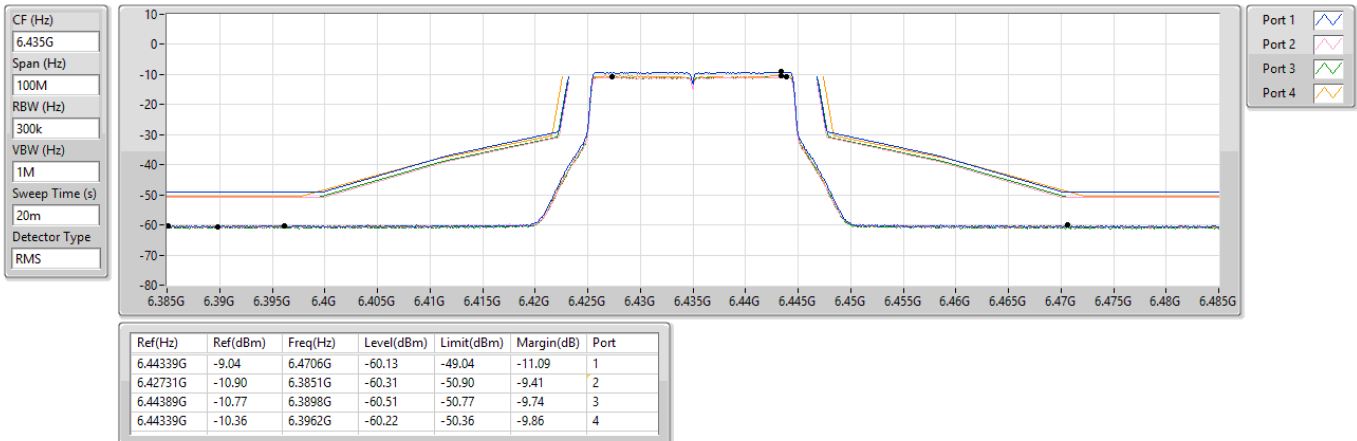




6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6475MHz_TX

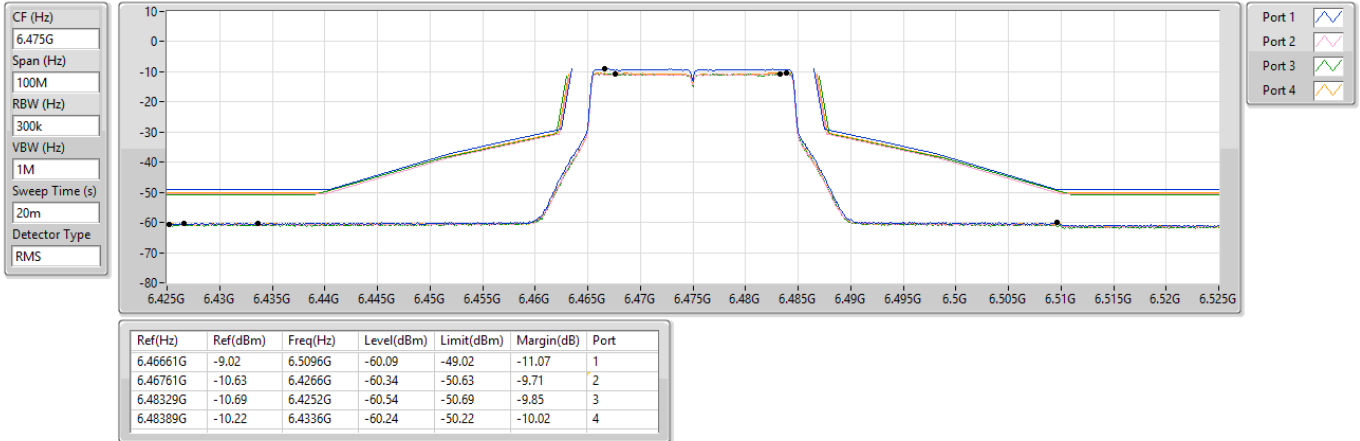

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK

6515MHz_TX

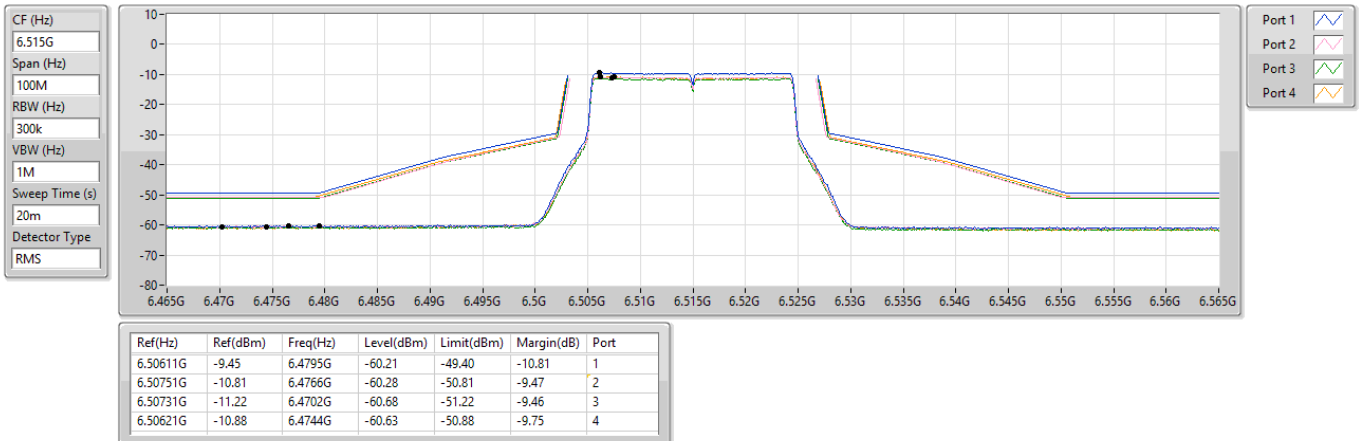




6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6535MHz_TX

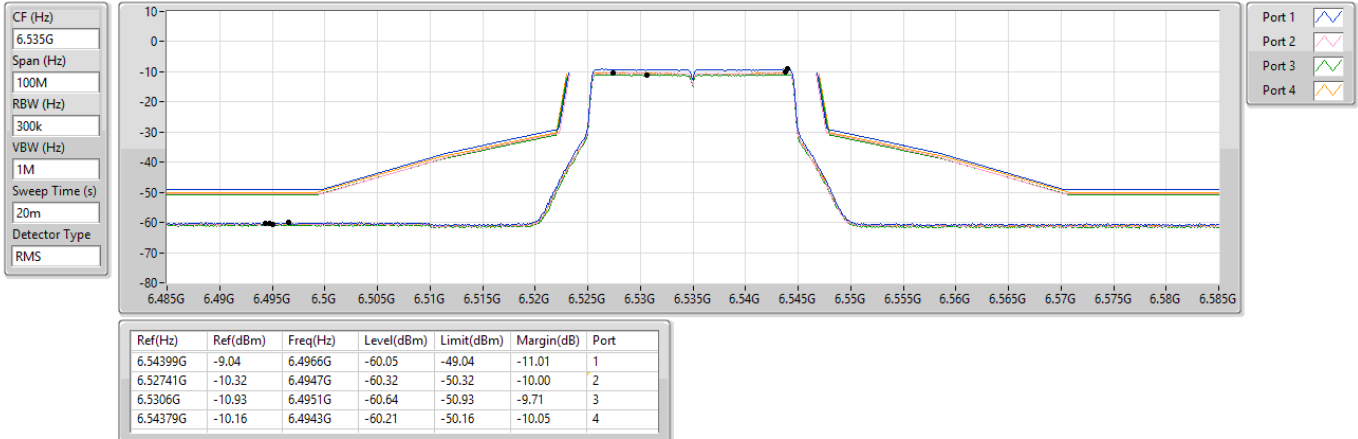

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6715MHz_TX

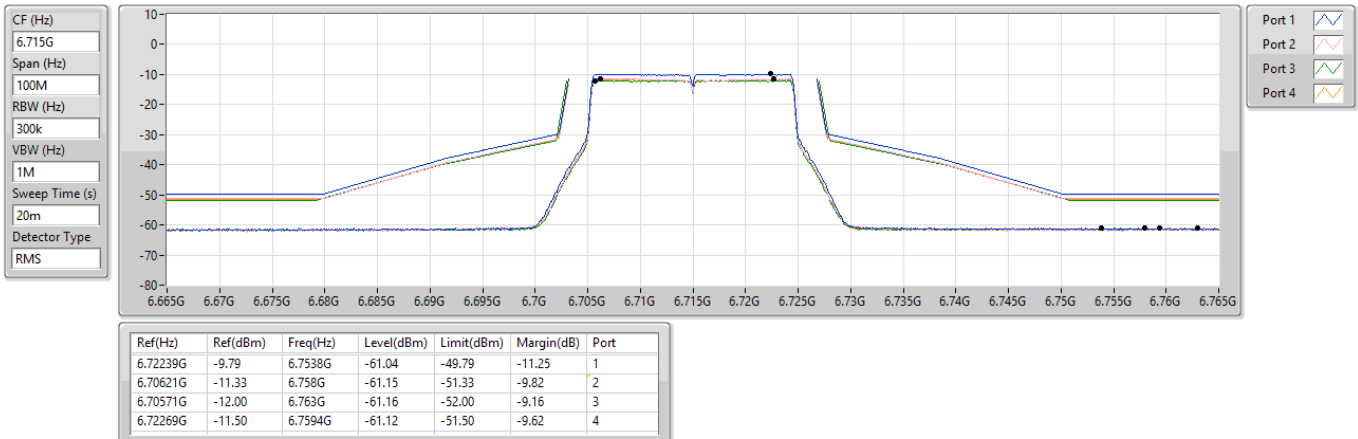

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6855MHz_TX

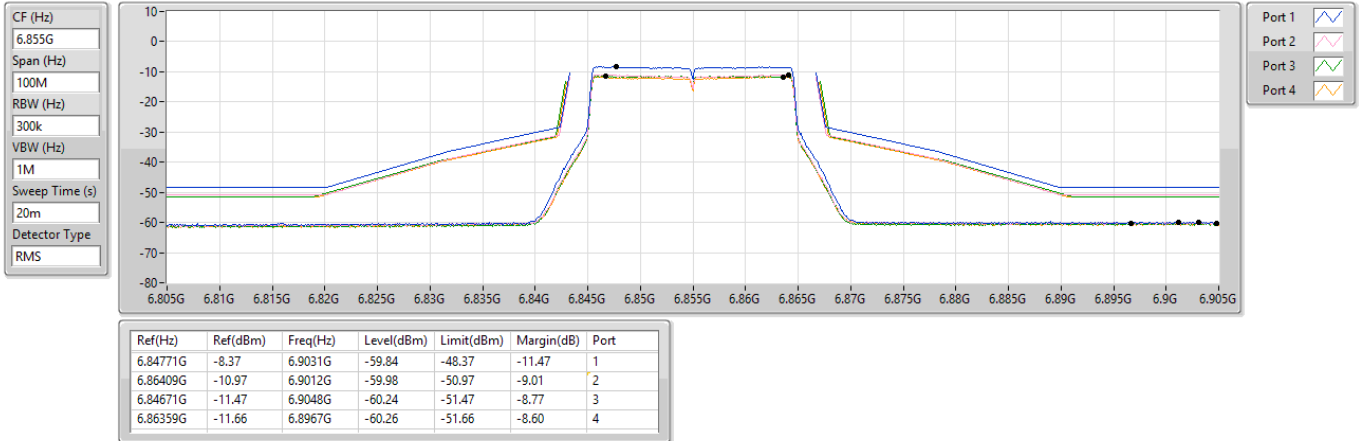

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK

6875MHz Straddle 6.525-6.875GHz_TX

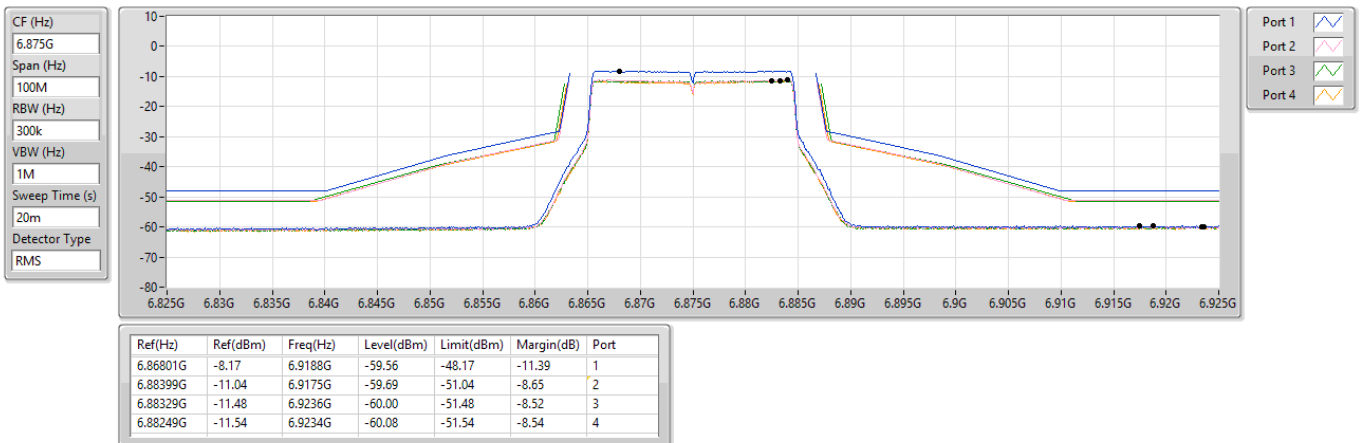




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6895MHz_TX

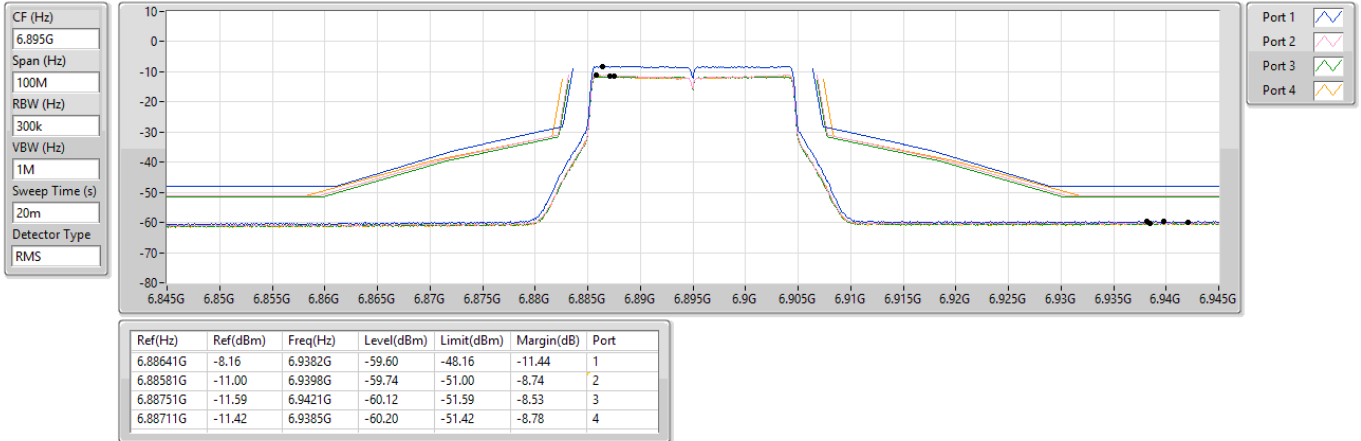

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


7015MHz_TX

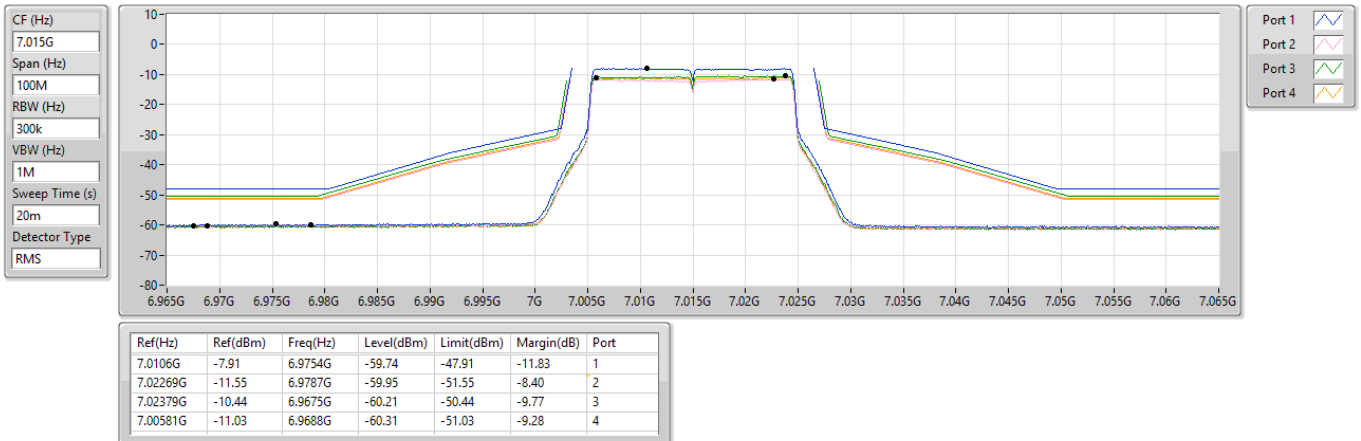

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


7095MHz_TX

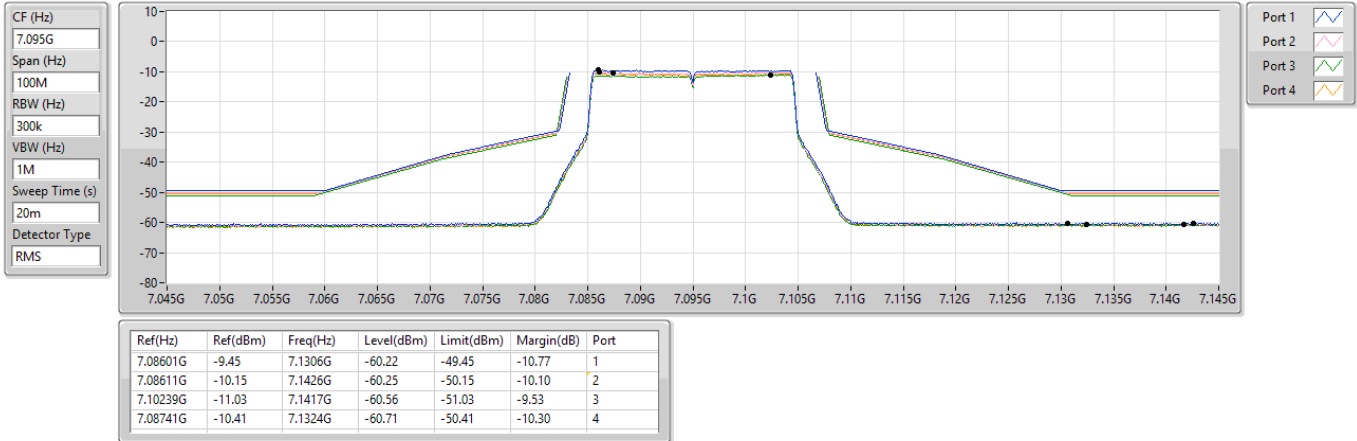

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


7115MHz_TX

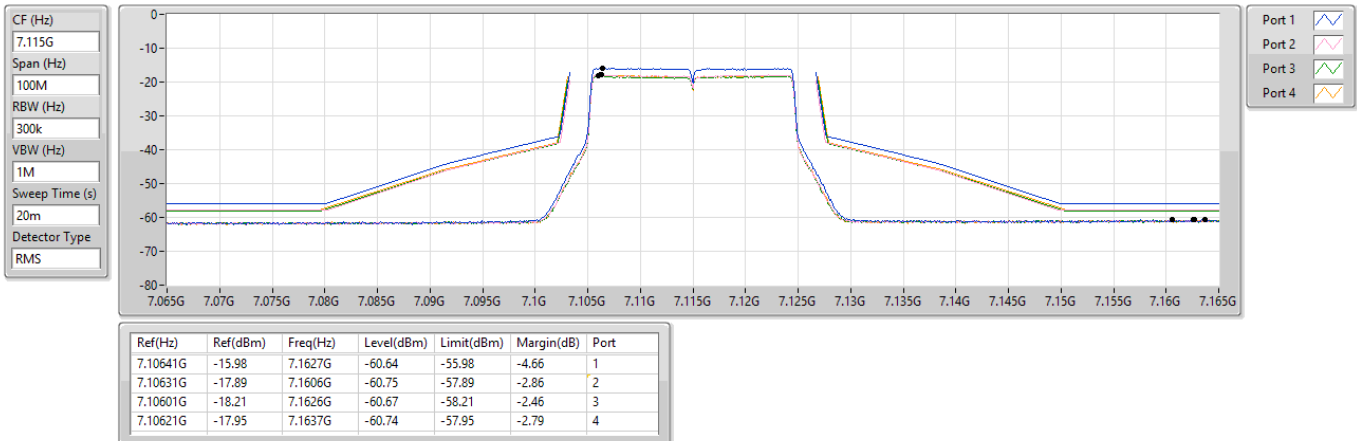

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


5965MHz_TX

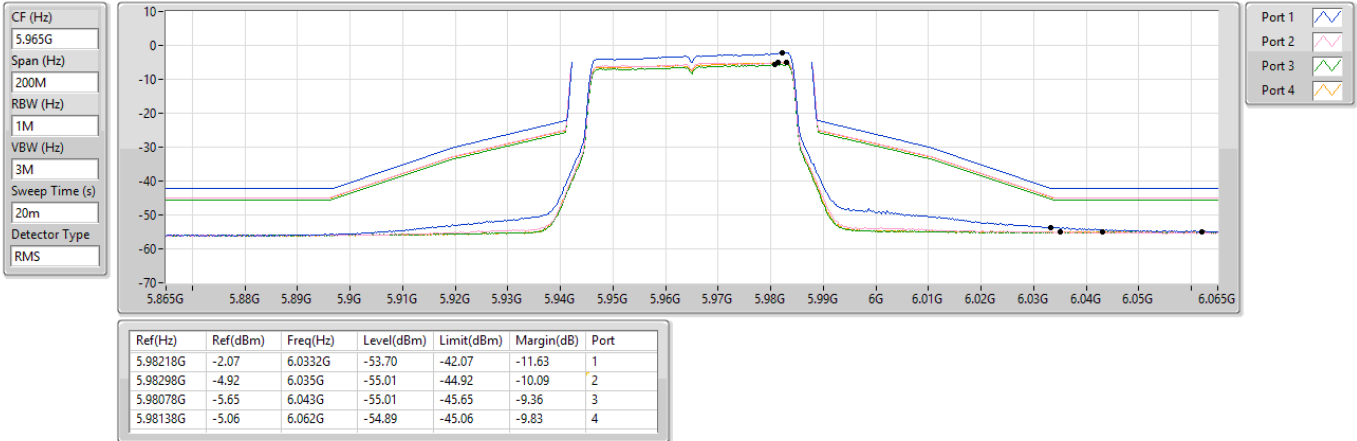

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6165MHz_TX

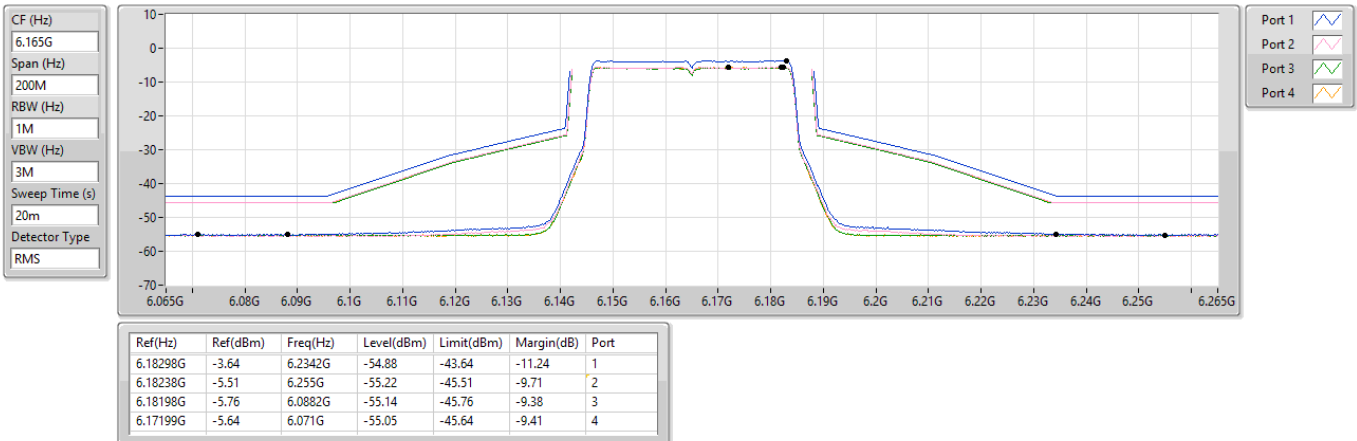

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6405MHz_TX

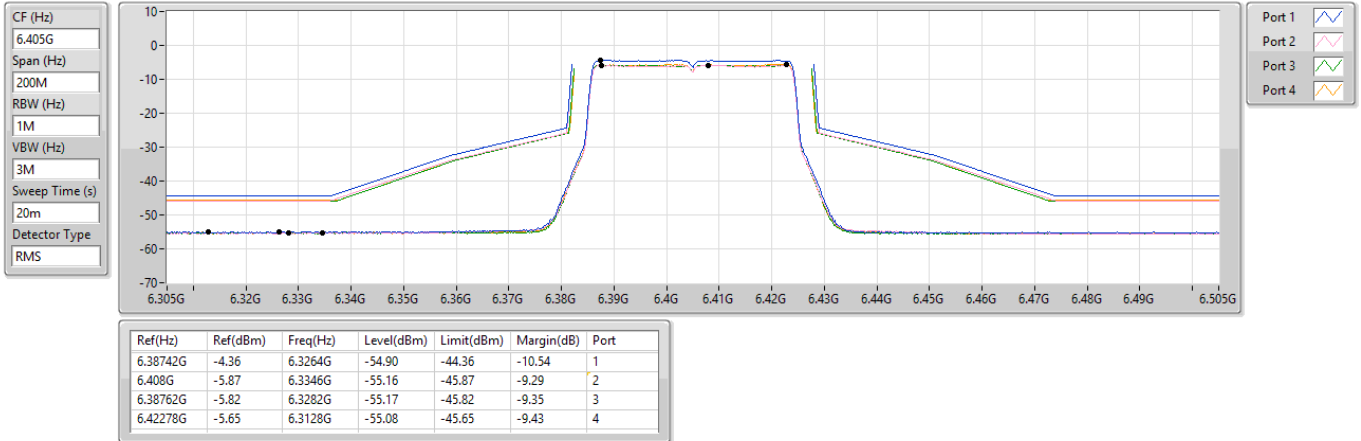

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6445MHz_TX

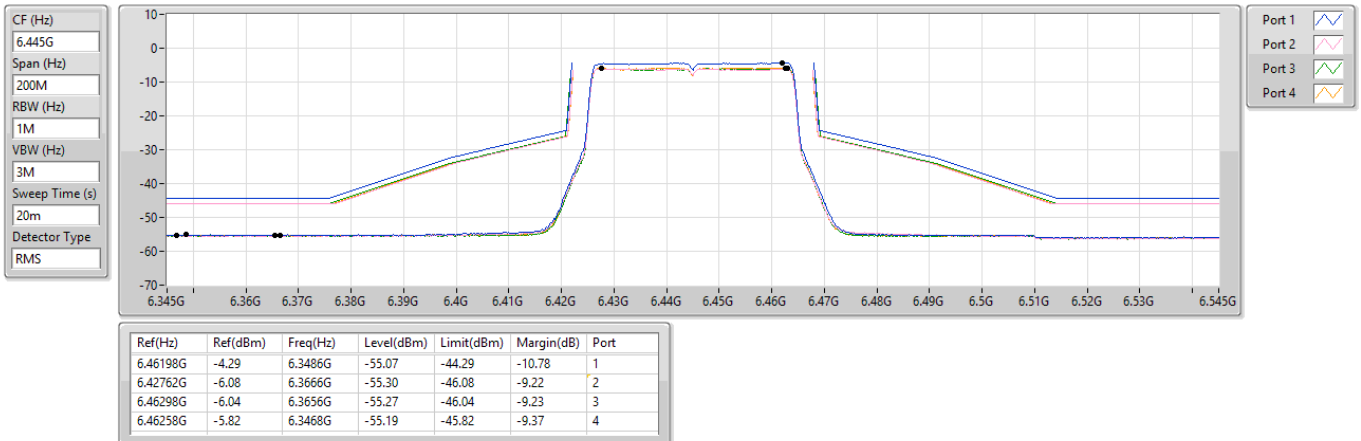

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6485MHz_TX

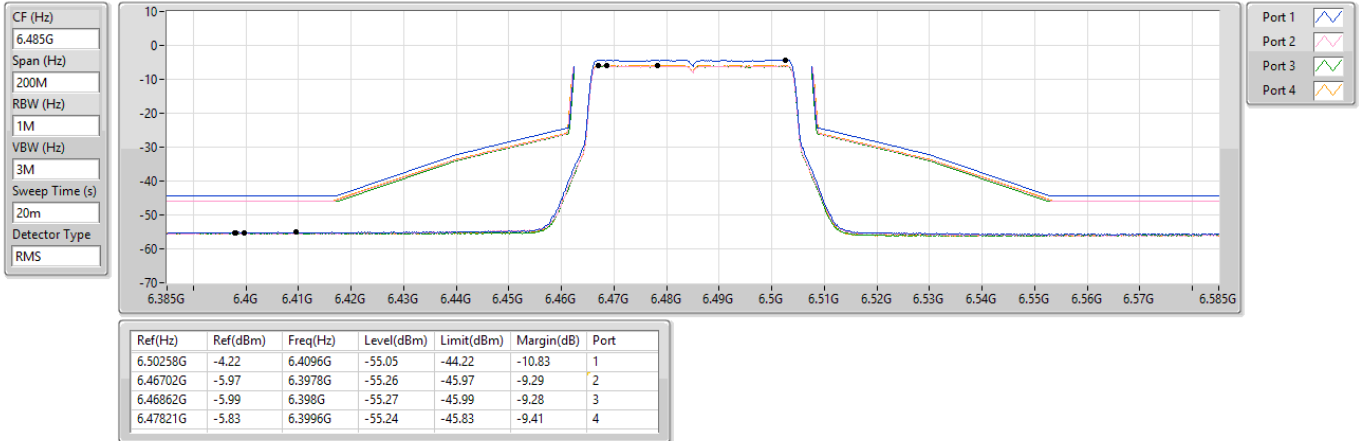

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6525MHz Straddle 6.525-6.875GHz_TX

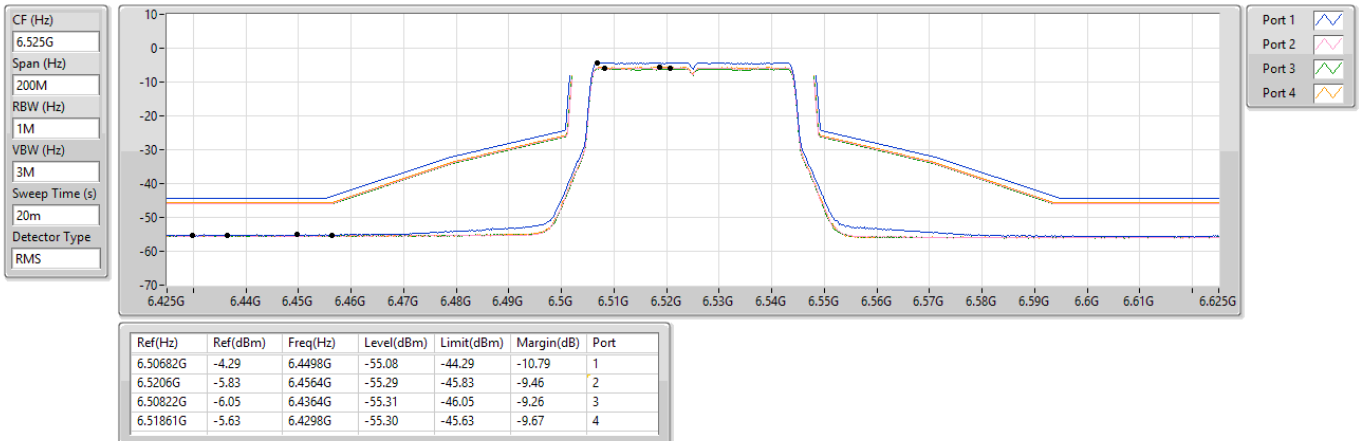

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6565MHz_TX

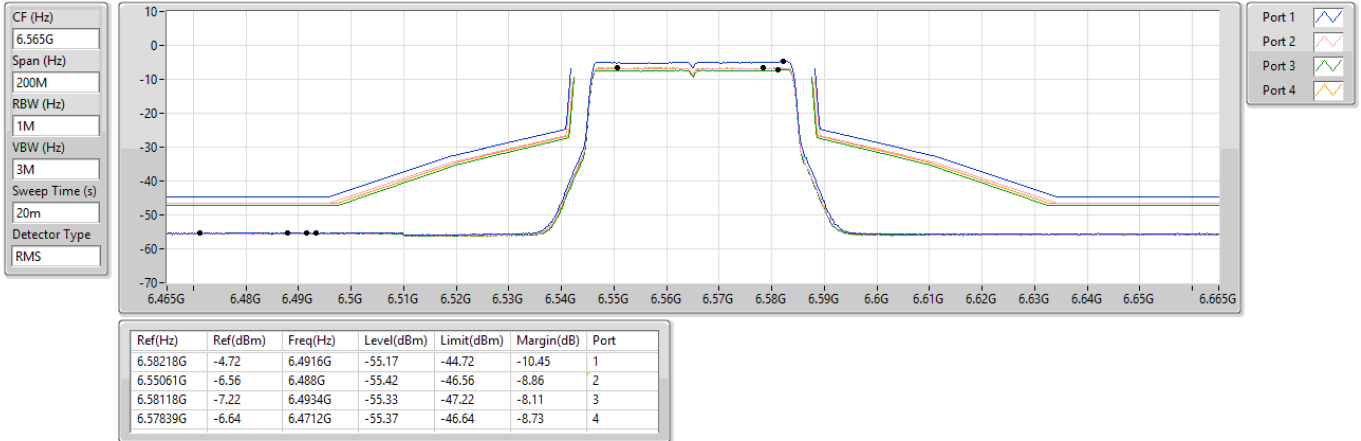

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6725MHz_TX

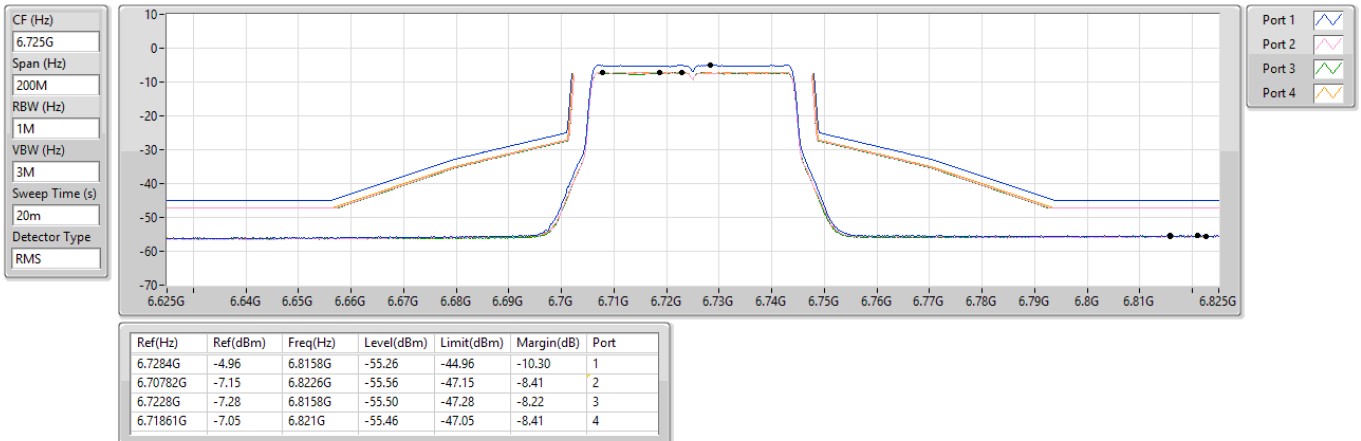

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6845MHz_TX

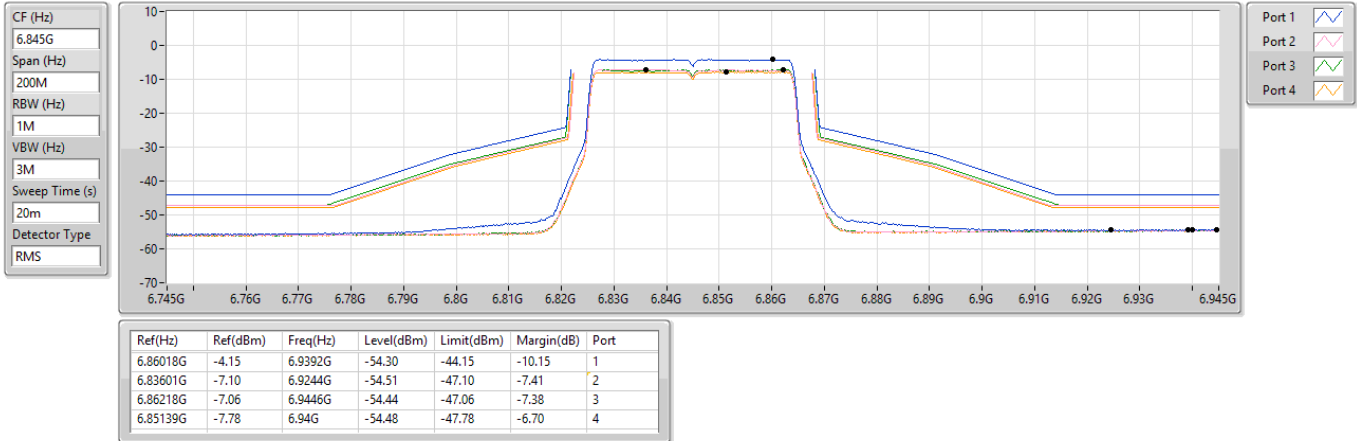

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6885MHz Straddle 6.525-6.875GHz_TX

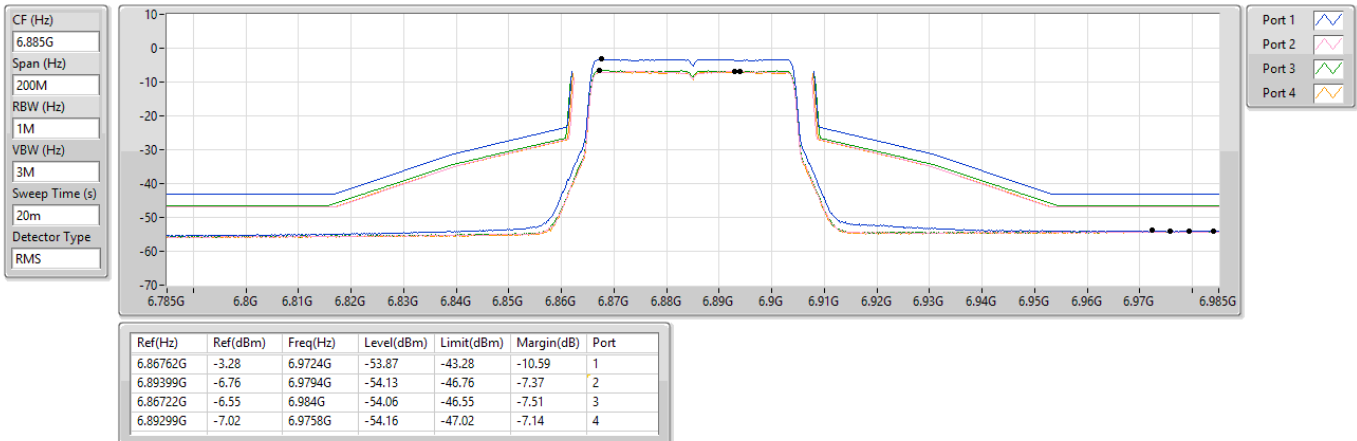

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6925MHz_TX

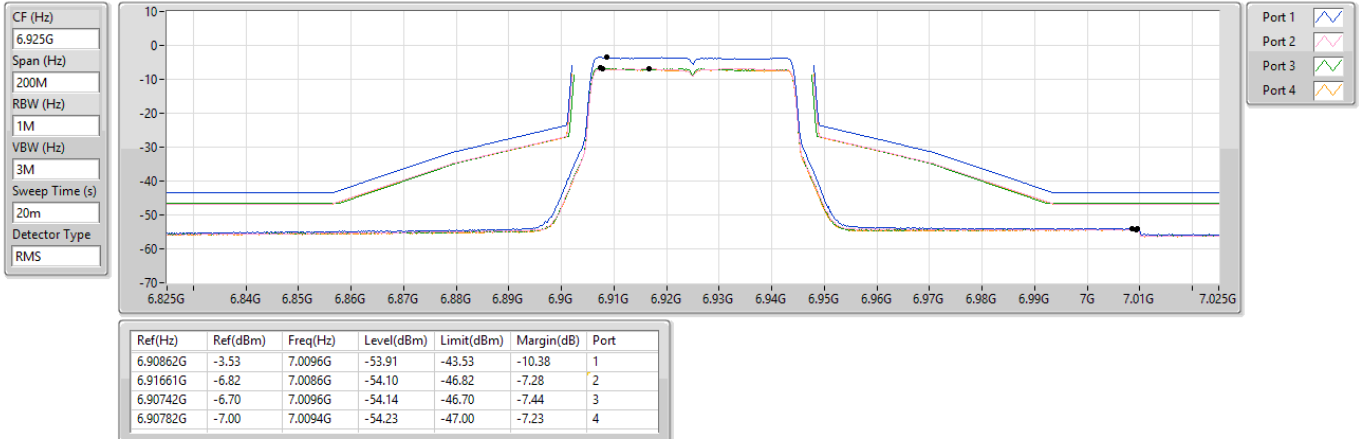

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


7005MHz_TX

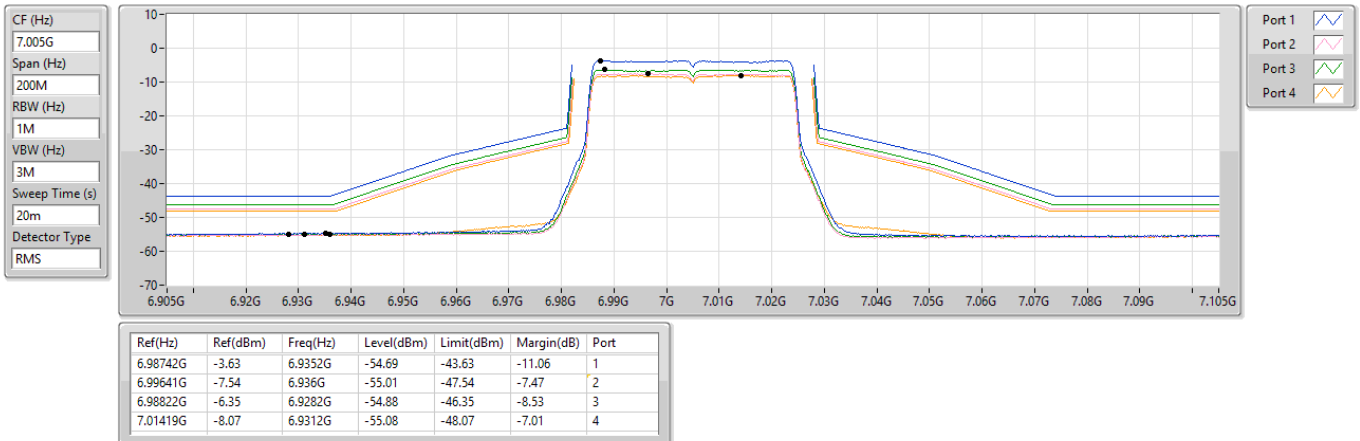

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


7085MHz_TX

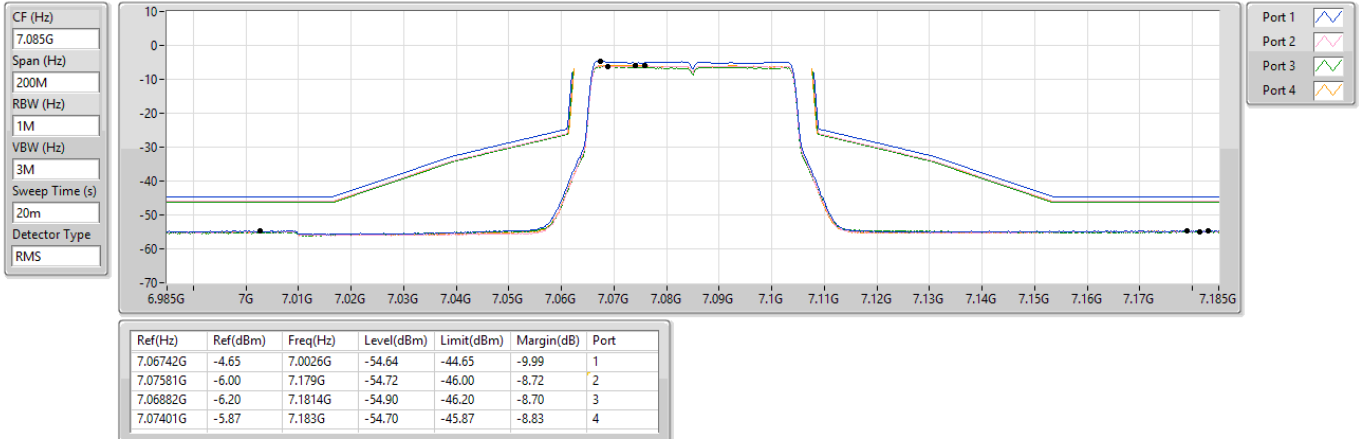

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


5985MHz_TX

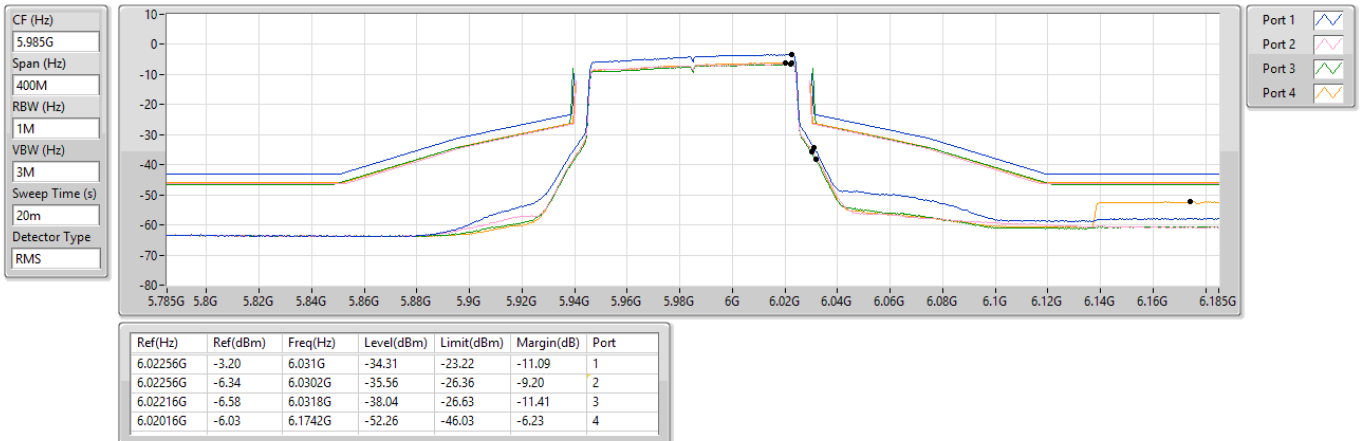

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6145MHz_TX

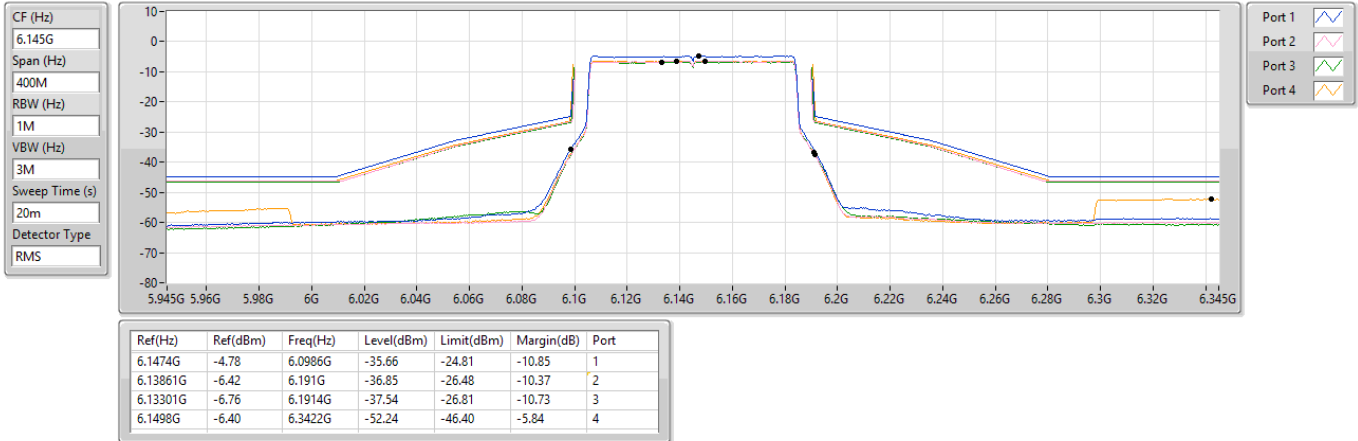

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK

6385MHz_TX

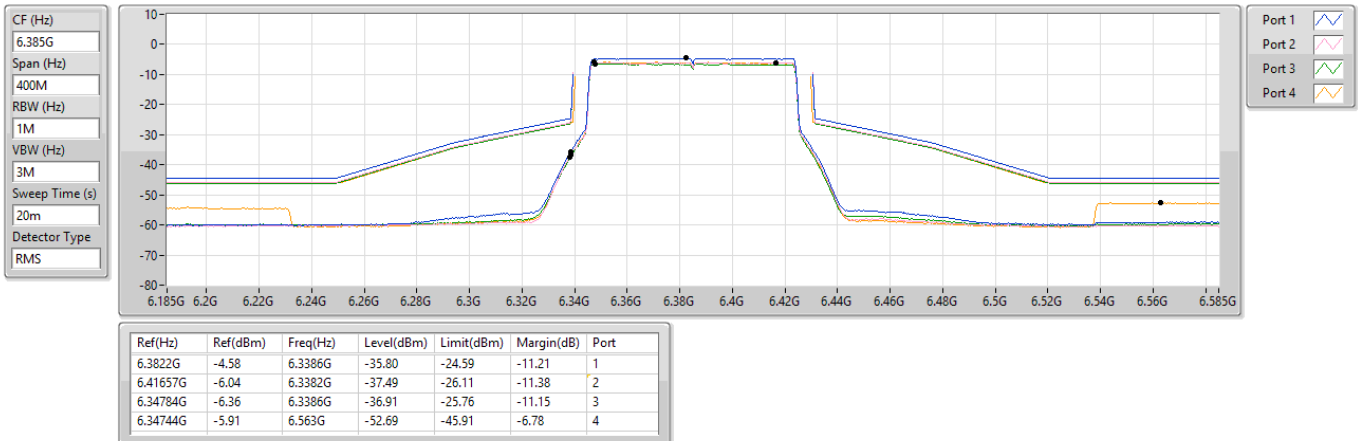




6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6465MHz_TX

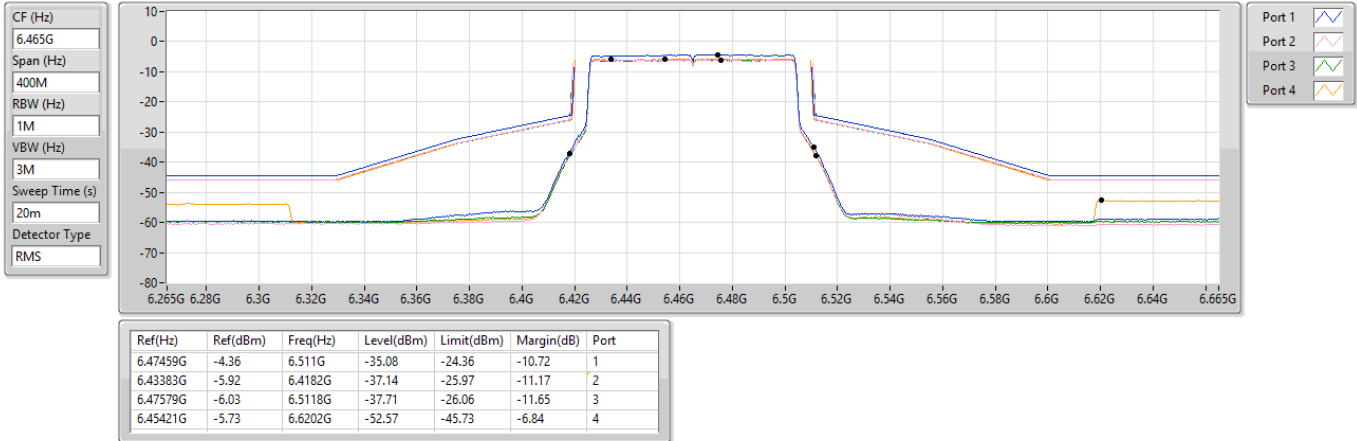

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6545MHz Straddle 6.525-6.875GHz_TX

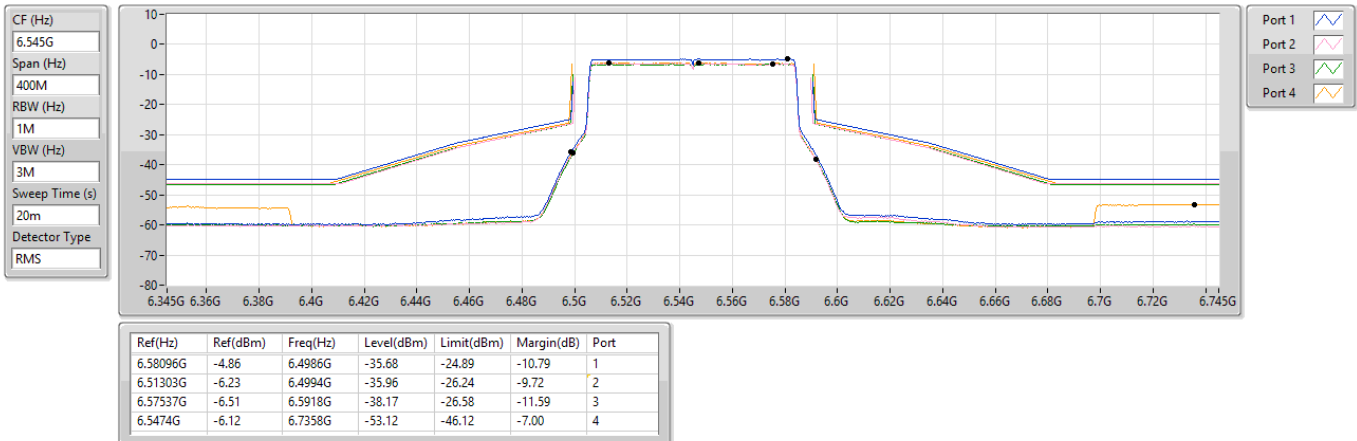

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6625MHz_TX

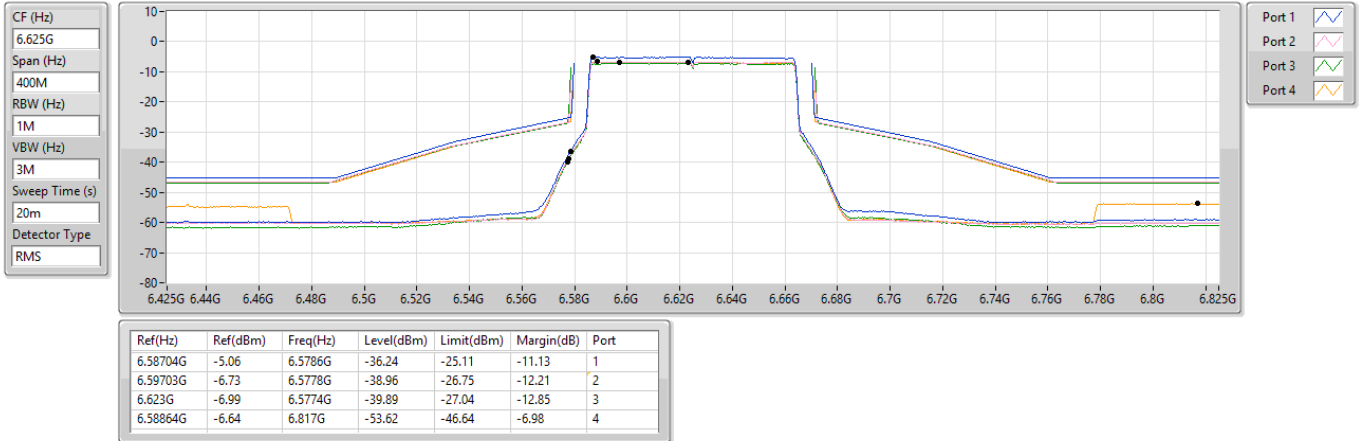

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6705MHz_TX

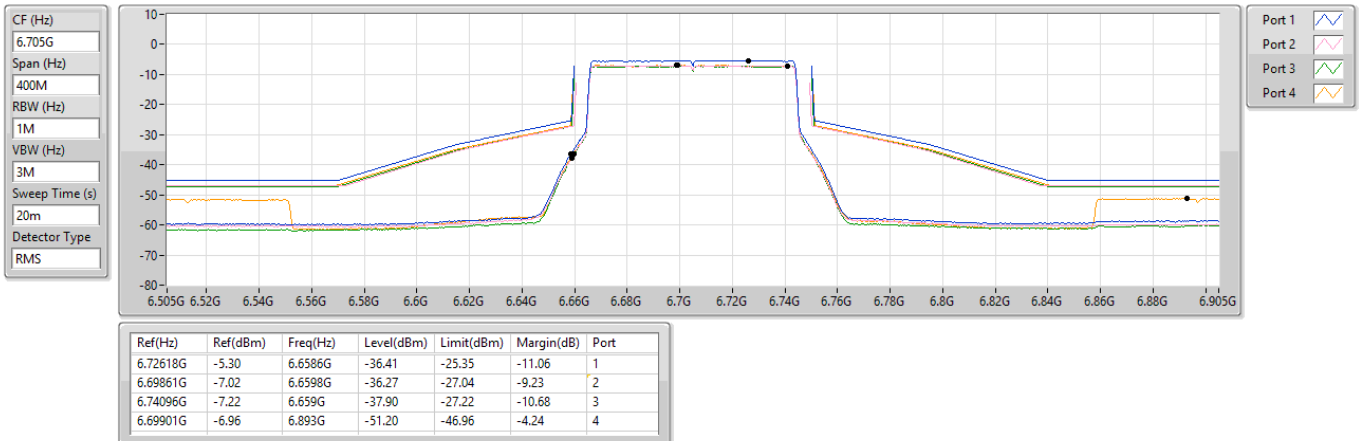

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6785MHz_TX

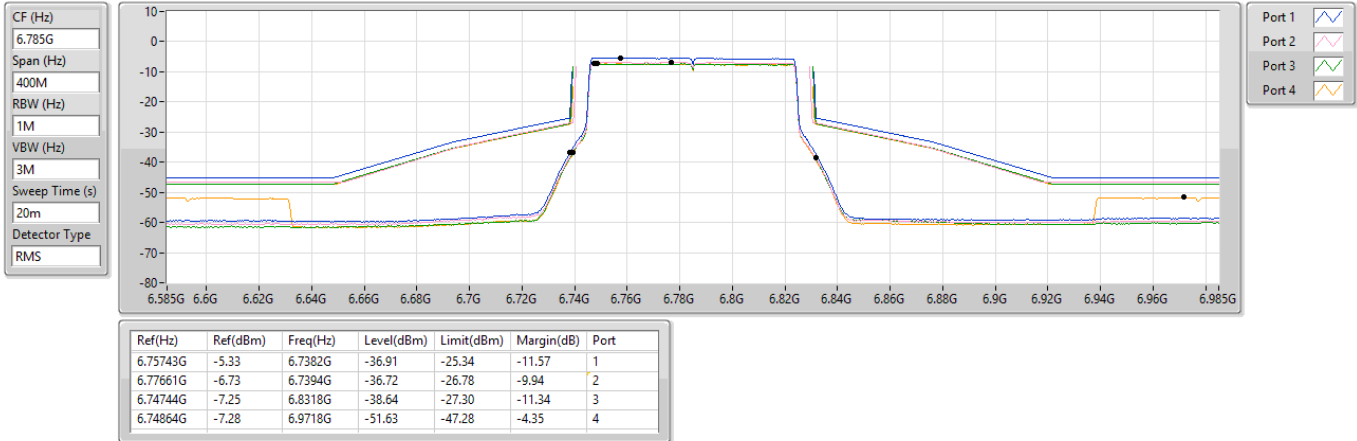

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK

6865MHz Straddle 6.525-6.875GHz_TX

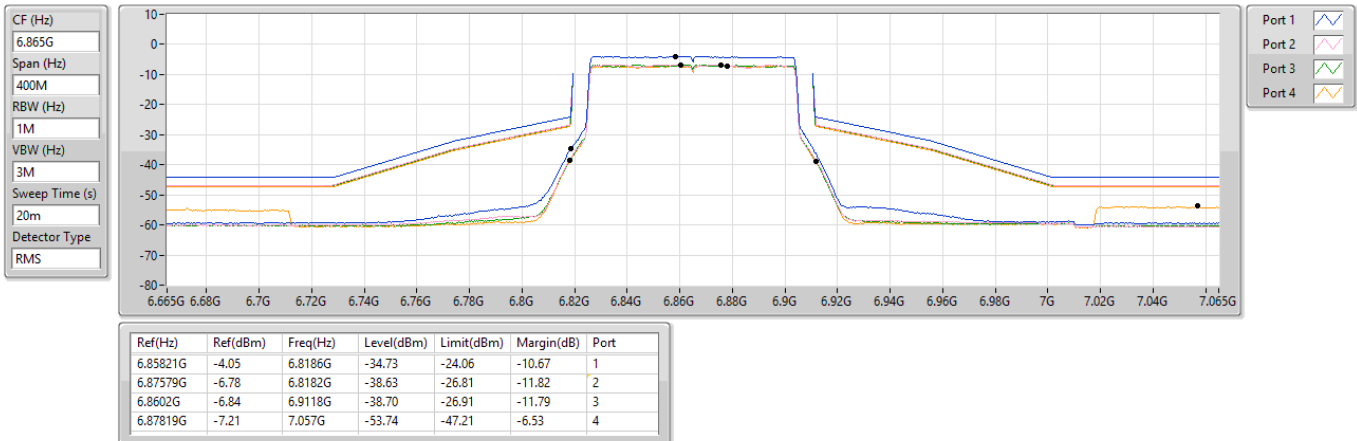




6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6945MHz_TX

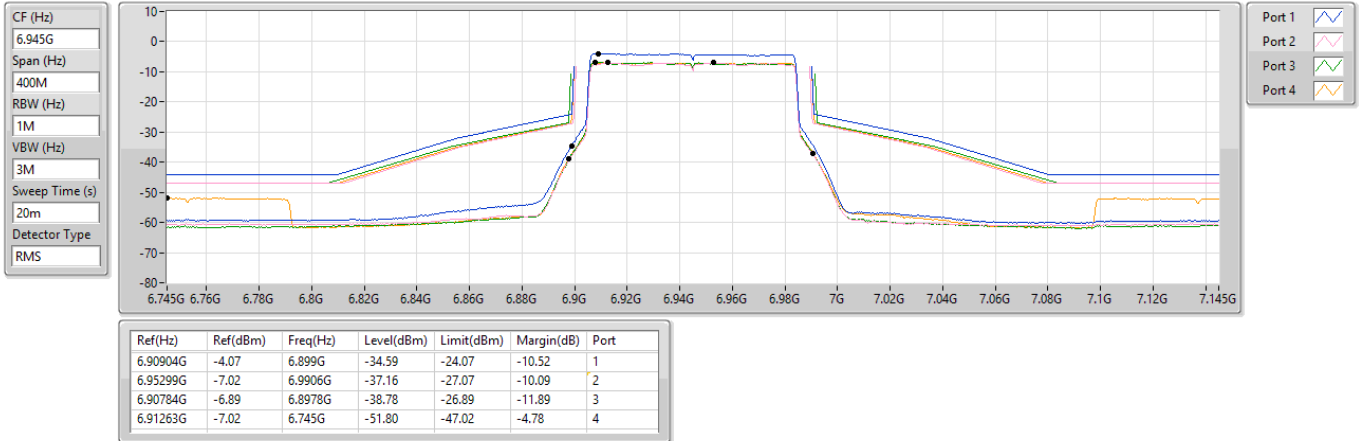

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


7025MHz_TX

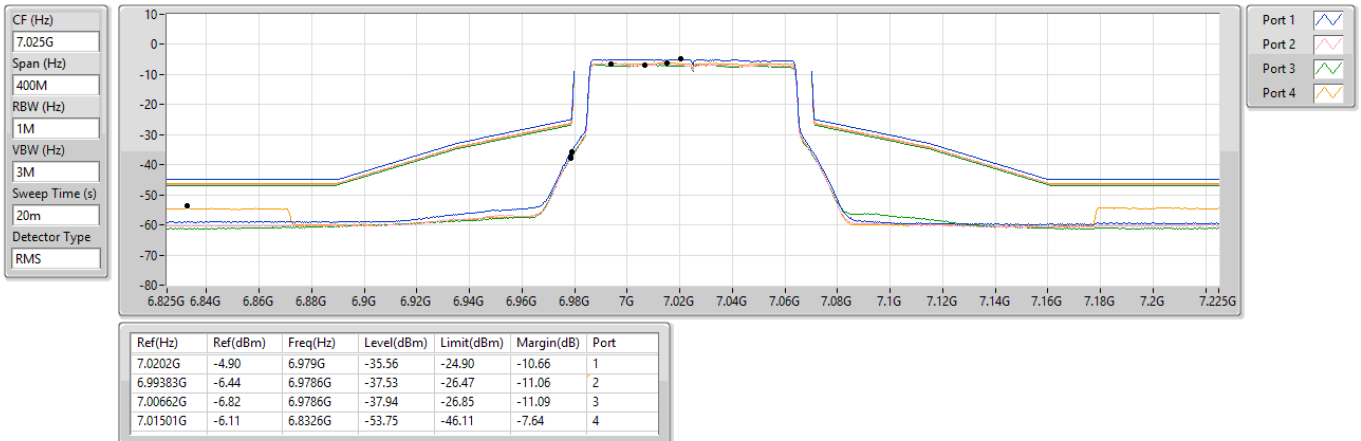

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6025MHz_TX

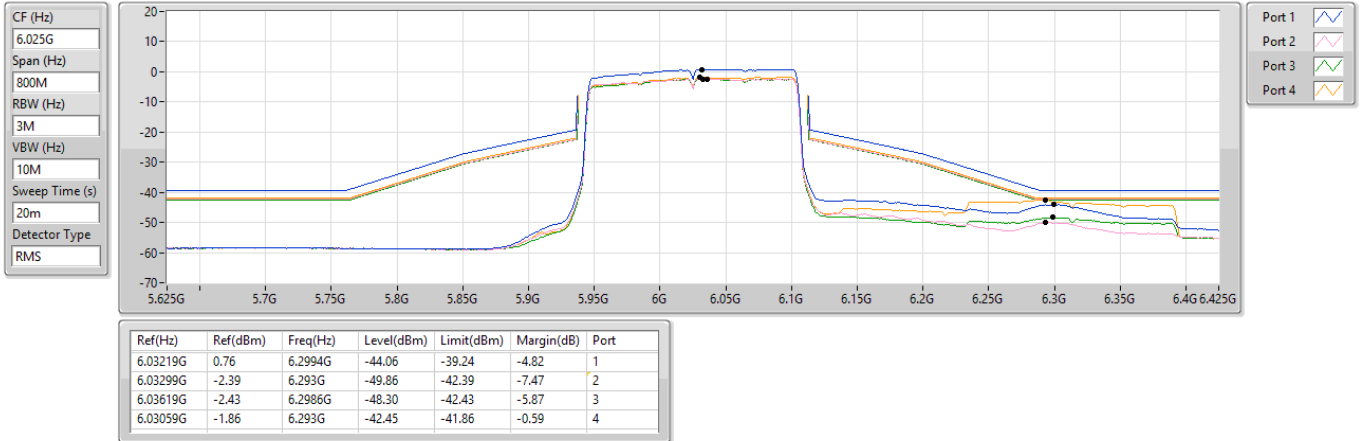

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6185MHz_TX

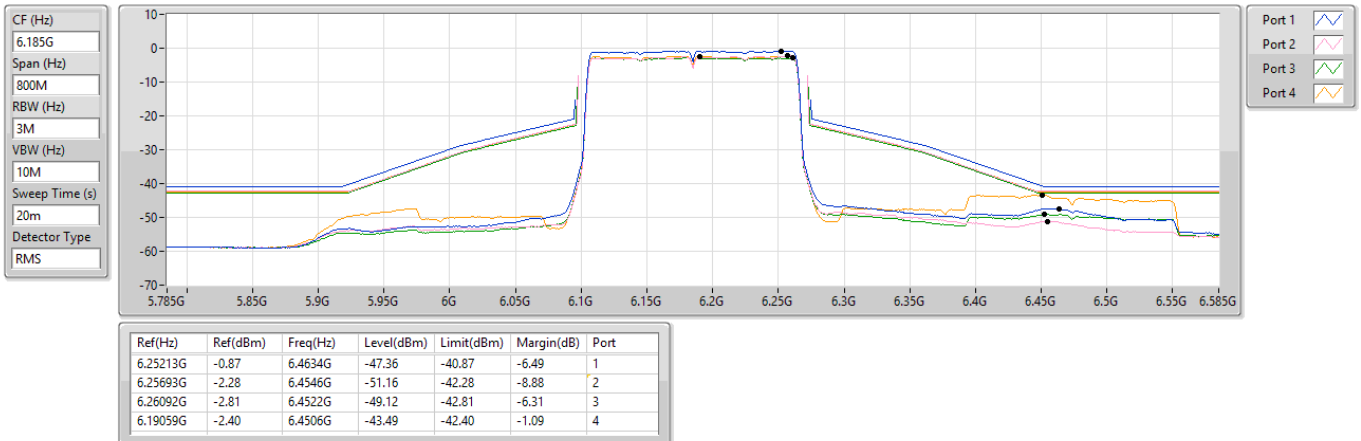

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6345MHz_TX

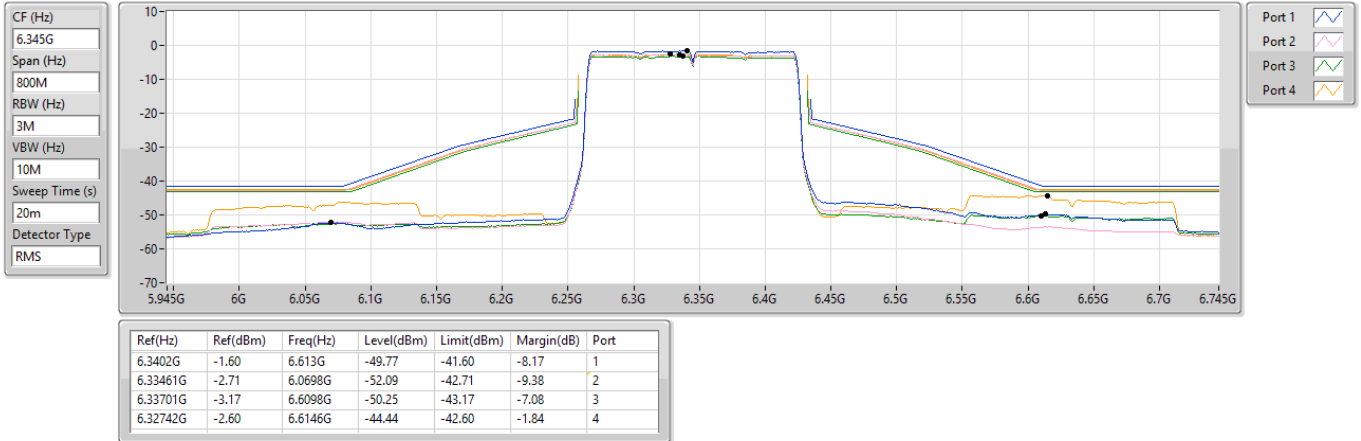

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6505MHz Straddle 6.525-6.875GHz_TX

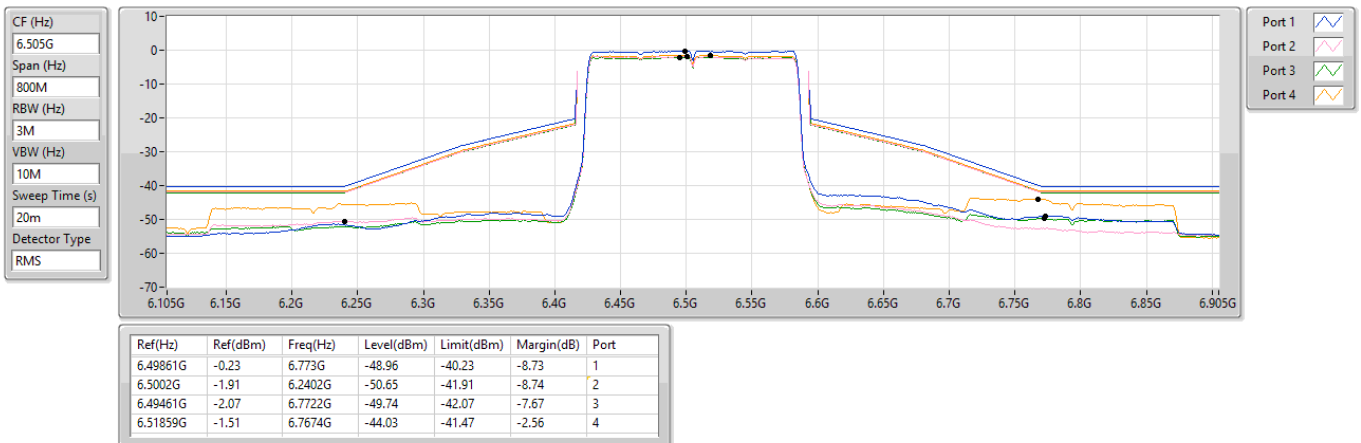

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6665MHz_TX

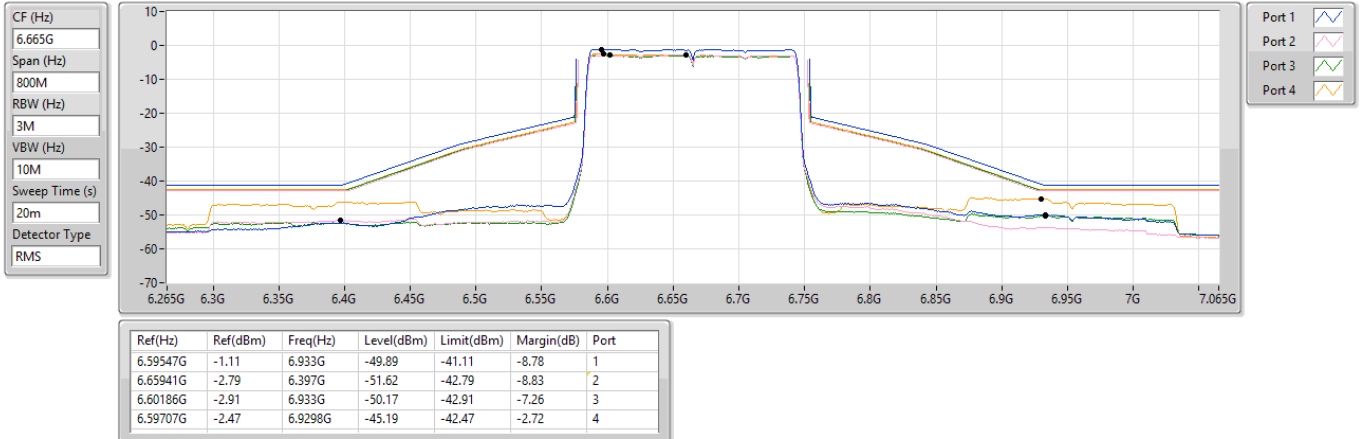

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6825MHz Straddle 6.525-6.875GHz_TX

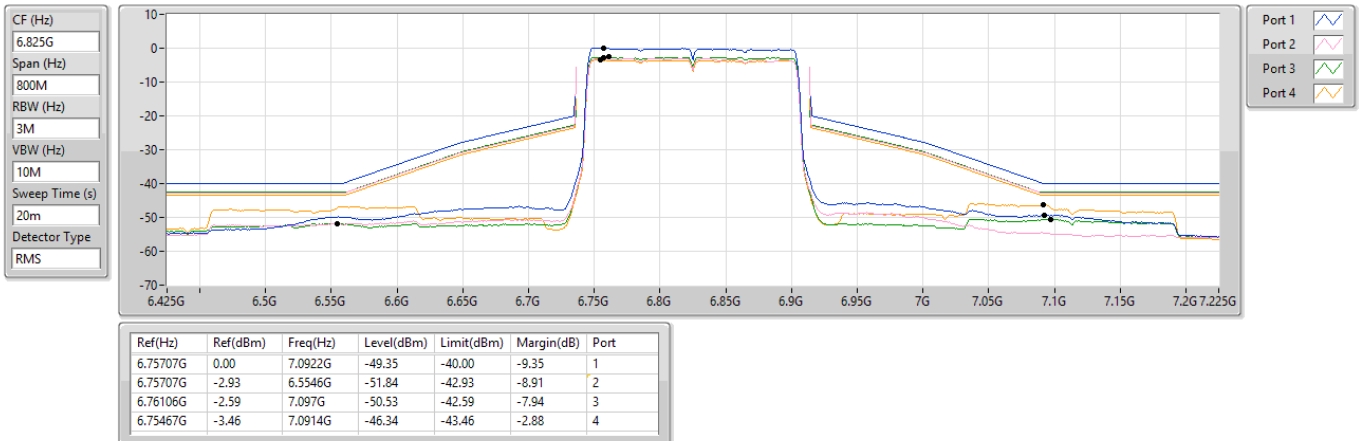

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6985MHz_TX

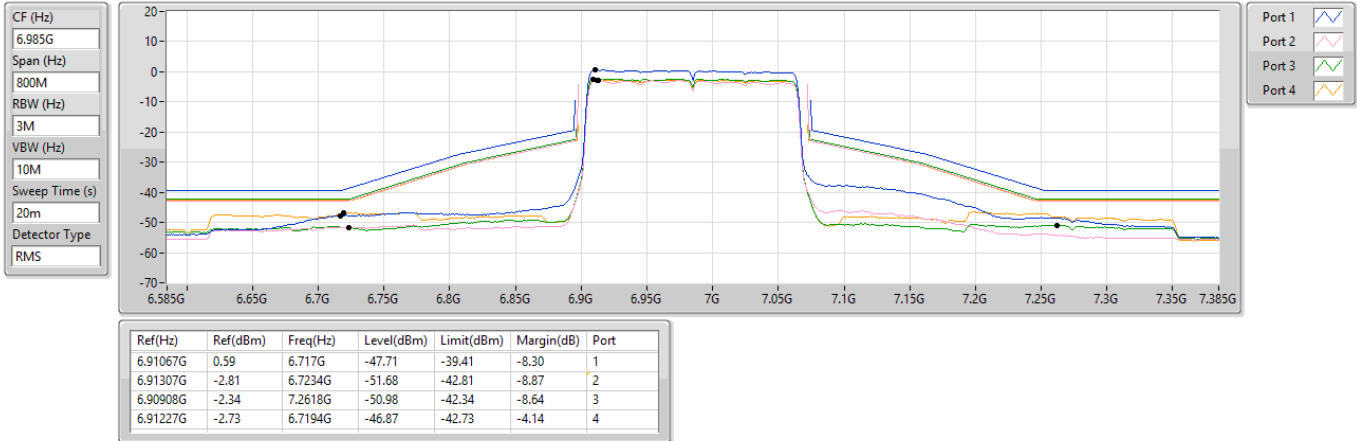

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6105MHz_TX

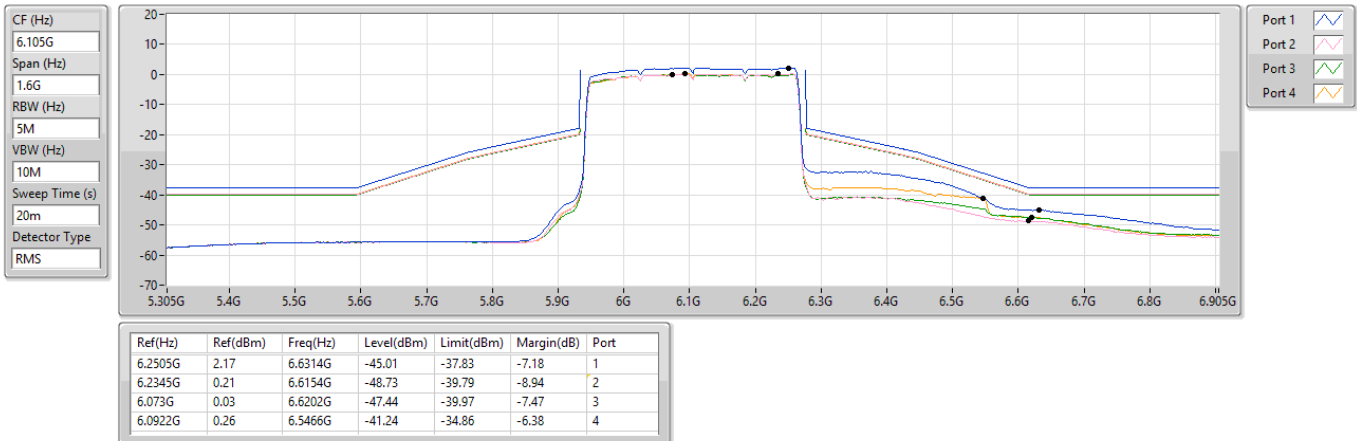

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

MASK

6265MHz_TX

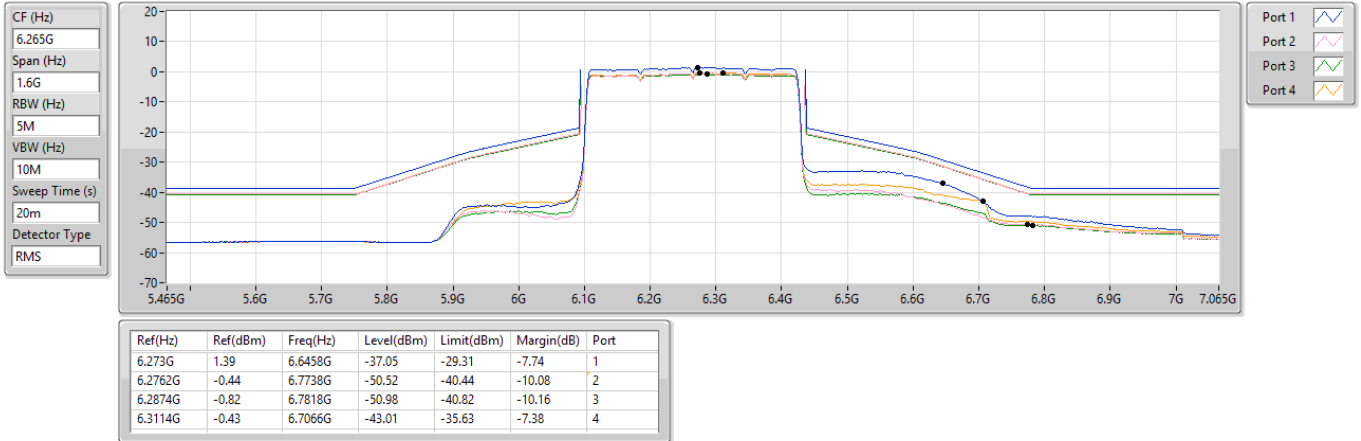

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

MASK

6425MHz Straddle 5.925-6.425GHz_TX

