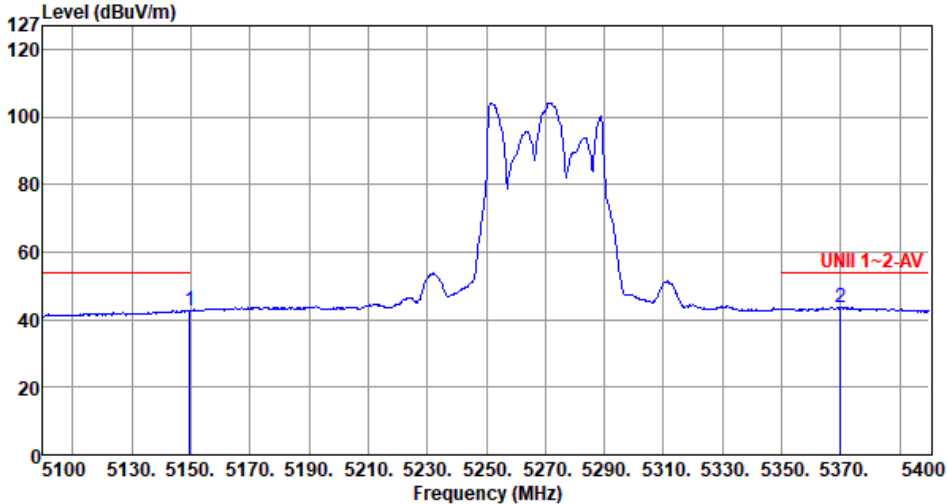




Band Edge measurement

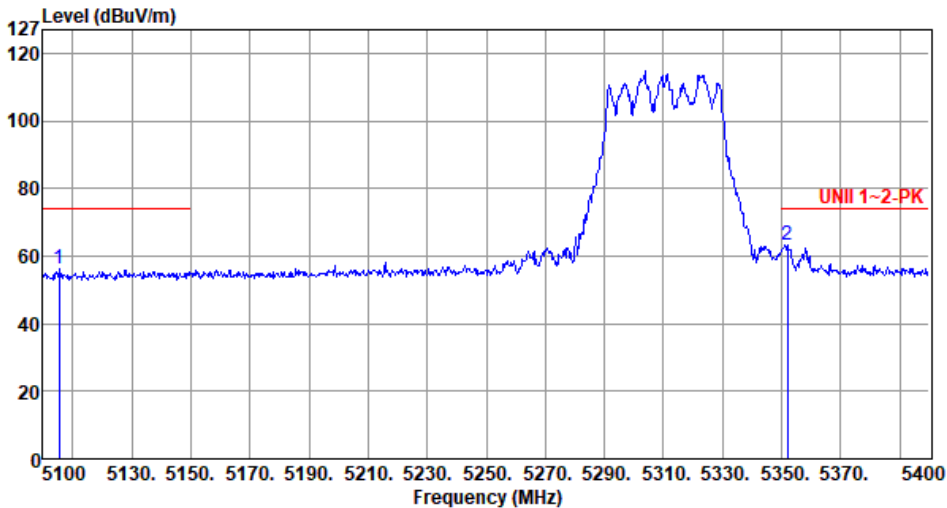
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5270																														
Polarization	Vertical-Average																																
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>42.85</td><td>54.00</td><td>-11.15</td><td>41.76</td><td>1.09</td><td>Average</td><td>150</td><td>318</td></tr><tr><td>2</td><td>5370.00</td><td>43.55</td><td>54.00</td><td>-10.45</td><td>43.18</td><td>0.37</td><td>Average</td><td>150</td><td>318</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	42.85	54.00	-11.15	41.76	1.09	Average	150	318	2	5370.00	43.55	54.00	-10.45	43.18	0.37	Average	150	318
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	42.85	54.00	-11.15	41.76	1.09	Average	150	318																								
2	5370.00	43.55	54.00	-10.45	43.18	0.37	Average	150	318																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5310																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBUV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5105.40</td><td>56.00</td><td>74.00</td><td>-18.00</td><td>55.01</td><td>0.99</td><td>Peak</td><td>175</td><td>8</td></tr><tr><td>2</td><td>5352.00</td><td>63.48</td><td>74.00</td><td>-10.52</td><td>63.15</td><td>0.33</td><td>Peak</td><td>175</td><td>8</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg	1	5105.40	56.00	74.00	-18.00	55.01	0.99	Peak	175	8	2	5352.00	63.48	74.00	-10.52	63.15	0.33	Peak	175	8
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg																																		
1	5105.40	56.00	74.00	-18.00	55.01	0.99	Peak	175	8																																		
2	5352.00	63.48	74.00	-10.52	63.15	0.33	Peak	175	8																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5310																														
Polarization	Horizontal-Average																																
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5113.50</td><td>43.51</td><td>54.00</td><td>-10.49</td><td>42.50</td><td>1.01</td><td>Average</td><td>175</td><td>8</td></tr><tr><td>2</td><td>5350.50</td><td>50.99</td><td>54.00</td><td>-3.01</td><td>50.66</td><td>0.33</td><td>Average</td><td>175</td><td>8</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5113.50	43.51	54.00	-10.49	42.50	1.01	Average	175	8	2	5350.50	50.99	54.00	-3.01	50.66	0.33	Average	175	8
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5113.50	43.51	54.00	-10.49	42.50	1.01	Average	175	8																								
2	5350.50	50.99	54.00	-3.01	50.66	0.33	Average	175	8																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

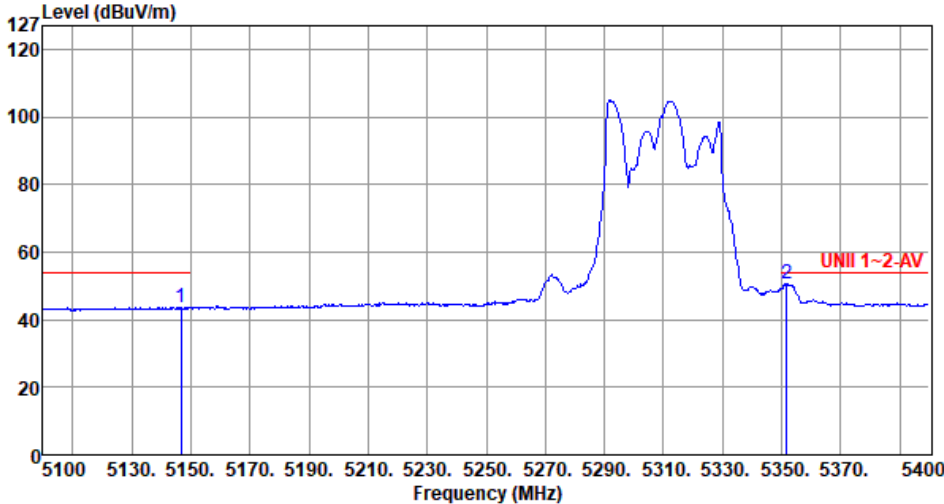
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5310																														
Polarization	Vertical-Peak																																
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66																																	
Level (dBuV/m) UNII 1-2-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5145.90</td><td>56.25</td><td>74.00</td><td>-17.75</td><td>55.18</td><td>1.07</td><td>Peak</td><td>141</td><td>325</td></tr><tr><td>2</td><td>5352.90</td><td>64.36</td><td>74.00</td><td>-9.64</td><td>64.02</td><td>0.34</td><td>Peak</td><td>141</td><td>325</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.90	56.25	74.00	-17.75	55.18	1.07	Peak	141	325	2	5352.90	64.36	74.00	-9.64	64.02	0.34	Peak	141	325
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.90	56.25	74.00	-17.75	55.18	1.07	Peak	141	325																								
2	5352.90	64.36	74.00	-9.64	64.02	0.34	Peak	141	325																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5310																																																		
Polarization	Vertical-Average																																																				
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.80</td><td>43.73</td><td>54.00</td><td>-10.27</td><td>42.65</td><td>1.08</td><td>Average</td><td>141</td><td>325</td></tr><tr><td>2</td><td>5351.70</td><td>50.59</td><td>54.00</td><td>-3.41</td><td>50.26</td><td>0.33</td><td>Average</td><td>141</td><td>325</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5146.80	43.73	54.00	-10.27	42.65	1.08	Average	141	325	2	5351.70	50.59	54.00	-3.41	50.26	0.33	Average	141	325
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5146.80	43.73	54.00	-10.27	42.65	1.08	Average	141	325																																												
2	5351.70	50.59	54.00	-3.41	50.26	0.33	Average	141	325																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

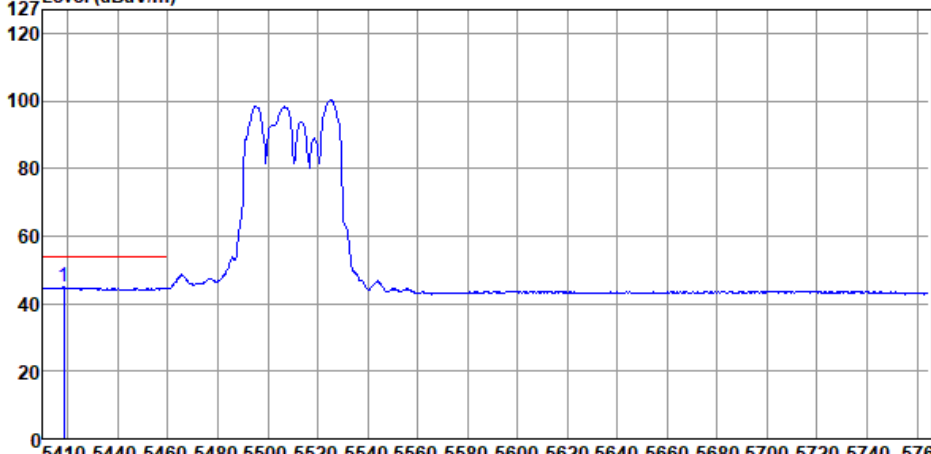
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5510																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5457.93</td><td>59.37</td><td>74.00</td><td>-14.63</td><td>58.67</td><td>0.70</td><td>Peak</td><td>161</td><td>192</td></tr><tr><td>2</td><td>5465.38</td><td>65.27</td><td>68.20</td><td>-2.93</td><td>64.55</td><td>0.72</td><td>Peak</td><td>308</td><td>162</td></tr><tr><td>3</td><td>5740.15</td><td>56.20</td><td>68.20</td><td>-12.00</td><td>55.04</td><td>1.16</td><td>Peak</td><td>308</td><td>162</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5457.93	59.37	74.00	-14.63	58.67	0.70	Peak	161	192	2	5465.38	65.27	68.20	-2.93	64.55	0.72	Peak	308	162	3	5740.15	56.20	68.20	-12.00	55.04	1.16	Peak	308	162
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5457.93	59.37	74.00	-14.63	58.67	0.70	Peak	161	192																																		
2	5465.38	65.27	68.20	-2.93	64.55	0.72	Peak	308	162																																		
3	5740.15	56.20	68.20	-12.00	55.04	1.16	Peak	308	162																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5510																				
Polarization	Horizontal-Average																						
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66																							
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5418.52</td><td>44.83</td><td>54.00</td><td>-9.17</td><td>44.31</td><td>0.52</td><td>Average</td><td>161</td><td>192</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5418.52	44.83	54.00	-9.17	44.31	0.52	Average	161	192
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5418.52	44.83	54.00	-9.17	44.31	0.52	Average	161	192														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

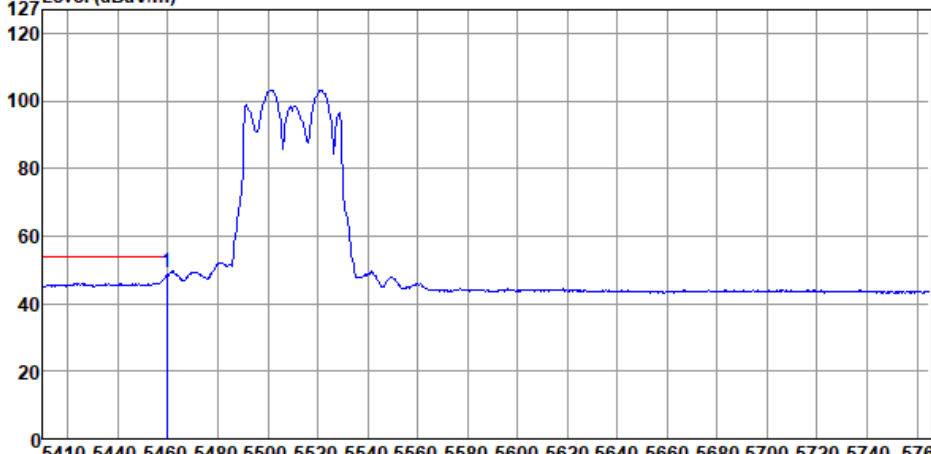
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5510																																																												
Polarization	Vertical-Peak																																																														
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66																																																															
Level (dBuV/m) 127 120 100 80 60 40 20 0 5410 5440.5460.5480.5500.5520.5540.5560.5580.5600.5620.5640.5660.5680.5700.5720.5740. 5765 Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.99</td><td>64.91</td><td>74.00</td><td>-9.09</td><td>64.21</td><td>0.70</td><td>Peak</td><td>228</td><td>139</td></tr><tr><td>2</td><td>5462.54</td><td>67.31</td><td>68.20</td><td>-0.89</td><td>66.60</td><td>0.71</td><td>Peak</td><td>212</td><td>144</td></tr><tr><td>3</td><td>5749.03</td><td>56.90</td><td>68.20</td><td>-11.30</td><td>55.71</td><td>1.19</td><td>Peak</td><td>212</td><td>144</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5458.99	64.91	74.00	-9.09	64.21	0.70	Peak	228	139	2	5462.54	67.31	68.20	-0.89	66.60	0.71	Peak	212	144	3	5749.03	56.90	68.20	-11.30	55.71	1.19	Peak	212	144
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																						
		dBuV/m			dBuV			cm	deg																																																						
1	5458.99	64.91	74.00	-9.09	64.21	0.70	Peak	228	139																																																						
2	5462.54	67.31	68.20	-0.89	66.60	0.71	Peak	212	144																																																						
3	5749.03	56.90	68.20	-11.30	55.71	1.19	Peak	212	144																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															



Band Edge measurement

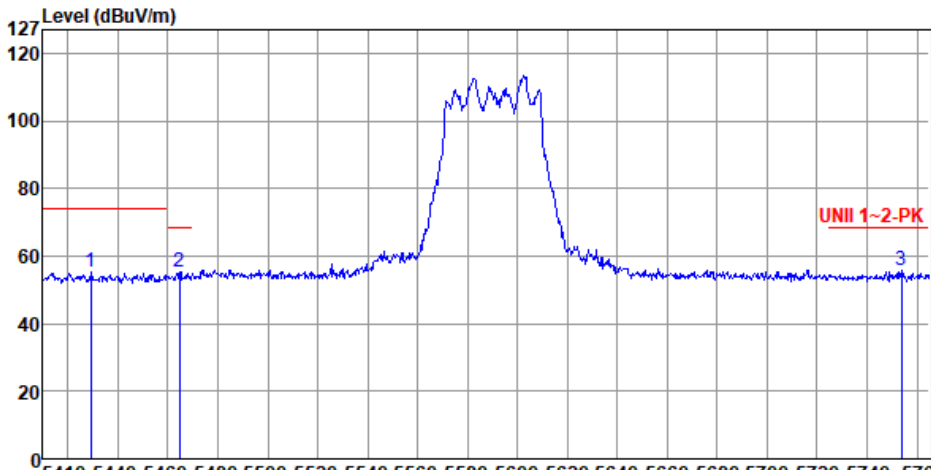
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5510																				
Polarization	Vertical-Average																						
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.70</td><td>49.34</td><td>54.00</td><td>-4.66</td><td>48.64</td><td>0.70</td><td>Average</td><td>228</td><td>139</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.70	49.34	54.00	-4.66	48.64	0.70	Average	228	139
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5459.70	49.34	54.00	-4.66	48.64	0.70	Average	228	139														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5590																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung Temperature(°C):23 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5429.17</td><td>55.36</td><td>74.00</td><td>-18.64</td><td>54.79</td><td>0.57</td><td>Peak</td><td>244</td><td>4</td></tr><tr><td>2</td><td>5464.67</td><td>55.21</td><td>68.20</td><td>-12.99</td><td>54.50</td><td>0.71</td><td>Peak</td><td>244</td><td>4</td></tr><tr><td>3</td><td>5753.64</td><td>55.94</td><td>68.20</td><td>-12.26</td><td>54.75</td><td>1.19</td><td>Peak</td><td>244</td><td>4</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5429.17	55.36	74.00	-18.64	54.79	0.57	Peak	244	4	2	5464.67	55.21	68.20	-12.99	54.50	0.71	Peak	244	4	3	5753.64	55.94	68.20	-12.26	54.75	1.19	Peak	244	4
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5429.17	55.36	74.00	-18.64	54.79	0.57	Peak	244	4																																		
2	5464.67	55.21	68.20	-12.99	54.50	0.71	Peak	244	4																																		
3	5753.64	55.94	68.20	-12.26	54.75	1.19	Peak	244	4																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5590
Polarization	Horizontal-Average		
Test By :Akun Chung Temperature(°C):23 Humidity(%):63			
Level (dBUV/m)			



Band Edge measurement

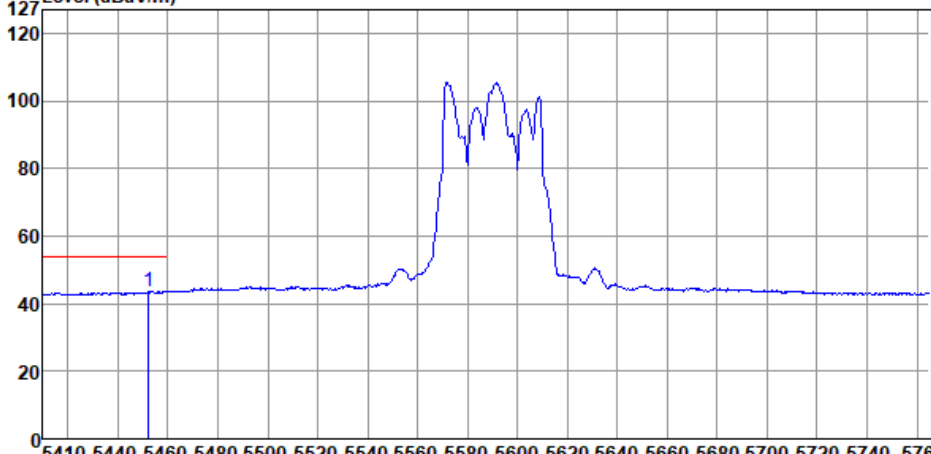
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5590																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung Temperature(°C):23 Humidity(%):63																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5416.04</td><td>55.52</td><td>74.00</td><td>-18.48</td><td>55.01</td><td>0.51</td><td>Peak</td><td>162</td><td>326</td></tr><tr><td>2</td><td>5468.22</td><td>56.15</td><td>68.20</td><td>-12.05</td><td>55.43</td><td>0.72</td><td>Peak</td><td>162</td><td>326</td></tr><tr><td>3</td><td>5733.41</td><td>55.21</td><td>68.20</td><td>-12.99</td><td>54.06</td><td>1.15</td><td>Peak</td><td>162</td><td>326</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5416.04	55.52	74.00	-18.48	55.01	0.51	Peak	162	326	2	5468.22	56.15	68.20	-12.05	55.43	0.72	Peak	162	326	3	5733.41	55.21	68.20	-12.99	54.06	1.15	Peak	162	326
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5416.04	55.52	74.00	-18.48	55.01	0.51	Peak	162	326																																		
2	5468.22	56.15	68.20	-12.05	55.43	0.72	Peak	162	326																																		
3	5733.41	55.21	68.20	-12.99	54.06	1.15	Peak	162	326																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

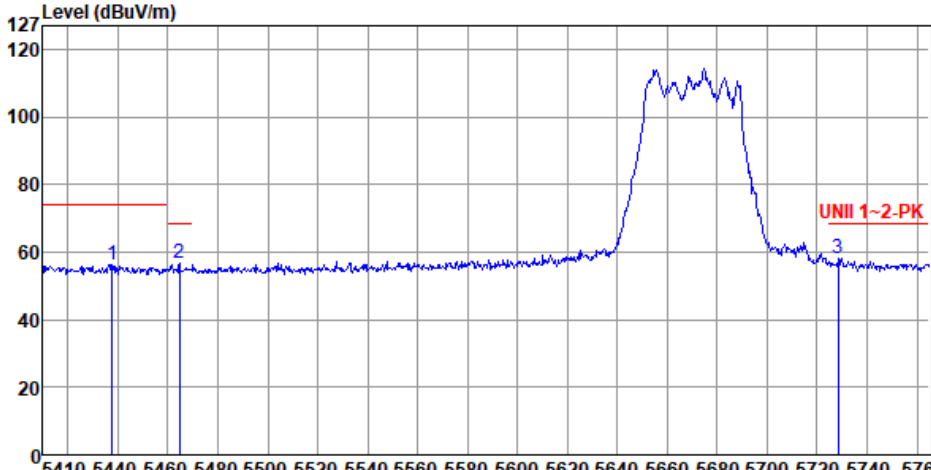
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5590																				
Polarization	Vertical-Average																						
Test By :Akun Chung Temperature(°C):23 Humidity(%):63																							
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5452.25</td><td>43.70</td><td>54.00</td><td>-10.30</td><td>43.03</td><td>0.67</td><td>Average</td><td>162</td><td>326</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5452.25	43.70	54.00	-10.30	43.03	0.67	Average	162	326
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5452.25	43.70	54.00	-10.30	43.03	0.67	Average	162	326														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5670																																																		
Polarization	Horizontal-Peak																																																				
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5437.69</td><td>56.40</td><td>74.00</td><td>-17.60</td><td>55.79</td><td>0.61</td><td>Peak</td><td>191</td><td>21</td></tr><tr><td>2</td><td>5464.67</td><td>56.58</td><td>68.20</td><td>-11.62</td><td>55.87</td><td>0.71</td><td>Peak</td><td>191</td><td>21</td></tr><tr><td>3</td><td>5728.44</td><td>58.06</td><td>68.20</td><td>-10.14</td><td>56.92</td><td>1.14</td><td>Peak</td><td>191</td><td>21</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5437.69	56.40	74.00	-17.60	55.79	0.61	Peak	191	21	2	5464.67	56.58	68.20	-11.62	55.87	0.71	Peak	191	21	3	5728.44	58.06	68.20	-10.14	56.92	1.14	Peak	191	21
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																												
1	5437.69	56.40	74.00	-17.60	55.79	0.61	Peak	191	21																																												
2	5464.67	56.58	68.20	-11.62	55.87	0.71	Peak	191	21																																												
3	5728.44	58.06	68.20	-10.14	56.92	1.14	Peak	191	21																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

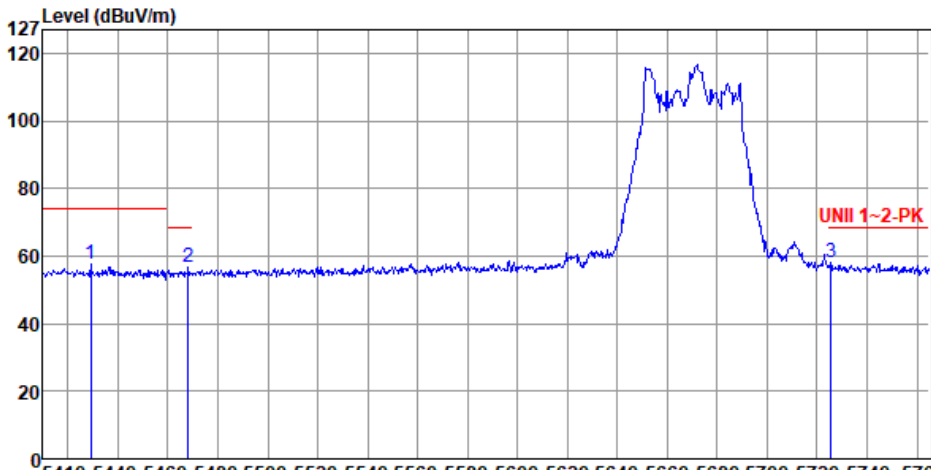
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Horizontal-Average		
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5670																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5429.17</td><td>57.55</td><td>74.00</td><td>-16.45</td><td>56.98</td><td>0.57</td><td>Peak</td><td>135</td><td>327</td></tr><tr><td>2</td><td>5468.22</td><td>56.89</td><td>68.20</td><td>-11.31</td><td>56.17</td><td>0.72</td><td>Peak</td><td>135</td><td>327</td></tr><tr><td>3</td><td>5725.60</td><td>58.09</td><td>68.20</td><td>-10.11</td><td>56.96</td><td>1.13</td><td>Peak</td><td>135</td><td>327</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5429.17	57.55	74.00	-16.45	56.98	0.57	Peak	135	327	2	5468.22	56.89	68.20	-11.31	56.17	0.72	Peak	135	327	3	5725.60	58.09	68.20	-10.11	56.96	1.13	Peak	135	327
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5429.17	57.55	74.00	-16.45	56.98	0.57	Peak	135	327																																		
2	5468.22	56.89	68.20	-11.31	56.17	0.72	Peak	135	327																																		
3	5725.60	58.09	68.20	-10.11	56.96	1.13	Peak	135	327																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

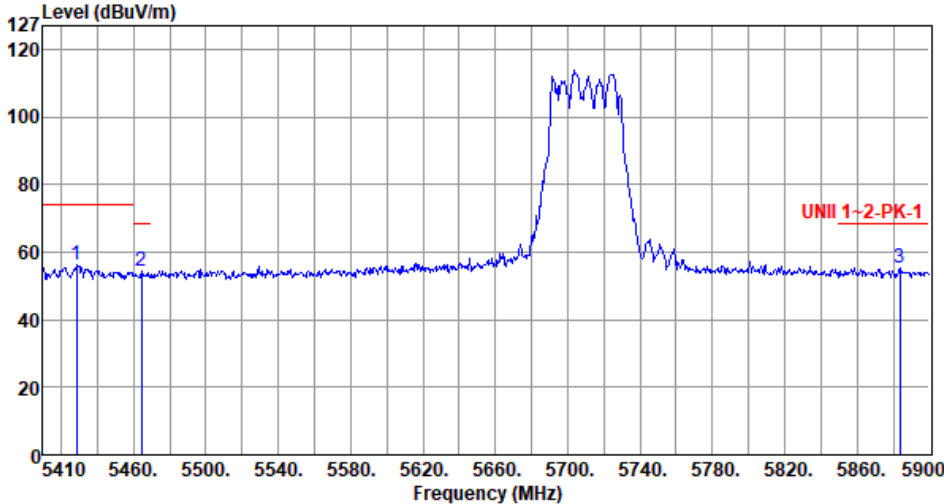
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5670						
Polarization	Vertical-Average								
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5439.11	44.12	54.00	-9.88	43.50	0.62	Average	135	327
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5710																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung Temperature(°C):23 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5428.62</td><td>56.46</td><td>74.00</td><td>-17.54</td><td>55.90</td><td>0.56</td><td>Peak</td><td>160</td><td>179</td></tr><tr><td>2</td><td>5464.39</td><td>54.45</td><td>68.20</td><td>-13.75</td><td>53.74</td><td>0.71</td><td>Peak</td><td>160</td><td>179</td></tr><tr><td>3</td><td>5883.83</td><td>55.53</td><td>68.20</td><td>-12.67</td><td>53.94</td><td>1.59</td><td>Peak</td><td>160</td><td>179</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5428.62	56.46	74.00	-17.54	55.90	0.56	Peak	160	179	2	5464.39	54.45	68.20	-13.75	53.74	0.71	Peak	160	179	3	5883.83	55.53	68.20	-12.67	53.94	1.59	Peak	160	179
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5428.62	56.46	74.00	-17.54	55.90	0.56	Peak	160	179																																		
2	5464.39	54.45	68.20	-13.75	53.74	0.71	Peak	160	179																																		
3	5883.83	55.53	68.20	-12.67	53.94	1.59	Peak	160	179																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5710																														
Polarization	Horizontal-Average																																
Test By :Akun Chung Temperature(°C):23 Humidity(%):63																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5428.13</td><td>44.23</td><td>54.00</td><td>-9.77</td><td>43.67</td><td>0.56</td><td>Average</td><td>160</td><td>179</td></tr></tbody></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5428.13	44.23	54.00	-9.77	43.67	0.56	Average	160	179
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																								
1	5428.13	44.23	54.00	-9.77	43.67	0.56	Average	160	179																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

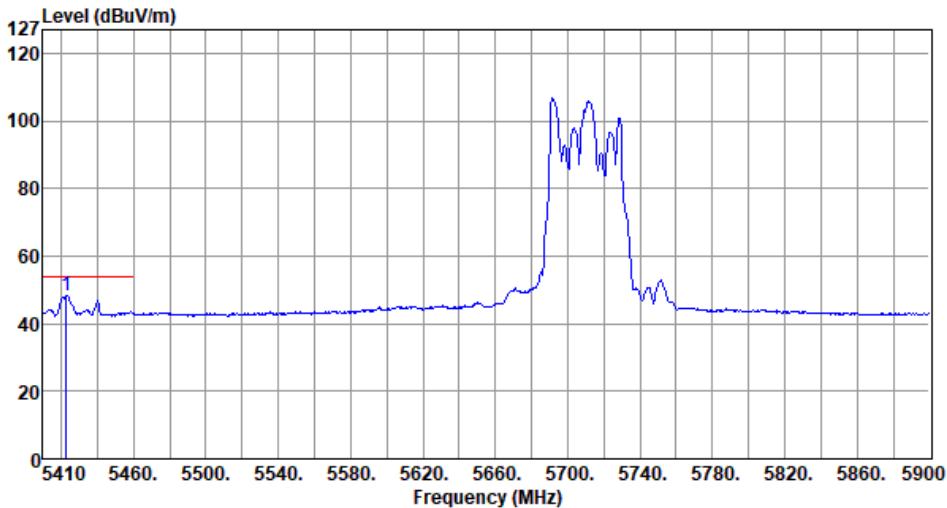
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5710																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung Temperature(°C):23 Humidity(%):63																																											
Level (dBuV/m) 127 120 100 80 60 40 20 0 5410 5460. 5500. 5540. 5580. 5620. 5660. 5700. 5740. 5780. 5820. 5860. 5900 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5422.74</td><td>60.51</td><td>74.00</td><td>-13.49</td><td>59.96</td><td>0.55</td><td>Peak</td><td>139</td><td>327</td></tr><tr><td>2</td><td>5469.29</td><td>54.53</td><td>68.20</td><td>-13.67</td><td>53.81</td><td>0.72</td><td>Peak</td><td>139</td><td>327</td></tr><tr><td>3</td><td>5869.62</td><td>55.92</td><td>68.20</td><td>-12.28</td><td>54.40</td><td>1.52</td><td>Peak</td><td>139</td><td>327</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5422.74	60.51	74.00	-13.49	59.96	0.55	Peak	139	327	2	5469.29	54.53	68.20	-13.67	53.81	0.72	Peak	139	327	3	5869.62	55.92	68.20	-12.28	54.40	1.52	Peak	139	327
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5422.74	60.51	74.00	-13.49	59.96	0.55	Peak	139	327																																		
2	5469.29	54.53	68.20	-13.67	53.81	0.72	Peak	139	327																																		
3	5869.62	55.92	68.20	-12.28	54.40	1.52	Peak	139	327																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

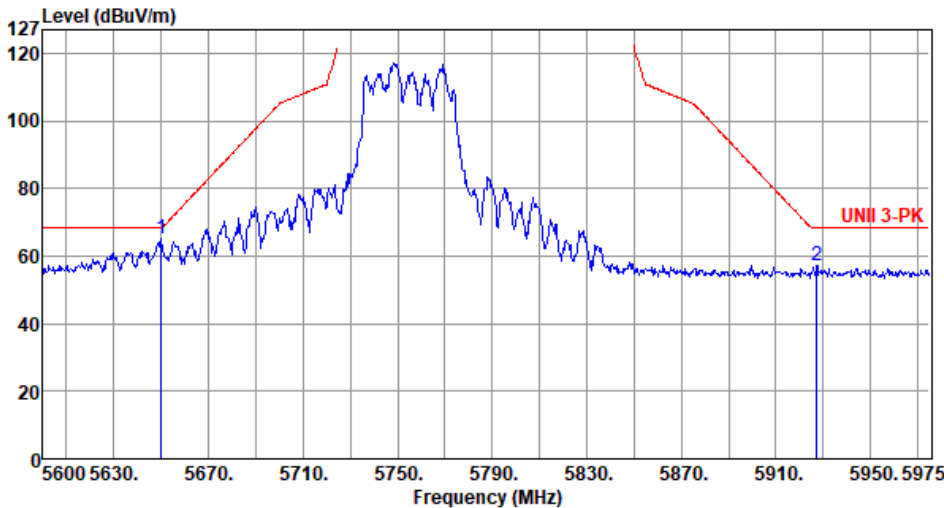
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Vertical-Average		
Test By :Akun Chung Temperature(°C):23 Humidity(%):63			
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn level dBuV/m dBuV/m dB reading dB/m MHz dBuV dBuV dBuV 1 5422.74 48.49 54.00 -5.51 47.94 0.55 Average 139 327			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Band Edge measurement

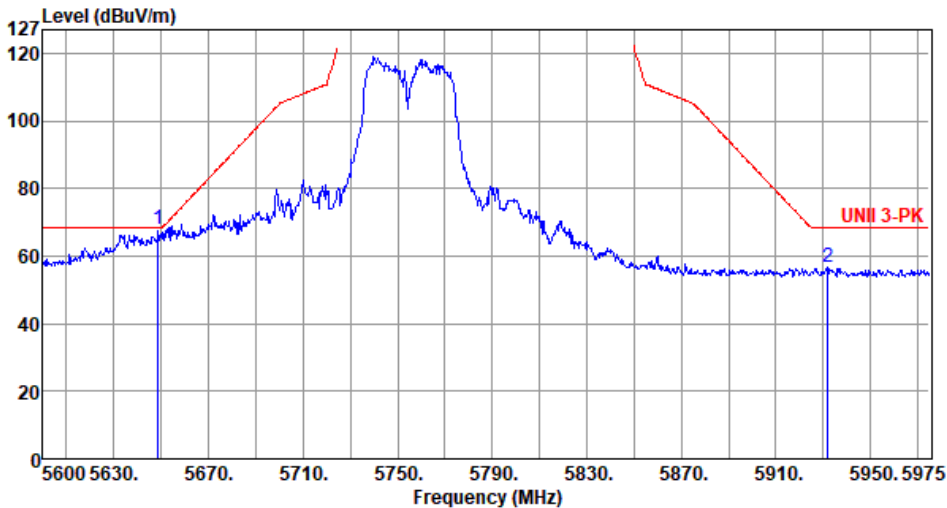
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5755																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5649.88</td><td>65.37</td><td>68.20</td><td>-2.83</td><td>64.43</td><td>0.94</td><td>Peak</td><td>161</td><td>180</td></tr><tr><td>2</td><td>5927.38</td><td>56.98</td><td>68.20</td><td>-11.22</td><td>55.30</td><td>1.68</td><td>Peak</td><td>161</td><td>180</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5649.88	65.37	68.20	-2.83	64.43	0.94	Peak	161	180	2	5927.38	56.98	68.20	-11.22	55.30	1.68	Peak	161	180
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5649.88	65.37	68.20	-2.83	64.43	0.94	Peak	161	180																								
2	5927.38	56.98	68.20	-11.22	55.30	1.68	Peak	161	180																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5755																														
Polarization	Vertical-Peak																																
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66																																	
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5648.75</td><td>67.80</td><td>68.20</td><td>-0.40</td><td>66.86</td><td>0.94</td><td>Peak</td><td>139</td><td>193</td></tr><tr><td>2</td><td>5931.88</td><td>56.72</td><td>68.20</td><td>-11.48</td><td>55.04</td><td>1.68</td><td>Peak</td><td>139</td><td>193</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5648.75	67.80	68.20	-0.40	66.86	0.94	Peak	139	193	2	5931.88	56.72	68.20	-11.48	55.04	1.68	Peak	139	193
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5648.75	67.80	68.20	-0.40	66.86	0.94	Peak	139	193																								
2	5931.88	56.72	68.20	-11.48	55.04	1.68	Peak	139	193																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5795																																																		
Polarization	Horizontal-Peak																																																				
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66																																																					
Level (dBUV/m) UNII 3-PK Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5648.38</td><td>65.60</td><td>68.20</td><td>-2.60</td><td>64.66</td><td>0.94</td><td>Peak</td><td>214</td><td>206</td></tr><tr><td>2</td><td>5971.25</td><td>56.86</td><td>68.20</td><td>-11.34</td><td>55.13</td><td>1.73</td><td>Peak</td><td>214</td><td>206</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5648.38	65.60	68.20	-2.60	64.66	0.94	Peak	214	206	2	5971.25	56.86	68.20	-11.34	55.13	1.73	Peak	214	206
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5648.38	65.60	68.20	-2.60	64.66	0.94	Peak	214	206																																												
2	5971.25	56.86	68.20	-11.34	55.13	1.73	Peak	214	206																																												



Band Edge measurement

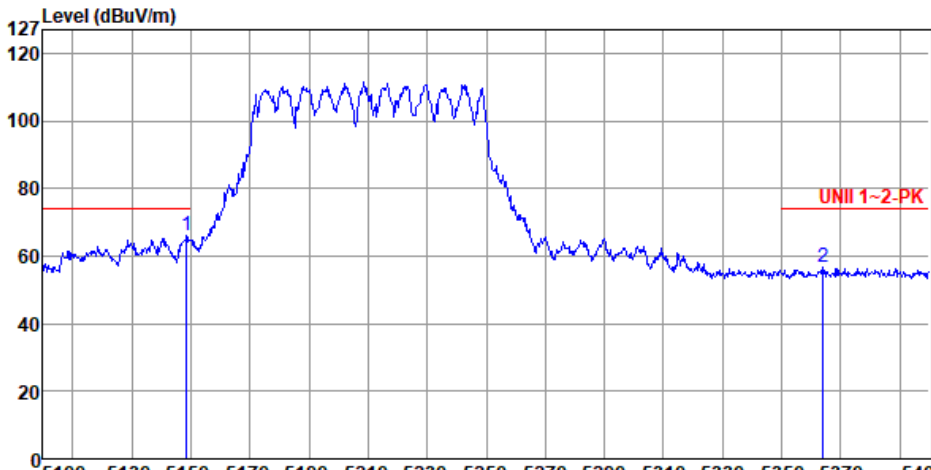
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5795
Polarization	Vertical-Peak		
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66			
Level (dBUV/m) Freq. Emission Limit Margin SA Factor Remark ANT Turn level MHz dBUV/m dBUV/m dB reading dB/m 1 5649.13 67.73 68.20 -0.47 66.79 0.94 Peak 138 185 2 5956.25 56.67 68.20 -11.53 54.98 1.69 Peak 138 185			
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).			



Band Edge measurement

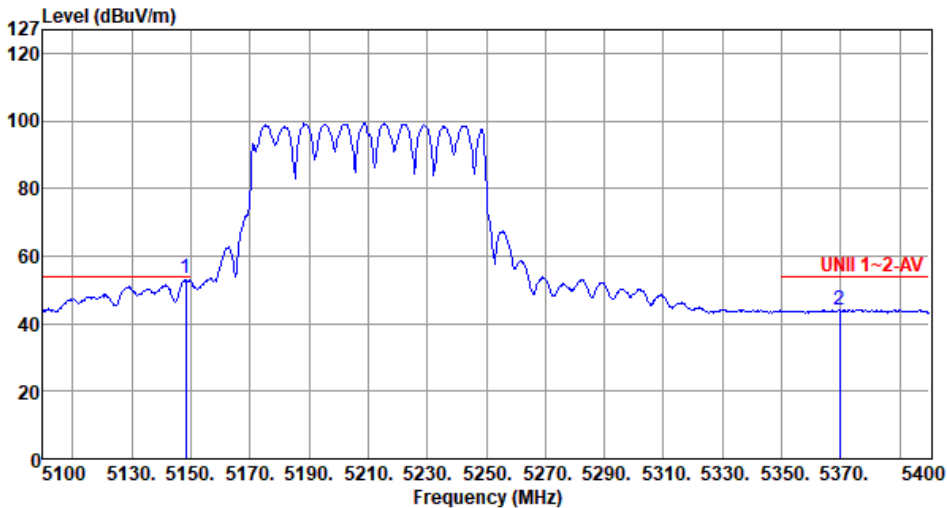
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5210																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.60</td><td>66.12</td><td>74.00</td><td>-7.88</td><td>65.03</td><td>1.09</td><td>Peak</td><td>114</td><td>350</td></tr><tr><td>2</td><td>5364.00</td><td>56.77</td><td>74.00</td><td>-17.23</td><td>56.41</td><td>0.36</td><td>Peak</td><td>114</td><td>350</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.60	66.12	74.00	-7.88	65.03	1.09	Peak	114	350	2	5364.00	56.77	74.00	-17.23	56.41	0.36	Peak	114	350
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.60	66.12	74.00	-7.88	65.03	1.09	Peak	114	350																								
2	5364.00	56.77	74.00	-17.23	56.41	0.36	Peak	114	350																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

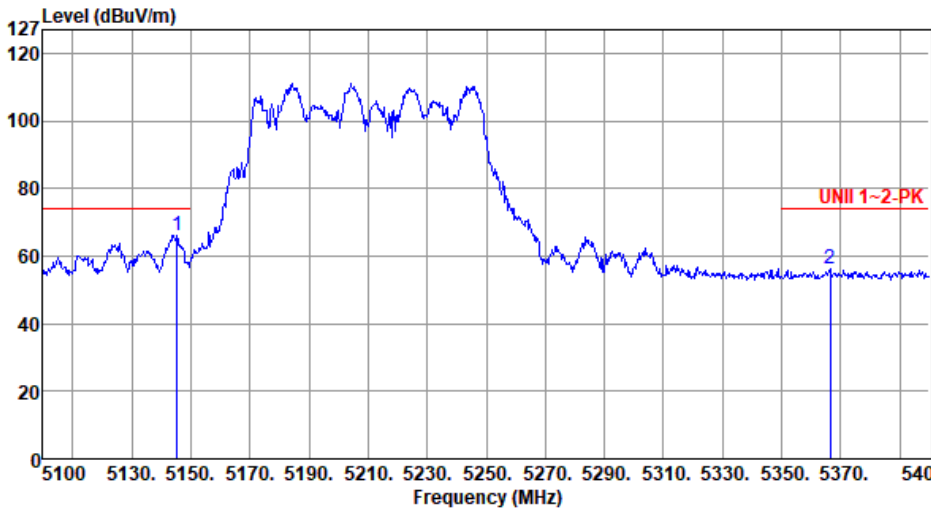
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5210																														
Polarization	Horizontal-Average																																
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.30</td><td>53.59</td><td>54.00</td><td>-0.41</td><td>52.50</td><td>1.09</td><td>Average</td><td>114</td><td>350</td></tr><tr><td>2</td><td>5369.70</td><td>44.19</td><td>54.00</td><td>-9.81</td><td>43.82</td><td>0.37</td><td>Average</td><td>114</td><td>350</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.30	53.59	54.00	-0.41	52.50	1.09	Average	114	350	2	5369.70	44.19	54.00	-9.81	43.82	0.37	Average	114	350
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.30	53.59	54.00	-0.41	52.50	1.09	Average	114	350																								
2	5369.70	44.19	54.00	-9.81	43.82	0.37	Average	114	350																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

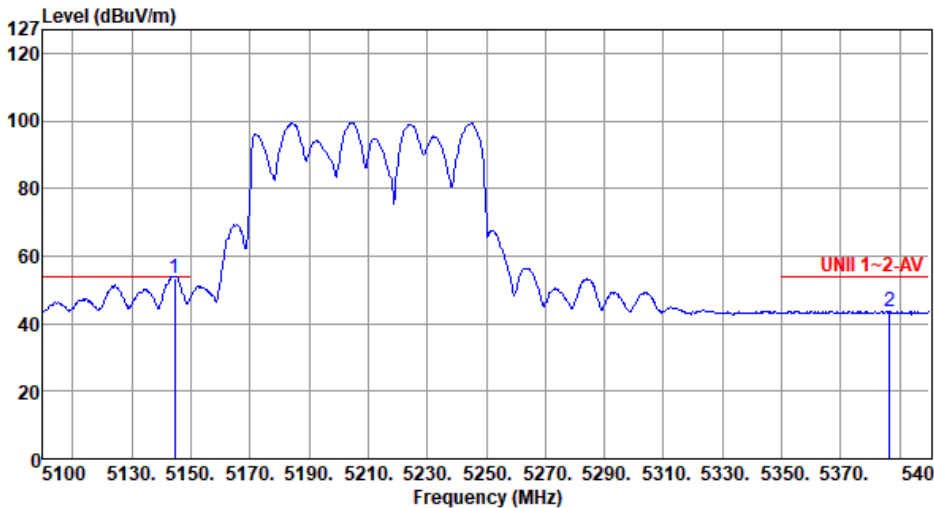
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5210																														
Polarization	Vertical-Peak																																
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5145.30</td><td>66.08</td><td>74.00</td><td>-7.92</td><td>65.01</td><td>1.07</td><td>Peak</td><td>228</td><td>341</td></tr><tr><td>2</td><td>5366.40</td><td>56.27</td><td>74.00</td><td>-17.73</td><td>55.91</td><td>0.36</td><td>Peak</td><td>228</td><td>341</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.30	66.08	74.00	-7.92	65.01	1.07	Peak	228	341	2	5366.40	56.27	74.00	-17.73	55.91	0.36	Peak	228	341
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.30	66.08	74.00	-7.92	65.01	1.07	Peak	228	341																								
2	5366.40	56.27	74.00	-17.73	55.91	0.36	Peak	228	341																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

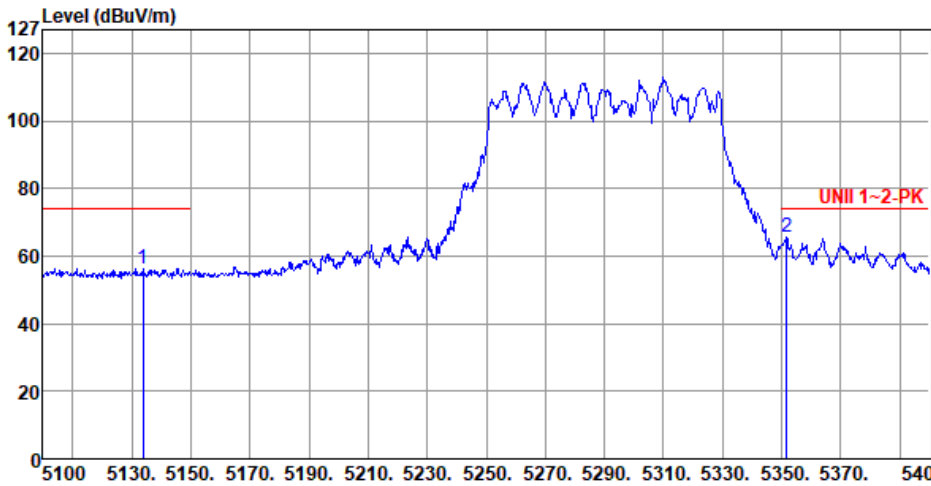
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5210																														
Polarization	Vertical-Average																																
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5144.70</td><td>53.56</td><td>54.00</td><td>-0.44</td><td>52.49</td><td>1.07</td><td>Average</td><td>228</td><td>341</td></tr><tr><td>2</td><td>5386.50</td><td>43.68</td><td>54.00</td><td>-10.32</td><td>43.28</td><td>0.40</td><td>Average</td><td>228</td><td>341</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5144.70	53.56	54.00	-0.44	52.49	1.07	Average	228	341	2	5386.50	43.68	54.00	-10.32	43.28	0.40	Average	228	341
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5144.70	53.56	54.00	-0.44	52.49	1.07	Average	228	341																								
2	5386.50	43.68	54.00	-10.32	43.28	0.40	Average	228	341																								



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5290																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5133.90</td><td>56.40</td><td>74.00</td><td>-17.60</td><td>55.34</td><td>1.06</td><td>Peak</td><td>187</td><td>6</td></tr><tr><td>2</td><td>5351.70</td><td>65.83</td><td>74.00</td><td>-8.17</td><td>65.50</td><td>0.33</td><td>Peak</td><td>187</td><td>6</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5133.90	56.40	74.00	-17.60	55.34	1.06	Peak	187	6	2	5351.70	65.83	74.00	-8.17	65.50	0.33	Peak	187	6
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5133.90	56.40	74.00	-17.60	55.34	1.06	Peak	187	6																								
2	5351.70	65.83	74.00	-8.17	65.50	0.33	Peak	187	6																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5290																														
Polarization	Horizontal-Average																																
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																																	
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5145.00</td><td>43.95</td><td>54.00</td><td>-10.05</td><td>42.88</td><td>1.07</td><td>Average</td><td>187</td><td>6</td></tr><tr><td>2</td><td>5351.10</td><td>53.62</td><td>54.00</td><td>-0.38</td><td>53.29</td><td>0.33</td><td>Average</td><td>187</td><td>6</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.00	43.95	54.00	-10.05	42.88	1.07	Average	187	6	2	5351.10	53.62	54.00	-0.38	53.29	0.33	Average	187	6
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.00	43.95	54.00	-10.05	42.88	1.07	Average	187	6																								
2	5351.10	53.62	54.00	-0.38	53.29	0.33	Average	187	6																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

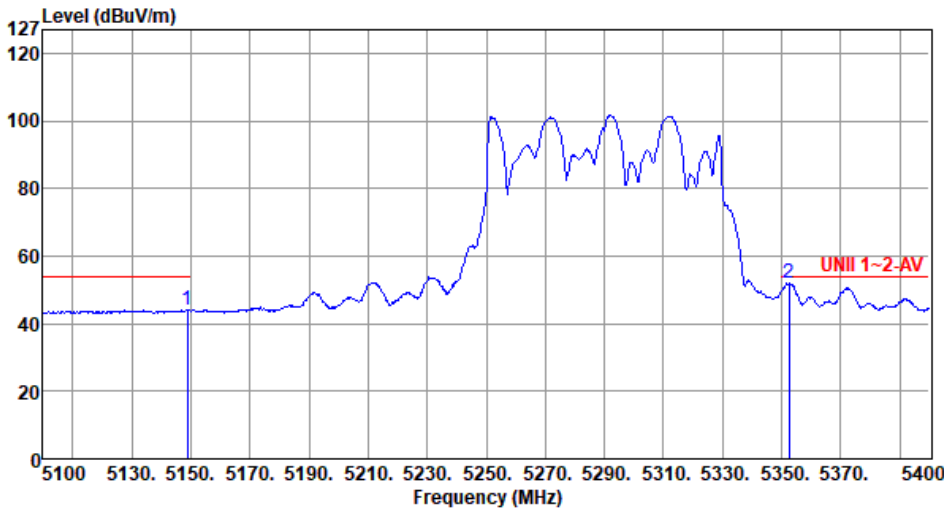
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5290																														
Polarization	Vertical-Peak																																
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																																	
Level (dBuV/m) UNII 1-2-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5132.40</td><td>57.37</td><td>74.00</td><td>-16.63</td><td>56.32</td><td>1.05</td><td>Peak</td><td>136</td><td>324</td></tr><tr><td>2</td><td>5352.30</td><td>63.53</td><td>74.00</td><td>-10.47</td><td>63.20</td><td>0.33</td><td>Peak</td><td>136</td><td>324</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5132.40	57.37	74.00	-16.63	56.32	1.05	Peak	136	324	2	5352.30	63.53	74.00	-10.47	63.20	0.33	Peak	136	324
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5132.40	57.37	74.00	-16.63	56.32	1.05	Peak	136	324																								
2	5352.30	63.53	74.00	-10.47	63.20	0.33	Peak	136	324																								



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5290																														
Polarization	Vertical-Average																																
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.90</td><td>44.05</td><td>54.00</td><td>-9.95</td><td>42.96</td><td>1.09</td><td>Average</td><td>136</td><td>324</td></tr><tr><td>2</td><td>5352.60</td><td>51.96</td><td>54.00</td><td>-2.04</td><td>51.62</td><td>0.34</td><td>Average</td><td>136</td><td>324</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.90	44.05	54.00	-9.95	42.96	1.09	Average	136	324	2	5352.60	51.96	54.00	-2.04	51.62	0.34	Average	136	324
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.90	44.05	54.00	-9.95	42.96	1.09	Average	136	324																								
2	5352.60	51.96	54.00	-2.04	51.62	0.34	Average	136	324																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

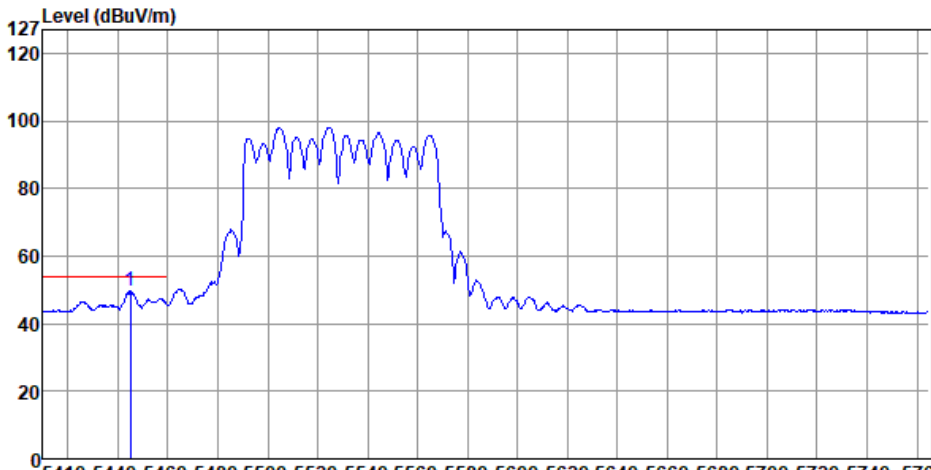
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5530																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																																											
Level (dBuV/m) 127 120 100 80 60 40 20 0 5410 5440.5460.5480.5500.5520.5540.5560.5580.5600.5620.5640.5660.5680.5700.5720.5740. 5765 Frequency (MHz)																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5445.50</td><td>61.76</td><td>74.00</td><td>-12.24</td><td>61.11</td><td>0.65</td><td>Peak</td><td>222</td><td>179</td></tr><tr><td>2</td><td>5465.03</td><td>63.72</td><td>68.20</td><td>-4.48</td><td>63.01</td><td>0.71</td><td>Peak</td><td>222</td><td>179</td></tr><tr><td>3</td><td>5731.99</td><td>56.87</td><td>68.20</td><td>-11.33</td><td>55.73</td><td>1.14</td><td>Peak</td><td>222</td><td>179</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5445.50	61.76	74.00	-12.24	61.11	0.65	Peak	222	179	2	5465.03	63.72	68.20	-4.48	63.01	0.71	Peak	222	179	3	5731.99	56.87	68.20	-11.33	55.73	1.14	Peak	222	179
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5445.50	61.76	74.00	-12.24	61.11	0.65	Peak	222	179																																		
2	5465.03	63.72	68.20	-4.48	63.01	0.71	Peak	222	179																																		
3	5731.99	56.87	68.20	-11.33	55.73	1.14	Peak	222	179																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

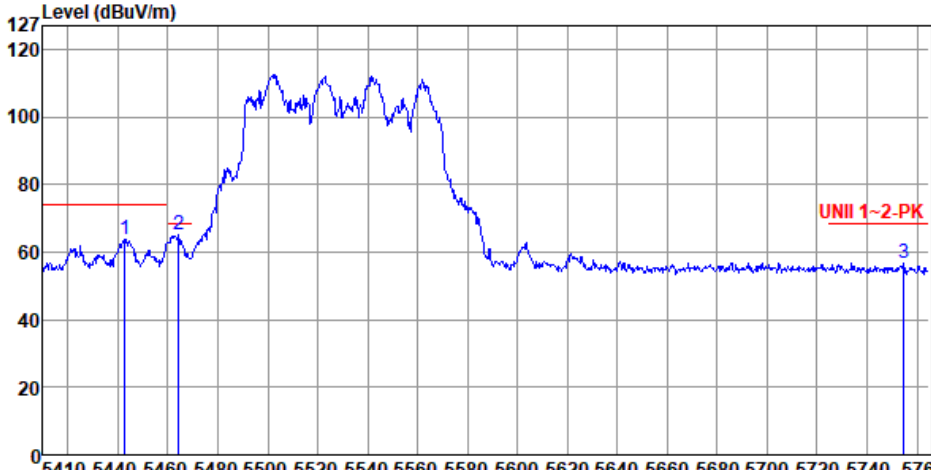
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5530																				
Polarization	Horizontal-Average																						
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																							
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5445.15</td><td>49.61</td><td>54.00</td><td>-4.39</td><td>48.96</td><td>0.65</td><td>Average</td><td>222</td><td>179</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5445.15	49.61	54.00	-4.39	48.96	0.65	Average	222	179
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5445.15	49.61	54.00	-4.39	48.96	0.65	Average	222	179														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

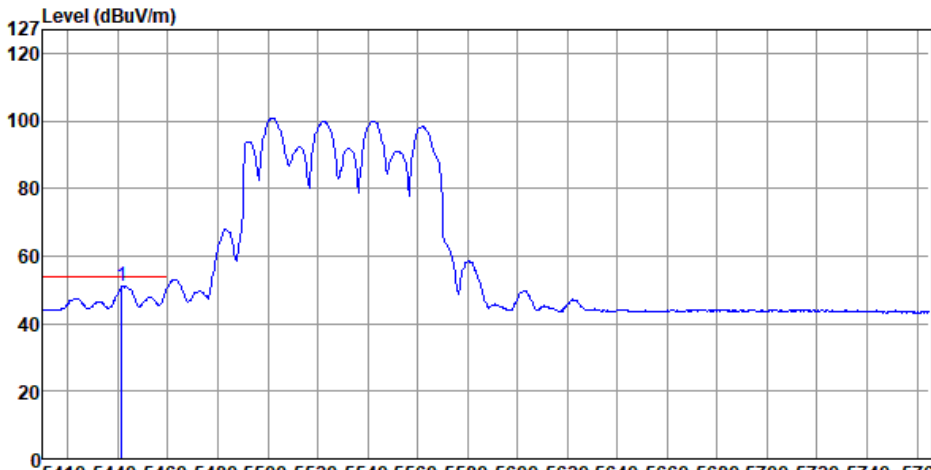
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5530																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5442.66</td><td>63.89</td><td>74.00</td><td>-10.11</td><td>63.25</td><td>0.64</td><td>Peak</td><td>205</td><td>131</td></tr><tr><td>2</td><td>5464.32</td><td>65.10</td><td>68.20</td><td>-3.10</td><td>64.39</td><td>0.71</td><td>Peak</td><td>205</td><td>131</td></tr><tr><td>3</td><td>5754.71</td><td>56.58</td><td>68.20</td><td>-11.62</td><td>55.39</td><td>1.19</td><td>Peak</td><td>205</td><td>131</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5442.66	63.89	74.00	-10.11	63.25	0.64	Peak	205	131	2	5464.32	65.10	68.20	-3.10	64.39	0.71	Peak	205	131	3	5754.71	56.58	68.20	-11.62	55.39	1.19	Peak	205	131
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5442.66	63.89	74.00	-10.11	63.25	0.64	Peak	205	131																																		
2	5464.32	65.10	68.20	-3.10	64.39	0.71	Peak	205	131																																		
3	5754.71	56.58	68.20	-11.62	55.39	1.19	Peak	205	131																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5530																				
Polarization	Vertical-Average																						
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5441.60</td><td>51.10</td><td>54.00</td><td>-2.90</td><td>50.46</td><td>0.64</td><td>Average</td><td>205</td><td>131</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5441.60	51.10	54.00	-2.90	50.46	0.64	Average	205	131
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5441.60	51.10	54.00	-2.90	50.46	0.64	Average	205	131														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

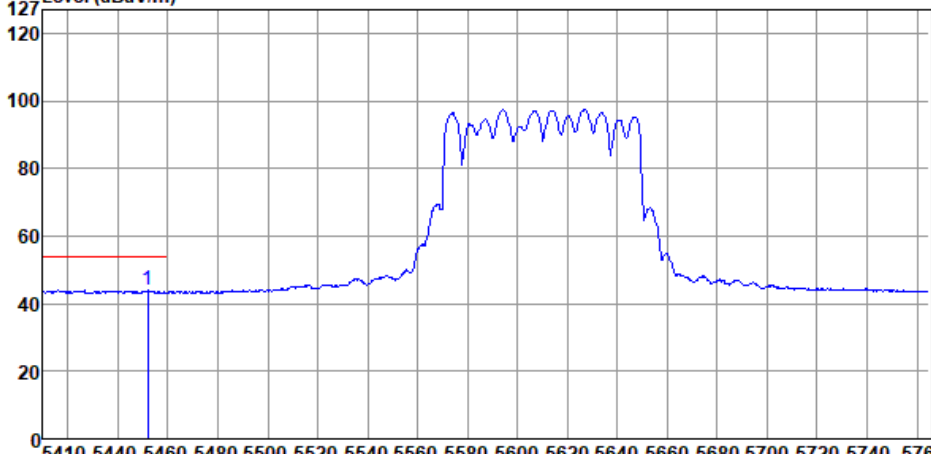
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5610																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5422.78</td><td>56.68</td><td>74.00</td><td>-17.32</td><td>56.13</td><td>0.55</td><td>Peak</td><td>319</td><td>17</td></tr><tr><td>2</td><td>5468.22</td><td>55.34</td><td>68.20</td><td>-12.86</td><td>54.62</td><td>0.72</td><td>Peak</td><td>319</td><td>17</td></tr><tr><td>3</td><td>5758.61</td><td>57.03</td><td>68.20</td><td>-11.17</td><td>55.82</td><td>1.21</td><td>Peak</td><td>319</td><td>17</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5422.78	56.68	74.00	-17.32	56.13	0.55	Peak	319	17	2	5468.22	55.34	68.20	-12.86	54.62	0.72	Peak	319	17	3	5758.61	57.03	68.20	-11.17	55.82	1.21	Peak	319	17
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5422.78	56.68	74.00	-17.32	56.13	0.55	Peak	319	17																																		
2	5468.22	55.34	68.20	-12.86	54.62	0.72	Peak	319	17																																		
3	5758.61	57.03	68.20	-11.17	55.82	1.21	Peak	319	17																																		



Band Edge measurement

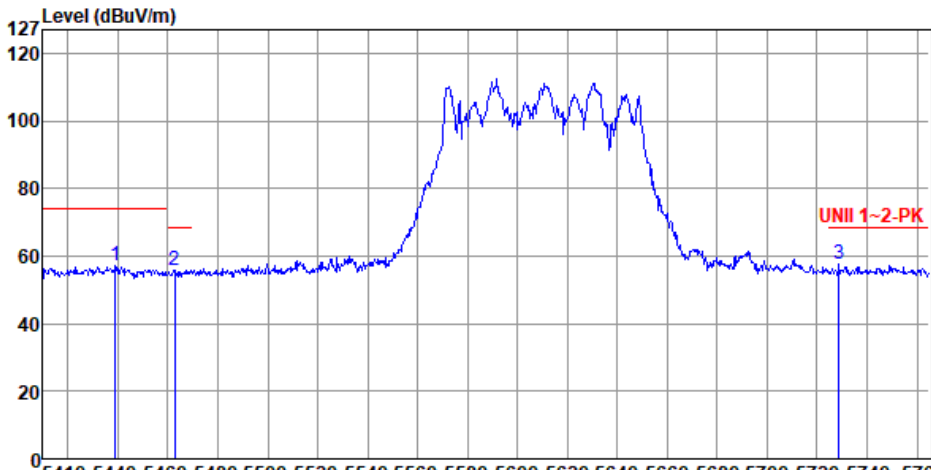
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5610																				
Polarization	Horizontal-Average																						
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																							
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5451.89</td><td>43.84</td><td>54.00</td><td>-10.16</td><td>43.17</td><td>0.67</td><td>Average</td><td>319</td><td>17</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5451.89	43.84	54.00	-10.16	43.17	0.67	Average	319	17
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5451.89	43.84	54.00	-10.16	43.17	0.67	Average	319	17														



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5610																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5439.11</td><td>57.20</td><td>74.00</td><td>-16.80</td><td>56.58</td><td>0.62</td><td>Peak</td><td>222</td><td>325</td></tr><tr><td>2</td><td>5462.90</td><td>55.77</td><td>68.20</td><td>-12.43</td><td>55.06</td><td>0.71</td><td>Peak</td><td>222</td><td>325</td></tr><tr><td>3</td><td>5728.79</td><td>57.54</td><td>68.20</td><td>-10.66</td><td>56.40</td><td>1.14</td><td>Peak</td><td>222</td><td>325</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5439.11	57.20	74.00	-16.80	56.58	0.62	Peak	222	325	2	5462.90	55.77	68.20	-12.43	55.06	0.71	Peak	222	325	3	5728.79	57.54	68.20	-10.66	56.40	1.14	Peak	222	325
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5439.11	57.20	74.00	-16.80	56.58	0.62	Peak	222	325																																		
2	5462.90	55.77	68.20	-12.43	55.06	0.71	Peak	222	325																																		
3	5728.79	57.54	68.20	-10.66	56.40	1.14	Peak	222	325																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

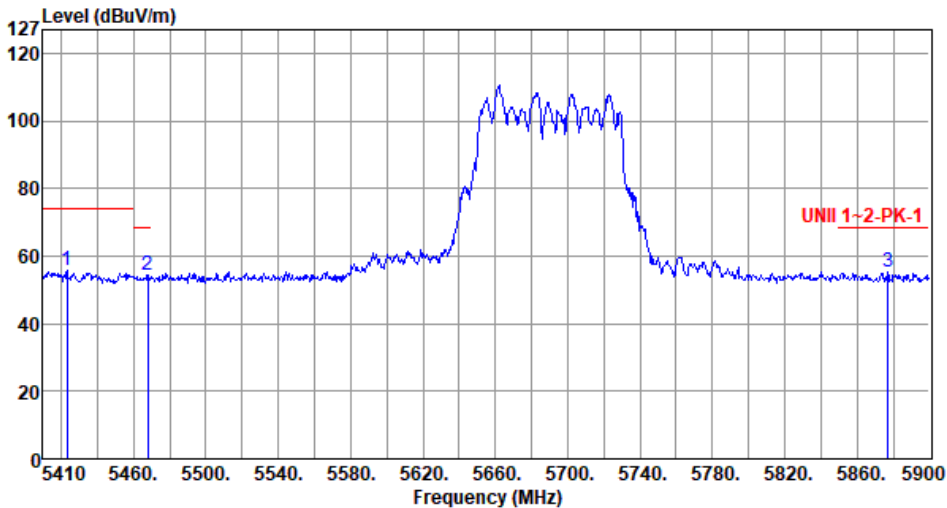
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5610
Polarization	Vertical-Average		
Test By :Brad Wu Temperature(°C):22 Humidity(%):66			
Level (dBUV/m)			



Band Edge measurement

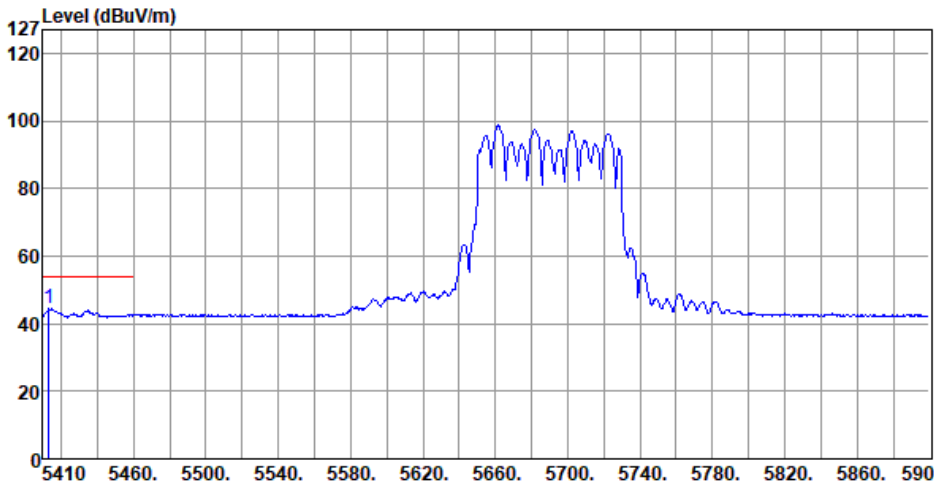
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5690																																								
Polarization	Horizontal-Peak																																										
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5423.23</td><td>55.54</td><td>74.00</td><td>-18.46</td><td>54.99</td><td>0.55</td><td>Peak</td><td>233</td><td>1</td></tr><tr><td>2</td><td>5467.82</td><td>54.38</td><td>68.20</td><td>-13.82</td><td>53.66</td><td>0.72</td><td>Peak</td><td>233</td><td>1</td></tr><tr><td>3</td><td>5876.97</td><td>55.23</td><td>68.20</td><td>-12.97</td><td>53.67</td><td>1.56</td><td>Peak</td><td>233</td><td>1</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5423.23	55.54	74.00	-18.46	54.99	0.55	Peak	233	1	2	5467.82	54.38	68.20	-13.82	53.66	0.72	Peak	233	1	3	5876.97	55.23	68.20	-12.97	53.67	1.56	Peak	233	1
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5423.23	55.54	74.00	-18.46	54.99	0.55	Peak	233	1																																		
2	5467.82	54.38	68.20	-13.82	53.66	0.72	Peak	233	1																																		
3	5876.97	55.23	68.20	-12.97	53.67	1.56	Peak	233	1																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5690																				
Polarization	Horizontal-Average																						
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5413.43</td><td>44.45</td><td>54.00</td><td>-9.55</td><td>43.95</td><td>0.50</td><td>Average</td><td>233</td><td>1</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5413.43	44.45	54.00	-9.55	43.95	0.50	Average	233	1
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5413.43	44.45	54.00	-9.55	43.95	0.50	Average	233	1														



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5690																																								
Polarization	Vertical-Peak																																										
Test By :Tim Chan Temperature(°C):23 Humidity(%):63																																											
Level (dBUV/m) UNII 1-2-PK-1 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5421.76</td><td>58.78</td><td>74.00</td><td>-15.22</td><td>58.23</td><td>0.55</td><td>Peak</td><td>140</td><td>319</td></tr><tr><td>2</td><td>5466.35</td><td>55.61</td><td>68.20</td><td>-12.59</td><td>54.89</td><td>0.72</td><td>Peak</td><td>140</td><td>319</td></tr><tr><td>3</td><td>5881.38</td><td>55.07</td><td>68.20</td><td>-13.13</td><td>53.49</td><td>1.58</td><td>Peak</td><td>140</td><td>319</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5421.76	58.78	74.00	-15.22	58.23	0.55	Peak	140	319	2	5466.35	55.61	68.20	-12.59	54.89	0.72	Peak	140	319	3	5881.38	55.07	68.20	-13.13	53.49	1.58	Peak	140	319
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5421.76	58.78	74.00	-15.22	58.23	0.55	Peak	140	319																																		
2	5466.35	55.61	68.20	-12.59	54.89	0.72	Peak	140	319																																		
3	5881.38	55.07	68.20	-13.13	53.49	1.58	Peak	140	319																																		



Band Edge measurement

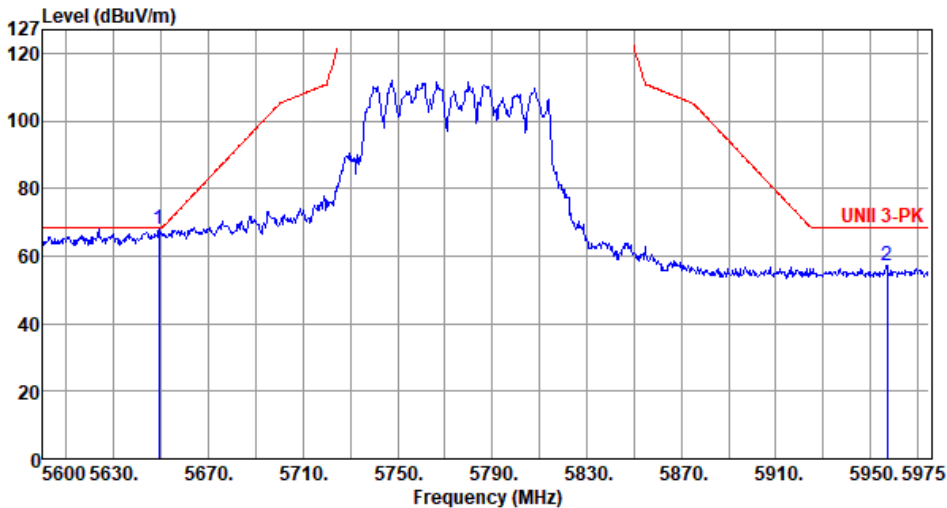
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5690						
Polarization	Vertical-Average								
Test By :Tim Chan Temperature(°C):23 Humidity(%):63									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5422.74	47.17	54.00	-6.83	46.62	0.55	Average	140	319
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Band Edge measurement

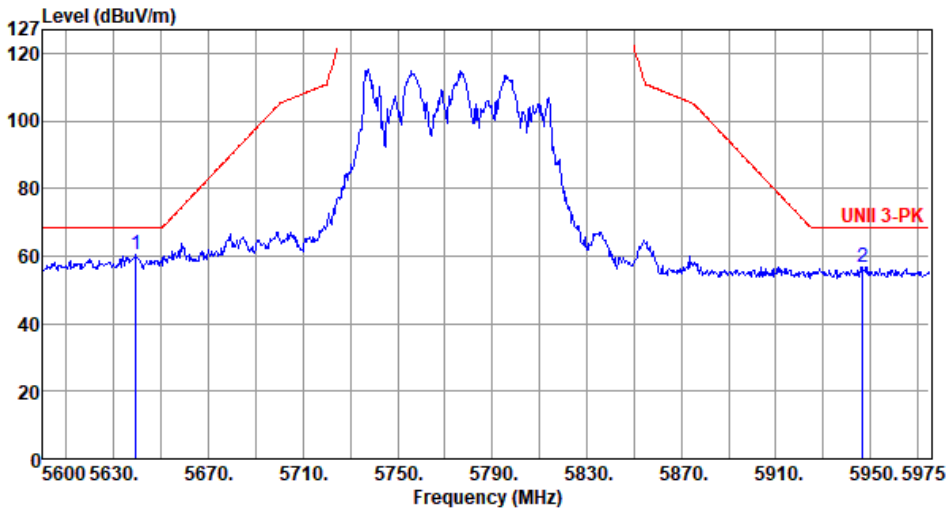
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5775																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5649.13</td><td>67.75</td><td>68.20</td><td>-0.45</td><td>66.81</td><td>0.94</td><td>Peak</td><td>234</td><td>7</td></tr><tr><td>2</td><td>5957.00</td><td>57.20</td><td>68.20</td><td>-11.00</td><td>55.51</td><td>1.69</td><td>Peak</td><td>234</td><td>7</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5649.13	67.75	68.20	-0.45	66.81	0.94	Peak	234	7	2	5957.00	57.20	68.20	-11.00	55.51	1.69	Peak	234	7
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5649.13	67.75	68.20	-0.45	66.81	0.94	Peak	234	7																								
2	5957.00	57.20	68.20	-11.00	55.51	1.69	Peak	234	7																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

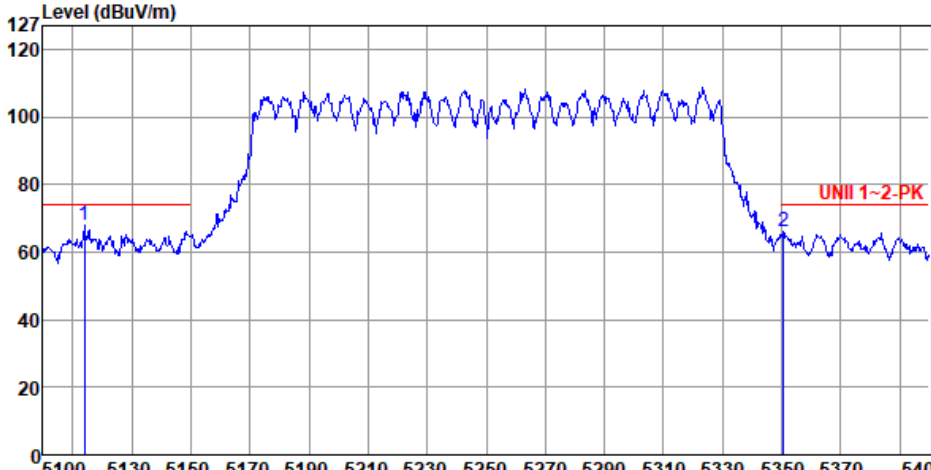
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5775																														
Polarization	Vertical-Peak																																
Test By :Brad Wu- Temperature(°C):22 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5639.38</td><td>60.34</td><td>68.20</td><td>-7.86</td><td>59.43</td><td>0.91</td><td>Peak</td><td>152</td><td>328</td></tr><tr><td>2</td><td>5946.88</td><td>56.65</td><td>68.20</td><td>-11.55</td><td>54.96</td><td>1.69</td><td>Peak</td><td>152</td><td>328</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5639.38	60.34	68.20	-7.86	59.43	0.91	Peak	152	328	2	5946.88	56.65	68.20	-11.55	54.96	1.69	Peak	152	328
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5639.38	60.34	68.20	-7.86	59.43	0.91	Peak	152	328																								
2	5946.88	56.65	68.20	-11.55	54.96	1.69	Peak	152	328																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

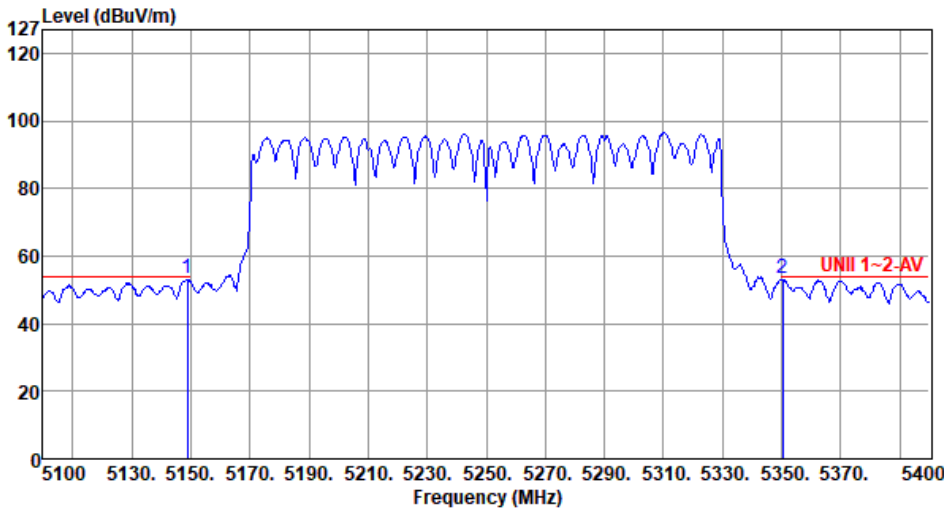
Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5250																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5114.10</td><td>67.92</td><td>74.00</td><td>-6.08</td><td>66.91</td><td>1.01</td><td>Peak</td><td>116</td><td>349</td></tr><tr><td>2</td><td>5350.50</td><td>65.94</td><td>74.00</td><td>-8.06</td><td>65.61</td><td>0.33</td><td>Peak</td><td>190</td><td>8</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5114.10	67.92	74.00	-6.08	66.91	1.01	Peak	116	349	2	5350.50	65.94	74.00	-8.06	65.61	0.33	Peak	190	8
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5114.10	67.92	74.00	-6.08	66.91	1.01	Peak	116	349																								
2	5350.50	65.94	74.00	-8.06	65.61	0.33	Peak	190	8																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

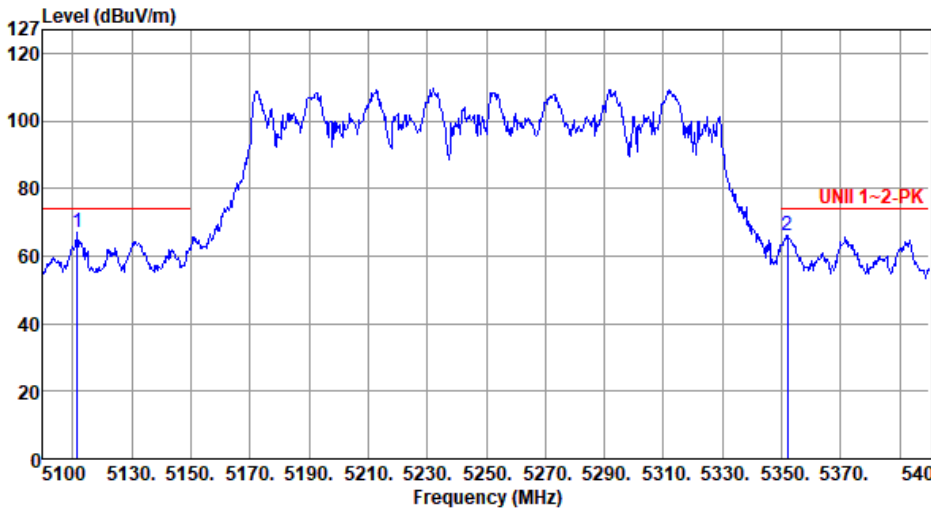
Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5250																														
Polarization	Horizontal-Average																																
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5148.90</td><td>53.53</td><td>54.00</td><td>-0.47</td><td>52.44</td><td>1.09</td><td>Average</td><td>116</td><td>349</td></tr><tr><td>2</td><td>5350.20</td><td>53.45</td><td>54.00</td><td>-0.55</td><td>53.12</td><td>0.33</td><td>Average</td><td>190</td><td>8</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.90	53.53	54.00	-0.47	52.44	1.09	Average	116	349	2	5350.20	53.45	54.00	-0.55	53.12	0.33	Average	190	8
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.90	53.53	54.00	-0.47	52.44	1.09	Average	116	349																								
2	5350.20	53.45	54.00	-0.55	53.12	0.33	Average	190	8																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

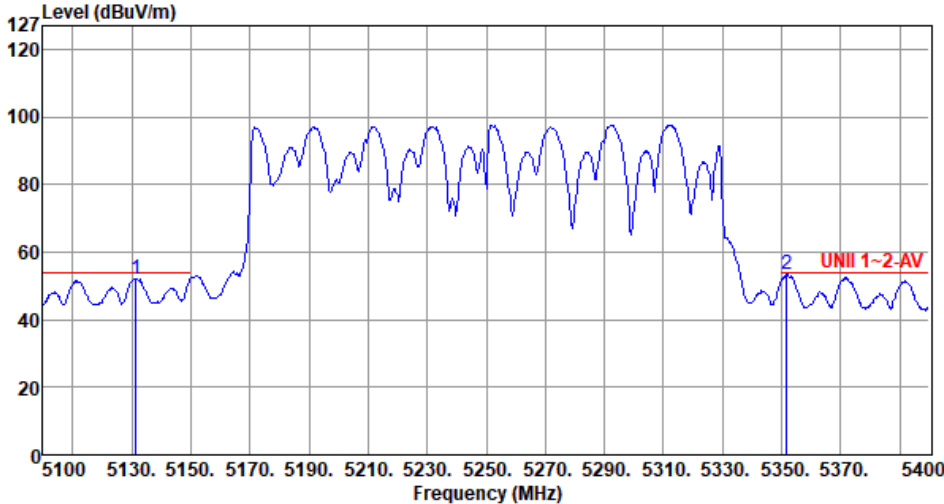
Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5250																														
Polarization	Vertical-Peak																																
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5111.70</td><td>67.10</td><td>74.00</td><td>-6.90</td><td>66.10</td><td>1.00</td><td>Peak</td><td>232</td><td>347</td></tr><tr><td>2</td><td>5352.00</td><td>66.10</td><td>74.00</td><td>-7.90</td><td>65.77</td><td>0.33</td><td>Peak</td><td>171</td><td>326</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5111.70	67.10	74.00	-6.90	66.10	1.00	Peak	232	347	2	5352.00	66.10	74.00	-7.90	65.77	0.33	Peak	171	326
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5111.70	67.10	74.00	-6.90	66.10	1.00	Peak	232	347																								
2	5352.00	66.10	74.00	-7.90	65.77	0.33	Peak	171	326																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

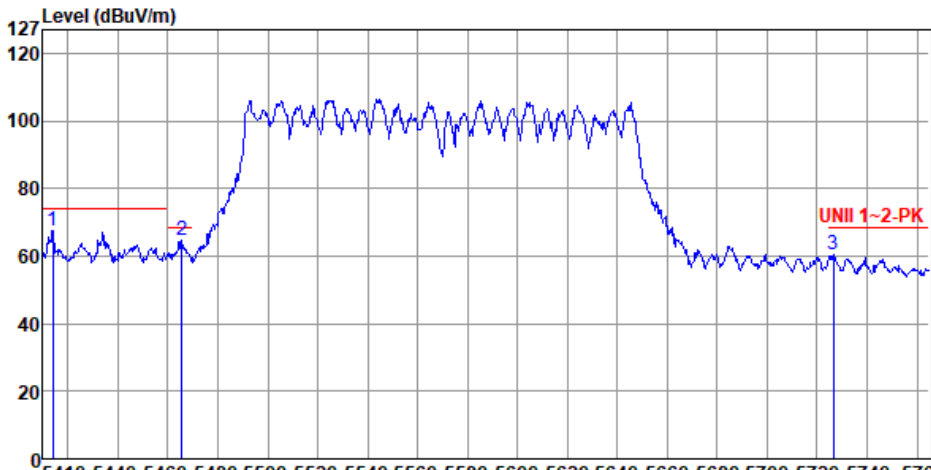
Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5250																														
Polarization	Vertical-Average																																
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5131.50</td><td>52.24</td><td>54.00</td><td>-1.76</td><td>51.19</td><td>1.05</td><td>Average</td><td>232</td><td>347</td></tr><tr><td>2</td><td>5351.70</td><td>53.49</td><td>54.00</td><td>-0.51</td><td>53.16</td><td>0.33</td><td>Average</td><td>171</td><td>326</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5131.50	52.24	54.00	-1.76	51.19	1.05	Average	232	347	2	5351.70	53.49	54.00	-0.51	53.16	0.33	Average	171	326
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5131.50	52.24	54.00	-1.76	51.19	1.05	Average	232	347																								
2	5351.70	53.49	54.00	-0.51	53.16	0.33	Average	171	326																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

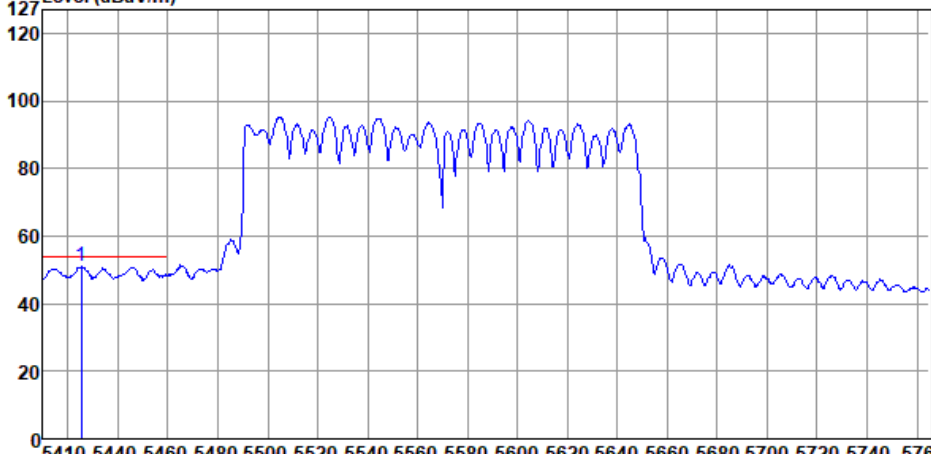
Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5570																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5413.91</td><td>67.65</td><td>74.00</td><td>-6.35</td><td>67.14</td><td>0.51</td><td>Peak</td><td>218</td><td>184</td></tr><tr><td>2</td><td>5465.74</td><td>64.72</td><td>68.20</td><td>-3.48</td><td>64.00</td><td>0.72</td><td>Peak</td><td>218</td><td>184</td></tr><tr><td>3</td><td>5726.66</td><td>60.54</td><td>68.20</td><td>-7.66</td><td>59.41</td><td>1.13</td><td>Peak</td><td>166</td><td>25</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5413.91	67.65	74.00	-6.35	67.14	0.51	Peak	218	184	2	5465.74	64.72	68.20	-3.48	64.00	0.72	Peak	218	184	3	5726.66	60.54	68.20	-7.66	59.41	1.13	Peak	166	25
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5413.91	67.65	74.00	-6.35	67.14	0.51	Peak	218	184																																		
2	5465.74	64.72	68.20	-3.48	64.00	0.72	Peak	218	184																																		
3	5726.66	60.54	68.20	-7.66	59.41	1.13	Peak	166	25																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5570																																								
Polarization	Horizontal-Average																																										
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5425.27</td><td>50.86</td><td>54.00</td><td>-3.14</td><td>50.31</td><td>0.55</td><td>Average</td><td>218</td><td>184</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5425.27	50.86	54.00	-3.14	50.31	0.55	Average	218	184
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																		
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																		
		dBUV/m			dBUV			cm	deg																																		
1	5425.27	50.86	54.00	-3.14	50.31	0.55	Average	218	184																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5570																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5440.53</td><td>67.25</td><td>74.00</td><td>-6.75</td><td>66.62</td><td>0.63</td><td>Peak</td><td>208</td><td>131</td></tr><tr><td>2</td><td>5461.12</td><td>66.76</td><td>68.20</td><td>-1.44</td><td>66.06</td><td>0.70</td><td>Peak</td><td>208</td><td>131</td></tr><tr><td>3</td><td>5745.48</td><td>58.69</td><td>68.20</td><td>-9.51</td><td>57.51</td><td>1.18</td><td>Peak</td><td>208</td><td>131</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5440.53	67.25	74.00	-6.75	66.62	0.63	Peak	208	131	2	5461.12	66.76	68.20	-1.44	66.06	0.70	Peak	208	131	3	5745.48	58.69	68.20	-9.51	57.51	1.18	Peak	208	131
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5440.53	67.25	74.00	-6.75	66.62	0.63	Peak	208	131																																		
2	5461.12	66.76	68.20	-1.44	66.06	0.70	Peak	208	131																																		
3	5745.48	58.69	68.20	-9.51	57.51	1.18	Peak	208	131																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5570																				
Polarization	Vertical-Average																						
Test By :Brad Wu Temperature(°C):22 Humidity(%):66																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5442.31</td><td>53.79</td><td>54.00</td><td>-0.21</td><td>53.15</td><td>0.64</td><td>Average</td><td>208</td><td>131</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5442.31	53.79	54.00	-0.21	53.15	0.64	Average	208	131
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5442.31	53.79	54.00	-0.21	53.15	0.64	Average	208	131														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C V _{max}	1.87	1.73	2.40	1.55
T20°C V _{min}	1.85	1.90	2.00	1.52
T40°C V _{nom}	4.33	4.57	4.29	4.15
T30°C V _{nom}	2.35	2.64	1.96	2.73
T20°C V _{nom}	1.46	1.62	2.20	1.98
T10°C V _{nom}	0.53	0.41	0.78	0.22
T0°C V _{nom}	-1.08	-0.92	-1.05	-1.17

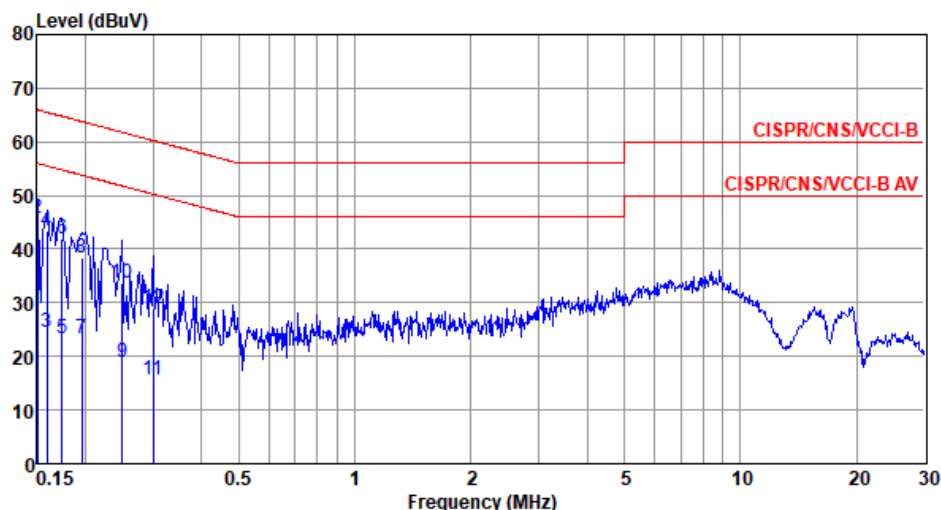
V _{nom} [V]: 120	V _{max} [V]: 132	V _{min} [V]: 108
T _{nom} [°C]: 20	T _{max} [°C]: 40	T _{min} [°C]: 0

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C V _{max}	1.78	1.54	2.14	2.21
T20°C V _{min}	2.37	3.03	2.82	2.38
T40°C V _{nom}	3.87	3.75	4.19	4.30
T30°C V _{nom}	2.19	2.23	2.73	2.31
T20°C V _{nom}	1.18	1.18	0.98	1.35
T10°C V _{nom}	0.55	0.47	1.09	1.16
T0°C V _{nom}	-1.03	-0.89	-1.11	-0.71

V _{nom} [V]: 120	V _{max} [V]: 132	V _{min} [V]: 108
T _{nom} [°C]: 20	T _{max} [°C]: 40	T _{min} [°C]: 0

Modulation Mode	be EHT40	Test Freq. (MHz)	5795
Power Phase	Line		

Test by : Akun Chung_ Temperature: 25°C Humidity: 65%



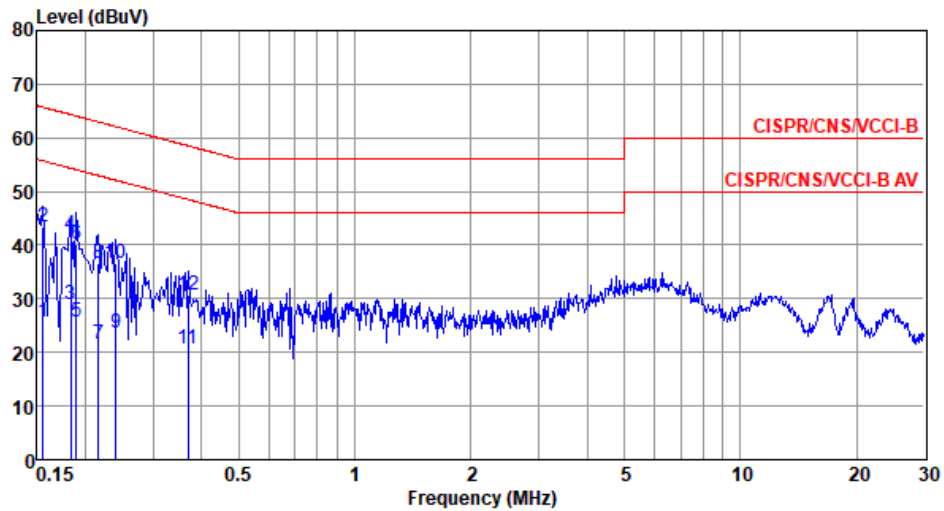
	Freq MHz	Level dBuV	Limit dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.150	29.18	56.00	-26.82	19.40	9.75	0.03	0.00	Average
2*	0.150	45.80	66.00	-20.20	36.02	9.75	0.03	0.00	QP
3	0.159	24.43	55.52	-31.09	14.65	9.75	0.03	0.00	Average
4	0.159	43.32	65.52	-22.20	33.54	9.75	0.03	0.00	QP
5	0.174	23.38	54.77	-31.39	13.59	9.75	0.04	0.00	Average
6	0.174	41.93	64.77	-22.84	32.14	9.75	0.04	0.00	QP
7	0.195	23.43	53.80	-30.37	13.64	9.75	0.04	0.00	Average
8	0.195	38.37	63.80	-25.43	28.58	9.75	0.04	0.00	QP
9	0.249	18.92	51.78	-32.86	9.13	9.75	0.04	0.00	Average
10	0.249	33.66	61.78	-28.12	23.87	9.75	0.04	0.00	QP
11	0.300	15.60	50.24	-34.64	5.81	9.75	0.04	0.00	Average
12	0.300	28.81	60.24	-31.43	19.02	9.75	0.04	0.00	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Modulation Mode	be EHT40	Test Freq. (MHz)	5795
Power Phase	Neutral		

Test by : Akun Chung_ Temperature: 25°C Humidity: 65%



	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.156	25.59	55.69	-30.10	15.82	9.74	0.03	0.00	Average
2*	0.156	43.40	65.69	-22.29	33.63	9.74	0.03	0.00	QP
3	0.183	28.87	54.33	-25.46	19.09	9.74	0.04	0.00	Average
4	0.183	41.98	64.33	-22.35	32.20	9.74	0.04	0.00	QP
5	0.189	25.74	54.06	-28.32	15.96	9.74	0.04	0.00	Average
6	0.189	40.05	64.06	-24.01	30.27	9.74	0.04	0.00	QP
7	0.216	21.45	52.96	-31.51	11.67	9.74	0.04	0.00	Average
8	0.216	36.46	62.96	-26.50	26.68	9.74	0.04	0.00	QP
9	0.240	23.64	52.08	-28.44	13.86	9.74	0.04	0.00	Average
10	0.240	36.62	62.08	-25.46	26.84	9.74	0.04	0.00	QP
11	0.369	20.62	48.52	-27.90	10.83	9.75	0.04	0.00	Average
12	0.369	30.77	58.52	-27.75	20.98	9.75	0.04	0.00	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).