


FCC Co-Location Test Report

FCC ID : 2BV36NR5331
Equipment : 5G NR Indoor Router
Model No. : NR5331
Brand Name : ZYXEL
Applicant : ZYXEL Communications Inc.
Address : 1130 N. Miller Street, Anaheim, CA 92806, USA
Standard : 47 CFR FCC Part 15.247
47 CFR FCC Part 15.407
Received Date : Jan. 14, 2026
Tested Date : Mar. 10 ~ Apr. 20, 2026

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Along Chen / Manager

Approved by:



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	The Equipment List	7
1.3	Test Standards	8
1.4	Reference Guidance	8
1.5	Deviation from Test Standard and Measurement Procedure.....	8
1.6	Measurement Uncertainty	8
2	TEST CONFIGURATION.....	9
2.1	Testing Facility	9
2.2	The Worst Test Modes and Channel Details	9
3	TRANSMITTER TEST RESULTS	10
3.1	Unwanted Emissions into Restricted Frequency Bands	10
4	TEST LABORATORY INFORMATION	14

Appendix A. Unwanted Emissions Into Restricted Frequency Bands

Release Record

Report No.	Version	Description	Issued Date
FR611401CO	Rev. 01	Initial issue	May 08, 2026

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d) 15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 62.01MHz 36.78 (Margin -3.22dB) - QP	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

WLAN	
Operating Frequency	802.11b/g/n/ax/be: 2412 MHz ~ 2462 MHz 802.11a/n/ac/ax/be: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz, 5745 ~ 5825 MHz
Modulation Type	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac/ax/be: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM/ 4096QAM)

The device contains a certified module as below information

FCC ID	XMR2024RG620TNA
LTE	
Operating Frequency	Band 02: 1850 MHz ~ 1910 MHz Band 04: 1710 MHz ~ 1755 MHz Band 05: 824 MHz ~ 849 MHz Band 07: 2500 MHz ~ 2570 MHz Band 12: 699 MHz ~ 716 MHz Band 13: 777 MHz ~ 787 MHz Band 17: 704 MHz ~ 716 MHz Band 25: 1850 MHz ~ 1915 MHz Band 26: 814 MHz ~ 849 MHz Band 29: 717 MHz ~ 728 MHz (DL) Band 66: 1710 MHz ~ 1780 MHz Band 71: 663 MHz ~ 698 MHz Band 41: 2496 MHz ~ 2690 MHz Band 42: 3400 MHz ~ 3600 MHz Band 43: 3600 MHz ~ 3800 MHz
Modulation Type	QPSK / 16QAM / 64QAM / 256QAM
NR	
Operating Frequency	n2: 1850 MHz ~ 1910 MHz n5: 824 MHz ~ 849 MHz n7: 2500 MHz ~ 2570 MHz n25: 1850 MHz ~ 1915 MHz n26: 814 MHz ~ 849 MHz n66: 1710 MHz ~ 1780 MHz n70: 1695 MHz ~ 1710 MHz n71: 663 MHz ~ 698 MHz n41: 2496 MHz ~ 2690 MHz n77: 1432 MHz ~ 1517 MHz (DL) n78: 3300 MHz ~ 3800 MHz
Modulation Type	QPSK / 16QAM / 64AQM / 256QAM for CP-OFDM $\pi/2$ -BPSK / QPSK / 16QAM / 64QAM and 256QAM for DFT-s-OFDM

1.1.2 Antenna Details

Model	Type	Connector	Operating Frequency (MHz) / Gain (dBi)				
			2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850
ANT2G-0/ ANT5G-0(W0)	PIFA	ipex	1.88	3.22	3.32	2.99	3.23
ANT2G-1/ ANT5G-1(W1)	PIFA	ipex	2.67	3.84	3.52	3.09	3.81
ANT2G-2/ ANT5G-2(W2)	PIFA	ipex	2.81	3.86	3.77	3.78	3.67
ANT2G-3/ ANT5G-3(W3)	PIFA	ipex	1.98	2.69	2.53	3.29	3.77
directional gain			4.24	5.46	5	5.03	5.39

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5.0Vdc / 9.0Vdc / 12.0Vdc / 15.0Vdc / 20.0Vdc from AC adapter
--------------------------	---

1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	AC adapter	Brand: LUCENT Model: 1D11-PD36 I/P: 100-240Vac, 50/60Hz, 1.0A O/P: 5.0Vdc 3.0A 15.0W, 9.0Vdc 3.0A 27.0W, 12.0Vdc 3.0A 36.0W, 15.0Vdc 2.4A 36.0W, 20.0Vdc 1.8A, 36.0W Power line: 1.75m non-shielded without core
2	RJ45 cable	1.8m non-shielded without core

1.2 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber3 / (03CH03-WS)				
Tested Date	Apr. 20, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Radio Communication Test Station	Anritsu	MT8000A	6262148276	Sep. 23, 2025	Sep. 22, 2026
Receiver	R&S	ESR3	101657	Apr. 02, 2026	Apr. 01, 2027
Spectrum Analyzer	R&S	FSV40	101499	Apr. 13, 2026	Apr. 12, 2027
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 17, 2025	Nov. 16, 2026
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Jul. 04, 2025	Jul. 03, 2026
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Jan. 23, 2026	Jan. 22, 2027
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 28, 2025	Nov. 27, 2026
Preamplifier	EMC	EMC02325	980187	Jun. 24, 2025	Jun. 23, 2026
Preamplifier	EMC	EMC118A45SE	980897	Aug. 08, 2025	Aug. 07, 2026
Preamplifier	EMC	EMC184045SE	980903	Aug. 08, 2025	Aug. 07, 2026
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 01, 2025	Sep. 30, 2026
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Sep. 19, 2025	Sep. 18, 2026
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Sep. 19, 2025	Sep. 18, 2026
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Sep. 19, 2025	Sep. 18, 2026
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 19, 2025	Sep. 18, 2026
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Sep. 19, 2025	Sep. 18, 2026
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Sep. 19, 2025	Sep. 18, 2026
Attenuator	Pasternack	PE7005-10	10-3	Sep. 19, 2025	Sep. 18, 2026
HIGHPASS FILTER	K&L	11SH10-7000/T1800 O-O/OP	21	Sep. 19, 2025	Sep. 18, 2026
HIGHPASS FILTER	WI	WHK3.1-18G-10SS	43	Sep. 19, 2025	Sep. 18, 2026
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Mar. 10, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV3044	101516	Jun. 09, 2025	Jun. 08, 2026
Power Meter	Anritsu	ML2495A	1241002	Nov. 21, 2025	Nov. 20, 2026
Power Sensor	Anritsu	MA2411B	1207366	Nov. 21, 2025	Nov. 20, 2026
Attenuator	Pasternack	PE7005-10	10-2	Oct. 03, 2025	Oct. 02, 2026
Note: Calibration Interval of instruments listed above is one year.					

1.3 Test Standards

47 CFR FCC Part 15.247
47 CFR FCC Part 15.407
ANSI C63.10-2020 + Cor.1-2023
ANSI C63.4-2014 + C63.4a-2017

1.4 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02
FCC KDB 662911 D01 Multiple Transmitter Output v02r01
FCC KDB 412172 D01 Determining ERP and EIRP v01r01
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

1.5 Deviation from Test Standard and Measurement Procedure

None

1.6 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Unwanted Emission $\leq$ 1GHz	± 3.96 dB
Unwanted Emission $>$ 1GHz	± 4.51 dB

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)
Test Site	03CH03-WS
Address of Test Site	No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISSED#: 10807C
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode
Unwanted Emissions Conducted Emissions	Mode 1: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + WWAN 4G LTE B26 BW:1.4M 824.7MHz CH26797
	Mode 2: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + WWAN 5G NR n2 MIMO BW:20M 1860MHz CH372000
	Mode 3: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + WWAN 5G NR n41MIMO BW:50M 2592.99MHz CH518598
	Mode 4: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + WWAN 5G NR n70 BW:15M 1702.5MHz CH340500
	Mode 5: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + WWAN 5G NR n71 BW:5M 665.5MHz CH133100
	Mode 6: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + WWAN 5G NR n78_3450-3550 BW:90M 3504.99MHz CH633666
	Mode 7: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + WWAN 5G NR n78_3450-3550_MIMO BW:60M 3500.01MHz CH633334
NOTE: The selected channel is the maximum power channel of radio mode.	

3 Transmitter Test Results

3.1 Unwanted Emissions into Restricted Frequency Bands

3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.850 GHz	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.1.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.1.3 Test Setup


Radiated Emissions below 1 GHz

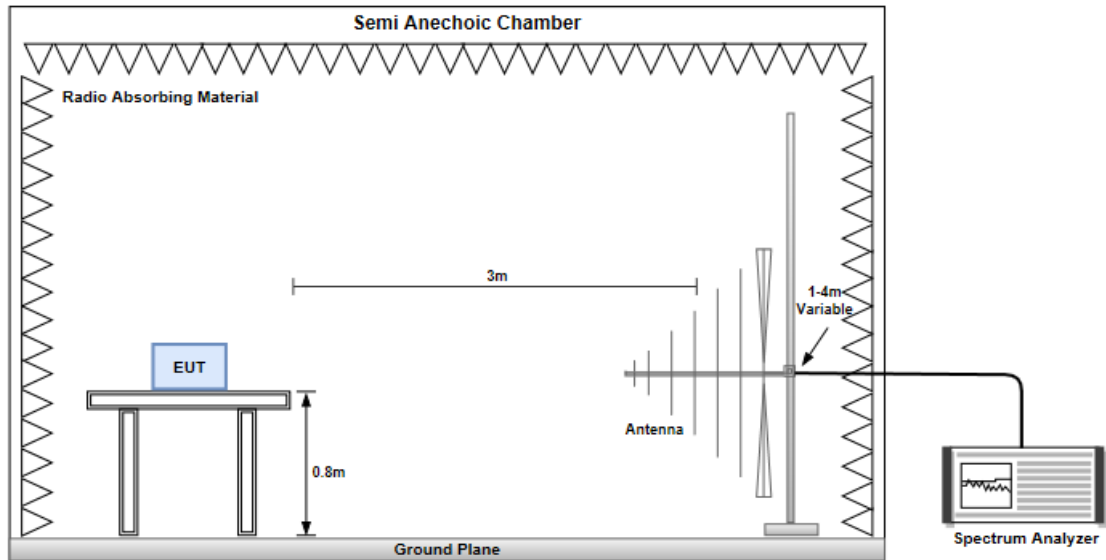

Radiated Emissions above 1 GHz

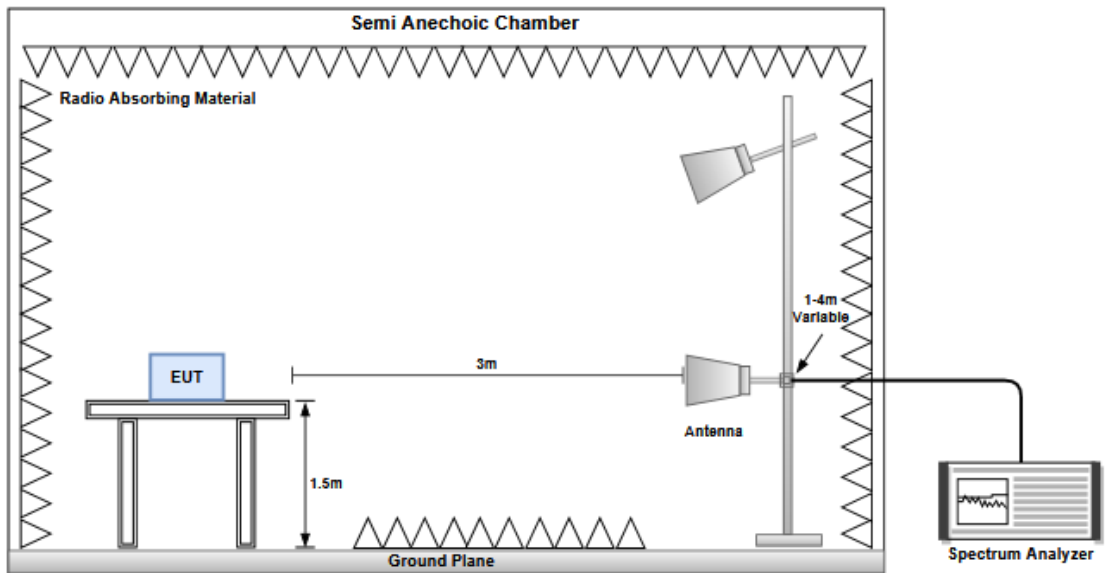

Conducted Unwanted Emissions (30MHz~40GHz)



3.1.4 Test Results

Refer to Appendix A.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <https://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Zhonghe

Tel: 886-2-2222-0288

1F, No. 6, Jiankang Road, Zhonghe
District, New Taipei City 235045,
Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.


Tel: 886-3-271-8666


Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw


==END==

Unwanted Emissions (Below 1GHz)

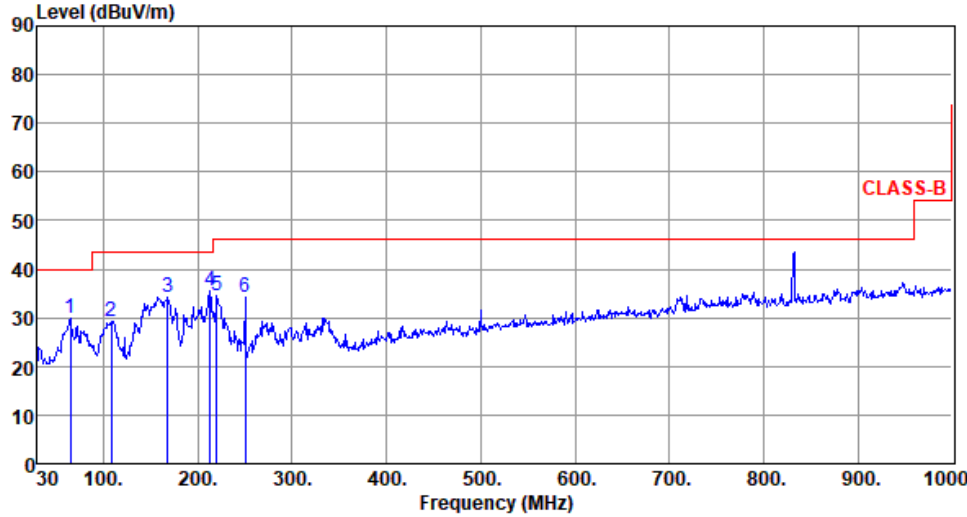
Modulation	Mode 1: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + WWAN 4G LTE B26 BW:1.4M 824.7MHz CH26797																																																																														
Polarization	Horizontal																																																																														
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																																															
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>64.92</td><td>29.89</td><td>40.00</td><td>-10.11</td><td>39.92</td><td>-10.03</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>108.57</td><td>29.35</td><td>43.50</td><td>-14.15</td><td>41.17</td><td>-11.82</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>167.74</td><td>34.34</td><td>43.50</td><td>-9.16</td><td>43.17</td><td>-8.83</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>213.33</td><td>35.49</td><td>43.50</td><td>-8.01</td><td>47.12</td><td>-11.63</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>220.12</td><td>34.45</td><td>46.00</td><td>-11.55</td><td>46.17</td><td>-11.72</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>250.19</td><td>34.06</td><td>46.00</td><td>-11.94</td><td>43.53</td><td>-9.47</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	64.92	29.89	40.00	-10.11	39.92	-10.03	Peak	---	---	2	108.57	29.35	43.50	-14.15	41.17	-11.82	Peak	---	---	3	167.74	34.34	43.50	-9.16	43.17	-8.83	Peak	---	---	4	213.33	35.49	43.50	-8.01	47.12	-11.63	Peak	---	---	5	220.12	34.45	46.00	-11.55	46.17	-11.72	Peak	---	---	6	250.19	34.06	46.00	-11.94	43.53	-9.47	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	64.92	29.89	40.00	-10.11	39.92	-10.03	Peak	---	---																																																																						
2	108.57	29.35	43.50	-14.15	41.17	-11.82	Peak	---	---																																																																						
3	167.74	34.34	43.50	-9.16	43.17	-8.83	Peak	---	---																																																																						
4	213.33	35.49	43.50	-8.01	47.12	-11.63	Peak	---	---																																																																						
5	220.12	34.45	46.00	-11.55	46.17	-11.72	Peak	---	---																																																																						
6	250.19	34.06	46.00	-11.94	43.53	-9.47	Peak	---	---																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																															

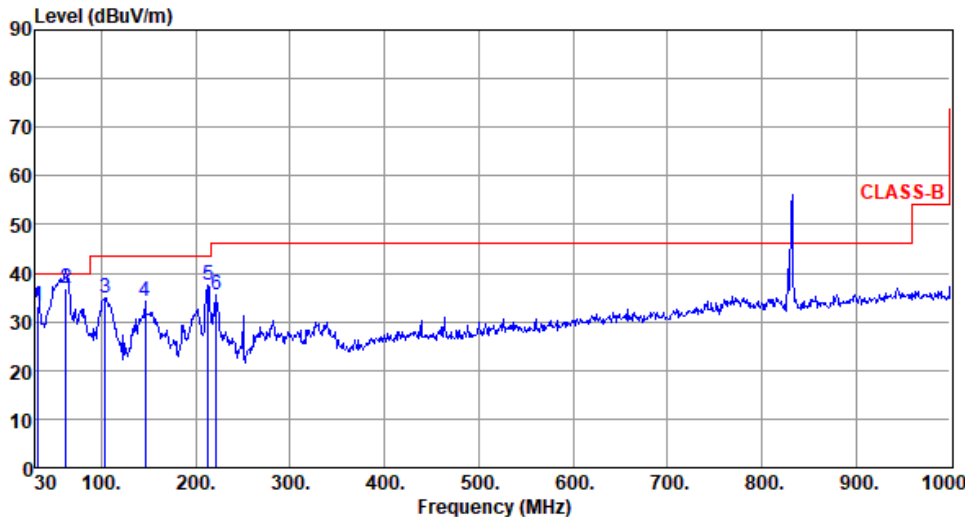Modulation	Mode 1: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + WWAN 4G LTE B26 BW:1.4M 824.7MHz CH26797																																																																														
Polarization	Vertical																																																																														
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																																															
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>32.91</td><td>33.06</td><td>40.00</td><td>-6.94</td><td>43.35</td><td>-10.29</td><td>QP</td><td>100</td><td>200</td></tr><tr><td>2</td><td>62.01</td><td>36.78</td><td>40.00</td><td>-3.22</td><td>46.33</td><td>-9.55</td><td>QP</td><td>100</td><td>322</td></tr><tr><td>3</td><td>103.72</td><td>34.82</td><td>43.50</td><td>-8.68</td><td>47.44</td><td>-12.62</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>146.40</td><td>34.33</td><td>43.50</td><td>-9.17</td><td>42.74</td><td>-8.41</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>213.33</td><td>37.62</td><td>43.50</td><td>-5.88</td><td>49.25</td><td>-11.63</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>222.06</td><td>35.61</td><td>46.00</td><td>-10.39</td><td>47.32</td><td>-11.71</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	32.91	33.06	40.00	-6.94	43.35	-10.29	QP	100	200	2	62.01	36.78	40.00	-3.22	46.33	-9.55	QP	100	322	3	103.72	34.82	43.50	-8.68	47.44	-12.62	Peak	---	---	4	146.40	34.33	43.50	-9.17	42.74	-8.41	Peak	---	---	5	213.33	37.62	43.50	-5.88	49.25	-11.63	Peak	---	---	6	222.06	35.61	46.00	-10.39	47.32	-11.71	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	32.91	33.06	40.00	-6.94	43.35	-10.29	QP	100	200																																																																						
2	62.01	36.78	40.00	-3.22	46.33	-9.55	QP	100	322																																																																						
3	103.72	34.82	43.50	-8.68	47.44	-12.62	Peak	---	---																																																																						
4	146.40	34.33	43.50	-9.17	42.74	-8.41	Peak	---	---																																																																						
5	213.33	37.62	43.50	-5.88	49.25	-11.63	Peak	---	---																																																																						
6	222.06	35.61	46.00	-10.39	47.32	-11.71	Peak	---	---																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit. Note 4: The signal exceeding the limit is the fundamental frequency.																																																																															

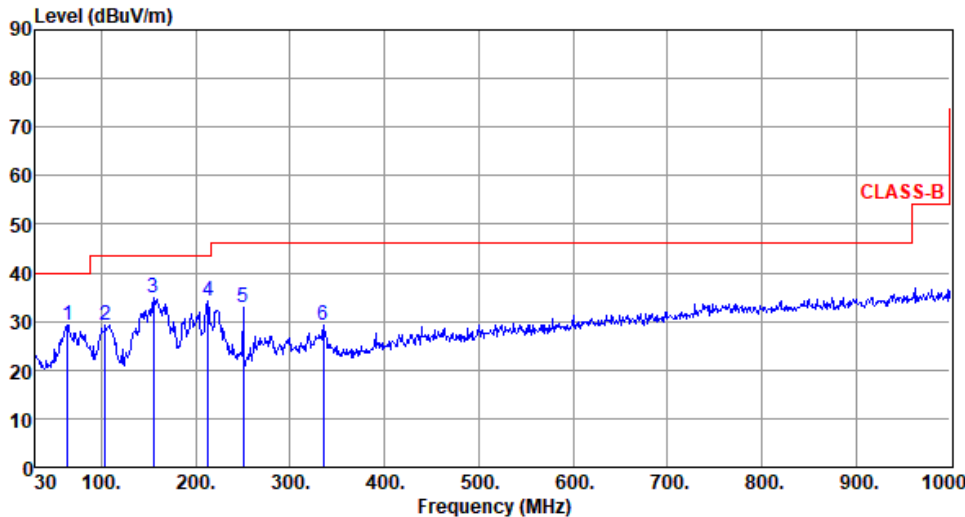


Modulation	Mode 2: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n2 MIMO BW:20M 1860MHz CH372000																																																																																																		
Polarization	Horizontal																																																																																																		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																																																																			
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>63.95</td><td>29.34</td><td>40.00</td><td>-10.66</td><td>39.09</td><td>-9.75</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>103.72</td><td>29.14</td><td>43.50</td><td>-14.36</td><td>41.76</td><td>-12.62</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>155.13</td><td>34.85</td><td>43.50</td><td>-8.65</td><td>43.14</td><td>-8.29</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>213.33</td><td>34.24</td><td>43.50</td><td>-9.26</td><td>45.87</td><td>-11.63</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>250.19</td><td>32.97</td><td>46.00</td><td>-13.03</td><td>42.44</td><td>-9.47</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>335.55</td><td>29.13</td><td>46.00</td><td>-16.87</td><td>35.67</td><td>-6.54</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	63.95	29.34	40.00	-10.66	39.09	-9.75	Peak	---	---	2	103.72	29.14	43.50	-14.36	41.76	-12.62	Peak	---	---	3	155.13	34.85	43.50	-8.65	43.14	-8.29	Peak	---	---	4	213.33	34.24	43.50	-9.26	45.87	-11.63	Peak	---	---	5	250.19	32.97	46.00	-13.03	42.44	-9.47	Peak	---	---	6	335.55	29.13	46.00	-16.87	35.67	-6.54	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	63.95	29.34	40.00	-10.66	39.09	-9.75	Peak	---	---																																																																																										
2	103.72	29.14	43.50	-14.36	41.76	-12.62	Peak	---	---																																																																																										
3	155.13	34.85	43.50	-8.65	43.14	-8.29	Peak	---	---																																																																																										
4	213.33	34.24	43.50	-9.26	45.87	-11.63	Peak	---	---																																																																																										
5	250.19	32.97	46.00	-13.03	42.44	-9.47	Peak	---	---																																																																																										
6	335.55	29.13	46.00	-16.87	35.67	-6.54	Peak	---	---																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																			

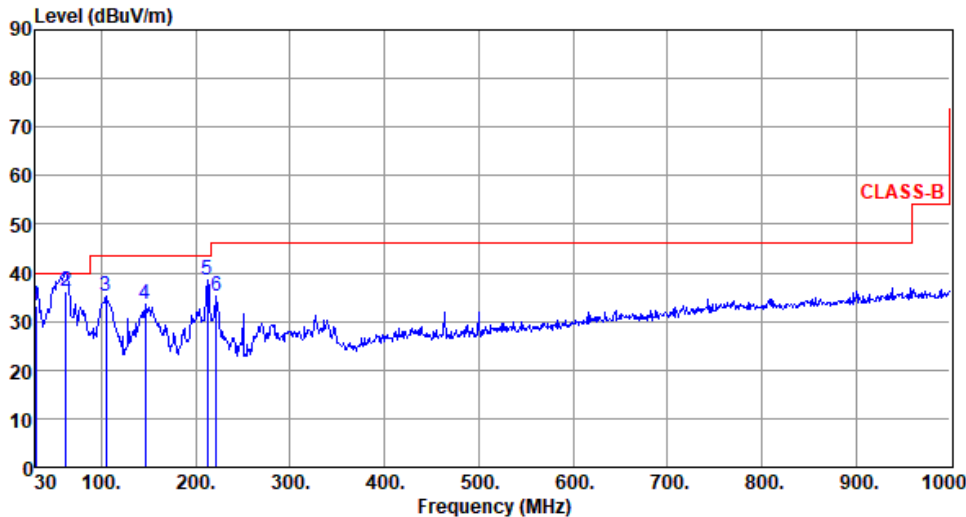


Modulation	Mode 2: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n2 MIMO BW:20M 1860MHz CH372000																																																																														
Polarization	Vertical																																																																														
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																																															
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>30.00</td><td>33.29</td><td>40.00</td><td>-6.71</td><td>43.34</td><td>-10.05</td><td>QP</td><td>100</td><td>202</td></tr><tr><td>2</td><td>62.01</td><td>36.15</td><td>40.00</td><td>-3.85</td><td>45.70</td><td>-9.55</td><td>QP</td><td>100</td><td>313</td></tr><tr><td>3</td><td>104.69</td><td>35.08</td><td>43.50</td><td>-8.42</td><td>47.49</td><td>-12.41</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>146.40</td><td>33.44</td><td>43.50</td><td>-10.06</td><td>41.85</td><td>-8.41</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>212.36</td><td>38.48</td><td>43.50</td><td>-5.02</td><td>50.09</td><td>-11.61</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>222.06</td><td>35.13</td><td>46.00</td><td>-10.87</td><td>46.84</td><td>-11.71</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	30.00	33.29	40.00	-6.71	43.34	-10.05	QP	100	202	2	62.01	36.15	40.00	-3.85	45.70	-9.55	QP	100	313	3	104.69	35.08	43.50	-8.42	47.49	-12.41	Peak	---	---	4	146.40	33.44	43.50	-10.06	41.85	-8.41	Peak	---	---	5	212.36	38.48	43.50	-5.02	50.09	-11.61	Peak	---	---	6	222.06	35.13	46.00	-10.87	46.84	-11.71	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	30.00	33.29	40.00	-6.71	43.34	-10.05	QP	100	202																																																																						
2	62.01	36.15	40.00	-3.85	45.70	-9.55	QP	100	313																																																																						
3	104.69	35.08	43.50	-8.42	47.49	-12.41	Peak	---	---																																																																						
4	146.40	33.44	43.50	-10.06	41.85	-8.41	Peak	---	---																																																																						
5	212.36	38.48	43.50	-5.02	50.09	-11.61	Peak	---	---																																																																						
6	222.06	35.13	46.00	-10.87	46.84	-11.71	Peak	---	---																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																															

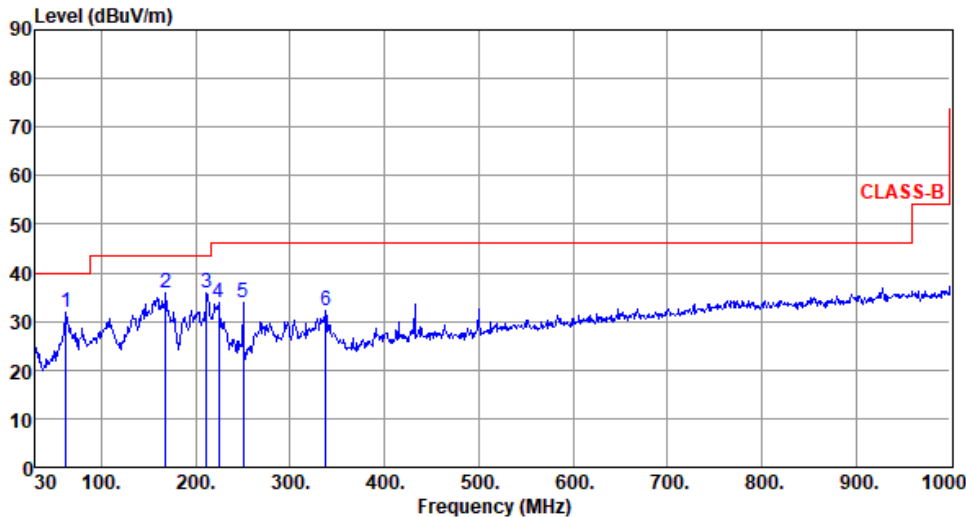


Modulation	Mode 3: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n41MIMO BW:50M 2592.99MHz CH518598																																																																																																		
Polarization	Horizontal																																																																																																		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																																																																			
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>62.01</td><td>32.00</td><td>40.00</td><td>-8.00</td><td>41.55</td><td>-9.55</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>167.74</td><td>36.03</td><td>43.50</td><td>-7.47</td><td>44.86</td><td>-8.83</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>211.39</td><td>35.89</td><td>43.50</td><td>-7.61</td><td>47.49</td><td>-11.60</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>224.00</td><td>33.79</td><td>46.00</td><td>-12.21</td><td>45.49</td><td>-11.70</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>250.19</td><td>33.87</td><td>46.00</td><td>-12.13</td><td>43.34</td><td>-9.47</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>337.49</td><td>32.18</td><td>46.00</td><td>-13.82</td><td>38.66</td><td>-6.48</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1	62.01	32.00	40.00	-8.00	41.55	-9.55	Peak	---	---	2	167.74	36.03	43.50	-7.47	44.86	-8.83	Peak	---	---	3	211.39	35.89	43.50	-7.61	47.49	-11.60	Peak	---	---	4	224.00	33.79	46.00	-12.21	45.49	-11.70	Peak	---	---	5	250.19	33.87	46.00	-12.13	43.34	-9.47	Peak	---	---	6	337.49	32.18	46.00	-13.82	38.66	-6.48	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
					dBuV			cm	deg																																																																																										
1	62.01	32.00	40.00	-8.00	41.55	-9.55	Peak	---	---																																																																																										
2	167.74	36.03	43.50	-7.47	44.86	-8.83	Peak	---	---																																																																																										
3	211.39	35.89	43.50	-7.61	47.49	-11.60	Peak	---	---																																																																																										
4	224.00	33.79	46.00	-12.21	45.49	-11.70	Peak	---	---																																																																																										
5	250.19	33.87	46.00	-12.13	43.34	-9.47	Peak	---	---																																																																																										
6	337.49	32.18	46.00	-13.82	38.66	-6.48	Peak	---	---																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																			

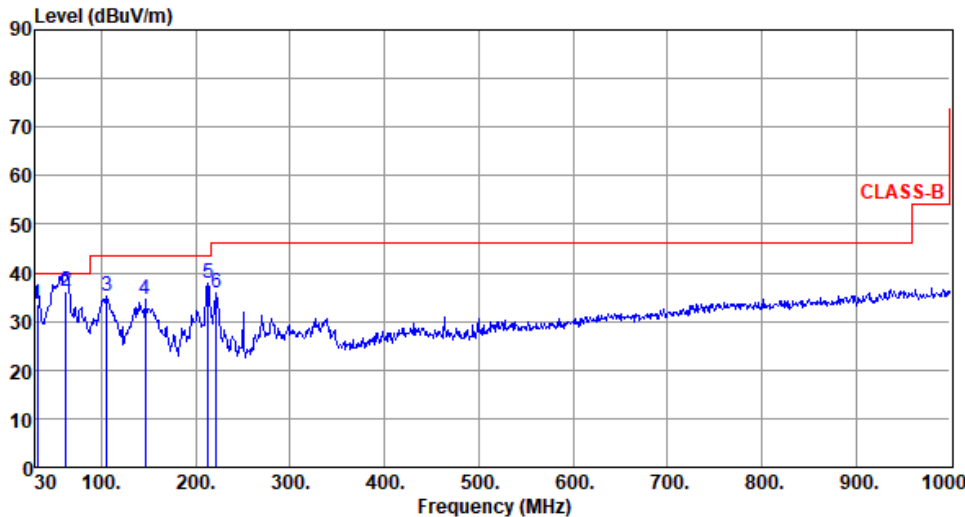



Modulation	Mode 3: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n41MIMO BW:50M 2592.99MHz CH518598																																																																																																		
Polarization	Vertical																																																																																																		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																																																																			
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>31.94</td><td>33.71</td><td>40.00</td><td>-6.29</td><td>43.93</td><td>-10.22</td><td>QP</td><td>100</td><td>208</td></tr><tr><td>2</td><td>62.01</td><td>36.05</td><td>40.00</td><td>-3.95</td><td>45.60</td><td>-9.55</td><td>QP</td><td>100</td><td>310</td></tr><tr><td>3</td><td>105.66</td><td>35.36</td><td>43.50</td><td>-8.14</td><td>47.70</td><td>-12.34</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>146.40</td><td>34.54</td><td>43.50</td><td>-8.96</td><td>42.95</td><td>-8.41</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>213.33</td><td>37.94</td><td>43.50</td><td>-5.56</td><td>49.57</td><td>-11.63</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>222.06</td><td>35.87</td><td>46.00</td><td>-10.13</td><td>47.58</td><td>-11.71</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	31.94	33.71	40.00	-6.29	43.93	-10.22	QP	100	208	2	62.01	36.05	40.00	-3.95	45.60	-9.55	QP	100	310	3	105.66	35.36	43.50	-8.14	47.70	-12.34	Peak	---	---	4	146.40	34.54	43.50	-8.96	42.95	-8.41	Peak	---	---	5	213.33	37.94	43.50	-5.56	49.57	-11.63	Peak	---	---	6	222.06	35.87	46.00	-10.13	47.58	-11.71	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	31.94	33.71	40.00	-6.29	43.93	-10.22	QP	100	208																																																																																										
2	62.01	36.05	40.00	-3.95	45.60	-9.55	QP	100	310																																																																																										
3	105.66	35.36	43.50	-8.14	47.70	-12.34	Peak	---	---																																																																																										
4	146.40	34.54	43.50	-8.96	42.95	-8.41	Peak	---	---																																																																																										
5	213.33	37.94	43.50	-5.56	49.57	-11.63	Peak	---	---																																																																																										
6	222.06	35.87	46.00	-10.13	47.58	-11.71	Peak	---	---																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																			

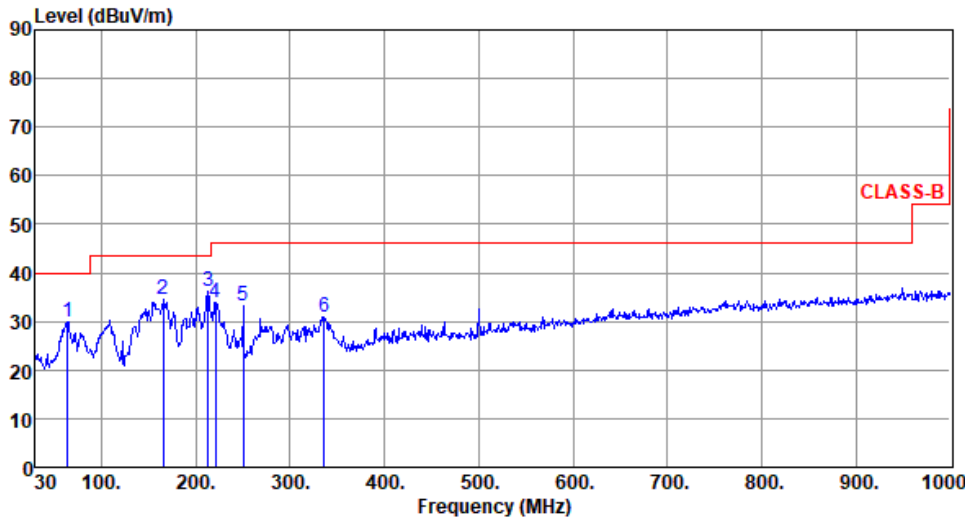


Modulation	Mode 4: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n70 BW:15M 1702.5MHz CH340500																																																																																																		
Polarization	Horizontal																																																																																																		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																																																																			
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>63.95</td><td>30.01</td><td>40.00</td><td>-9.99</td><td>39.76</td><td>-9.75</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>165.80</td><td>34.39</td><td>43.50</td><td>-9.11</td><td>43.21</td><td>-8.82</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>213.33</td><td>36.12</td><td>43.50</td><td>-7.38</td><td>47.75</td><td>-11.63</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>221.09</td><td>34.00</td><td>46.00</td><td>-12.00</td><td>45.72</td><td>-11.72</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>250.19</td><td>33.20</td><td>46.00</td><td>-12.80</td><td>42.67</td><td>-9.47</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>336.52</td><td>30.94</td><td>46.00</td><td>-15.06</td><td>37.46</td><td>-6.52</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	63.95	30.01	40.00	-9.99	39.76	-9.75	Peak	---	---	2	165.80	34.39	43.50	-9.11	43.21	-8.82	Peak	---	---	3	213.33	36.12	43.50	-7.38	47.75	-11.63	Peak	---	---	4	221.09	34.00	46.00	-12.00	45.72	-11.72	Peak	---	---	5	250.19	33.20	46.00	-12.80	42.67	-9.47	Peak	---	---	6	336.52	30.94	46.00	-15.06	37.46	-6.52	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	63.95	30.01	40.00	-9.99	39.76	-9.75	Peak	---	---																																																																																										
2	165.80	34.39	43.50	-9.11	43.21	-8.82	Peak	---	---																																																																																										
3	213.33	36.12	43.50	-7.38	47.75	-11.63	Peak	---	---																																																																																										
4	221.09	34.00	46.00	-12.00	45.72	-11.72	Peak	---	---																																																																																										
5	250.19	33.20	46.00	-12.80	42.67	-9.47	Peak	---	---																																																																																										
6	336.52	30.94	46.00	-15.06	37.46	-6.52	Peak	---	---																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																			

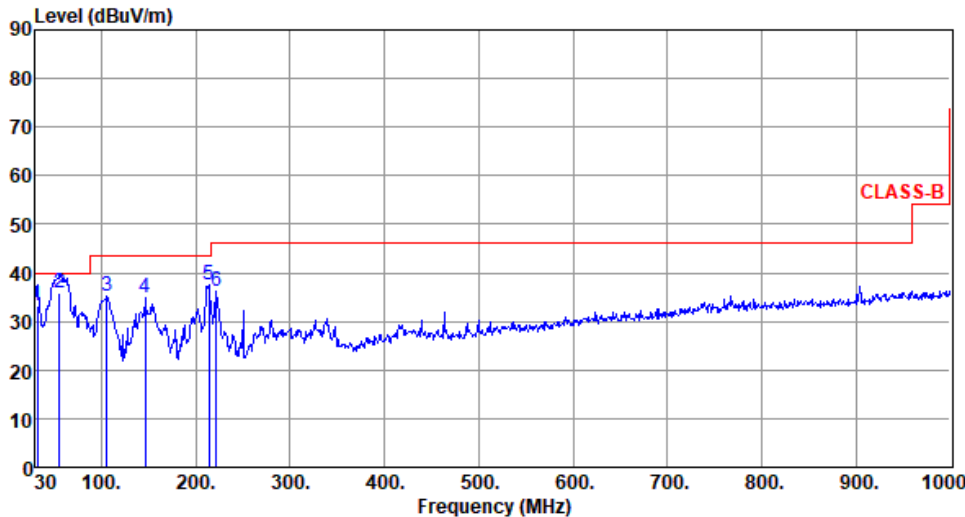


Modulation	Mode 4: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n70 BW:15M 1702.5MHz CH340500																																																																																																		
Polarization	Vertical																																																																																																		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																																																																			
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>32.11</td><td>33.26</td><td>40.00</td><td>-6.74</td><td>43.48</td><td>-10.22</td><td>QP</td><td>100</td><td>211</td></tr><tr><td>2</td><td>55.22</td><td>35.98</td><td>40.00</td><td>-4.02</td><td>44.60</td><td>-8.62</td><td>QP</td><td>100</td><td>33</td></tr><tr><td>3</td><td>105.66</td><td>35.05</td><td>43.50</td><td>-8.45</td><td>47.39</td><td>-12.34</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>146.40</td><td>34.73</td><td>43.50</td><td>-8.77</td><td>43.14</td><td>-8.41</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>214.30</td><td>37.62</td><td>43.50</td><td>-5.88</td><td>49.26</td><td>-11.64</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>222.06</td><td>36.05</td><td>46.00</td><td>-9.95</td><td>47.76</td><td>-11.71</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	32.11	33.26	40.00	-6.74	43.48	-10.22	QP	100	211	2	55.22	35.98	40.00	-4.02	44.60	-8.62	QP	100	33	3	105.66	35.05	43.50	-8.45	47.39	-12.34	Peak	---	---	4	146.40	34.73	43.50	-8.77	43.14	-8.41	Peak	---	---	5	214.30	37.62	43.50	-5.88	49.26	-11.64	Peak	---	---	6	222.06	36.05	46.00	-9.95	47.76	-11.71	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	32.11	33.26	40.00	-6.74	43.48	-10.22	QP	100	211																																																																																										
2	55.22	35.98	40.00	-4.02	44.60	-8.62	QP	100	33																																																																																										
3	105.66	35.05	43.50	-8.45	47.39	-12.34	Peak	---	---																																																																																										
4	146.40	34.73	43.50	-8.77	43.14	-8.41	Peak	---	---																																																																																										
5	214.30	37.62	43.50	-5.88	49.26	-11.64	Peak	---	---																																																																																										
6	222.06	36.05	46.00	-9.95	47.76	-11.71	Peak	---	---																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																			

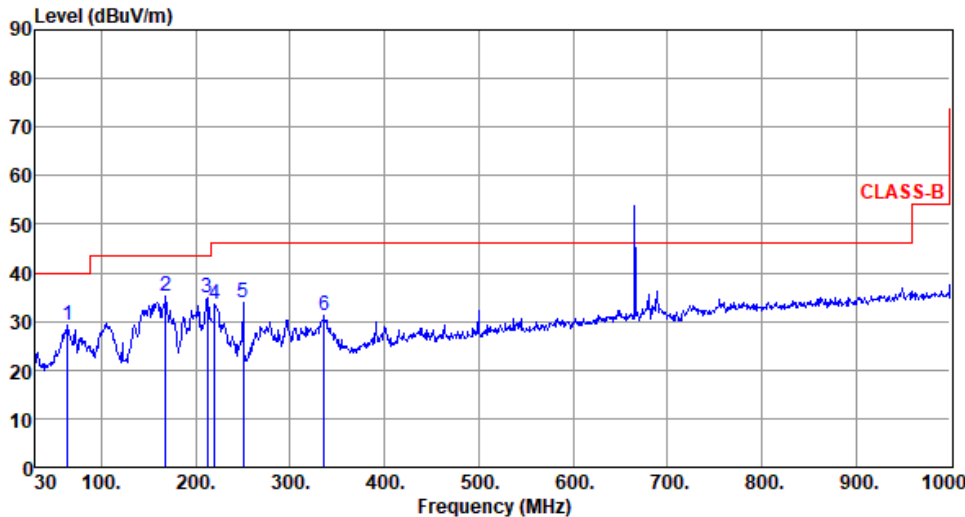
Modulation	Mode 5: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n71 BW:5M 665.5MHz CH133100																																																																														
Polarization	Horizontal																																																																														
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																																															
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>63.95</td><td>29.30</td><td>40.00</td><td>-10.70</td><td>39.05</td><td>-9.75</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>167.74</td><td>35.21</td><td>43.50</td><td>-8.29</td><td>44.04</td><td>-8.83</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>212.36</td><td>34.84</td><td>43.50</td><td>-8.66</td><td>46.45</td><td>-11.61</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>220.12</td><td>33.46</td><td>46.00</td><td>-12.54</td><td>45.18</td><td>-11.72</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>250.19</td><td>33.99</td><td>46.00</td><td>-12.01</td><td>43.46</td><td>-9.47</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>336.52</td><td>31.27</td><td>46.00</td><td>-14.73</td><td>37.79</td><td>-6.52</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	63.95	29.30	40.00	-10.70	39.05	-9.75	Peak	---	---	2	167.74	35.21	43.50	-8.29	44.04	-8.83	Peak	---	---	3	212.36	34.84	43.50	-8.66	46.45	-11.61	Peak	---	---	4	220.12	33.46	46.00	-12.54	45.18	-11.72	Peak	---	---	5	250.19	33.99	46.00	-12.01	43.46	-9.47	Peak	---	---	6	336.52	31.27	46.00	-14.73	37.79	-6.52	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	63.95	29.30	40.00	-10.70	39.05	-9.75	Peak	---	---																																																																						
2	167.74	35.21	43.50	-8.29	44.04	-8.83	Peak	---	---																																																																						
3	212.36	34.84	43.50	-8.66	46.45	-11.61	Peak	---	---																																																																						
4	220.12	33.46	46.00	-12.54	45.18	-11.72	Peak	---	---																																																																						
5	250.19	33.99	46.00	-12.01	43.46	-9.47	Peak	---	---																																																																						
6	336.52	31.27	46.00	-14.73	37.79	-6.52	Peak	---	---																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit. Note 4: The signal exceeding the limit is the fundamental frequency.																																																																															

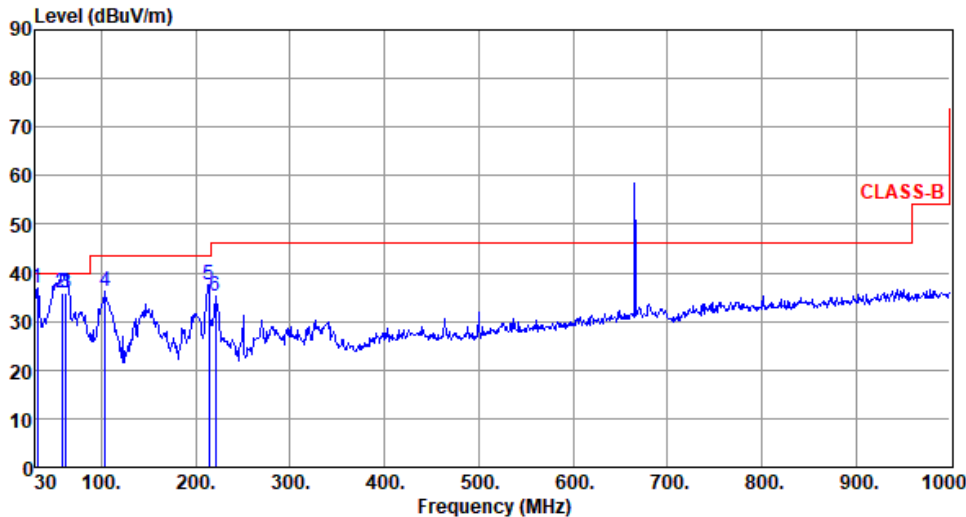Modulation	Mode 5: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n71 BW:5M 665.5MHz CH133100																																																																														
Polarization	Vertical																																																																														
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																																															
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>31.94</td><td>36.74</td><td>40.00</td><td>-3.26</td><td>46.96</td><td>-10.22</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>58.13</td><td>35.76</td><td>40.00</td><td>-4.24</td><td>44.71</td><td>-8.95</td><td>QP</td><td>100</td><td>20</td></tr><tr><td>3</td><td>62.01</td><td>35.94</td><td>40.00</td><td>-4.06</td><td>45.49</td><td>-9.55</td><td>QP</td><td>100</td><td>321</td></tr><tr><td>4</td><td>103.72</td><td>36.05</td><td>43.50</td><td>-7.45</td><td>48.67</td><td>-12.62</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>214.30</td><td>37.40</td><td>43.50</td><td>-6.10</td><td>49.04</td><td>-11.64</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>221.09</td><td>35.21</td><td>46.00</td><td>-10.79</td><td>46.93</td><td>-11.72</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	31.94	36.74	40.00	-3.26	46.96	-10.22	Peak	---	---	2	58.13	35.76	40.00	-4.24	44.71	-8.95	QP	100	20	3	62.01	35.94	40.00	-4.06	45.49	-9.55	QP	100	321	4	103.72	36.05	43.50	-7.45	48.67	-12.62	Peak	---	---	5	214.30	37.40	43.50	-6.10	49.04	-11.64	Peak	---	---	6	221.09	35.21	46.00	-10.79	46.93	-11.72	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	31.94	36.74	40.00	-3.26	46.96	-10.22	Peak	---	---																																																																						
2	58.13	35.76	40.00	-4.24	44.71	-8.95	QP	100	20																																																																						
3	62.01	35.94	40.00	-4.06	45.49	-9.55	QP	100	321																																																																						
4	103.72	36.05	43.50	-7.45	48.67	-12.62	Peak	---	---																																																																						
5	214.30	37.40	43.50	-6.10	49.04	-11.64	Peak	---	---																																																																						
6	221.09	35.21	46.00	-10.79	46.93	-11.72	Peak	---	---																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit. Note 4: The signal exceeding the limit is the fundamental frequency.																																																																															

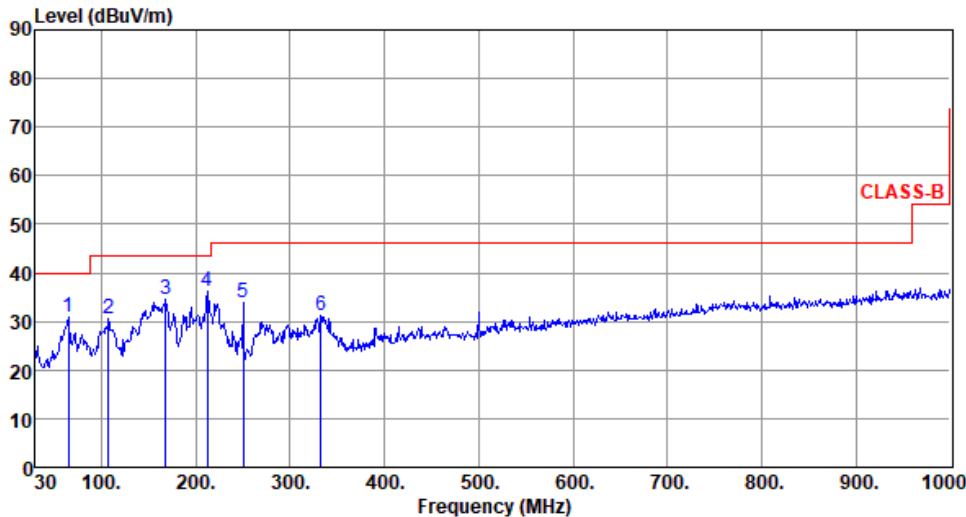


Modulation	Mode 6: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n78_3450-3550 BW:90M 3504.99MHz CH633666																																																																														
Polarization	Horizontal																																																																														
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																																															
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>64.92</td><td>30.74</td><td>40.00</td><td>-9.26</td><td>40.77</td><td>-10.03</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>107.60</td><td>30.39</td><td>43.50</td><td>-13.11</td><td>42.40</td><td>-12.01</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>167.74</td><td>34.56</td><td>43.50</td><td>-8.94</td><td>43.39</td><td>-8.83</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>212.36</td><td>36.29</td><td>43.50</td><td>-7.21</td><td>47.90</td><td>-11.61</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>250.19</td><td>34.00</td><td>46.00</td><td>-12.00</td><td>43.47</td><td>-9.47</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>332.64</td><td>31.25</td><td>46.00</td><td>-14.75</td><td>37.82</td><td>-6.57</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	64.92	30.74	40.00	-9.26	40.77	-10.03	Peak	---	---	2	107.60	30.39	43.50	-13.11	42.40	-12.01	Peak	---	---	3	167.74	34.56	43.50	-8.94	43.39	-8.83	Peak	---	---	4	212.36	36.29	43.50	-7.21	47.90	-11.61	Peak	---	---	5	250.19	34.00	46.00	-12.00	43.47	-9.47	Peak	---	---	6	332.64	31.25	46.00	-14.75	37.82	-6.57	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	64.92	30.74	40.00	-9.26	40.77	-10.03	Peak	---	---																																																																						
2	107.60	30.39	43.50	-13.11	42.40	-12.01	Peak	---	---																																																																						
3	167.74	34.56	43.50	-8.94	43.39	-8.83	Peak	---	---																																																																						
4	212.36	36.29	43.50	-7.21	47.90	-11.61	Peak	---	---																																																																						
5	250.19	34.00	46.00	-12.00	43.47	-9.47	Peak	---	---																																																																						
6	332.64	31.25	46.00	-14.75	37.82	-6.57	Peak	---	---																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																															

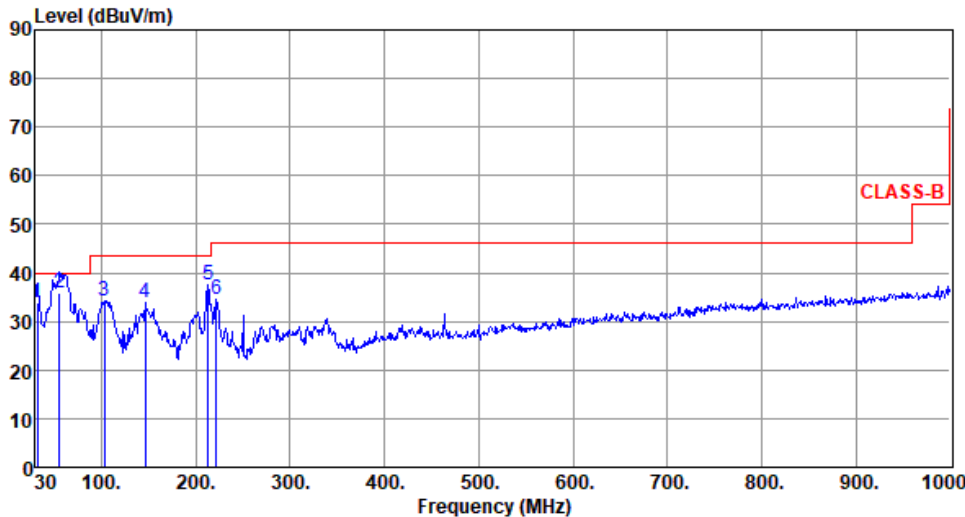

Modulation	Mode 6: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n78_3450-3550 BW:90M 3504.99MHz CH633666																																																																																																		
Polarization	Vertical																																																																																																		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																																																																			
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>31.94</td><td>33.73</td><td>40.00</td><td>-6.27</td><td>43.95</td><td>-10.22</td><td>QP</td><td>100</td><td>206</td></tr><tr><td>2</td><td>55.22</td><td>35.88</td><td>40.00</td><td>-4.12</td><td>44.50</td><td>-8.62</td><td>QP</td><td>100</td><td>28</td></tr><tr><td>3</td><td>102.75</td><td>34.10</td><td>43.50</td><td>-9.40</td><td>46.97</td><td>-12.87</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>146.40</td><td>33.87</td><td>43.50</td><td>-9.63</td><td>42.28</td><td>-8.41</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>213.33</td><td>37.39</td><td>43.50</td><td>-6.11</td><td>49.02</td><td>-11.63</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>222.06</td><td>34.56</td><td>46.00</td><td>-11.44</td><td>46.27</td><td>-11.71</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	31.94	33.73	40.00	-6.27	43.95	-10.22	QP	100	206	2	55.22	35.88	40.00	-4.12	44.50	-8.62	QP	100	28	3	102.75	34.10	43.50	-9.40	46.97	-12.87	Peak	---	---	4	146.40	33.87	43.50	-9.63	42.28	-8.41	Peak	---	---	5	213.33	37.39	43.50	-6.11	49.02	-11.63	Peak	---	---	6	222.06	34.56	46.00	-11.44	46.27	-11.71	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	31.94	33.73	40.00	-6.27	43.95	-10.22	QP	100	206																																																																																										
2	55.22	35.88	40.00	-4.12	44.50	-8.62	QP	100	28																																																																																										
3	102.75	34.10	43.50	-9.40	46.97	-12.87	Peak	---	---																																																																																										
4	146.40	33.87	43.50	-9.63	42.28	-8.41	Peak	---	---																																																																																										
5	213.33	37.39	43.50	-6.11	49.02	-11.63	Peak	---	---																																																																																										
6	222.06	34.56	46.00	-11.44	46.27	-11.71	Peak	---	---																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																			

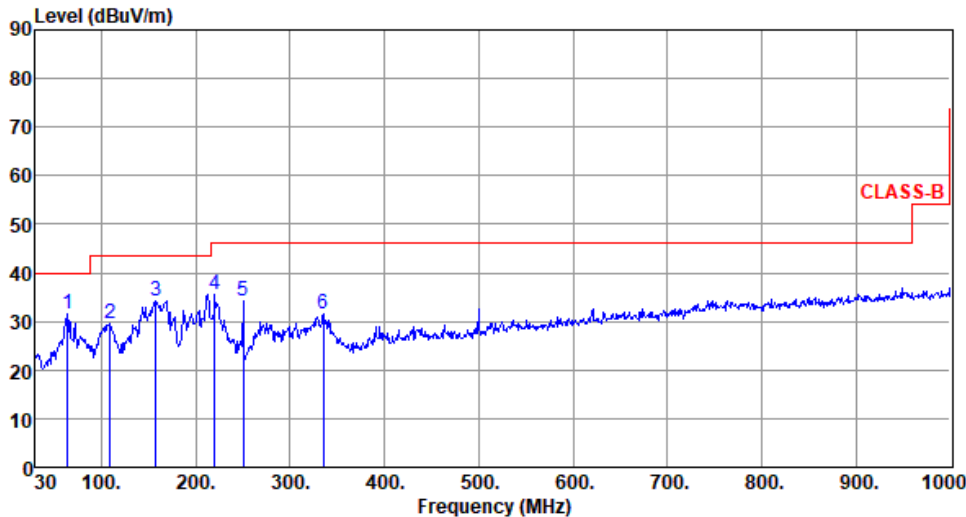

Modulation	Mode 7: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n78_3450-3550_MIMO BW:60M 3500.01MHz CH633334																																																																														
Polarization	Horizontal																																																																														
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																																															
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>63.95</td><td>31.56</td><td>40.00</td><td>-8.44</td><td>41.31</td><td>-9.75</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>109.54</td><td>29.71</td><td>43.50</td><td>-13.79</td><td>41.43</td><td>-11.72</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>158.04</td><td>34.37</td><td>43.50</td><td>-9.13</td><td>42.82</td><td>-8.45</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>220.12</td><td>35.64</td><td>46.00</td><td>-10.36</td><td>47.36</td><td>-11.72</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>250.19</td><td>34.36</td><td>46.00</td><td>-11.64</td><td>43.83</td><td>-9.47</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>335.55</td><td>31.44</td><td>46.00</td><td>-14.56</td><td>37.98</td><td>-6.54</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	63.95	31.56	40.00	-8.44	41.31	-9.75	Peak	---	---	2	109.54	29.71	43.50	-13.79	41.43	-11.72	Peak	---	---	3	158.04	34.37	43.50	-9.13	42.82	-8.45	Peak	---	---	4	220.12	35.64	46.00	-10.36	47.36	-11.72	Peak	---	---	5	250.19	34.36	46.00	-11.64	43.83	-9.47	Peak	---	---	6	335.55	31.44	46.00	-14.56	37.98	-6.54	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	63.95	31.56	40.00	-8.44	41.31	-9.75	Peak	---	---																																																																						
2	109.54	29.71	43.50	-13.79	41.43	-11.72	Peak	---	---																																																																						
3	158.04	34.37	43.50	-9.13	42.82	-8.45	Peak	---	---																																																																						
4	220.12	35.64	46.00	-10.36	47.36	-11.72	Peak	---	---																																																																						
5	250.19	34.36	46.00	-11.64	43.83	-9.47	Peak	---	---																																																																						
6	335.55	31.44	46.00	-14.56	37.98	-6.54	Peak	---	---																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																															



Modulation	Mode 7: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n78_3450-3550_MIMO BW:60M 3500.01MHz CH633334																																																																																																		
Polarization	Vertical																																																																																																		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																																																																			
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>31.94</td><td>33.27</td><td>40.00</td><td>-6.73</td><td>43.49</td><td>-10.22</td><td>QP</td><td>100</td><td>212</td></tr><tr><td>2</td><td>47.46</td><td>34.43</td><td>40.00</td><td>-5.57</td><td>43.03</td><td>-8.60</td><td>QP</td><td>100</td><td>20</td></tr><tr><td>3</td><td>62.01</td><td>36.26</td><td>40.00</td><td>-3.74</td><td>45.81</td><td>-9.55</td><td>QP</td><td>100</td><td>312</td></tr><tr><td>4</td><td>103.72</td><td>35.15</td><td>43.50</td><td>-8.35</td><td>47.77</td><td>-12.62</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>212.36</td><td>37.82</td><td>43.50</td><td>-5.68</td><td>49.43</td><td>-11.61</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>222.06</td><td>35.00</td><td>46.00</td><td>-11.00</td><td>46.71</td><td>-11.71</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	31.94	33.27	40.00	-6.73	43.49	-10.22	QP	100	212	2	47.46	34.43	40.00	-5.57	43.03	-8.60	QP	100	20	3	62.01	36.26	40.00	-3.74	45.81	-9.55	QP	100	312	4	103.72	35.15	43.50	-8.35	47.77	-12.62	Peak	---	---	5	212.36	37.82	43.50	-5.68	49.43	-11.61	Peak	---	---	6	222.06	35.00	46.00	-11.00	46.71	-11.71	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	31.94	33.27	40.00	-6.73	43.49	-10.22	QP	100	212																																																																																										
2	47.46	34.43	40.00	-5.57	43.03	-8.60	QP	100	20																																																																																										
3	62.01	36.26	40.00	-3.74	45.81	-9.55	QP	100	312																																																																																										
4	103.72	35.15	43.50	-8.35	47.77	-12.62	Peak	---	---																																																																																										
5	212.36	37.82	43.50	-5.68	49.43	-11.61	Peak	---	---																																																																																										
6	222.06	35.00	46.00	-11.00	46.71	-11.71	Peak	---	---																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																			



Unwanted Emissions (Above 1GHz)

Modulation	Mode 1: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + WWAN 4G LTE B26 BW:1.4M 824.7MHz CH26797								
Polarization	Horizontal								
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)									



Modulation	Mode 1: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + WWAN 4G LTE B26 BW:1.4M 824.7MHz CH26797								
Polarization	Vertical								
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62									
Level (dBuV/m) <									



Modulation	Mode 2: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n2 MIMO BW:20M 1860MHz CH372000								
Polarization	Horizontal								
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62									
Level (dBuV/m) </									

Modulation	Mode 2: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n2 MIMO BW:20M 1860MHz CH372000								
Polarization	Vertical								
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)									

Modulation	Mode 3: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n41MIMO BW:50M 2592.99MHz CH518598								
Polarization	Horizontal								
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62									
Level (dBuV/m) </									

Modulation	Mode 3: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n41MIMO BW:50M 2592.99MHz CH518598								
Polarization	Vertical								
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)									

Modulation	Mode 4: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n70 BW:15M 1702.5MHz CH340500								
Polarization	Horizontal								
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)									



Modulation	Mode 4: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n70 BW:15M 1702.5MHz CH340500								
Polarization	Vertical								
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62									
Level (dBuV/m) </									



Modulation	Mode 5: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n71 BW:5M 665.5MHz CH133100								
Polarization	Horizontal								
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)									



Modulation	Mode 5: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n71 BW:5M 665.5MHz CH133100								
Polarization	Vertical								
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62									
Level (dBUV/m)									



Modulation	Mode 6: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n78_3450-3550 BW:90M 3504.99MHz CH633666								
Polarization	Horizontal								
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)									



Modulation	Mode 6: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n78_3450-3550 BW:90M 3504.99MHz CH633666								
Polarization	Vertical								
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)									



Modulation	Mode 7: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n78_3450-3550_MIMO BW:60M 3500.01MHz CH633334								
Polarization	Horizontal								
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)									




Modulation	Mode 7: WLAN 2.4G 11b 2437MHz + WLAN 5G 11be EHT20 5785MHz + +WWAN 5G NR n78_3450-3550_MIMO BW:60M 3500.01MHz CH633334								
Polarization	Vertical								
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62									
Level (dBuV/m) <									




Ambient Condition	22°C / 66%	Tested By	Roger Lu
-------------------	------------	-----------	----------


C0

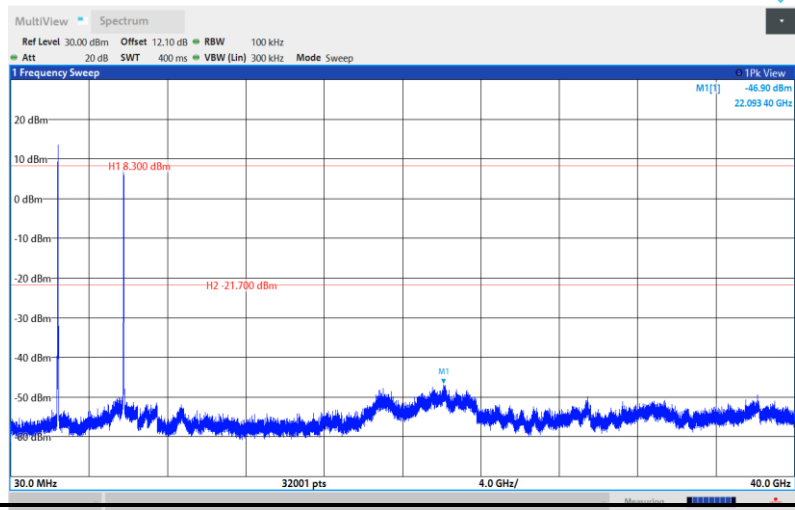

C1

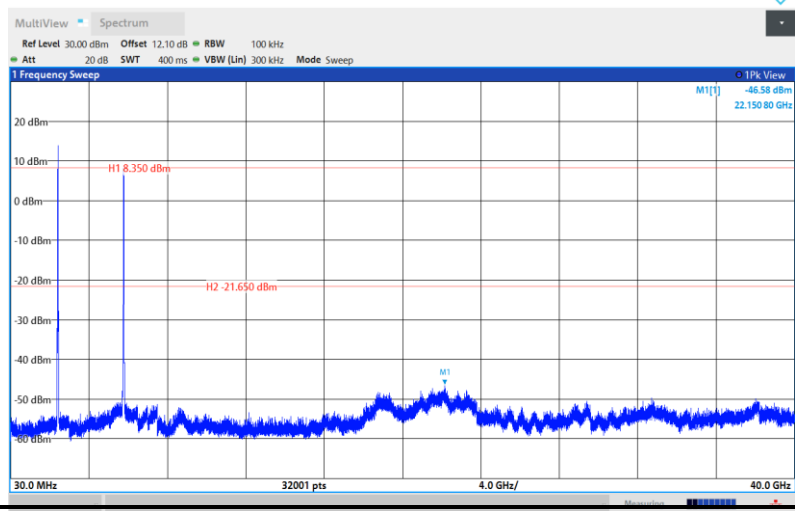

C2

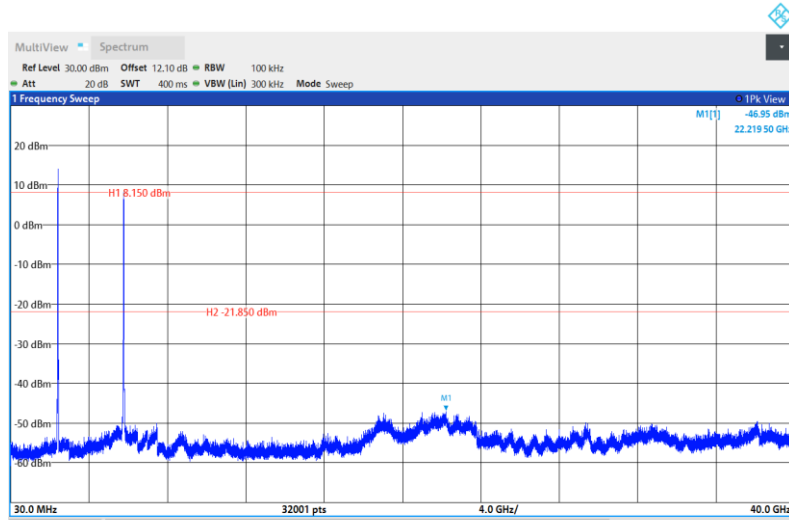

C3

