



Band Edge measurement

Appendix D.2

Modulation	be EHT20		Test Freq. (MHz)		5720				
Polarization	Vertical-Average								
Test By :Akun Chung Temperature(°C):24 Humidity(%):66									
Level (dBUV/m) 1 Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5415.39	42.40	54.00	-11.60	41.90	0.50	Average	259	355
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Band Edge measurement

Appendix D.2

Modulation	be EHT20	Test Freq. (MHz)	5745																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m) 1 2 UNI 3-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5641.25</td><td>56.24</td><td>68.20</td><td>-11.96</td><td>55.35</td><td>0.89</td><td>Peak</td><td>171</td><td>130</td></tr><tr><td>2</td><td>5967.13</td><td>54.27</td><td>68.20</td><td>-13.93</td><td>52.57</td><td>1.70</td><td>Peak</td><td>171</td><td>130</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5641.25	56.24	68.20	-11.96	55.35	0.89	Peak	171	130	2	5967.13	54.27	68.20	-13.93	52.57	1.70	Peak	171	130
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5641.25	56.24	68.20	-11.96	55.35	0.89	Peak	171	130																								
2	5967.13	54.27	68.20	-13.93	52.57	1.70	Peak	171	130																								



Band Edge measurement

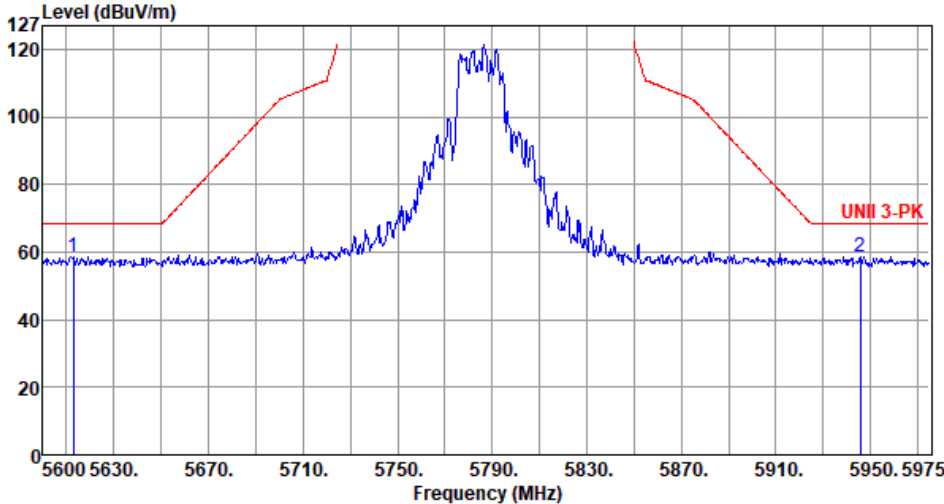
Appendix D.2

Modulation	be EHT20	Test Freq. (MHz)	5745
Polarization	Vertical-Peak		
Test By :Akun Chung Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) UNII 3-PK Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB reading dBuV dB/m cm Table deg 1 5649.13 55.67 68.20 -12.53 54.75 0.92 Peak 186 179 2 5934.88 55.11 68.20 -13.09 53.45 1.66 Peak 186 179			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Band Edge measurement

Appendix D.2

Modulation	be EHT20	Test Freq. (MHz)	5785																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5612.75</td><td>58.76</td><td>68.20</td><td>-9.44</td><td>57.92</td><td>0.84</td><td>Peak</td><td>174</td><td>128</td></tr><tr><td>2</td><td>5945.75</td><td>58.78</td><td>68.20</td><td>-9.42</td><td>57.11</td><td>1.67</td><td>Peak</td><td>174</td><td>128</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5612.75	58.76	68.20	-9.44	57.92	0.84	Peak	174	128	2	5945.75	58.78	68.20	-9.42	57.11	1.67	Peak	174	128
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5612.75	58.76	68.20	-9.44	57.92	0.84	Peak	174	128																								
2	5945.75	58.78	68.20	-9.42	57.11	1.67	Peak	174	128																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	be EHT20	Test Freq. (MHz)	5785																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5646.50</td><td>57.07</td><td>68.20</td><td>-11.13</td><td>56.16</td><td>0.91</td><td>Peak</td><td>189</td><td>359</td></tr><tr><td>2</td><td>5963.00</td><td>54.63</td><td>68.20</td><td>-13.57</td><td>52.93</td><td>1.70</td><td>Peak</td><td>189</td><td>359</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5646.50	57.07	68.20	-11.13	56.16	0.91	Peak	189	359	2	5963.00	54.63	68.20	-13.57	52.93	1.70	Peak	189	359
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5646.50	57.07	68.20	-11.13	56.16	0.91	Peak	189	359																								
2	5963.00	54.63	68.20	-13.57	52.93	1.70	Peak	189	359																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

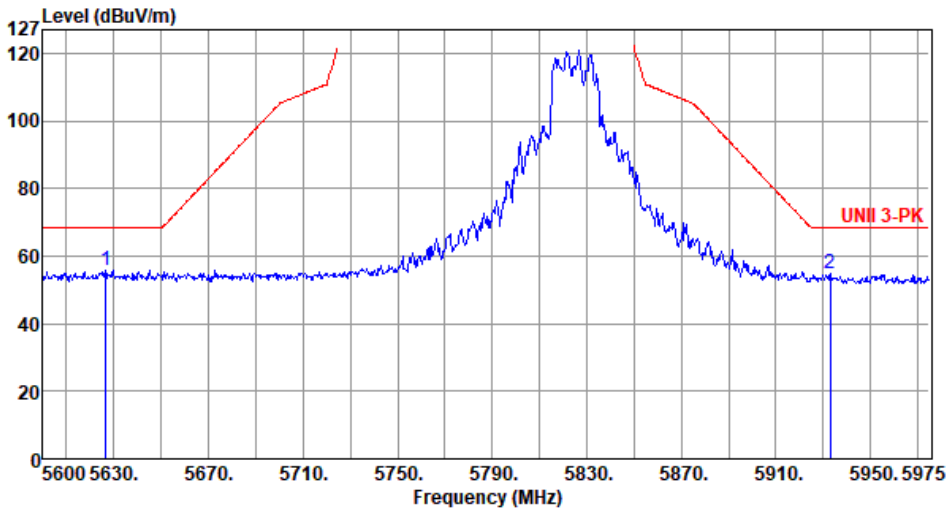
Appendix D.2

Modulation	be EHT20	Test Freq. (MHz)	5825
Polarization	Horizontal-Peak		
Test By :Akun Chung Temperature(°C):24 Humidity(%):66			
Level (dBuV/m)			



Band Edge measurement

Appendix D.2

Modulation	be EHT20	Test Freq. (MHz)	5825																																																		
Polarization	Vertical-Peak																																																				
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5626.63</td><td>55.83</td><td>68.20</td><td>-12.37</td><td>54.97</td><td>0.86</td><td>Peak</td><td>206</td><td>345</td></tr><tr><td>2</td><td>5933.00</td><td>55.01</td><td>68.20</td><td>-13.19</td><td>53.35</td><td>1.66</td><td>Peak</td><td>206</td><td>345</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5626.63	55.83	68.20	-12.37	54.97	0.86	Peak	206	345	2	5933.00	55.01	68.20	-13.19	53.35	1.66	Peak	206	345
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5626.63	55.83	68.20	-12.37	54.97	0.86	Peak	206	345																																												
2	5933.00	55.01	68.20	-13.19	53.35	1.66	Peak	206	345																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5190																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBUV/m) UNII 1-2-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.20</td><td>66.49</td><td>74.00</td><td>-7.51</td><td>65.39</td><td>1.10</td><td>Peak</td><td>300</td><td>229</td></tr><tr><td>2</td><td>5361.00</td><td>53.24</td><td>74.00</td><td>-20.76</td><td>52.90</td><td>0.34</td><td>Peak</td><td>300</td><td>229</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.20	66.49	74.00	-7.51	65.39	1.10	Peak	300	229	2	5361.00	53.24	74.00	-20.76	52.90	0.34	Peak	300	229
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.20	66.49	74.00	-7.51	65.39	1.10	Peak	300	229																								
2	5361.00	53.24	74.00	-20.76	52.90	0.34	Peak	300	229																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

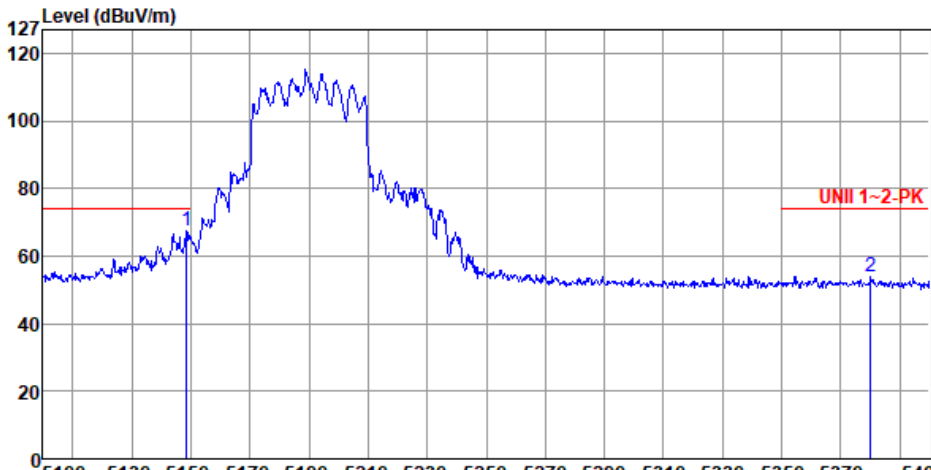
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5190																														
Polarization	Horizontal-Average																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5148.90</td><td>53.70</td><td>54.00</td><td>-0.30</td><td>52.60</td><td>1.10</td><td>Average</td><td>300</td><td>229</td></tr><tr><td>2</td><td>5356.50</td><td>40.77</td><td>54.00</td><td>-13.23</td><td>40.44</td><td>0.33</td><td>Average</td><td>300</td><td>229</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.90	53.70	54.00	-0.30	52.60	1.10	Average	300	229	2	5356.50	40.77	54.00	-13.23	40.44	0.33	Average	300	229
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.90	53.70	54.00	-0.30	52.60	1.10	Average	300	229																								
2	5356.50	40.77	54.00	-13.23	40.44	0.33	Average	300	229																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5190																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.60</td><td>67.33</td><td>74.00</td><td>-6.67</td><td>66.23</td><td>1.10</td><td>Peak</td><td>299</td><td>171</td></tr><tr><td>2</td><td>5380.20</td><td>53.98</td><td>74.00</td><td>-20.02</td><td>53.59</td><td>0.39</td><td>Peak</td><td>299</td><td>171</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.60	67.33	74.00	-6.67	66.23	1.10	Peak	299	171	2	5380.20	53.98	74.00	-20.02	53.59	0.39	Peak	299	171
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.60	67.33	74.00	-6.67	66.23	1.10	Peak	299	171																								
2	5380.20	53.98	74.00	-20.02	53.59	0.39	Peak	299	171																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

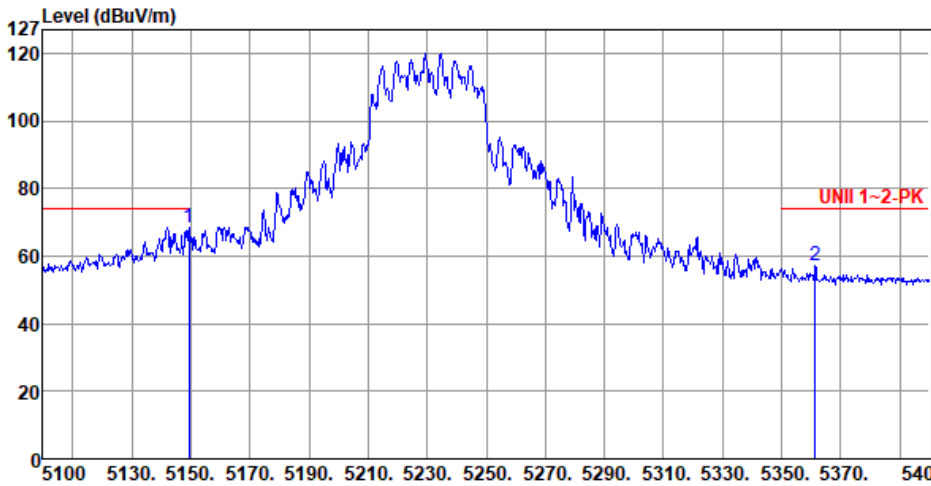
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5190																														
Polarization	Vertical-Average																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBUV/m) UNII 1~2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5148.90</td><td>53.86</td><td>54.00</td><td>-0.14</td><td>52.76</td><td>1.10</td><td>Average</td><td>299</td><td>171</td></tr><tr><td>2</td><td>5384.70</td><td>41.03</td><td>54.00</td><td>-12.97</td><td>40.63</td><td>0.40</td><td>Average</td><td>299</td><td>171</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.90	53.86	54.00	-0.14	52.76	1.10	Average	299	171	2	5384.70	41.03	54.00	-12.97	40.63	0.40	Average	299	171
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.90	53.86	54.00	-0.14	52.76	1.10	Average	299	171																								
2	5384.70	41.03	54.00	-12.97	40.63	0.40	Average	299	171																								



Band Edge measurement

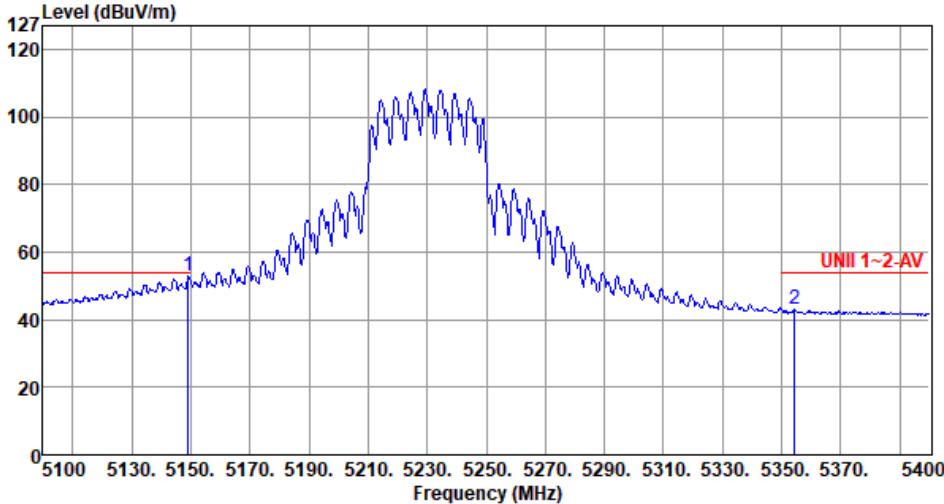
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5230																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.50</td><td>68.52</td><td>74.00</td><td>-5.48</td><td>67.42</td><td>1.10</td><td>Peak</td><td>337</td><td>312</td></tr><tr><td>2</td><td>5361.30</td><td>57.16</td><td>74.00</td><td>-16.84</td><td>56.82</td><td>0.34</td><td>Peak</td><td>337</td><td>312</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	5149.50	68.52	74.00	-5.48	67.42	1.10	Peak	337	312	2	5361.30	57.16	74.00	-16.84	56.82	0.34	Peak	337	312
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																																		
1	5149.50	68.52	74.00	-5.48	67.42	1.10	Peak	337	312																																		
2	5361.30	57.16	74.00	-16.84	56.82	0.34	Peak	337	312																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

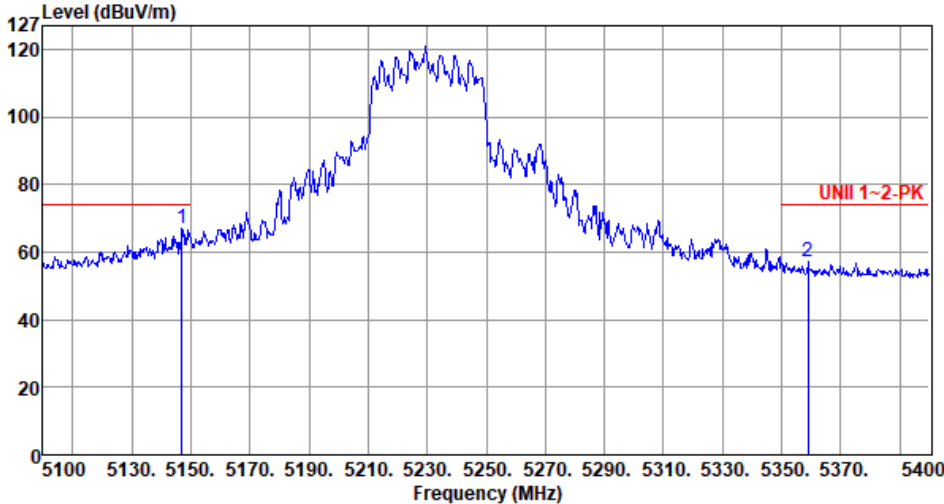
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5230																														
Polarization	Horizontal-Average																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.20</td><td>53.01</td><td>54.00</td><td>-0.99</td><td>51.91</td><td>1.10</td><td>Average</td><td>337</td><td>312</td></tr><tr><td>2</td><td>5354.40</td><td>42.99</td><td>54.00</td><td>-11.01</td><td>42.66</td><td>0.33</td><td>Average</td><td>337</td><td>312</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.20	53.01	54.00	-0.99	51.91	1.10	Average	337	312	2	5354.40	42.99	54.00	-11.01	42.66	0.33	Average	337	312
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.20	53.01	54.00	-0.99	51.91	1.10	Average	337	312																								
2	5354.40	42.99	54.00	-11.01	42.66	0.33	Average	337	312																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5230																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5147.10</td><td>66.80</td><td>74.00</td><td>-7.20</td><td>65.71</td><td>1.09</td><td>Peak</td><td>202</td><td>165</td></tr><tr><td>2</td><td>5358.90</td><td>57.02</td><td>74.00</td><td>-16.98</td><td>56.68</td><td>0.34</td><td>Peak</td><td>202</td><td>165</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5147.10	66.80	74.00	-7.20	65.71	1.09	Peak	202	165	2	5358.90	57.02	74.00	-16.98	56.68	0.34	Peak	202	165
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5147.10	66.80	74.00	-7.20	65.71	1.09	Peak	202	165																								
2	5358.90	57.02	74.00	-16.98	56.68	0.34	Peak	202	165																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

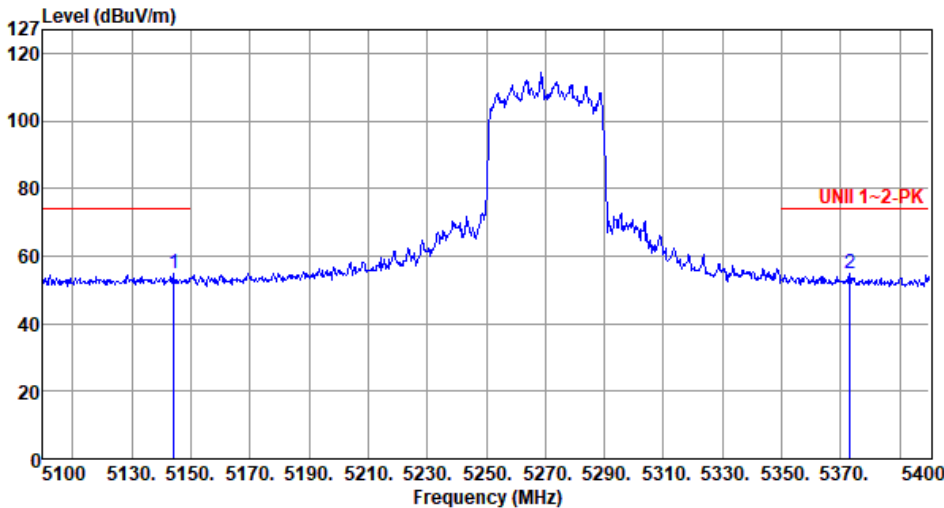
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5230																														
Polarization	Vertical-Average																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.20</td><td>52.66</td><td>54.00</td><td>-1.34</td><td>51.56</td><td>1.10</td><td>Average</td><td>202</td><td>165</td></tr><tr><td>2</td><td>5354.70</td><td>44.05</td><td>54.00</td><td>-9.95</td><td>43.72</td><td>0.33</td><td>Average</td><td>202</td><td>165</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.20	52.66	54.00	-1.34	51.56	1.10	Average	202	165	2	5354.70	44.05	54.00	-9.95	43.72	0.33	Average	202	165
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.20	52.66	54.00	-1.34	51.56	1.10	Average	202	165																								
2	5354.70	44.05	54.00	-9.95	43.72	0.33	Average	202	165																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

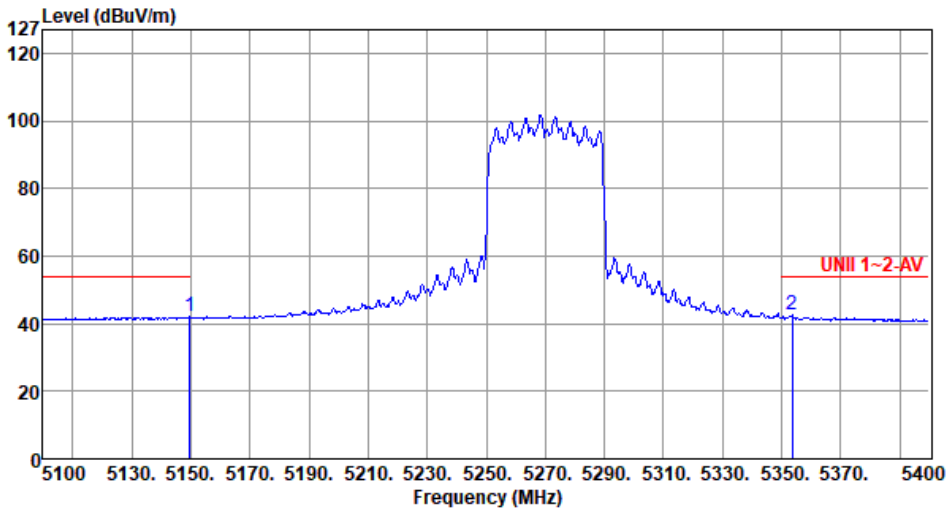
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5270																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5144.40</td><td>54.66</td><td>74.00</td><td>-19.34</td><td>53.58</td><td>1.08</td><td>Peak</td><td>214</td><td>311</td></tr><tr><td>2</td><td>5373.00</td><td>54.68</td><td>74.00</td><td>-19.32</td><td>54.31</td><td>0.37</td><td>Peak</td><td>214</td><td>311</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5144.40	54.66	74.00	-19.34	53.58	1.08	Peak	214	311	2	5373.00	54.68	74.00	-19.32	54.31	0.37	Peak	214	311
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5144.40	54.66	74.00	-19.34	53.58	1.08	Peak	214	311																								
2	5373.00	54.68	74.00	-19.32	54.31	0.37	Peak	214	311																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

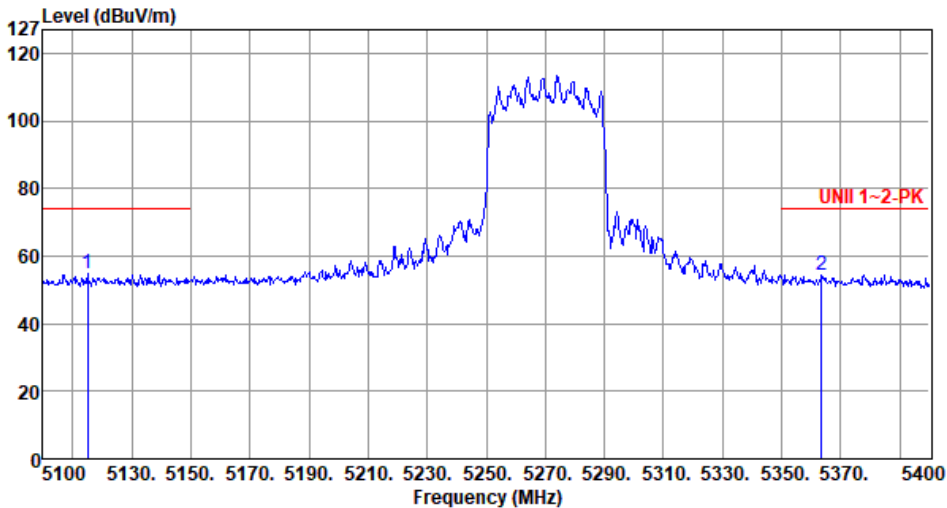
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5270																														
Polarization	Horizontal-Average																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>42.14</td><td>54.00</td><td>-11.86</td><td>41.04</td><td>1.10</td><td>Average</td><td>214</td><td>311</td></tr><tr><td>2</td><td>5353.50</td><td>42.49</td><td>54.00</td><td>-11.51</td><td>42.16</td><td>0.33</td><td>Average</td><td>214</td><td>311</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	42.14	54.00	-11.86	41.04	1.10	Average	214	311	2	5353.50	42.49	54.00	-11.51	42.16	0.33	Average	214	311
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	42.14	54.00	-11.86	41.04	1.10	Average	214	311																								
2	5353.50	42.49	54.00	-11.51	42.16	0.33	Average	214	311																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

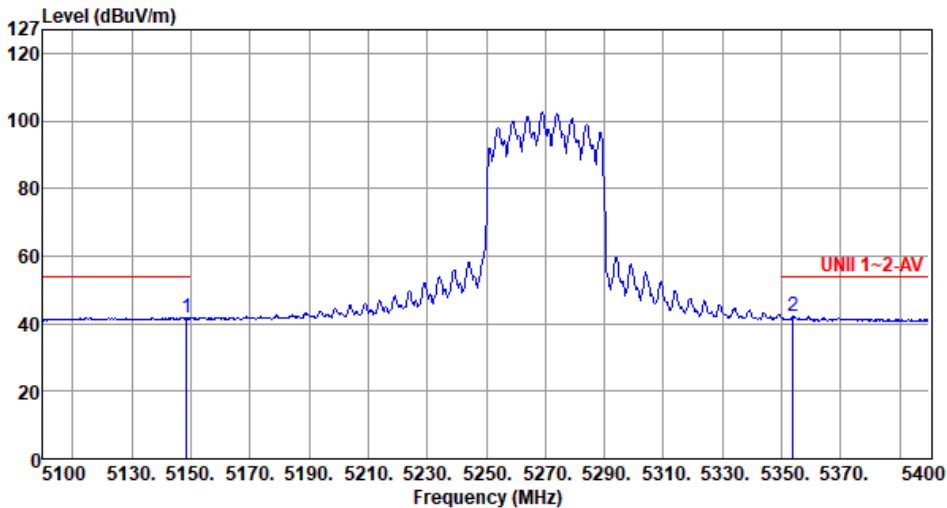
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5270																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5115.00</td><td>54.69</td><td>74.00</td><td>-19.31</td><td>53.68</td><td>1.01</td><td>Peak</td><td>309</td><td>89</td></tr><tr><td>2</td><td>5363.40</td><td>54.47</td><td>74.00</td><td>-19.53</td><td>54.11</td><td>0.36</td><td>Peak</td><td>309</td><td>89</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5115.00	54.69	74.00	-19.31	53.68	1.01	Peak	309	89	2	5363.40	54.47	74.00	-19.53	54.11	0.36	Peak	309	89
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5115.00	54.69	74.00	-19.31	53.68	1.01	Peak	309	89																																		
2	5363.40	54.47	74.00	-19.53	54.11	0.36	Peak	309	89																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5270																														
Polarization	Vertical-Average																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5148.60</td><td>41.69</td><td>54.00</td><td>-12.31</td><td>40.59</td><td>1.10</td><td>Average</td><td>309</td><td>89</td></tr><tr><td>2</td><td>5353.80</td><td>42.31</td><td>54.00</td><td>-11.69</td><td>41.98</td><td>0.33</td><td>Average</td><td>309</td><td>89</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.60	41.69	54.00	-12.31	40.59	1.10	Average	309	89	2	5353.80	42.31	54.00	-11.69	41.98	0.33	Average	309	89
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.60	41.69	54.00	-12.31	40.59	1.10	Average	309	89																								
2	5353.80	42.31	54.00	-11.69	41.98	0.33	Average	309	89																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5310																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5103.90</td><td>54.90</td><td>74.00</td><td>-19.10</td><td>53.90</td><td>1.00</td><td>Peak</td><td>247</td><td>301</td></tr><tr><td>2</td><td>5350.20</td><td>59.48</td><td>74.00</td><td>-14.52</td><td>59.16</td><td>0.32</td><td>Peak</td><td>247</td><td>301</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5103.90	54.90	74.00	-19.10	53.90	1.00	Peak	247	301	2	5350.20	59.48	74.00	-14.52	59.16	0.32	Peak	247	301
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5103.90	54.90	74.00	-19.10	53.90	1.00	Peak	247	301																								
2	5350.20	59.48	74.00	-14.52	59.16	0.32	Peak	247	301																								



Band Edge measurement

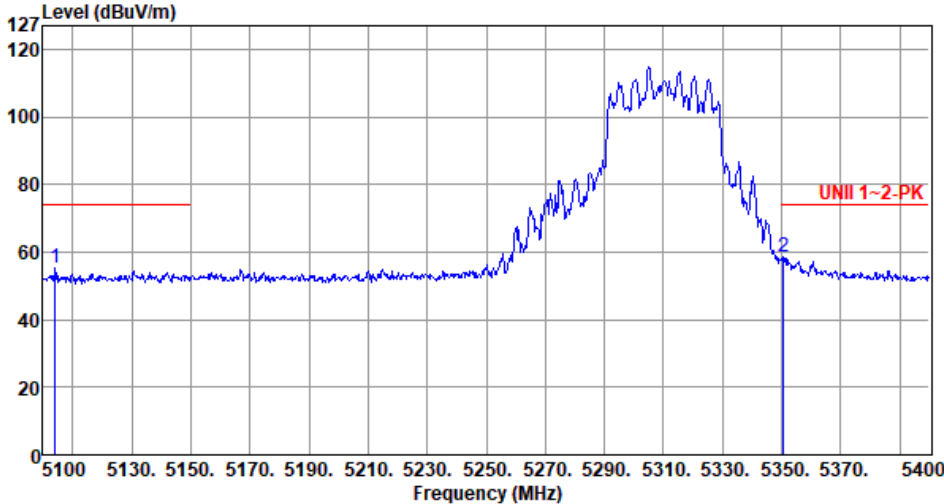
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Horizontal-Average		
Test By :Akun Chung Temperature(°C):22 Humidity(%):63			
Level (dBuV/m) </			



Band Edge measurement

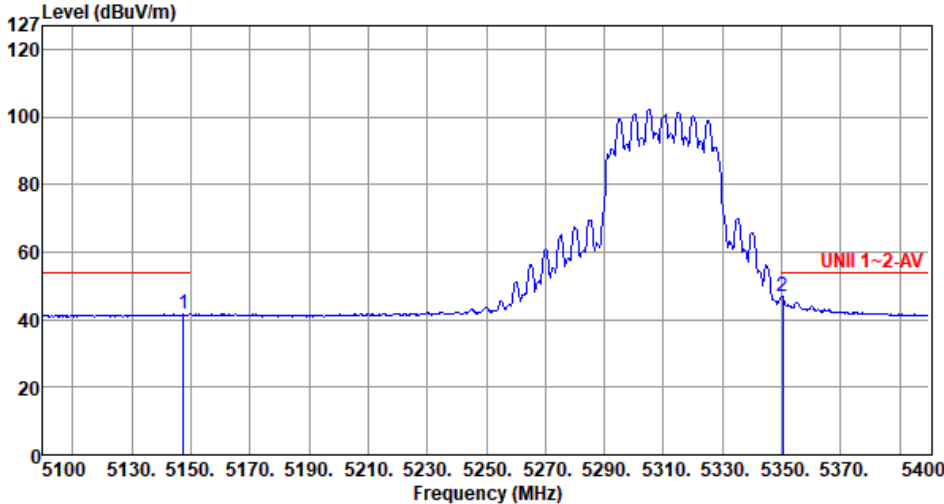
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5310																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5104.20</td><td>55.40</td><td>74.00</td><td>-18.60</td><td>54.40</td><td>1.00</td><td>Peak</td><td>218</td><td>185</td></tr><tr><td>2</td><td>5350.50</td><td>58.52</td><td>74.00</td><td>-15.48</td><td>58.20</td><td>0.32</td><td>Peak</td><td>218</td><td>185</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5104.20	55.40	74.00	-18.60	54.40	1.00	Peak	218	185	2	5350.50	58.52	74.00	-15.48	58.20	0.32	Peak	218	185
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5104.20	55.40	74.00	-18.60	54.40	1.00	Peak	218	185																								
2	5350.50	58.52	74.00	-15.48	58.20	0.32	Peak	218	185																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

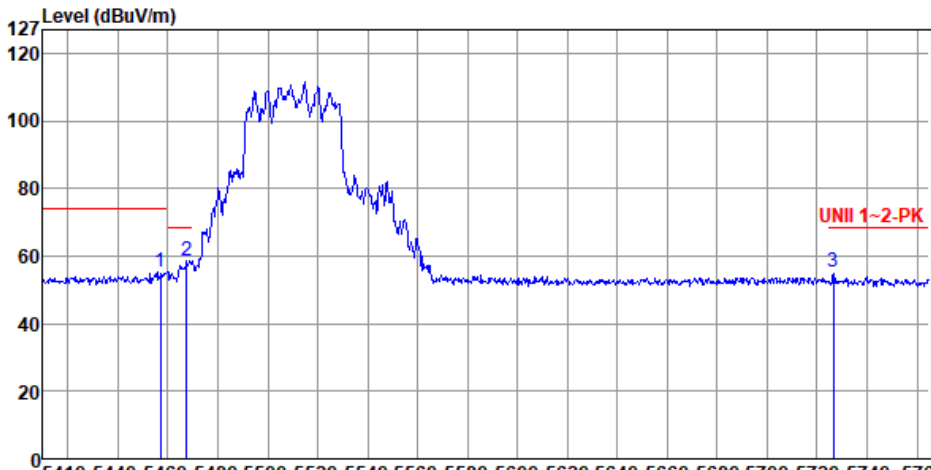
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5310																														
Polarization	Vertical-Average																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5147.40</td><td>41.64</td><td>54.00</td><td>-12.36</td><td>40.55</td><td>1.09</td><td>Average</td><td>218</td><td>185</td></tr><tr><td>2</td><td>5350.20</td><td>46.90</td><td>54.00</td><td>-7.10</td><td>46.58</td><td>0.32</td><td>Average</td><td>218</td><td>185</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5147.40	41.64	54.00	-12.36	40.55	1.09	Average	218	185	2	5350.20	46.90	54.00	-7.10	46.58	0.32	Average	218	185
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5147.40	41.64	54.00	-12.36	40.55	1.09	Average	218	185																								
2	5350.20	46.90	54.00	-7.10	46.58	0.32	Average	218	185																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5510																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5457.00</td><td>55.22</td><td>74.00</td><td>-18.78</td><td>54.54</td><td>0.68</td><td>Peak</td><td>302</td><td>128</td></tr><tr><td>2</td><td>5467.51</td><td>58.81</td><td>68.20</td><td>-9.39</td><td>58.09</td><td>0.72</td><td>Peak</td><td>302</td><td>128</td></tr><tr><td>3</td><td>5726.66</td><td>55.36</td><td>68.20</td><td>-12.84</td><td>54.25</td><td>1.11</td><td>Peak</td><td>302</td><td>128</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5457.00	55.22	74.00	-18.78	54.54	0.68	Peak	302	128	2	5467.51	58.81	68.20	-9.39	58.09	0.72	Peak	302	128	3	5726.66	55.36	68.20	-12.84	54.25	1.11	Peak	302	128
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5457.00	55.22	74.00	-18.78	54.54	0.68	Peak	302	128																																		
2	5467.51	58.81	68.20	-9.39	58.09	0.72	Peak	302	128																																		
3	5726.66	55.36	68.20	-12.84	54.25	1.11	Peak	302	128																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5510																				
Polarization	Horizontal-Average																						
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																							
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5458.50</td><td>42.77</td><td>54.00</td><td>-11.23</td><td>42.08</td><td>0.69</td><td>Average</td><td>302</td><td>128</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5458.50	42.77	54.00	-11.23	42.08	0.69	Average	302	128
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5458.50	42.77	54.00	-11.23	42.08	0.69	Average	302	128														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

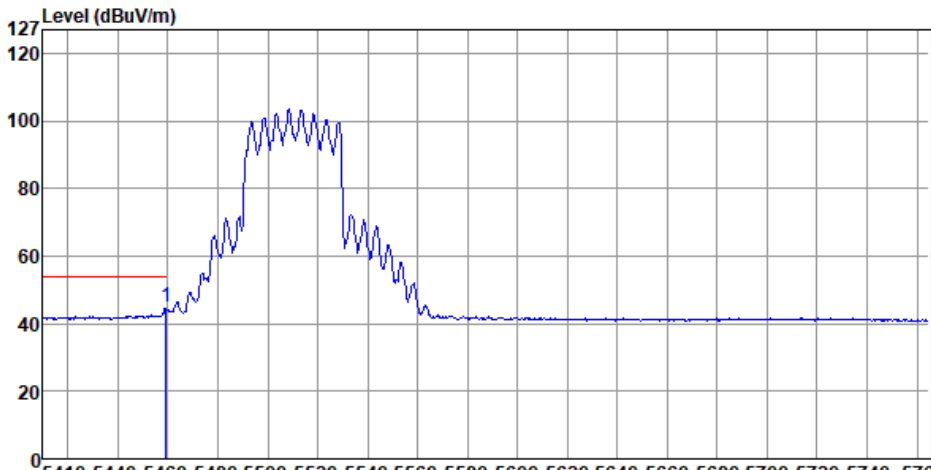
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5510																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																											
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5457.00</td><td>56.73</td><td>74.00</td><td>-17.27</td><td>56.05</td><td>0.68</td><td>Peak</td><td>306</td><td>83</td></tr><tr><td>2</td><td>5468.50</td><td>60.98</td><td>68.20</td><td>-7.22</td><td>60.26</td><td>0.72</td><td>Peak</td><td>306</td><td>83</td></tr><tr><td>3</td><td>5733.00</td><td>54.82</td><td>68.20</td><td>-13.38</td><td>53.69</td><td>1.13</td><td>Peak</td><td>306</td><td>83</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5457.00	56.73	74.00	-17.27	56.05	0.68	Peak	306	83	2	5468.50	60.98	68.20	-7.22	60.26	0.72	Peak	306	83	3	5733.00	54.82	68.20	-13.38	53.69	1.13	Peak	306	83
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5457.00	56.73	74.00	-17.27	56.05	0.68	Peak	306	83																																		
2	5468.50	60.98	68.20	-7.22	60.26	0.72	Peak	306	83																																		
3	5733.00	54.82	68.20	-13.38	53.69	1.13	Peak	306	83																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

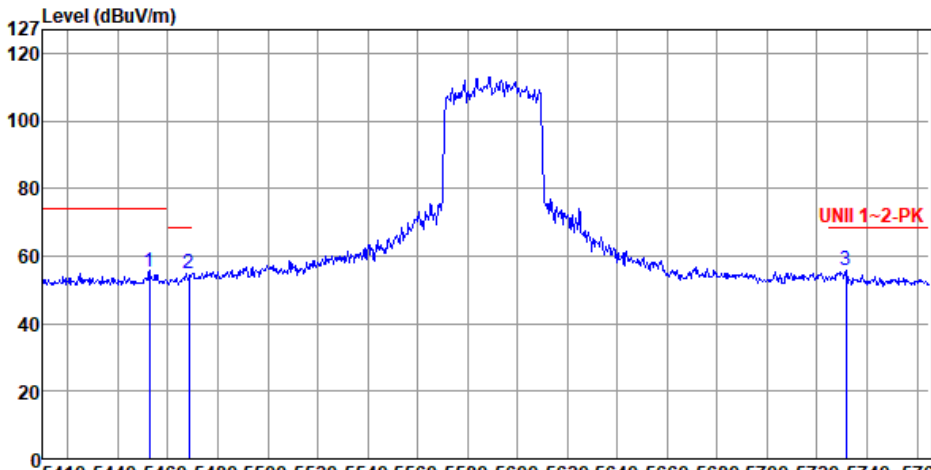
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5510																				
Polarization	Vertical-Average																						
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5459.25</td><td>44.88</td><td>54.00</td><td>-9.12</td><td>44.19</td><td>0.69</td><td>Average</td><td>306</td><td>83</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.25	44.88	54.00	-9.12	44.19	0.69	Average	306	83
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5459.25	44.88	54.00	-9.12	44.19	0.69	Average	306	83														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5590																																																		
Polarization	Horizontal-Peak																																																				
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><td>1</td><td>5452.50</td><td>55.48</td><td>74.00</td><td>-18.52</td><td>54.82</td><td>0.66</td><td>Peak</td><td>244</td><td>339</td></tr><tr><td>2</td><td>5468.50</td><td>54.63</td><td>68.20</td><td>-13.57</td><td>53.91</td><td>0.72</td><td>Peak</td><td>244</td><td>339</td></tr><tr><td>3</td><td>5731.61</td><td>55.58</td><td>68.20</td><td>-12.62</td><td>54.46</td><td>1.12</td><td>Peak</td><td>244</td><td>339</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table	1	5452.50	55.48	74.00	-18.52	54.82	0.66	Peak	244	339	2	5468.50	54.63	68.20	-13.57	53.91	0.72	Peak	244	339	3	5731.61	55.58	68.20	-12.62	54.46	1.12	Peak	244	339
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
1	5452.50	55.48	74.00	-18.52	54.82	0.66	Peak	244	339																																												
2	5468.50	54.63	68.20	-13.57	53.91	0.72	Peak	244	339																																												
3	5731.61	55.58	68.20	-12.62	54.46	1.12	Peak	244	339																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5590
Polarization	Horizontal-Average		
Test By :Akun Chung Temperature(°C):22 Humidity(%):63			
Level (dBUV/m)			



Band Edge measurement

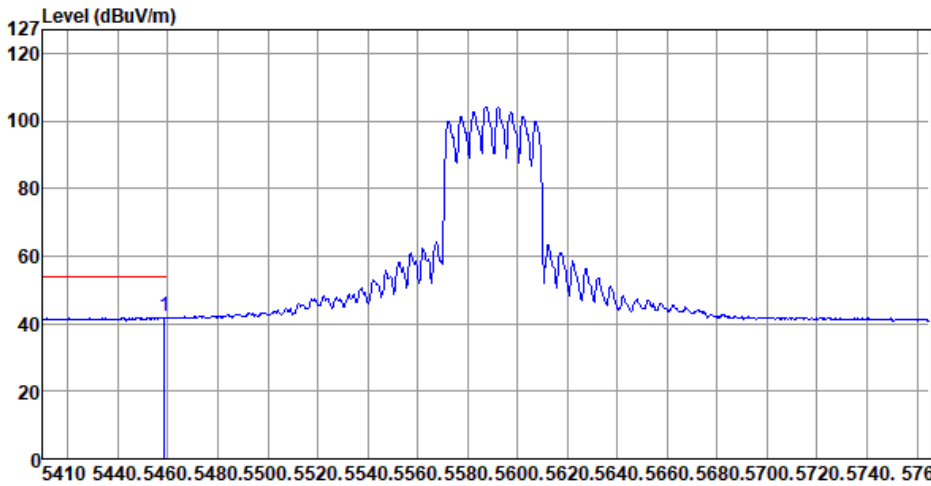
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5590																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5457.00</td><td>54.93</td><td>74.00</td><td>-19.07</td><td>54.25</td><td>0.68</td><td>Peak</td><td>226</td><td>349</td></tr><tr><td>2</td><td>5468.00</td><td>54.85</td><td>68.20</td><td>-13.35</td><td>54.13</td><td>0.72</td><td>Peak</td><td>226</td><td>349</td></tr><tr><td>3</td><td>5725.35</td><td>54.75</td><td>68.20</td><td>-13.45</td><td>53.64</td><td>1.11</td><td>Peak</td><td>226</td><td>349</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5457.00	54.93	74.00	-19.07	54.25	0.68	Peak	226	349	2	5468.00	54.85	68.20	-13.35	54.13	0.72	Peak	226	349	3	5725.35	54.75	68.20	-13.45	53.64	1.11	Peak	226	349
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5457.00	54.93	74.00	-19.07	54.25	0.68	Peak	226	349																																		
2	5468.00	54.85	68.20	-13.35	54.13	0.72	Peak	226	349																																		
3	5725.35	54.75	68.20	-13.45	53.64	1.11	Peak	226	349																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

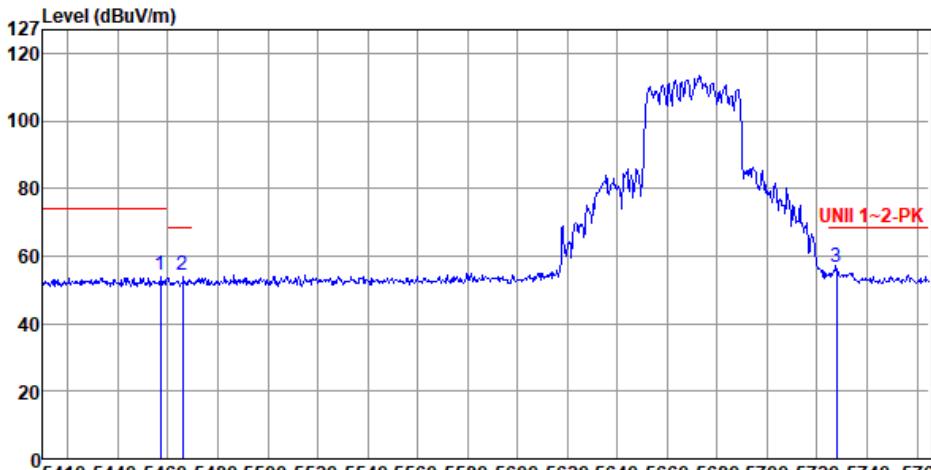
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5590																				
Polarization	Vertical-Average																						
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																							
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5458.75</td><td>42.11</td><td>54.00</td><td>-11.89</td><td>41.42</td><td>0.69</td><td>Average</td><td>226</td><td>349</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5458.75	42.11	54.00	-11.89	41.42	0.69	Average	226	349
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5458.75	42.11	54.00	-11.89	41.42	0.69	Average	226	349														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5670																																																												
Polarization	Horizontal-Peak																																																														
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																																															
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5457.00</td><td>54.24</td><td>74.00</td><td>-19.76</td><td>53.56</td><td>0.68</td><td>Peak</td><td>170</td><td>130</td></tr><tr><td>2</td><td>5466.00</td><td>54.25</td><td>68.20</td><td>-13.95</td><td>53.54</td><td>0.71</td><td>Peak</td><td>170</td><td>130</td></tr><tr><td>3</td><td>5727.66</td><td>56.85</td><td>68.20</td><td>-11.35</td><td>55.73</td><td>1.12</td><td>Peak</td><td>170</td><td>130</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5457.00	54.24	74.00	-19.76	53.56	0.68	Peak	170	130	2	5466.00	54.25	68.20	-13.95	53.54	0.71	Peak	170	130	3	5727.66	56.85	68.20	-11.35	55.73	1.12	Peak	170	130
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																						
		dBuV/m			dBuV			cm	deg																																																						
1	5457.00	54.24	74.00	-19.76	53.56	0.68	Peak	170	130																																																						
2	5466.00	54.25	68.20	-13.95	53.54	0.71	Peak	170	130																																																						
3	5727.66	56.85	68.20	-11.35	55.73	1.12	Peak	170	130																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															



Band Edge measurement

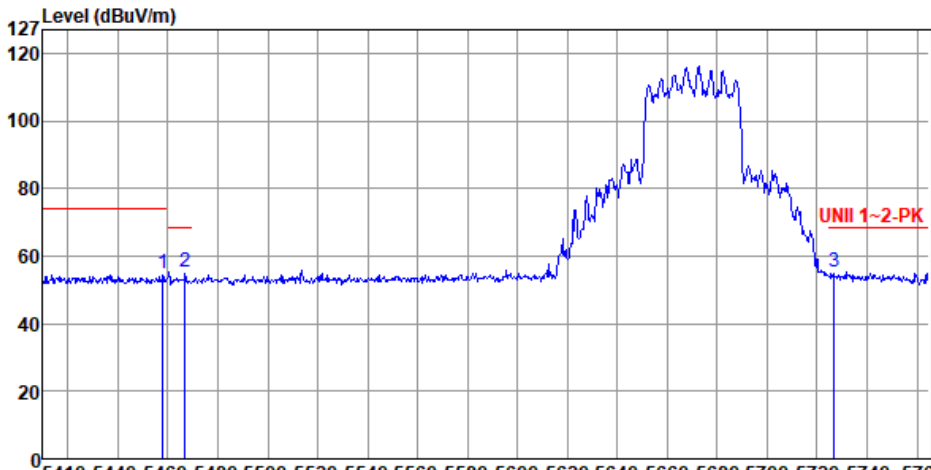
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Horizontal-Average		
Test By :Akun Chung Temperature(°C):22 Humidity(%):63			
Level (dBuV/m)			



Band Edge measurement

Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5670																																																												
Polarization	Vertical-Peak																																																														
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																																															
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5457.85</td><td>54.78</td><td>74.00</td><td>-19.22</td><td>54.09</td><td>0.69</td><td>Peak</td><td>241</td><td>1</td></tr><tr><td>2</td><td>5467.00</td><td>55.52</td><td>68.20</td><td>-12.68</td><td>54.81</td><td>0.71</td><td>Peak</td><td>241</td><td>1</td></tr><tr><td>3</td><td>5726.96</td><td>55.39</td><td>68.20</td><td>-12.81</td><td>54.28</td><td>1.11</td><td>Peak</td><td>241</td><td>1</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1	5457.85	54.78	74.00	-19.22	54.09	0.69	Peak	241	1	2	5467.00	55.52	68.20	-12.68	54.81	0.71	Peak	241	1	3	5726.96	55.39	68.20	-12.81	54.28	1.11	Peak	241	1
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																						
		dBUV/m			dBuV			cm	deg																																																						
1	5457.85	54.78	74.00	-19.22	54.09	0.69	Peak	241	1																																																						
2	5467.00	55.52	68.20	-12.68	54.81	0.71	Peak	241	1																																																						
3	5726.96	55.39	68.20	-12.81	54.28	1.11	Peak	241	1																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															



Band Edge measurement

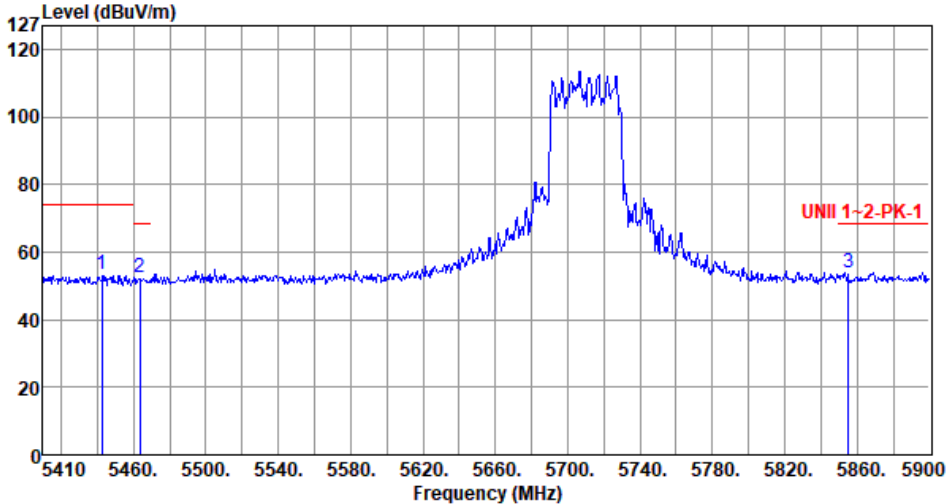
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Vertical-Average		
Test By :Akun Chung Temperature(°C):22 Humidity(%):63			
Level (dBuV/m)			



Band Edge measurement

Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5710																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5442.35</td><td>53.33</td><td>74.00</td><td>-20.67</td><td>52.70</td><td>0.63</td><td>Peak</td><td>176</td><td>129</td></tr><tr><td>2</td><td>5463.39</td><td>52.55</td><td>68.20</td><td>-15.65</td><td>51.85</td><td>0.70</td><td>Peak</td><td>176</td><td>129</td></tr><tr><td>3</td><td>5855.00</td><td>53.96</td><td>68.20</td><td>-14.24</td><td>52.52</td><td>1.44</td><td>Peak</td><td>176</td><td>129</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5442.35	53.33	74.00	-20.67	52.70	0.63	Peak	176	129	2	5463.39	52.55	68.20	-15.65	51.85	0.70	Peak	176	129	3	5855.00	53.96	68.20	-14.24	52.52	1.44	Peak	176	129
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5442.35	53.33	74.00	-20.67	52.70	0.63	Peak	176	129																																		
2	5463.39	52.55	68.20	-15.65	51.85	0.70	Peak	176	129																																		
3	5855.00	53.96	68.20	-14.24	52.52	1.44	Peak	176	129																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

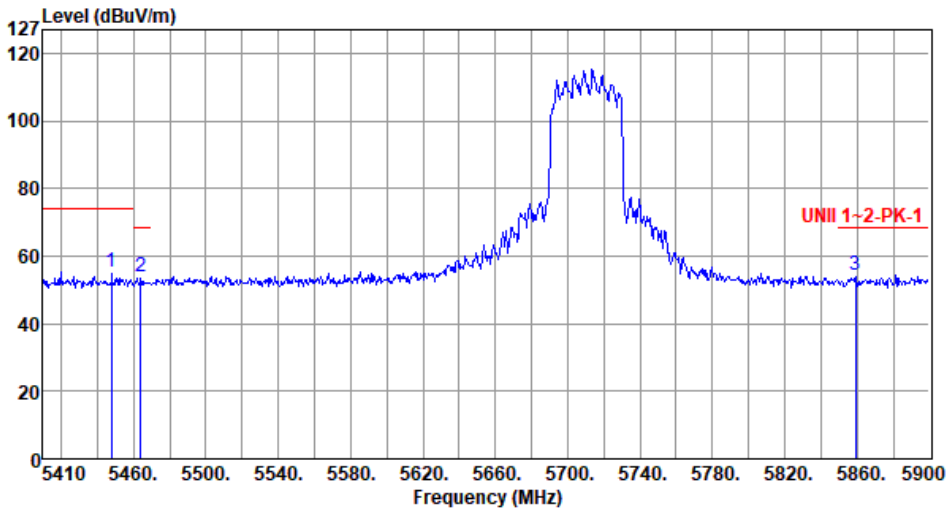
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Horizontal-Average		
Test By :Akun Chung Temperature(°C):22 Humidity(%):63			
Level (dBuV/m)			



Band Edge measurement

Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5710																																																												
Polarization	Vertical-Peak																																																														
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																																															
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5447.66</td><td>55.39</td><td>74.00</td><td>-18.61</td><td>54.74</td><td>0.65</td><td>Peak</td><td>259</td><td>355</td></tr><tr><td>2</td><td>5463.95</td><td>53.75</td><td>68.20</td><td>-14.45</td><td>53.05</td><td>0.70</td><td>Peak</td><td>259</td><td>355</td></tr><tr><td>3</td><td>5859.00</td><td>54.59</td><td>68.20</td><td>-13.61</td><td>53.12</td><td>1.47</td><td>Peak</td><td>259</td><td>355</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	5447.66	55.39	74.00	-18.61	54.74	0.65	Peak	259	355	2	5463.95	53.75	68.20	-14.45	53.05	0.70	Peak	259	355	3	5859.00	54.59	68.20	-13.61	53.12	1.47	Peak	259	355
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																						
								cm	deg																																																						
1	5447.66	55.39	74.00	-18.61	54.74	0.65	Peak	259	355																																																						
2	5463.95	53.75	68.20	-14.45	53.05	0.70	Peak	259	355																																																						
3	5859.00	54.59	68.20	-13.61	53.12	1.47	Peak	259	355																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															



Band Edge measurement

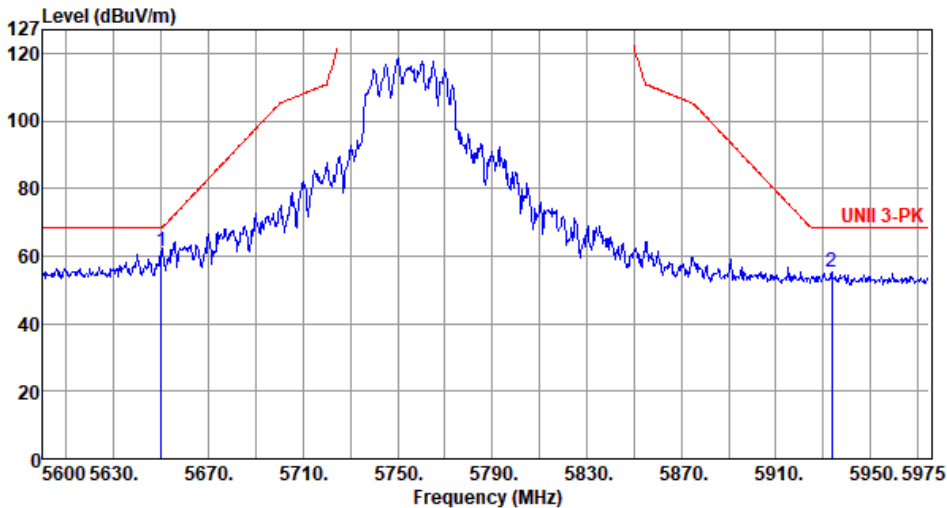
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5710																				
Polarization	Vertical-Average																						
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5455.33</td><td>42.59</td><td>54.00</td><td>-11.41</td><td>41.92</td><td>0.67</td><td>Average</td><td>259</td><td>355</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5455.33	42.59	54.00	-11.41	41.92	0.67	Average	259	355
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5455.33	42.59	54.00	-11.41	41.92	0.67	Average	259	355														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5755																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5649.88</td><td>61.60</td><td>68.20</td><td>-6.60</td><td>60.68</td><td>0.92</td><td>Peak</td><td>259</td><td>136</td></tr><tr><td>2</td><td>5933.75</td><td>55.10</td><td>68.20</td><td>-13.10</td><td>53.44</td><td>1.66</td><td>Peak</td><td>259</td><td>136</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5649.88	61.60	68.20	-6.60	60.68	0.92	Peak	259	136	2	5933.75	55.10	68.20	-13.10	53.44	1.66	Peak	259	136
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5649.88	61.60	68.20	-6.60	60.68	0.92	Peak	259	136																								
2	5933.75	55.10	68.20	-13.10	53.44	1.66	Peak	259	136																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

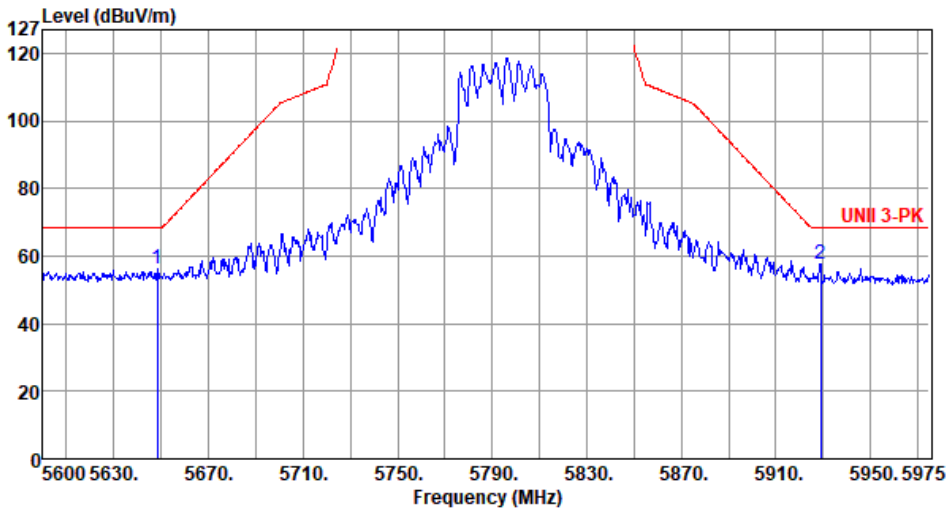
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5755																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBUV/m) UNI 3-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5649.13</td><td>62.57</td><td>68.20</td><td>-5.63</td><td>61.65</td><td>0.92</td><td>Peak</td><td>202</td><td>4</td></tr><tr><td>2</td><td>5929.63</td><td>55.23</td><td>68.20</td><td>-12.97</td><td>53.57</td><td>1.66</td><td>Peak</td><td>202</td><td>4</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5649.13	62.57	68.20	-5.63	61.65	0.92	Peak	202	4	2	5929.63	55.23	68.20	-12.97	53.57	1.66	Peak	202	4
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5649.13	62.57	68.20	-5.63	61.65	0.92	Peak	202	4																								
2	5929.63	55.23	68.20	-12.97	53.57	1.66	Peak	202	4																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5795																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5648.38</td><td>56.07</td><td>68.20</td><td>-12.13</td><td>55.15</td><td>0.92</td><td>Peak</td><td>233</td><td>290</td></tr><tr><td>2</td><td>5928.88</td><td>57.59</td><td>68.20</td><td>-10.61</td><td>55.93</td><td>1.66</td><td>Peak</td><td>233</td><td>290</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5648.38	56.07	68.20	-12.13	55.15	0.92	Peak	233	290	2	5928.88	57.59	68.20	-10.61	55.93	1.66	Peak	233	290
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5648.38	56.07	68.20	-12.13	55.15	0.92	Peak	233	290																								
2	5928.88	57.59	68.20	-10.61	55.93	1.66	Peak	233	290																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

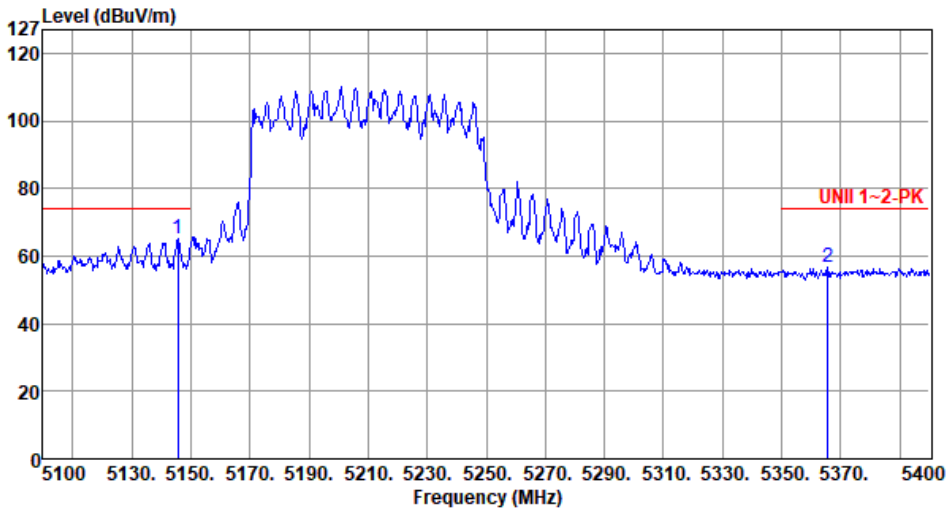
Appendix D.2

Modulation	be EHT40	Test Freq. (MHz)	5795																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m) UNII 3-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5649.13</td><td>57.74</td><td>68.20</td><td>-10.46</td><td>56.82</td><td>0.92</td><td>Peak</td><td>224</td><td>346</td></tr><tr><td>2</td><td>5925.88</td><td>59.26</td><td>68.20</td><td>-8.94</td><td>57.60</td><td>1.66</td><td>Peak</td><td>224</td><td>346</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5649.13	57.74	68.20	-10.46	56.82	0.92	Peak	224	346	2	5925.88	59.26	68.20	-8.94	57.60	1.66	Peak	224	346
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5649.13	57.74	68.20	-10.46	56.82	0.92	Peak	224	346																								
2	5925.88	59.26	68.20	-8.94	57.60	1.66	Peak	224	346																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5210																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5145.60</td><td>64.91</td><td>74.00</td><td>-9.09</td><td>63.83</td><td>1.08</td><td>Peak</td><td>316</td><td>302</td></tr><tr><td>2</td><td>5365.50</td><td>56.56</td><td>74.00</td><td>-17.44</td><td>56.20</td><td>0.36</td><td>Peak</td><td>316</td><td>302</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.60	64.91	74.00	-9.09	63.83	1.08	Peak	316	302	2	5365.50	56.56	74.00	-17.44	56.20	0.36	Peak	316	302
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.60	64.91	74.00	-9.09	63.83	1.08	Peak	316	302																								
2	5365.50	56.56	74.00	-17.44	56.20	0.36	Peak	316	302																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

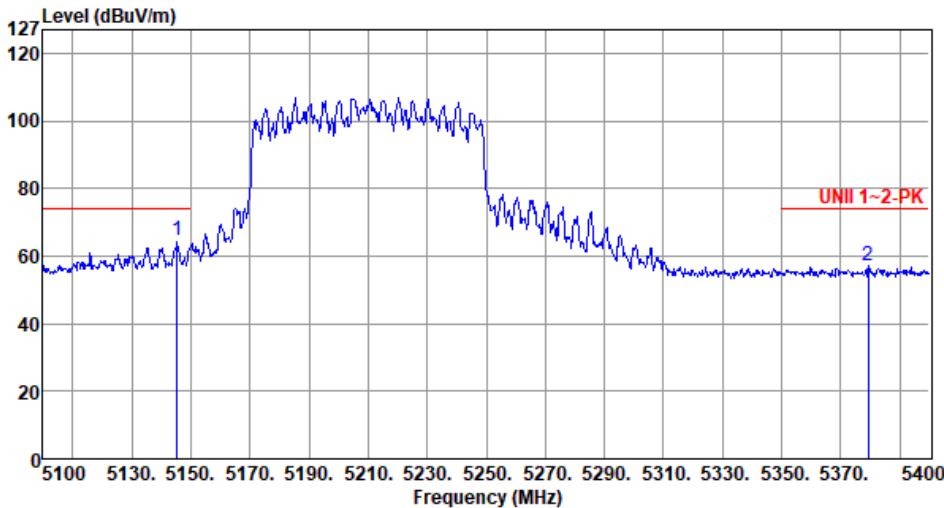
Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5210
Polarization	Horizontal-Average		
Test By :Akun Chung Temperature(°C):22 Humidity(%):63			
Level (dBuV/m) </			



Band Edge measurement

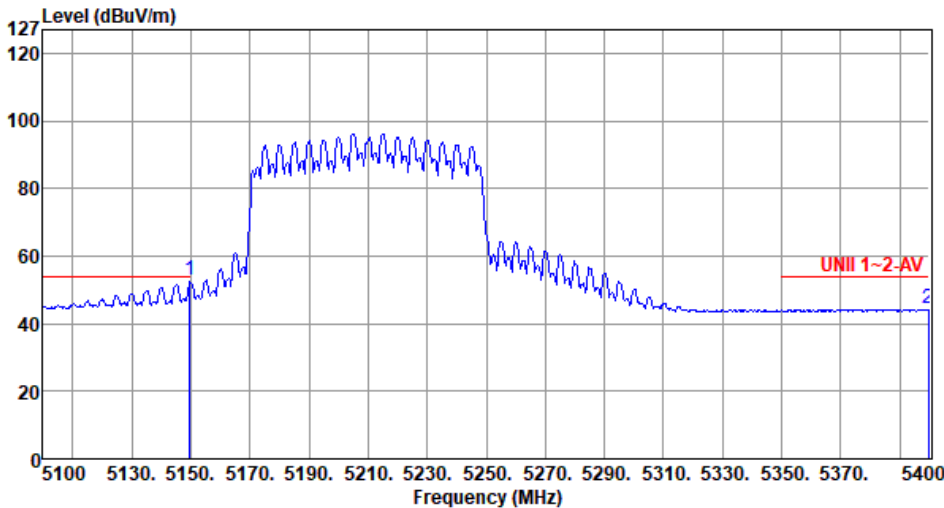
Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5210																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5145.30</td><td>64.67</td><td>74.00</td><td>-9.33</td><td>63.59</td><td>1.08</td><td>Peak</td><td>242</td><td>178</td></tr><tr><td>2</td><td>5379.30</td><td>57.07</td><td>74.00</td><td>-16.93</td><td>56.68</td><td>0.39</td><td>Peak</td><td>242</td><td>178</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.30	64.67	74.00	-9.33	63.59	1.08	Peak	242	178	2	5379.30	57.07	74.00	-16.93	56.68	0.39	Peak	242	178
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.30	64.67	74.00	-9.33	63.59	1.08	Peak	242	178																								
2	5379.30	57.07	74.00	-16.93	56.68	0.39	Peak	242	178																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5210																														
Polarization	Vertical-Average																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.80</td><td>53.17</td><td>54.00</td><td>-0.83</td><td>52.07</td><td>1.10</td><td>Average</td><td>242</td><td>178</td></tr><tr><td>2</td><td>5399.70</td><td>44.30</td><td>54.00</td><td>-9.70</td><td>43.87</td><td>0.43</td><td>Average</td><td>242</td><td>178</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	53.17	54.00	-0.83	52.07	1.10	Average	242	178	2	5399.70	44.30	54.00	-9.70	43.87	0.43	Average	242	178
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	53.17	54.00	-0.83	52.07	1.10	Average	242	178																								
2	5399.70	44.30	54.00	-9.70	43.87	0.43	Average	242	178																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

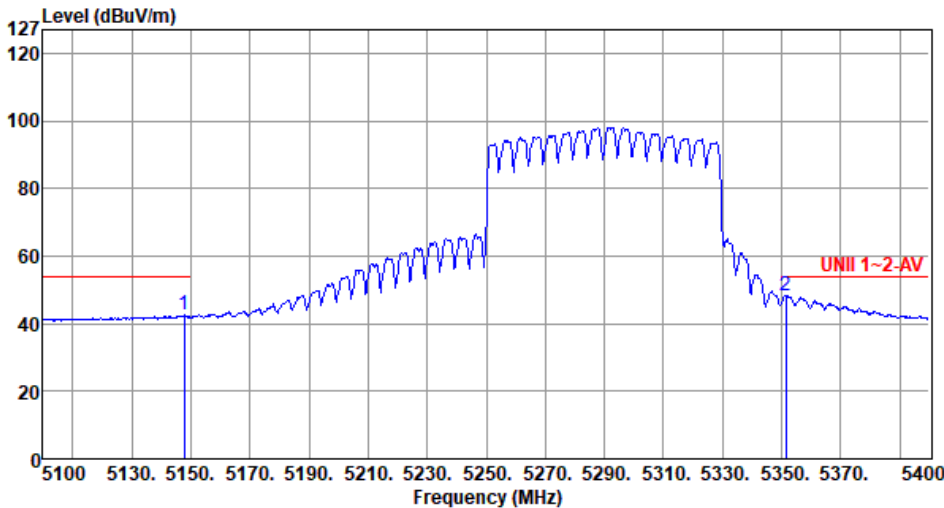
Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5290																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.00</td><td>56.57</td><td>74.00</td><td>-17.43</td><td>55.47</td><td>1.10</td><td>Peak</td><td>214</td><td>285</td></tr><tr><td>2</td><td>5350.80</td><td>60.33</td><td>74.00</td><td>-13.67</td><td>60.01</td><td>0.32</td><td>Peak</td><td>214</td><td>285</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.00	56.57	74.00	-17.43	55.47	1.10	Peak	214	285	2	5350.80	60.33	74.00	-13.67	60.01	0.32	Peak	214	285
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.00	56.57	74.00	-17.43	55.47	1.10	Peak	214	285																								
2	5350.80	60.33	74.00	-13.67	60.01	0.32	Peak	214	285																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

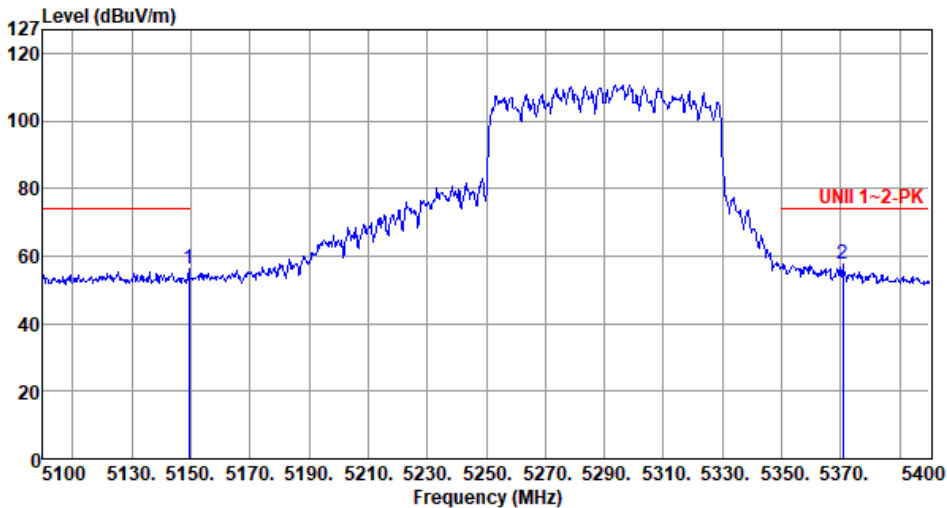
Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5290																														
Polarization	Horizontal-Average																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5147.70</td><td>42.44</td><td>54.00</td><td>-11.56</td><td>41.34</td><td>1.10</td><td>Average</td><td>214</td><td>285</td></tr><tr><td>2</td><td>5351.40</td><td>48.34</td><td>54.00</td><td>-5.66</td><td>48.02</td><td>0.32</td><td>Average</td><td>214</td><td>285</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5147.70	42.44	54.00	-11.56	41.34	1.10	Average	214	285	2	5351.40	48.34	54.00	-5.66	48.02	0.32	Average	214	285
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5147.70	42.44	54.00	-11.56	41.34	1.10	Average	214	285																								
2	5351.40	48.34	54.00	-5.66	48.02	0.32	Average	214	285																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5290																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.50</td><td>56.14</td><td>74.00</td><td>-17.86</td><td>55.04</td><td>1.10</td><td>Peak</td><td>319</td><td>355</td></tr><tr><td>2</td><td>5370.60</td><td>57.77</td><td>74.00</td><td>-16.23</td><td>57.41</td><td>0.36</td><td>Peak</td><td>319</td><td>355</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.50	56.14	74.00	-17.86	55.04	1.10	Peak	319	355	2	5370.60	57.77	74.00	-16.23	57.41	0.36	Peak	319	355
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.50	56.14	74.00	-17.86	55.04	1.10	Peak	319	355																								
2	5370.60	57.77	74.00	-16.23	57.41	0.36	Peak	319	355																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

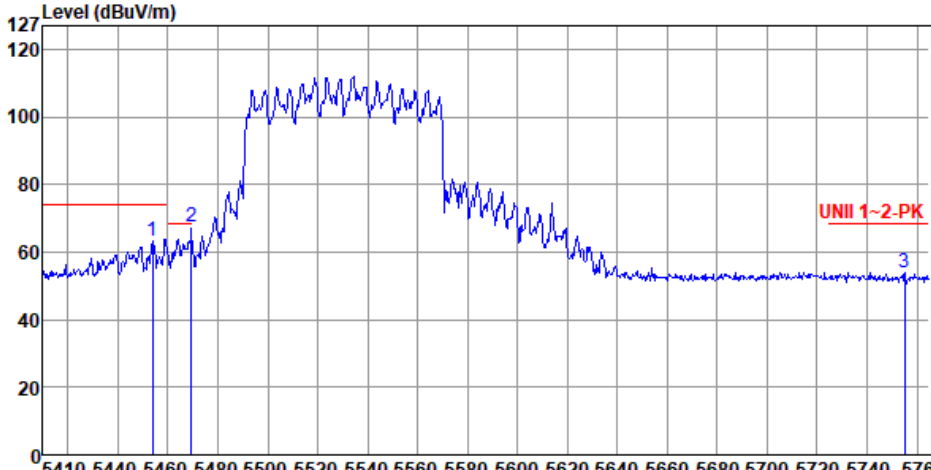
Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5290																														
Polarization	Vertical-Average																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5115.30</td><td>42.43</td><td>54.00</td><td>-11.57</td><td>41.42</td><td>1.01</td><td>Average</td><td>319</td><td>355</td></tr><tr><td>2</td><td>5350.20</td><td>45.67</td><td>54.00</td><td>-8.33</td><td>45.35</td><td>0.32</td><td>Average</td><td>319</td><td>355</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5115.30	42.43	54.00	-11.57	41.42	1.01	Average	319	355	2	5350.20	45.67	54.00	-8.33	45.35	0.32	Average	319	355
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5115.30	42.43	54.00	-11.57	41.42	1.01	Average	319	355																								
2	5350.20	45.67	54.00	-8.33	45.35	0.32	Average	319	355																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

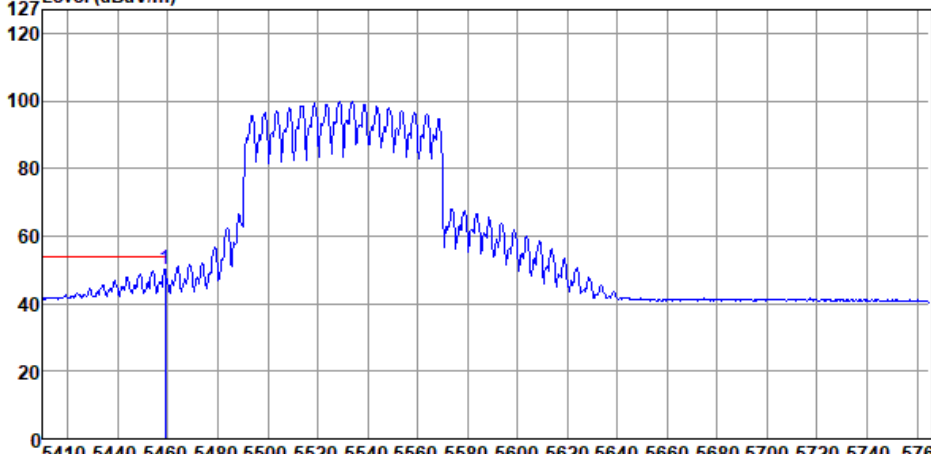
Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5530																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5454.02</td><td>63.03</td><td>74.00</td><td>-10.97</td><td>62.36</td><td>0.67</td><td>Peak</td><td>209</td><td>298</td></tr><tr><td>2</td><td>5469.29</td><td>67.71</td><td>68.20</td><td>-0.49</td><td>66.99</td><td>0.72</td><td>Peak</td><td>209</td><td>298</td></tr><tr><td>3</td><td>5755.06</td><td>54.13</td><td>68.20</td><td>-14.07</td><td>52.95</td><td>1.18</td><td>Peak</td><td>209</td><td>298</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5454.02	63.03	74.00	-10.97	62.36	0.67	Peak	209	298	2	5469.29	67.71	68.20	-0.49	66.99	0.72	Peak	209	298	3	5755.06	54.13	68.20	-14.07	52.95	1.18	Peak	209	298
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5454.02	63.03	74.00	-10.97	62.36	0.67	Peak	209	298																																		
2	5469.29	67.71	68.20	-0.49	66.99	0.72	Peak	209	298																																		
3	5755.06	54.13	68.20	-14.07	52.95	1.18	Peak	209	298																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5530																														
Polarization	Horizontal-Average																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.99</td><td>50.20</td><td>54.00</td><td>-3.80</td><td>49.51</td><td>0.69</td><td>Average</td><td>209</td><td>298</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5458.99	50.20	54.00	-3.80	49.51	0.69	Average	209	298
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																								
1	5458.99	50.20	54.00	-3.80	49.51	0.69	Average	209	298																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5530																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																											
Level (dBuV/m) 127 120 100 80 60 40 20 0 5410 5440.5460.5480.5500.5520.5540.5560.5580.5600.5620.5640.5660.5680.5700.5720.5740. 5765 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.70</td><td>65.79</td><td>74.00</td><td>-8.21</td><td>65.10</td><td>0.69</td><td>Peak</td><td>300</td><td>339</td></tr><tr><td>2</td><td>5464.67</td><td>67.33</td><td>68.20</td><td>-0.87</td><td>66.63</td><td>0.70</td><td>Peak</td><td>296</td><td>342</td></tr><tr><td>3</td><td>5733.76</td><td>54.24</td><td>68.20</td><td>-13.96</td><td>53.11</td><td>1.13</td><td>Peak</td><td>296</td><td>342</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.70	65.79	74.00	-8.21	65.10	0.69	Peak	300	339	2	5464.67	67.33	68.20	-0.87	66.63	0.70	Peak	296	342	3	5733.76	54.24	68.20	-13.96	53.11	1.13	Peak	296	342
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5459.70	65.79	74.00	-8.21	65.10	0.69	Peak	300	339																																		
2	5464.67	67.33	68.20	-0.87	66.63	0.70	Peak	296	342																																		
3	5733.76	54.24	68.20	-13.96	53.11	1.13	Peak	296	342																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

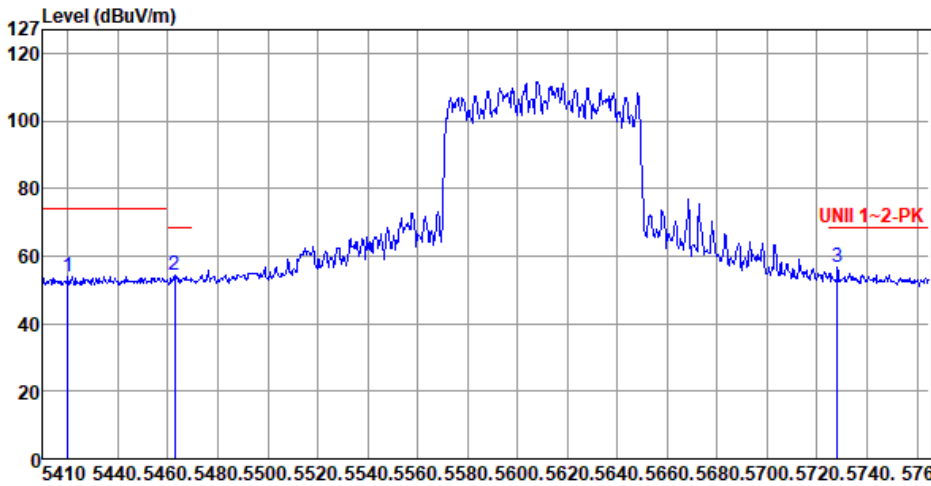
Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5530
Polarization	Vertical-Average		
Test By :Akun Chung Temperature(°C):22 Humidity(%):63			
Level (dBuV/m) </			



Band Edge measurement

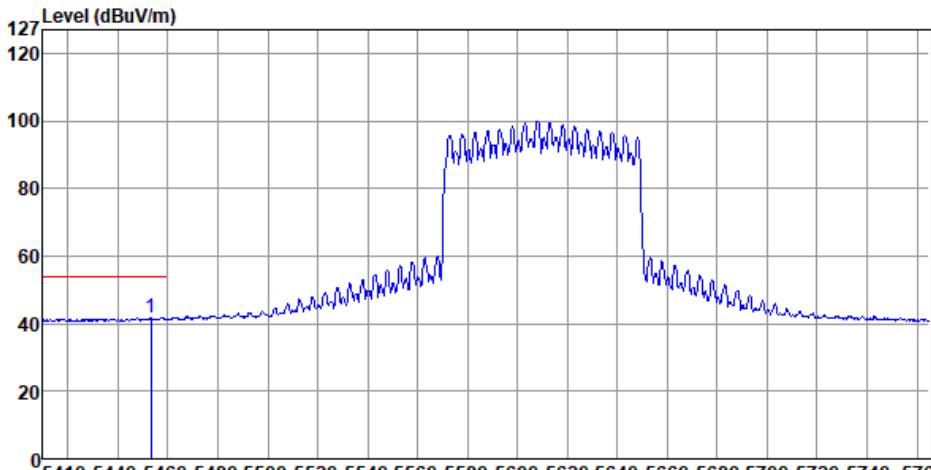
Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5610																																																		
Polarization	Horizontal-Peak																																																				
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5419.94</td><td>53.98</td><td>74.00</td><td>-20.02</td><td>53.46</td><td>0.52</td><td>Peak</td><td>192</td><td>127</td></tr><tr><td>2</td><td>5462.90</td><td>54.33</td><td>68.20</td><td>-13.87</td><td>53.63</td><td>0.70</td><td>Peak</td><td>192</td><td>127</td></tr><tr><td>3</td><td>5728.08</td><td>56.74</td><td>68.20</td><td>-11.46</td><td>55.62</td><td>1.12</td><td>Peak</td><td>192</td><td>127</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5419.94	53.98	74.00	-20.02	53.46	0.52	Peak	192	127	2	5462.90	54.33	68.20	-13.87	53.63	0.70	Peak	192	127	3	5728.08	56.74	68.20	-11.46	55.62	1.12	Peak	192	127
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																												
1	5419.94	53.98	74.00	-20.02	53.46	0.52	Peak	192	127																																												
2	5462.90	54.33	68.20	-13.87	53.63	0.70	Peak	192	127																																												
3	5728.08	56.74	68.20	-11.46	55.62	1.12	Peak	192	127																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5610																				
Polarization	Horizontal-Average																						
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5453.31</td><td>41.75</td><td>54.00</td><td>-12.25</td><td>41.08</td><td>0.67</td><td>Average</td><td>192</td><td>127</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5453.31	41.75	54.00	-12.25	41.08	0.67	Average	192	127
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5453.31	41.75	54.00	-12.25	41.08	0.67	Average	192	127														



Band Edge measurement

Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5610																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																											
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5458.99</td><td>54.48</td><td>74.00</td><td>-19.52</td><td>53.79</td><td>0.69</td><td>Peak</td><td>306</td><td>341</td></tr><tr><td>2</td><td>5470.00</td><td>54.89</td><td>68.20</td><td>-13.31</td><td>54.17</td><td>0.72</td><td>Peak</td><td>306</td><td>341</td></tr><tr><td>3</td><td>5725.24</td><td>55.56</td><td>68.20</td><td>-12.64</td><td>54.45</td><td>1.11</td><td>Peak</td><td>306</td><td>341</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5458.99	54.48	74.00	-19.52	53.79	0.69	Peak	306	341	2	5470.00	54.89	68.20	-13.31	54.17	0.72	Peak	306	341	3	5725.24	55.56	68.20	-12.64	54.45	1.11	Peak	306	341
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5458.99	54.48	74.00	-19.52	53.79	0.69	Peak	306	341																																		
2	5470.00	54.89	68.20	-13.31	54.17	0.72	Peak	306	341																																		
3	5725.24	55.56	68.20	-12.64	54.45	1.11	Peak	306	341																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

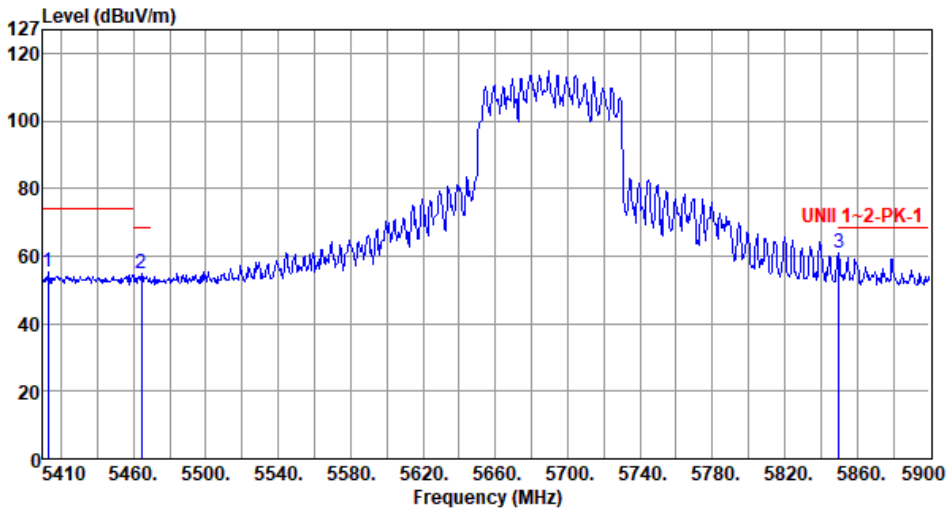
Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5610
Polarization	Vertical-Average		
Test By :Akun Chung Temperature(°C):22 Humidity(%):63			
Level (dBUV/m)			



Band Edge measurement

Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5690																																																		
Polarization	Horizontal-Peak																																																				
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5412.94</td><td>55.43</td><td>74.00</td><td>-18.57</td><td>54.95</td><td>0.48</td><td>Peak</td><td>305</td><td>137</td></tr><tr><td>2</td><td>5464.39</td><td>54.65</td><td>68.20</td><td>-13.55</td><td>53.95</td><td>0.70</td><td>Peak</td><td>305</td><td>137</td></tr><tr><td>3</td><td>5850.02</td><td>61.09</td><td>68.20</td><td>-7.11</td><td>59.67</td><td>1.42</td><td>Peak</td><td>305</td><td>137</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5412.94	55.43	74.00	-18.57	54.95	0.48	Peak	305	137	2	5464.39	54.65	68.20	-13.55	53.95	0.70	Peak	305	137	3	5850.02	61.09	68.20	-7.11	59.67	1.42	Peak	305	137
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																												
1	5412.94	55.43	74.00	-18.57	54.95	0.48	Peak	305	137																																												
2	5464.39	54.65	68.20	-13.55	53.95	0.70	Peak	305	137																																												
3	5850.02	61.09	68.20	-7.11	59.67	1.42	Peak	305	137																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

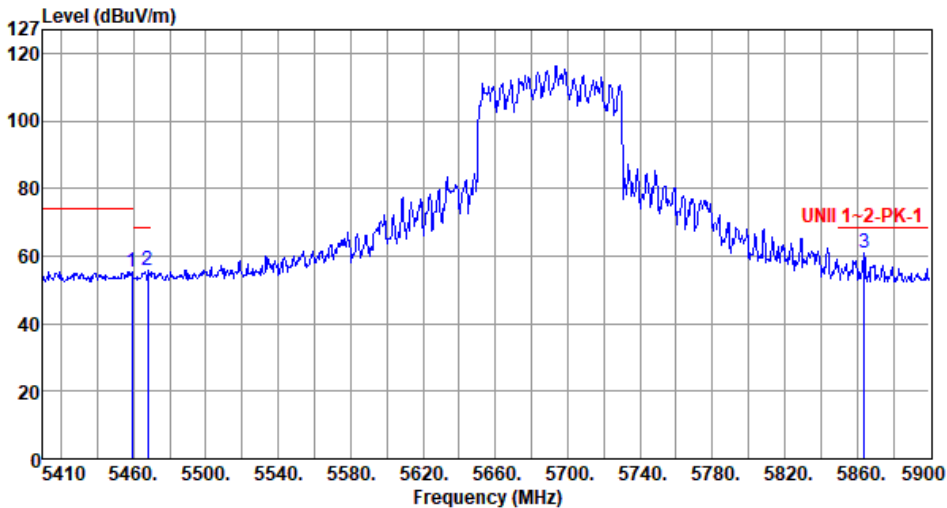
Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5690																												
Polarization	Horizontal-Average																														
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																															
Level (dBuV/m) <table><tr><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><td>1</td><td>5416.86</td><td>43.01</td><td>54.00</td><td>-10.99</td><td>42.50</td><td>0.51</td><td>Average</td><td>305</td><td>137</td></tr></table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dB	reading	dB/m		High	Table	1	5416.86	43.01	54.00	-10.99	42.50	0.51	Average	305	137
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																							
MHz	level	dBuV/m	dB	reading	dB/m		High	Table																							
1	5416.86	43.01	54.00	-10.99	42.50	0.51	Average	305	137																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																															



Band Edge measurement

Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5690																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.00</td><td>55.52</td><td>74.00</td><td>-18.48</td><td>54.83</td><td>0.69</td><td>Peak</td><td>250</td><td>349</td></tr><tr><td>2</td><td>5467.82</td><td>55.92</td><td>68.20</td><td>-12.28</td><td>55.20</td><td>0.72</td><td>Peak</td><td>250</td><td>349</td></tr><tr><td>3</td><td>5863.74</td><td>61.14</td><td>68.20</td><td>-7.06</td><td>59.66</td><td>1.48</td><td>Peak</td><td>250</td><td>349</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.00	55.52	74.00	-18.48	54.83	0.69	Peak	250	349	2	5467.82	55.92	68.20	-12.28	55.20	0.72	Peak	250	349	3	5863.74	61.14	68.20	-7.06	59.66	1.48	Peak	250	349
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5459.00	55.52	74.00	-18.48	54.83	0.69	Peak	250	349																																		
2	5467.82	55.92	68.20	-12.28	55.20	0.72	Peak	250	349																																		
3	5863.74	61.14	68.20	-7.06	59.66	1.48	Peak	250	349																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

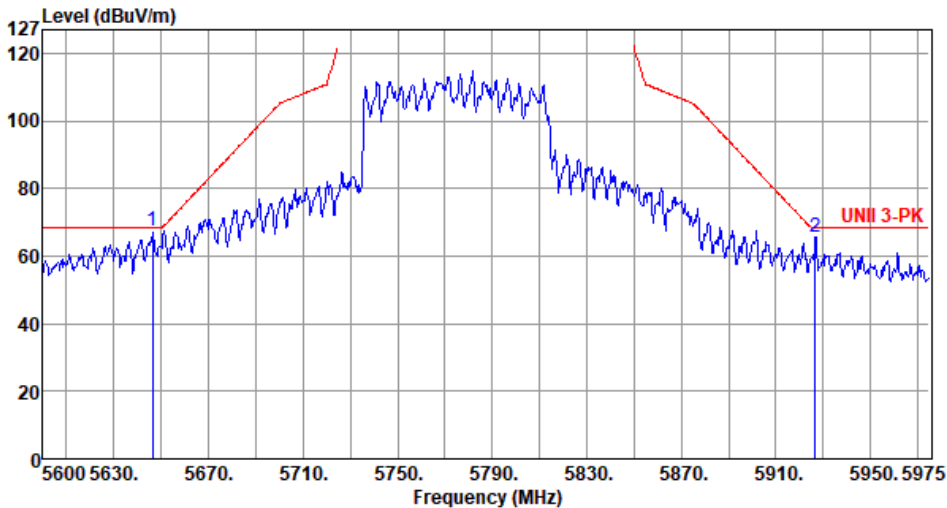
Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5690
Polarization	Vertical-Average		
Test By :Akun Chung Temperature(°C):22 Humidity(%):63			
Level (dBuV/m) <			



Band Edge measurement

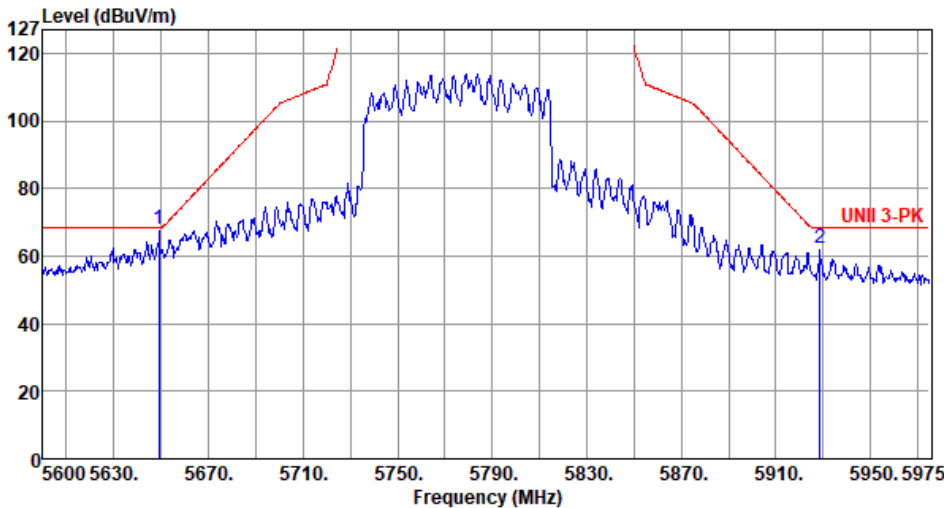
Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5775																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5646.50</td><td>67.30</td><td>68.20</td><td>-0.90</td><td>66.39</td><td>0.91</td><td>Peak</td><td>243</td><td>126</td></tr><tr><td>2</td><td>5926.63</td><td>65.67</td><td>68.20</td><td>-2.53</td><td>64.01</td><td>1.66</td><td>Peak</td><td>236</td><td>132</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5646.50	67.30	68.20	-0.90	66.39	0.91	Peak	243	126	2	5926.63	65.67	68.20	-2.53	64.01	1.66	Peak	236	132
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5646.50	67.30	68.20	-0.90	66.39	0.91	Peak	243	126																								
2	5926.63	65.67	68.20	-2.53	64.01	1.66	Peak	236	132																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

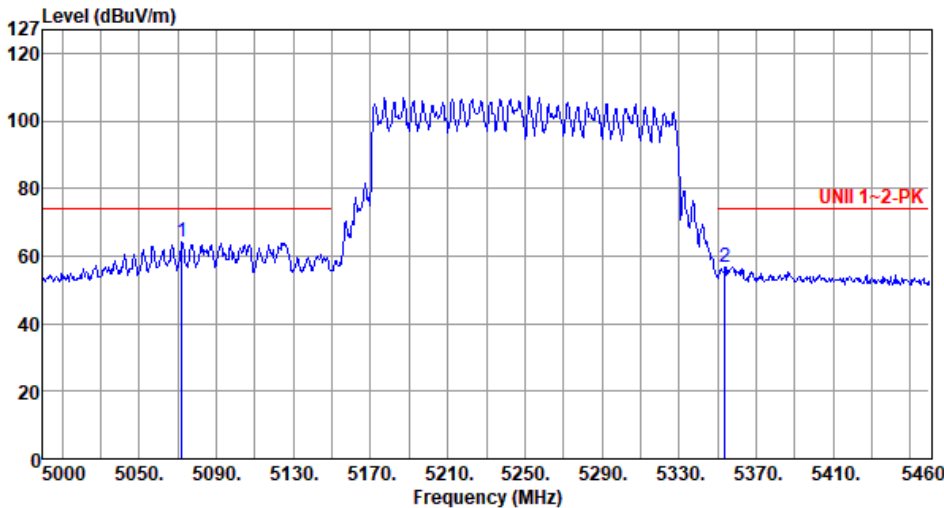
Appendix D.2

Modulation	be EHT80	Test Freq. (MHz)	5775																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5649.13</td><td>67.81</td><td>68.20</td><td>-0.39</td><td>66.89</td><td>0.92</td><td>Peak</td><td>299</td><td>353</td></tr><tr><td>2</td><td>5928.50</td><td>62.15</td><td>68.20</td><td>-6.05</td><td>60.49</td><td>1.66</td><td>Peak</td><td>238</td><td>348</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5649.13	67.81	68.20	-0.39	66.89	0.92	Peak	299	353	2	5928.50	62.15	68.20	-6.05	60.49	1.66	Peak	238	348
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5649.13	67.81	68.20	-0.39	66.89	0.92	Peak	299	353																								
2	5928.50	62.15	68.20	-6.05	60.49	1.66	Peak	238	348																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

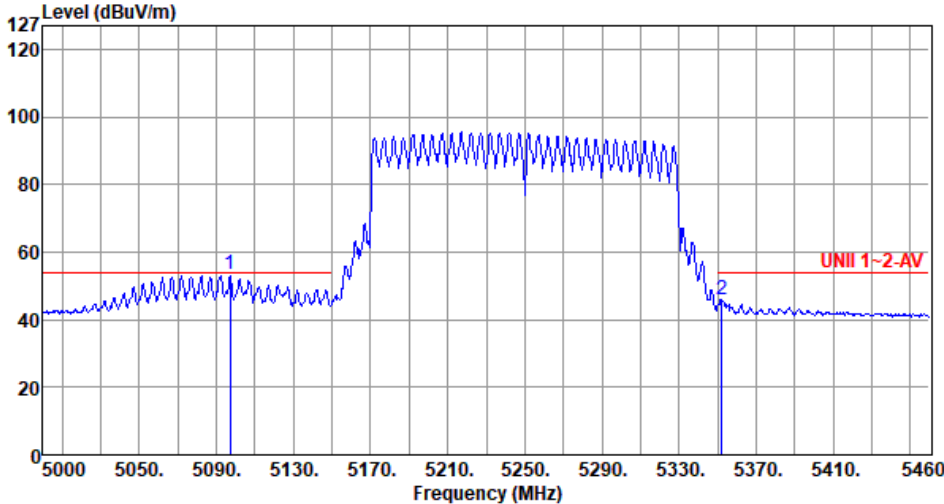
Appendix D.2

Modulation	be EHT160	Test Freq. (MHz)	5250																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5072.22</td><td>64.02</td><td>74.00</td><td>-9.98</td><td>63.21</td><td>0.81</td><td>Peak</td><td>326</td><td>316</td></tr><tr><td>2</td><td>5353.74</td><td>56.69</td><td>74.00</td><td>-17.31</td><td>56.36</td><td>0.33</td><td>Peak</td><td>216</td><td>292</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5072.22	64.02	74.00	-9.98	63.21	0.81	Peak	326	316	2	5353.74	56.69	74.00	-17.31	56.36	0.33	Peak	216	292
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5072.22	64.02	74.00	-9.98	63.21	0.81	Peak	326	316																																		
2	5353.74	56.69	74.00	-17.31	56.36	0.33	Peak	216	292																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

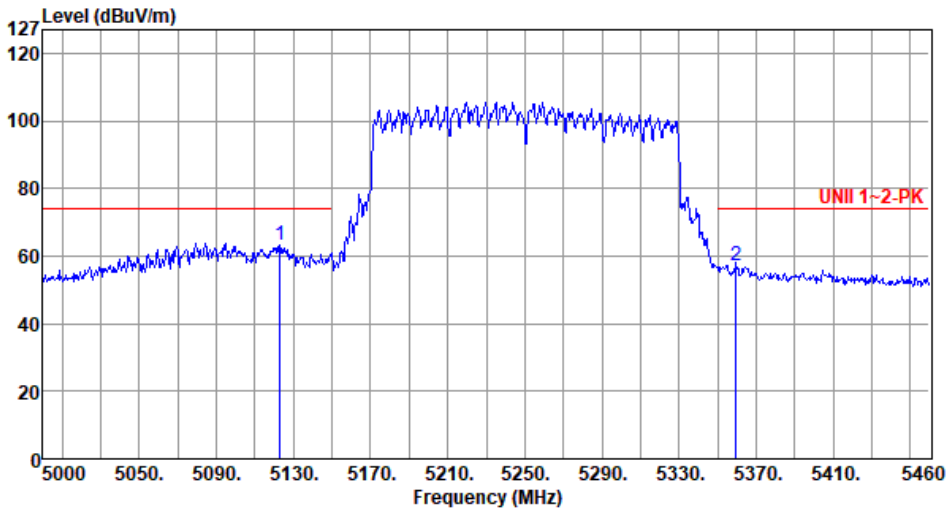
Appendix D.2

Modulation	be EHT160	Test Freq. (MHz)	5250																																								
Polarization	Horizontal-Average																																										
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5097.06</td><td>53.51</td><td>54.00</td><td>-0.49</td><td>52.55</td><td>0.96</td><td>Average</td><td>326</td><td>316</td></tr><tr><td>2</td><td>5352.36</td><td>45.93</td><td>54.00</td><td>-8.07</td><td>45.61</td><td>0.32</td><td>Average</td><td>216</td><td>292</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5097.06	53.51	54.00	-0.49	52.55	0.96	Average	326	316	2	5352.36	45.93	54.00	-8.07	45.61	0.32	Average	216	292
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5097.06	53.51	54.00	-0.49	52.55	0.96	Average	326	316																																		
2	5352.36	45.93	54.00	-8.07	45.61	0.32	Average	216	292																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

Appendix D.2

Modulation	be EHT160	Test Freq. (MHz)	5250																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5122.82</td><td>63.25</td><td>74.00</td><td>-10.75</td><td>62.21</td><td>1.04</td><td>Peak</td><td>323</td><td>166</td></tr><tr><td>2</td><td>5359.72</td><td>57.10</td><td>74.00</td><td>-16.90</td><td>56.76</td><td>0.34</td><td>Peak</td><td>232</td><td>1</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5122.82	63.25	74.00	-10.75	62.21	1.04	Peak	323	166	2	5359.72	57.10	74.00	-16.90	56.76	0.34	Peak	232	1
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5122.82	63.25	74.00	-10.75	62.21	1.04	Peak	323	166																								
2	5359.72	57.10	74.00	-16.90	56.76	0.34	Peak	232	1																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

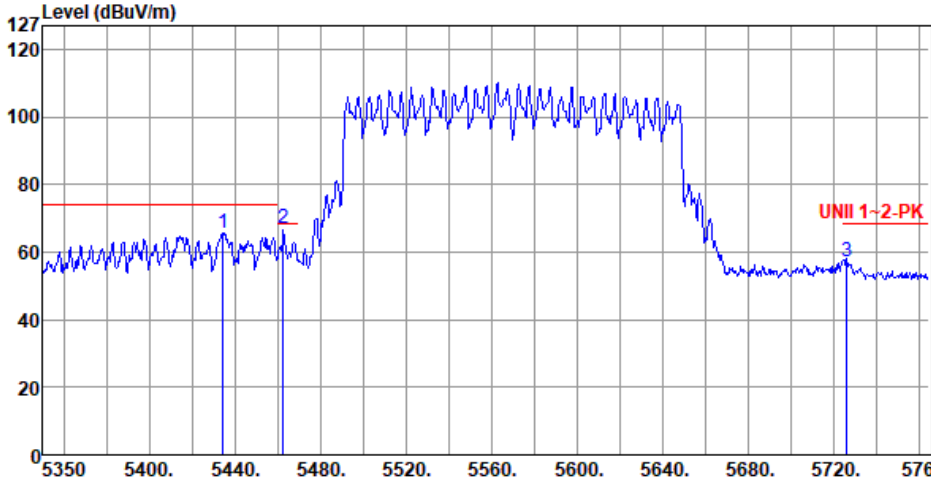
Appendix D.2

Modulation	be EHT160	Test Freq. (MHz)	5250
Polarization	Vertical-Average		
Test By :Akun Chung Temperature(°C):22 Humidity(%):63			
Level (dBuV/m) Freq. Emission Limit Margin SA Factor Remark ANT Turn level MHz dBuV/m dBuV/m dB reading dB/m dBuV 1 5089.24 53.50 54.00 -0.50 52.57 0.93 Average 323 166 2 5350.00 48.36 54.00 -5.64 48.04 0.32 Average 232 1			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Band Edge measurement

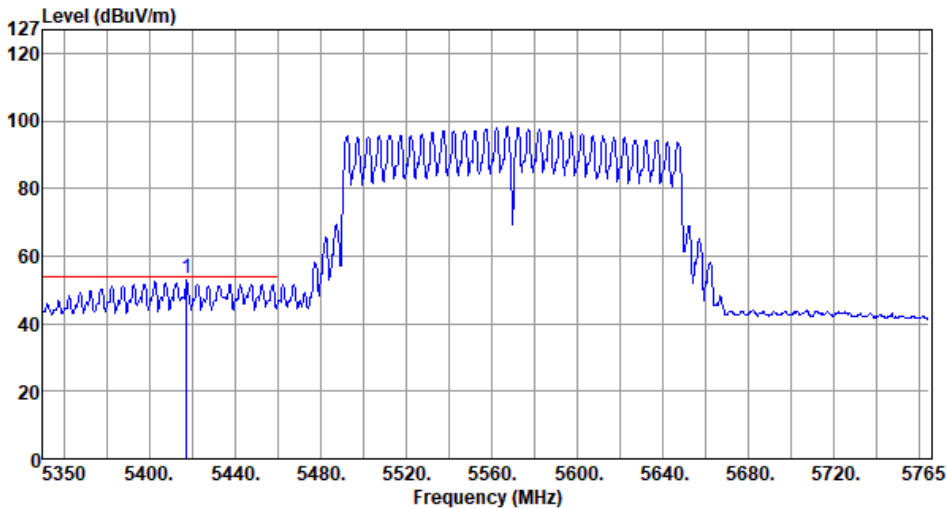
Appendix D.2

Modulation	be EHT160	Test Freq. (MHz)	5570																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5434.25</td><td>65.81</td><td>74.00</td><td>-8.19</td><td>65.22</td><td>0.59</td><td>Peak</td><td>212</td><td>307</td></tr><tr><td>2</td><td>5462.47</td><td>66.85</td><td>68.20</td><td>-1.35</td><td>66.16</td><td>0.69</td><td>Peak</td><td>212</td><td>307</td></tr><tr><td>3</td><td>5726.41</td><td>57.34</td><td>68.20</td><td>-10.86</td><td>56.23</td><td>1.11</td><td>Peak</td><td>172</td><td>132</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5434.25	65.81	74.00	-8.19	65.22	0.59	Peak	212	307	2	5462.47	66.85	68.20	-1.35	66.16	0.69	Peak	212	307	3	5726.41	57.34	68.20	-10.86	56.23	1.11	Peak	172	132
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5434.25	65.81	74.00	-8.19	65.22	0.59	Peak	212	307																																		
2	5462.47	66.85	68.20	-1.35	66.16	0.69	Peak	212	307																																		
3	5726.41	57.34	68.20	-10.86	56.23	1.11	Peak	172	132																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

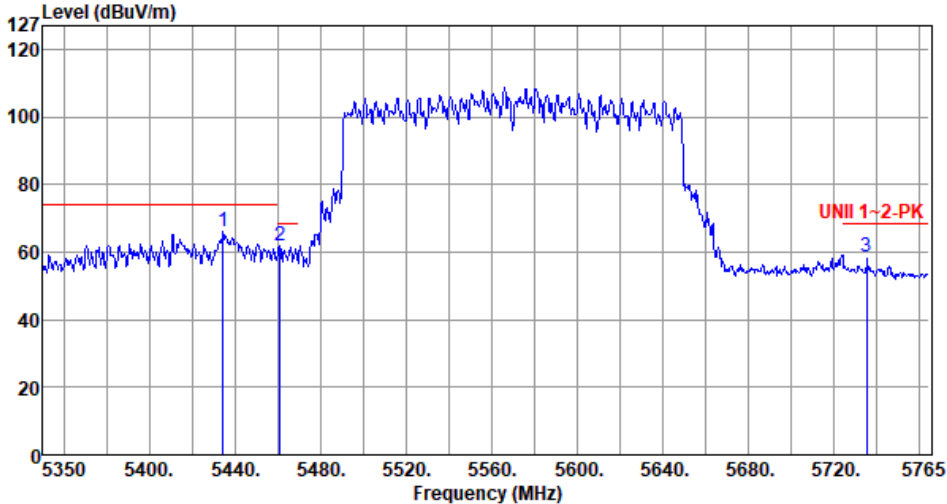
Appendix D.2

Modulation	be EHT160	Test Freq. (MHz)	5570																														
Polarization	Horizontal-Average																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5417.23</td><td>53.43</td><td>54.00</td><td>-0.57</td><td>52.92</td><td>0.51</td><td>Average</td><td>212</td><td>307</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5417.23	53.43	54.00	-0.57	52.92	0.51	Average	212	307
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																								
1	5417.23	53.43	54.00	-0.57	52.92	0.51	Average	212	307																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

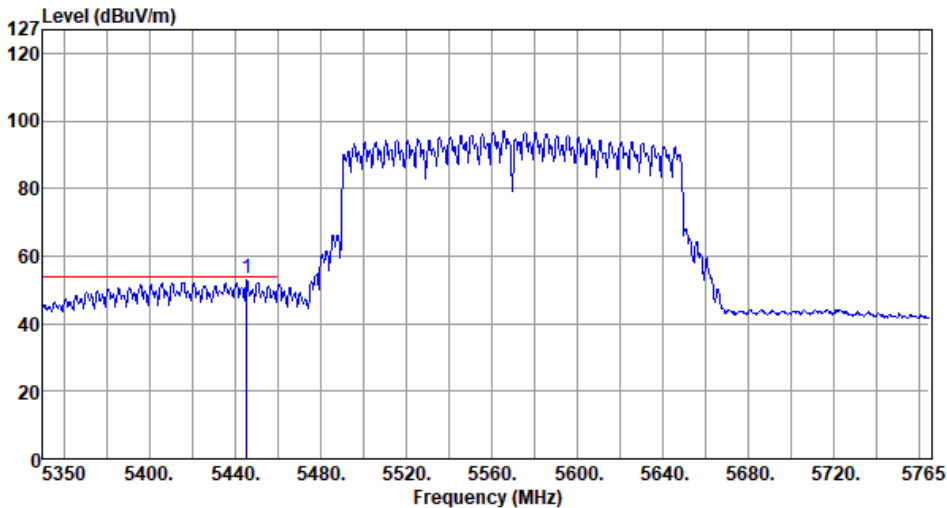
Appendix D.2

Modulation	be EHT160	Test Freq. (MHz)	5570																																																		
Polarization	Vertical-Peak																																																				
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5434.25</td><td>66.06</td><td>74.00</td><td>-7.94</td><td>65.47</td><td>0.59</td><td>Peak</td><td>205</td><td>164</td></tr><tr><td>2</td><td>5460.81</td><td>61.84</td><td>68.20</td><td>-6.36</td><td>61.15</td><td>0.69</td><td>Peak</td><td>205</td><td>164</td></tr><tr><td>3</td><td>5735.54</td><td>58.38</td><td>68.20</td><td>-9.82</td><td>57.25</td><td>1.13</td><td>Peak</td><td>244</td><td>238</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5434.25	66.06	74.00	-7.94	65.47	0.59	Peak	205	164	2	5460.81	61.84	68.20	-6.36	61.15	0.69	Peak	205	164	3	5735.54	58.38	68.20	-9.82	57.25	1.13	Peak	244	238
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																												
1	5434.25	66.06	74.00	-7.94	65.47	0.59	Peak	205	164																																												
2	5460.81	61.84	68.20	-6.36	61.15	0.69	Peak	205	164																																												
3	5735.54	58.38	68.20	-9.82	57.25	1.13	Peak	244	238																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

Appendix D.2

Modulation	be EHT160	Test Freq. (MHz)	5570																				
Polarization	Vertical-Average																						
Test By :Akun Chung Temperature(°C):22 Humidity(%):63																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5445.45</td><td>53.30</td><td>54.00</td><td>-0.70</td><td>52.66</td><td>0.64</td><td>Average</td><td>205</td><td>164</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5445.45	53.30	54.00	-0.70	52.66	0.64	Average	205	164
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5445.45	53.30	54.00	-0.70	52.66	0.64	Average	205	164														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							

Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	-12.46	-11.87	-11.78	-12.82
T20°C Vmin	-12.31	-12.53	-11.85	-11.98
T40°C Vnom	-14.08	-13.93	-13.85	-13.64
T30°C Vnom	-12.79	-12.41	-12.24	-12.42
T20°C Vnom	-12.41	-12.13	-12.32	-12.48
T10°C Vnom	-11.01	-10.52	-10.56	-10.74
T0°C Vnom	-9.95	-9.94	-9.78	-9.54
T-10°C Vnom	-8.55	-8.34	-8.96	-7.82
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: -10	

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	-11.09	-11.00	-10.62	-11.27
T20°C Vmin	-10.83	-10.58	-10.08	-10.53
T40°C Vnom	-13.10	-13.08	-12.72	-12.75
T30°C Vnom	-12.13	-12.18	-12.44	-11.75
T20°C Vnom	-10.99	-10.29	-10.36	-10.62
T10°C Vnom	-9.98	-9.61	-10.00	-9.59
T0°C Vnom	-8.49	-8.56	-7.76	-7.91
T-10°C Vnom	-7.79	-8.01	-7.20	-7.96
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: -10	

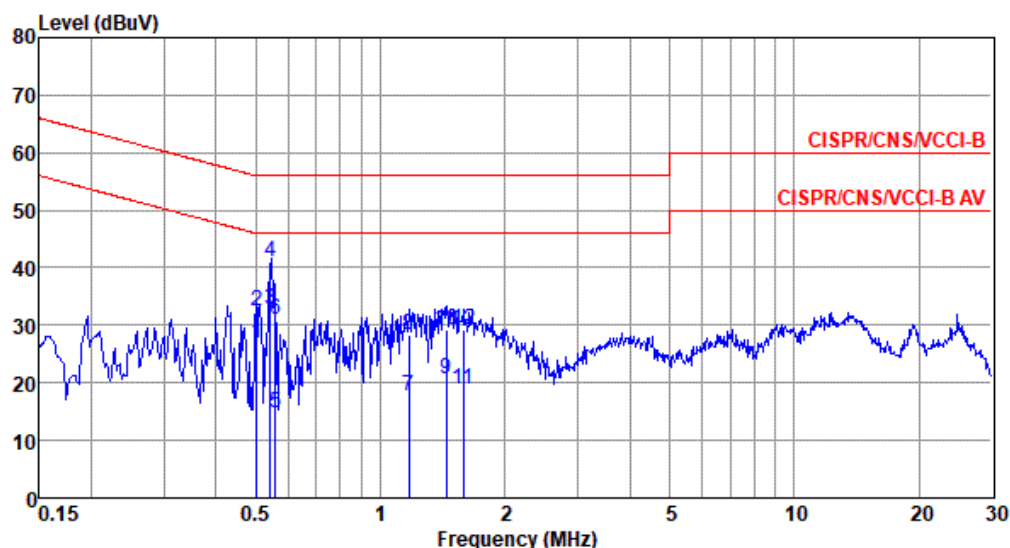


Modulation Mode	be EHT20	Test Freq. (MHz)	5785
Power Phase	Line		

Temperature: 21°C

Humidity: 64%

Test by : Akun Chung



	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.502	26.74	46.00	-19.26	16.72	9.64	0.04	Average
2	0.502	32.37	56.00	-23.63	22.35	9.64	0.04	QP
3*	0.542	32.69	46.00	-13.31	22.65	9.64	0.05	Average
4	0.542	41.09	56.00	-14.91	31.05	9.64	0.05	QP
5	0.558	14.90	46.00	-31.10	4.86	9.64	0.05	Average
6	0.558	31.09	56.00	-24.91	21.05	9.64	0.05	QP
7	1.172	17.57	46.00	-28.43	7.44	9.65	0.07	Average
8	1.172	28.40	56.00	-27.60	18.27	9.65	0.07	QP
9	1.441	20.68	46.00	-25.32	10.53	9.65	0.08	Average
10	1.441	29.25	56.00	-26.75	19.10	9.65	0.08	QP
11	1.585	18.81	46.00	-27.19	8.66	9.65	0.08	Average
12	1.585	29.19	56.00	-26.81	19.04	9.65	0.08	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

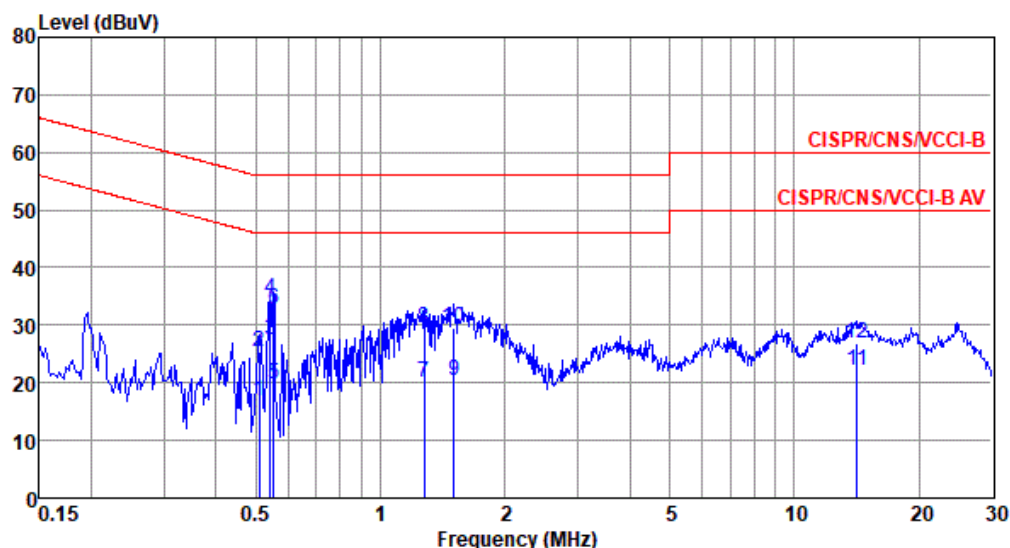
2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).

Modulation Mode	be EHT20	Test Freq. (MHz)	5785
Power Phase	Neutral		

Temperature: 21°C

Humidity: 64%

Test by : Akun Chung



	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.510	16.95	46.00	-29.05	6.99	9.63	0.05	Average
2	0.510	25.30	56.00	-30.70	15.34	9.63	0.05	QP
3*	0.542	27.57	46.00	-18.43	17.60	9.63	0.05	Average
4	0.542	34.40	56.00	-21.60	24.43	9.63	0.05	QP
5	0.552	19.86	46.00	-26.14	9.89	9.63	0.05	Average
6	0.552	32.85	56.00	-23.15	22.88	9.63	0.05	QP
7	1.276	20.01	46.00	-25.99	9.93	9.64	0.07	Average
8	1.276	29.38	56.00	-26.62	19.30	9.64	0.07	QP
9	1.503	20.43	46.00	-25.57	10.31	9.65	0.08	Average
10	1.503	29.59	56.00	-26.41	19.47	9.65	0.08	QP
11	14.213	22.23	50.00	-27.77	11.64	9.76	0.26	Average
12	14.213	26.92	60.00	-33.08	16.33	9.76	0.26	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).