



HUAKE TESTING

FCC Test Report

Report Reference No. : HK2604170426-1E

FCC ID : 2BV3B-DKZ-04A

Compiled by
(position+printed name+signature) . : Testing Engineer Len Liao

Supervised by
(position+printed name+signature) . : Technical Manager Sliver Wan

Approved by
(position+printed name+signature) . : Authorized Signatory Jason Zhou

Date of issue : May 11, 2026

Testing Laboratory Name..... : Shenzhen HUAKE Testing Technology Co., Ltd.

Address : 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Applicant's Name..... : iTreks Technologies Pte Ltd

Address : 5 UPPER ALJUNIED LINK #06-02, QUARTZ INDUSTRIAL
BUILDING 367903 SINGAPORE

Test Specification

Standard..... : FCC CFR Title 47 Part 2, Part 24E

TRF Originator : Shenzhen HUAKE Testing Technology Co., Ltd.

Shenzhen HUAKE Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Product Name..... : iTAS

Trade Mark..... : iTAS

Model Name..... : DKZ-04A

Series Model(s) : N/A

Frequency : Cat1 Band 2

Rating..... : DC3V from Battery

Hardware Version : V01

Firmware Version..... : V1.16.3

Result : PASS

Len Liao

Sliver Wan

Jason Zhou



TEST REPORT

Test Report No.:	HK2604170426-1E	May 11, 2026
		Date of issue

Product Name : iTAS

Model Name : DKZ-04A

Series Model(s) : N/A

Applicant : iTreks Technologies Pte Ltd

Address : 5 UPPER ALJUNIED LINK #06-02, QUARTZ INDUSTRIAL BUILDING 367903 SINGAPORE

Manufacturer : Zhejiang Dingkun Environmental Technology Co., LTD

Address : 2nd Floor, East, Building 4, No. 545 Xiandai Avenue, Gaoqiao Subdistrict (Development Zone), Tongxiang, Jiaxing, Zhejiang, China

Test Result	PASS
--------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1	<u>Test Standards</u>	<u>5</u>
2	<u>Summary</u>	<u>6</u>
2.1	General Remarks	6
2.2	Product Description	6
2.3	Equipment Under Test	6
2.4	Test Frequency List	7
2.5	Normal Accessory Setting	7
2.6	EUT Configuration	7
2.7	Related Submittal(s) / Grant (s)	7
2.8	Modifications	7
2.9	General Test Conditions/Configurations	8
3	<u>Test Environment</u>	<u>9</u>
3.1	Information of the Test Laboratory	9
3.2	Environmental Conditions	9
3.3	Test Description	9
3.4	Equipments Used during the Test	10
4	<u>Test Conditions and Results</u>	<u>11</u>
4.1	Output Power	11
4.2	Peak-to-Average Ratio (PAR)	17
4.3	Occupied Bandwidth and Emission Bandwidth	24
4.4	Band Edge Compliance	31
4.5	Spurious Emission on Antenna Port	36
4.6	Radiated Spurious Emission	55
4.7	Frequency Stability	63
5	<u>Test Setup Photos of the EUT</u>	<u>65</u>
6	<u>Photos of the EUT</u>	<u>67</u>



HUAKE TESTING

**** Issued History ****

Revision	Description	Issued Date	Remark
Revision 1.0	Initial Test Report Release	May 11, 2026	Jason Zhou

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



HUAKE TESTING

Page 5 of 67

Report No.: HK2604170426-1E

1 Test Standards

The tests were performed according to following standards:

[FCC Part 24](#): Public Mobile Services.

[ANSI/TIA-603-E-2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[FCC Part 2](#): Frequency Allocations and Radio Treaty Matters; General Rules and Regulations.

[KDB971168 D01:v03r01](#): Measurement Guidance For Certification of Licensed Digital Transmitters.

[ANSI C63.4](#): Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



2 Summary

2.1 General Remarks

Date of receipt of test sample	:	Apr. 17, 2026
Testing commenced on	:	Apr. 17, 2026
Testing concluded on	:	May 11, 2026

2.2 Product Description

Product Name:	iTAS
Model Name:	DKZ-04A
Series Model(s):	N/A
Model Difference:	N/A
Power Supply:	DC3V from Battery
Modulation Type:	QPSK,16QAM
Antenna Type:	Internal Antenna
Antenna Gain:	1.01dBi
Operation Frequency Band:	Cat1 Band 2
Operation Frequency:	Cat1 Band 2: 1850~1910 MHz(TX), 1930~1990 MHz(TX)
Extreme Temp. Tolerance:	-30°C to +70°C
Extreme Vol. Limits:	2.55VDC to 3.45VDC (nominal: 3VDC)
Note: 1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2. Antenna gain Refer to the antenna specifications. 3. The cable loss data is obtained from the supplier. 4. The test results in the report only apply to the tested sample.	

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 120V/ 60 Hz	☐ 115V/60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below) DC3V from Battery	



2.4 Test Frequency List

TX Channel Bandwidth	Frequency (MHz)	Channel
1.4 MHz	1850.7	18607
	1880.0	18900
	1909.3	19193
3 MHz	1851.5	18615
	1880.0	18900
	1908.5	19185
5 MHz	1852.5	18625
	1880.0	18900
	1907.5	19175
10 MHz	1855.0	18650
	1880.0	18900
	1905.0	19150
15 MHz	1857.5	18675
	1880.0	18900
	1902.5	19125
20 MHz	1860.0	18700
	1880.0	18900
	1900.0	19100

2.5 Normal Accessory Setting

Fully charged battery was used during the test.

2.6 EUT Configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○ Power Cable	Length (m):	/
	Shield:	/
	Detachable:	/
○ Multimeter	Manufacturer:	/
	Model No.:	/

2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2BV3B-DKZ-04A** filing to comply with FCC Part 24, Rules.

2.8 Modifications

No modifications were implemented to meet testing criteria.



2.9 General Test Conditions/Configurations

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	2.55V
	VN	3.0V
	VH	3.45V

NOTE:VL= lower extreme test voltage, VN = nominal voltage
VH = upper extreme test voltage, TN = normal temperature

3 Test Environment

3.1 Information of the Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.3 Test Description

PCSBand (1850-1915MHz pairedwith 1930-1995MHz)

Test Item	FCCRuleNo.	Requirements	Verdict
Effective(Isotropic) Radiated Output Power	Part§2.1046, Part§24.232	EIRP ≤ 2W	Pass
Peak-Average Ratio	Part§2.1046, Part§24.232	FCC:Limit≤13dB	Pass
Bandwidth	Part§2.1049 RSS-133	OBW: Nolimit. EBW: Nolimit.	Pass
Band Edges Compliance	Part§2.1051, Part§24.238	≤ -13dBm/1%*EBW, In1MHz bands immediately outside and adjacent to The frequency block.	Pass
Spurious Emission at Antenna Terminals	Part§2.1051, Part§24.238	≤-13dBm/1MHz, from 9kHz to10th harmonics but outside authorized Operating frequency ranges.	Pass
Field Strength of Spurious Radiation	Part§2.1053, Part§24.238	≤ -13dBm/1MHz.	Pass
Frequency Stability	Part§2.1055, Part§24.235	FCC:within authorized frequency block.	Pass

Note:

1. Pass: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.
5. The measurement uncertainty is not included in the test result.



3.4 Equipments Used during the Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	L.I.S.N.	R&S	ENV216	HKE-002	2026/02/11	1 Year
2	L.I.S.N.	R&S	ENV216	HKE-059	2026/02/04	1 Year
3	EMI Test Receiver	R&S	ESR-7	HKE-005	2026/02/06	1 Year
4	Spectrum analyzer	Agilent	N9020A	HKE-025	2026/02/06	1 Year
5	Spectrum analyzer	KEYSIGHT	N9020A	HKE-117	2026/02/06	1 Year
6	Spectrum analyzer	R&S	FSV3044	HKE-126	2026/02/06	1 Year
7	Preamplifier	Schwarzbeck	EMC051845SE	HKE-006	2026/02/04	1 Year
8	Preamplifier	Agilent	83051A	HKE-016	2026/02/04	1 Year
9	Preamplifier	QJD	QJD18-40-50	HKE-030	2026/02/05	1 Year
10	6dB Attenuator	Pasternack	6dB	HKE-152	2026/02/06	1 Year
11	EMI Test Receiver	R&S	ESR-7	HKE-010	2026/02/06	1 Year
12	Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	2026/02/06	2 Year
13	Loop Antenna	COM-POWER	AL-130R	HKE-014	2026/02/06	2 Year
14	Horn Antenna	Schwarzbeck	9120D	HKE-013	2026/02/06	2 Year
15	Broadband Horn Antenna	A-INFO	LB-180400-KF	HKE-031	2026/02/06	2 Year
16	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
17	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
18	RF Automatic control unit	Tonscend	JS0806-1	HKE-096	2026/02/06	1 Year
19	High pass filter unit	Tonscend	JS0806-F	HKE-055	2026/02/06	1 Year
20	Wireless Communication Test Set	R&S	CMW500	HKE-027	2026/02/06	1 Year
21	High-low temperature chamber	Guangke	HT-80L	HKE-118	2025/06/09	1 Year
22	Temperature and humidity meter	Boyang	HTC-1	HKE-075	2025/06/09	1 Year
23	RF Test Software	Tonscend	JS1120-3 Version 3.5.39	HKE-083	/	/
24	RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	/	/



4 Test Conditions and Results

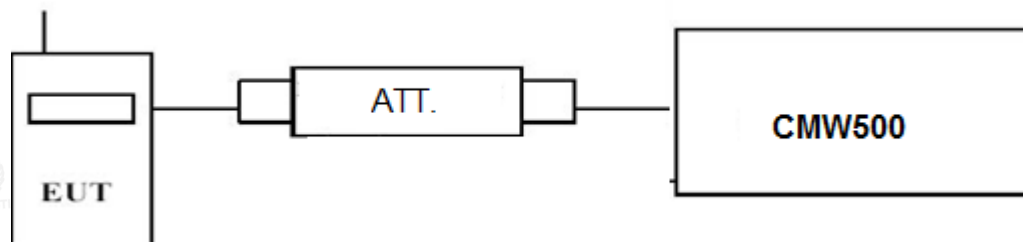
4.1 Output Power

4.1.1 Conducted Output Power

TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

TEST CONFIGURATION



TEST PROCEDURE

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

TEST RESULTS

Remark:

- We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of FDD Band 2;

FDD Band 2				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	Burst Average Power [dBm]	
			QPSK	16QAM
1.4 MHz	1850.7	1 RB low	22.26	21.40
		1 RB high	22.49	21.42
		50% RB mid	22.50	21.64
		100% RB	22.53	21.37
	1880.0	1 RB low	21.23	19.87
		1 RB high	21.03	19.76
		50% RB mid	21.25	20.16
		100% RB	20.83	19.59
	1909.3	1 RB low	24.85	23.79
		1 RB high	24.76	23.62
		50% RB mid	24.57	23.61
		100% RB	24.67	23.46
3 MHz	1851.5	1 RB low	22.52	21.61
		1 RB high	22.67	21.66
		50% RB mid	22.57	21.77
		100% RB	21.66	20.73



5 MHz	1880.0	1 RB low	21.58	20.61
		1 RB high	21.93	20.84
		50% RB mid	21.97	21.14
		100% RB	20.61	19.77
	1908.5	1 RB low	23.44	22.28
		1 RB high	23.52	22.42
		50% RB mid	23.21	22.44
		100% RB	22.30	21.36
	1852.5	1 RB low	22.71	21.36
		1 RB high	22.69	21.53
		50% RB mid	22.83	21.63
		100% RB	21.77	20.82
	1880.0	1 RB low	21.71	20.31
		1 RB high	21.86	20.62
		50% RB mid	22.36	21.09
		100% RB	20.57	19.75
	1907.5	1 RB low	22.98	21.33
		1 RB high	23.21	22.08
		50% RB mid	23.49	22.34
		100% RB	22.07	21.08
10 MHz	1855.0	1 RB low	22.64	21.71
		1 RB high	22.67	21.70
		50% RB mid	22.36	21.54
		100% RB	21.83	/
	1880.0	1 RB low	21.41	20.78
		1 RB high	21.88	21.70
		50% RB mid	22.50	19.63
		100% RB	20.46	/
	1905.0	1 RB low	22.31	21.14
		1 RB high	22.34	21.24
		50% RB mid	23.47	22.70
		100% RB	21.05	/
	1857.5	1 RB low	22.83	21.93
		1 RB high	22.55	21.58
		50% RB mid	21.80	20.92
		100% RB	21.55	/
15 MHz	1880.0	1 RB low	21.56	20.61
		1 RB high	22.44	21.37
		50% RB mid	23.08	22.40
		100% RB	21.60	/
	1902.5	1 RB low	22.86	22.09
		1 RB high	21.86	20.76
		50% RB mid	23.42	22.53
		100% RB	21.20	/
	1860.0	1 RB low	22.52	21.56
		1 RB high	22.10	21.02
		50% RB mid	20.98	19.94
		100% RB	21.63	/
	1880.0	1 RB low	21.21	20.31
		1 RB high	21.93	20.80
		50% RB mid	22.90	22.35
		100% RB	20.88	/
20 MHz	1900.0	1 RB low	23.39	22.38
		1 RB high	21.62	20.32
		50% RB mid	23.13	22.08
		100% RB	22.16	/

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



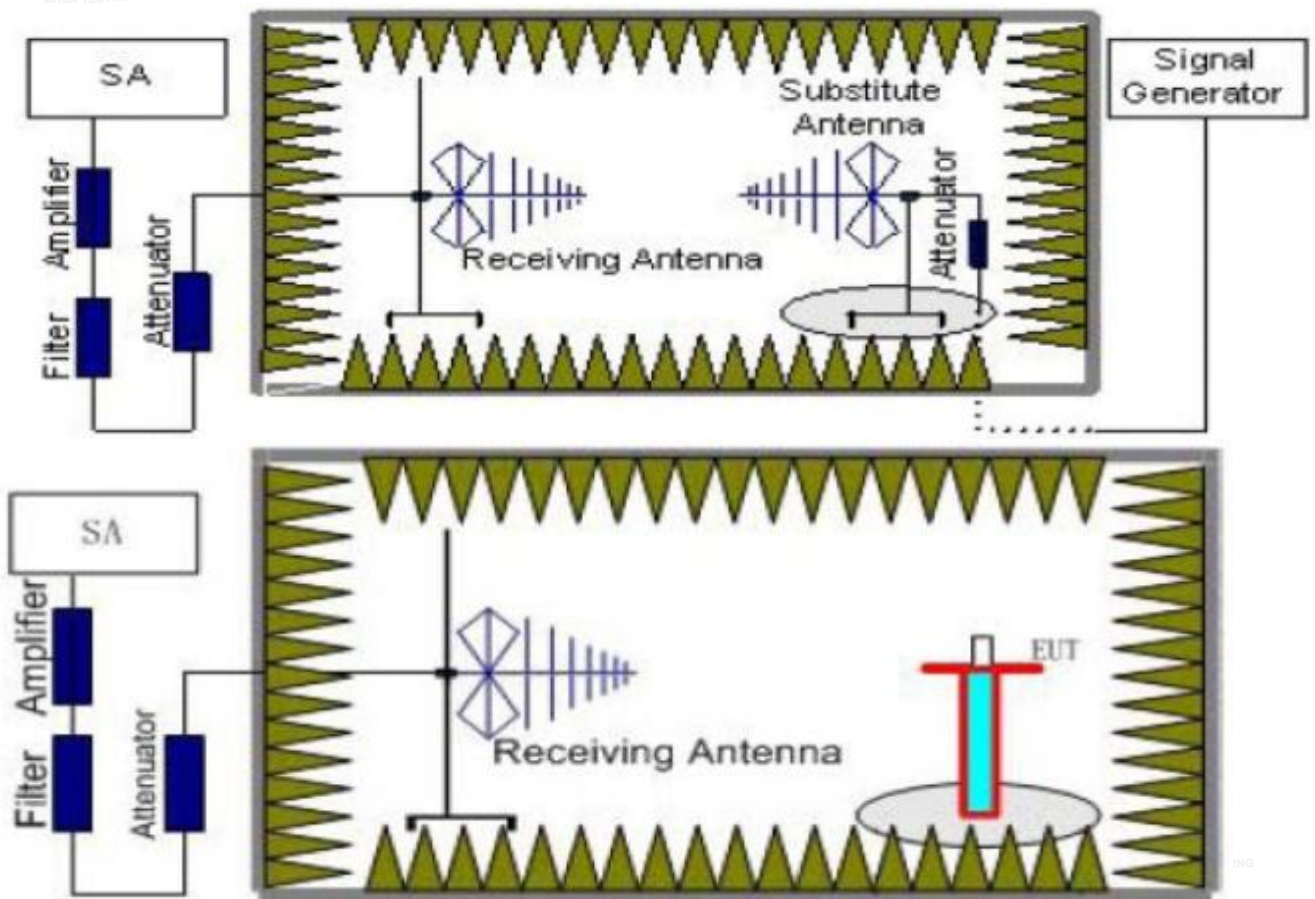
4.1.2 Radiated Output Power

LIMIT

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p.

TEST CONFIGURATION



TEST PROCEDURE

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).



- The EUT shall be replaced by a substitution antenna. In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna.
- A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- An amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:
Power(EIRP) = $P_{Mea} - G_a + P_{cl} - P_{Ag}$
We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:
Power(EIRP) = $P_{Mea} - G_a + P_{cl}$
- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP - 2.15dBi.

TEST RESULTS

Radiated Measurement:

Remark:

- We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of FDD Band 2; recorded worst case for each Channel Bandwidth of FDD Band 2.
- $EIRP = P_{Mea}(dBm) - G_a(dBi) + P_{cl}(dB) - P_{Ag}(dB)$
- We measured both Horizontal and Vertical direction, recorded worst case direction.

FDD Band 2 Channel Bandwidth 1.4MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	64.49	3.41	10.24	33.60	24.06	33.01	8.95	V
1880.0	64.98	3.49	10.24	33.60	24.63	33.01	8.38	V
1909.3	63.55	3.55	10.23	33.60	23.27	33.01	9.74	V

FDD Band 2 Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	64.60	3.41	10.24	33.60	24.17	33.01	8.84	V
1880.0	64.67	3.49	10.24	33.60	24.32	33.01	8.69	V
1908.5	64.24	3.55	10.23	33.60	23.96	33.01	9.05	V

FDD Band 2 Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	63.78	3.41	10.24	33.60	23.35	33.01	9.66	V
1880.0	64.62	3.49	10.24	33.60	24.27	33.01	8.74	V
1907.5	64.07	3.55	10.23	33.60	23.79	33.01	9.22	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**FDD Band 2_Channel Bandwidth 10MHz_QPSK**

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855.0	64.69	3.41	10.24	33.60	24.26	33.01	8.75	V
1880.0	64.91	3.49	10.24	33.60	24.56	33.01	8.45	V
1905.0	63.61	3.55	10.23	33.60	23.33	33.01	9.68	V

FDD Band 2_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	64.72	3.41	10.24	33.60	24.29	33.01	8.72	V
1880.0	64.17	3.49	10.24	33.60	23.82	33.01	9.19	V
1902.5	63.65	3.55	10.23	33.60	23.37	33.01	9.64	V

FDD Band 2_Channel Bandwidth 20MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860.0	64.31	3.41	10.24	33.60	23.88	33.01	9.13	V
1880.0	65.31	3.49	10.24	33.60	24.96	33.01	8.05	V
1900.0	63.48	3.55	10.23	33.60	23.20	33.01	9.81	V

FDD Band 2_Channel Bandwidth 1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	64.39	3.41	10.24	33.60	23.96	33.01	9.05	V
1880.0	64.69	3.49	10.24	33.60	24.34	33.01	8.67	V
1909.3	63.52	3.55	10.23	33.60	23.24	33.01	9.77	V

FDD Band 2_Channel Bandwidth 3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	64.06	3.41	10.24	33.60	23.63	33.01	9.38	V
1880.0	64.41	3.49	10.24	33.60	24.06	33.01	8.95	V
1908.5	64.04	3.55	10.23	33.60	23.76	33.01	9.25	V

FDD Band 2_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	64.05	3.41	10.24	33.60	23.62	33.01	9.39	V
1880.0	64.63	3.49	10.24	33.60	24.28	33.01	8.73	V
1907.5	64.20	3.55	10.23	33.60	23.92	33.01	9.09	V

*FDD Band 2 Channel Bandwidth 10MHz 16QAM*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855.0	64.14	3.41	10.24	33.60	23.71	33.01	9.30	V
1880.0	64.71	3.49	10.24	33.60	24.36	33.01	8.65	V
1905.0	63.56	3.55	10.23	33.60	23.28	33.01	9.73	V

FDD Band 2 Channel Bandwidth 15MHz 16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	64.28	3.41	10.24	33.60	23.85	33.01	9.16	V
1880.0	64.68	3.49	10.24	33.60	24.33	33.01	8.68	V
1902.5	64.31	3.55	10.23	33.60	24.03	33.01	8.98	V

FDD Band 2 Channel Bandwidth 20MHz 16QAM

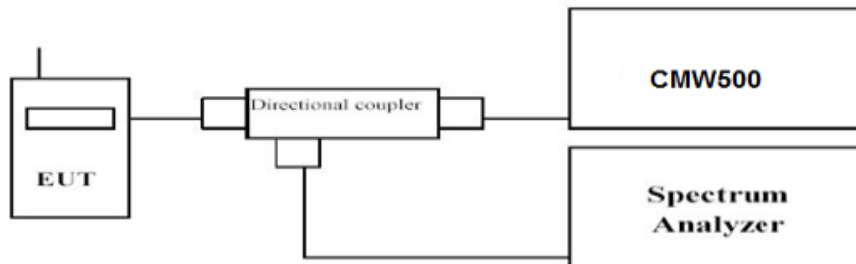
Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860.0	63.75	3.41	10.24	33.60	23.32	33.01	9.69	V
1880.0	64.80	3.49	10.24	33.60	24.45	33.01	8.56	V
1900.0	64.35	3.55	10.23	33.60	24.07	33.01	8.94	V

4.2 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION



TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms;
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.


TEST RESULTS

Remark:


1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of FDD Band 2; recorded worst case for each Channel Bandwidth of FDD Band 2.

FDD Band 2				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR(dB)	
			QPSK	16QAM
1.4 MHz	1850.7	1RB#0	4.77	5.78
	1880.0		5.38	6.40
	1909.3		4.45	5.48
3 MHz	1851.5	1RB#0	4.92	5.77
	1880.0		5.52	6.27
	1908.5		4.94	5.81
5 MHz	1852.5	1RB#0	4.75	5.59
	1880.0		5.29	6.04
	1907.5		5.11	5.88
10 MHz	1855.0	1RB#0	4.79	5.61
	1880.0		5.46	6.11
	1905.0		5.34	6.01
15 MHz	1857.5	1RB#0	4.76	5.58
	1880.0		5.48	6.19
	1902.5		5.28	6.03
20 MHz	1860.0	1RB#0	4.65	5.47
	1880.0		5.41	5.61
	1900.0		4.80	5.47

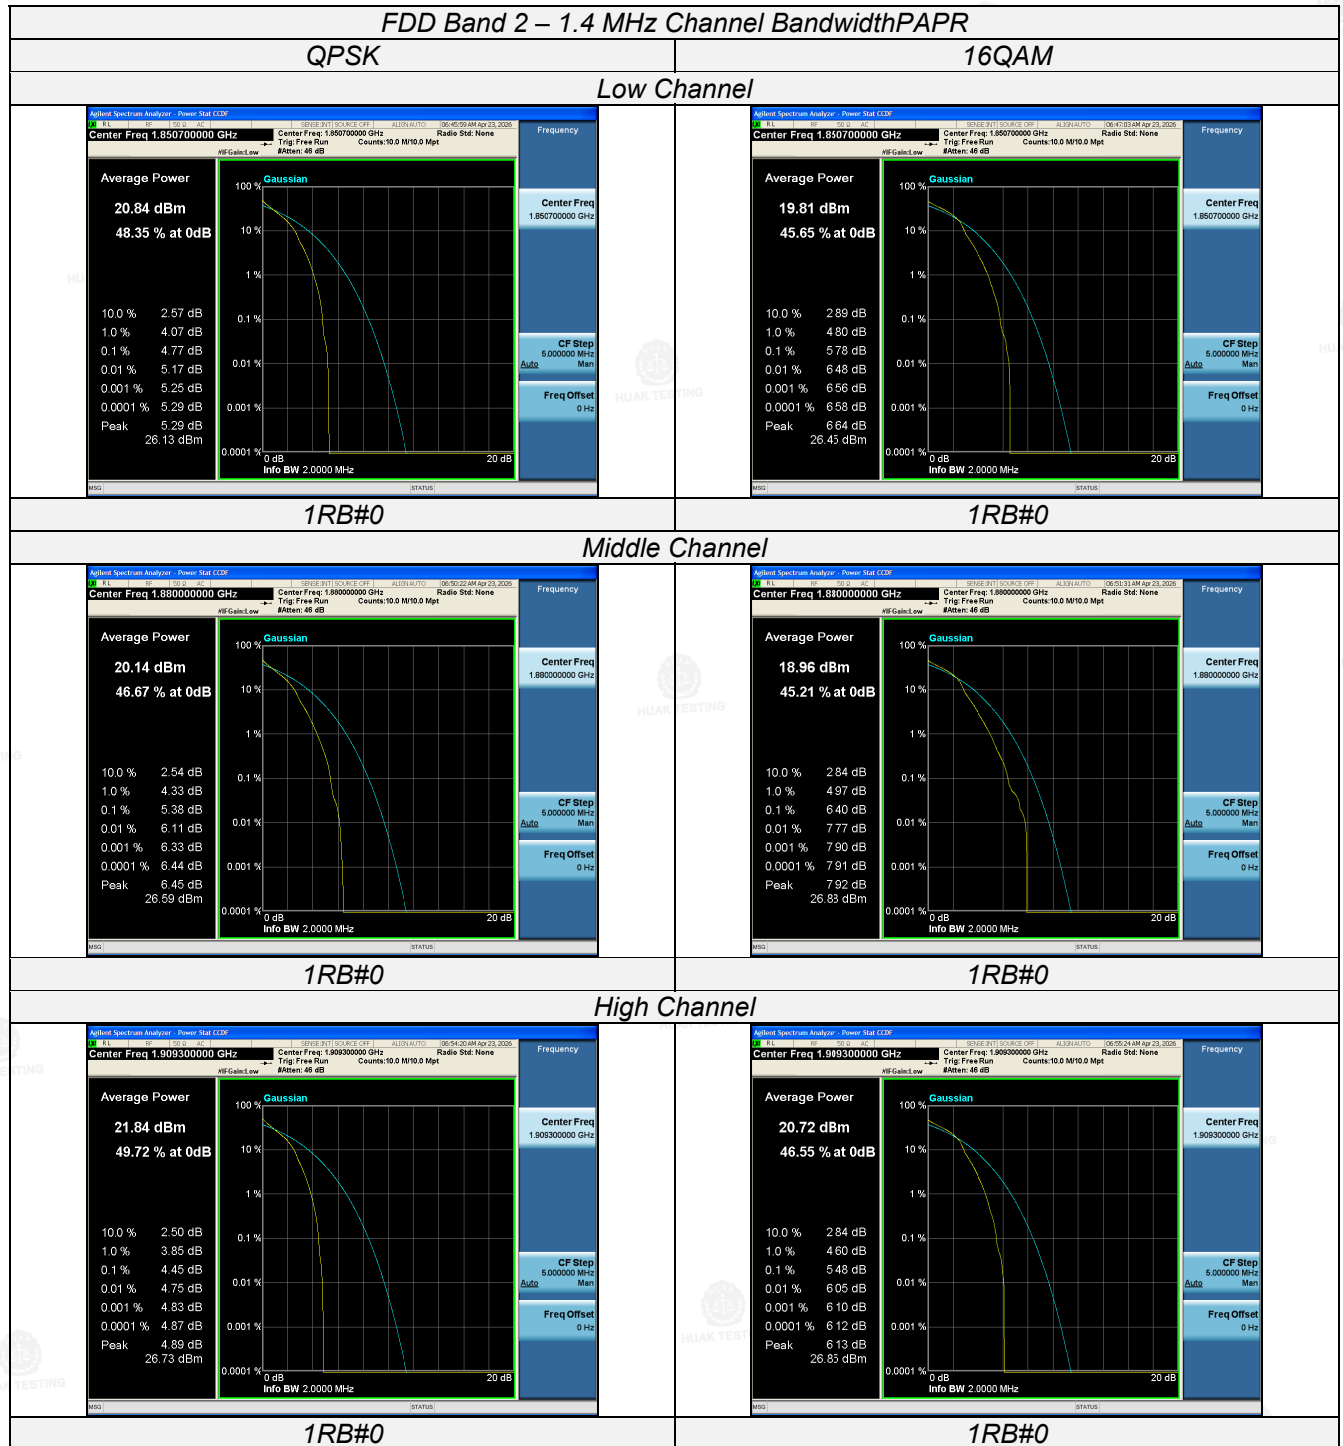
The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



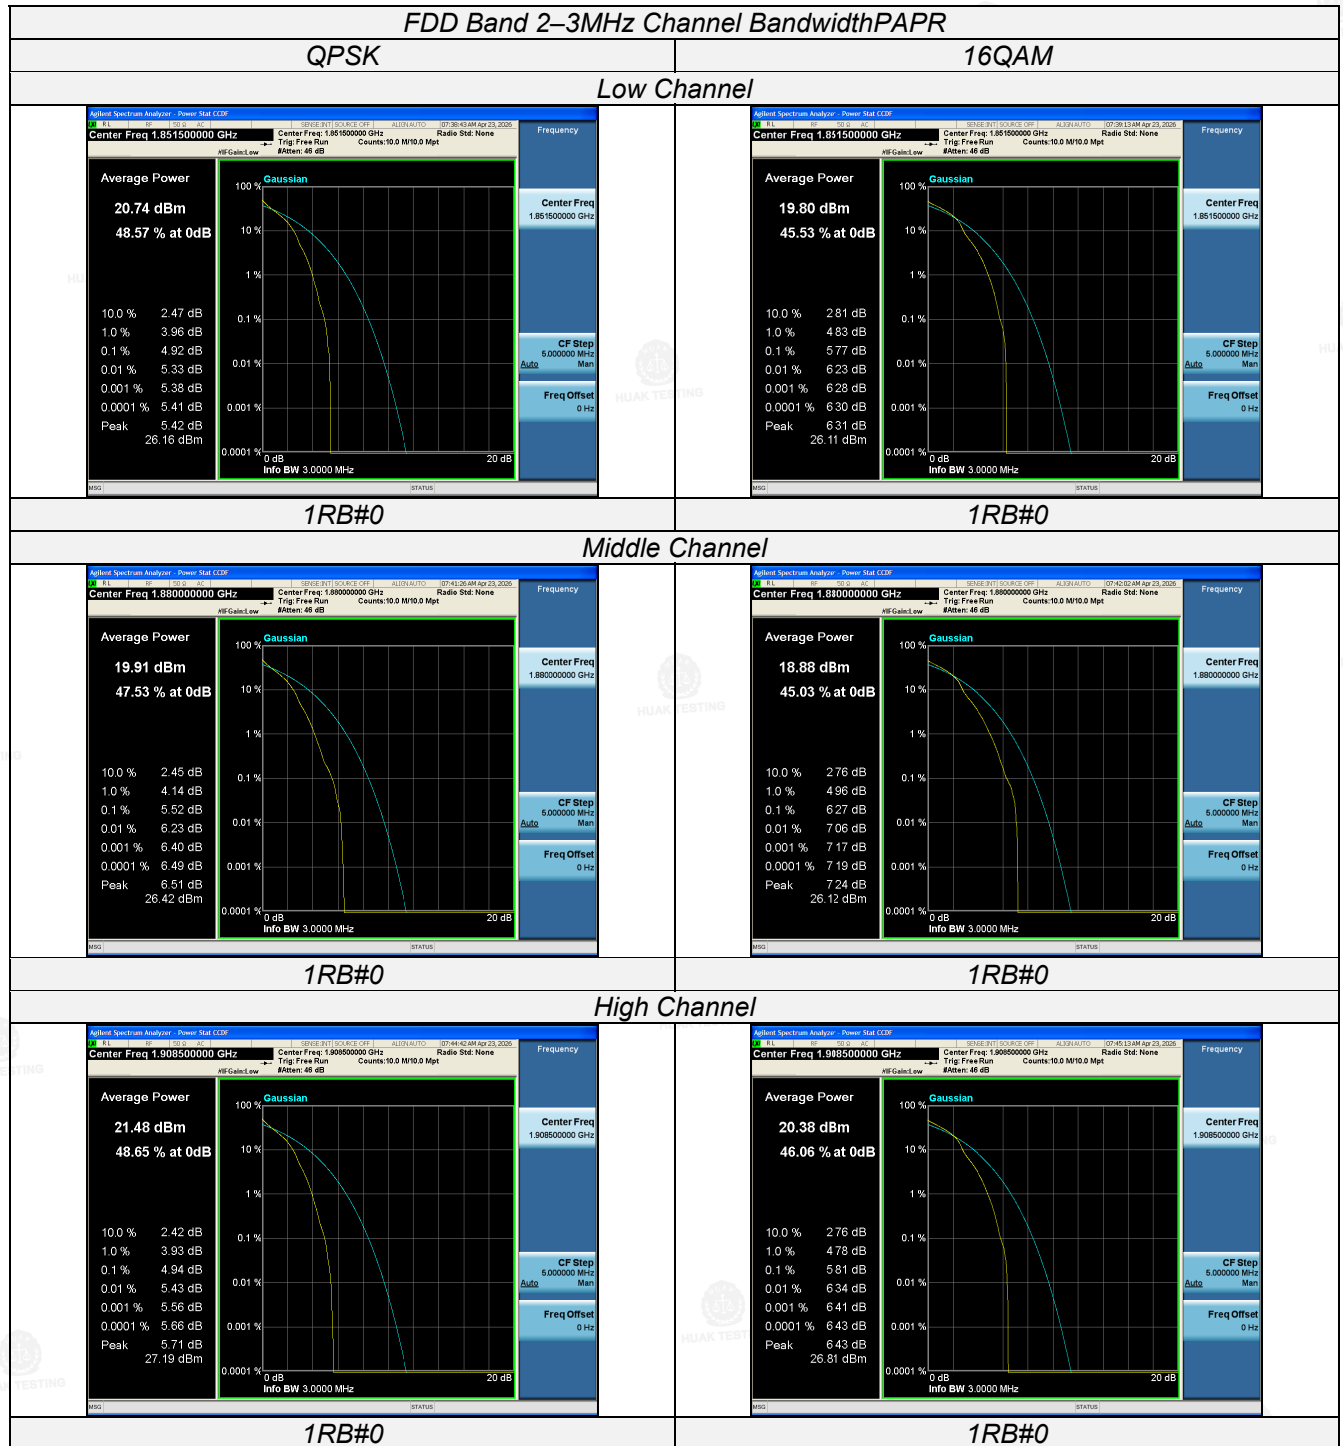
The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



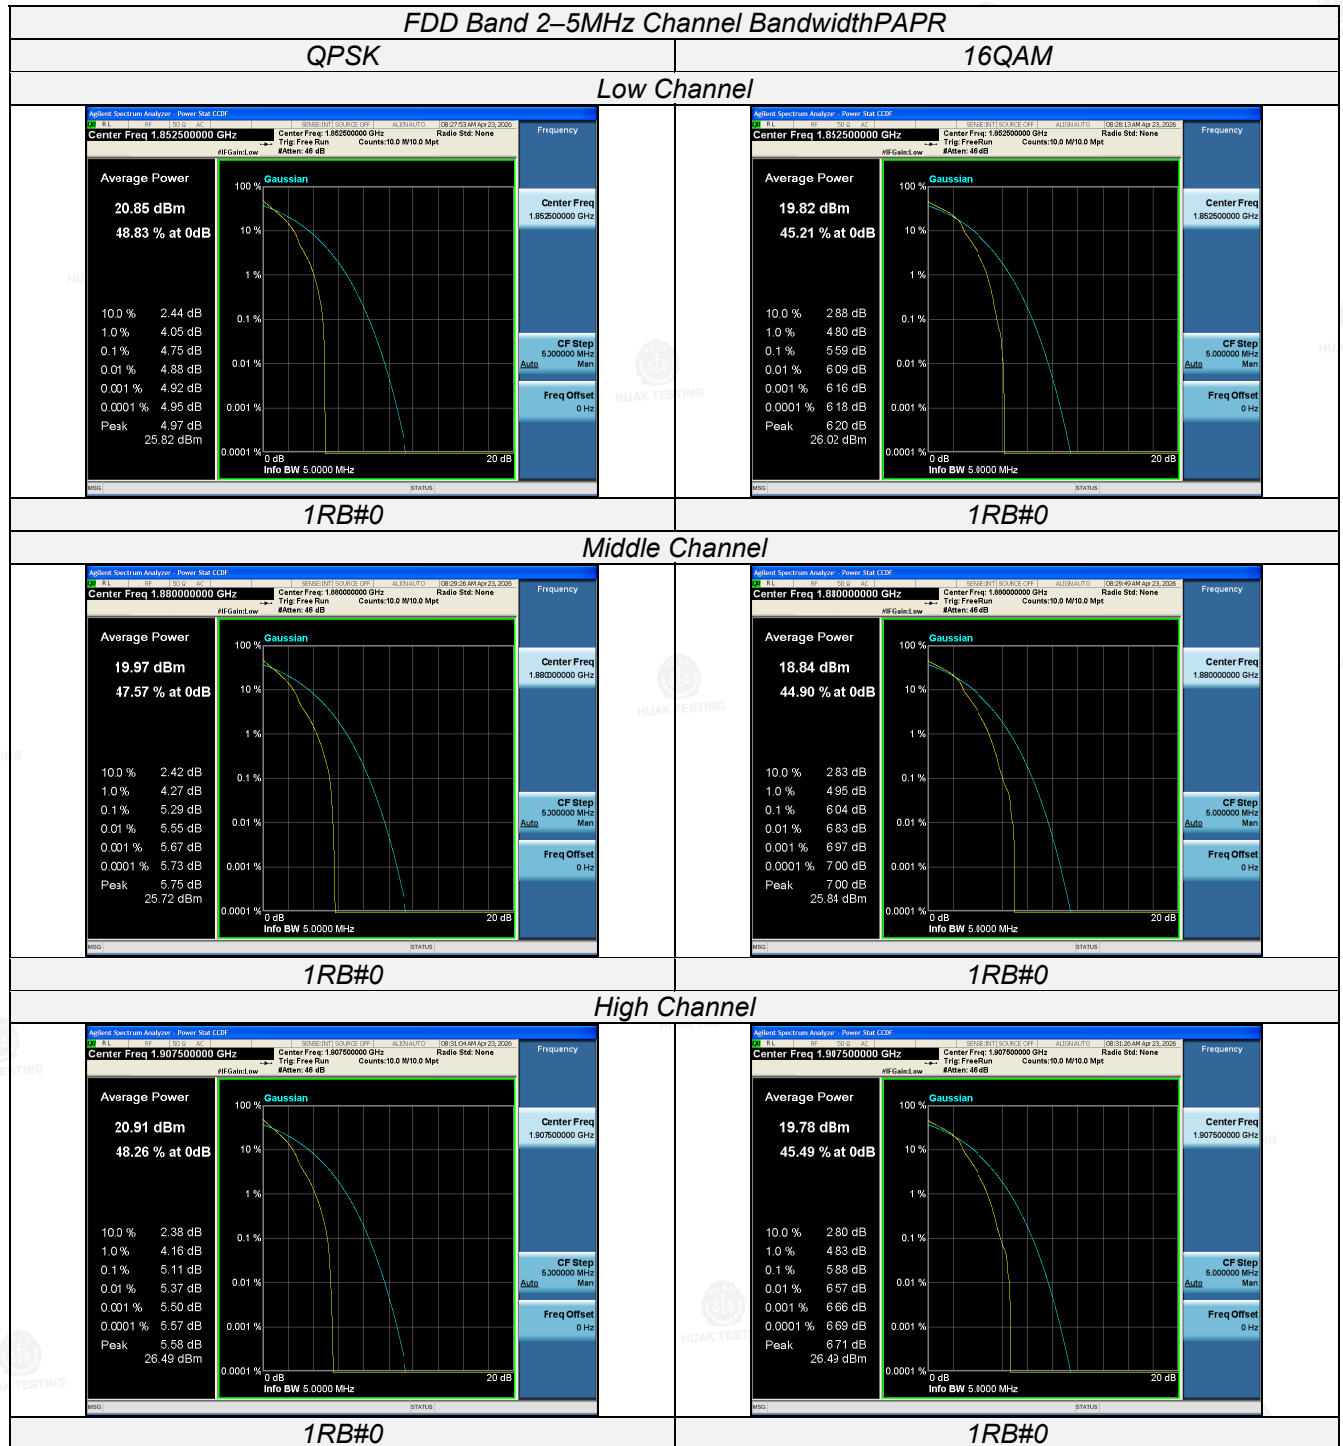
The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



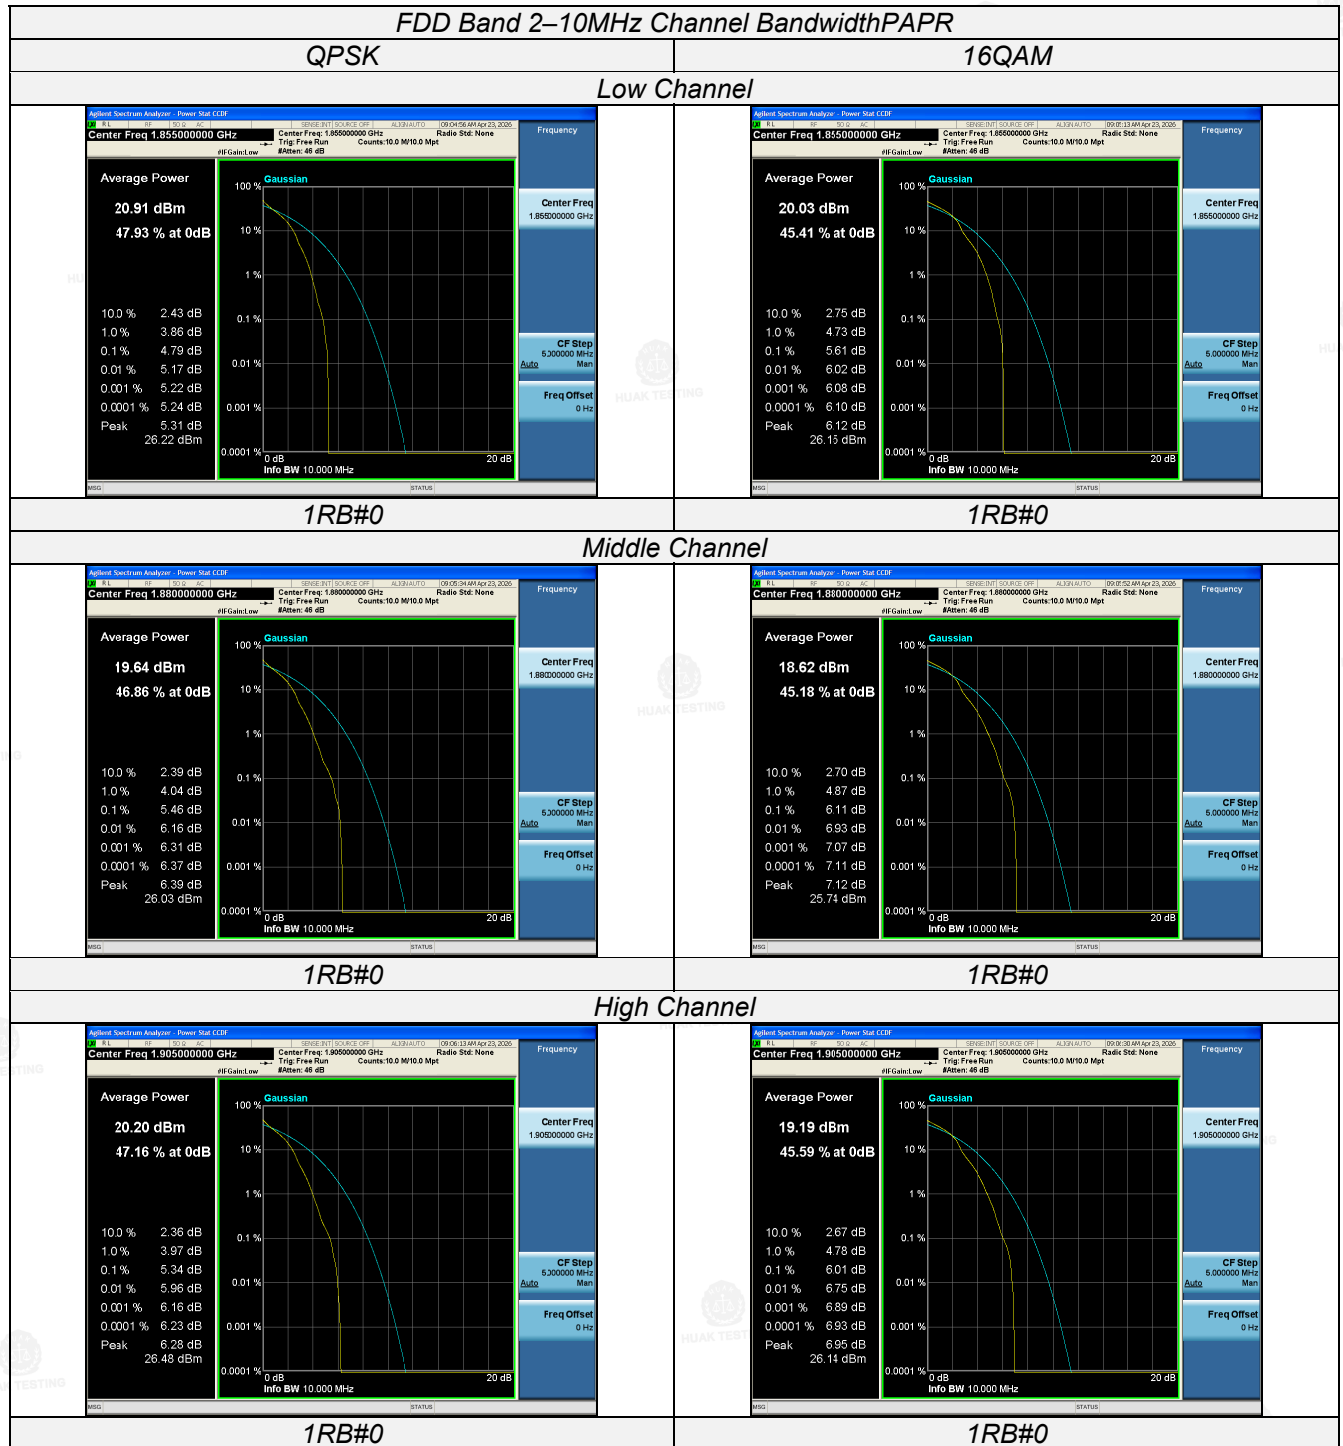
The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



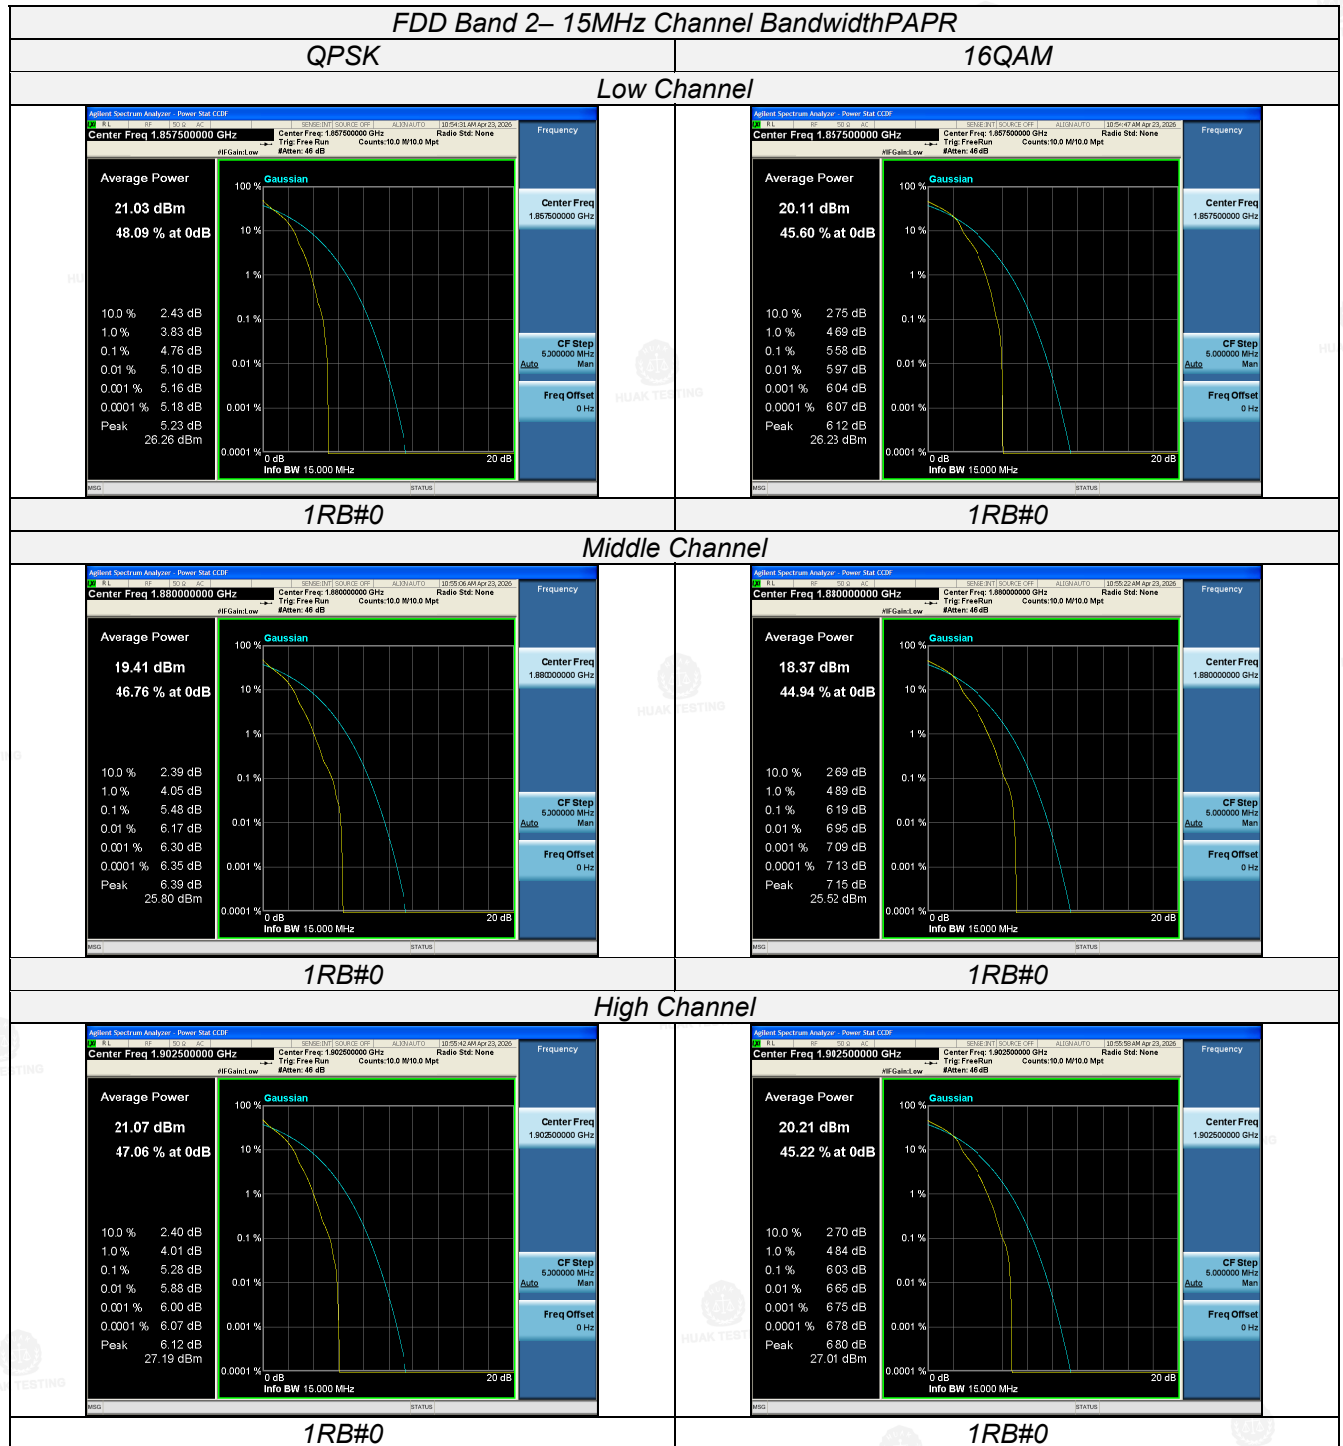The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



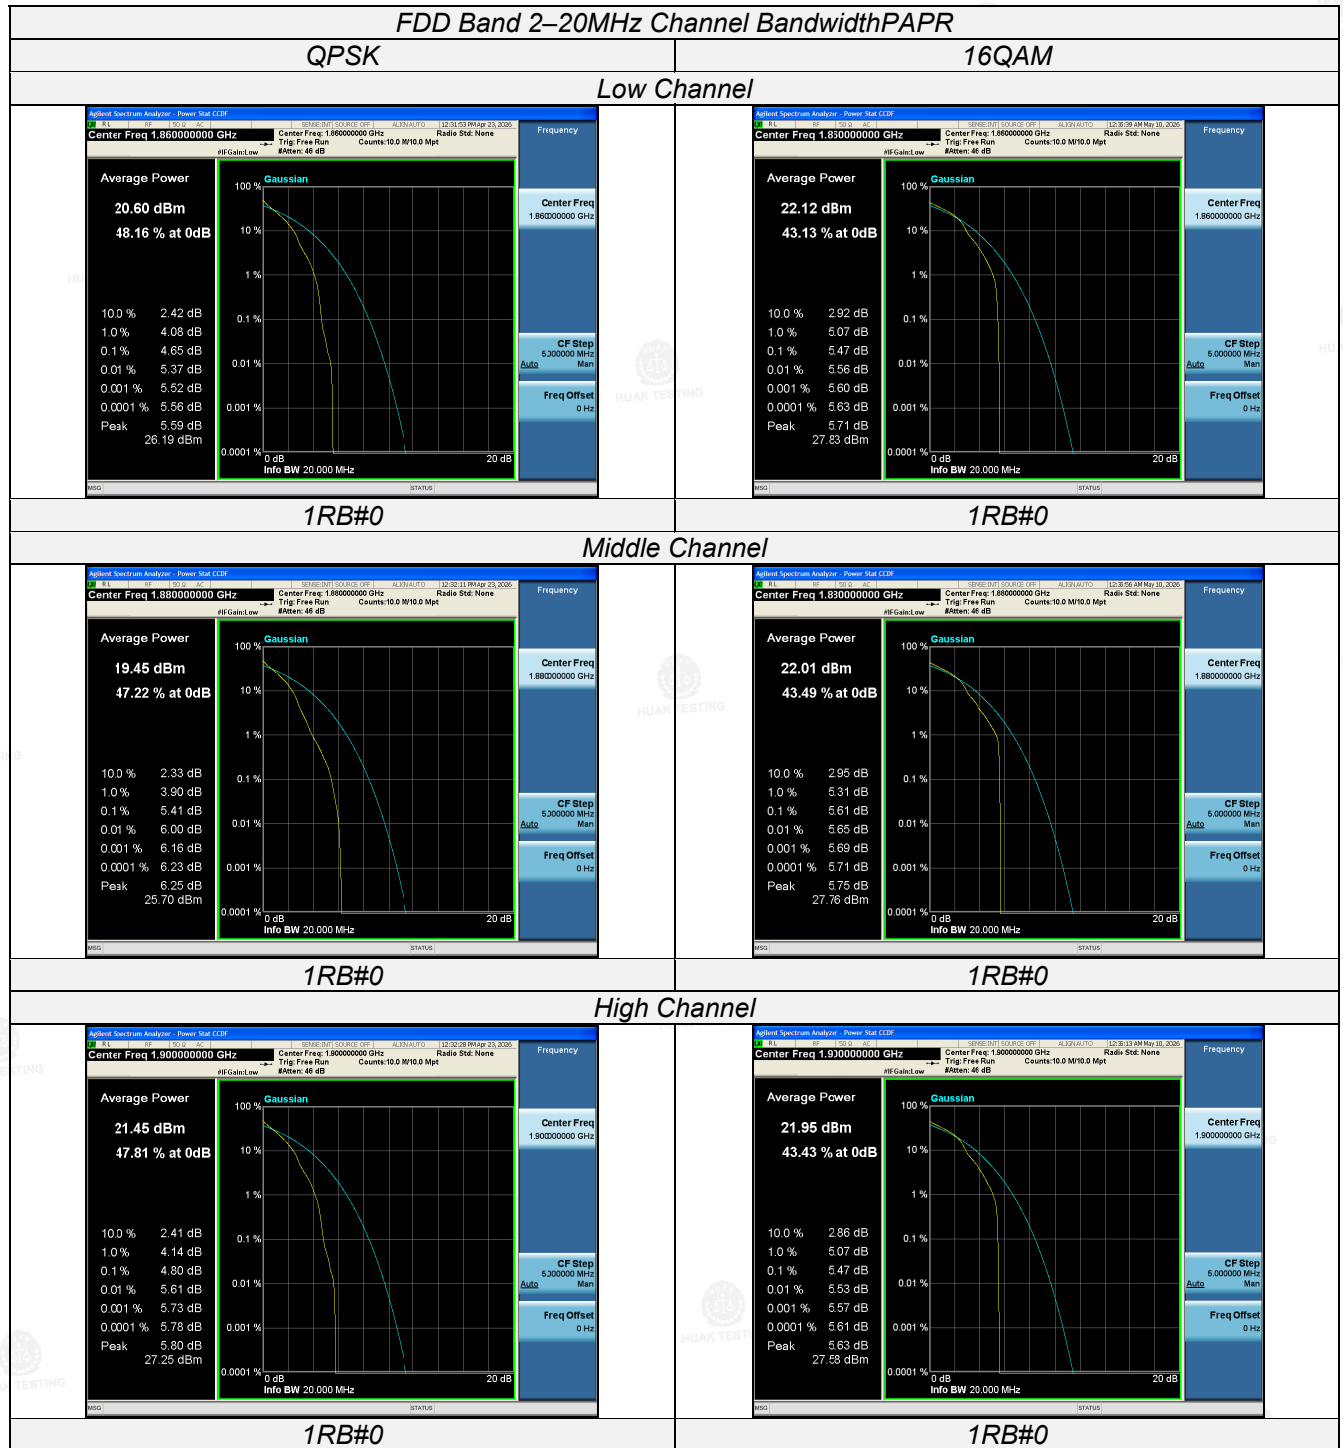The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

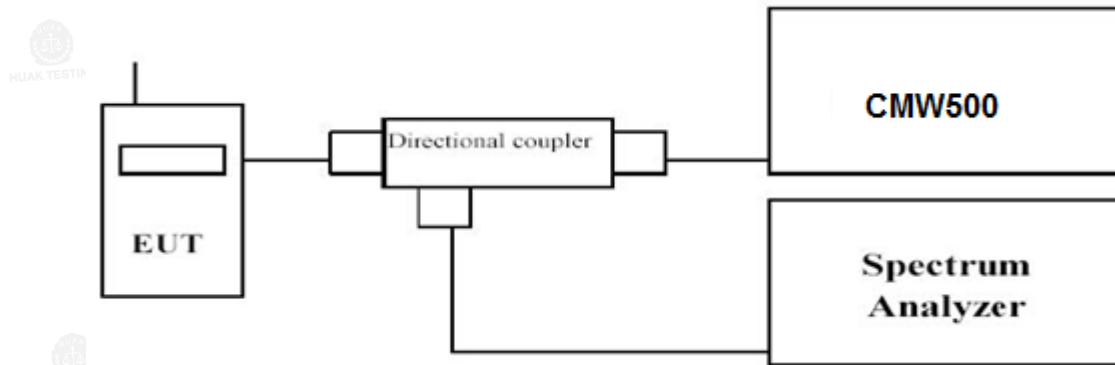


4.3 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded.

Set RBW was set to about 1% of emission BW, VBW ≥ 3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.







TEST RESULTS

Remark:







1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of FDD Band 2; recorded worst case for each Channel Bandwidth of FDD Band 2.

FDD Band 2						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
1.4 MHz	6RB#0	1850.7	1.307	1.294	1.0941	1.0956
		1880.0	1.309	1.299	1.0922	1.0934
		1909.3	1.299	1.288	1.0931	1.0942
3 MHz	15RB#0	1851.5	2.972	2.983	2.7046	2.7060
		1880.0	2.959	2.983	2.7076	2.7045
		1908.5	2.976	2.974	2.6997	2.6994
5 MHz	25RB#0	1852.5	5.064	5.022	4.5103	4.4962
		1880.0	5.074	5.016	4.5127	4.4996
		1907.5	5.050	5.008	4.5063	4.4916
10 MHz	50RB#0	1855.0	10.16	5.466	8.9649	4.5983
		1880.0	10.22	5.498	8.9829	4.6273
		1905.0	10.23	5.417	9.0003	4.6087
15 MHz	75RB#0	1857.5	15.09	8.954	13.486	6.7713
		1880.0	15.28	9.003	13.525	6.8059
		1902.5	15.47	9.118	13.580	6.7612
20 MHz	100RB#0	1860.0	20.13	10.72	17.904	9.1399
		1880.0	19.95	10.81	17.965	9.1757
		1900.0	20.26	10.75	18.047	9.2364

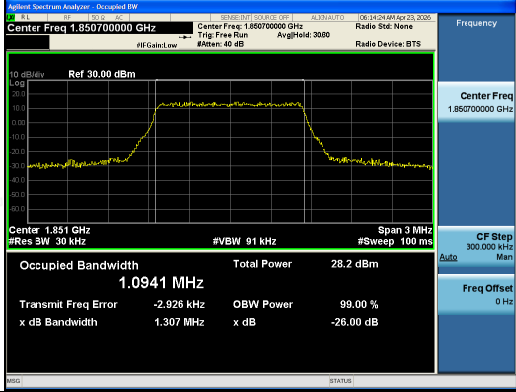
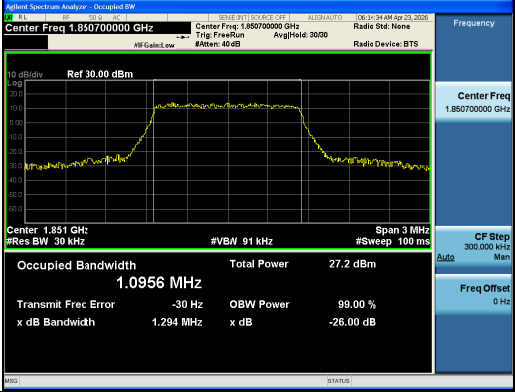
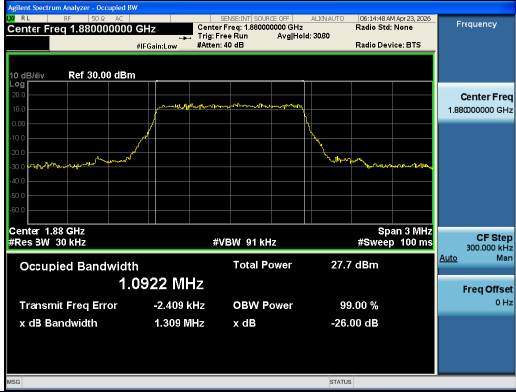
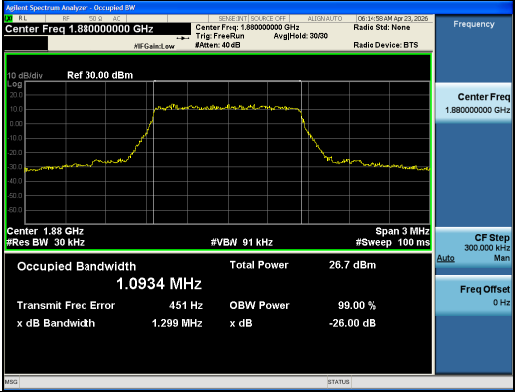
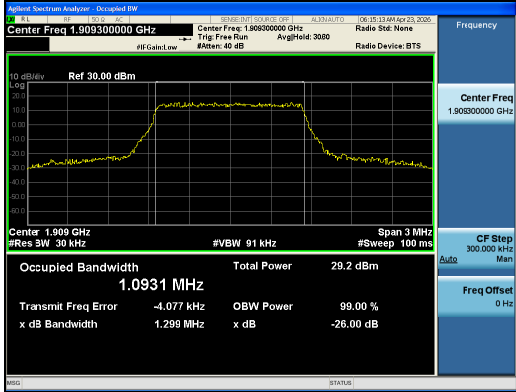
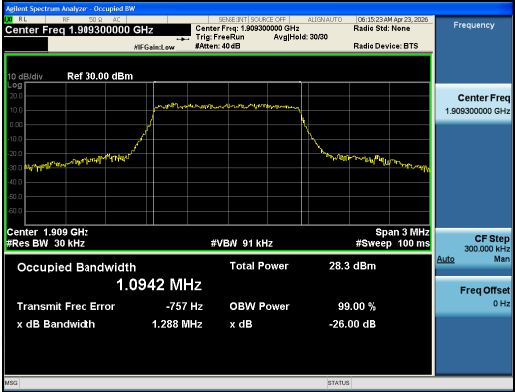
The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

FDD Band 2 – 1.4 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth	
QPSK	16QAM
Low Channel	
 Agilent Spectrum Analyzer - Occupied BW Center Freq 1.850700000 GHz Ref 30.00 dBm Occupied Bandwidth 1.0941 MHz Total Power 28.2 dBm Transmit Freq Error -2.926 kHz OBW Power 99.00 % x dB Bandwidth 1.307 MHz x dB -26.00 dB	 Agilent Spectrum Analyzer - Occupied BW Center Freq 1.850700000 GHz Ref 30.00 dBm Occupied Bandwidth 1.0956 MHz Total Power 27.2 dBm Transmit Freq Error -30 Hz OBW Power 99.00 % x dB Bandwidth 1.294 MHz x dB -26.00 dB
6RB#0	6RB#0
Middle Channel	
 Agilent Spectrum Analyzer - Occupied BW Center Freq 1.880000000 GHz Ref 30.00 dBm Occupied Bandwidth 1.0922 MHz Total Power 27.7 dBm Transmit Freq Error -2.409 kHz OBW Power 99.00 % x dB Bandwidth 1.308 MHz x dB -26.00 dB	 Agilent Spectrum Analyzer - Occupied BW Center Freq 1.880000000 GHz Ref 30.00 dBm Occupied Bandwidth 1.0934 MHz Total Power 26.7 dBm Transmit Freq Error 451 Hz OBW Power 99.00 % x dB Bandwidth 1.299 MHz x dB -26.00 dB
6RB#0	6RB#0
High Channel	
 Agilent Spectrum Analyzer - Occupied BW Center Freq 1.909300000 GHz Ref 30.00 dBm Occupied Bandwidth 1.0931 MHz Total Power 29.2 dBm Transmit Freq Error -4.077 kHz OBW Power 99.00 % x dB Bandwidth 1.299 MHz x dB -26.00 dB	 Agilent Spectrum Analyzer - Occupied BW Center Freq 1.909300000 GHz Ref 30.00 dBm Occupied Bandwidth 1.0942 MHz Total Power 28.3 dBm Transmit Freq Error -757 Hz OBW Power 99.00 % x dB Bandwidth 1.288 MHz x dB -26.00 dB
6RB#0	6RB#0

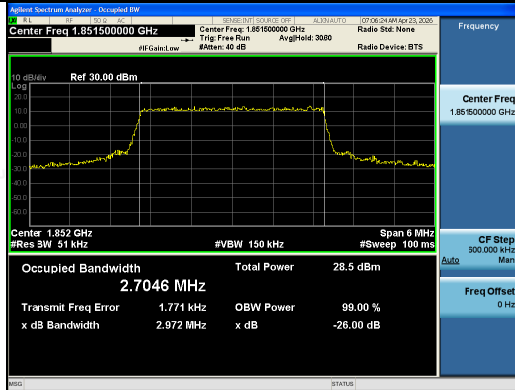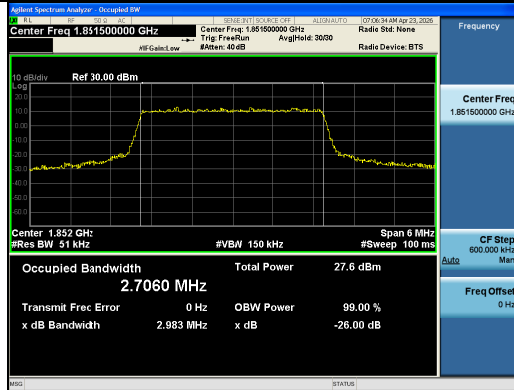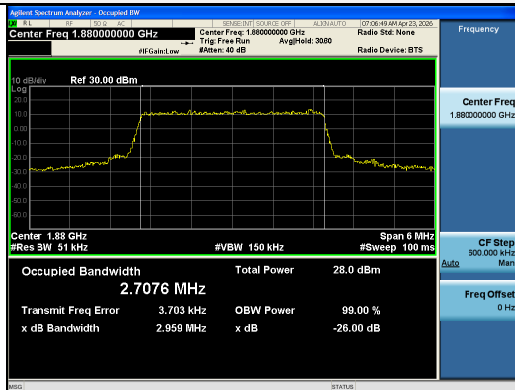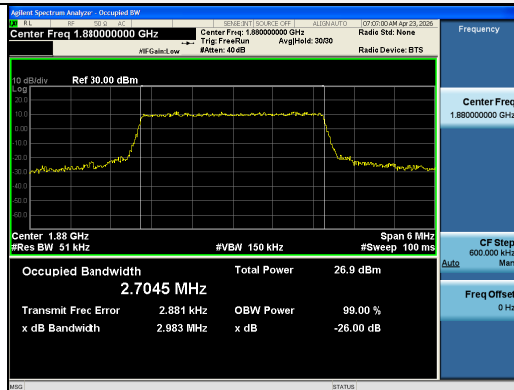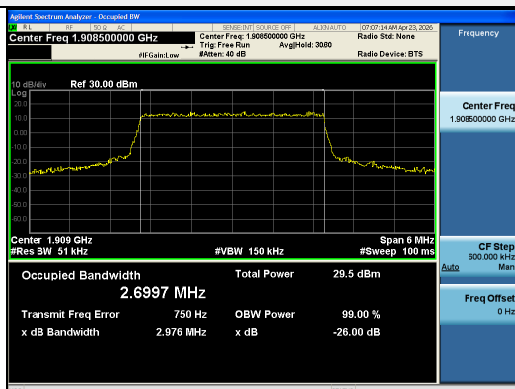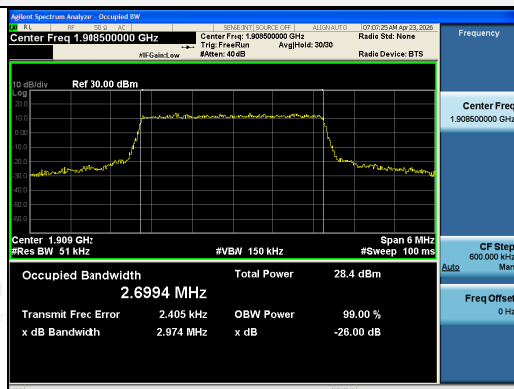
The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

FDD Band 2-3MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth			
QPSK		16QAM	
Low Channel			
			
15RB#0		15RB#0	
Middle Channel			
			
15RB#0		15RB#0	
High Channel			
			
15RB#0		15RB#0	

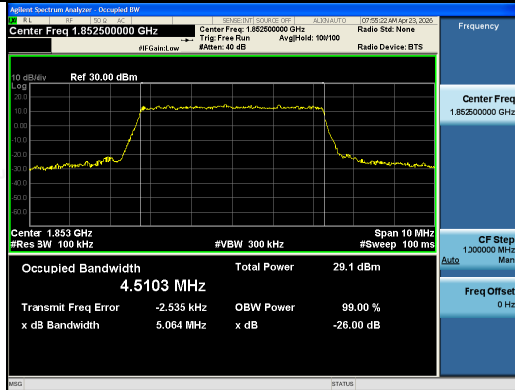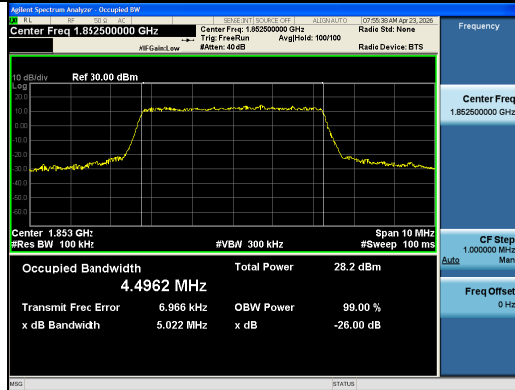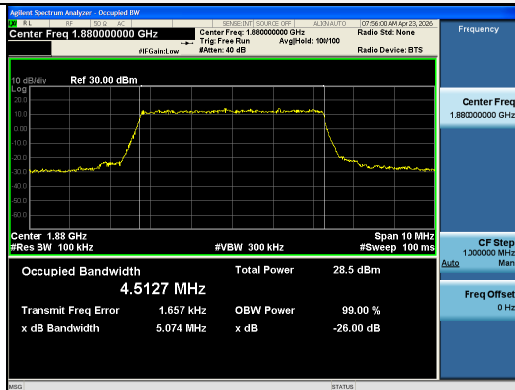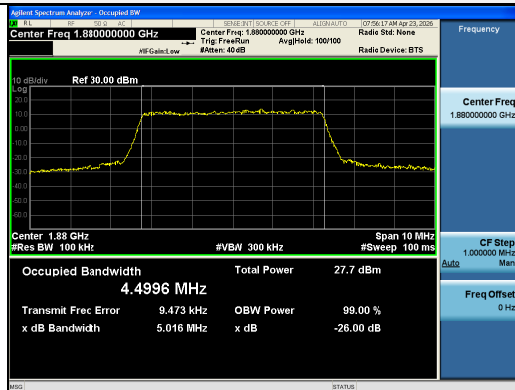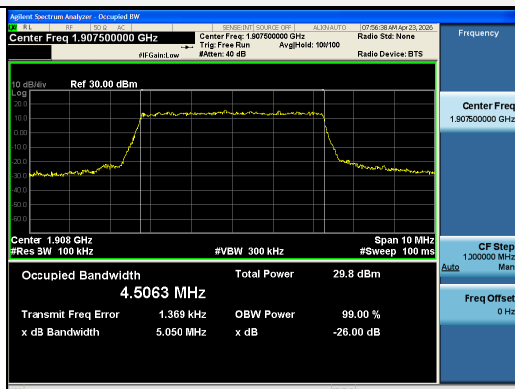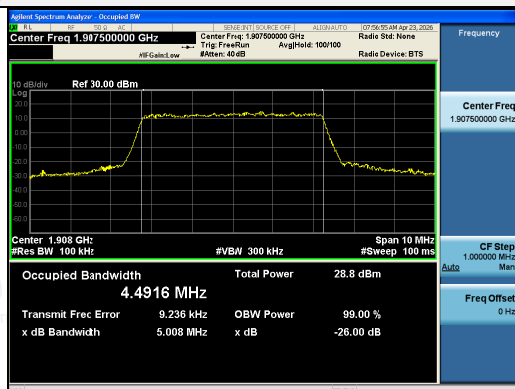
The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.




FDD Band 2-5MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth			
QPSK		16QAM	
Low Channel			
			
25RB#0		25RB#0	
Middle Channel			
			
25RB#0		25RB#0	
High Channel			
			
25RB#0		25RB#0	

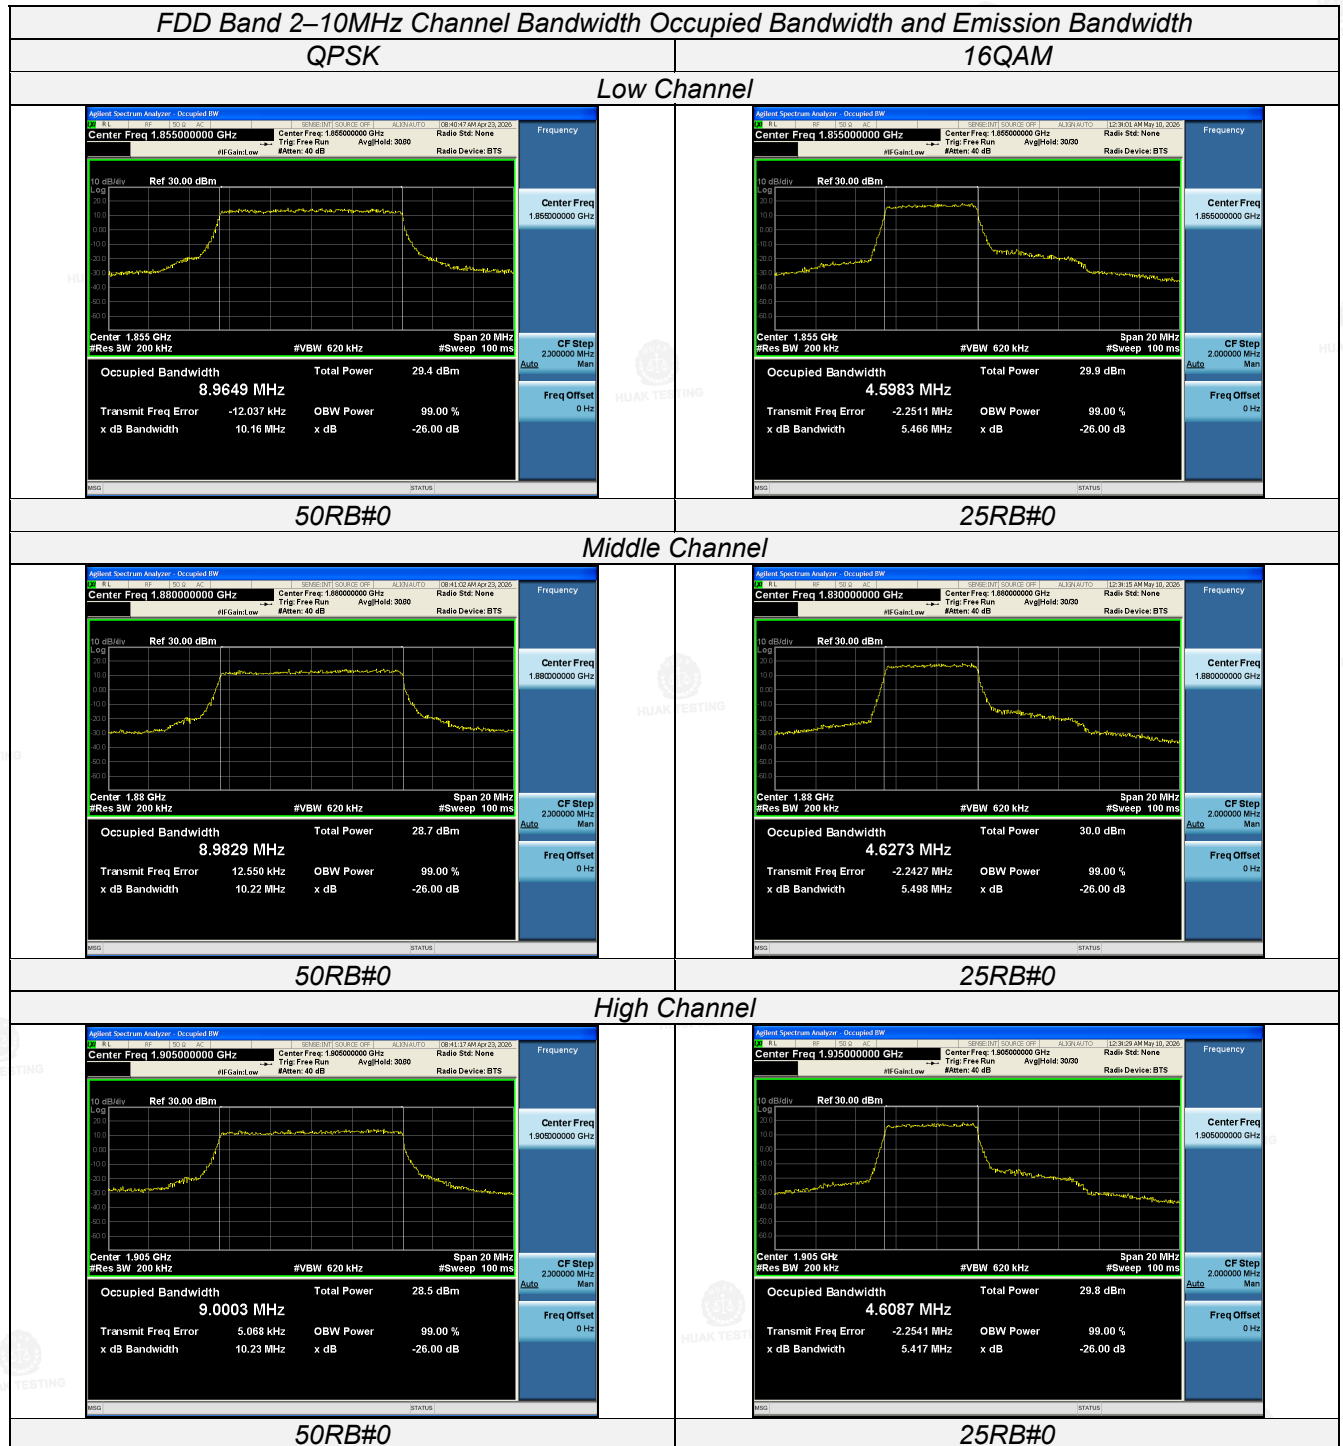The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



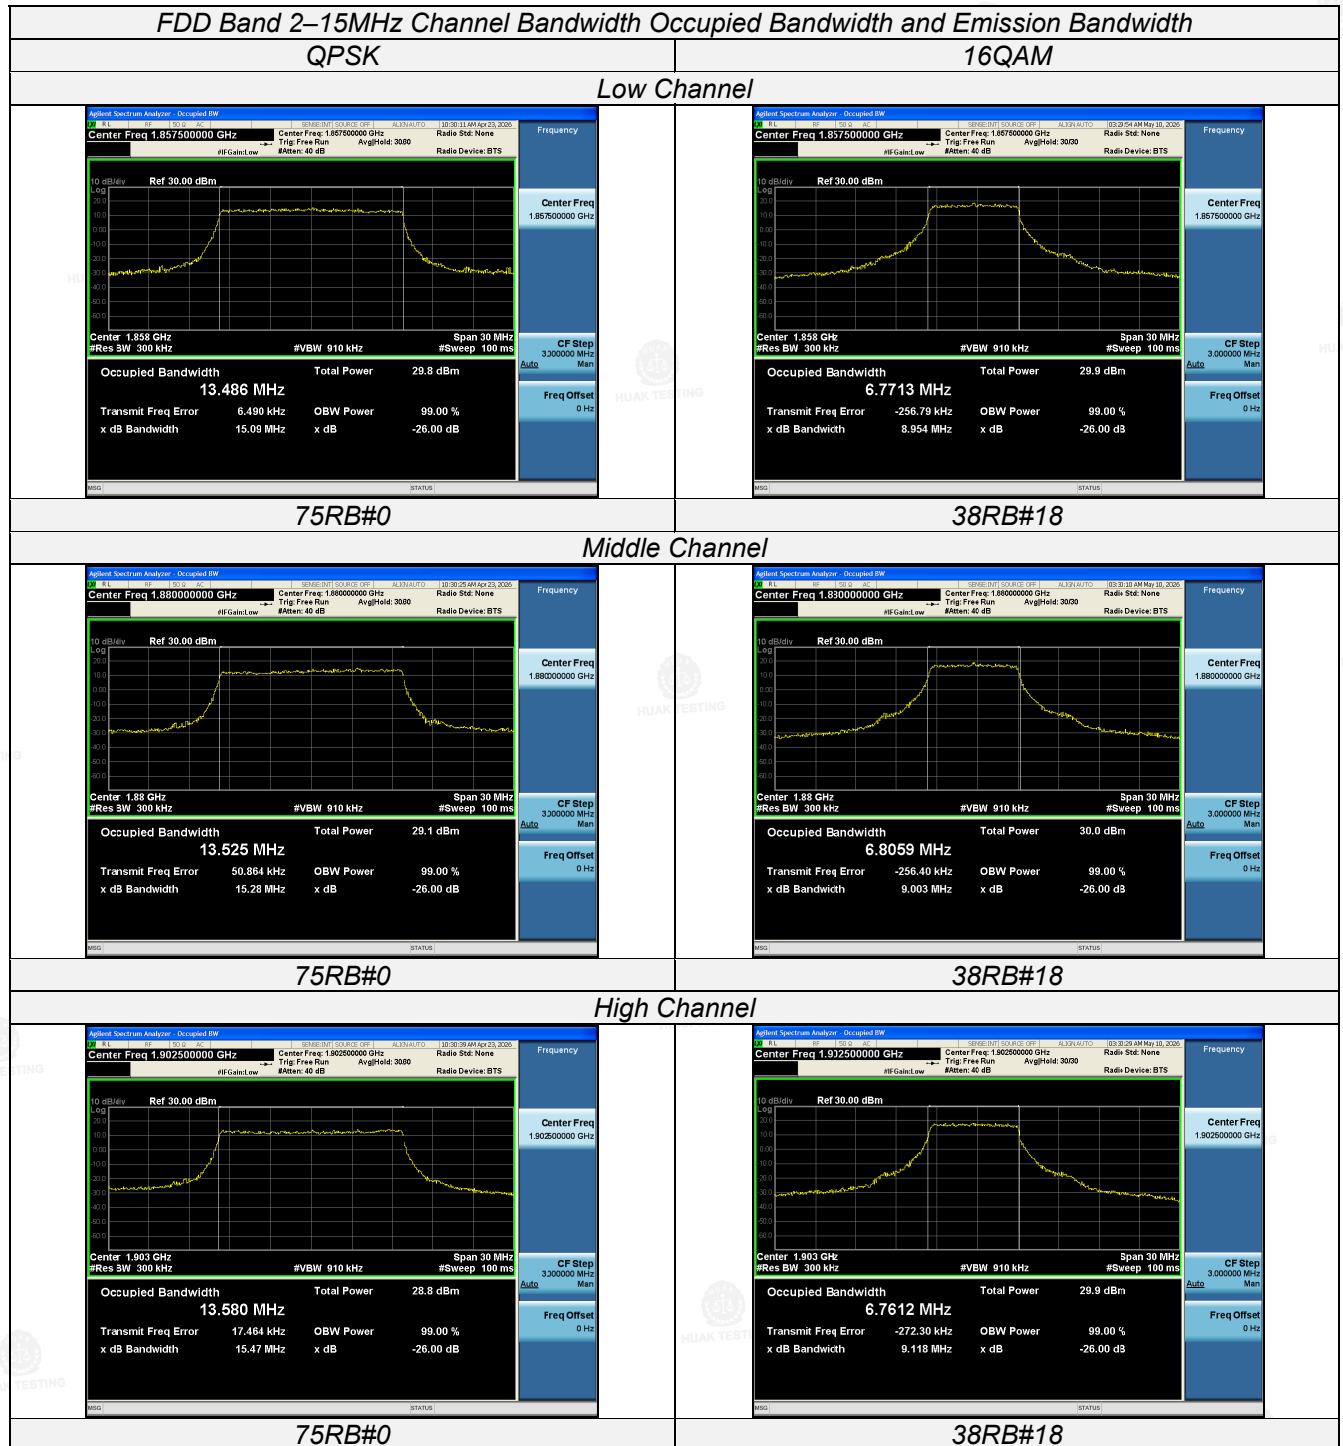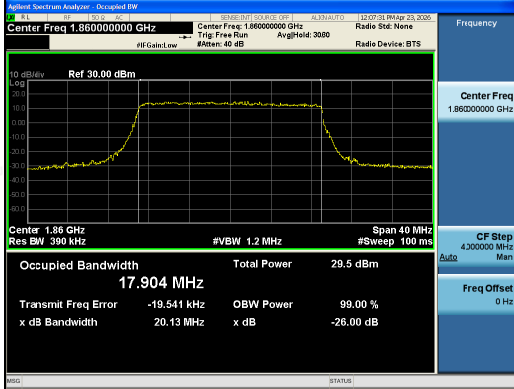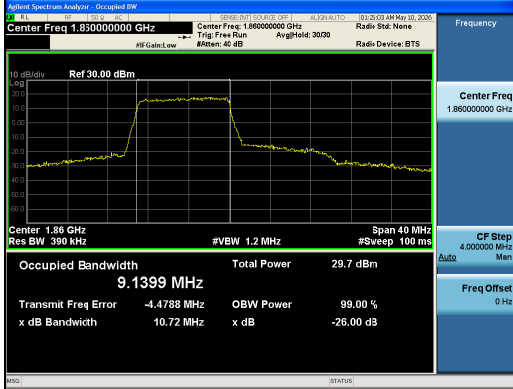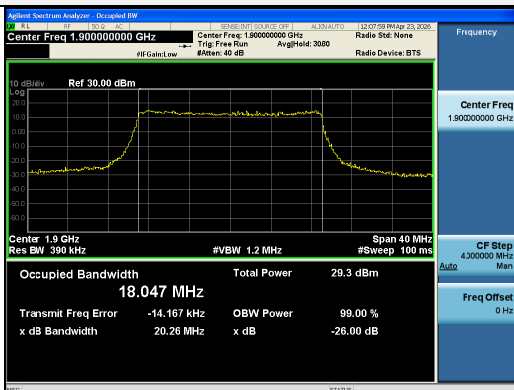The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



FDD Band 2-20MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth	
QPSK	16QAM
Low Channel	
 Center Freq 1.850000000 GHz Res BW 390 kHz #VBW 1.2 MHz Span 40 MHz #Sweep 100 ms CF Step 4300000 MHz Man Occupied Bandwidth 17.904 MHz Total Power 29.5 dBm Transmit Freq Error -19.541 kHz OBW Power 99.00 % x dB Bandwidth 20.13 MHz x dB -26.00 dB	 Center Freq 1.830000000 GHz Res BW 390 kHz #VBW 1.2 MHz Span 40 MHz #Sweep 100 ms CF Step 4300000 MHz Man Occupied Bandwidth 9.1399 MHz Total Power 29.7 dBm Transmit Freq Error -4.4788 MHz OBW Power 99.00 % x dB Bandwidth 10.72 MHz x dB -26.00 dB
100RB#0	50RB#0
Middle Channel	
 Center Freq 1.880000000 GHz Res BW 390 kHz #VBW 1.2 MHz Span 40 MHz #Sweep 100 ms CF Step 4300000 MHz Man Occupied Bandwidth 17.965 MHz Total Power 29.4 dBm Transmit Freq Error 22.412 kHz OBW Power 99.00 % x dB Bandwidth 19.95 MHz x dB -26.00 dB	 Center Freq 1.830000000 GHz Res BW 390 kHz #VBW 1.2 MHz Span 40 MHz #Sweep 100 ms CF Step 4300000 MHz Man Occupied Bandwidth 9.1757 MHz Total Power 29.8 dBm Transmit Freq Error -4.4492 MHz OBW Power 99.00 % x dB Bandwidth 10.81 MHz x dB -26.00 dB
100RB#0	50RB#0
High Channel	
 Center Freq 1.900000000 GHz Res BW 390 kHz #VBW 1.2 MHz Span 40 MHz #Sweep 100 ms CF Step 4300000 MHz Man Occupied Bandwidth 18.047 MHz Total Power 29.3 dBm Transmit Freq Error -14.167 kHz OBW Power 99.00 % x dB Bandwidth 20.26 MHz x dB -26.00 dB	 Center Freq 1.930000000 GHz Res BW 390 kHz #VBW 1.2 MHz Span 40 MHz #Sweep 100 ms CF Step 4300000 MHz Man Occupied Bandwidth 9.2364 MHz Total Power 29.6 dBm Transmit Freq Error -4.4751 MHz OBW Power 99.00 % x dB Bandwidth 10.75 MHz x dB -26.00 dB
100RB#0	50RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

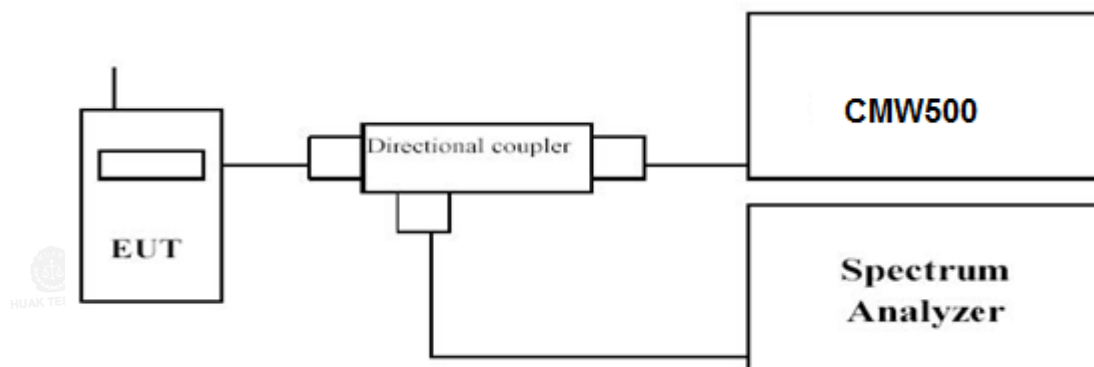


4.4 Band Edge Compliance

LIMIT

Per FCC §24.238 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

TEST CONFIGURATION




TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum.


TEST RESULTS

Remark:

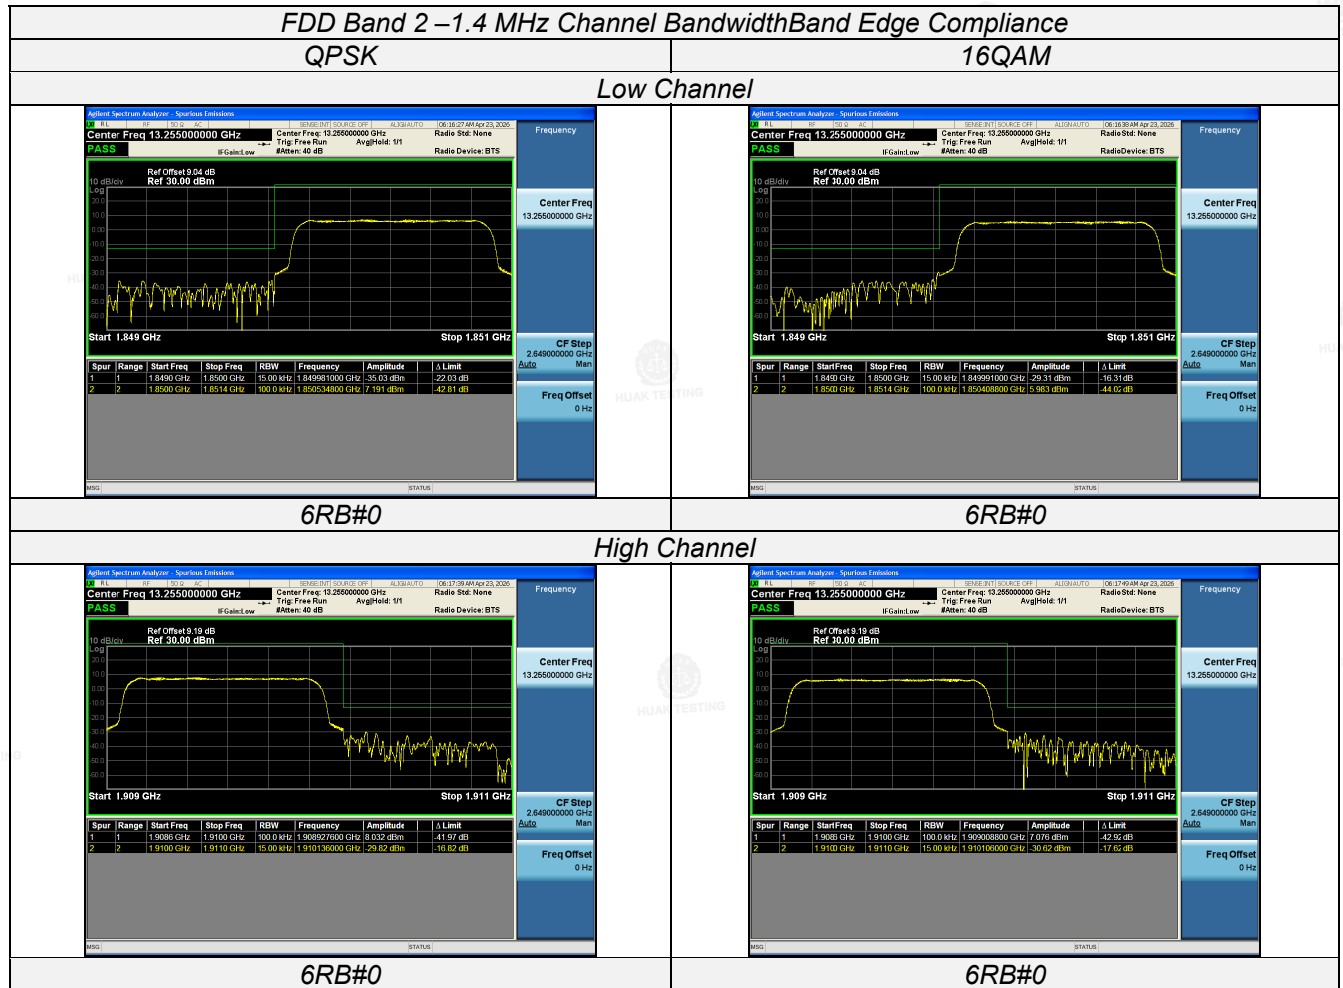
1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of FDD Band 2; recorded worst case for each Channel Bandwidth of FDD Band 2.



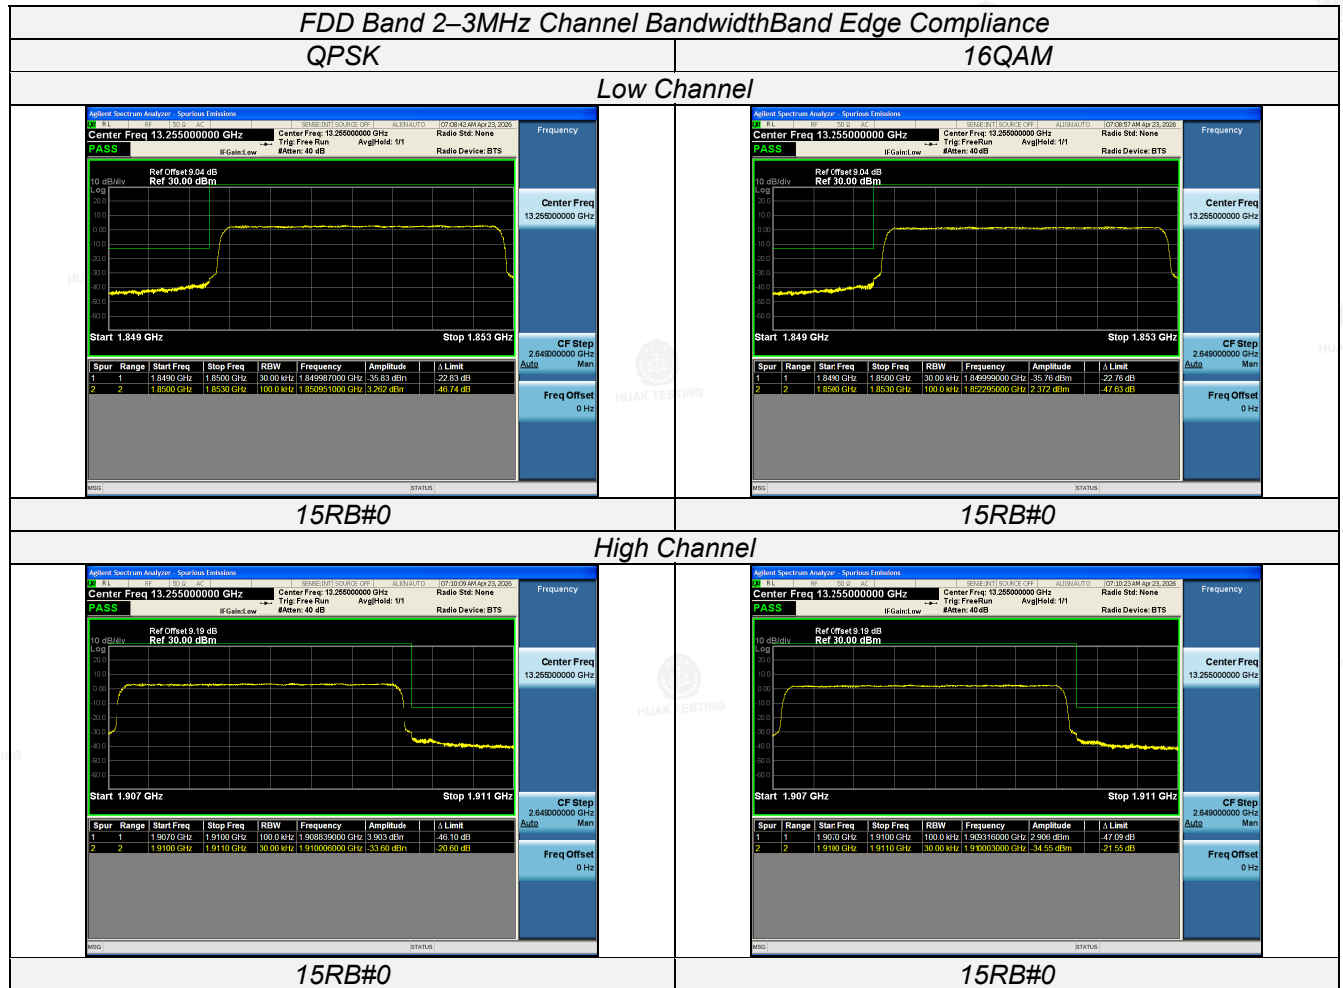The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



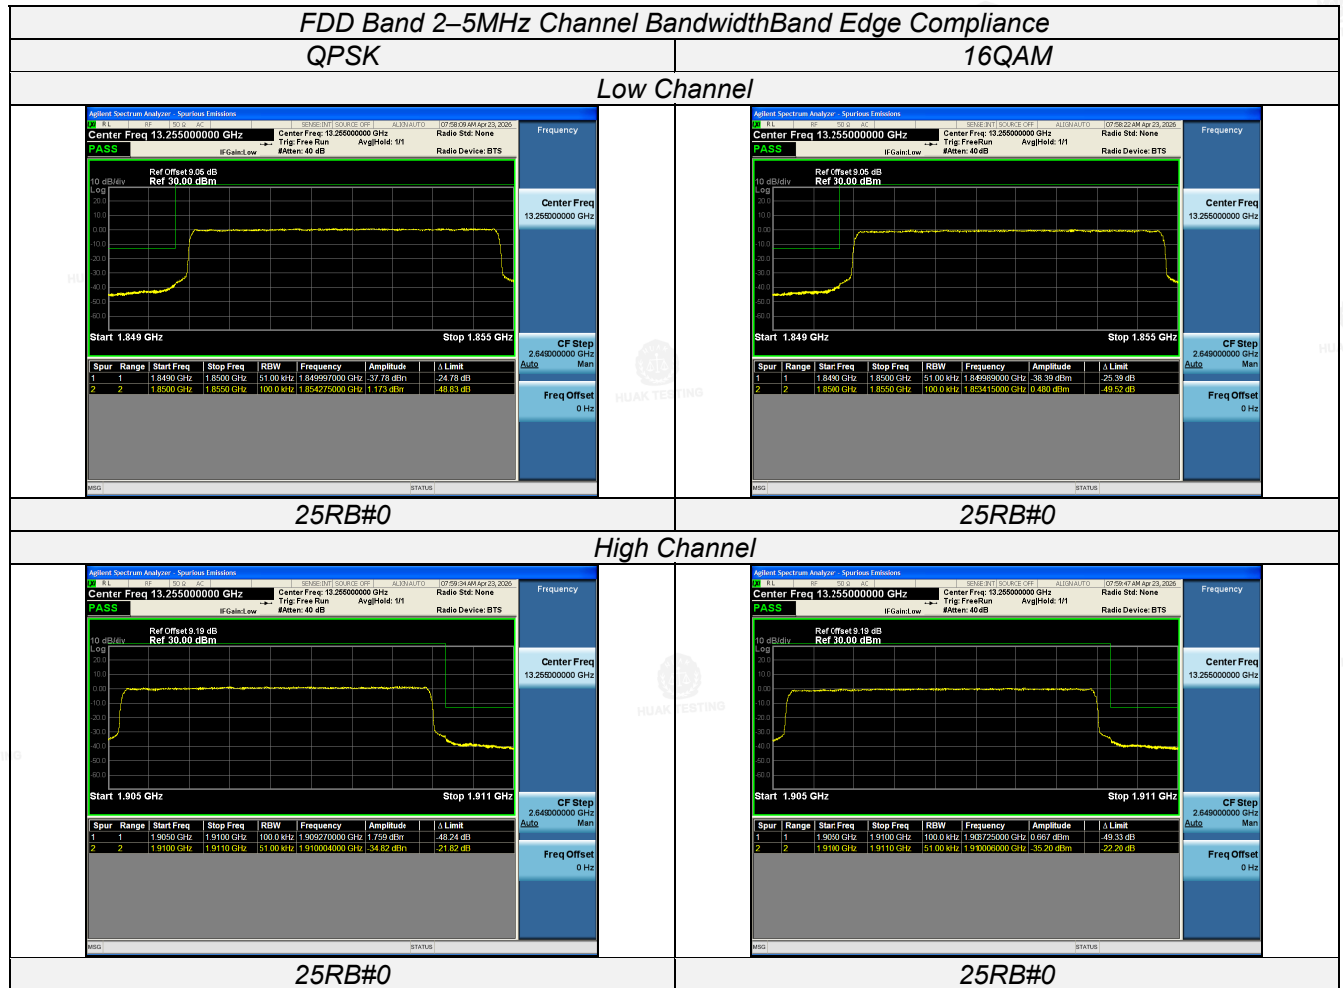The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

