



Appendix Test Data for SRD(Conducted Measurement)

Product Name: Remote control dinosaur

Trade Mark: /

Test Model: KDL921

FCC ID: 2BV3U-KDL921

Environmental Conditions

Temperature:	23.5°C
Relative Humidity:	58%
ATM Pressure:	100.0 kPa
Test Engineer:	Allen Lai
Supervised by:	Max Zhang
NOTE	N/A

Appendix A: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
SRD	Ant1	2405	0.564	2404.732	2405.296	0.5	PASS
SRD	Ant1	2445	0.552	2444.736	2445.288	0.5	PASS
SRD	Ant1	2475	0.560	2474.736	2475.296	0.5	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs





SRD-Ant1-2475-PASS





Appendix B: Occupied Channel Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
SRD	Ant1	2405	1.1812	2404.3967	2405.5779	---	---
SRD	Ant1	2445	1.2093	2444.3781	2445.5874	---	---
SRD	Ant1	2475	1.1496	2474.4184	2475.5680	---	---


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs



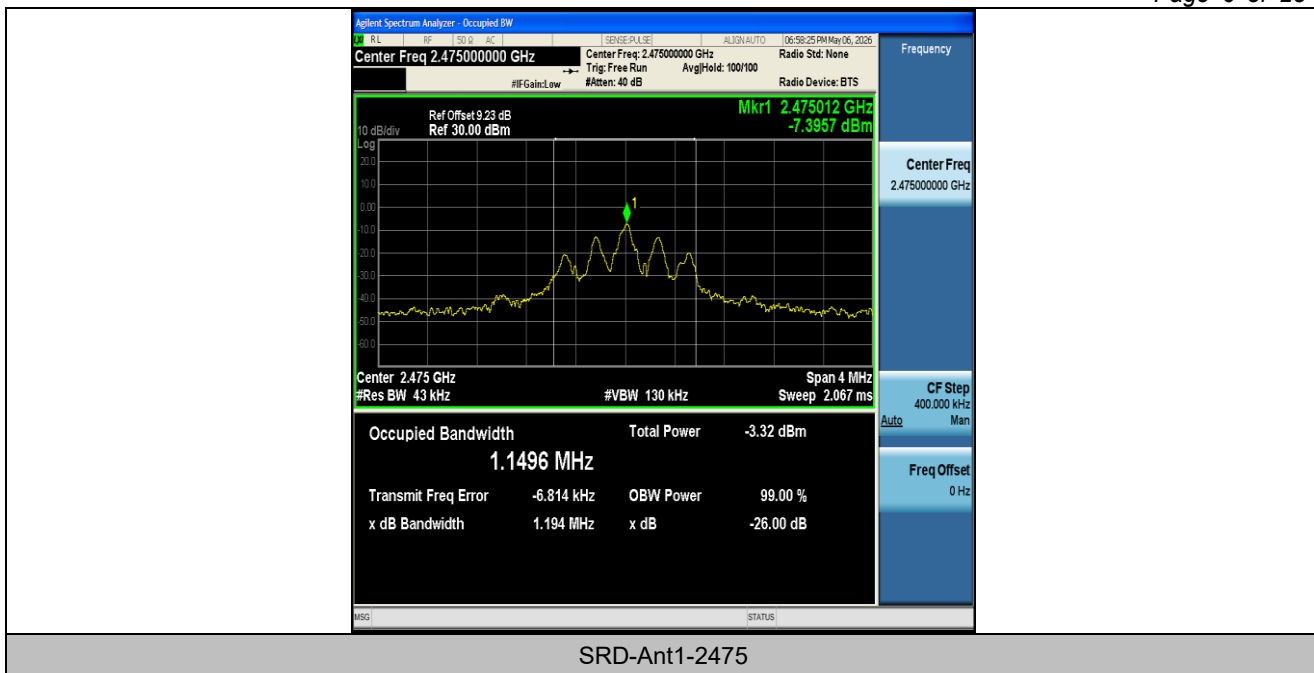



Appendix C: Maximum peak conducted output power

Test Result Peak


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
SRD	Ant1	2405	-5.30	≤30	PASS
SRD	Ant1	2445	-5.85	≤30	PASS
SRD	Ant1	2475	-6.17	≤30	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs Peak

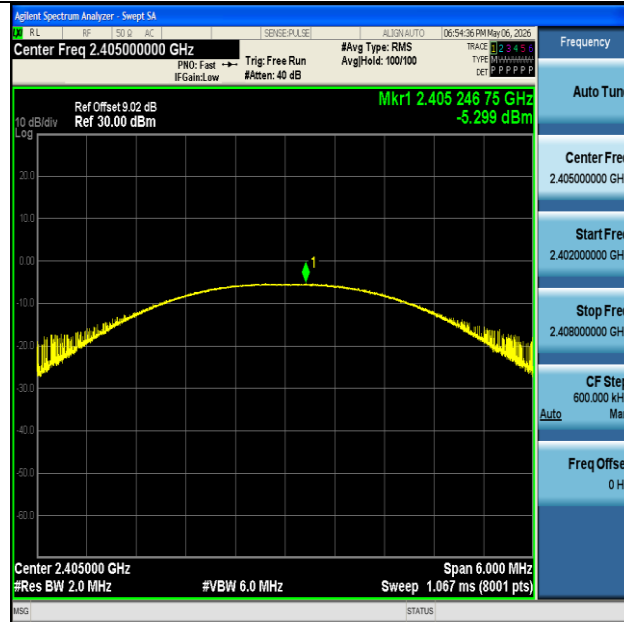


SRD-Ant1-2405-PASS

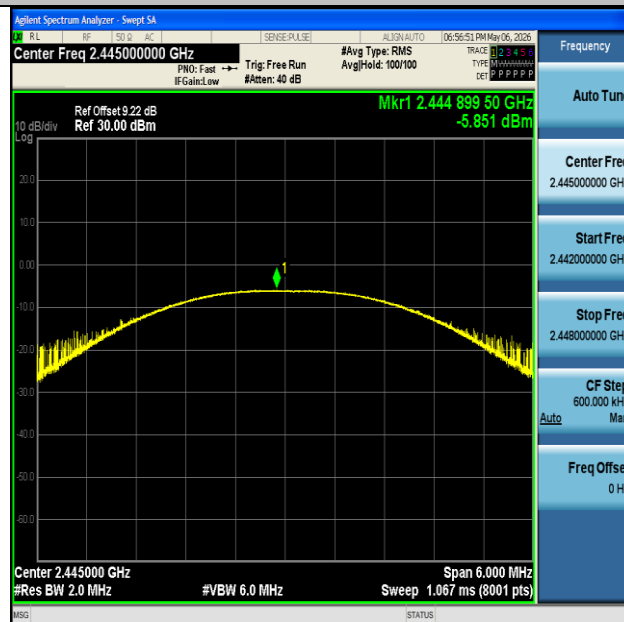

SRD-Ant1-2445-PASS



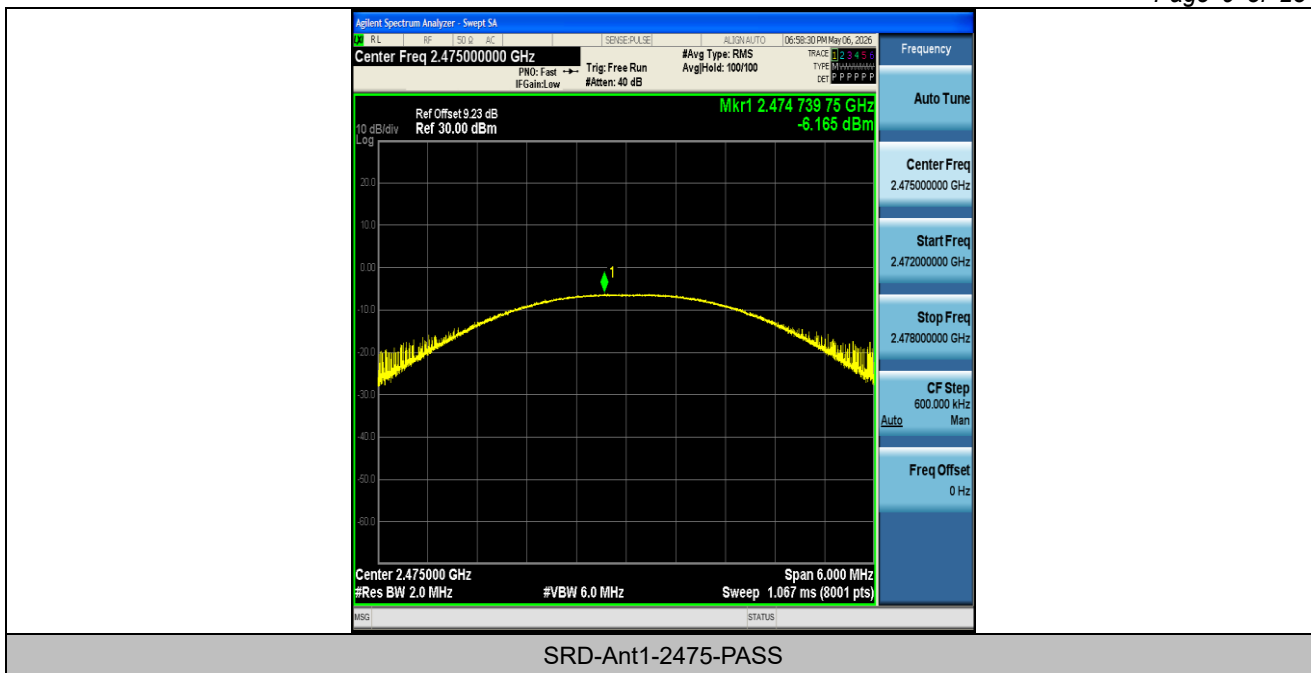



Appendix D: Maximum peak power spectral density

Test Result


Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
SRD	Ant1	2405	-9.68	≤8.00	PASS
SRD	Ant1	2445	-11.05	≤8.00	PASS
SRD	Ant1	2475	-10.94	≤8.00	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs

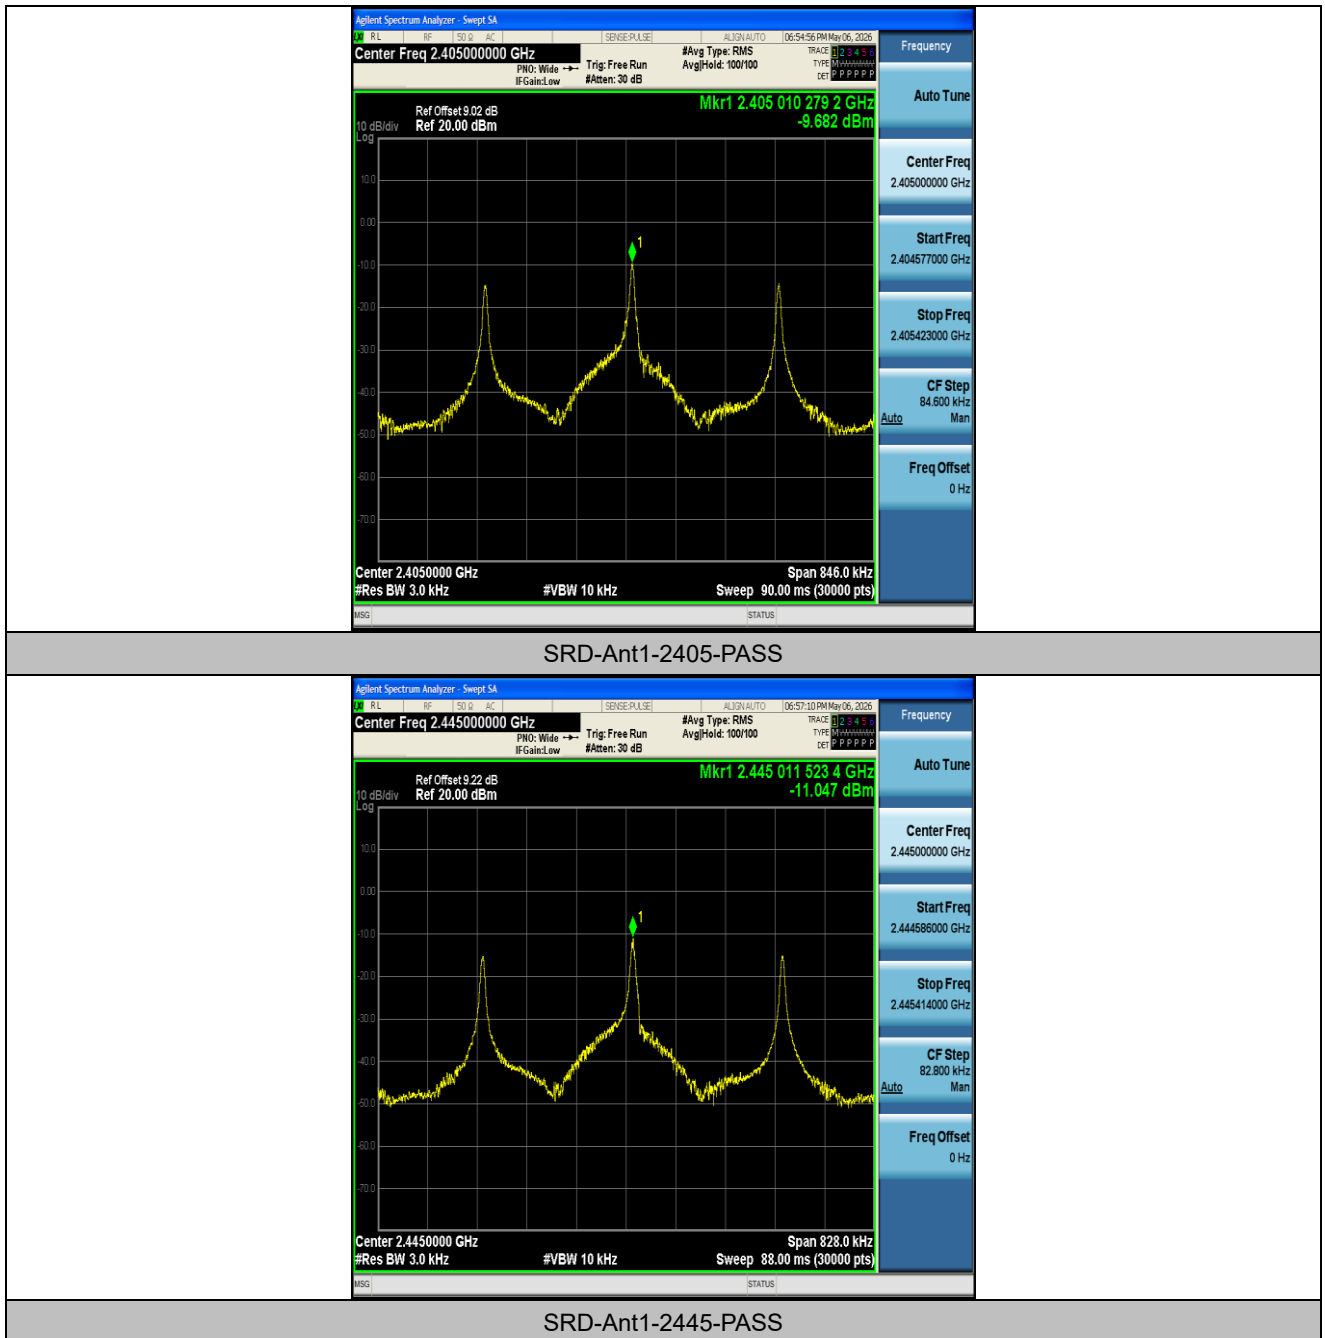

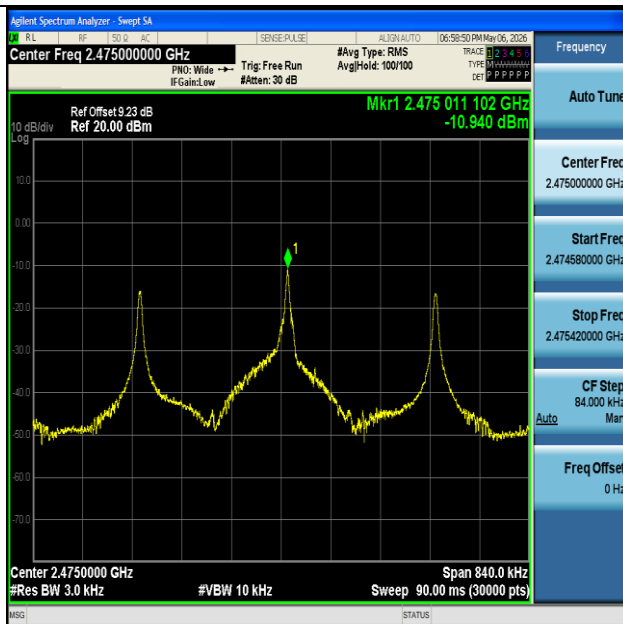

SRD-Ant1-2475-PASS





Appendix E: Band edge measurements

Test Result


Test Mode	Antenna	Ch. Name	Frequency [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
SRD	Ant1	Low	2405	-6.33	-47.47	≤ -26.33	PASS
SRD	Ant1	High	2475	-8.27	-49.42	≤ -28.27	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs

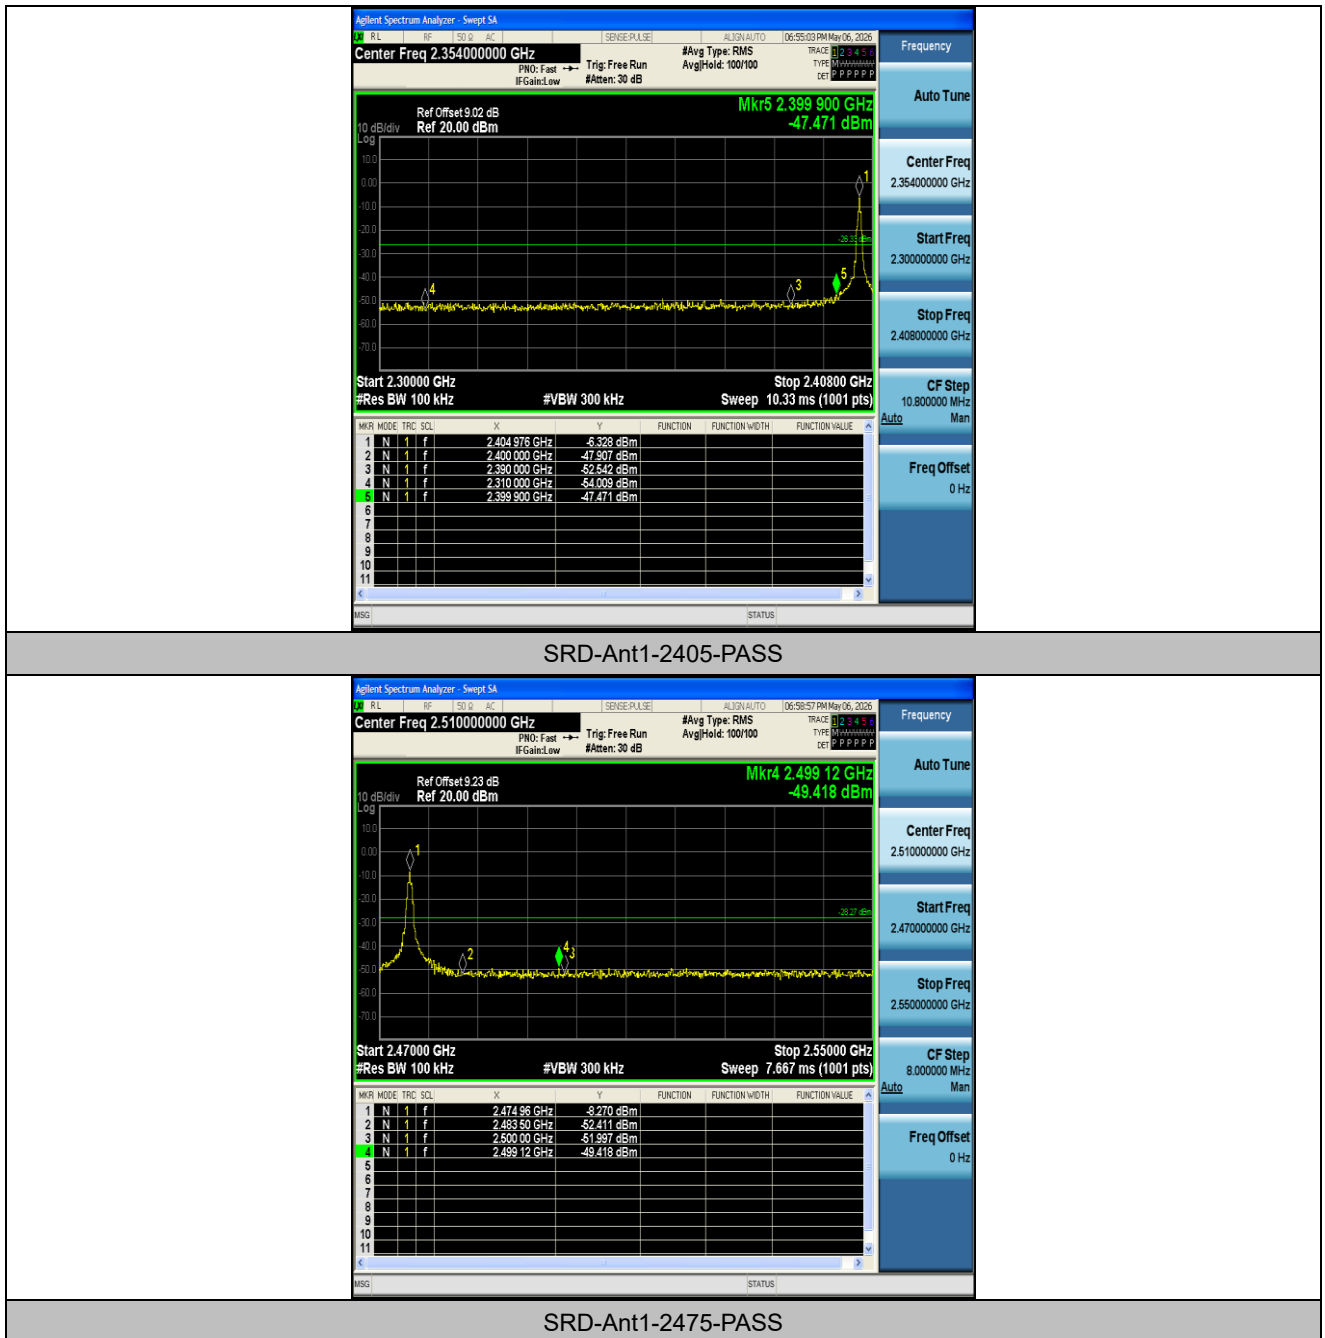



Appendix F: Conducted Spurious Emission

Test Result

Test Mode	Antenna	Frequency [MHz]	Freq. Range [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
SRD	Ant1	2405	0~Reference	-7.03	-7.03	---	PASS
SRD	Ant1	2405	30~1000	-7.03	-62.88	≤ -27.03	PASS
SRD	Ant1	2405	1000~26500	-7.03	-37.15	≤ -27.03	PASS
SRD	Ant1	2445	0~Reference	-7.02	-7.02	---	PASS
SRD	Ant1	2445	30~1000	-7.02	-62.99	≤ -27.02	PASS
SRD	Ant1	2445	1000~26500	-7.02	-37.42	≤ -27.02	PASS
SRD	Ant1	2475	0~Reference	-7.30	-7.30	---	PASS
SRD	Ant1	2475	30~1000	-7.30	-62.61	≤ -27.3	PASS
SRD	Ant1	2475	1000~26500	-7.30	-37.05	≤ -27.3	PASS

Note: offset(dB) in Reference test plots = cable loss(dB) + attenuator factor(dB); For spurious emissions plots from 30MHz to 26.5GHz, the cable loss and attenuator factors have been set in the 'Input Correction' of the Spectrum Analyzer during the test.





Test Graphs





SRD-Ant1-2405-1000~26500-PASS




SRD-Ant1-2445-0~Reference-PASS





SRD-Ant1-2445-30~1000-PASS

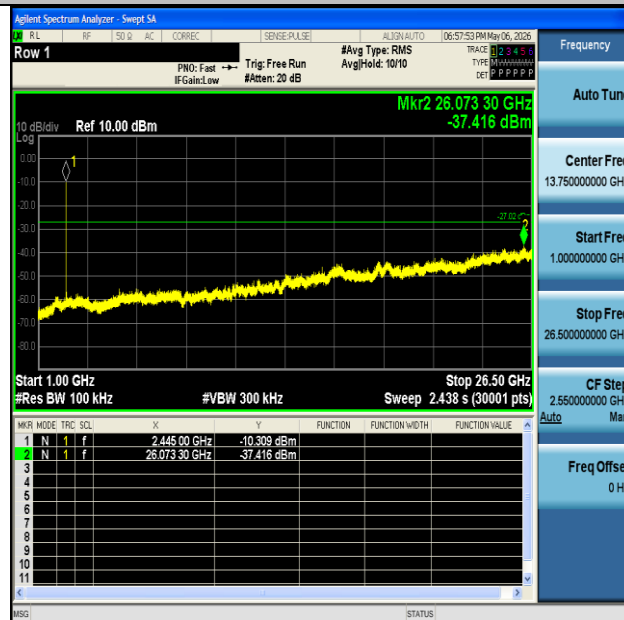


SRD-Ant1-2445-1000~26500-PASS






SRD-Ant1-2475-0~Reference-PASS

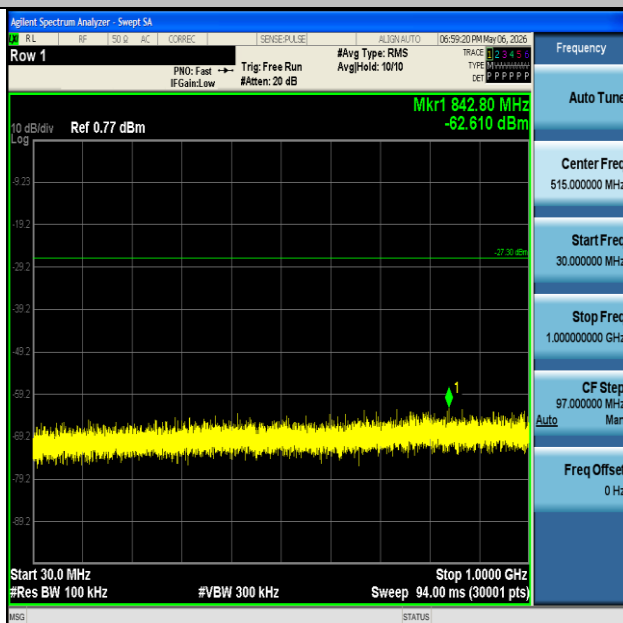

SRD-Ant1-2475-30~1000-PASS



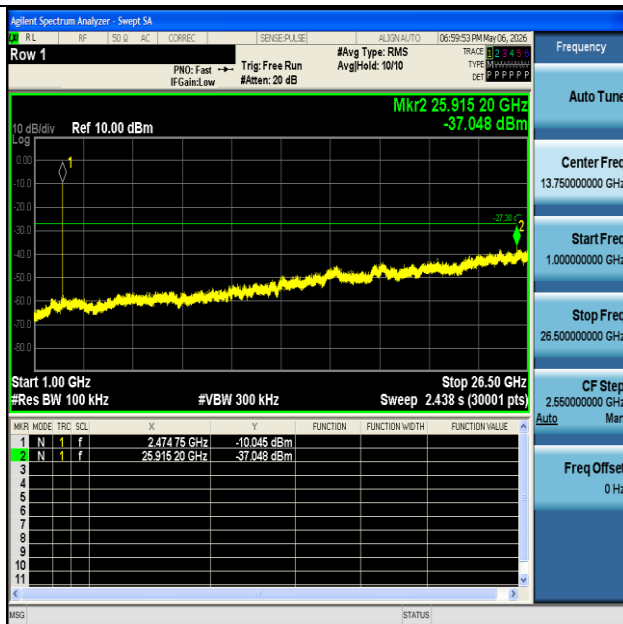

SRD-Ant1-2475-1000~26500-PASS





Appendix G: Duty Cycle

Test Result

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]
SRD	Ant1	2405	0.17	0.28	60.71	2.17
SRD	Ant1	2445	0.18	0.29	62.07	2.07
SRD	Ant1	2475	0.17	0.28	60.71	2.17


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs



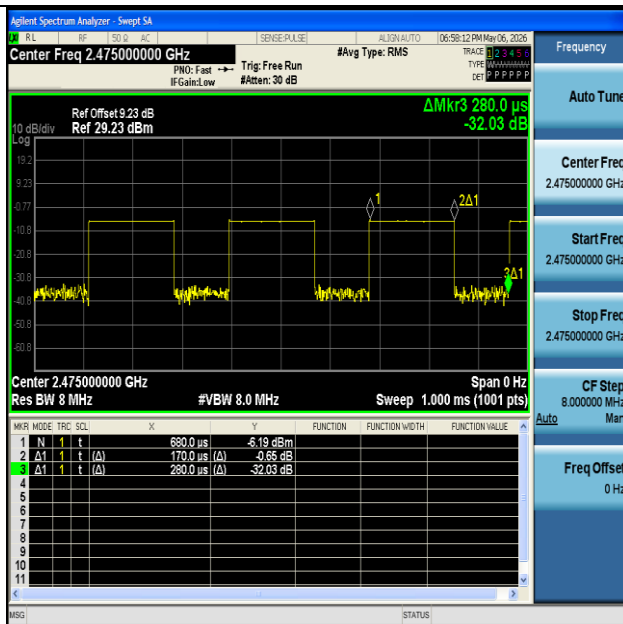

NTNV-SRD-Ant1-2475

