


Restricted bands:

Test plot as follows:

Test_Mode	GFSK Transmitting	Test_Frequency	2402MHz
Remark:	/	Test_Date	2026/5/14


Test Graph

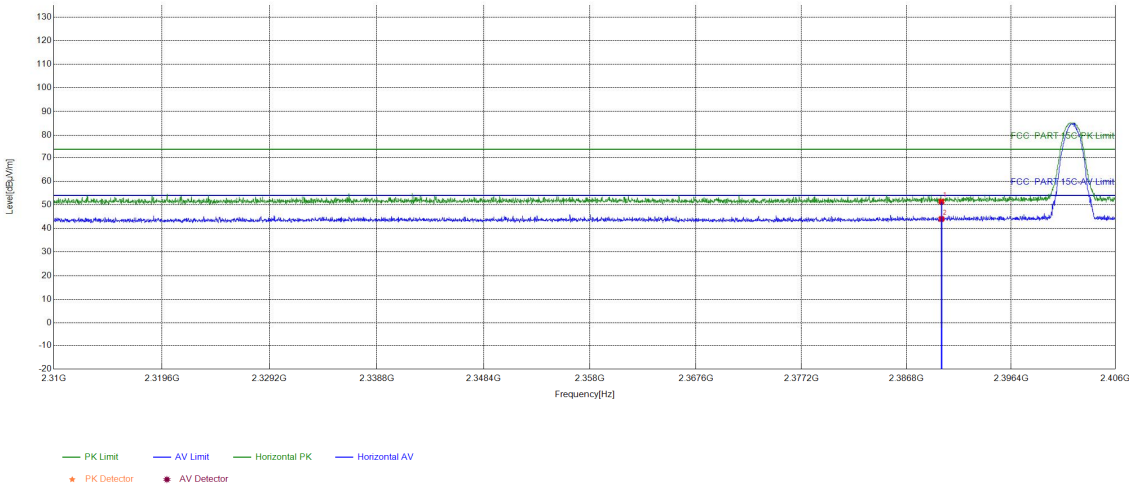

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.44	51.40	74.00	22.60	PASS	Horizont	PK
2	2390	15.96	28.07	44.03	54.00	9.97	PASS	Horizont	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2402MHz
Remark:	/	Test_Date	2026/5/14


Test Graph

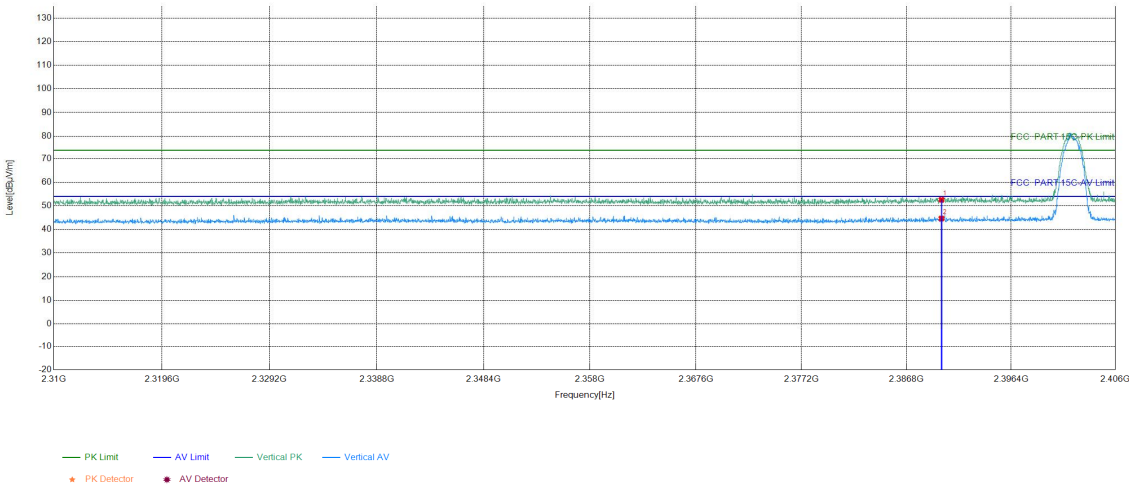

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.66	52.62	74.00	21.38	PASS	Vertical	PK
2	2390	15.96	28.68	44.64	54.00	9.36	PASS	Vertical	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2480MHz
Remark:	/	Test_Date	2026/5/14


Test Graph

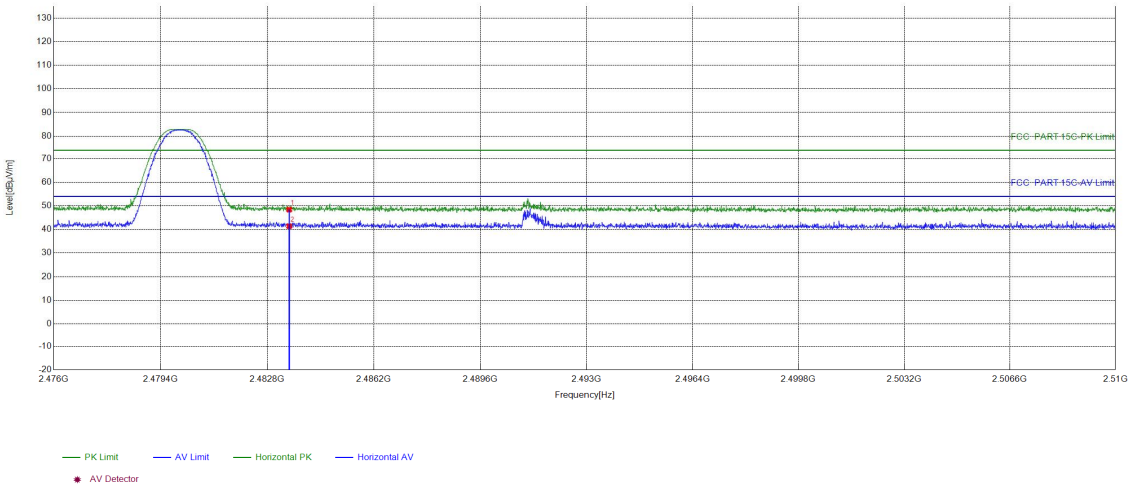

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.12	48.41	74.00	25.59	PASS	Horizont	PK
2	2483.5	16.29	25.09	41.38	54.00	12.62	PASS	Horizont	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2480MHz
Remark:	/	Test_Date	2026/5/14


Test Graph

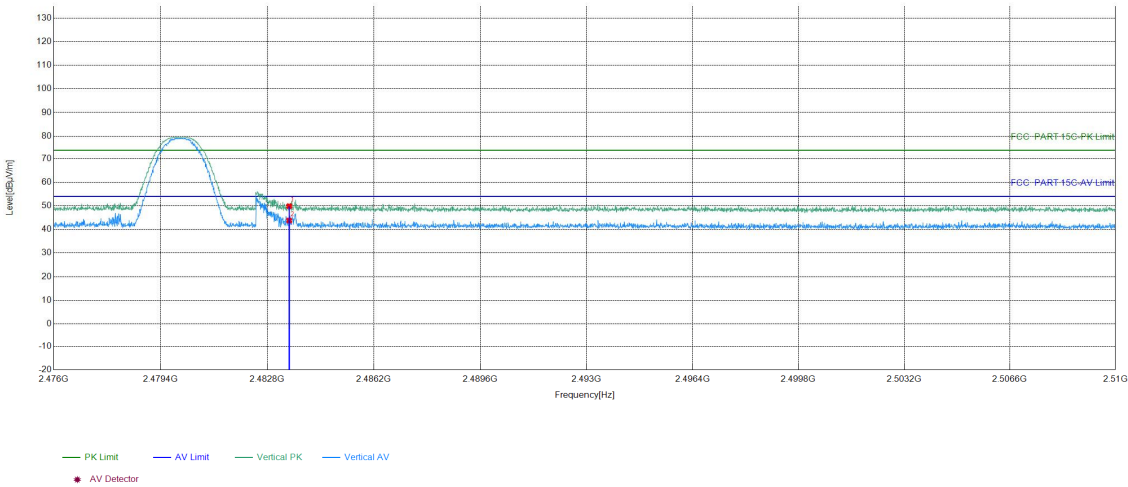

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	33.60	49.89	74.00	24.11	PASS	Vertical	PK
2	2483.5	16.29	27.50	43.79	54.00	10.21	PASS	Vertical	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2402MHz
Remark:	/	Test_Date	2026/5/14


Test Graph

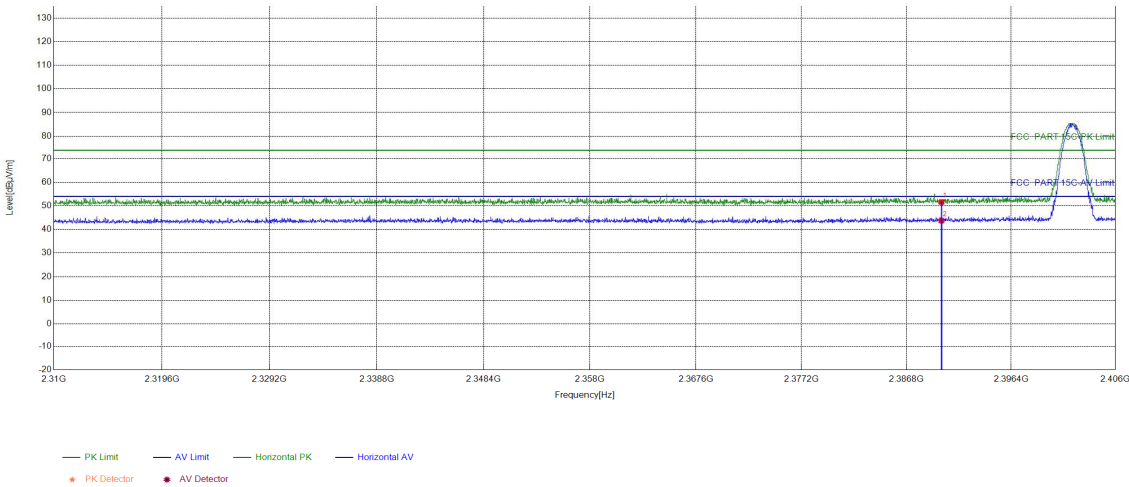

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.67	51.63	74.00	22.37	PASS	Horizont	PK
2	2390	15.96	27.77	43.73	54.00	10.27	PASS	Horizont	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2402MHz
Remark:	/	Test_Date	2026/5/14


Test Graph

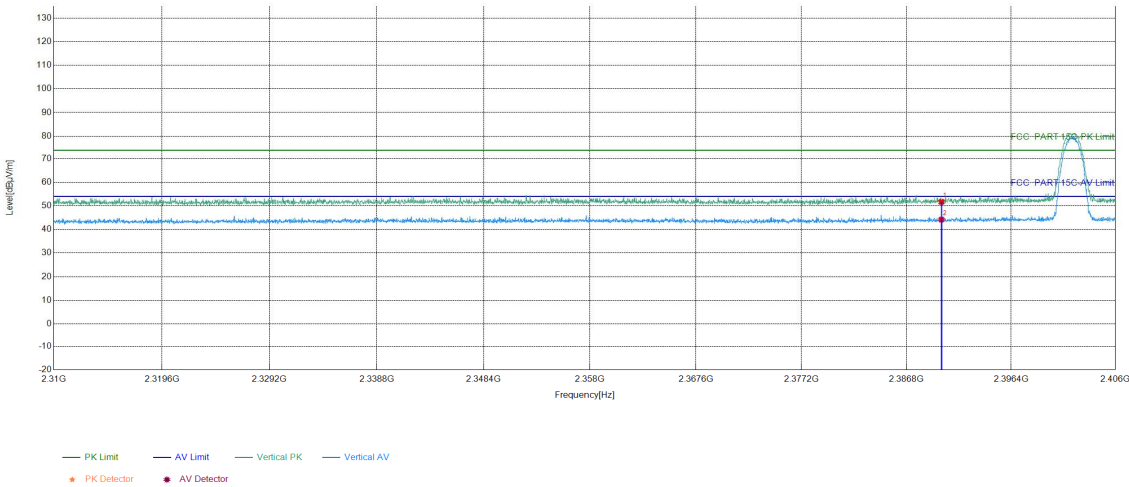

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.70	51.66	74.00	22.34	PASS	Vertical	PK
2	2390	15.96	28.22	44.18	54.00	9.82	PASS	Vertical	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2480MHz
Remark:	/	Test_Date	2026/5/14


Test Graph

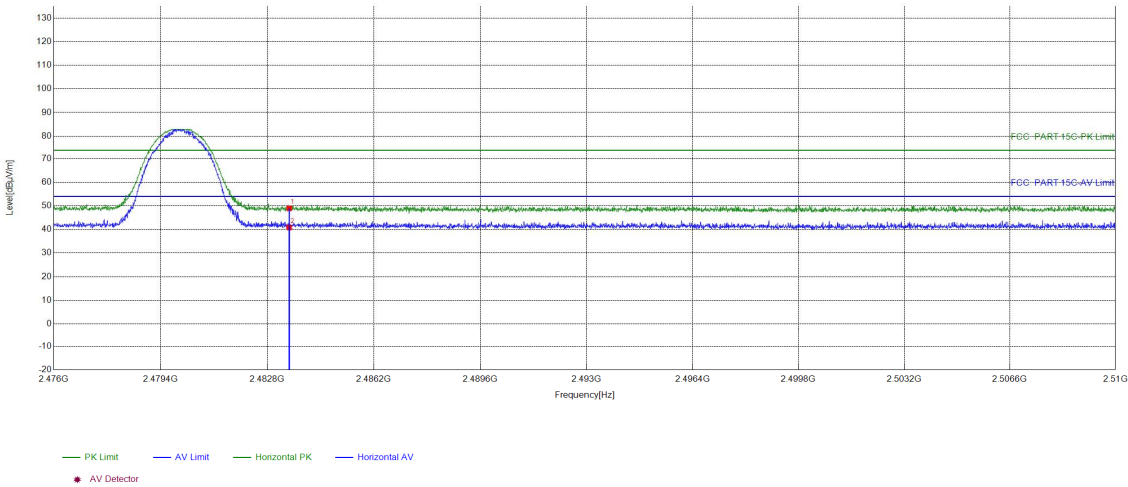

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.68	48.97	74.00	25.03	PASS	Horizont	PK
2	2483.5	16.29	24.55	40.84	54.00	13.16	PASS	Horizont	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2480MHz
Remark:	/	Test_Date	2026/5/14


Test Graph

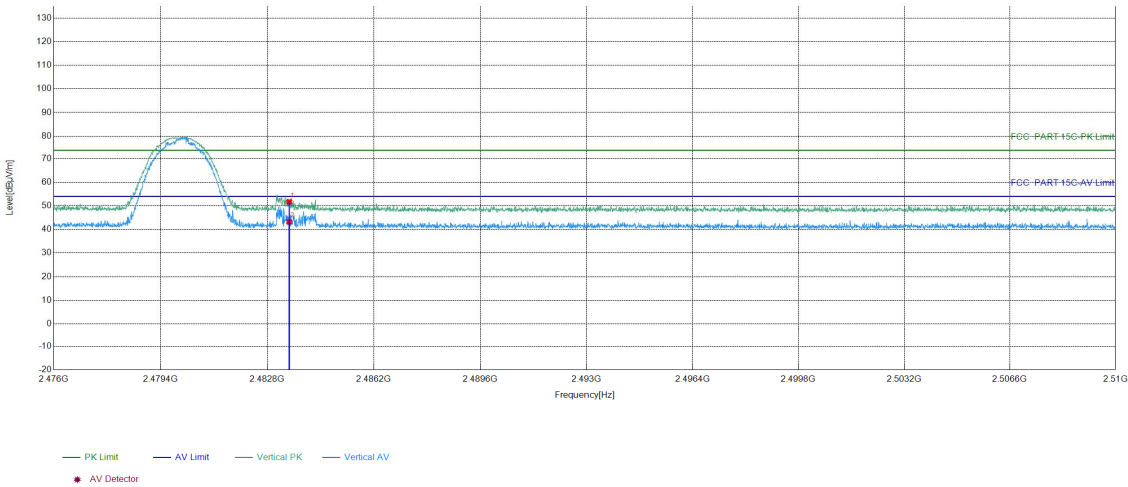

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.42	51.71	74.00	22.29	PASS	Vertical	PK
2	2483.5	16.29	26.92	43.21	54.00	10.79	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402MHz
Remark:	/	Test_Date	2026/5/15


Test Graph

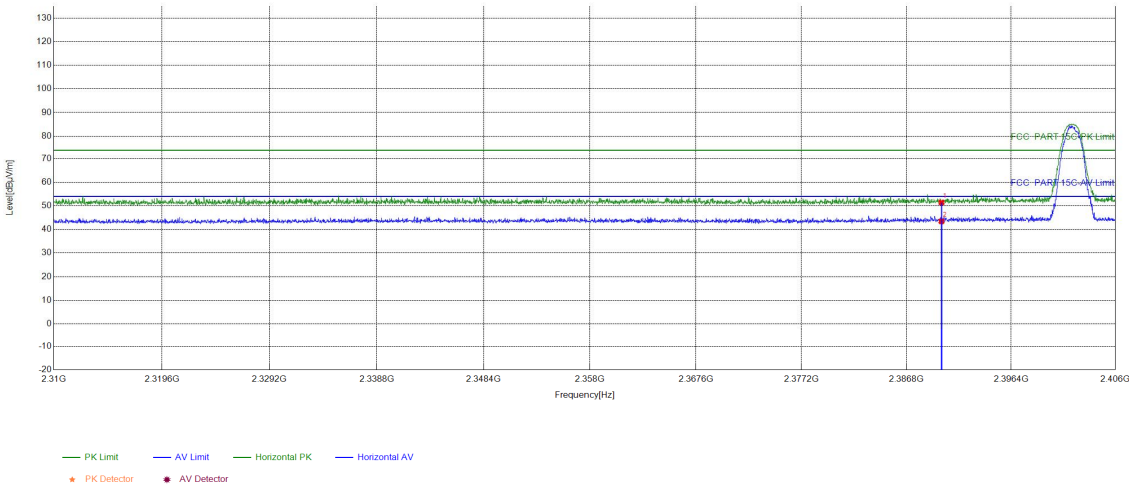

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.45	51.41	74.00	22.59	PASS	Horizont	PK
2	2390	15.96	27.49	43.45	54.00	10.55	PASS	Horizont	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402MHz
Remark:	/	Test_Date	2026/5/15


Test Graph

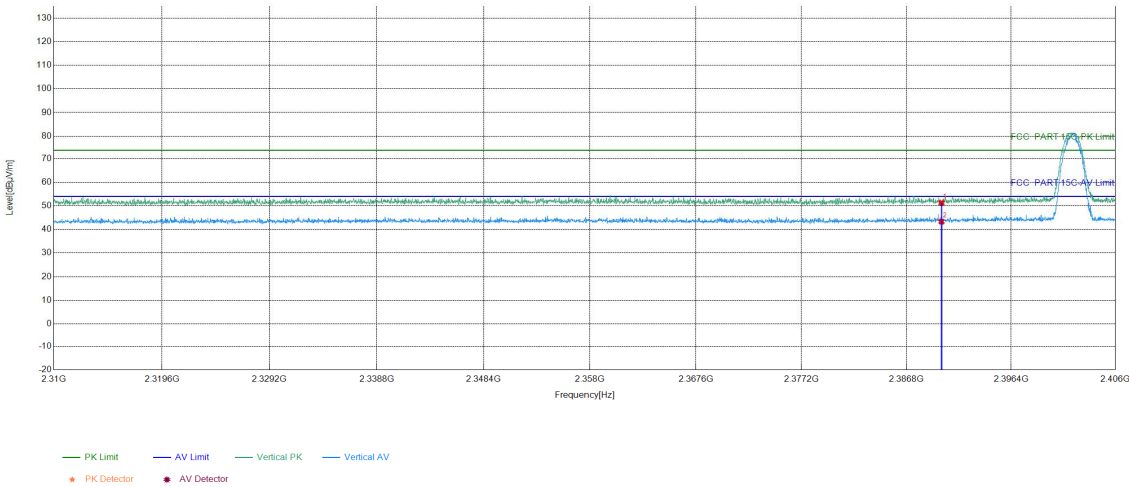

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.30	51.26	74.00	22.74	PASS	Vertical	PK
2	2390	15.96	27.36	43.32	54.00	10.68	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480MHz
Remark:	/	Test_Date	2026/5/15


Test Graph

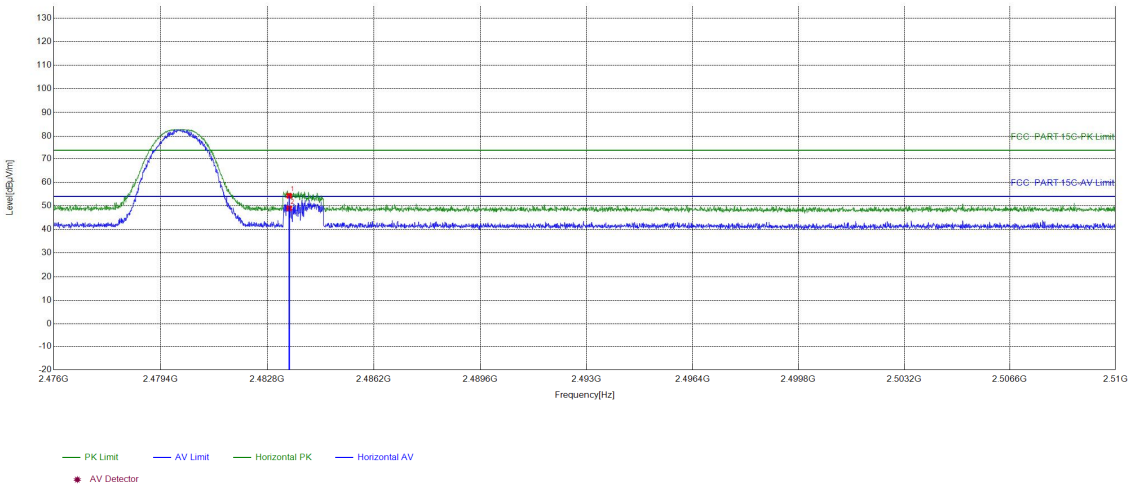

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	37.99	54.28	74.00	19.72	PASS	Horizont	PK
2	2483.5	16.29	32.72	49.01	54.00	4.99	PASS	Horizont	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480MHz
Remark:	/	Test_Date	2026/5/15

Test Graph

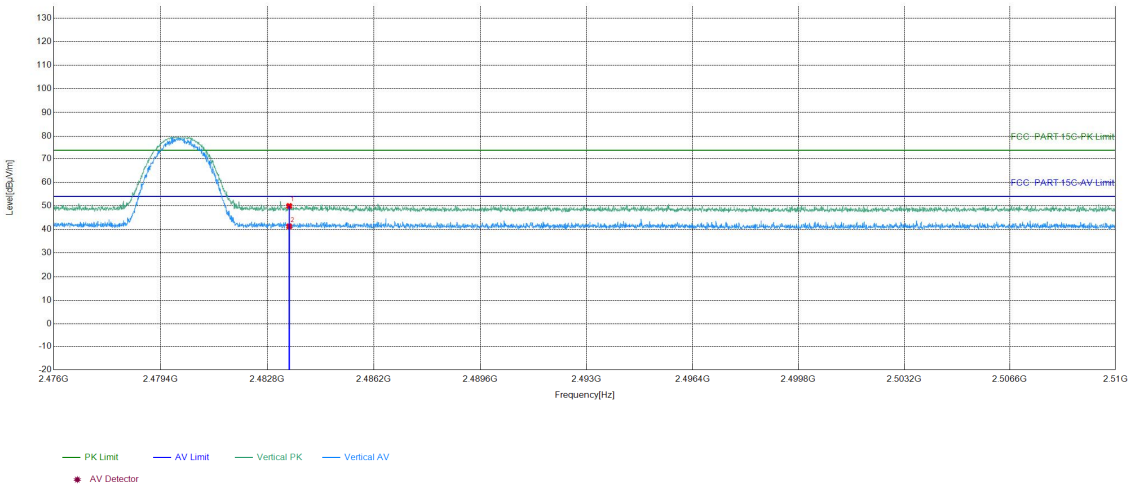

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	33.67	49.96	74.00	24.04	PASS	Vertical	PK
2	2483.5	16.29	25.03	41.32	54.00	12.68	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

5 Appendix A

Refer to Appendix: Bluetooth Classic of EED32S80976302

6 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S80976301.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***