

PD1 Main Antenna Specification

Customer	PetVora
Deman Part No.	TFPD05H34460011

Deman	RF radio frequency	ID structure	QE quality	PM project
	Chen Chen	Liu WB	Hu Yuping	Ma Hengzhou

Customer client	ID structure	RD research and development	QE quality	PM project

Date : 2024.11.29


Shanghai Demen Electronic Technology Co., Ltd.
Shenzhen Haidemen Electronics Co., Ltd.

Antenna Structure Diagram:


[illegible]

Design Specifications	Typical	Units
Antenna Type	FPC	
working Frequency	【699-894】 & 【1710-2200】	MHz
Gain	【-5.62~2.55】	dBi
Antenna efficiency	【11~ 57】	%
Return loss	<-5	
Ploriaztion	linear polarization	
(Axial Ratio	When the antenna is circularly polarized, note the axial ratio within the operating bandwidth.	N/A
Radiation pattern	omnidirectional	
impedance	50 ohm	
Power handling	33	dBm
Interface	shrapnel	
Overall dimensions	See the drawing section.	
Weight	no requirement	
Operatin Temp	-30 ----- 70	°
Storing Temp	-30 ----- 70	°

Radio Frequency Link

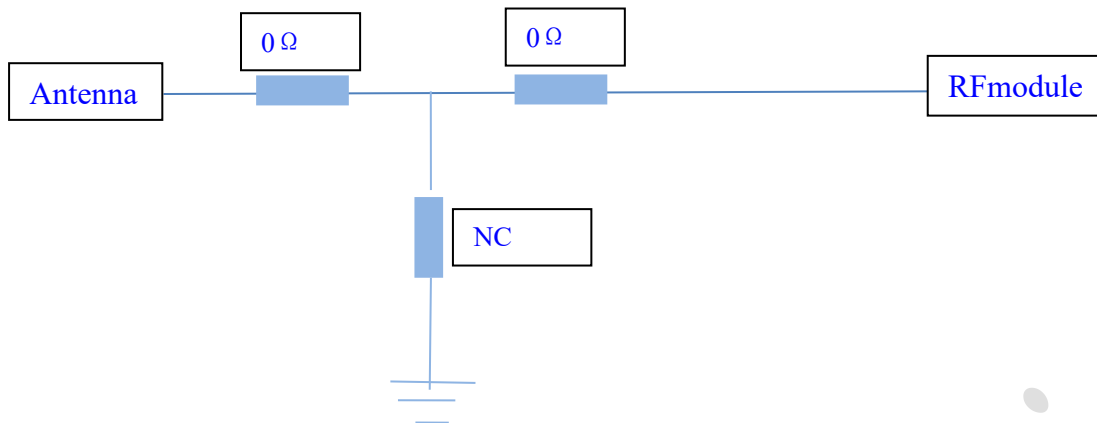





Passive Performance

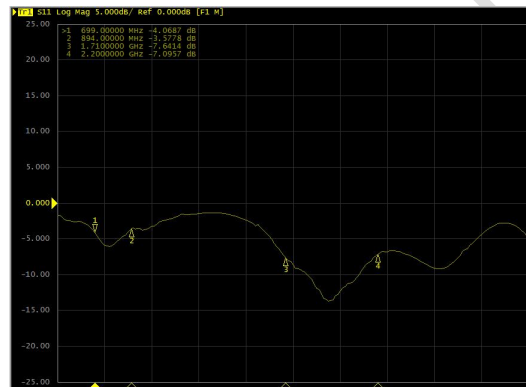

ANT

Frequency(MHz)	S11(dB)
699	-4
894	-3
1710	-7
2200	-7

directional diagram

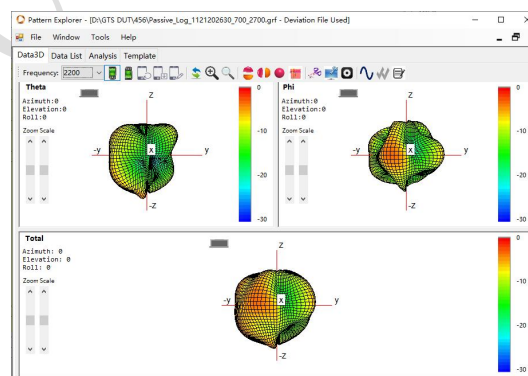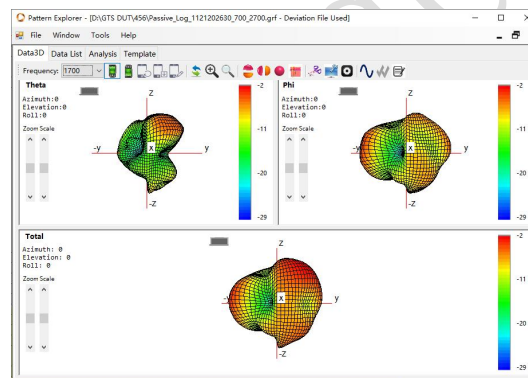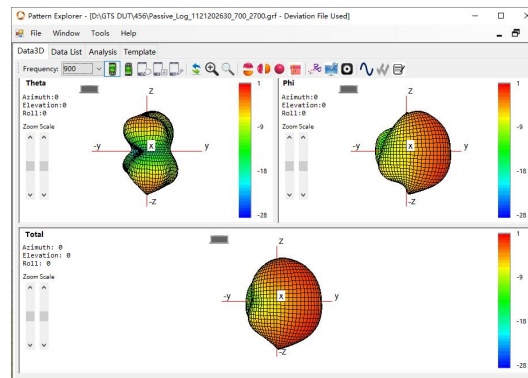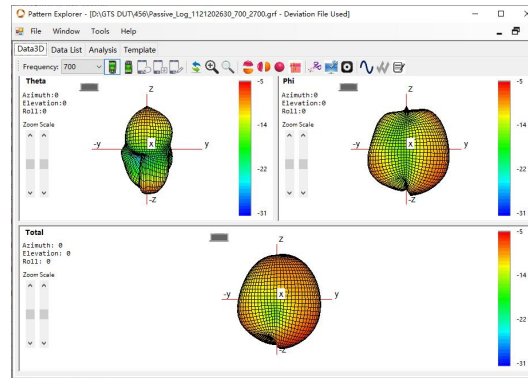

Antenna efficiency

frequency point	effeciency (dB)	Gain(dBi)	frequency point	effeciency (dB)	Gain(dBi)
700	-9.58	-5.62	1700	-7.32	-2.69
710	-8.52	-4.51	1720	-7.08	-2.64
720	-7.51	-3.43	1740	-6.42	-1.73
730	-6.88	-2.9	1760	-5.94	-1.37
740	-6.09	-2.19	1780	-5.5	-1.1
750	-5.16	-0.97	1800	-4.92	-0.65
760	-4.39	0.03	1820	-4.5	-0.23
770	-3.8	0.79	1840	-4.41	-0.2
780	-3.15	1.56	1860	-4.59	-0.35
790	-2.86	2.01	1880	-4.69	-0.47
800	-2.48	2.39	1900	-4.04	0.19
810	-2.4	2.53	1920	-3.43	0.81
820	-2.43	2.54	1940	-3.09	1.06
830	-2.4	2.55	1960	-2.95	1.04
840	-2.73	2.21	1980	-3	0.85
850	-3.04	1.86	2000	-3.05	0.88
860	-3.25	1.65	2020	-3.19	0.88
870	-3.29	1.49	2040	-3.32	0.91
880	-3.62	1.19	2060	-3.69	0.69
890	-4.19	0.67	2080	-3.96	0.48
900	-4.7	0.15	2100	-4.21	0.29
			2120	-4.37	0.34
			2140	-4.74	0.19
			2160	-5.42	-0.34
			2180	-5.64	-0.47
			2200	-5.87	-0.7