


Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

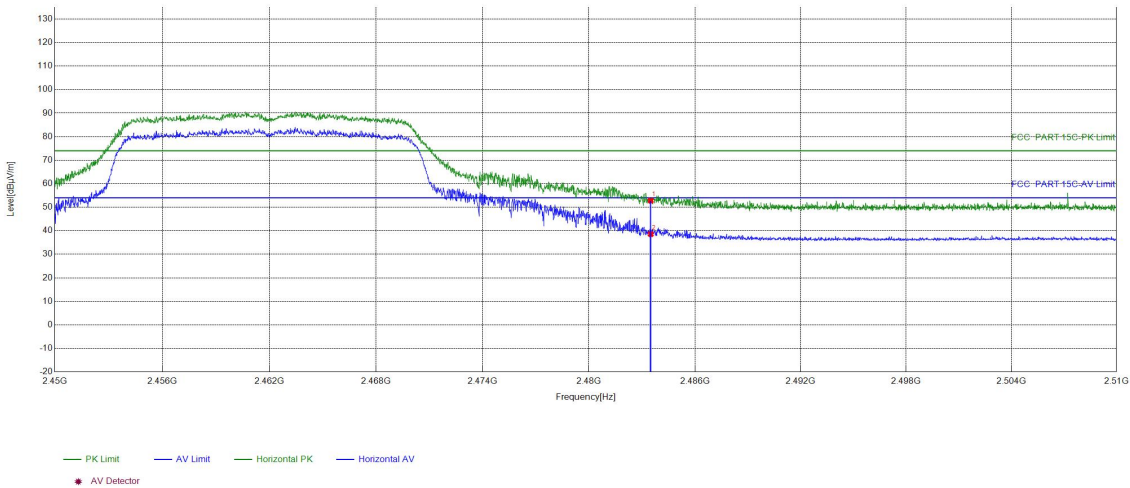

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Readin g [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	36.50	52.79	74.00	21.21	PASS	Horizontal	PK
2	2483.5	16.29	22.26	38.55	54.00	15.45	PASS	Horizontal	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

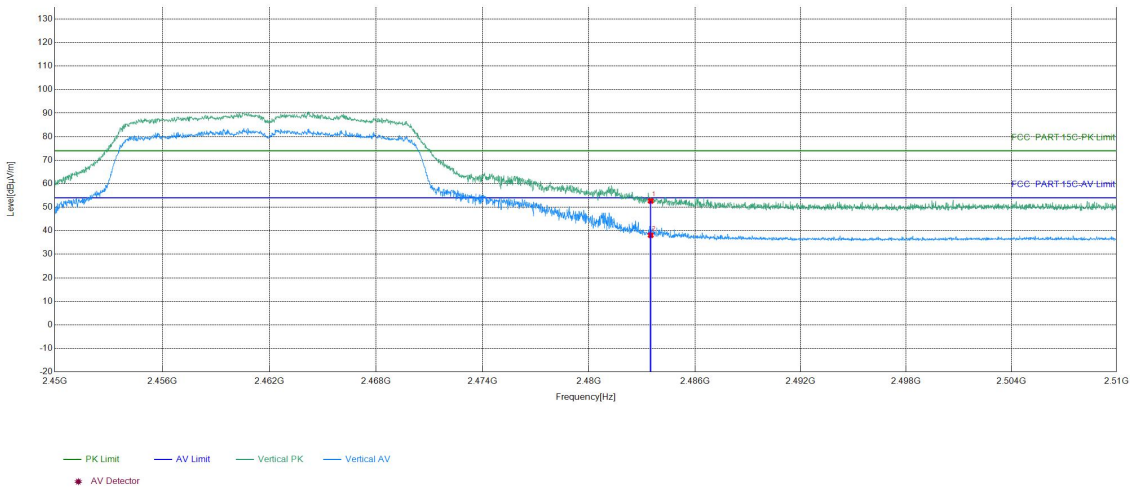

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	36.38	52.67	74.00	21.33	PASS	Vertical	PK
2	2483.5	16.29	21.82	38.11	54.00	15.89	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

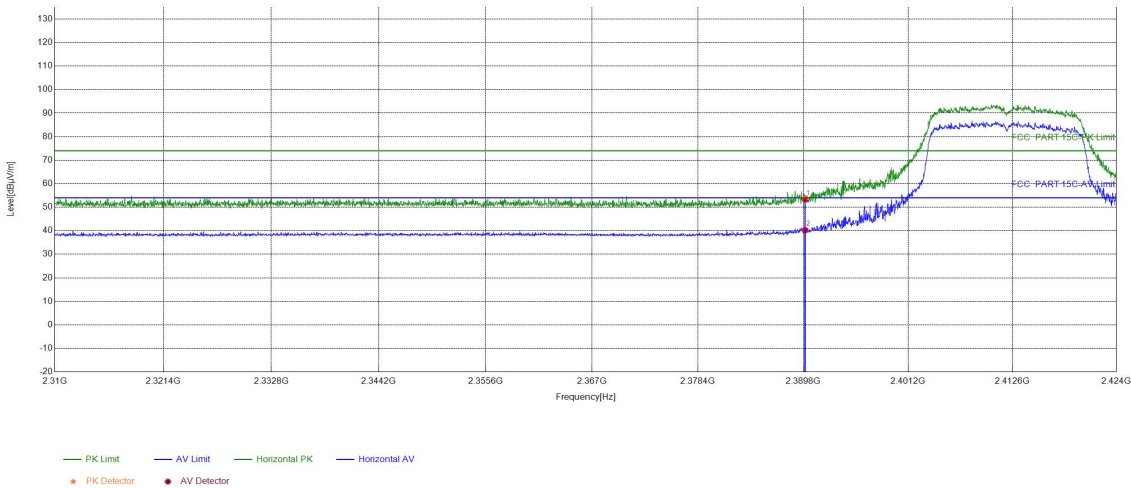

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	37.34	53.30	74.00	20.70	PASS	Horizontal	PK
2	2390	15.96	24.27	40.23	54.00	13.77	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

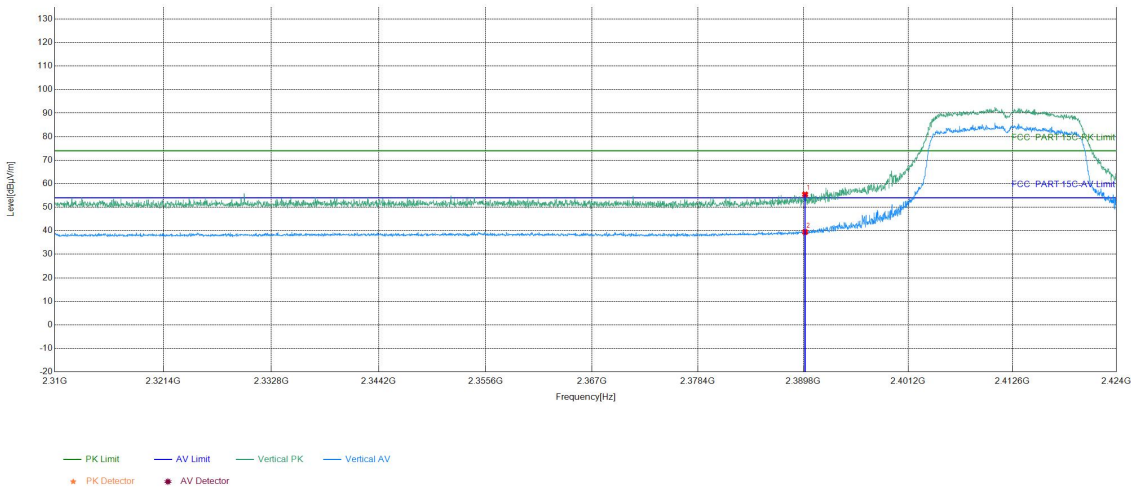

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	39.48	55.44	74.00	18.56	PASS	Vertical	PK
2	2390	15.96	23.49	39.45	54.00	14.55	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

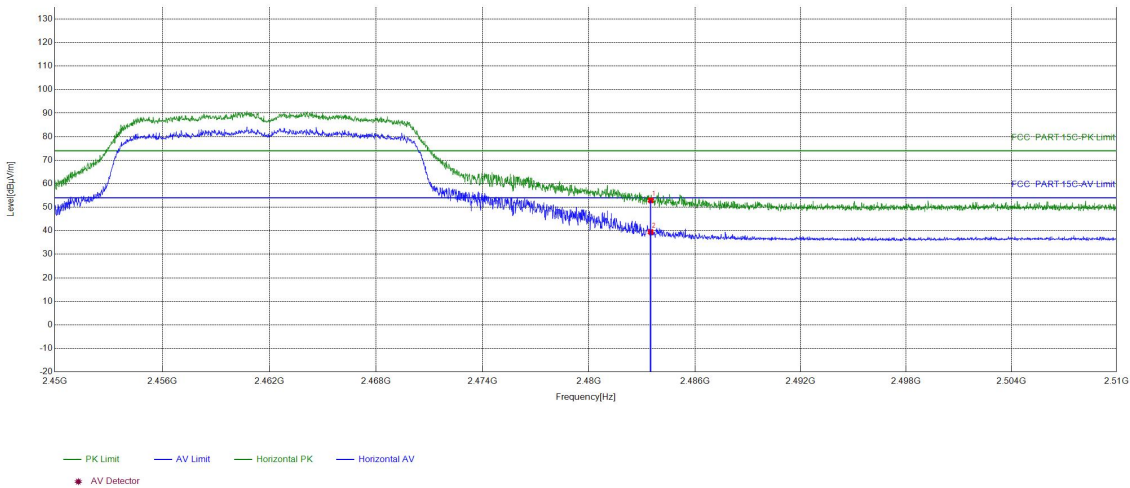

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	36.65	52.94	74.00	21.06	PASS	Horizontal	PK
2	2483.5	16.29	23.20	39.49	54.00	14.51	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Remark:	\	Test_Date	2026/7/8

Test Graph

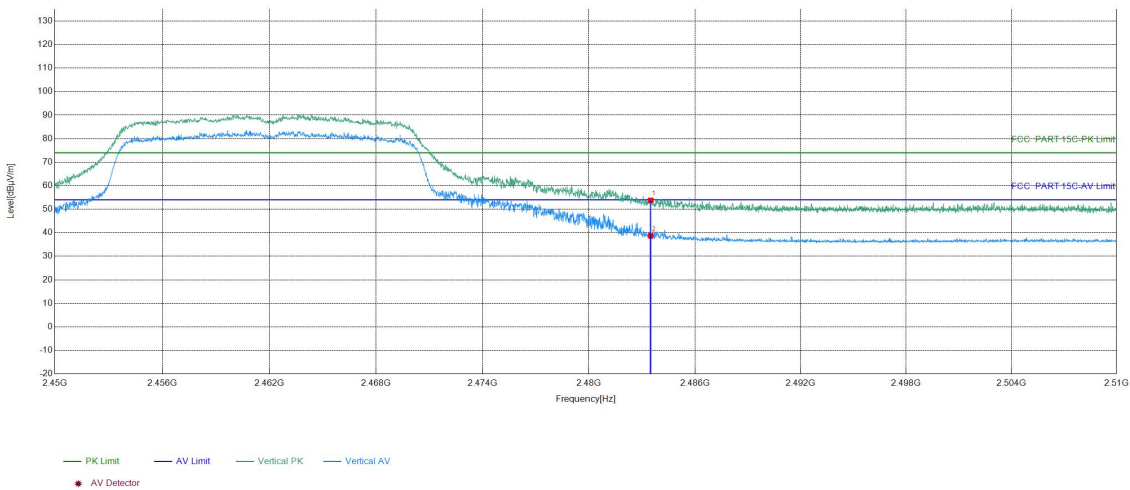

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	37.51	53.80	74.00	20.20	PASS	Vertical	PK
2	2483.5	16.29	22.35	38.64	54.00	15.36	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

6 Appendix A

Refer to Appendix: 2.4G Wi-Fi of EED32S815044

7 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S813169.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***