

TEST REPORT

Product : PetVora Smart Collar Air
Trade mark : PetVora
Model/Type reference : PT1A
Serial Number : N/A
Report Number : EED32S813170
FCC ID : 2BV45PVRT1A
Date of Issue : August 11, 2026
Test Standards : 47 CFR Part 2
47 CFR Part 22 subpart H
47 CFR Part 24 subpart E
47 CFR Part 27
Test result : PASS

Prepared for:

PETVORA HK LIMITED

**Room 1378, 13/F, Fook Cheong Building, 63 Hoi Yuen Road, Kwun Tong,
Kowloon, Hong Kong**

Prepared by:

Centre Testing International Group Co., Ltd.

**Building C, Hongwei Industrial Park Block 70, Bao'an District,
Shenzhen, China**

TEL: +86-755-3368 3668**FAX: +86-755-3368 3385**

Compiled by:

Frazer Li

Frazer Li

Approved by:

Aaron Ma

Aaron Ma

Reviewed by:

Keven Tan

Keven Tan

Date:

August 11, 2026

Check No.: 9826100626

1 Test Summary

Test Item	Test Requirement	Test method	Result
FCC Part 22 (LTE Band 5)			
Conducted output power	Part 2.1046(a)/Part 22.913(a)	TIA-603-E-2016 &KDB 971168 D01v02r02	PASS
Effective Radiated Power of Transmitter(ERP)	Part 2.1046(a)/Part 22.913(a)	TIA-603-E-2016 &KDB 971168 D01v02r02	PASS
99% & 26dB Occupied Bandwidth	Part 2.1049(h)	Part 22.917(b) &KDB 971168 D01v02r02	PASS
Band Edge at antenna terminals	Part 2.1051/Part 22.917(a)	Part 22.917(b) &KDB 971168 D01v02r02	PASS
Spurious emissions at antenna terminals	Part 2.1051/ Part 2.1057/ Part 22.917(a)(b)	TIA-603-E-2016 &KDB 971168 D01v02r02	PASS
Field strength of spurious radiation	Part 2.1053/ Part 2.1057/ Part 22.917(a)(b)	TIA-603-E-2016 &KDB 971168 D01v02r02	PASS
Frequency stability	Part 2.1055/ Part 22.355	TIA-603-E-2016 &KDB 971168 D01v02r02	PASS
FCC Part 24 (LTE Band 2)			
Conducted output power	Part 2.1046(a) /Part 24.232(c)	TIA-603-E-2016&KDB 971168 D01v02r02	PASS
Effective Radiated Power of Transmitter(EIRP)	Part 2.1046(a) / Part 24.232(c)	TIA-603-E-2016 &KDB 971168 D01v02r02	PASS
peak-to-average ratio	Part 24.232(d)	KDB 971168 D01v02r02	PASS
99% & 26dB Occupied Bandwidth	Part 2.1049(h)	Part 24.238(b) &KDB 971168 D01v02r02	PASS
Band Edge at antenna terminals	Part 2.1051/ Part 24.238(a)	Part 24.238(b) &KDB 971168 D01v02r02	PASS
Spurious emissions at antenna terminals	Part 2.1051/ Part 2.1057/ Part 24.238(a)(b)	TIA-603-E-2016 &KDB 971168 D01v02r02	PASS
Field strength of spurious radiation	Part 2.1053 /Part 2.1057 / Part 24.238(a)(b)	TIA-603-E-2016 &KDB 971168 D01v02r02	PASS
Frequency stability	Part 2.1055/Part 24.235	TIA-603-E-2016 &KDB 971168 D01v02r02	PASS
FCC Part 27 (LTE Band 4,LTE Band 12,LTE Band 13)			
Conducted output power	Part 2.1046(a) /Part 27.50(d)	TIA-603-E-2016&KDB 971168 D01v03r01	PASS
Effective Radiated Power of Transmitter(EIRP)	Part 2.1046(a) / Part 27.50(d)	TIA-603-E-2016&KDB 971168 D01v03r01	PASS
peak-to-average ratio	Part 27.50(d)	KDB 971168 D01v03r01	PASS

99% & 26dB Occupied Bandwidth	Part 2.1049(h)	Part 27.53(h) &KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	Part 2.1051/ Part 27.53(h)	Part 27.53(h) &KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	Part 2.1051/ Part 27.53(h)	TIA-603-E-2016&KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	Part 2.1053/ Part 27.53(h)	TIA-603-E-2016&KDB 971168 D01v03r01	PASS
Frequency stability	Part 2.1055/Part 27.54	TIA-603-E-2016&KDB 971168 D01v03r01	PASS

Remark:

Tx: In this whole report Tx (or tx) means Transmitter.
 Rx: In this whole report Rx (or rx) means Receiver.
 RF: In this whole report RF means Radiated Frequency.
 CH: In this whole report CH means channel.
 Volt: In this whole report Volt means Voltage.
 Temp: In this whole report Temp means Temperature.
 Humid: In this whole report Humid means humidity.
 Press: In this whole report Press means Pressure.
 N/A: In this whole report not application


2 Content

1 TEST SUMMARY	2
2 CONTENT	4
3 TEST REQUIREMENT	5
3.1 TEST SETUP	5
3.1.1 <i>For Conducted test setup</i>	5
3.1.2 <i>For Radiated Emissions test setup</i>	5
3.2 TEST ENVIRONMENT	6
4 GENERAL INFORMATION	6
4.1 CLIENT INFORMATION	6
4.2 GENERAL DESCRIPTION OF EUT	6
4.3 DESCRIPTION OF SUPPORT UNITS	8
4.4 TEST LOCATION	8
4.5 DEVIATION FROM STANDARDS	8
4.6 ABNORMALITIES FROM STANDARD CONDITIONS	8
4.7 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
4.8 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	8
5 EQUIPMENT LIST	9
6 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	11
APPENDIX A) FIELD STRENGTH OF SPURIOUS RADIATION	12
7 PHOTOGRAPHS	43

3 Test Requirement

3.1 Test setup

3.1.1 For Conducted test setup

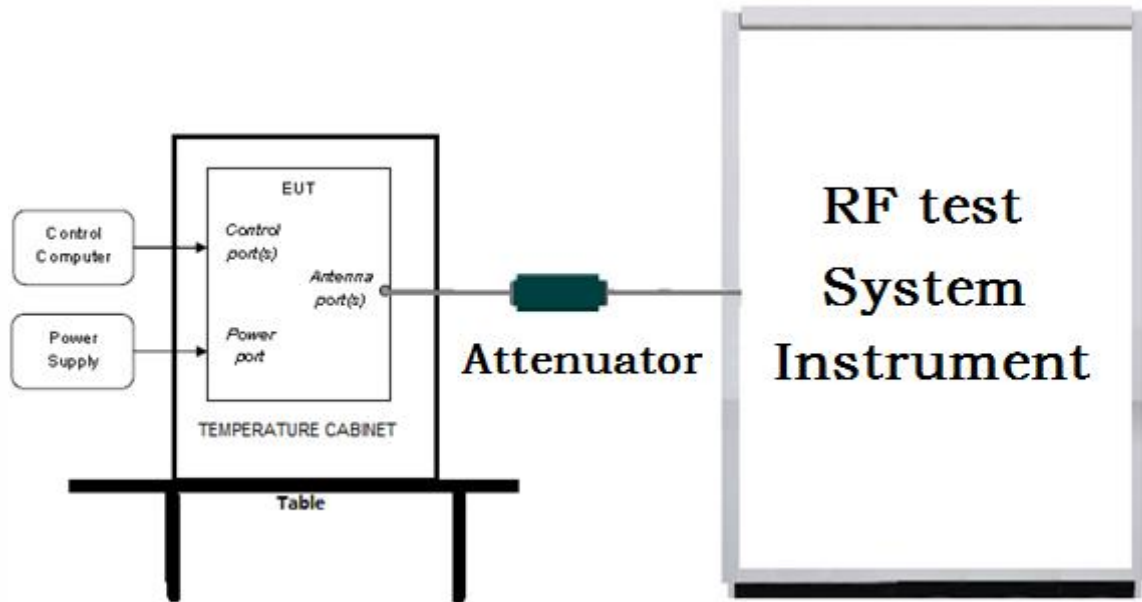

3.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

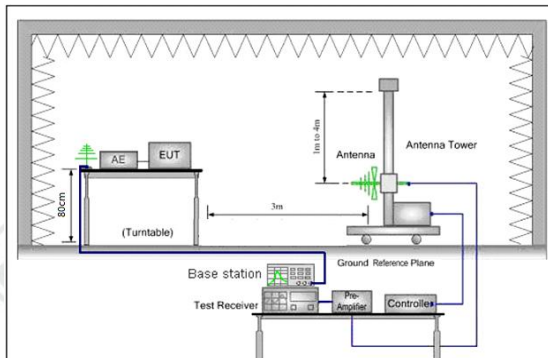


Figure 1. 30MHz to 1GHz

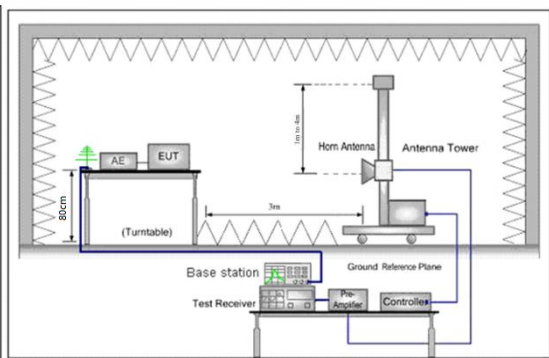


Figure 2. above 1GHz

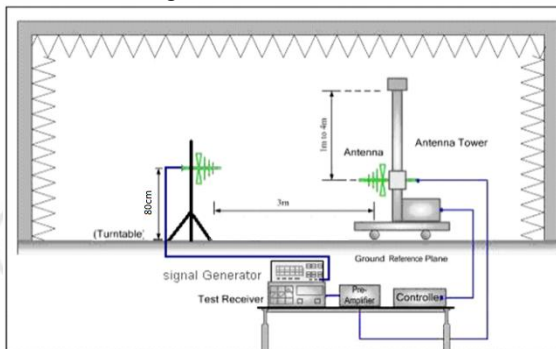


Figure 1. 30MHz to 1GHz

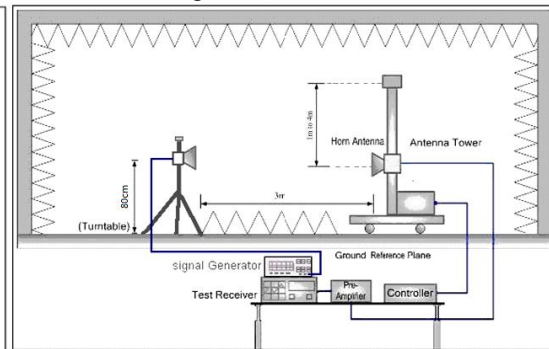


Figure 2. above 1GHz

3.2 Test Environment

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010mbar

4 General Information

4.1 Client Information

Applicant:	PETVORA HK LIMITED
Address of Applicant:	Room 1378, 13/F, Fook Cheong Building, 63 Hoi Yuen Road, Kwun Tong, Kowloon, Hong Kong
Manufacturer:	PETVORA HK LIMITED
Address of Manufacturer:	Room 1378, 13/F, Fook Cheong Building, 63 Hoi Yuen Road, Kwun Tong, Kowloon, Hong Kong
Factory:	Fengshun Luxshare Intelligent Manufacture Co.,Ltd.
Address of Factory:	1/F-3/F, Building 2, Standardized Plant, Lot 001-a, Ecological Industrial Zone, Fengshun County

4.2 General Description of EUT

Product Name:	PetVora Smart Collar Air		
Model No.:	PT1A		
Test Model No.:	PT1A		
Trade Mark:	PetVora		
Product Type:	☒ Mobile ☐ Portable ☐ Fix Location		
Frequency Band:	LTE: FDD band 2:UL:1850 – 1910MHz,DL: 1930 – 1990MHz; FDD band 4:UL:1710 – 1755MHz,DL: 2110 – 2155MHz; FDD band 5:UL:824 – 849MHz,DL: 869 – 894MHz; FDD band 12:UL:699 – 716MHz,DL: 729 – 746MHz; FDD band 13:UL:777 – 787MHz,DL: 746 – 756MHz;		
Modulation Type:	QPSK,16QAM,64QAM		
Antenna Type:	FPC Antenna		
Antenna Gain:	FDD band 2: 0.7 dBi FDD band 4: 0.7 dBi FDD band 5: -17.9 dBi FDD band 12: -17.9 dBi FDD band 13: -17.9 dBi		
Power Supply:	Battery:	DC 3.87V 850 mA	
	USB Port:	DC 5V	
Nominal Voltage(NV):	DC 3.87V		
Extreme Hige Voltage(HV):	DC 5.5V		
Extreme Low Voltage(LV):	DC 4.5V		

Sample Received Date:	Jun. 30, 2026
Sample tested Date:	Jun. 30, 2026 to Jul. 11, 2026

4.3 Description of Support Units

The EUT has been tested independently.

4.4 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164, Test Firm Registration No.: 260439

4.5 Deviation from Standards

None.

4.6 Abnormalities from Standard Conditions

None.

4.7 Other Information Requested by the Customer

None.

4.8 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

5 Equipment List

2G/3G/4G Communication RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	R&S	FSVS3044	101509	05-14-2026	05-13-2027
Signal Generator	Keysight	E8257D	MY53401106	11-25-2025	11-24-2026
Signal Generator	Agilent	E4438C	MY45095744	11-13-2025	11-12-2026
Communication test set	R&S	CMW500	102898	12-22-2026	12-21-2027
DC Power	Keysight	E3642A	MY54426035	11-13-2025	11-12-2026
RF control unit	JS Tonscend	JS0806-1	22G8060601	07-21-2025	07-20-2026
DC power Box	JS Tonscend	JS0806-4	158060007	---	---
Band Reject filter group	JS Tonscend	JS0806-F	806JSFX026805251008	---	---
high-low temperature test chamber	Dong Guang Qin Zhuo	LK-80GA	QZ20150611879	---	---
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	05-22-2026	05-21-2027
Automatic test software	JS Tonscend	JS1120	3.1.46	---	---
Communication test set	R&S	CMW500	120765	11-25-2025	11-24-2026
Digital multimeter	FLUKE	17B MAX	59545050WS	10-15-2025	10-14-2026

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Fully Anechoic Chamber	TDK	FAC-3	---	01-29-2024	01-28-2027
Receiver	Keysight	N9038A	MY57290136	12-22-2025	12-21-2026
Spectrum Analyzer	Keysight	N9020B	MY57111112	12-21-2025	12-20-2026
Spectrum Analyzer	Keysight	N9030B	MY57140871	12-21-2025	12-20-2026
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	03-29-2026	03-28-2027
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-03-2026	04-02-2027
Horn Antenna	ETS-LINDGREN	3117	57407	05-10-2026	05-09-2027
Preamplifier	EMCI	EMC001330	980563	02-06-2026	02-05-2027
Preamplifier	EMCI	EMC051845SE	980380	11-25-2025	11-24-2026
Preamplifier	Tonscend	TAP-011858	AP21B806112	07-07-2025 06-22-2026	07-06-2026 06-21-2027
Communication test set	R&S	CMW500	104466	11-25-2025	11-24-2026
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	03-24-2026	03-23-2027
RSE Automatic test software	JS Tonscend	JS36-RSE	V5.0.0.1	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	01-29-2024	01-28-2027
Cable line	Times	EMC104-NMNM-1000	SN160710	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	01-29-2024	01-28-2027
Cable line	Times	HF160-KMKM-3.00M	393493-0001	01-29-2024	01-28-2027

6 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	PART 22	PART 22 – PUBLIC MOBILE SERVICES Subpart H – Cellular Radiotelephone Service
2	PART 24	PART 24 – PERSONAL COMMUNICATIONS SERVICES Subpart E – Broadband PCS
3	PART 27	PART 27 – MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES Subpart C – Technical Standards
4	PART 2	Frequency allocations and radio treaty matters; general rules and regulations
5	TIA-603-E-2016	Land Mobile FM or PM -Communications Equipment -Measurement and Performance Standards
6	KDB971168 D01	KDB971168 D01 Power Meas License Digital Systems v02r02
7	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

Test Results List:

Test Method:		Test Descriptions &Test Conditions	Verdict	Note
ANSI C63.26-2015	Clause 5.2	RF output power		Note 1
		NT/NV	PASS	
ANSI C63.26-2015	Clause 5.4	99% & 26dB Occupied Bandwidth		Note 1
		NT/NV	PASS	
ANSI C63.26-2015	Clause 5.2	Peak to average power ratio		Note 1
		NT/NV	PASS	
ANSI C63.26-2015	Clause 5.5	Spurious emissions		Appendix A)
		NT/NV	PASS	
ANSI C63.26-2015	Clause 5.7	Spurious emissions at antenna terminals		Note 1
		NT/NV	PASS	
ANSI C63.26-2015	Clause 5.6	Frequency stability		Note 1
		NT/NV	PASS	
		LT/LV	PASS	
		LT/HV	PASS	
		HT/LV	PASS	
		HT/HV	PASS	

Note 1:

The test data please refer to

Appendix: LTE Band2 of EED32S813170,Appendix: LTE Band4 of EED32S813170,

Appendix: LTE Band5 of EED32S813170,Appendix: LTE Band12 of EED32S813170,

Appendix: LTE Band13 of EED32S813170

Appendix A) Field strength of spurious radiation


Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-30MHz	Peak	10kHz	30kHz	Peak
	30MHz-1GHz	Peak	120kHz	300kHz	Peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Measurement Procedure:	1. Scan up to 10th harmonic, find the maximum radiation frequency to measure. 2. The technique used to find the Spurious Emissions of the transmitter was the antenna substitution method. Substitution method was performed to determine the actual ERP/EIRP emission levels of the EUT. Test procedure as below: 1) The EUT was powered ON and placed on a 0.8m high table at a 3 meter fully Anechoic Chamber. The antenna of the transmitter was extended to its maximum length. modulation mode and the measuring receiver shall be tuned to the frequency of the transmitter under test. 2) The EUT was set 3 meters(above 18GHz the distance is 1 meter) away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3) The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. 4) Steps 1) to 3) were performed with the EUT and the receive antenna in both vertical and horizontal polarization. 5) The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter. 6) A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 3) is obtained for this set of conditions. 7) The output power into the substitution antenna was then measured. 8) Steps 6) and 7) were repeated with both antennas polarized. 9) Calculate power in dBm by the following formula: $\text{ERP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBd)}$ $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ $\text{EIRP} = \text{ERP} + 2.15\text{dB}$ where: Pg is the generator output power into the substitution antenna. 10) Test the EUT in the lowest channel, the middle channel the Highest channel 11) The radiation measurements are performed in X, Y, Z axis positioning for EUT operation mode, And found the X axis positioning which it is worse case. 12) Repeat above procedures until all frequencies measured was complete.				
Limit:	Attenuated at least 43+10log(P)				

Measurement Data:

Remark: Only the worst case data was recorded in the report.

Mode	LTE	Remark	\
Band	Band=2 BW=20MHz	Channel	18700

Test Graph

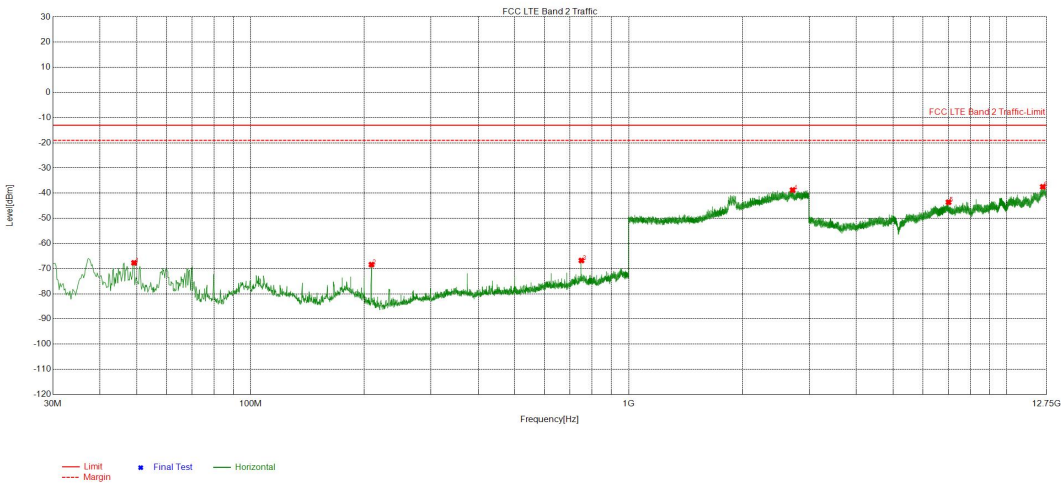


Suspected List

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	49.2098	150	48	-67.69	-13.00	54.69	PASS	Horizontal
2	208.9038	150	252	-68.39	-13.00	55.39	PASS	Horizontal
3	750.078	150	146	-66.75	-13.00	53.75	PASS	Horizontal
4	2714.3714	150	74	-38.75	-13.00	25.75	PASS	Horizontal
5	7013.7882	150	62	-43.59	-13.00	30.59	PASS	Horizontal
6	12454.5602	150	42	-37.47	-13.00	24.47	PASS	Horizontal

Mode	LTE	Remark	\
Band	Band=2 BW=20MHz	Channel	18700

Test Graph

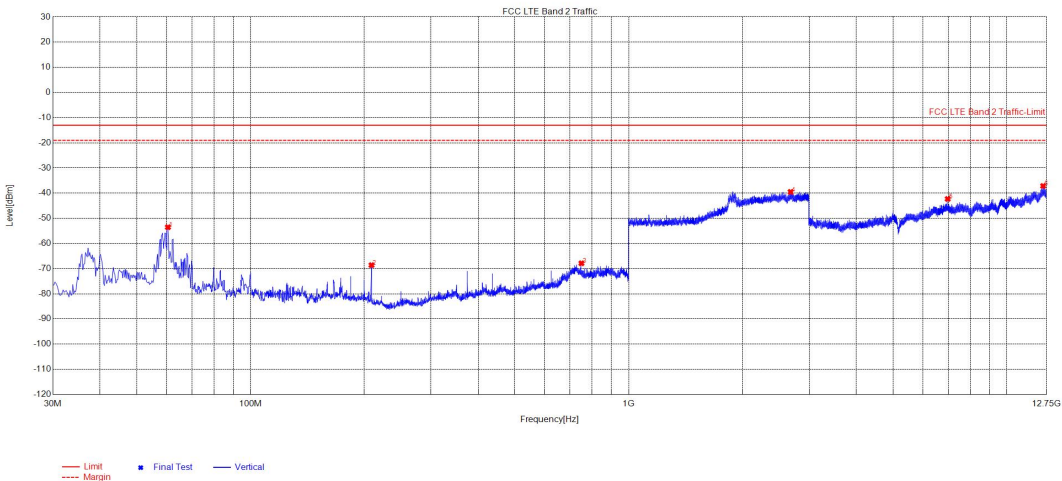


Suspected List

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.4641	150	227	-53.53	-13.00	40.53	PASS	Vertical
2	208.9038	150	227	-68.60	-13.00	55.60	PASS	Vertical
3	750.078	150	39	-67.86	-13.00	54.86	PASS	Vertical
4	2681.3681	150	173	-39.50	-13.00	26.50	PASS	Vertical
5	6979.6615	150	309	-42.29	-13.00	29.29	PASS	Vertical
6	12478.9364	150	2	-37.14	-13.00	24.14	PASS	Vertical

Mode	LTE	Remark	\
Band	Band=2 BW=20MHz	Channel	18900

Test Graph

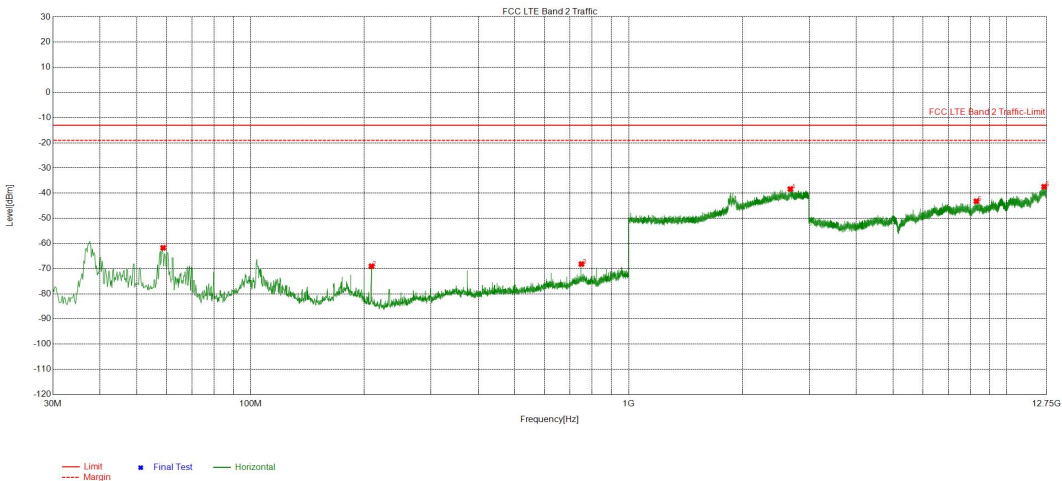


Suspected List

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	58.7177	150	93	-61.72	-13.00	48.72	PASS	Horizontal
2	208.9038	150	3	-69.02	-13.00	56.02	PASS	Horizontal
3	750.078	150	190	-68.16	-13.00	55.16	PASS	Horizontal
4	2676.5677	150	29	-38.37	-13.00	25.37	PASS	Horizontal
5	8309.1405	150	98	-43.21	-13.00	30.21	PASS	Horizontal
6	12558.4029	150	283	-37.41	-13.00	24.41	PASS	Horizontal

Mode	LTE	Remark	\
Band	Band=2 BW=20MHz	Channel	18900

Test Graph

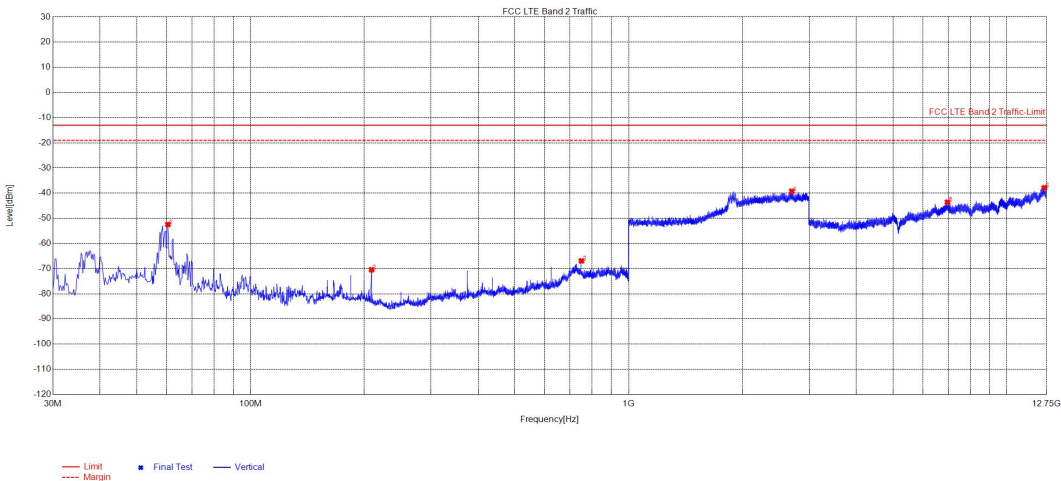


Suspected List

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.4641	150	324	-52.44	-13.00	39.44	PASS	Vertical
2	208.9038	150	271	-70.41	-13.00	57.41	PASS	Vertical
3	750.078	150	48	-66.91	-13.00	53.91	PASS	Vertical
4	2701.1701	150	298	-39.25	-13.00	26.25	PASS	Vertical
5	6969.4235	150	217	-43.59	-13.00	30.59	PASS	Vertical
6	12568.6409	150	301	-37.84	-13.00	24.84	PASS	Vertical

Mode	LTE	Remark	\
Band	Band=2 BW=20MHz	Channel	19100

Test Graph

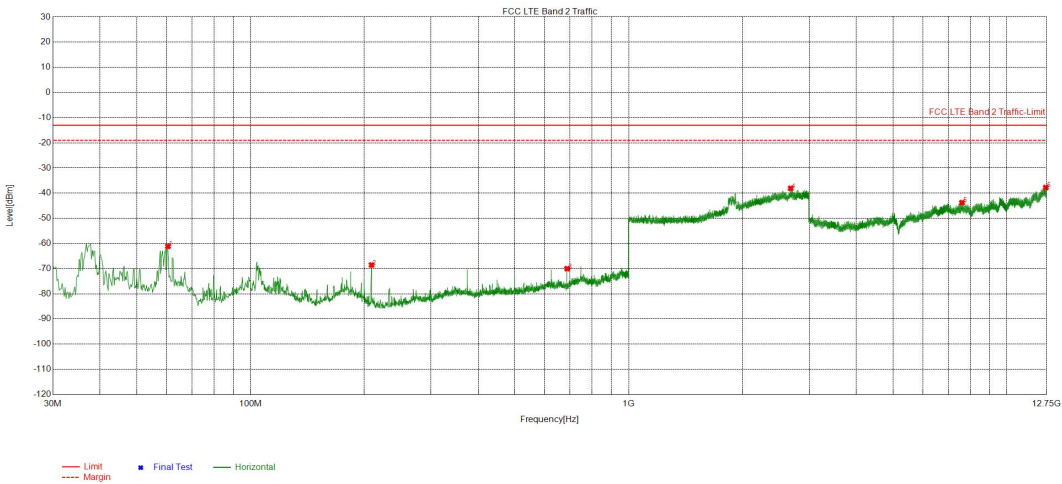


Suspected List

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.4641	150	262	-61.12	-13.00	48.12	PASS	Horizontal
2	208.9038	150	351	-68.53	-13.00	55.53	PASS	Horizontal
3	687.5975	150	30	-70.00	-13.00	57.00	PASS	Horizontal
4	2682.3682	150	343	-38.07	-13.00	25.07	PASS	Horizontal
5	7611.4931	150	26	-43.77	-13.00	30.77	PASS	Horizontal
6	12683.2092	150	300	-37.76	-13.00	24.76	PASS	Horizontal

Mode	LTE	Remark	\
Band	Band=2 BW=20MHz	Channel	19100

Test Graph

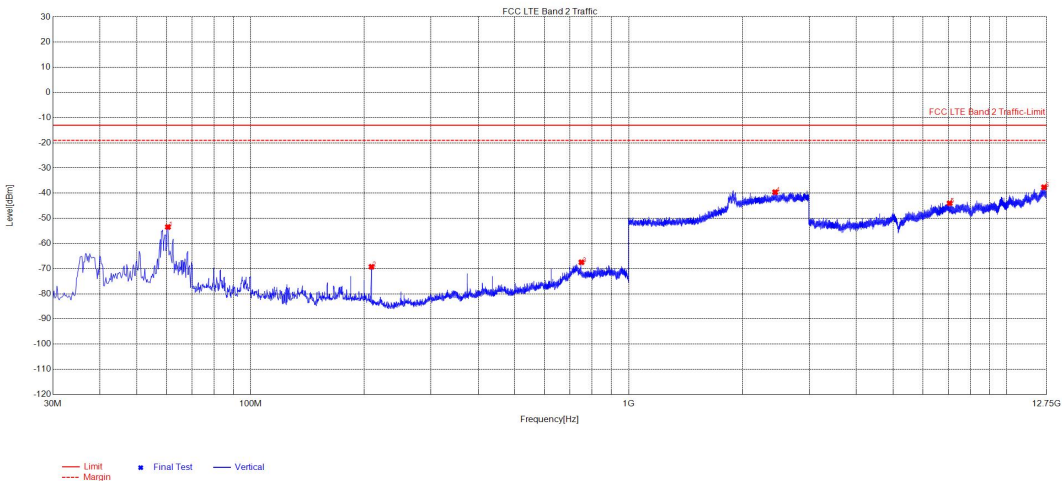


Suspected List

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.4641	150	110	-53.44	-13.00	40.44	PASS	Vertical
2	208.9038	150	3	-69.26	-13.00	56.26	PASS	Vertical
3	750.078	150	199	-67.46	-13.00	54.46	PASS	Vertical
4	2440.144	150	190	-39.61	-13.00	26.61	PASS	Vertical
5	7061.5656	150	61	-43.99	-13.00	30.99	PASS	Vertical
6	12548.1649	150	23	-37.65	-13.00	24.65	PASS	Vertical

Mode	LTE	Remark	\
Band	Band=4 BW=20MHz	Channel	20050

Test Graph

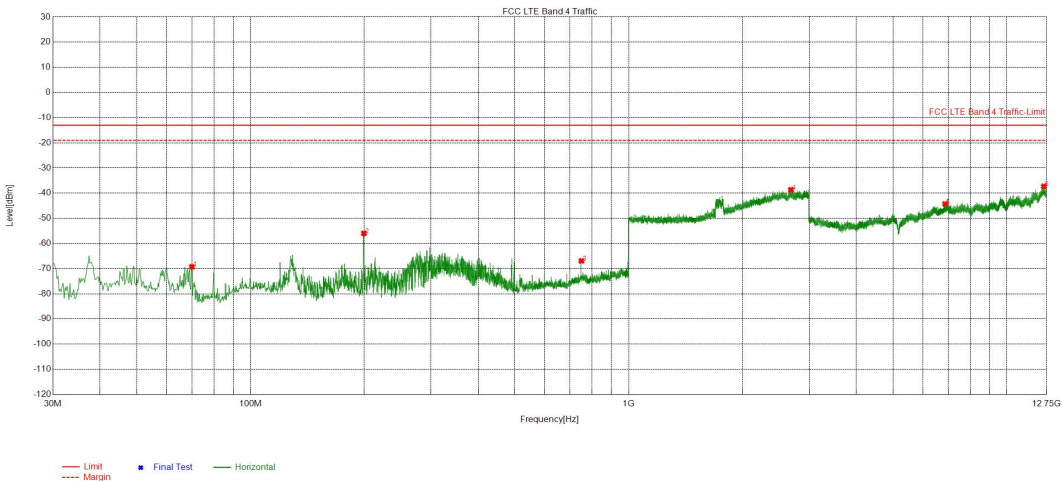


Suspected List

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	69.972	150	30	-69.28	-13.00	56.28	PASS	Horizontal
2	199.3959	150	199	-55.97	-13.00	42.97	PASS	Horizontal
3	750.078	150	262	-66.93	-13.00	53.93	PASS	Horizontal
4	2686.5687	150	282	-38.65	-13.00	25.65	PASS	Horizontal
5	6871.4311	150	220	-44.28	-13.00	31.28	PASS	Horizontal
6	12529.1515	150	203	-37.30	-13.00	24.30	PASS	Horizontal

Mode	LTE	Remark	\
Band	Band=4 BW=20MHz	Channel	20050

Test Graph

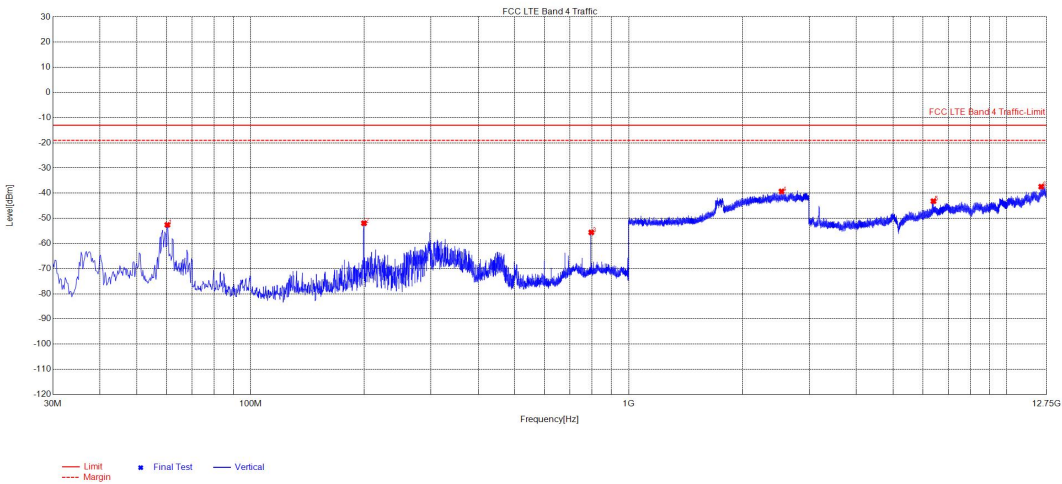


Suspected List

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.2701	150	86	-52.60	-13.00	39.60	PASS	Vertical
2	199.5899	150	172	-51.94	-13.00	38.94	PASS	Vertical
3	796.4533	150	136	-55.59	-13.00	42.59	PASS	Vertical
4	2537.3537	150	32	-39.30	-13.00	26.30	PASS	Vertical
5	6397.5574	150	76	-43.18	-13.00	30.18	PASS	Vertical
6	12337.5544	150	0	-37.42	-13.00	24.42	PASS	Vertical

Mode	LTE	Remark	\
Band	Band=4 BW=20MHz	Channel	20175

Test Graph

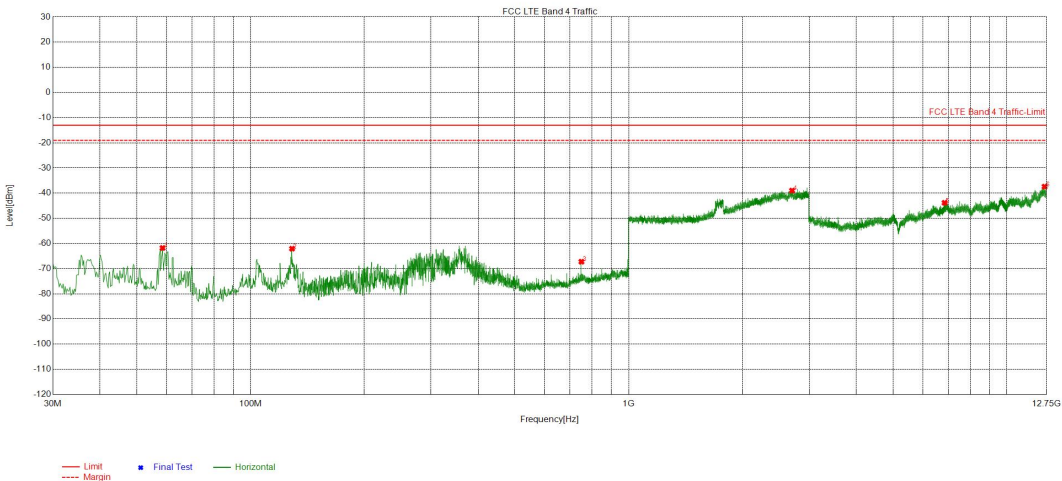


Suspected List

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	58.5237	150	162	-61.78	-13.00	48.78	PASS	Horizontal
2	128.7658	150	152	-62.05	-13.00	49.05	PASS	Horizontal
3	750.078	150	290	-67.23	-13.00	54.23	PASS	Horizontal
4	2704.9705	150	53	-38.97	-13.00	25.97	PASS	Horizontal
5	6848.5174	150	38	-43.84	-13.00	30.84	PASS	Horizontal
6	12588.6294	150	167	-37.39	-13.00	24.39	PASS	Horizontal

Mode	LTE	Remark	\
Band	Band=4 BW=20MHz	Channel	20175

Test Graph

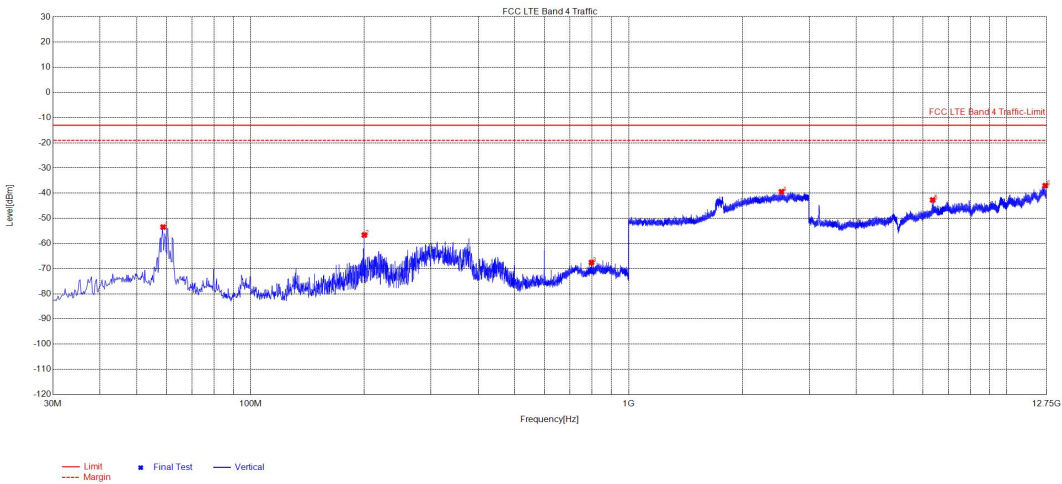


Suspected List

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	58.7177	150	252	-53.46	-13.00	40.46	PASS	Vertical
2	199.978	150	158	-56.62	-13.00	43.62	PASS	Vertical
3	797.4235	150	150	-67.53	-13.00	54.53	PASS	Vertical
4	2536.5537	150	93	-39.44	-13.00	26.44	PASS	Vertical
5	6368.3059	150	73	-42.69	-13.00	29.69	PASS	Vertical
6	12637.8694	150	272	-37.00	-13.00	24.00	PASS	Vertical

Mode	LTE	Remark	\
Band	Band=4 BW=20MHz	Channel	20300

Test Graph

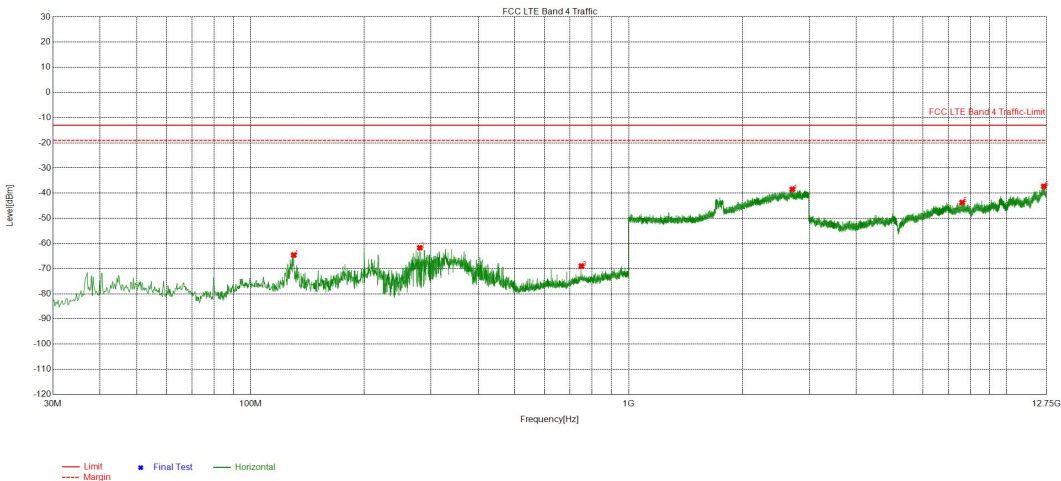


Suspected List

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	130.124	150	157	-64.58	-13.00	51.58	PASS	Horizontal
2	280.3101	150	167	-61.69	-13.00	48.69	PASS	Horizontal
3	750.078	150	94	-68.93	-13.00	55.93	PASS	Horizontal
4	2709.971	150	333	-38.44	-13.00	25.44	PASS	Horizontal
5	7619.781	150	243	-43.70	-13.00	30.70	PASS	Horizontal
6	12529.1515	150	109	-37.27	-13.00	24.27	PASS	Horizontal

Mode	LTE	Remark	\
Band	Band=4 BW=20MHz	Channel	20300

Test Graph

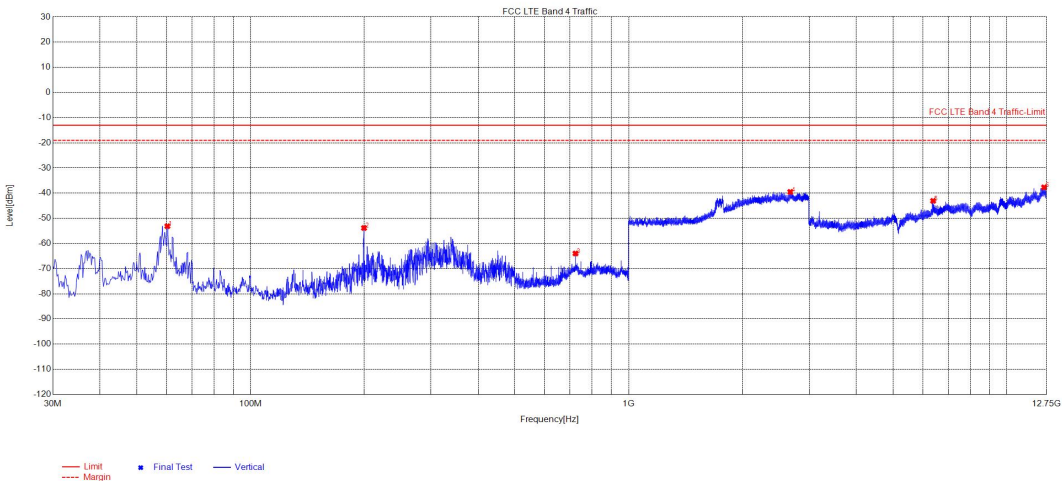


Suspected List

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.2701	150	62	-53.12	-13.00	40.12	PASS	Vertical
2	199.5899	150	62	-53.83	-13.00	40.83	PASS	Vertical
3	723.4947	150	3	-63.96	-13.00	50.96	PASS	Vertical
4	2675.5676	150	310	-39.50	-13.00	26.50	PASS	Vertical
5	6385.8568	150	14	-43.06	-13.00	30.06	PASS	Vertical
6	12553.5277	150	74	-37.69	-13.00	24.69	PASS	Vertical

Mode	LTE	Remark	\
Band	Band=5 BW=20MHz	Channel	20450

Test Graph

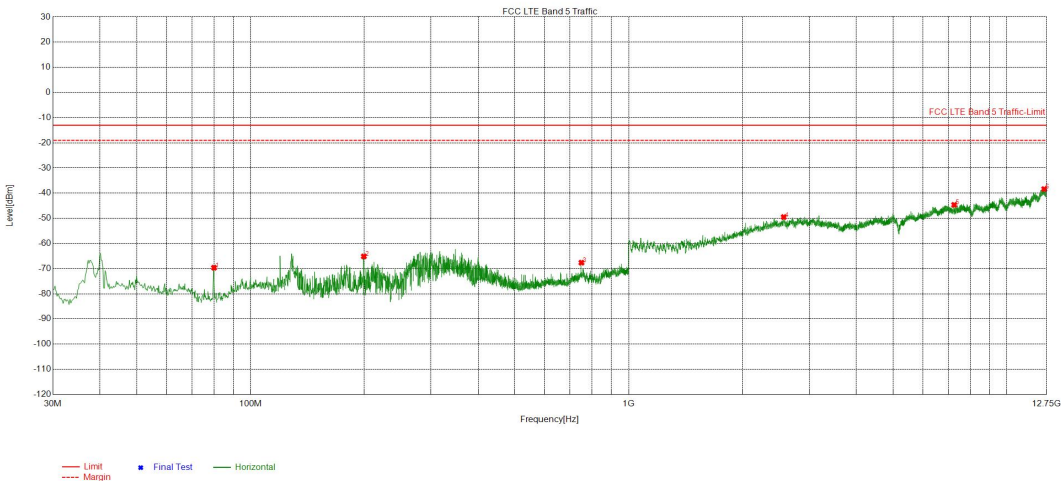


Suspected List

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	80.062	150	3	-69.63	-13.00	56.63	PASS	Horizontal
2	199.3959	150	40	-65.12	-13.00	52.12	PASS	Horizontal
3	750.078	150	292	-67.61	-13.00	54.61	PASS	Horizontal
4	2571.1321	150	12	-49.49	-13.00	36.49	PASS	Horizontal
5	7259.851	150	183	-44.64	-13.00	31.64	PASS	Horizontal
6	12561.9812	150	102	-38.36	-13.00	25.36	PASS	Horizontal

Mode	LTE	Remark	\
Band	Band=5 BW=20MHz	Channel	20450

Test Graph

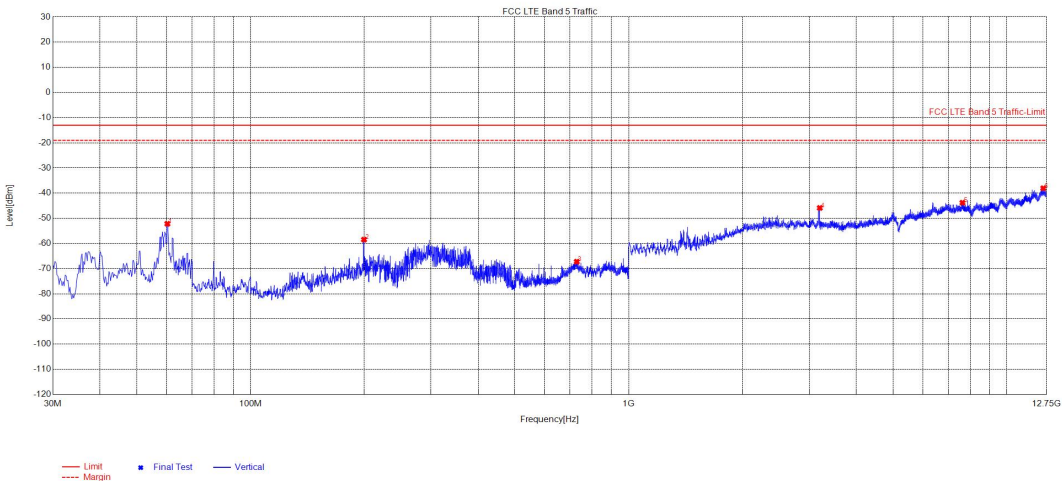


Suspected List

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.2701	150	0	-52.16	-13.00	39.16	PASS	Vertical
2	199.5899	150	248	-58.46	-13.00	45.46	PASS	Vertical
3	729.1218	150	196	-67.23	-13.00	54.23	PASS	Vertical
4	3202.1702	150	80	-45.87	-13.00	32.87	PASS	Vertical
5	7635.8886	150	0	-43.80	-13.00	30.80	PASS	Vertical
6	12492.6493	150	348	-38.04	-13.00	25.04	PASS	Vertical

Mode	LTE	Remark	\
Band	Band=5 BW=20MHz	Channel	20525

Test Graph

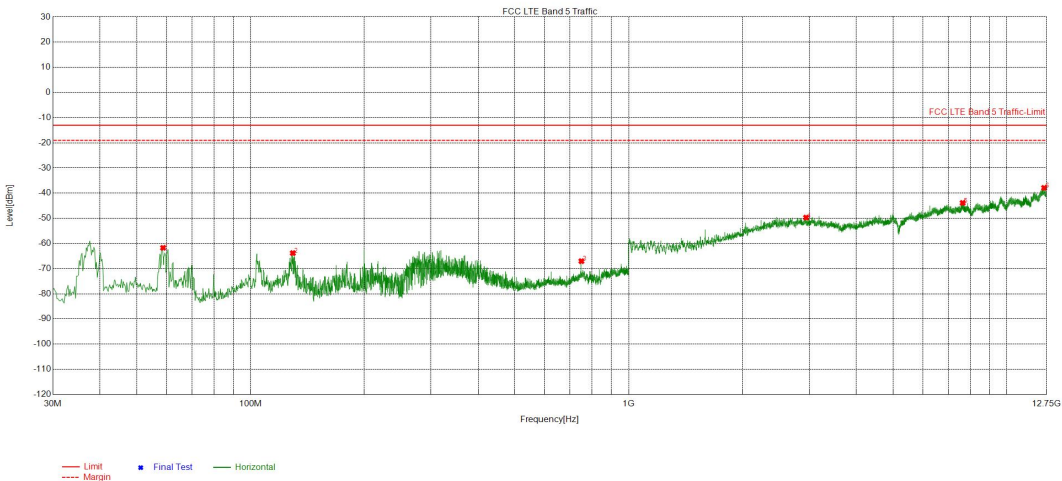


Suspected List

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	58.7177	150	355	-61.71	-13.00	48.71	PASS	Horizontal
2	129.3479	150	165	-63.81	-13.00	50.81	PASS	Horizontal
3	750.078	150	355	-67.02	-13.00	54.02	PASS	Horizontal
4	2945.9946	150	241	-49.70	-13.00	36.70	PASS	Horizontal
5	7647.6398	150	212	-43.87	-13.00	30.87	PASS	Horizontal
6	12556.1056	150	360	-37.89	-13.00	24.89	PASS	Horizontal

Mode	LTE	Remark	\
Band	Band=5 BW=20MHz	Channel	20525

Test Graph

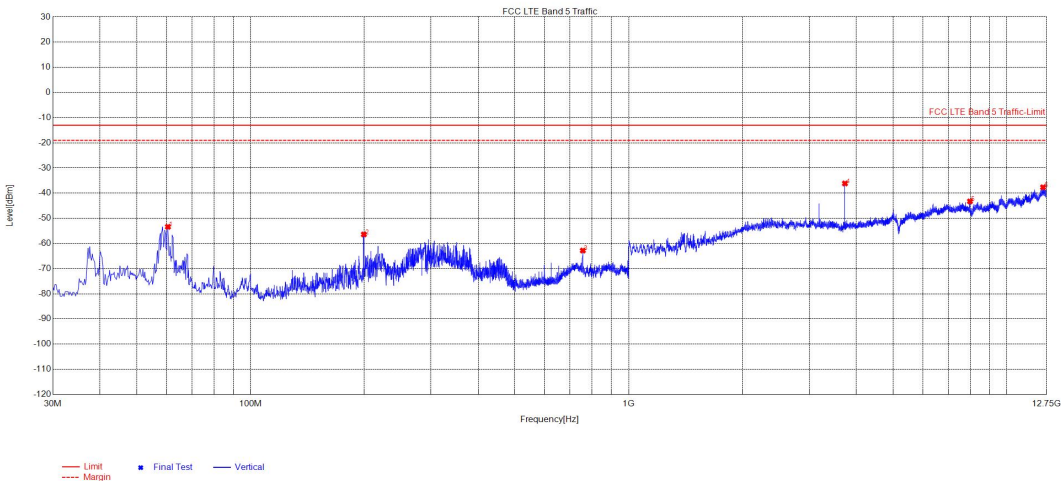


Suspected List

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.4641	150	0	-53.36	-13.00	40.36	PASS	Vertical
2	199.3959	150	102	-56.39	-13.00	43.39	PASS	Vertical
3	756.4813	150	102	-62.80	-13.00	49.80	PASS	Vertical
4	3733.3233	150	50	-36.14	-13.00	23.14	PASS	Vertical
5	7991.9492	150	40	-43.25	-13.00	30.25	PASS	Vertical
6	12475.0225	150	340	-37.66	-13.00	24.66	PASS	Vertical

Mode	LTE	Remark	\
Band	Band=5 BW=20MHz	Channel	20600

Test Graph

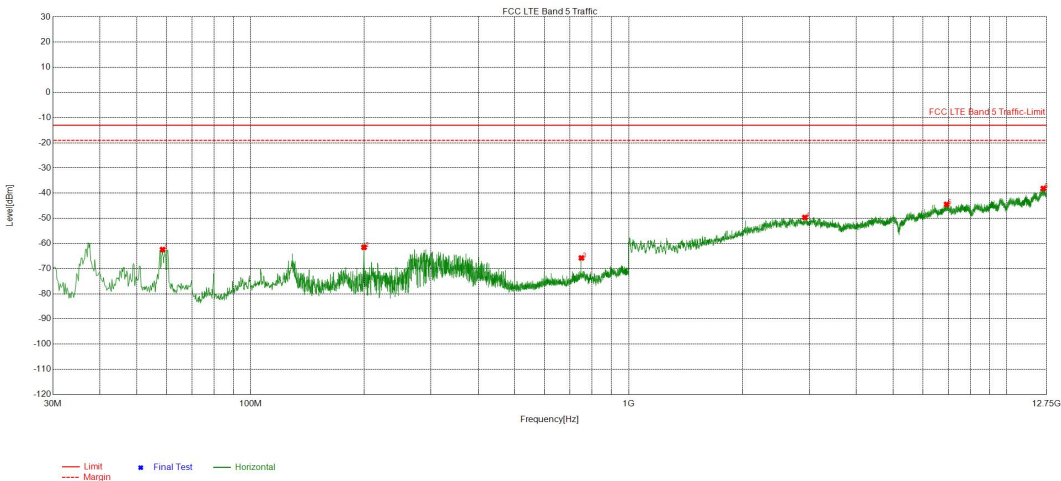

Suspected List

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	58.5237	150	228	-62.40	-13.00	49.40	PASS	Horizontal
2	199.5899	150	50	-61.51	-13.00	48.51	PASS	Horizontal
3	750.078	150	293	-65.73	-13.00	52.73	PASS	Horizontal
4	2924.8425	150	332	-49.65	-13.00	36.65	PASS	Horizontal
5	6935.5186	150	92	-44.46	-13.00	31.46	PASS	Horizontal
6	12497.3497	150	12	-38.13	-13.00	25.13	PASS	Horizontal