


Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11a at Channel 5745MHz Ant2		

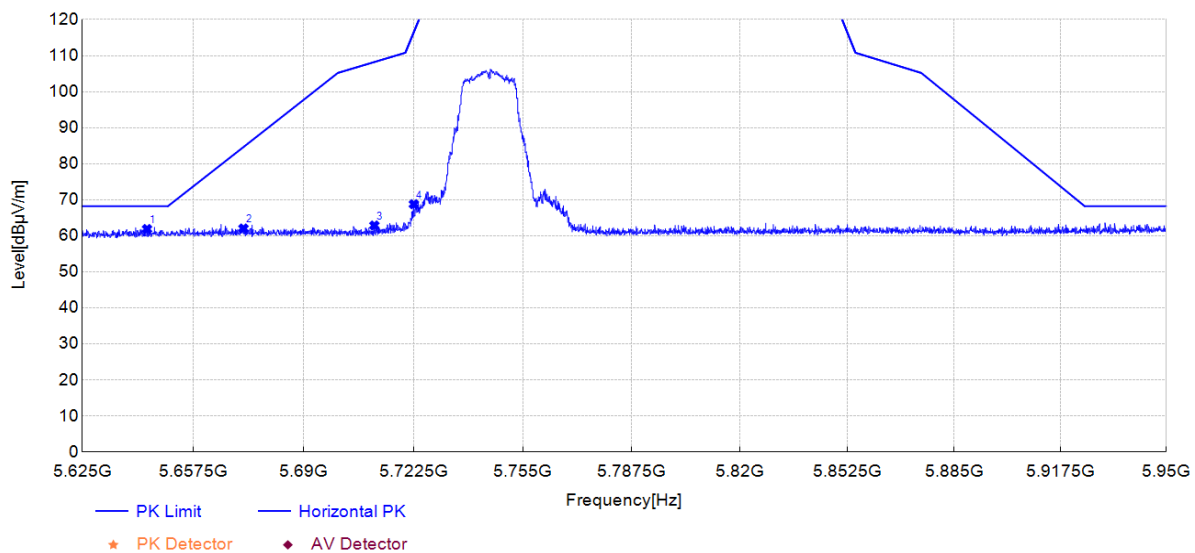


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5643.94	16.31	61.89	45.58	68.20	6.31	150	301	PK	Horizontal	PASS
2	5672.22	16.38	62.04	45.66	84.64	22.60	150	244	PK	Horizontal	PASS
3	5710.82	17.16	62.87	45.71	108.23	45.36	150	75	PK	Horizontal	PASS
4	5722.52	23.10	68.78	45.68	116.56	47.78	150	262	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

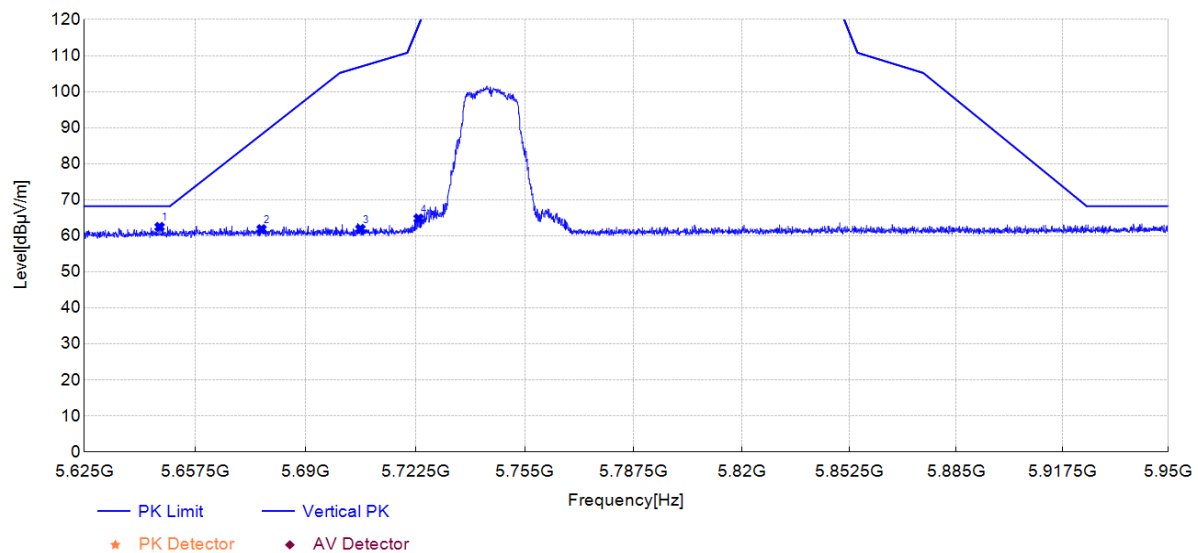


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5647.02	16.95	62.46	45.51	68.20	5.74	150	98	PK	Vertical	PASS
2	5676.93	16.22	61.84	45.62	88.13	26.29	150	268	PK	Vertical	PASS
3	5706.11	16.22	61.90	45.68	106.91	45.01	150	34	PK	Vertical	PASS
4	5723.34	19.15	64.80	45.65	118.41	53.61	150	275	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11a at Channel 5825MHz Ant1		

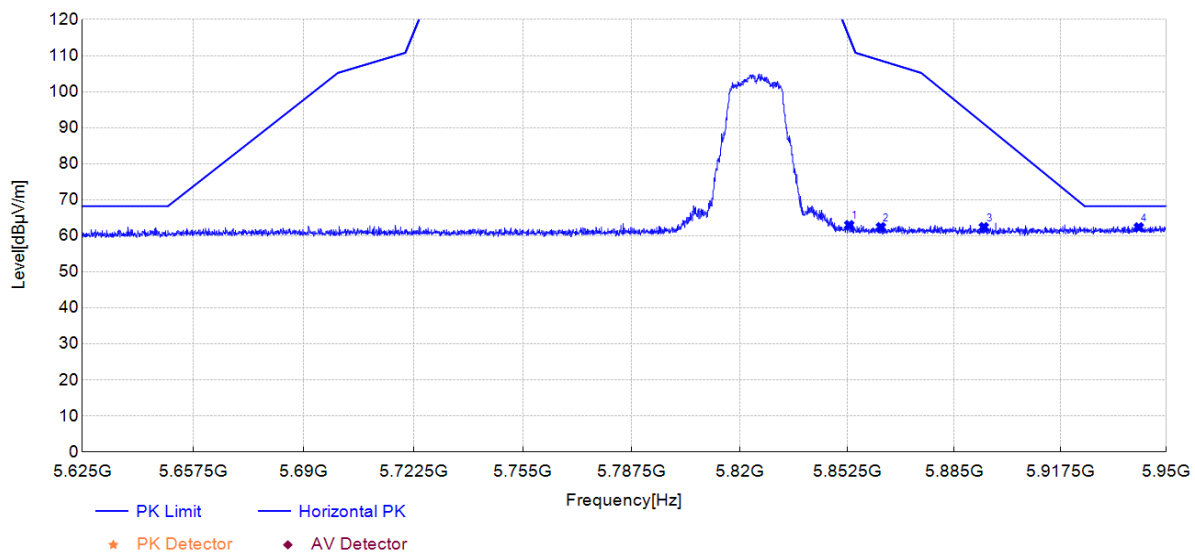


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5853.13	17.56	62.99	45.43	115.07	52.08	150	356	PK	Horizontal	PASS
2	5862.72	17.01	62.43	45.42	108.64	46.21	150	352	PK	Horizontal	PASS
3	5894.09	17.03	62.42	45.39	91.08	28.66	150	42	PK	Horizontal	PASS
4	5941.63	16.78	62.39	45.61	68.20	5.81	150	215	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

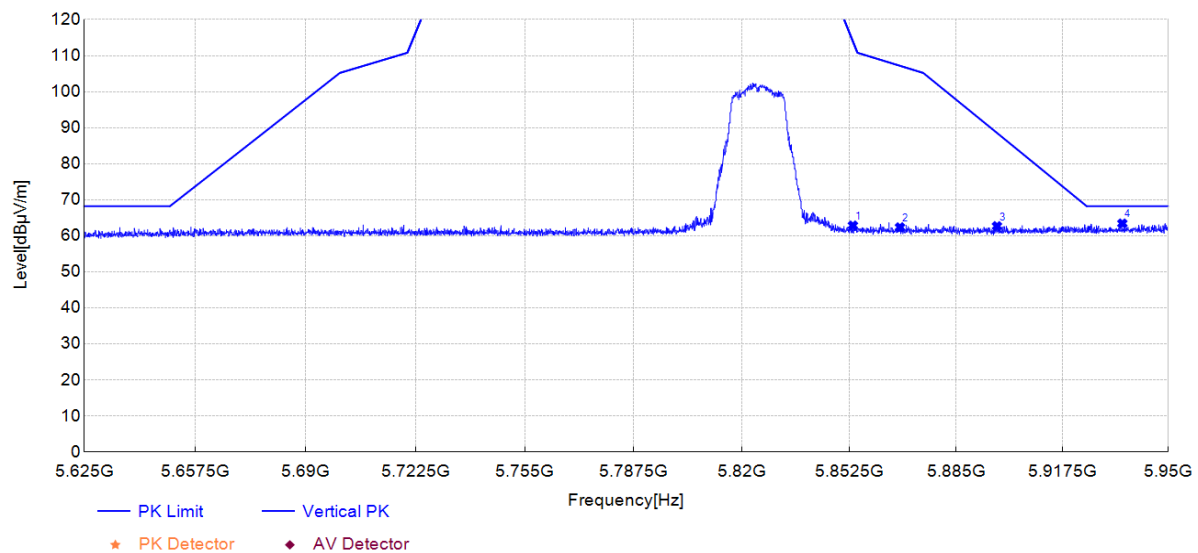


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5853.61	17.35	62.86	45.51	113.96	51.10	150	346	PK	Vertical	PASS
2	5867.92	16.86	62.37	45.51	107.18	44.81	150	87	PK	Vertical	PASS
3	5897.50	17.19	62.69	45.50	88.55	25.86	150	2	PK	Vertical	PASS
4	5935.94	17.71	63.43	45.72	68.20	4.77	150	105	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11a at Channel 5825MHz Ant2		

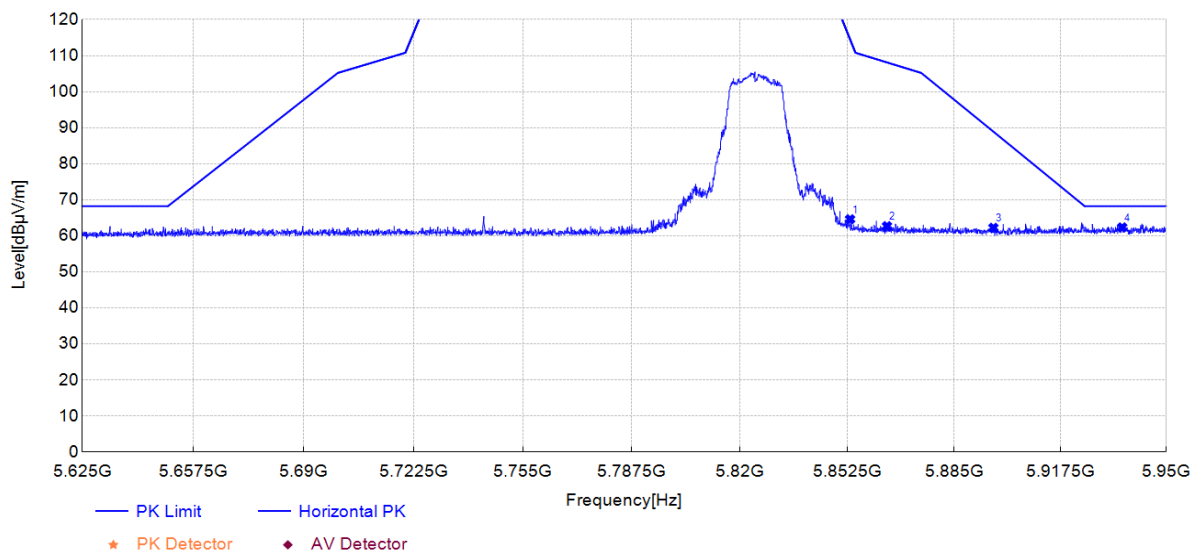


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5853.37	19.18	64.61	45.43	114.52	49.91	150	276	PK	Horizontal	PASS
2	5864.58	17.28	62.70	45.42	108.12	45.42	150	276	PK	Horizontal	PASS
3	5897.01	16.86	62.24	45.38	88.91	26.67	150	190	PK	Horizontal	PASS
4	5936.51	16.77	62.35	45.58	68.20	5.85	150	237	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

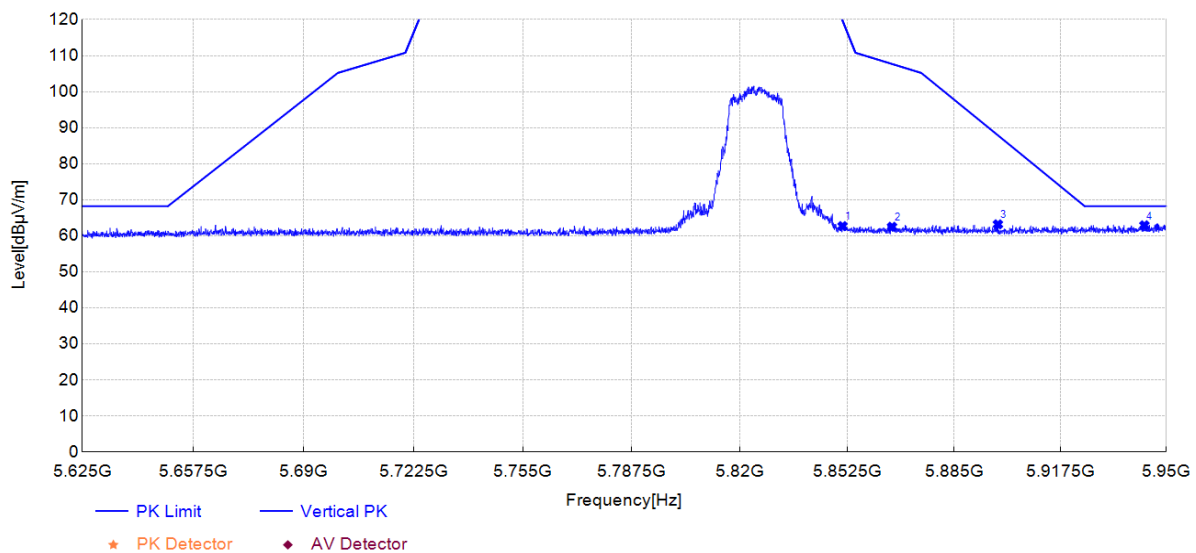


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5851.09	17.19	62.70	45.51	119.71	57.01	150	70	PK	Vertical	PASS
2	5866.13	17.00	62.51	45.51	107.68	45.17	150	41	PK	Vertical	PASS
3	5898.39	17.69	63.19	45.50	87.89	24.70	150	322	PK	Vertical	PASS
4	5943.34	17.13	62.91	45.78	68.20	5.29	150	123	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11n-HT20 at Channel 5745MHz MIMO		

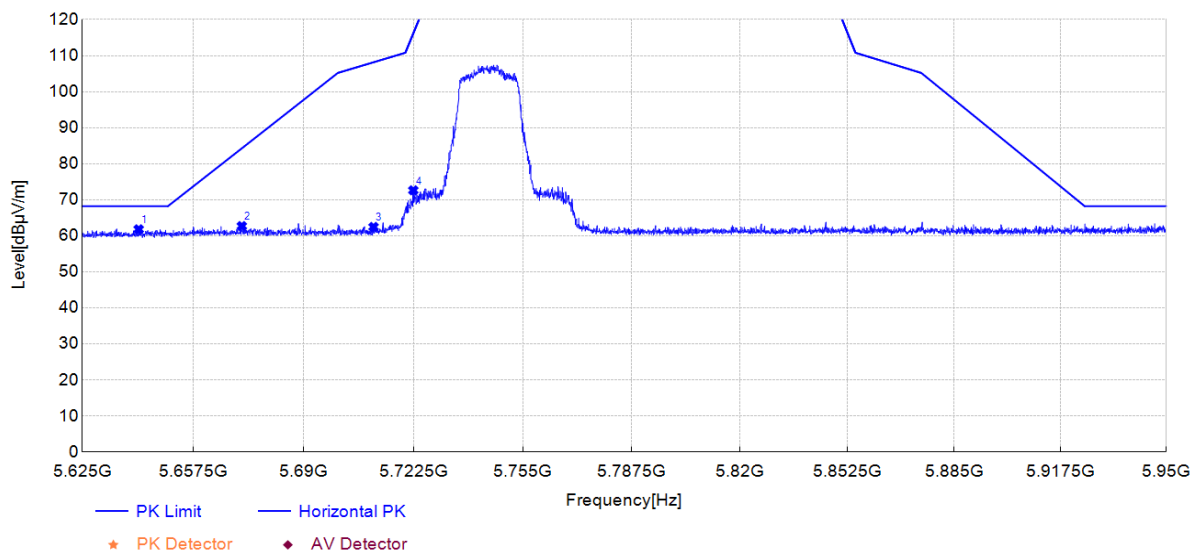


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5641.50	16.23	61.81	45.58	68.20	6.39	150	0	PK	Horizontal	PASS
2	5671.73	17.05	62.71	45.66	84.28	21.57	150	240	PK	Horizontal	PASS
3	5710.58	16.76	62.47	45.71	108.16	45.69	150	97	PK	Horizontal	PASS
4	5722.36	26.95	72.63	45.68	116.18	43.55	150	273	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

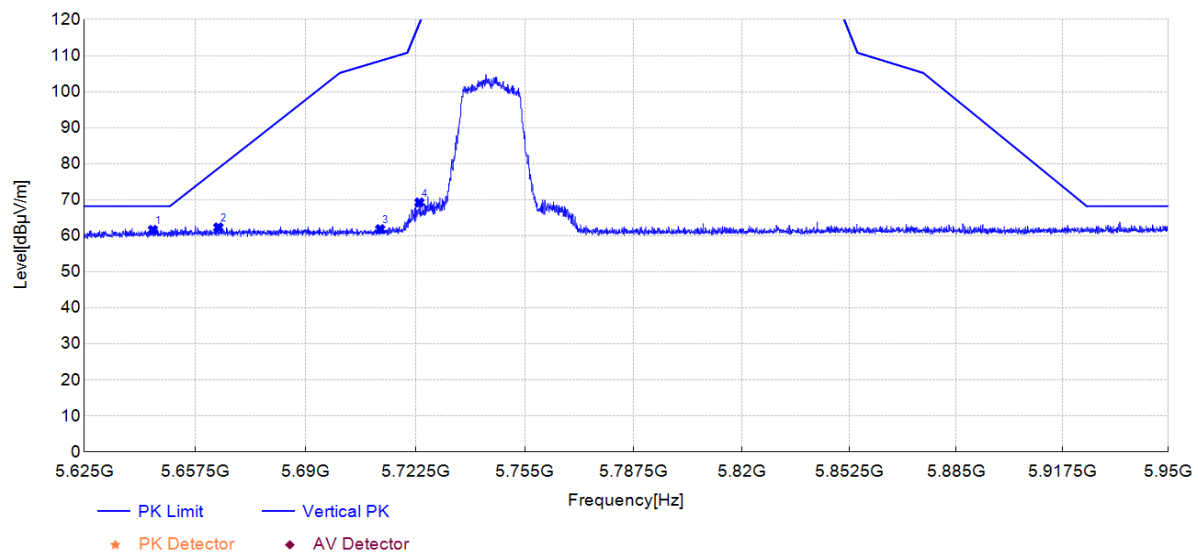


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5645.07	16.12	61.63	45.51	68.20	6.57	150	246	PK	Vertical	PASS
2	5664.25	16.77	62.34	45.57	78.75	16.41	150	34	PK	Vertical	PASS
3	5711.96	16.17	61.84	45.67	108.55	46.71	150	308	PK	Vertical	PASS
4	5723.58	23.61	69.26	45.65	118.96	49.70	150	224	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11n-HT20 at Channel 5825MHz MIMO		

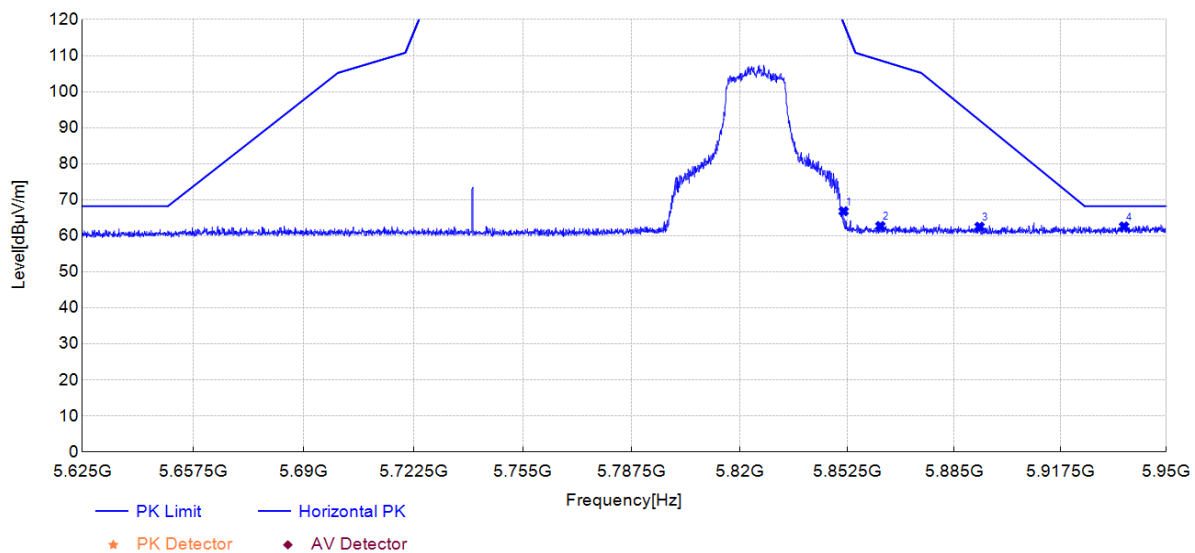


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5851.42	21.39	66.82	45.43	118.96	52.14	150	276	PK	Horizontal	PASS
2	5862.55	17.30	62.72	45.42	108.69	45.97	150	343	PK	Horizontal	PASS
3	5892.79	17.14	62.53	45.39	92.04	29.51	150	76	PK	Horizontal	PASS
4	5937.08	17.02	62.60	45.58	68.20	5.60	150	171	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

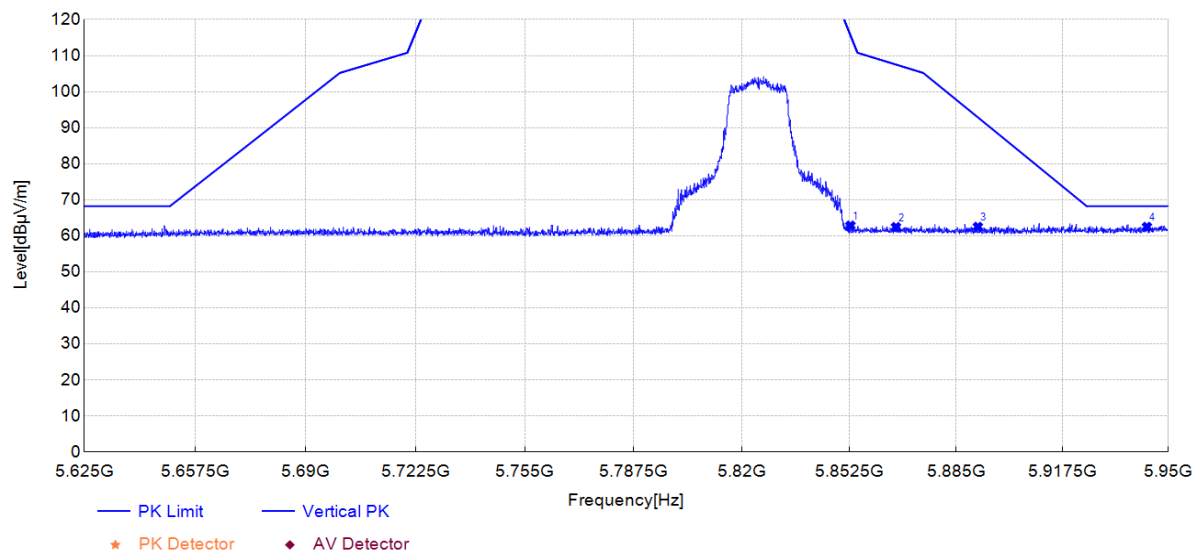


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5852.88	17.35	62.86	45.51	115.63	52.77	150	130	PK	Vertical	PASS
2	5866.70	16.94	62.45	45.51	107.52	45.07	150	185	PK	Vertical	PASS
3	5891.65	17.02	62.52	45.50	92.88	30.36	150	57	PK	Vertical	PASS
4	5943.50	16.73	62.51	45.78	68.20	5.69	150	1	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11n-HT40 at Channel 5755MHz MIMO		

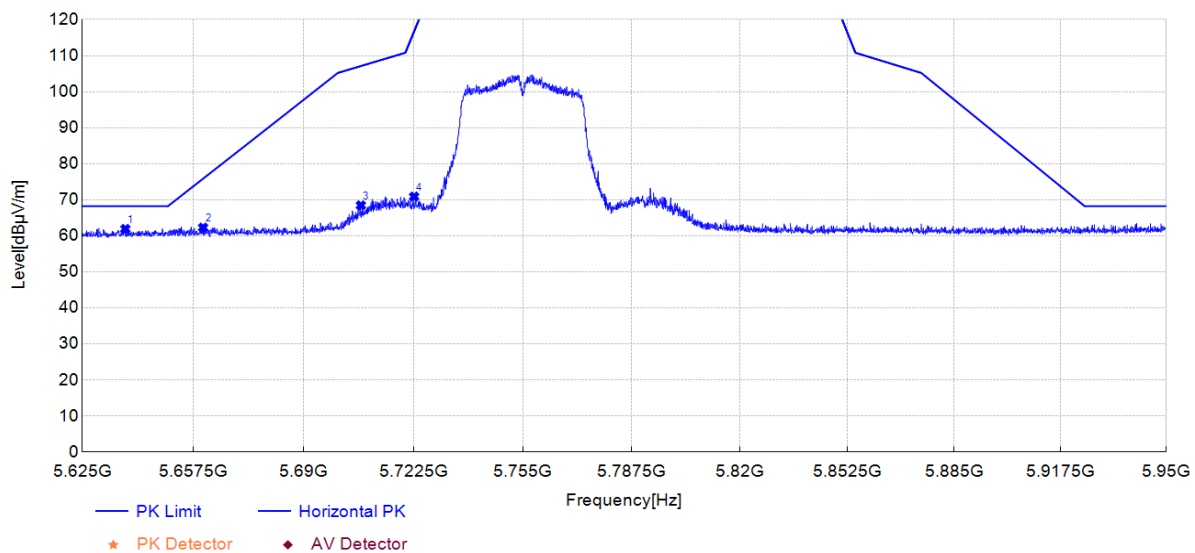


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5637.60	16.34	61.91	45.57	68.20	6.29	150	50	PK	Horizontal	PASS
2	5660.35	16.65	62.28	45.63	75.86	13.58	150	304	PK	Horizontal	PASS
3	5706.84	22.74	68.45	45.71	107.11	38.66	150	273	PK	Horizontal	PASS
4	5722.61	25.21	70.89	45.68	116.74	45.85	150	261	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

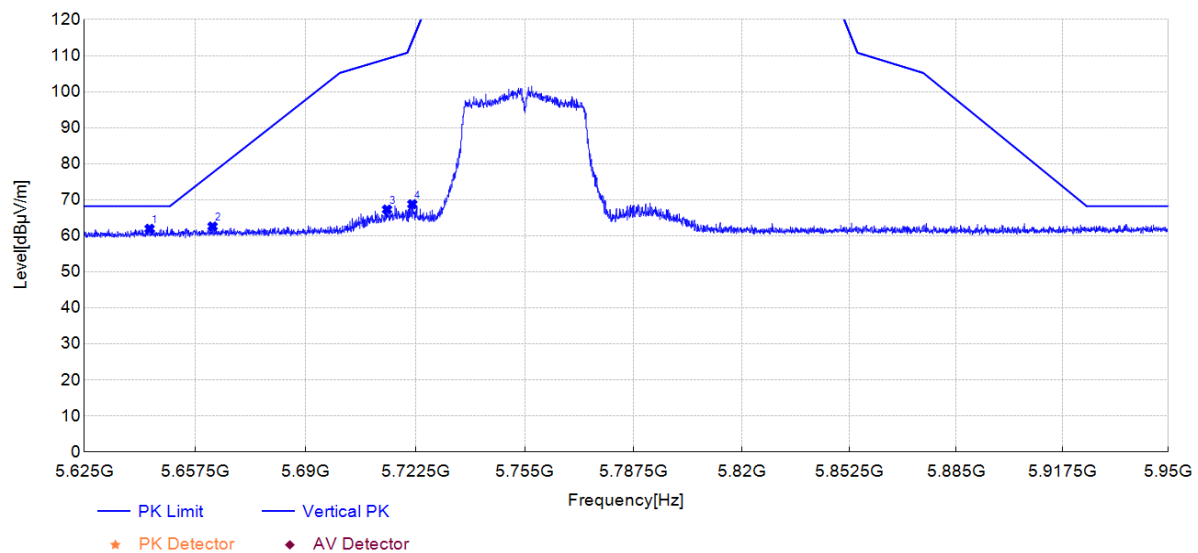


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5644.10	16.46	61.96	45.50	68.20	6.24	150	290	PK	Vertical	PASS
2	5662.55	17.04	62.61	45.57	77.48	14.87	150	217	PK	Vertical	PASS
3	5713.99	21.63	67.30	45.67	109.12	41.82	150	272	PK	Vertical	PASS
4	5721.47	23.12	68.77	45.65	114.15	45.38	150	272	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11n-HT40 at Channel 5795MHz MIMO		

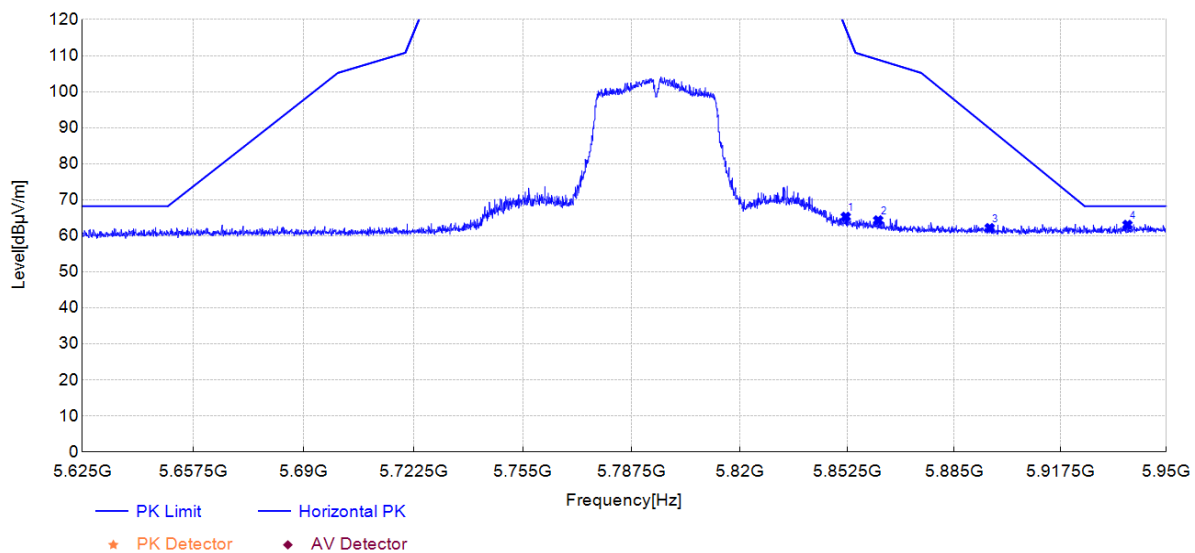


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5852.07	19.86	65.29	45.43	117.48	52.19	150	352	PK	Horizontal	PASS
2	5861.90	18.89	64.31	45.42	108.87	44.56	150	28	PK	Horizontal	PASS
3	5895.87	16.79	62.17	45.38	89.75	27.58	150	85	PK	Horizontal	PASS
4	5938.13	17.47	63.06	45.59	68.20	5.14	150	248	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

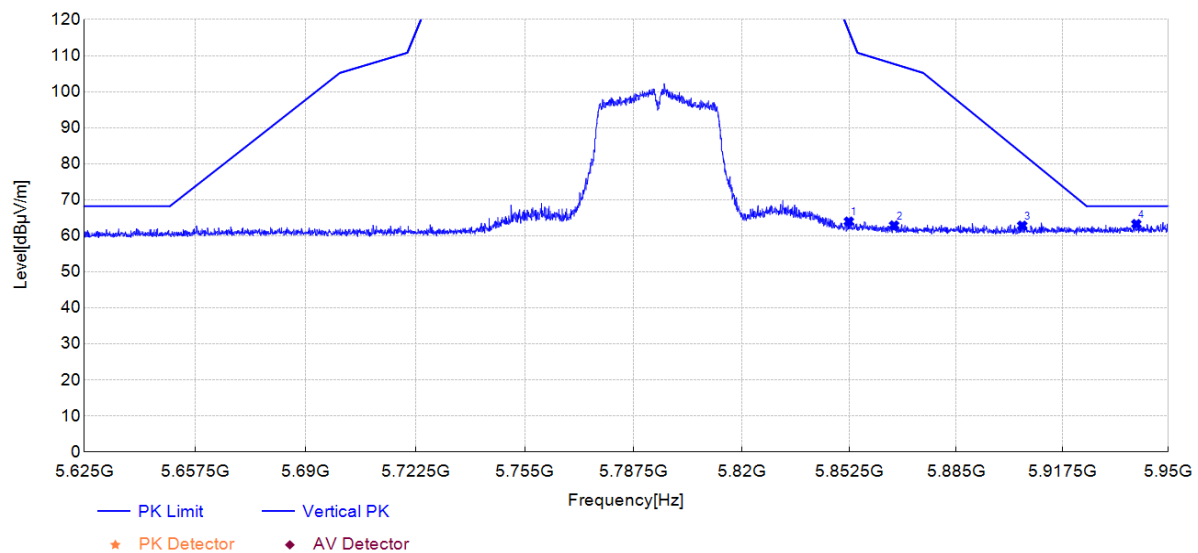


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5852.39	18.47	63.98	45.51	116.74	52.76	150	267	PK	Vertical	PASS
2	5866.13	17.38	62.89	45.51	107.68	44.79	150	292	PK	Vertical	PASS
3	5905.22	17.30	62.83	45.53	82.84	20.01	150	41	PK	Vertical	PASS
4	5940.25	17.53	63.28	45.75	68.20	4.92	150	292	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11ac-VHT20 at Channel 5745MHz MIMO		

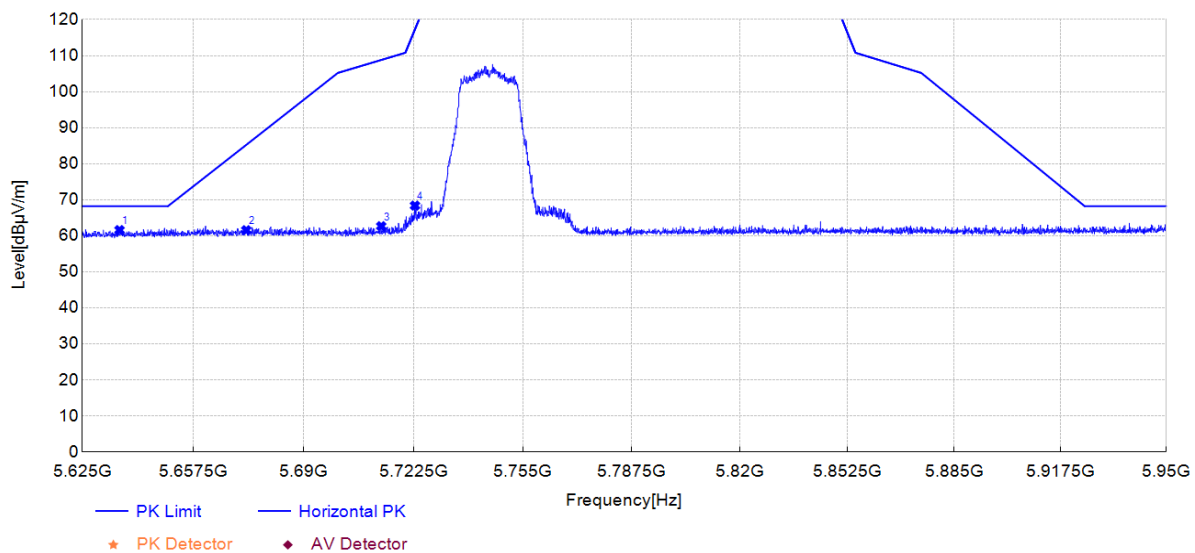


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5635.89	16.04	61.60	45.56	68.20	6.60	150	18	PK	Horizontal	PASS
2	5673.03	15.91	61.57	45.66	85.24	23.67	150	192	PK	Horizontal	PASS
3	5712.85	16.98	62.68	45.70	108.80	46.12	150	358	PK	Horizontal	PASS
4	5722.85	22.71	68.39	45.68	117.30	48.91	150	269	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

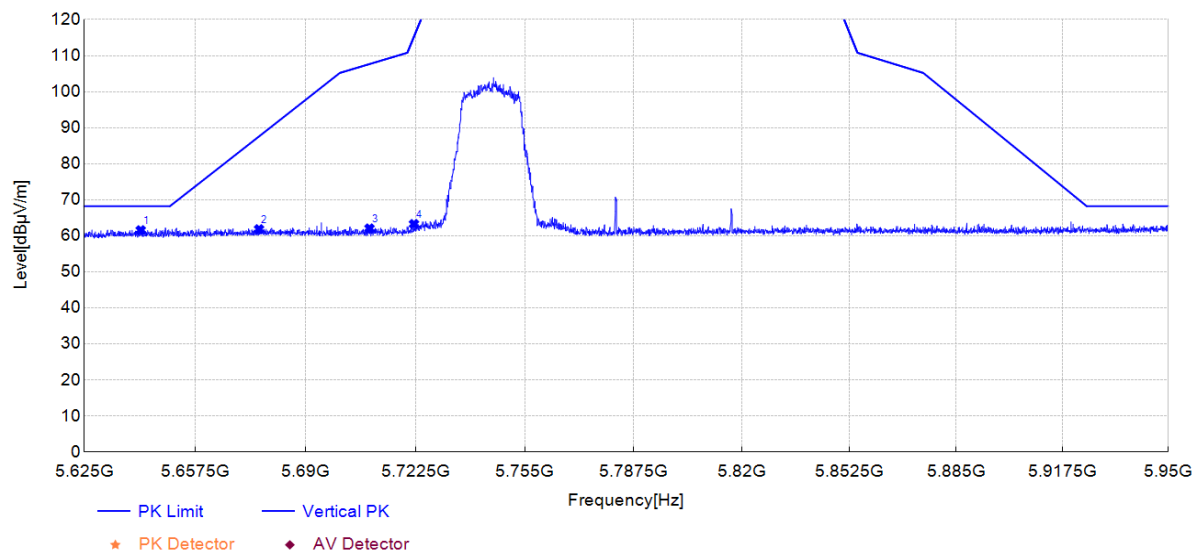


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5641.50	16.07	61.56	45.49	68.20	6.64	150	259	PK	Vertical	PASS
2	5676.20	16.23	61.84	45.61	87.59	25.75	150	103	PK	Vertical	PASS
3	5708.79	16.38	62.06	45.68	107.66	45.60	150	255	PK	Vertical	PASS
4	5721.96	17.63	63.28	45.65	115.26	51.98	150	295	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11ac-VHT20 at Channel 5825MHz MIMO		

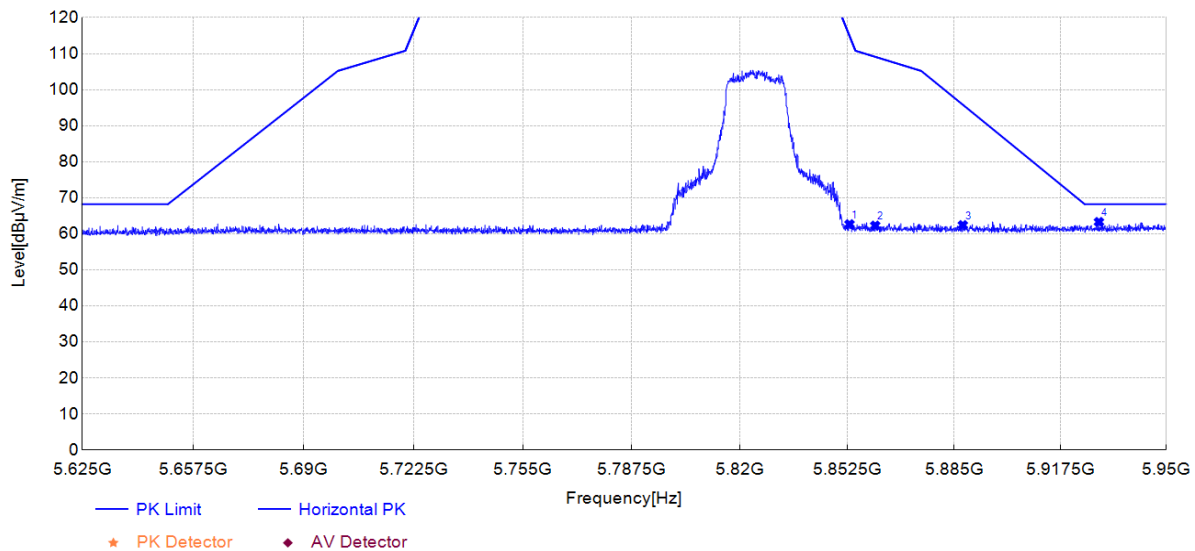


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5853.21	17.24	62.67	45.43	114.89	52.22	150	268	PK	Horizontal	PASS
2	5861.01	16.86	62.29	45.43	109.12	46.83	150	282	PK	Horizontal	PASS
3	5887.67	17.03	62.42	45.39	95.83	33.41	150	104	PK	Horizontal	PASS
4	5929.36	17.75	63.29	45.54	68.20	4.91	150	217	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

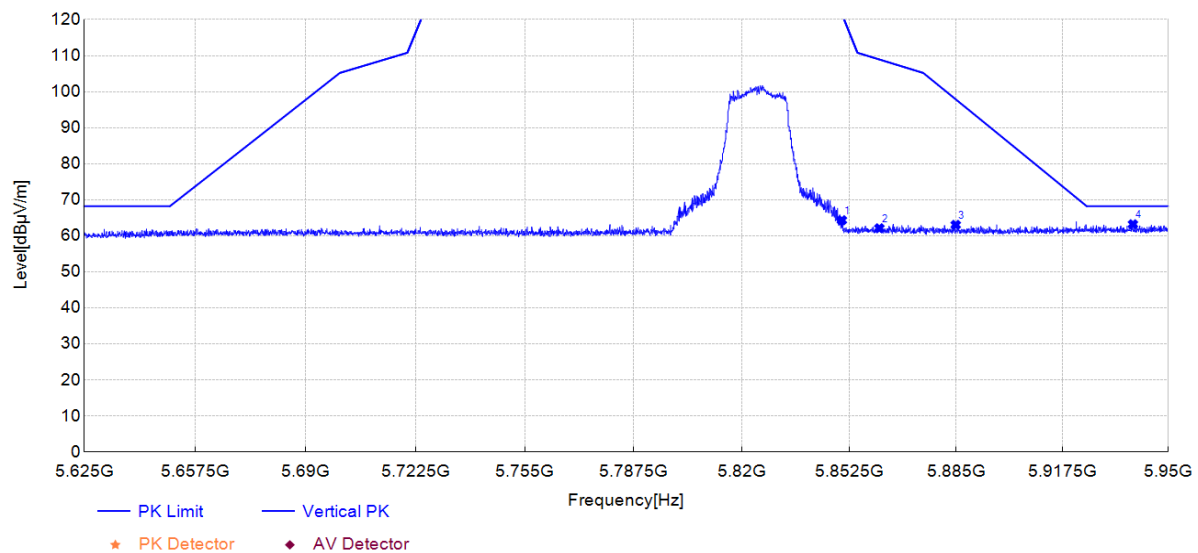


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5850.28	18.82	64.33	45.51	121.56	57.23	150	183	PK	Vertical	PASS
2	5861.66	16.59	62.10	45.51	108.94	46.84	150	29	PK	Vertical	PASS
3	5884.90	17.54	63.04	45.50	97.87	34.83	150	86	PK	Vertical	PASS
4	5939.19	17.47	63.21	45.74	68.20	4.99	150	37	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11ac-VHT40 at Channel 5755MHz MIMO		

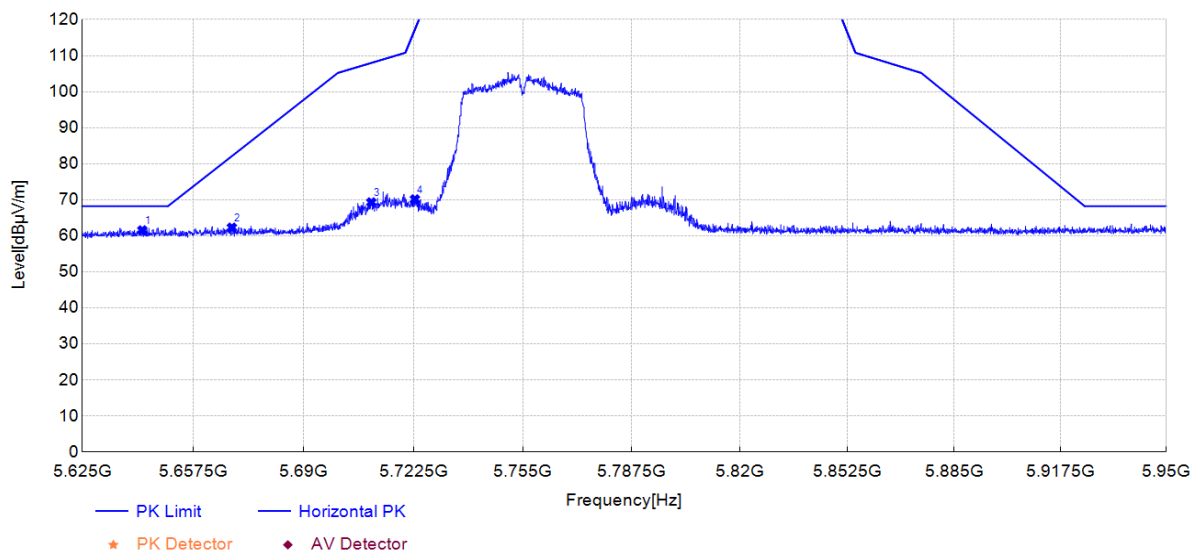


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5642.55	15.96	61.54	45.58	68.20	6.66	150	180	PK	Horizontal	PASS
2	5668.80	16.65	62.30	45.65	82.12	19.82	150	234	PK	Horizontal	PASS
3	5709.93	23.59	69.30	45.71	107.98	38.68	150	281	PK	Horizontal	PASS
4	5722.85	24.46	70.14	45.68	117.30	47.16	150	274	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

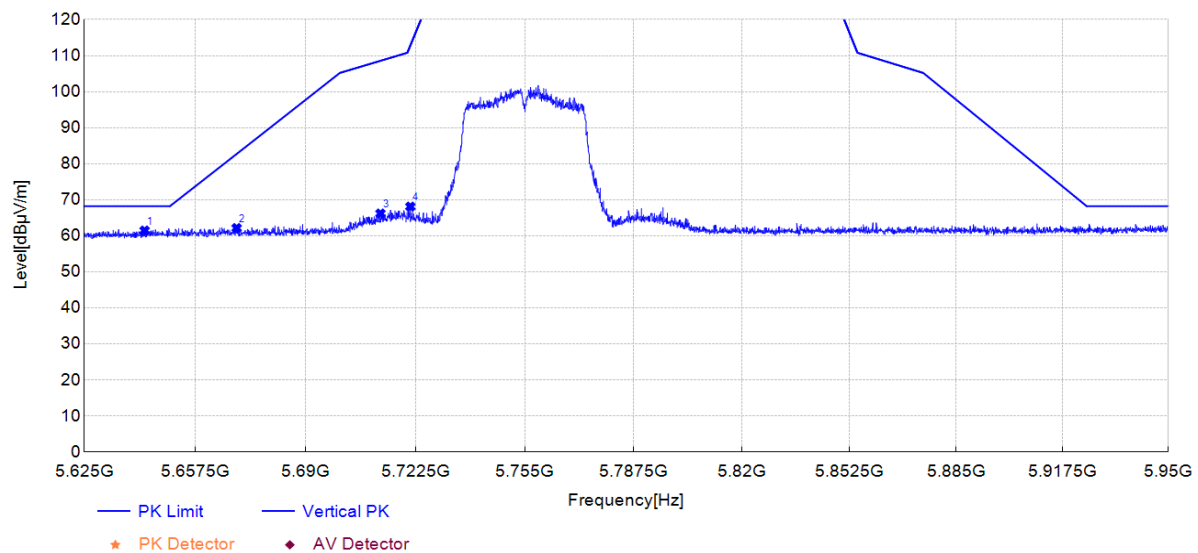


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5642.64	15.97	61.47	45.50	68.20	6.73	150	71	PK	Vertical	PASS
2	5669.62	16.58	62.16	45.58	82.72	20.56	150	274	PK	Vertical	PASS
3	5712.04	20.53	66.20	45.67	108.57	42.37	150	230	PK	Vertical	PASS
4	5720.90	22.46	68.11	45.65	112.85	44.74	150	292	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11ac-VHT40 at Channel 5795MHz MIMO		

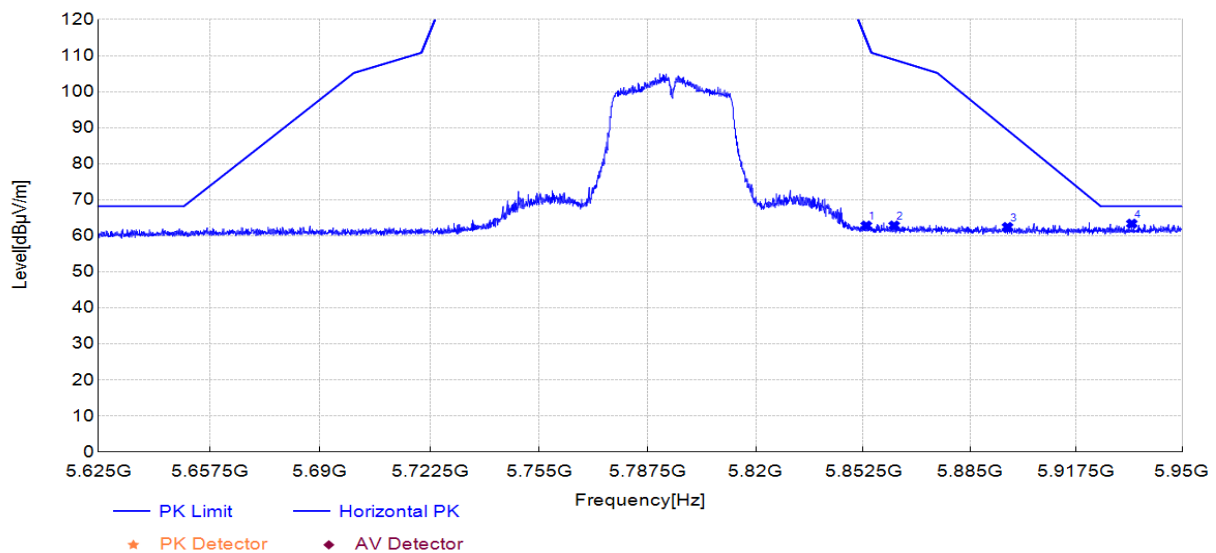


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5853.45	17.40	62.83	45.43	114.33	51.50	150	256	PK	Horizontal	PASS
2	5861.90	17.43	62.85	45.42	108.87	46.02	150	303	PK	Horizontal	PASS
3	5896.44	17.07	62.45	45.38	89.33	26.88	150	169	PK	Horizontal	PASS
4	5934.56	17.80	63.37	45.57	68.20	4.83	150	2	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

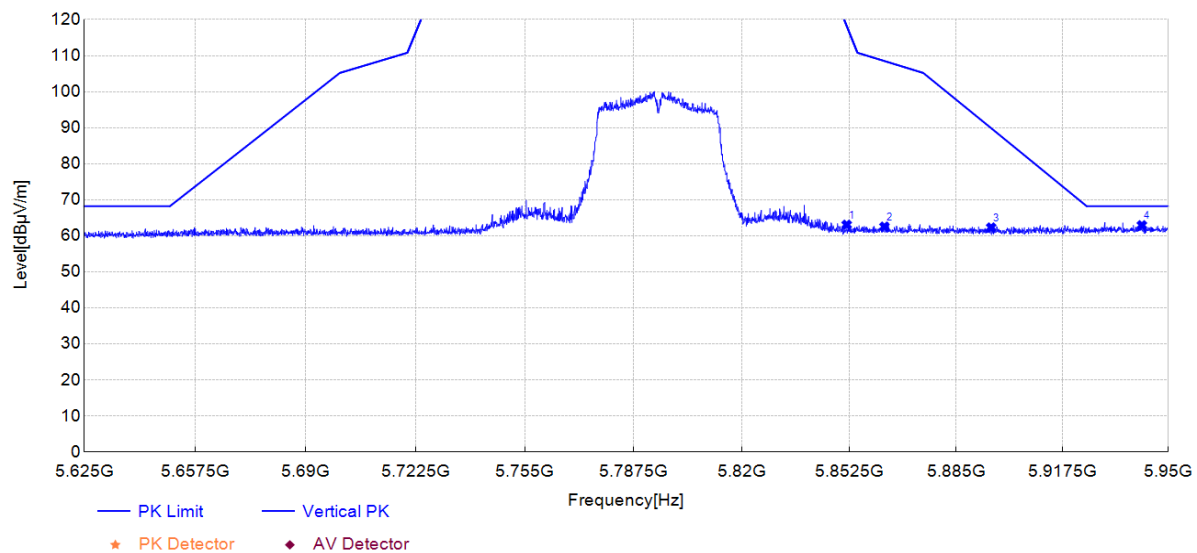


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5851.74	17.58	63.09	45.51	118.22	55.13	150	244	PK	Vertical	PASS
2	5863.20	17.05	62.56	45.51	108.50	45.94	150	129	PK	Vertical	PASS
3	5895.71	16.83	62.33	45.50	89.87	27.54	150	126	PK	Vertical	PASS
4	5941.95	17.18	62.95	45.77	68.20	5.25	150	346	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11ac-VHT80 at Channel 5775MHz MIMO		

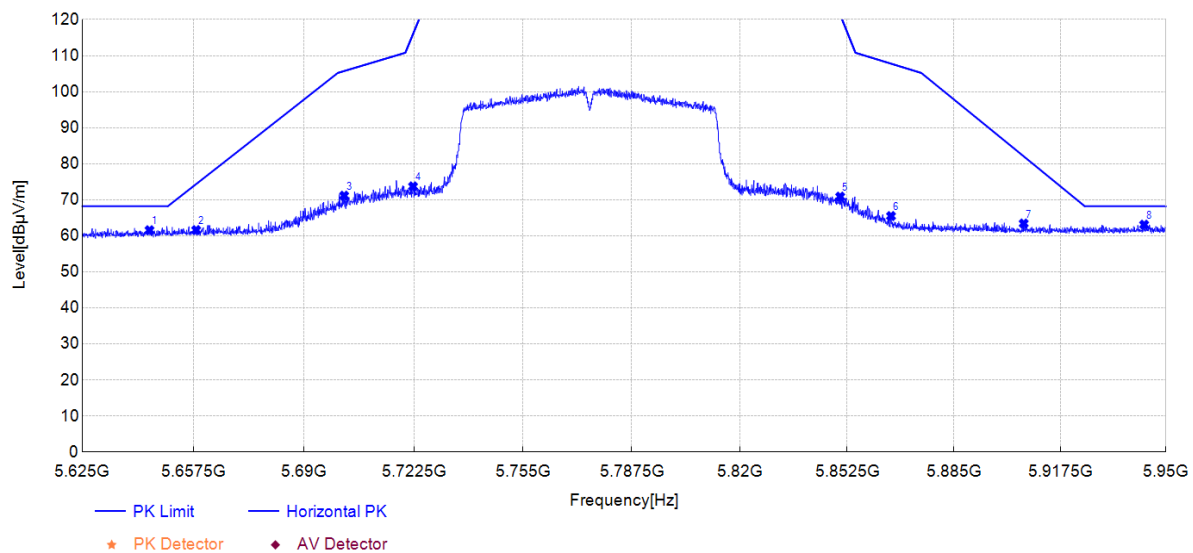


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5644.67	15.97	61.56	45.59	68.20	6.64	150	256	PK	Horizontal	PASS
2	5658.32	15.97	61.59	45.62	74.36	12.77	150	349	PK	Horizontal	PASS
3	5701.88	25.41	71.14	45.73	105.73	34.59	150	270	PK	Horizontal	PASS
4	5722.28	28.03	73.71	45.68	116.00	42.29	150	285	PK	Horizontal	PASS
5	5850.36	25.45	70.88	45.43	121.37	50.49	150	288	PK	Horizontal	PASS
6	5865.80	20.07	65.49	45.42	107.77	42.28	150	256	PK	Horizontal	PASS
7	5906.28	18.00	63.42	45.42	82.06	18.64	150	270	PK	Horizontal	PASS
8	5943.25	17.47	63.09	45.62	68.20	5.11	150	39	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

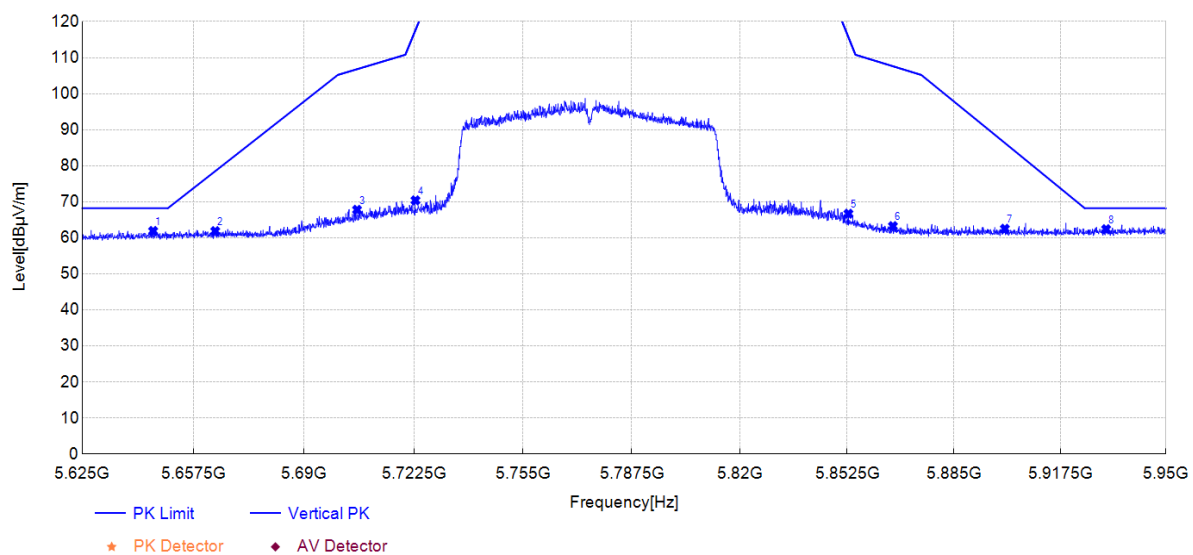


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5645.72	16.39	61.90	45.51	68.20	6.30	150	178	PK	Vertical	PASS
2	5663.93	16.29	61.86	45.57	78.51	16.65	150	84	PK	Vertical	PASS
3	5705.70	22.10	67.78	45.68	106.80	39.02	150	292	PK	Vertical	PASS
4	5723.01	24.75	70.40	45.65	117.67	47.27	150	232	PK	Vertical	PASS
5	5852.88	21.18	66.69	45.51	115.63	48.94	150	236	PK	Vertical	PASS
6	5866.37	17.74	63.25	45.51	107.62	44.37	150	242	PK	Vertical	PASS
7	5900.51	17.02	62.52	45.50	86.33	23.81	150	135	PK	Vertical	PASS
8	5931.55	16.70	62.40	45.70	68.20	5.80	150	357	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11ax-HE20 at Channel 5745MHz MIMO		

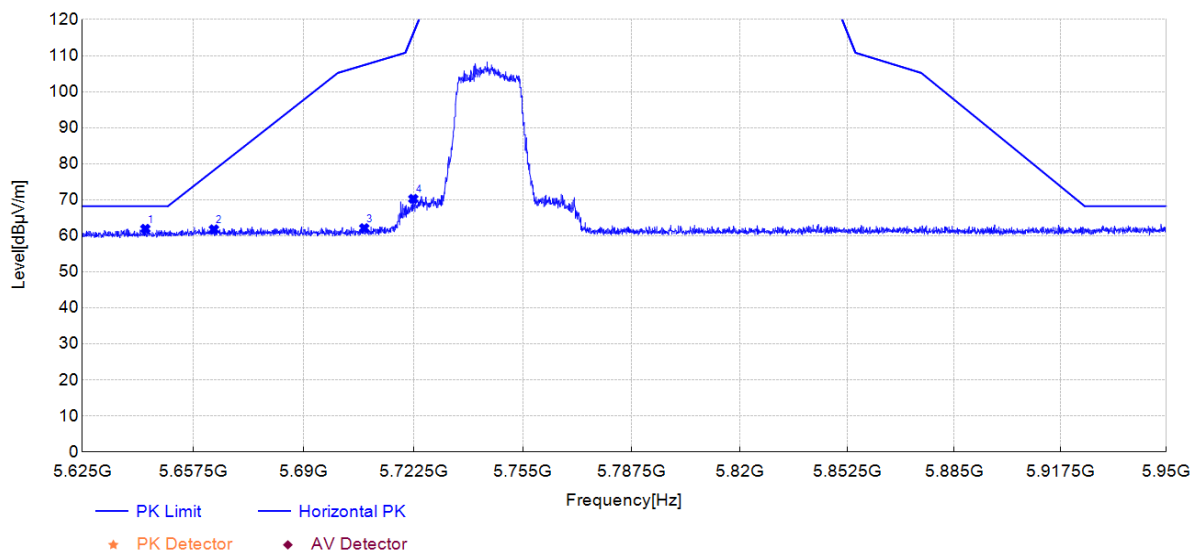


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5643.45	16.36	61.94	45.58	68.20	6.26	150	275	PK	Horizontal	PASS
2	5663.52	16.14	61.78	45.64	78.21	16.43	150	321	PK	Horizontal	PASS
3	5707.81	16.41	62.12	45.71	107.39	45.27	150	177	PK	Horizontal	PASS
4	5722.36	24.57	70.25	45.68	116.18	45.93	150	260	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

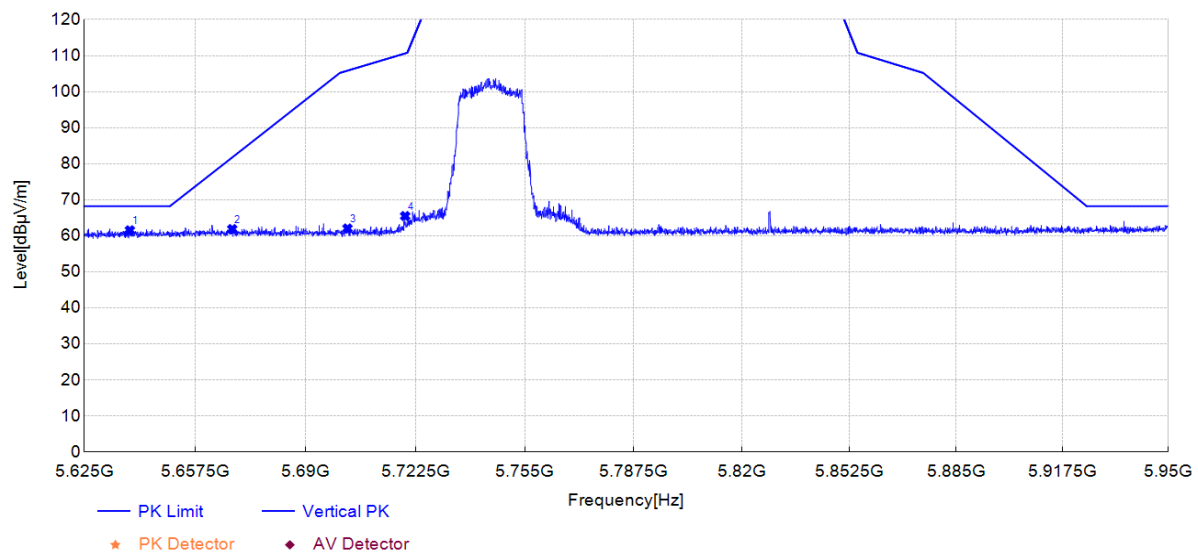


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5638.33	16.07	61.55	45.48	68.20	6.65	150	306	PK	Vertical	PASS
2	5668.32	16.30	61.88	45.58	81.75	19.87	150	291	PK	Vertical	PASS
3	5702.29	16.38	62.06	45.68	105.84	43.78	150	309	PK	Vertical	PASS
4	5719.35	19.83	65.49	45.66	110.62	45.13	150	234	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11ax-HE20 at Channel 5825MHz MIMO		

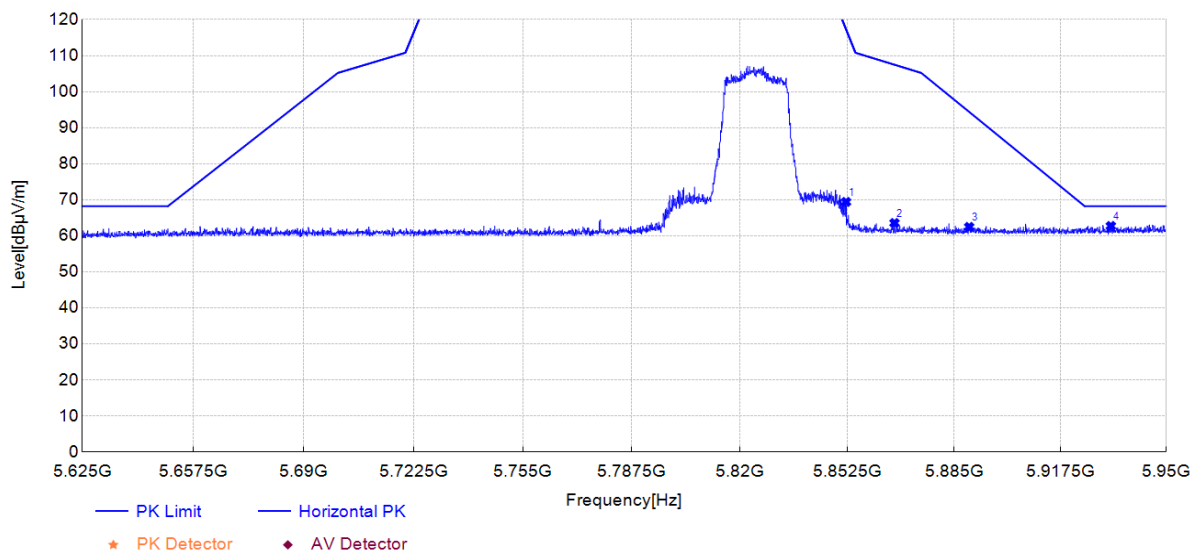


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5852.15	23.97	69.40	45.43	117.30	47.90	150	258	PK	Horizontal	PASS
2	5866.86	18.13	63.55	45.42	107.48	43.93	150	248	PK	Horizontal	PASS
3	5889.62	17.07	62.46	45.39	94.38	31.92	150	244	PK	Horizontal	PASS
4	5933.01	17.17	62.73	45.56	68.20	5.47	150	0	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

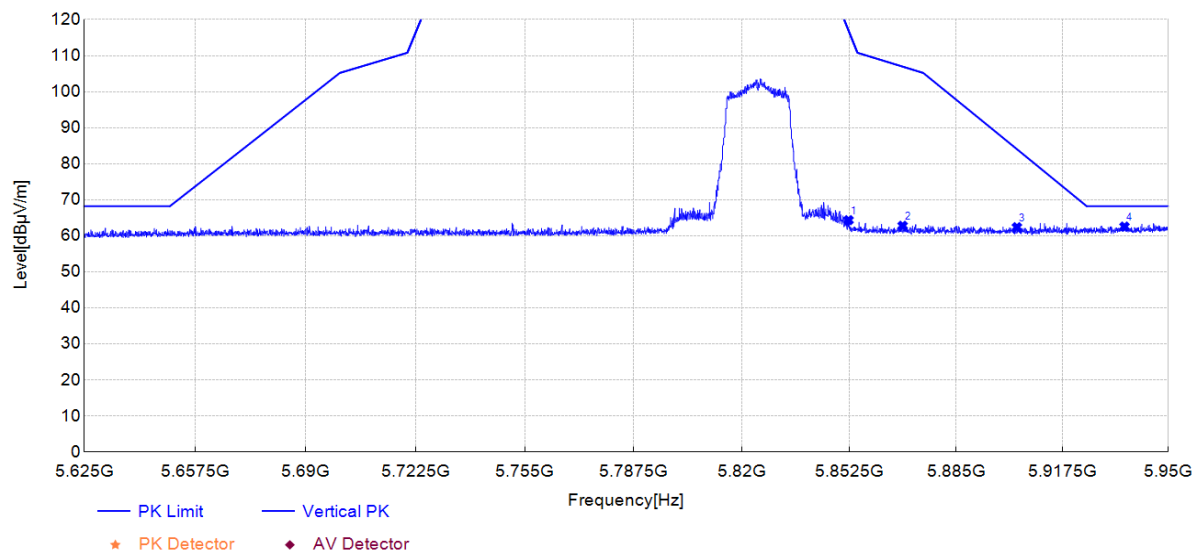


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5852.31	18.84	64.35	45.51	116.93	52.58	150	336	PK	Vertical	PASS
2	5868.73	17.29	62.80	45.51	106.96	44.16	150	0	PK	Vertical	PASS
3	5903.59	16.88	62.40	45.52	84.04	21.64	150	96	PK	Vertical	PASS
4	5936.59	16.85	62.58	45.73	68.20	5.62	150	114	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11ax-HE40 at Channel 5755MHz MIMO		

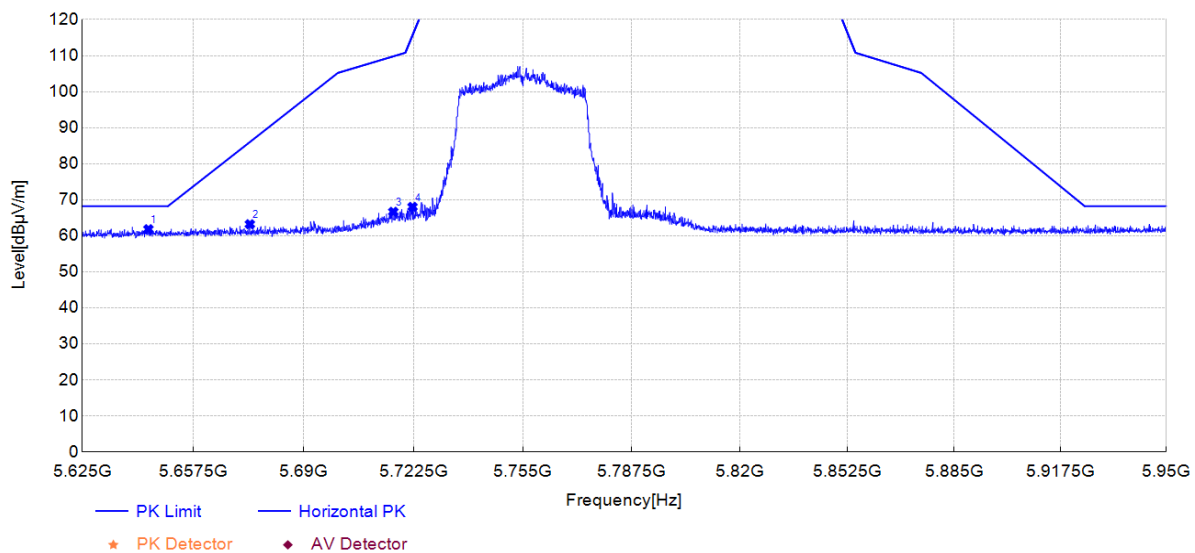


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5644.34	16.26	61.84	45.58	68.20	6.36	150	119	PK	Horizontal	PASS
2	5674.09	17.55	63.22	45.67	86.02	22.80	150	148	PK	Horizontal	PASS
3	5716.43	20.98	66.67	45.69	109.80	43.13	150	264	PK	Horizontal	PASS
4	5722.12	22.36	68.04	45.68	115.63	47.59	150	282	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

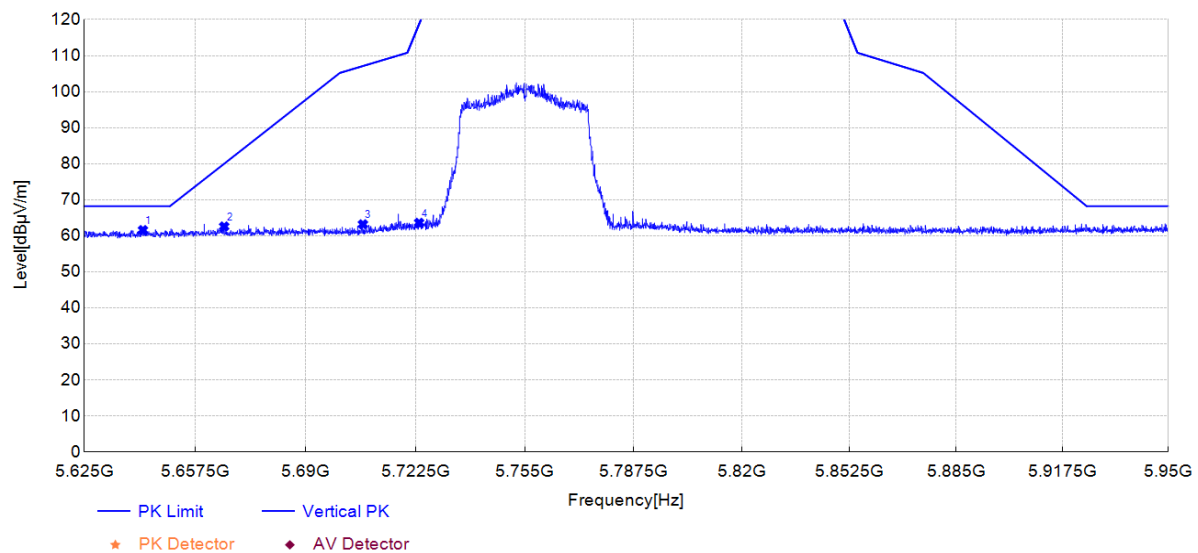


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5642.15	16.10	61.60	45.50	68.20	6.60	150	110	PK	Vertical	PASS
2	5665.96	17.03	62.60	45.57	80.01	17.41	150	230	PK	Vertical	PASS
3	5706.84	17.53	63.20	45.67	107.11	43.91	150	314	PK	Vertical	PASS
4	5723.50	17.98	63.63	45.65	118.78	55.15	150	230	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11ax-HE40 at Channel 5795MHz MIMO		

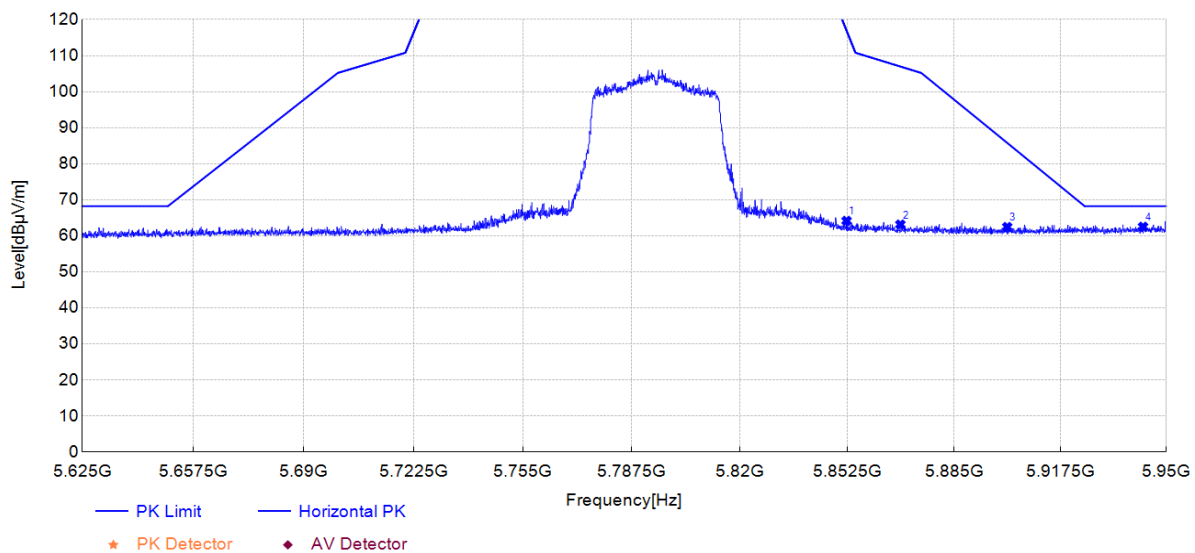


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5852.31	18.74	64.17	45.43	116.93	52.76	150	286	PK	Horizontal	PASS
2	5868.65	17.73	63.15	45.42	106.98	43.83	150	40	PK	Horizontal	PASS
3	5901.24	17.09	62.48	45.39	85.78	23.30	150	352	PK	Horizontal	PASS
4	5942.93	16.93	62.54	45.61	68.20	5.66	150	221	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

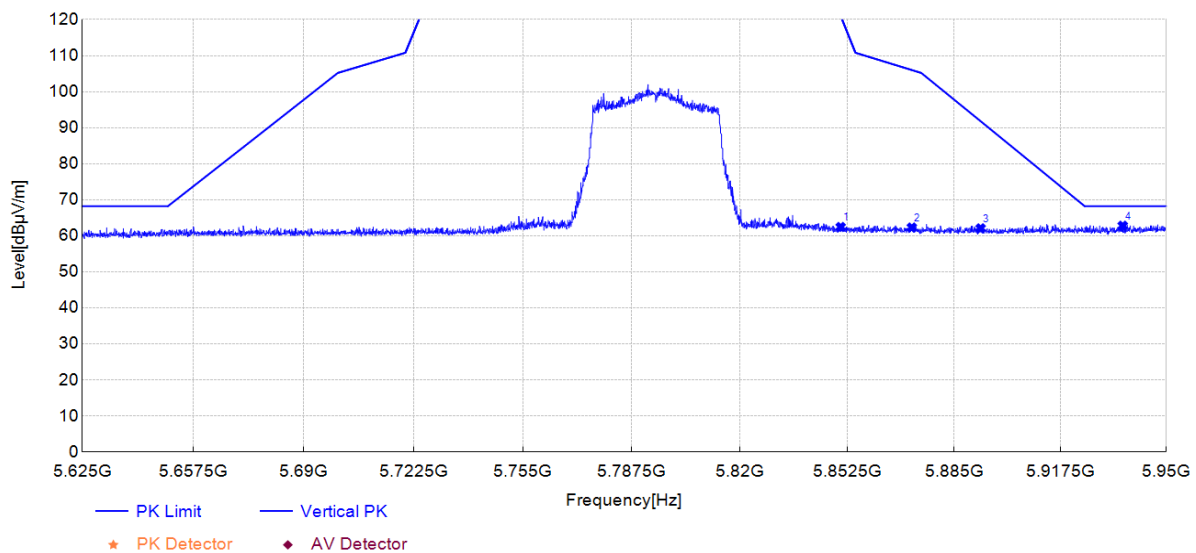


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5850.53	16.95	62.46	45.51	121.00	58.54	150	309	PK	Vertical	PASS
2	5872.14	16.81	62.32	45.51	106.00	43.68	150	0	PK	Vertical	PASS
3	5893.11	16.58	62.09	45.51	91.80	29.71	150	27	PK	Vertical	PASS
4	5936.67	17.08	62.81	45.73	68.20	5.39	150	118	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11ax-HE80 at Channel 5775MHz MIMO		

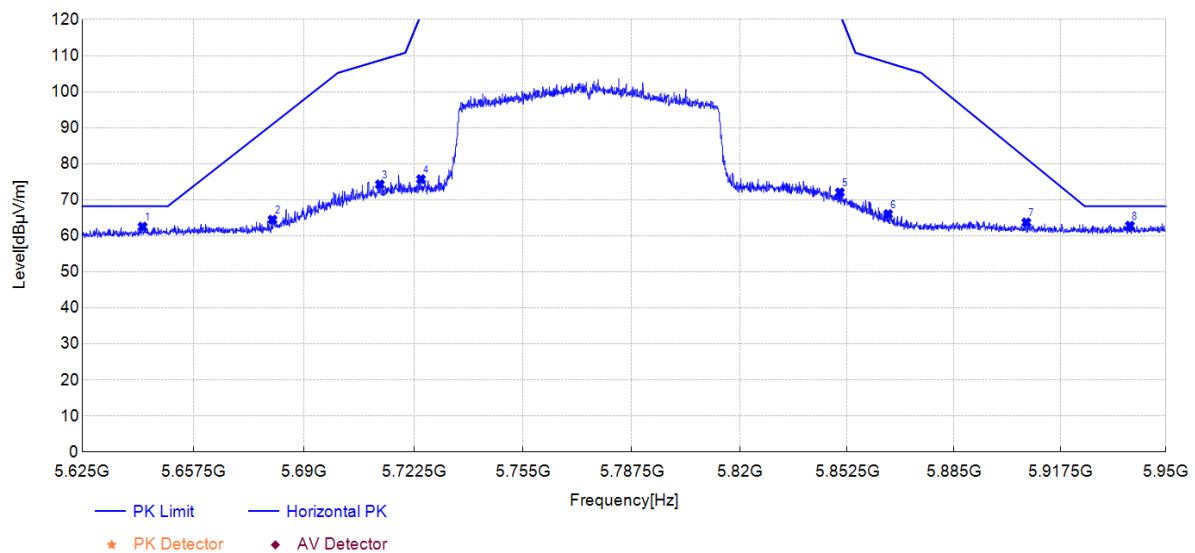


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5642.64	16.96	62.54	45.58	68.20	5.66	150	0	PK	Horizontal	PASS
2	5680.75	18.79	64.47	45.68	90.96	26.49	150	268	PK	Horizontal	PASS
3	5712.45	28.56	74.26	45.70	108.69	34.43	150	264	PK	Horizontal	PASS
4	5724.64	30.03	75.71	45.68	121.37	45.66	150	238	PK	Horizontal	PASS
5	5850.28	26.61	72.04	45.43	121.56	49.52	150	282	PK	Horizontal	PASS
6	5864.91	20.61	66.03	45.42	108.03	42.00	150	360	PK	Horizontal	PASS
7	5907.09	18.29	63.71	45.42	81.45	17.74	150	289	PK	Horizontal	PASS
8	5938.87	17.21	62.80	45.59	68.20	5.40	150	282	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

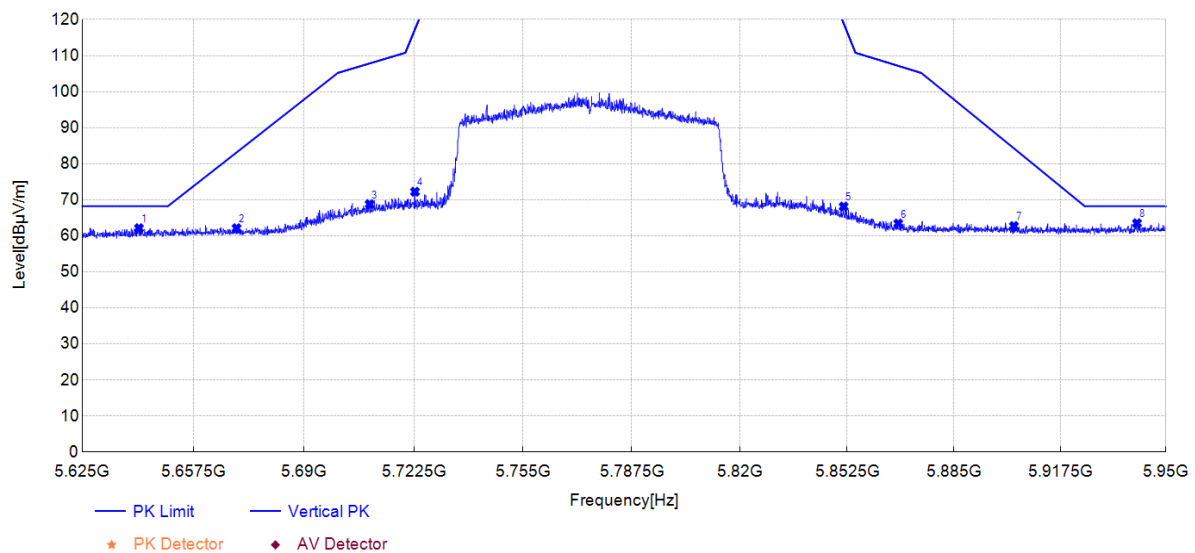


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5641.58	16.62	62.11	45.49	68.20	6.09	150	325	PK	Vertical	PASS
2	5670.19	16.52	62.11	45.59	83.14	21.03	150	9	PK	Vertical	PASS
3	5709.44	23.10	68.78	45.68	107.84	39.06	150	292	PK	Vertical	PASS
4	5722.85	26.59	72.24	45.65	117.30	45.06	150	226	PK	Vertical	PASS
5	5851.42	22.60	68.11	45.51	118.96	50.85	150	230	PK	Vertical	PASS
6	5868.00	17.91	63.42	45.51	107.16	43.74	150	226	PK	Vertical	PASS
7	5903.27	17.19	62.71	45.52	84.28	21.57	150	71	PK	Vertical	PASS
8	5941.06	17.74	63.49	45.75	68.20	4.71	150	53	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11be-EHT20 at Channel 5745MHz MIMO		

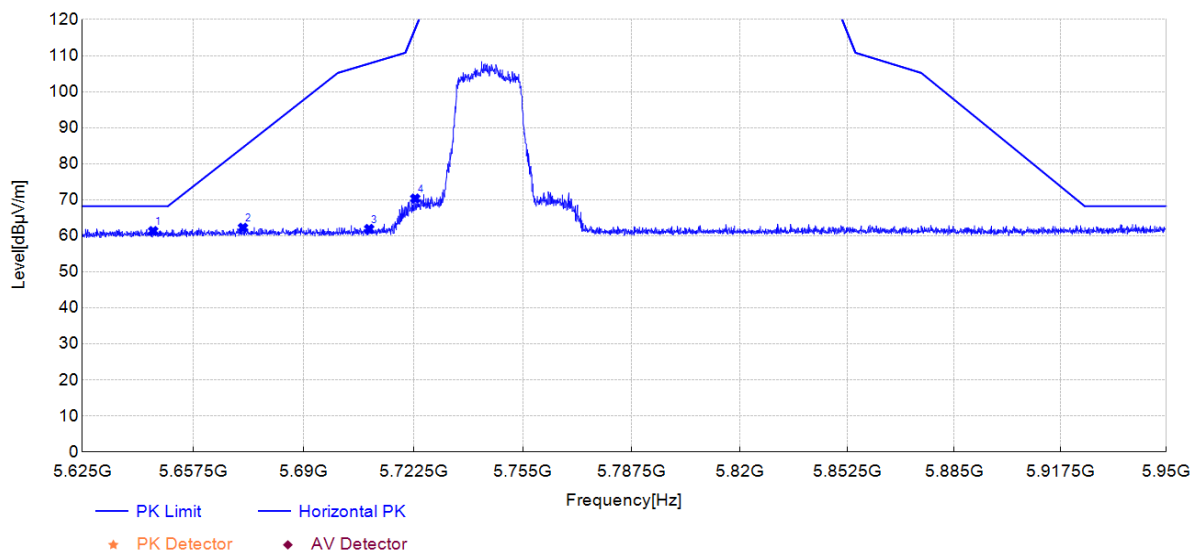


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5645.72	15.74	61.33	45.59	68.20	6.87	150	222	PK	Horizontal	PASS
2	5672.06	16.58	62.24	45.66	84.52	22.28	150	95	PK	Horizontal	PASS
3	5709.28	16.21	61.92	45.71	107.80	45.88	150	126	PK	Horizontal	PASS
4	5722.93	24.67	70.35	45.68	117.48	47.13	150	279	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

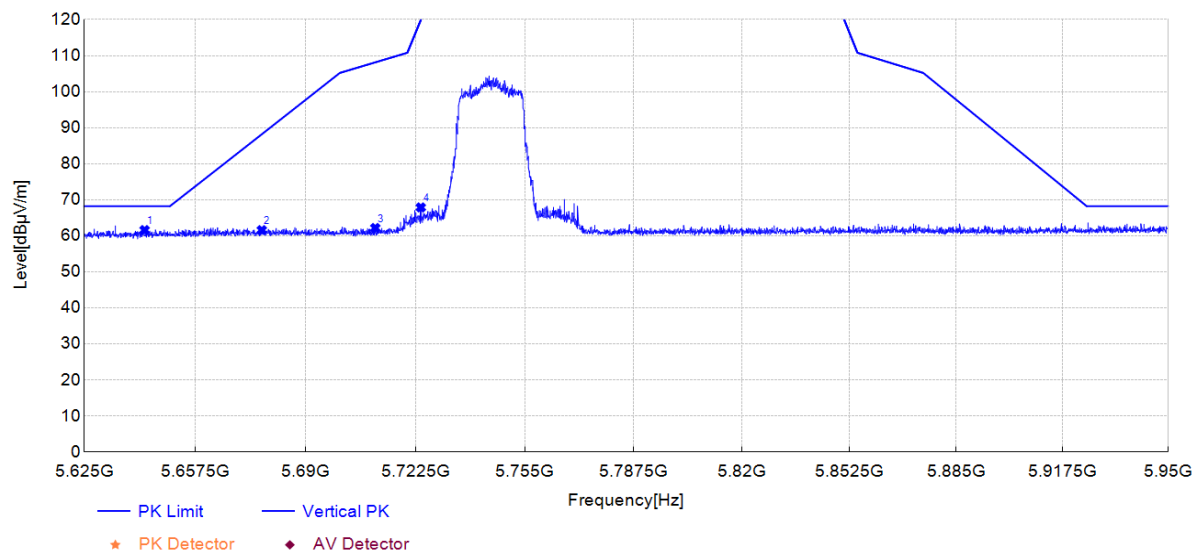


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5642.64	16.10	61.60	45.50	68.20	6.60	150	350	PK	Vertical	PASS
2	5677.01	15.97	61.59	45.62	88.19	26.60	150	360	PK	Vertical	PASS
3	5710.50	16.50	62.18	45.68	108.14	45.96	150	303	PK	Vertical	PASS
4	5723.99	22.23	67.88	45.65	119.89	52.01	150	232	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11be-EHT20 at Channel 5825MHz MIMO		

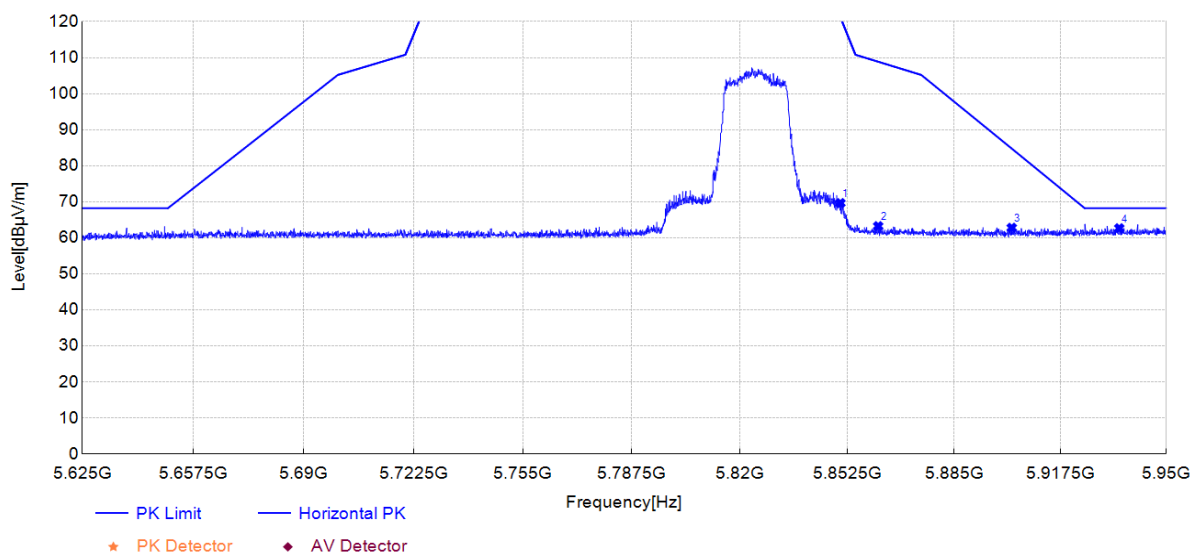


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5850.44	24.22	69.65	45.43	121.19	51.54	150	247	PK	Horizontal	PASS
2	5861.90	17.82	63.24	45.42	108.87	45.63	150	58	PK	Horizontal	PASS
3	5902.62	17.40	62.79	45.39	84.76	21.97	150	307	PK	Horizontal	PASS
4	5935.62	17.10	62.67	45.57	68.20	5.53	150	358	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

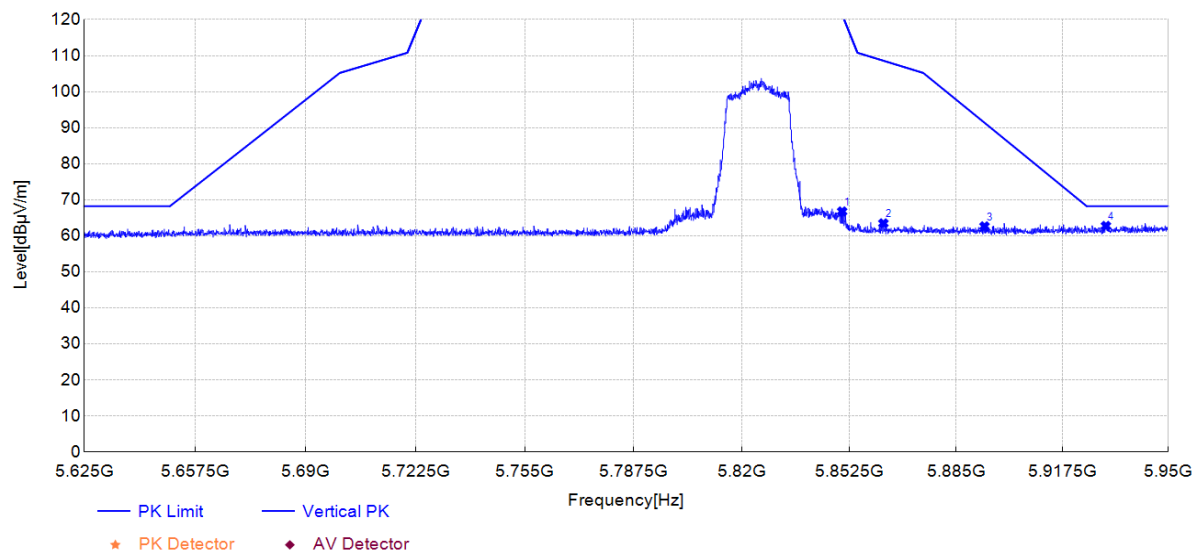


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5850.36	21.26	66.77	45.51	121.37	54.60	150	237	PK	Vertical	PASS
2	5862.88	17.96	63.47	45.51	108.59	45.12	150	263	PK	Vertical	PASS
3	5893.68	17.13	62.64	45.51	91.38	28.74	150	0	PK	Vertical	PASS
4	5930.90	17.05	62.75	45.70	68.20	5.45	150	292	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11be-EHT40 at Channel 5755MHz MIMO		

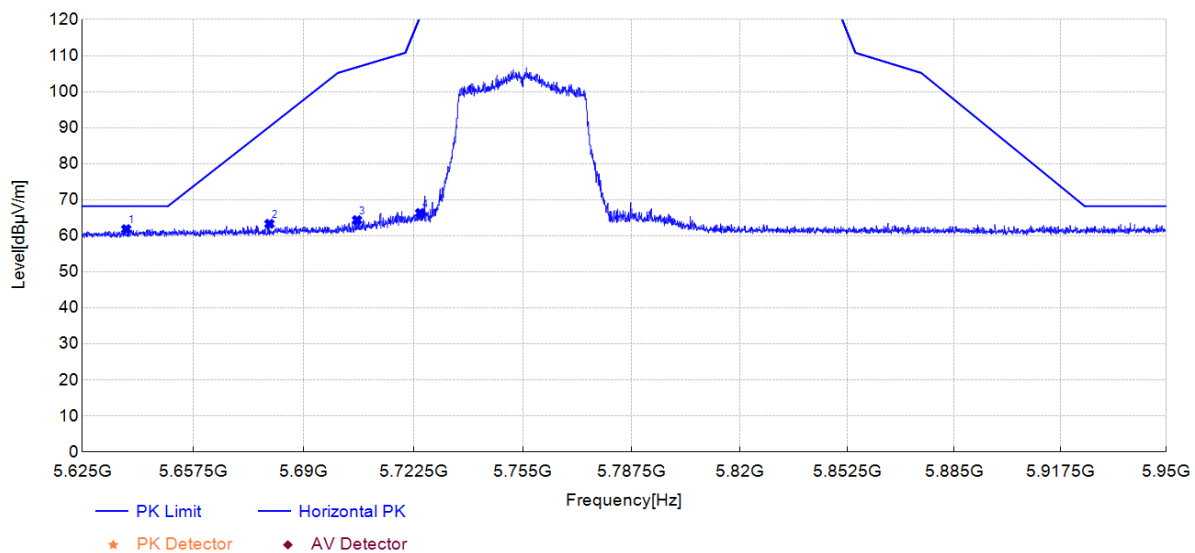


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5637.84	16.26	61.83	45.57	68.20	6.37	150	261	PK	Horizontal	PASS
2	5679.86	17.66	63.33	45.67	90.29	26.96	150	272	PK	Horizontal	PASS
3	5705.70	18.64	64.36	45.72	106.80	42.44	150	264	PK	Horizontal	PASS
4	5724.39	20.65	66.33	45.68	120.82	54.49	150	243	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

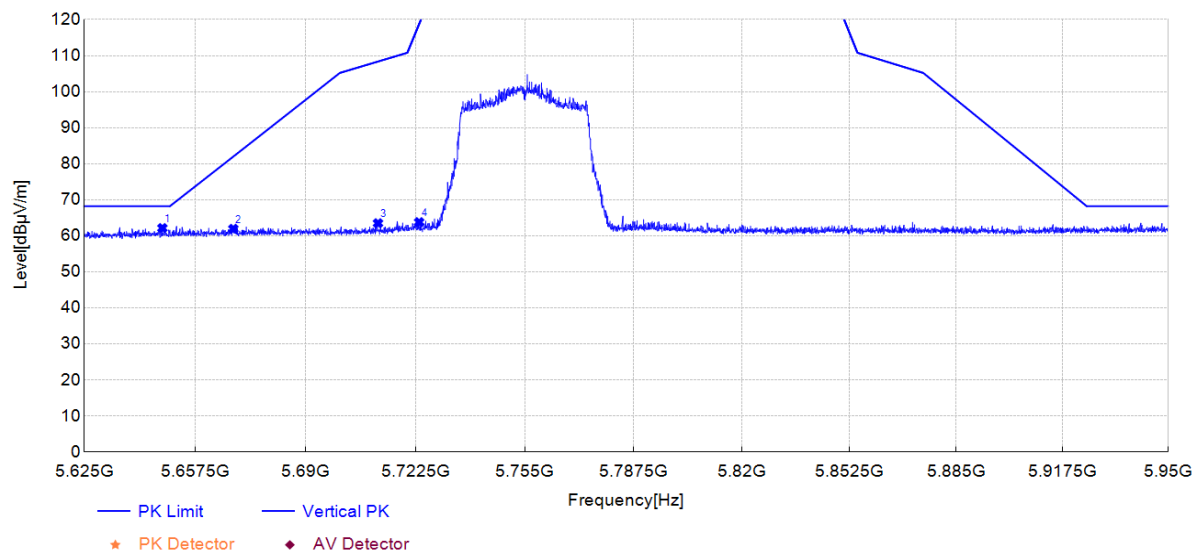


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5647.84	16.64	62.15	45.51	68.20	6.05	150	78	PK	Vertical	PASS
2	5668.64	16.36	61.94	45.58	82.00	20.06	150	230	PK	Vertical	PASS
3	5711.31	17.82	63.50	45.68	108.37	44.87	150	219	PK	Vertical	PASS
4	5723.50	18.14	63.79	45.65	118.78	54.99	150	234	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11be-EHT40 at Channel 5795MHz MIMO		

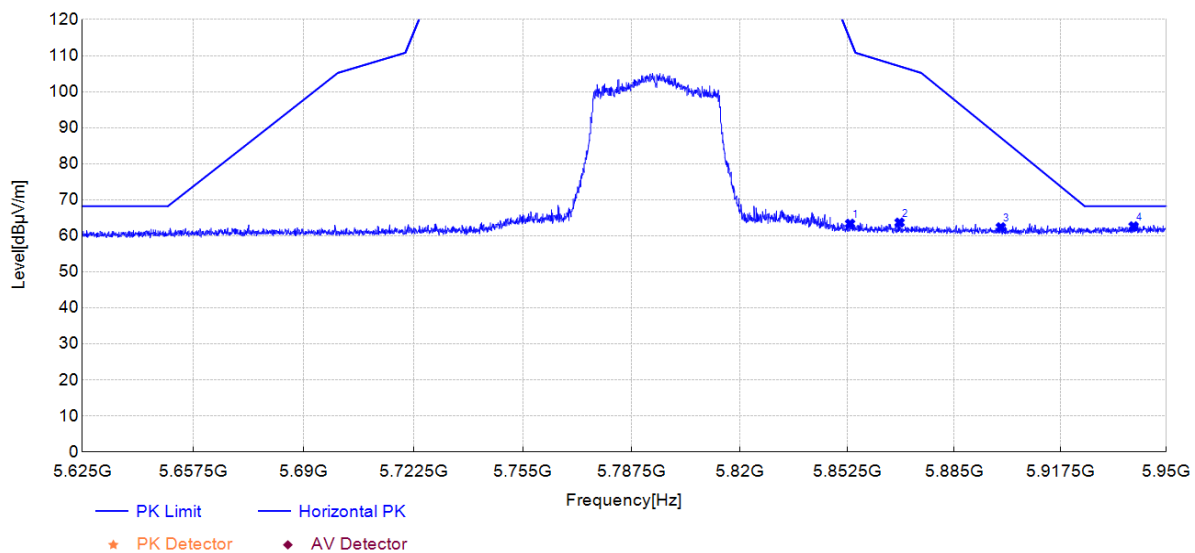


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5853.37	17.94	63.37	45.43	114.52	51.15	150	333	PK	Horizontal	PASS
2	5868.40	18.25	63.67	45.42	107.05	43.38	150	358	PK	Horizontal	PASS
3	5899.29	17.00	62.38	45.38	87.23	24.85	150	347	PK	Horizontal	PASS
4	5940.00	17.05	62.65	45.60	68.20	5.55	150	51	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

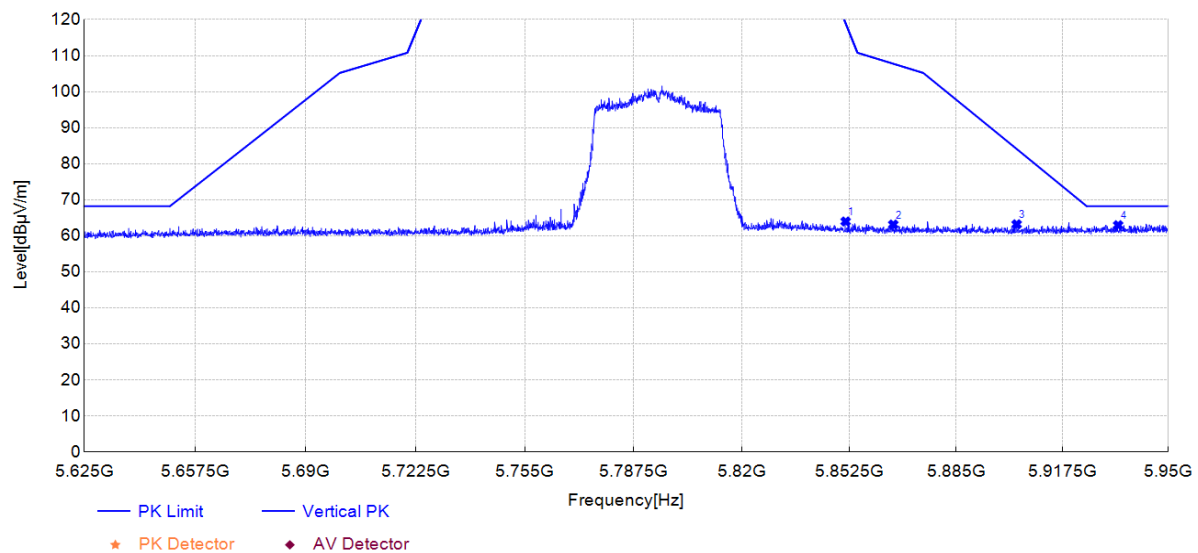


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5851.42	18.47	63.98	45.51	118.96	54.98	150	59	PK	Vertical	PASS
2	5865.89	17.62	63.13	45.51	107.75	44.62	150	204	PK	Vertical	PASS
3	5903.51	17.68	63.20	45.52	84.10	20.90	150	292	PK	Vertical	PASS
4	5934.64	17.22	62.94	45.72	68.20	5.26	150	118	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Robot Domain Controller	Model:	T5
Test Date:	2026-06-05	Voltage:	AC 24V
Environment:	Temp: 21.6°C; Humi:58%	Engineer:	Jawb Cai
Remark:	Transmit by 802.11be-EHT80 at Channel 5775MHz MIMO		

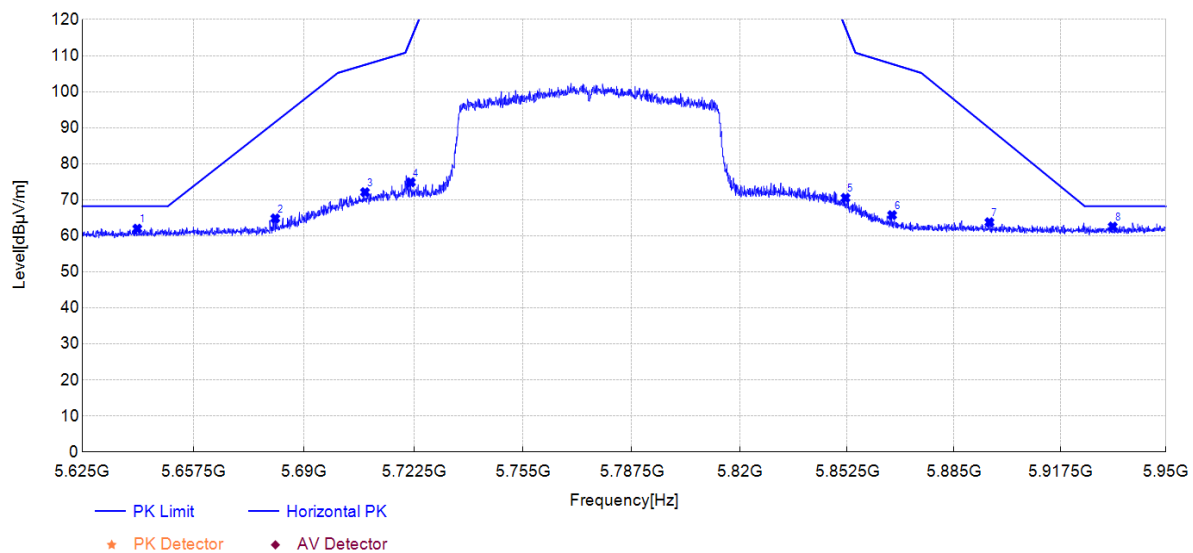


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5641.09	16.40	61.98	45.58	68.20	6.22	150	360	PK	Horizontal	PASS
2	5681.56	19.15	64.83	45.68	91.56	26.73	150	270	PK	Horizontal	PASS
3	5708.06	26.39	72.10	45.71	107.46	35.36	150	280	PK	Horizontal	PASS
4	5721.63	29.17	74.85	45.68	114.52	39.67	150	273	PK	Horizontal	PASS
5	5851.99	25.09	70.52	45.43	117.67	47.15	150	258	PK	Horizontal	PASS
6	5866.13	20.32	65.74	45.42	107.68	41.94	150	360	PK	Horizontal	PASS
7	5895.79	18.38	63.76	45.38	89.81	26.05	150	261	PK	Horizontal	PASS
8	5933.58	16.99	62.55	45.56	68.20	5.65	150	112	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

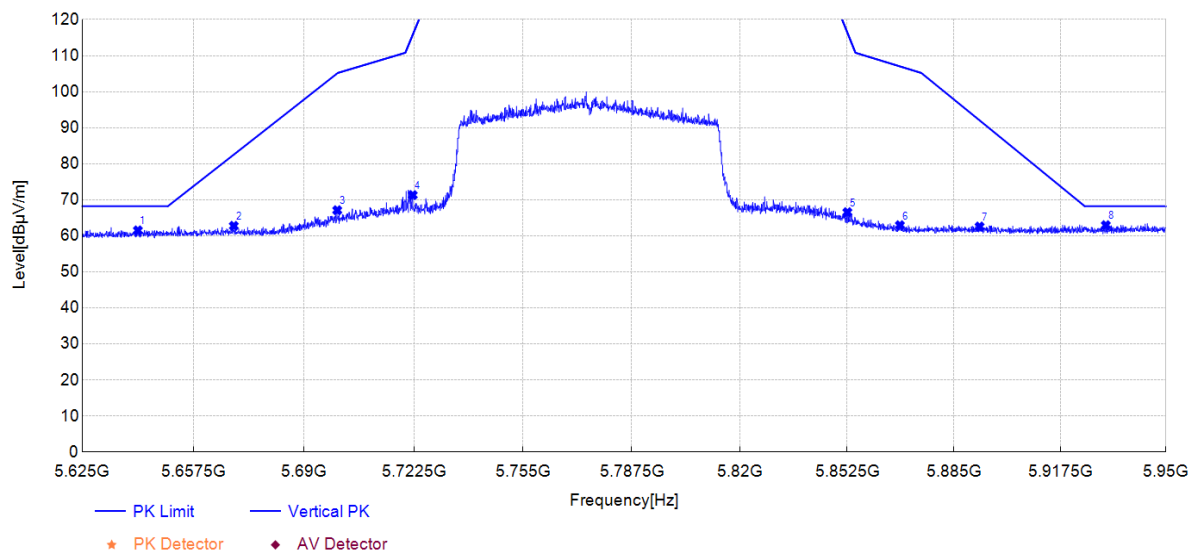

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	5641.25	16.01	61.50	45.49	68.20	6.70	150	334	PK	Vertical	PASS
2	5669.37	17.17	62.75	45.58	82.54	19.79	150	266	PK	Vertical	PASS
3	5699.85	21.40	67.09	45.69	105.09	38.00	150	277	PK	Vertical	PASS
4	5722.20	25.65	71.30	45.65	115.81	44.51	150	232	PK	Vertical	PASS
5	5852.56	21.03	66.54	45.51	116.37	49.83	150	244	PK	Vertical	PASS
6	5868.49	17.42	62.93	45.51	107.02	44.09	150	262	PK	Vertical	PASS
7	5892.79	17.06	62.57	45.51	92.04	29.47	150	352	PK	Vertical	PASS
8	5931.47	17.24	62.94	45.70	68.20	5.26	150	214	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II and appendix III** for details.

---END---