

01_WLAN2.4GHz_802.11b 1Mbps_Bottom Face_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462.000 MHz

Medium: HSL_600-7200_260717 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(7.46, 7.23, 7.29); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2026-03-13
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156_Edge_0414; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.924 W/kg; SAR (10g) = 0.362 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.995 W/kg; SAR (8g) = 0.430 W/kg; SAR (10g) = 0.378 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.7 %

TSL Correction: Positive only

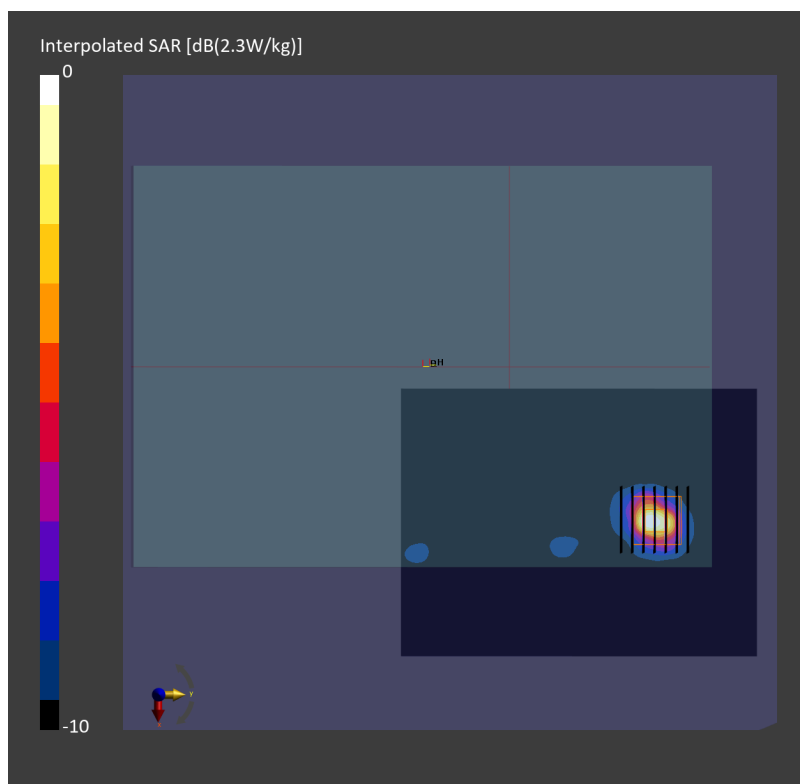

02_WLAN5GHz_802.11ac-VHT160 MCS0_Bottom Face_0mm_Ch50

Communication System: IEEE 802.11ac WiFi; Frequency: 5250.000 MHz

Medium: HSL_600-7200_260717 Medium parameters used: $f = 5250.000$ MHz; $\sigma = 4.46$ S/m; $\epsilon_r = 35.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(5.66, 5.49, 5.53); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2026-03-13
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156_0mm_0716; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10554-AAE

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.763 W/kg; SAR (10g) = 0.210 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.05 dB

SAR (1g) = 0.812 W/kg; SAR (8g) = 0.258 W/kg; SAR (10g) = 0.220 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 64.4 %

TSL Correction: Positive only

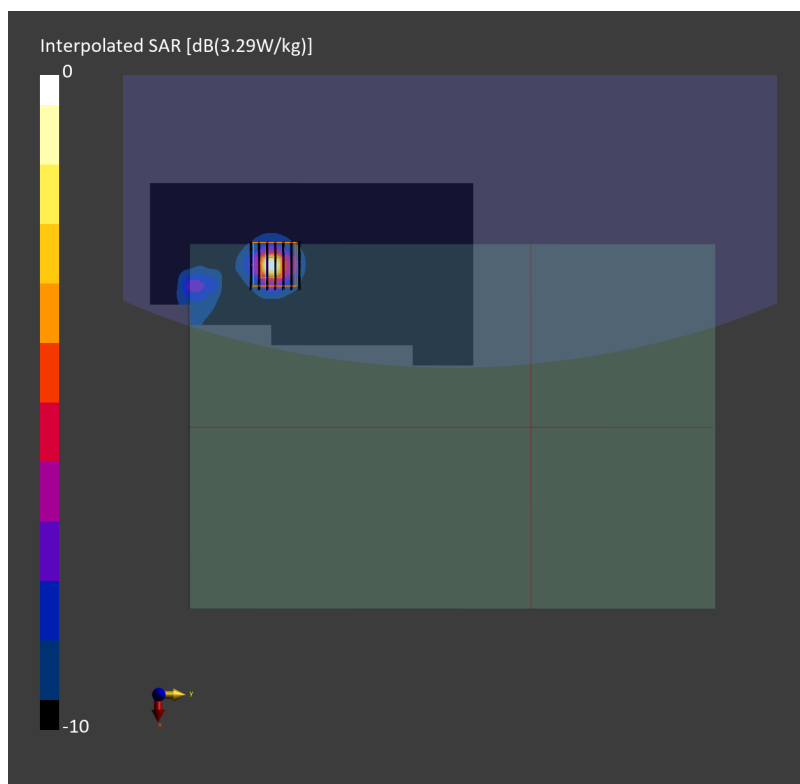

03_WLAN5GHz_802.11ac-VHT160 MCS0_Bottom Face_0mm_Ch114

Communication System: IEEE 802.11ac WiFi; Frequency: 5570.000 MHz

Medium: HSL_600-7200_260717 Medium parameters used: $f = 5570.000$ MHz; $\sigma = 4.79$ S/m; $\epsilon_r = 34.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(5.27, 5.11, 5.15); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2026-03-13
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156_0mm_0716; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10554-AAE

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.690 W/kg; SAR (10g) = 0.193 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 0.712 W/kg; SAR (8g) = 0.228 W/kg; SAR (10g) = 0.195 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.2 %

TSL Correction: Positive only

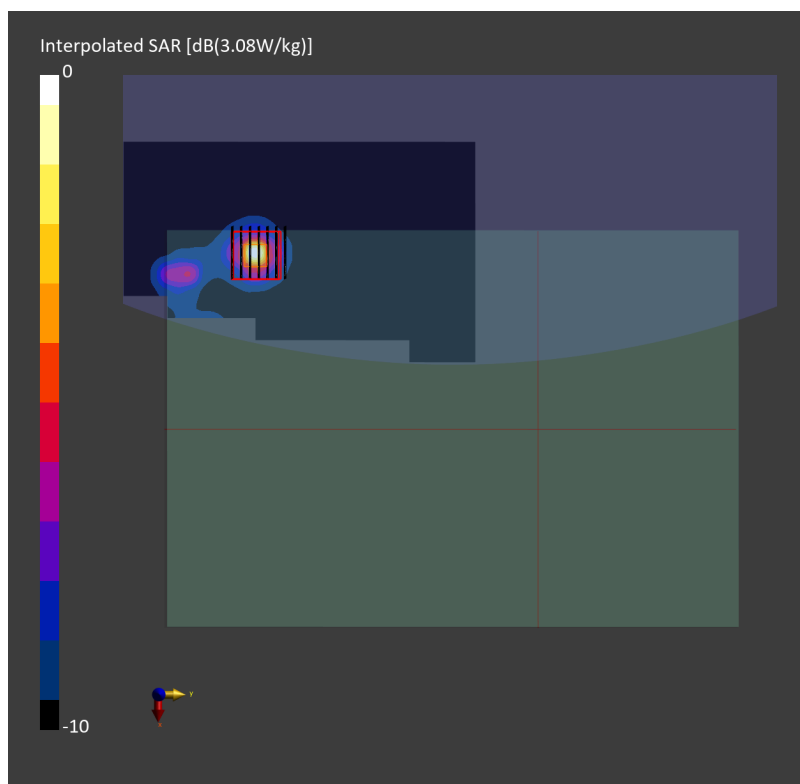

04_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom Face_0mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260717 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.02$ S/m; $\epsilon_r = 34.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(5.21, 5.05, 5.09); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2026-03-13
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156_0mm_0716; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.668 W/kg; SAR (10g) = 0.188 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.01 dB

SAR (1g) = 0.704 W/kg; SAR (8g) = 0.229 W/kg; SAR (10g) = 0.197 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.5 %

TSL Correction: Positive only

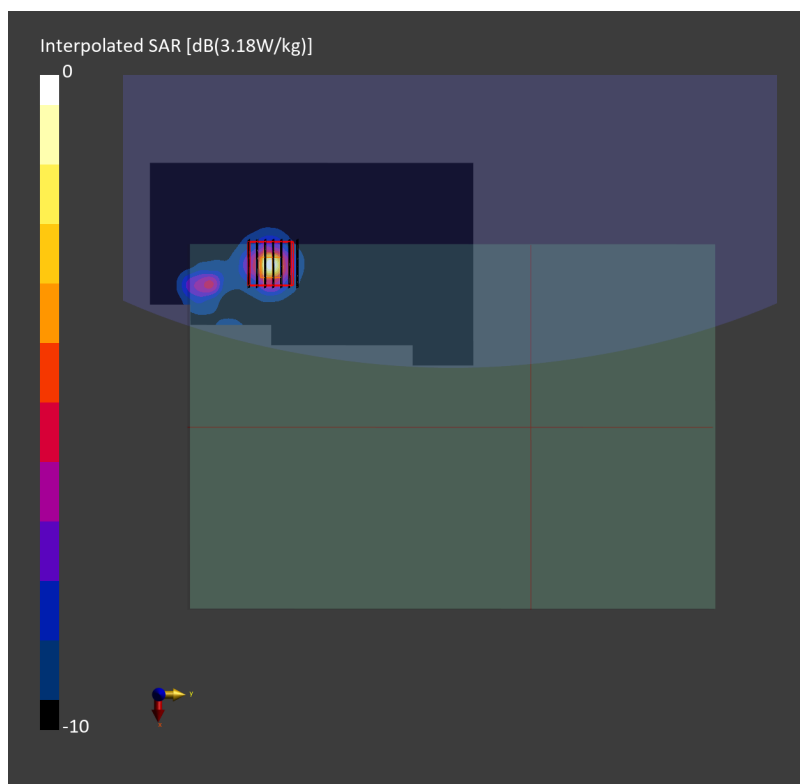

05_WLAN6GHz_802.11be-EHT320 MCS0_Edge 1_0mm_Ch63

Communication System: IEEE 802.11be; Frequency: 6265.000 MHz

Medium: HSL_600-7200_260804 Medium parameters used: $f = 6265.000$ MHz; $\sigma = 5.99$ S/m; $\epsilon_r = 36.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(5.68, 5.5, 5.54); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2026-03-13
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 11026-AAB

Area Scan (68.0 mm x 136.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.706 W/kg; SAR (10g) = 0.206 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.03 dB


SAR (1g) = 0.776 W/kg; SAR (8g) = 0.248 W/kg; SAR (10g) = 0.213 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 52.9 %

psAPD (1.0cm², sq) = 7.76 [W/m²]; psAPD (4.0cm², sq) = 4.97 [W/m²]

TSL Correction: Positive only

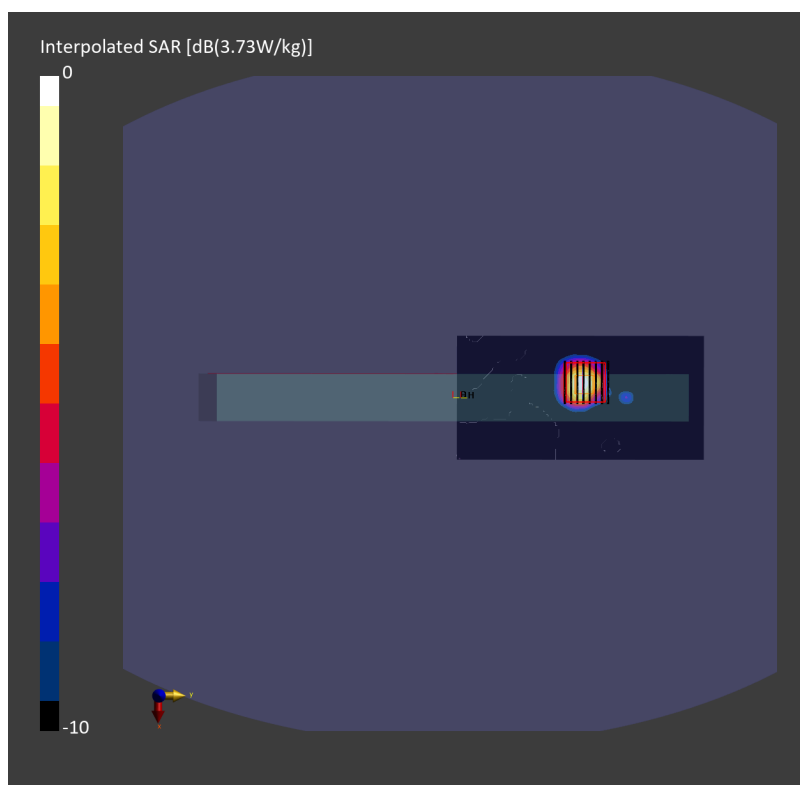

06_Bluetooth_1Mbps_Bottom Face_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260721 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.06, 6.75, 7.51); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2026-06-02
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1227_0mm; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (100.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.062 W/kg; SAR (10g) = 0.026 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.16 dB

SAR (1g) = 0.064 W/kg; SAR (8g) = 0.028 W/kg; SAR (10g) = 0.025 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 76.3 %

TSL Correction: Positive only

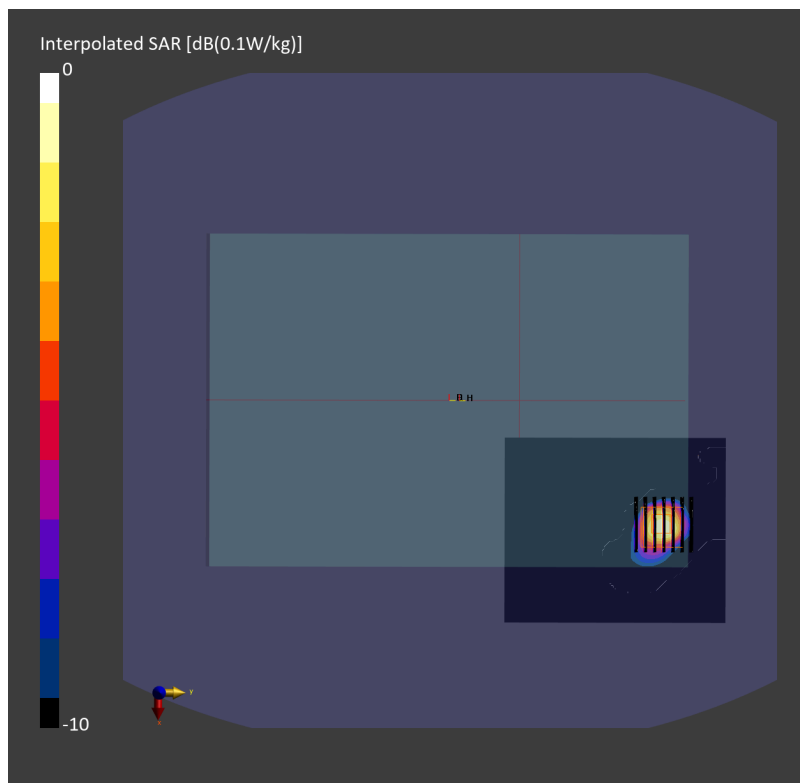

07_NFC_ASK_Back_0mm_13.56MHz

Communication System: CW; Frequency: 13.600 MHz

Medium: HSL_4-250_260720 Medium parameters used: $f = 13.600$ MHz; $\sigma = 0.748$ S/m; $\epsilon_r = 55.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C


DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(17.55, 17.18, 17.51); Calibrated: 2025-10-23
- Sensor-Surface: 1.4mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0 W/kg; SAR (10g) = 0 W/kg;

TSL Correction: Positive only

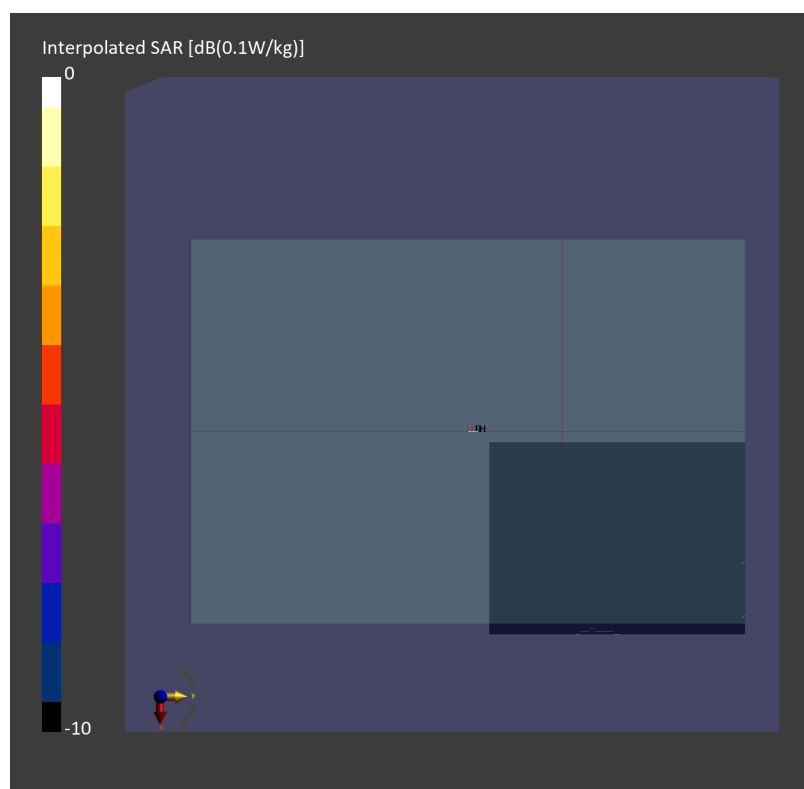

For PD

01_Measurement Report for Device

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	260.0 x 180.0 x 26.0	3.2.0.1840	Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	EDGE 1, 2.00	6265.0	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV3 – SN9424_F1–55GHz, 2026–03–12	DAE4 Sn1696, 2026–06–02

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Date	2026–08–05
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.69
psPDtot+ [W/m ²]	1.97
H _{max} [A/m]	0.132
E _{max} [V/m]	48.5
max _(Stot) [W/m ²]	2.70
Power Drift [dB]	0.19
IPDn	2.07

