



FCC CO-LOCATION RADIO TEST REPORT

FCC ID : 2BV7P-RT710L0
Equipment : Rugged Tablet PC
Brand Name : Honeywell
Model Name : RT710-L0
Applicant : HAND HELD PRODUCTS, INC.
9680 Old Bailes Road, Fort Mill, SC 29707, USA
Standard : FCC Part 15 Subpart C §15.247
FCC Part 15 Subpart E §15.407

The product was received on Jul. 16, 2026 and testing was performed from Jul. 18, 2026 to Jul. 29, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 EUT Operation Test Setup	8
3 Test Result	9
3.1 Unwanted Emissions Measurement	9
3.2 Antenna Requirements.....	14
4 List of Measuring Equipment.....	15
5 Measurement Uncertainty	16
Appendix A. Radiated Spurious Emission Test Result	
Appendix B. Duty Cycle Plots	
Appendix C. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR670105H	01	Initial issue of report	Aug. 21, 2026
FR670105H	02	Revise section 2.1. about frequency range. This report is an update version, replacing the report issued on Aug. 21, 2026.	Sep. 02, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(d) 15.407(b)	Unwanted Emissions	Pass	-
3.2	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Lewis Ho

Report Producer: Julia Chang

1 General Description

1.1 Product Feature of Equipment Under Test

Product Specification subject to this standard		
General Specs	Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax/be, Wi-Fi 5GHz 802.11a/n/ac/ax/be, Wi-Fi 6GHz 802.11a/ax/be and NFC.	
Sample 1	Sku1	
Sample 2	Sku4	
Sample 3	Sku2	
Sample 4	Sku9	
Sample 5	Sku5	
Sample 6	Sku8	
Sample 7	Sku3	
Sample 8	Sku6	
Sample 9	Sku7	
Antenna Type	<Ant.8>: LDS Antenna <Ant.9>: LDS Antenna	

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	<ANT.8>:0 <ANT.9>:0.5
5250 MHz ~ 5350 MHz	Peak Gain (dBi)	<Ant.8>: 0.5 <Ant.9>: -0.5
6875 MHz ~ 7125 MHz	Peak Gain (dBi)	<Ant.8>: 0.5 <Ant.9>: -0.5

Remark:

1. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.
2. All test items were performed with Sample 1.

EUT Information List	
SN	Performed Test Item
26168X0063 26168X00A8	Radiated Spurious Emission

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

The test location is accredited based on TAF code 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010

FCC designation No.: TW3786

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Part 15 Subpart E
- ♦ ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

2.1 Carrier Frequency and Channel

2400-2483.5 MHz	
Bluetooth	
Channel	Freq. (MHz)
00	2402
19	2440

2400-2483.5 MHz	
802.11be EHT40	
Channel	Freq. (MHz)
03	2422


5250 MHz ~ 5350 MHz	
802.11be EHT20	
Channel	Freq. (MHz)
64	5320

6875 MHz ~ 7125 MHz	
802.11be EHT160	
Channel	Freq. (MHz)
207	6985

2.2 Test Mode

The detailed Radiated test modes are shown in Appendix A

2.3 Connection Diagram of Test System

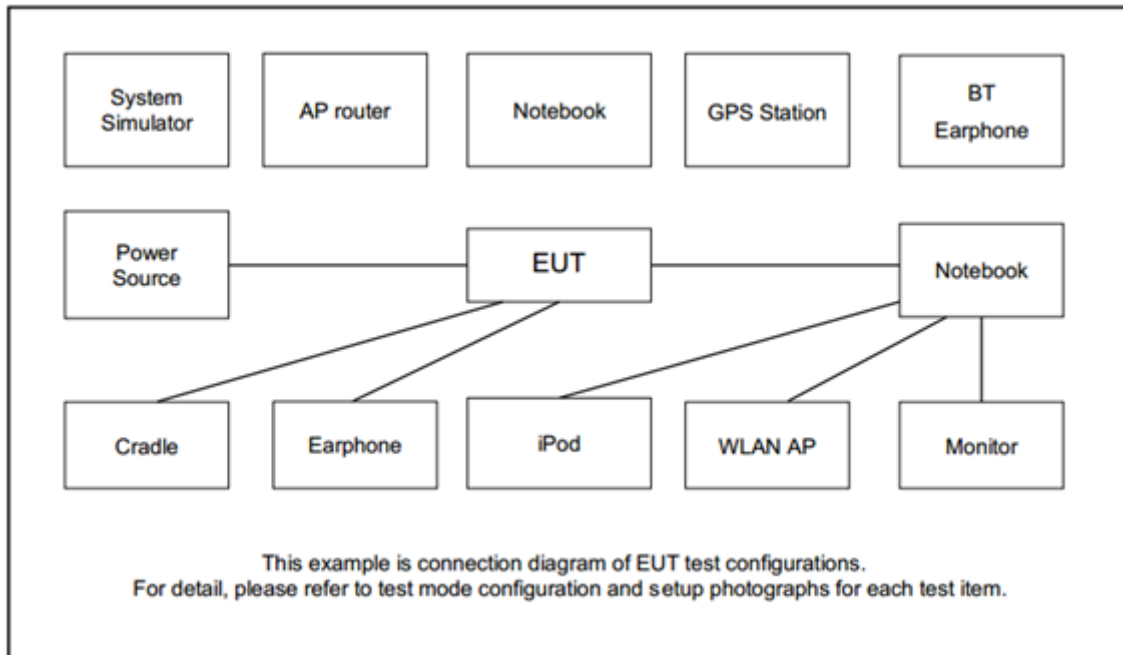

2.4 EUT Operation Test Setup

The RF test items, utility “QRCT 4.0.189.1” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.1.1 Limit of Unwanted Emissions

<For 2400 MHz ~ 2483.5 MHz>

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

<For 51250 MHz ~ 5350 MHz & 6875 MHz ~ 7125 MHz>

- (1) For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

- (2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

For 5250 MHz ~ 5350 MHz:

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

For 6875 MHz ~ 7125 MHz:

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.2
- 7 (Peak)	88.2

According 987594 D02 U-NII 6GHz EMC Measurement v03 section G:

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

<For 2400 MHz ~ 2483.5 MHz>

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.

7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


<For 5250 MHz ~ 5350 MHz & 6875 MHz ~ 7125 MHz>

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.1.4 Test Setup

For radiated test from 1GHz to 18GHz

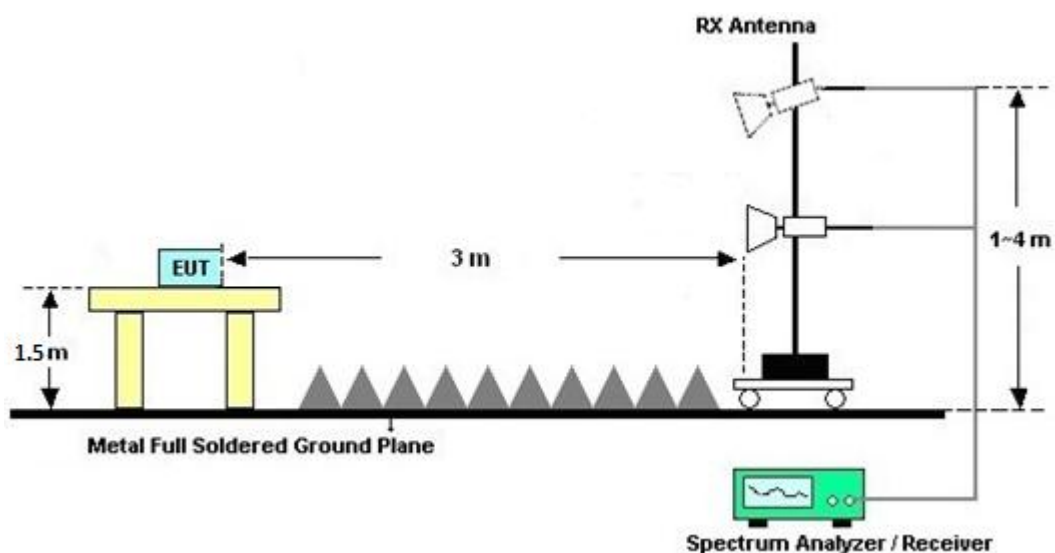

For radiated test above 18GHz

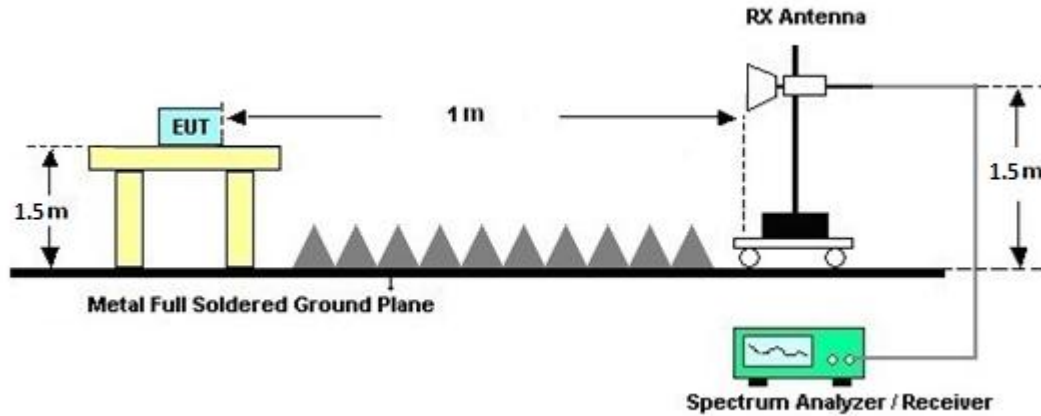

3.1.5 Duty Cycle

Please refer to Appendix B.

3.1.6 Test Result of Radiated Spurious Emissions

Please refer to Appendix A.



3.2 Antenna Requirements

3.2.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.2.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9kHz~30MHz	Dec. 21, 2025	Jul. 18, 2026 ~ Jul. 29, 2026	Dec. 20, 2026	Radiation (03CH22-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63304 & 002	30MHz~1GHz	Nov. 26, 2025	Jul. 18, 2026 ~ Jul. 29, 2026	Nov. 25, 2026	Radiation (03CH22-HY)
Amplifier	SONOMA	310N	421581	N/A	Jul. 12, 2026	Jul. 18, 2026 ~ Jul. 29, 2026	Jul. 11, 2027	Radiation (03CH22-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C04A18E N	1GHz~18GHz	May. 20, 2025	Jul. 18, 2026 ~ Jul. 29, 2026	May. 19, 2026	Radiation (03CH22-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	1230	18GHz~40GHz	Nov. 05, 2025	Jul. 18, 2026 ~ Jul. 29, 2026	Nov. 04, 2026	Radiation (03CH22-HY)
Amplifier	EMEC	EM01G18GA	060877	N/A	Sep. 26, 2025	Jul. 18, 2026 ~ Jul. 29, 2026	Sep. 25, 2026	Radiation (03CH22-HY)
Preamplifier	EMEC	EM18G40G	060872	18-40GHz	Dec. 02, 2025	Jul. 18, 2026 ~ Jul. 29, 2026	Dec. 01, 2026	Radiation (03CH22-HY)
Signal Analyzer	Keysight	N9010B	MY62170278	10Hz~44GHz	Sep. 22, 2025	Jul. 18, 2026 ~ Jul. 29, 2026	Sep. 21, 2026	Radiation (03CH22-HY)
Hygrometer	TECPEL	DTM-303A	TP211469	N/A	Dec. 15, 2025	Jul. 18, 2026 ~ Jul. 29, 2026	Dec. 14, 2026	Radiation (03CH22-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Jul. 18, 2026 ~ Jul. 29, 2026	N/A	Radiation (03CH22-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jul. 18, 2026 ~ Jul. 29, 2026	N/A	Radiation (03CH22-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jul. 18, 2026 ~ Jul. 29, 2026	N/A	Radiation (03CH22-HY)
Software	Audix	E3	RK-002347	N/A	N/A	Jul. 18, 2026 ~ Jul. 29, 2026	N/A	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 04, 2026	Jul. 18, 2026 ~ Jul. 29, 2026	Mar. 03, 2027	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER/EMCI	SUCOFLEX 102/EMCI01Y-KM-KM-500/EMCI01Y-KM-KM-9000	804611/2,240 914, 25043351,25 043350	30MHz~40GHz	May. 18, 2026	Jul. 18, 2026 ~ Jul. 29, 2026	May. 17, 2027	Radiation (03CH22-HY)

5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.4 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.7dB
--	-------

Appendix A. Radiated Spurious Emission Test Data

Test Engineer :	Ken Kuo、York Huang、Vic Li	Temperature :	19.7 ~ 23.1°C
		Relative Humidity :	56.4 ~ 64.5%

Note symbol

-L	Low channel location
-R	High channel location





A1.Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	9	802.11be EHT40	03	2422	MCS0		
	5.25-5.35	8+9	802.11be EHT20	64	5320	MSC0	-	-
	2400-2483.5	8	Bluetooth-LE GSKF	00	2402	500Kbps	-	-
Mode 2	2400-2483.5	9	802.11be EHT40	03	2422	MCS0		
	6.875-7.125	8+9	802.11be EHT160	207	6985	MSC0	-	-
	2400-2483.5	8	Bluetooth-LE GSKF	00	2402	500Kbps	-	-
Mode 3	2400-2483.5	8+9	802.11be EHT40	03	2422	MCS0	-	-
	5.25-5.35	8+9	802.11be EHT20	64	5320	MSC0	-	-
Mode 4	2400-2483.5	8+9	Bluetooth-LE GSKF	19	2440	2Mbps	-	-
	5.25-5.35	8+9	802.11be EHT20	64	5320	MSC0	-	-
Mode 5	6.875-7.125	8+9	802.11be EHT160	207	6985	MCS0	-	-
	5.25-5.35	8+9	802.11be EHT20	64	5320	MSC0	-	-
	2400-2483.5	8+9	Bluetooth-LE GSKF	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	8+9	802.11be EHT40	03	2422	MCS0	-	-
	6.875-7.125	8+9	802.11be EHT160	207	6985	MSC0	-	-
Mode 7	6.875-7.125	8+9	802.11be EHT160	207	6985	MCS0	-	-
	2400-2483.5	8+9	Bluetooth-LE GSKF	19	2440	2Mbps	-	-

A2.Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11be EHT40+ 802.11be EHT20+ Bluetooth-LE GSKF	03+64+00	-	-	-	-	-	-	-	-	Band Edge
			15960	44.78	54.00	-9.22	V	Avg.	Pass	-	Harmonic
2	802.11be EHT40 + 802.11be EHT160 + Bluetooth-LE GSKF	03+207+00	-	-	-	-	-	-	-	-	Band Edge
			7266	40.07	54.00	-13.93	H	Avg.	Pass	-	Harmonic
3	802.11be EHT40+ 802.11be EHT20	03+64	-	-	-	-	-	-	-	-	Band Edge
			15965	43.60	54.00	-10.40	H	Avg.	Pass	-	Harmonic
4	Bluetooth-LE GSKF+ 802.11be EHT20	19+64	-	-	-	-	-	-	-	-	Band Edge
			15960	44.86	54.00	-9.14	V	Avg.	Pass	-	Harmonic
5	802.11be EHT160+ 802.11be EHT20+ Bluetooth-LE GSKF	207+64+19	-	-	-	-	-	-	-	-	Band Edge
			15960	45.47	54.00	-8.53	H	Avg.	Pass	-	Harmonic
6	802.11be EHT40+ 802.11be EHT160	03+207	-	-	-	-	-	-	-	-	Band Edge
			7266	39.73	54.00	-14.27	H	Avg.	Pass	-	Harmonic
7	802.11be EHT160+ Bluetooth-LE GSKF	207+19	-	-	-	-	-	-	-	-	Band Edge
			7320	38.91	54.00	-15.09	V	Avg.	Pass	-	Harmonic

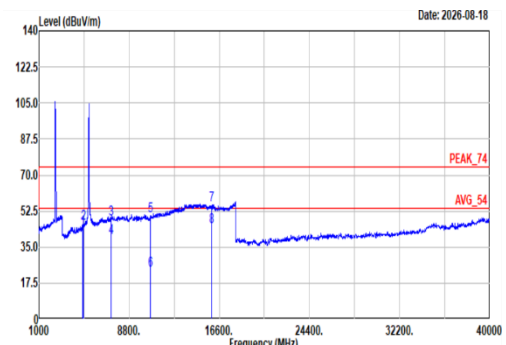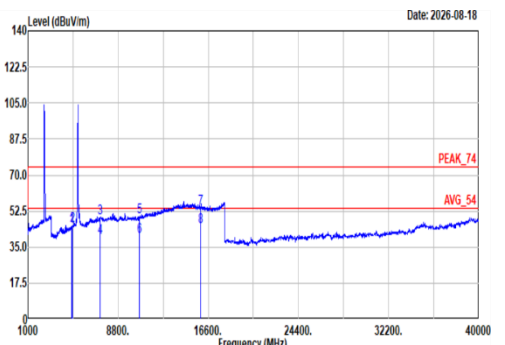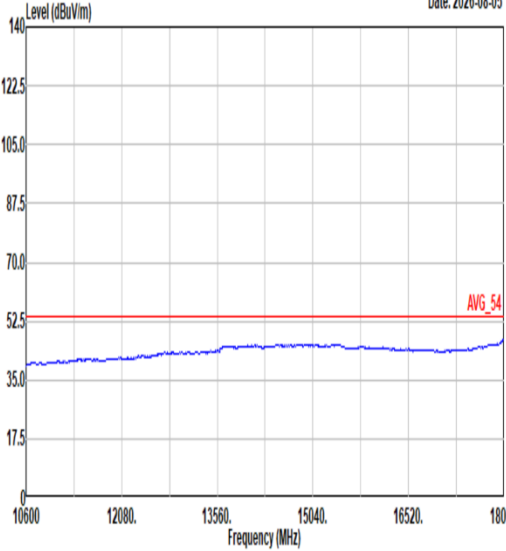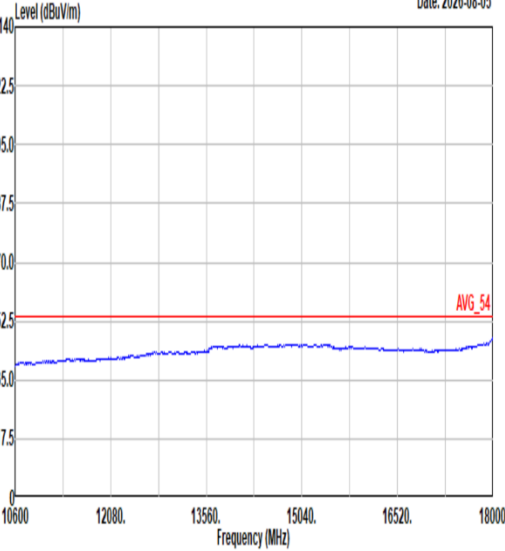

Mode	1																																																																																																																																																																																																																																																																															
Mode	Harmonic																																																																																																																																																																																																																																																																															
Mode	2400-2483.5_802.11be EHT40_CH03 + U-NII-2A_5.25-5.35_802.11be EHT20_CH64_5320MHz+2400-2483.5_Bluetooth-LE GSKF_CH00_2402MHz																																																																																																																																																																																																																																																																															
ANT	9 + (8+9) + 8																																																																																																																																																																																																																																																																															
Pol.	Horizontal						Vertical																																																																																																																																																																																																																																																																									
Peak	 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>43.83</td><td>74.00</td><td>-30.17</td><td>31.92</td><td>32.40</td><td>11.61</td><td>33.55</td><td>1.45</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4844.00</td><td>46.31</td><td>74.00</td><td>-27.69</td><td>34.46</td><td>32.40</td><td>11.64</td><td>33.55</td><td>1.36</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>7266.00</td><td>48.70</td><td>74.00</td><td>-25.30</td><td>32.29</td><td>37.06</td><td>14.04</td><td>36.00</td><td>1.31</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>7266.00</td><td>39.55</td><td>54.00</td><td>-14.45</td><td>23.14</td><td>37.06</td><td>14.04</td><td>36.00</td><td>1.31</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>5</td><td>10640.00</td><td>49.94</td><td>74.00</td><td>-24.06</td><td>33.47</td><td>37.66</td><td>17.08</td><td>39.57</td><td>1.30</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>10640.00</td><td>23.75</td><td>54.00</td><td>-30.25</td><td>7.28</td><td>37.66</td><td>17.08</td><td>39.57</td><td>1.30</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>7</td><td>15960.00</td><td>55.43</td><td>74.00</td><td>-18.57</td><td>36.18</td><td>41.46</td><td>21.06</td><td>45.28</td><td>2.01</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>8</td><td>15960.00</td><td>44.67</td><td>54.00</td><td>-9.33</td><td>25.42</td><td>41.46</td><td>21.06</td><td>45.28</td><td>2.01</td><td>--</td><td>--</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4804.00	43.83	74.00	-30.17	31.92	32.40	11.61	33.55	1.45	--	--	Peak	2	4844.00	46.31	74.00	-27.69	34.46	32.40	11.64	33.55	1.36	--	--	Peak	3	7266.00	48.70	74.00	-25.30	32.29	37.06	14.04	36.00	1.31	--	--	Peak	4	7266.00	39.55	54.00	-14.45	23.14	37.06	14.04	36.00	1.31	--	--	Average	5	10640.00	49.94	74.00	-24.06	33.47	37.66	17.08	39.57	1.30	--	--	Peak	6	10640.00	23.75	54.00	-30.25	7.28	37.66	17.08	39.57	1.30	--	--	Average	7	15960.00	55.43	74.00	-18.57	36.18	41.46	21.06	45.28	2.01	--	--	Peak	8	15960.00	44.67	54.00	-9.33	25.42	41.46	21.06	45.28	2.01	--	--	Average	 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>44.67</td><td>74.00</td><td>-29.33</td><td>32.76</td><td>32.40</td><td>11.61</td><td>33.55</td><td>1.45</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4844.00</td><td>45.55</td><td>74.00</td><td>-28.45</td><td>33.70</td><td>32.40</td><td>11.64</td><td>33.55</td><td>1.36</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>7264.00</td><td>49.10</td><td>74.00</td><td>-24.90</td><td>32.70</td><td>37.06</td><td>14.03</td><td>36.00</td><td>1.31</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>7264.00</td><td>39.56</td><td>54.00</td><td>-14.44</td><td>23.16</td><td>37.06</td><td>14.03</td><td>36.00</td><td>1.31</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>5</td><td>10640.00</td><td>49.53</td><td>74.00</td><td>-24.47</td><td>33.06</td><td>37.66</td><td>17.08</td><td>39.57</td><td>1.30</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>10640.00</td><td>40.25</td><td>54.00</td><td>-13.75</td><td>23.78</td><td>37.66</td><td>17.08</td><td>39.57</td><td>1.30</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>7</td><td>15960.00</td><td>53.97</td><td>74.00</td><td>-20.03</td><td>34.72</td><td>41.46</td><td>21.06</td><td>45.28</td><td>2.01</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>8</td><td>15960.00</td><td>44.78</td><td>54.00</td><td>-9.22</td><td>25.53</td><td>41.46</td><td>21.06</td><td>45.28</td><td>2.01</td><td>--</td><td>--</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4804.00	44.67	74.00	-29.33	32.76	32.40	11.61	33.55	1.45	--	--	Peak	2	4844.00	45.55	74.00	-28.45	33.70	32.40	11.64	33.55	1.36	--	--	Peak	3	7264.00	49.10	74.00	-24.90	32.70	37.06	14.03	36.00	1.31	--	--	Peak	4	7264.00	39.56	54.00	-14.44	23.16	37.06	14.03	36.00	1.31	--	--	Average	5	10640.00	49.53	74.00	-24.47	33.06	37.66	17.08	39.57	1.30	--	--	Peak	6	10640.00	40.25	54.00	-13.75	23.78	37.66	17.08	39.57	1.30	--	--	Average	7	15960.00	53.97	74.00	-20.03	34.72	41.46	21.06	45.28	2.01	--	--	Peak	8	15960.00	44.78	54.00	-9.22	25.53	41.46	21.06	45.28	2.01	--	--	Average
		Freq	Level	Limit	Line	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																					
1	4804.00	43.83	74.00	-30.17	31.92	32.40	11.61	33.55	1.45	--	--	Peak																																																																																																																																																																																																																																																																				
2	4844.00	46.31	74.00	-27.69	34.46	32.40	11.64	33.55	1.36	--	--	Peak																																																																																																																																																																																																																																																																				
3	7266.00	48.70	74.00	-25.30	32.29	37.06	14.04	36.00	1.31	--	--	Peak																																																																																																																																																																																																																																																																				
4	7266.00	39.55	54.00	-14.45	23.14	37.06	14.04	36.00	1.31	--	--	Average																																																																																																																																																																																																																																																																				
5	10640.00	49.94	74.00	-24.06	33.47	37.66	17.08	39.57	1.30	--	--	Peak																																																																																																																																																																																																																																																																				
6	10640.00	23.75	54.00	-30.25	7.28	37.66	17.08	39.57	1.30	--	--	Average																																																																																																																																																																																																																																																																				
7	15960.00	55.43	74.00	-18.57	36.18	41.46	21.06	45.28	2.01	--	--	Peak																																																																																																																																																																																																																																																																				
8	15960.00	44.67	54.00	-9.33	25.42	41.46	21.06	45.28	2.01	--	--	Average																																																																																																																																																																																																																																																																				
	Freq	Level	Limit	Line	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																					
1	4804.00	44.67	74.00	-29.33	32.76	32.40	11.61	33.55	1.45	--	--	Peak																																																																																																																																																																																																																																																																				
2	4844.00	45.55	74.00	-28.45	33.70	32.40	11.64	33.55	1.36	--	--	Peak																																																																																																																																																																																																																																																																				
3	7264.00	49.10	74.00	-24.90	32.70	37.06	14.03	36.00	1.31	--	--	Peak																																																																																																																																																																																																																																																																				
4	7264.00	39.56	54.00	-14.44	23.16	37.06	14.03	36.00	1.31	--	--	Average																																																																																																																																																																																																																																																																				
5	10640.00	49.53	74.00	-24.47	33.06	37.66	17.08	39.57	1.30	--	--	Peak																																																																																																																																																																																																																																																																				
6	10640.00	40.25	54.00	-13.75	23.78	37.66	17.08	39.57	1.30	--	--	Average																																																																																																																																																																																																																																																																				
7	15960.00	53.97	74.00	-20.03	34.72	41.46	21.06	45.28	2.01	--	--	Peak																																																																																																																																																																																																																																																																				
8	15960.00	44.78	54.00	-9.22	25.53	41.46	21.06	45.28	2.01	--	--	Average																																																																																																																																																																																																																																																																				
AVG	 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL						 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL																																																																																																																																																																																																																																																																									



Mode	2																																																																																																																																																																																																																	
	Harmonic																																																																																																																																																																																																																	
	2400-2483.5_802.11be EHT40_CH03 + U-NII-8_6.875-7.125_802.11be EHT160_CH207 +2400-2483.5_ Bluetooth-LE GSFK_CH00_2402MHz																																																																																																																																																																																																																	
ANT	9 + (8+9) + 8																																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																																
Peak	Level (dBuV/m) Date: 2026-08-18 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4804.00</td><td>44.61</td><td>74.00</td><td>-29.39</td><td>32.70</td><td>32.40</td><td>11.61</td><td>33.55</td><td>1.45</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4844.00</td><td>45.54</td><td>74.00</td><td>-28.46</td><td>33.69</td><td>32.40</td><td>11.64</td><td>33.55</td><td>1.36</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>7266.00</td><td>49.98</td><td>74.00</td><td>-24.02</td><td>33.81</td><td>37.06</td><td>14.04</td><td>36.00</td><td>1.07</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>7266.00</td><td>40.07</td><td>54.00</td><td>-13.93</td><td>23.90</td><td>37.06</td><td>14.04</td><td>36.00</td><td>1.07</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>5</td><td>13970.00</td><td>55.81</td><td>88.20</td><td>-32.39</td><td>34.83</td><td>41.96</td><td>19.55</td><td>42.39</td><td>0.37</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>20955.00</td><td>37.55</td><td>74.00</td><td>-36.45</td><td>48.26</td><td>38.62</td><td>24.28</td><td>64.07</td><td>-9.54</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4804.00	44.61	74.00	-29.39	32.70	32.40	11.61	33.55	1.45	--	--	Peak	2	4844.00	45.54	74.00	-28.46	33.69	32.40	11.64	33.55	1.36	--	--	Peak	3	7266.00	49.98	74.00	-24.02	33.81	37.06	14.04	36.00	1.07	--	--	Peak	4	7266.00	40.07	54.00	-13.93	23.90	37.06	14.04	36.00	1.07	--	--	Average	5	13970.00	55.81	88.20	-32.39	34.83	41.96	19.55	42.39	0.37	--	--	Peak	6	20955.00	37.55	74.00	-36.45	48.26	38.62	24.28	64.07	-9.54	--	--	Peak	Level (dBuV/m) Date: 2026-08-18 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4804.00</td><td>45.21</td><td>74.00</td><td>-28.79</td><td>33.30</td><td>32.40</td><td>11.61</td><td>33.55</td><td>1.45</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4844.00</td><td>45.11</td><td>74.00</td><td>-28.89</td><td>33.26</td><td>32.40</td><td>11.64</td><td>33.55</td><td>1.36</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>7266.00</td><td>48.97</td><td>74.00</td><td>-25.03</td><td>32.80</td><td>37.06</td><td>14.04</td><td>36.00</td><td>1.07</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>7266.00</td><td>39.60</td><td>54.00</td><td>-14.40</td><td>23.43</td><td>37.06</td><td>14.04</td><td>36.00</td><td>1.07</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>5</td><td>13970.00</td><td>56.54</td><td>88.20</td><td>-31.66</td><td>35.56</td><td>41.96</td><td>19.55</td><td>42.39</td><td>0.37</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>20955.00</td><td>37.37</td><td>74.00</td><td>-36.63</td><td>48.08</td><td>38.62</td><td>24.28</td><td>64.07</td><td>-9.54</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4804.00	45.21	74.00	-28.79	33.30	32.40	11.61	33.55	1.45	--	--	Peak	2	4844.00	45.11	74.00	-28.89	33.26	32.40	11.64	33.55	1.36	--	--	Peak	3	7266.00	48.97	74.00	-25.03	32.80	37.06	14.04	36.00	1.07	--	--	Peak	4	7266.00	39.60	54.00	-14.40	23.43	37.06	14.04	36.00	1.07	--	--	Average	5	13970.00	56.54	88.20	-31.66	35.56	41.96	19.55	42.39	0.37	--	--	Peak	6	20955.00	37.37	74.00	-36.63	48.08	38.62	24.28	64.07	-9.54	--	--	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																							
1	4804.00	44.61	74.00	-29.39	32.70	32.40	11.61	33.55	1.45	--	--	Peak																																																																																																																																																																																																						
2	4844.00	45.54	74.00	-28.46	33.69	32.40	11.64	33.55	1.36	--	--	Peak																																																																																																																																																																																																						
3	7266.00	49.98	74.00	-24.02	33.81	37.06	14.04	36.00	1.07	--	--	Peak																																																																																																																																																																																																						
4	7266.00	40.07	54.00	-13.93	23.90	37.06	14.04	36.00	1.07	--	--	Average																																																																																																																																																																																																						
5	13970.00	55.81	88.20	-32.39	34.83	41.96	19.55	42.39	0.37	--	--	Peak																																																																																																																																																																																																						
6	20955.00	37.55	74.00	-36.45	48.26	38.62	24.28	64.07	-9.54	--	--	Peak																																																																																																																																																																																																						
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																							
1	4804.00	45.21	74.00	-28.79	33.30	32.40	11.61	33.55	1.45	--	--	Peak																																																																																																																																																																																																						
2	4844.00	45.11	74.00	-28.89	33.26	32.40	11.64	33.55	1.36	--	--	Peak																																																																																																																																																																																																						
3	7266.00	48.97	74.00	-25.03	32.80	37.06	14.04	36.00	1.07	--	--	Peak																																																																																																																																																																																																						
4	7266.00	39.60	54.00	-14.40	23.43	37.06	14.04	36.00	1.07	--	--	Average																																																																																																																																																																																																						
5	13970.00	56.54	88.20	-31.66	35.56	41.96	19.55	42.39	0.37	--	--	Peak																																																																																																																																																																																																						
6	20955.00	37.37	74.00	-36.63	48.08	38.62	24.28	64.07	-9.54	--	--	Peak																																																																																																																																																																																																						
AVG	Level (dBuV/m) Date: 2026-08-05 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL	Level (dBuV/m) Date: 2026-08-05 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL																																																																																																																																																																																																																



Mode	3	
	Harmonic	
	2400-2483.5_802.11be EHT40_CH03 + U-NII-2A_5.25-5.35_802.11be EHT20_CH64_5320MHz	
ANT	(8+9) + (8+9)	
Pol.	Horizontal	Vertical
Peak		



Mode	4																																																																																																																																																																																																									
	Harmonic																																																																																																																																																																																																									
	2400-2483.5_Bluetooth-LE GSKF_CH19 + U-NII-2A _ 5.25-5.35 _ 802.11be EHT20 _CH64_ 5320MHz																																																																																																																																																																																																									
ANT	(8+9) + (8+9)																																																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																																																								
Peak	Level (dBuV/m) Date: 2026-08-06 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4880.00</td><td>44.59</td><td>74.00</td><td>-29.41</td><td>32.74</td><td>32.46</td><td>11.66</td><td>33.55</td><td>1.28</td><td>-- Peak</td></tr><tr><td>2 7320.00</td><td>48.35</td><td>74.00</td><td>-25.65</td><td>31.74</td><td>37.28</td><td>14.08</td><td>36.04</td><td>1.29</td><td>-- Peak</td></tr><tr><td>3 7320.00</td><td>39.79</td><td>54.00</td><td>-14.21</td><td>23.18</td><td>37.28</td><td>14.08</td><td>36.04</td><td>1.29</td><td>-- Average</td></tr><tr><td>4 10640.00</td><td>48.70</td><td>74.00</td><td>-25.30</td><td>32.23</td><td>37.66</td><td>17.08</td><td>39.57</td><td>1.30</td><td>-- Peak</td></tr><tr><td>5 10640.00</td><td>40.37</td><td>54.00</td><td>-13.63</td><td>23.90</td><td>37.66</td><td>17.08</td><td>39.57</td><td>1.30</td><td>-- Average</td></tr><tr><td>6 15960.00</td><td>53.73</td><td>74.00</td><td>-20.27</td><td>34.48</td><td>41.46</td><td>21.06</td><td>45.28</td><td>2.01</td><td>-- Peak</td></tr><tr><td>7 15960.00</td><td>44.77</td><td>54.00</td><td>-9.23</td><td>25.52</td><td>41.46</td><td>21.06</td><td>45.28</td><td>2.01</td><td>-- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 4880.00	44.59	74.00	-29.41	32.74	32.46	11.66	33.55	1.28	-- Peak	2 7320.00	48.35	74.00	-25.65	31.74	37.28	14.08	36.04	1.29	-- Peak	3 7320.00	39.79	54.00	-14.21	23.18	37.28	14.08	36.04	1.29	-- Average	4 10640.00	48.70	74.00	-25.30	32.23	37.66	17.08	39.57	1.30	-- Peak	5 10640.00	40.37	54.00	-13.63	23.90	37.66	17.08	39.57	1.30	-- Average	6 15960.00	53.73	74.00	-20.27	34.48	41.46	21.06	45.28	2.01	-- Peak	7 15960.00	44.77	54.00	-9.23	25.52	41.46	21.06	45.28	2.01	-- Average	Level (dBuV/m) Date: 2026-08-06 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_260520 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4880.00</td><td>44.56</td><td>74.00</td><td>-29.44</td><td>32.71</td><td>32.46</td><td>11.66</td><td>33.55</td><td>1.28</td><td>-- Peak</td></tr><tr><td>2 7320.00</td><td>49.91</td><td>74.00</td><td>-24.09</td><td>33.30</td><td>37.28</td><td>14.08</td><td>36.04</td><td>1.29</td><td>-- Peak</td></tr><tr><td>3 7320.00</td><td>39.64</td><td>54.00</td><td>-14.36</td><td>23.03</td><td>37.28</td><td>14.08</td><td>36.04</td><td>1.29</td><td>-- Average</td></tr><tr><td>4 10640.00</td><td>49.38</td><td>74.00</td><td>-24.62</td><td>32.91</td><td>37.66</td><td>17.08</td><td>39.57</td><td>1.30</td><td>-- Peak</td></tr><tr><td>5 10640.00</td><td>40.15</td><td>54.00</td><td>-13.85</td><td>23.68</td><td>37.66</td><td>17.08</td><td>39.57</td><td>1.30</td><td>-- Average</td></tr><tr><td>6 15960.00</td><td>53.36</td><td>74.00</td><td>-20.64</td><td>34.11</td><td>41.46</td><td>21.06</td><td>45.28</td><td>2.01</td><td>-- Peak</td></tr><tr><td>7 15960.00</td><td>44.86</td><td>54.00</td><td>-9.14</td><td>25.61</td><td>41.46</td><td>21.06</td><td>45.28</td><td>2.01</td><td>-- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 4880.00	44.56	74.00	-29.44	32.71	32.46	11.66	33.55	1.28	-- Peak	2 7320.00	49.91	74.00	-24.09	33.30	37.28	14.08	36.04	1.29	-- Peak	3 7320.00	39.64	54.00	-14.36	23.03	37.28	14.08	36.04	1.29	-- Average	4 10640.00	49.38	74.00	-24.62	32.91	37.66	17.08	39.57	1.30	-- Peak	5 10640.00	40.15	54.00	-13.85	23.68	37.66	17.08	39.57	1.30	-- Average	6 15960.00	53.36	74.00	-20.64	34.11	41.46	21.06	45.28	2.01	-- Peak	7 15960.00	44.86	54.00	-9.14	25.61	41.46	21.06	45.28	2.01	-- Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss	Factor	Factor																																																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																	
1 4880.00	44.59	74.00	-29.41	32.74	32.46	11.66	33.55	1.28	-- Peak																																																																																																																																																																																																	
2 7320.00	48.35	74.00	-25.65	31.74	37.28	14.08	36.04	1.29	-- Peak																																																																																																																																																																																																	
3 7320.00	39.79	54.00	-14.21	23.18	37.28	14.08	36.04	1.29	-- Average																																																																																																																																																																																																	
4 10640.00	48.70	74.00	-25.30	32.23	37.66	17.08	39.57	1.30	-- Peak																																																																																																																																																																																																	
5 10640.00	40.37	54.00	-13.63	23.90	37.66	17.08	39.57	1.30	-- Average																																																																																																																																																																																																	
6 15960.00	53.73	74.00	-20.27	34.48	41.46	21.06	45.28	2.01	-- Peak																																																																																																																																																																																																	
7 15960.00	44.77	54.00	-9.23	25.52	41.46	21.06	45.28	2.01	-- Average																																																																																																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss	Factor	Factor																																																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																	
1 4880.00	44.56	74.00	-29.44	32.71	32.46	11.66	33.55	1.28	-- Peak																																																																																																																																																																																																	
2 7320.00	49.91	74.00	-24.09	33.30	37.28	14.08	36.04	1.29	-- Peak																																																																																																																																																																																																	
3 7320.00	39.64	54.00	-14.36	23.03	37.28	14.08	36.04	1.29	-- Average																																																																																																																																																																																																	
4 10640.00	49.38	74.00	-24.62	32.91	37.66	17.08	39.57	1.30	-- Peak																																																																																																																																																																																																	
5 10640.00	40.15	54.00	-13.85	23.68	37.66	17.08	39.57	1.30	-- Average																																																																																																																																																																																																	
6 15960.00	53.36	74.00	-20.64	34.11	41.46	21.06	45.28	2.01	-- Peak																																																																																																																																																																																																	
7 15960.00	44.86	54.00	-9.14	25.61	41.46	21.06	45.28	2.01	-- Average																																																																																																																																																																																																	
AVG	Level (dBuV/m) Date: 2026-08-06 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL	Level (dBuV/m) Date: 2026-08-06 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL																																																																																																																																																																																																								



Mode	5																																																																																																																																																																																																																																																	
	Harmonic																																																																																																																																																																																																																																																	
	U-NII-8_6.875-7.125_802.11be EHT160_CH207 +U-NII-2A_5.25-5.35_802.11be EHT20 _CH64_5320MHz+2400-2483.5_Bluetooth-LE GSKF_CH19_2440MHz																																																																																																																																																																																																																																																	
ANT	(8+9) + (8+9) + (8+9)																																																																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																
Peak	Level (dBuV/m) Date: 2026-08-18 Site : 03CH22-HY Condition: PEAK(UNITI) 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4880.00</td><td>44.43</td><td>74.00</td><td>-29.57</td><td>32.58</td><td>32.46</td><td>11.66</td><td>33.55</td><td>1.28</td><td>-- -- Peak</td></tr><tr><td>2 7320.00</td><td>49.00</td><td>74.00</td><td>-25.00</td><td>32.60</td><td>37.28</td><td>14.08</td><td>36.04</td><td>1.08</td><td>-- -- Peak</td></tr><tr><td>3 7320.00</td><td>39.17</td><td>54.00</td><td>-14.83</td><td>22.77</td><td>37.28</td><td>14.08</td><td>36.04</td><td>1.08</td><td>-- -- Average</td></tr><tr><td>4 10640.00</td><td>50.67</td><td>74.00</td><td>-23.33</td><td>33.61</td><td>37.66</td><td>17.00</td><td>39.57</td><td>0.61</td><td>-- -- Peak</td></tr><tr><td>5 10640.00</td><td>41.11</td><td>54.00</td><td>-12.89</td><td>24.05</td><td>37.66</td><td>17.00</td><td>39.57</td><td>0.61</td><td>-- -- Average</td></tr><tr><td>6 13970.00</td><td>54.78</td><td>68.20</td><td>-13.42</td><td>33.80</td><td>41.96</td><td>19.55</td><td>42.39</td><td>0.37</td><td>-- -- Peak</td></tr><tr><td>7 15960.00</td><td>55.44</td><td>74.00</td><td>-18.56</td><td>35.79</td><td>41.46</td><td>21.06</td><td>45.28</td><td>0.65</td><td>-- -- Peak</td></tr><tr><td>8 15960.00</td><td>45.47</td><td>54.00</td><td>-8.53</td><td>25.82</td><td>41.46</td><td>21.06</td><td>45.28</td><td>0.65</td><td>-- -- Average</td></tr><tr><td>9 20955.00</td><td>37.52</td><td>74.00</td><td>-36.48</td><td>48.23</td><td>38.62</td><td>24.28</td><td>64.07</td><td>-9.54</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4880.00	44.43	74.00	-29.57	32.58	32.46	11.66	33.55	1.28	-- -- Peak	2 7320.00	49.00	74.00	-25.00	32.60	37.28	14.08	36.04	1.08	-- -- Peak	3 7320.00	39.17	54.00	-14.83	22.77	37.28	14.08	36.04	1.08	-- -- Average	4 10640.00	50.67	74.00	-23.33	33.61	37.66	17.00	39.57	0.61	-- -- Peak	5 10640.00	41.11	54.00	-12.89	24.05	37.66	17.00	39.57	0.61	-- -- Average	6 13970.00	54.78	68.20	-13.42	33.80	41.96	19.55	42.39	0.37	-- -- Peak	7 15960.00	55.44	74.00	-18.56	35.79	41.46	21.06	45.28	0.65	-- -- Peak	8 15960.00	45.47	54.00	-8.53	25.82	41.46	21.06	45.28	0.65	-- -- Average	9 20955.00	37.52	74.00	-36.48	48.23	38.62	24.28	64.07	-9.54	-- -- Peak	Level (dBuV/m) Date: 2026-08-18 Site : 03CH22-HY Condition: PEAK(UNITI) 3m DRH18-E_LE2C04A18EN_260520 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4880.00</td><td>44.43</td><td>74.00</td><td>-29.57</td><td>32.58</td><td>32.46</td><td>11.66</td><td>33.55</td><td>1.28</td><td>-- -- Peak</td></tr><tr><td>2 7320.00</td><td>48.00</td><td>74.00</td><td>-26.00</td><td>31.60</td><td>37.28</td><td>14.08</td><td>36.04</td><td>1.08</td><td>-- -- Peak</td></tr><tr><td>3 7320.00</td><td>38.74</td><td>54.00</td><td>-15.26</td><td>22.34</td><td>37.28</td><td>14.08</td><td>36.04</td><td>1.08</td><td>-- -- Average</td></tr><tr><td>4 10640.00</td><td>50.04</td><td>74.00</td><td>-23.96</td><td>32.98</td><td>37.66</td><td>17.00</td><td>39.57</td><td>0.61</td><td>-- -- Peak</td></tr><tr><td>5 10640.00</td><td>40.95</td><td>54.00</td><td>-13.05</td><td>23.89</td><td>37.66</td><td>17.00</td><td>39.57</td><td>0.61</td><td>-- -- Average</td></tr><tr><td>6 13970.00</td><td>54.77</td><td>68.20</td><td>-13.43</td><td>33.79</td><td>41.96</td><td>19.55</td><td>42.39</td><td>0.37</td><td>-- -- Peak</td></tr><tr><td>7 15960.00</td><td>54.43</td><td>74.00</td><td>-19.57</td><td>34.78</td><td>41.46</td><td>21.06</td><td>45.28</td><td>0.65</td><td>-- -- Peak</td></tr><tr><td>8 15960.00</td><td>45.21</td><td>54.00</td><td>-8.79</td><td>25.56</td><td>41.46</td><td>21.06</td><td>45.28</td><td>0.65</td><td>-- -- Average</td></tr><tr><td>9 20955.00</td><td>37.69</td><td>74.00</td><td>-36.31</td><td>48.40</td><td>38.62</td><td>24.28</td><td>64.07</td><td>-9.54</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4880.00	44.43	74.00	-29.57	32.58	32.46	11.66	33.55	1.28	-- -- Peak	2 7320.00	48.00	74.00	-26.00	31.60	37.28	14.08	36.04	1.08	-- -- Peak	3 7320.00	38.74	54.00	-15.26	22.34	37.28	14.08	36.04	1.08	-- -- Average	4 10640.00	50.04	74.00	-23.96	32.98	37.66	17.00	39.57	0.61	-- -- Peak	5 10640.00	40.95	54.00	-13.05	23.89	37.66	17.00	39.57	0.61	-- -- Average	6 13970.00	54.77	68.20	-13.43	33.79	41.96	19.55	42.39	0.37	-- -- Peak	7 15960.00	54.43	74.00	-19.57	34.78	41.46	21.06	45.28	0.65	-- -- Peak	8 15960.00	45.21	54.00	-8.79	25.56	41.46	21.06	45.28	0.65	-- -- Average	9 20955.00	37.69	74.00	-36.31	48.40	38.62	24.28	64.07	-9.54	-- -- Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																																																																									
1 4880.00	44.43	74.00	-29.57	32.58	32.46	11.66	33.55	1.28	-- -- Peak																																																																																																																																																																																																																																									
2 7320.00	49.00	74.00	-25.00	32.60	37.28	14.08	36.04	1.08	-- -- Peak																																																																																																																																																																																																																																									
3 7320.00	39.17	54.00	-14.83	22.77	37.28	14.08	36.04	1.08	-- -- Average																																																																																																																																																																																																																																									
4 10640.00	50.67	74.00	-23.33	33.61	37.66	17.00	39.57	0.61	-- -- Peak																																																																																																																																																																																																																																									
5 10640.00	41.11	54.00	-12.89	24.05	37.66	17.00	39.57	0.61	-- -- Average																																																																																																																																																																																																																																									
6 13970.00	54.78	68.20	-13.42	33.80	41.96	19.55	42.39	0.37	-- -- Peak																																																																																																																																																																																																																																									
7 15960.00	55.44	74.00	-18.56	35.79	41.46	21.06	45.28	0.65	-- -- Peak																																																																																																																																																																																																																																									
8 15960.00	45.47	54.00	-8.53	25.82	41.46	21.06	45.28	0.65	-- -- Average																																																																																																																																																																																																																																									
9 20955.00	37.52	74.00	-36.48	48.23	38.62	24.28	64.07	-9.54	-- -- Peak																																																																																																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																																																																									
1 4880.00	44.43	74.00	-29.57	32.58	32.46	11.66	33.55	1.28	-- -- Peak																																																																																																																																																																																																																																									
2 7320.00	48.00	74.00	-26.00	31.60	37.28	14.08	36.04	1.08	-- -- Peak																																																																																																																																																																																																																																									
3 7320.00	38.74	54.00	-15.26	22.34	37.28	14.08	36.04	1.08	-- -- Average																																																																																																																																																																																																																																									
4 10640.00	50.04	74.00	-23.96	32.98	37.66	17.00	39.57	0.61	-- -- Peak																																																																																																																																																																																																																																									
5 10640.00	40.95	54.00	-13.05	23.89	37.66	17.00	39.57	0.61	-- -- Average																																																																																																																																																																																																																																									
6 13970.00	54.77	68.20	-13.43	33.79	41.96	19.55	42.39	0.37	-- -- Peak																																																																																																																																																																																																																																									
7 15960.00	54.43	74.00	-19.57	34.78	41.46	21.06	45.28	0.65	-- -- Peak																																																																																																																																																																																																																																									
8 15960.00	45.21	54.00	-8.79	25.56	41.46	21.06	45.28	0.65	-- -- Average																																																																																																																																																																																																																																									
9 20955.00	37.69	74.00	-36.31	48.40	38.62	24.28	64.07	-9.54	-- -- Peak																																																																																																																																																																																																																																									
AVG	Level (dBuV/m) Date: 2026-08-06 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL	Level (dBuV/m) Date: 2026-08-06 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL																																																																																																																																																																																																																																																



Mode	6																																																																																																																																																																	
	Harmonic																																																																																																																																																																	
	2400-2483.5_802.11be EHT40_CH03 + U-NII-8_6.875-7.125_802.11be EHT160_CH207																																																																																																																																																																	
ANT	(8+9) + (8+9)																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																
Peak	Level (dBuV/m) Date: 2026-08-18 Site : 03CH22-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>4844.00</td><td>45.06</td><td>74.00</td><td>-28.94</td><td>33.21</td><td>32.40</td><td>11.64</td><td>33.55</td><td>1.36</td></tr><tr><td>2</td><td>7266.00</td><td>49.56</td><td>74.00</td><td>-24.44</td><td>33.39</td><td>37.06</td><td>14.04</td><td>36.00</td><td>1.07</td></tr><tr><td>3</td><td>7266.00</td><td>39.73</td><td>54.00</td><td>-14.27</td><td>23.56</td><td>37.06</td><td>14.04</td><td>36.00</td><td>1.07</td></tr><tr><td>4</td><td>13970.00</td><td>55.14</td><td>88.20</td><td>-33.06</td><td>34.16</td><td>41.96</td><td>19.55</td><td>42.39</td><td>0.37</td></tr><tr><td>5</td><td>20955.00</td><td>38.43</td><td>74.00</td><td>-35.57</td><td>49.14</td><td>38.62</td><td>24.28</td><td>64.07</td><td>-9.54</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	4844.00	45.06	74.00	-28.94	33.21	32.40	11.64	33.55	1.36	2	7266.00	49.56	74.00	-24.44	33.39	37.06	14.04	36.00	1.07	3	7266.00	39.73	54.00	-14.27	23.56	37.06	14.04	36.00	1.07	4	13970.00	55.14	88.20	-33.06	34.16	41.96	19.55	42.39	0.37	5	20955.00	38.43	74.00	-35.57	49.14	38.62	24.28	64.07	-9.54	Level (dBuV/m) Date: 2026-08-18 Site : 03CH22-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C04A18EN_260520 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>4844.00</td><td>44.51</td><td>74.00</td><td>-29.49</td><td>32.66</td><td>32.40</td><td>11.64</td><td>33.55</td><td>1.36</td></tr><tr><td>2</td><td>7266.00</td><td>49.03</td><td>74.00</td><td>-24.97</td><td>32.86</td><td>37.06</td><td>14.04</td><td>36.00</td><td>1.07</td></tr><tr><td>3</td><td>7266.00</td><td>39.31</td><td>54.00</td><td>-14.69</td><td>23.14</td><td>37.06</td><td>14.04</td><td>36.00</td><td>1.07</td></tr><tr><td>4</td><td>13970.00</td><td>54.74</td><td>88.20</td><td>-33.46</td><td>33.76</td><td>41.96</td><td>19.55</td><td>42.39</td><td>0.37</td></tr><tr><td>5</td><td>20955.00</td><td>37.54</td><td>74.00</td><td>-36.46</td><td>48.25</td><td>38.62</td><td>24.28</td><td>64.07</td><td>-9.54</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	4844.00	44.51	74.00	-29.49	32.66	32.40	11.64	33.55	1.36	2	7266.00	49.03	74.00	-24.97	32.86	37.06	14.04	36.00	1.07	3	7266.00	39.31	54.00	-14.69	23.14	37.06	14.04	36.00	1.07	4	13970.00	54.74	88.20	-33.46	33.76	41.96	19.55	42.39	0.37	5	20955.00	37.54	74.00	-36.46	48.25	38.62	24.28	64.07	-9.54
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																																																									
1	4844.00	45.06	74.00	-28.94	33.21	32.40	11.64	33.55	1.36																																																																																																																																																									
2	7266.00	49.56	74.00	-24.44	33.39	37.06	14.04	36.00	1.07																																																																																																																																																									
3	7266.00	39.73	54.00	-14.27	23.56	37.06	14.04	36.00	1.07																																																																																																																																																									
4	13970.00	55.14	88.20	-33.06	34.16	41.96	19.55	42.39	0.37																																																																																																																																																									
5	20955.00	38.43	74.00	-35.57	49.14	38.62	24.28	64.07	-9.54																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																																																									
1	4844.00	44.51	74.00	-29.49	32.66	32.40	11.64	33.55	1.36																																																																																																																																																									
2	7266.00	49.03	74.00	-24.97	32.86	37.06	14.04	36.00	1.07																																																																																																																																																									
3	7266.00	39.31	54.00	-14.69	23.14	37.06	14.04	36.00	1.07																																																																																																																																																									
4	13970.00	54.74	88.20	-33.46	33.76	41.96	19.55	42.39	0.37																																																																																																																																																									
5	20955.00	37.54	74.00	-36.46	48.25	38.62	24.28	64.07	-9.54																																																																																																																																																									
AVG	Level (dBuV/m) Date: 2026-08-06 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL	Level (dBuV/m) Date: 2026-08-06 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL																																																																																																																																																																



Mode	7																																																																																																																																																																	
	Harmonic																																																																																																																																																																	
	U-NII-8_6.875-7.125_802.11be EHT160_CH207 +2400-2483.5_ Bluetooth-LE GSKF_CH19_2440MHz																																																																																																																																																																	
ANT	(8+9) + (8+9)																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																
Peak	Level (dBuV/m) Date: 2026-08-18 Site : 03CH22-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4880.00</td><td>45.73</td><td>74.00</td><td>-28.27</td><td>33.88</td><td>32.46</td><td>11.66</td><td>33.55</td><td>1.28</td><td>-- -- Peak</td></tr><tr><td>2 7320.00</td><td>48.62</td><td>74.00</td><td>-25.38</td><td>32.22</td><td>37.28</td><td>14.08</td><td>36.04</td><td>1.08</td><td>-- -- Peak</td></tr><tr><td>3 7320.00</td><td>38.74</td><td>54.00</td><td>-15.26</td><td>22.34</td><td>37.28</td><td>14.08</td><td>36.04</td><td>1.08</td><td>-- -- Average</td></tr><tr><td>4 13970.00</td><td>55.32</td><td>88.20</td><td>-32.88</td><td>34.34</td><td>41.96</td><td>19.55</td><td>42.39</td><td>0.37</td><td>-- -- Peak</td></tr><tr><td>5 20955.00</td><td>37.84</td><td>74.00</td><td>-36.16</td><td>48.55</td><td>38.62</td><td>24.28</td><td>64.07</td><td>-9.54</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4880.00	45.73	74.00	-28.27	33.88	32.46	11.66	33.55	1.28	-- -- Peak	2 7320.00	48.62	74.00	-25.38	32.22	37.28	14.08	36.04	1.08	-- -- Peak	3 7320.00	38.74	54.00	-15.26	22.34	37.28	14.08	36.04	1.08	-- -- Average	4 13970.00	55.32	88.20	-32.88	34.34	41.96	19.55	42.39	0.37	-- -- Peak	5 20955.00	37.84	74.00	-36.16	48.55	38.62	24.28	64.07	-9.54	-- -- Peak	Level (dBuV/m) Date: 2026-08-18 Site : 03CH22-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C04A18EN_260520 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4880.00</td><td>45.26</td><td>74.00</td><td>-28.74</td><td>33.41</td><td>32.46</td><td>11.66</td><td>33.55</td><td>1.28</td><td>-- -- Peak</td></tr><tr><td>2 7320.00</td><td>48.53</td><td>74.00</td><td>-25.47</td><td>32.13</td><td>37.28</td><td>14.08</td><td>36.04</td><td>1.08</td><td>-- -- Peak</td></tr><tr><td>3 7320.00</td><td>38.91</td><td>54.00</td><td>-15.09</td><td>22.51</td><td>37.28</td><td>14.08</td><td>36.04</td><td>1.08</td><td>-- -- Average</td></tr><tr><td>4 13970.00</td><td>55.44</td><td>88.20</td><td>-32.76</td><td>34.46</td><td>41.96</td><td>19.55</td><td>42.39</td><td>0.37</td><td>-- -- Peak</td></tr><tr><td>5 20955.00</td><td>37.49</td><td>74.00</td><td>-36.51</td><td>48.20</td><td>38.62</td><td>24.28</td><td>64.07</td><td>-9.54</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4880.00	45.26	74.00	-28.74	33.41	32.46	11.66	33.55	1.28	-- -- Peak	2 7320.00	48.53	74.00	-25.47	32.13	37.28	14.08	36.04	1.08	-- -- Peak	3 7320.00	38.91	54.00	-15.09	22.51	37.28	14.08	36.04	1.08	-- -- Average	4 13970.00	55.44	88.20	-32.76	34.46	41.96	19.55	42.39	0.37	-- -- Peak	5 20955.00	37.49	74.00	-36.51	48.20	38.62	24.28	64.07	-9.54	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																									
1 4880.00	45.73	74.00	-28.27	33.88	32.46	11.66	33.55	1.28	-- -- Peak																																																																																																																																																									
2 7320.00	48.62	74.00	-25.38	32.22	37.28	14.08	36.04	1.08	-- -- Peak																																																																																																																																																									
3 7320.00	38.74	54.00	-15.26	22.34	37.28	14.08	36.04	1.08	-- -- Average																																																																																																																																																									
4 13970.00	55.32	88.20	-32.88	34.34	41.96	19.55	42.39	0.37	-- -- Peak																																																																																																																																																									
5 20955.00	37.84	74.00	-36.16	48.55	38.62	24.28	64.07	-9.54	-- -- Peak																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																									
1 4880.00	45.26	74.00	-28.74	33.41	32.46	11.66	33.55	1.28	-- -- Peak																																																																																																																																																									
2 7320.00	48.53	74.00	-25.47	32.13	37.28	14.08	36.04	1.08	-- -- Peak																																																																																																																																																									
3 7320.00	38.91	54.00	-15.09	22.51	37.28	14.08	36.04	1.08	-- -- Average																																																																																																																																																									
4 13970.00	55.44	88.20	-32.76	34.46	41.96	19.55	42.39	0.37	-- -- Peak																																																																																																																																																									
5 20955.00	37.49	74.00	-36.51	48.20	38.62	24.28	64.07	-9.54	-- -- Peak																																																																																																																																																									
AVG	Level (dBuV/m) Date: 2026-08-06 Site : 03CH22-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL	Level (dBuV/m) Date: 2026-08-06 Site : 03CH22-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C04A18EN_260520 VERTICAL																																																																																																																																																																



Appendix B. Duty Cycle Plots

Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 500kbps	57.33	1075	0.93	1kHz
Bluetooth - LE for 2Mbps	33.43	208.8	4.79	5.1kHz
802.11be EHT40	100.00	-	-	10Hz
5GHz 802.11be EHT20 Full RU	99.63	-	-	10Hz
6GHz 802.11be EHT160 Full RU	100.00	-	-	10Hz

