

Shenzhen Doke Communication Co., Ltd

1301-1302, Block B, Weidonglong Business Building, No. 2113
Meilong Avenue, Qinghua Community, Longhua Street, Longhua
District, Shenzhen, China

Bluetooth antenna of PCB on-board specification

V1.0

1、Index

Item	Content	Page	Remark
1	Index	1	
2	Specification	2	
3	Return Loss	2	
4	Radiation Pattern	3-4	


Document Type: PCB Antenna
Document Version: V1.0
Release Date: Aug 12, 2023

Manufacturer: HJSIP

2、Specification

Product Number: PCB Antenna

Sample Photo:

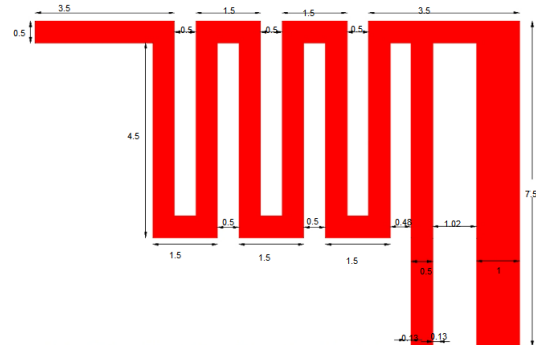

A. Electrical Characteristics

Frequency	2400 ~ 2500 MHz
S.W.R.	≤ 1.8
Gain	Max ≤ 1.99 dBi
Efficiency	$\sim 45\%$
Polarization	Linear
Impedance	50 Ohm


B. Material & Mechanical Characteristics

Material of Radiator	plated copper
----------------------	---------------

C. Environmental

Operation Temperature	- 40°C ~ + 85°C
Storage Temperature	- 40°C ~ + 105°C

3、Return Loss

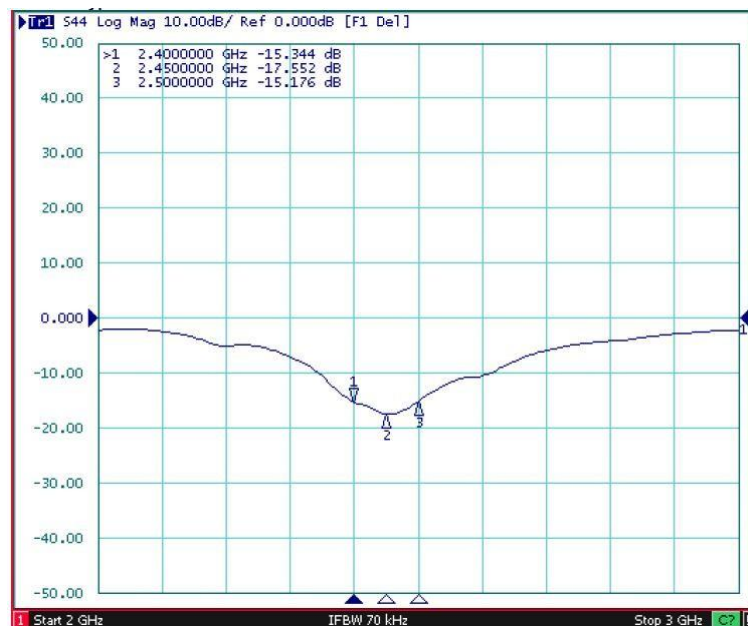

4、Radiation Patter

Radiation Pattern and Gain were dependent on measurement board design. The specification of coil antenna was measured based on the PCB size and installation position as shown in the below figure Test Board.

